

Date: 2016-06-12 Page 1 of 42

No.: DM123685

Applicant: NIMA Labs, Inc

2121 Harrison Street, San Francisco, CA 94110, USA

Manufacturer: Healthcare Technology International Ltd.

Yin Yang Industrial Zone, Zhang Mu Tou, Dong Guan City

Description of Sample(s): Submitted sample(s) said to be

Product: Portable Gluten Sensor Device

Brand Name: NIMA
Model Number: 300-00015
FCC ID: 2AISO-NIMA

Date Sample(s) Received: 2016-05-18

Date Tested: 2016-05-23 to 2016-06-08

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and ANSI C63.10: 2013 for FCC Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remark(s): Bluetooth DTS (GFSK)



ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



Date: 2016-06-12	Page 2 of 42
No.: DM123685	

CONT		
	Cover Content	Page 1 of 42 Page 2 of 42
1.0		Ü
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 3 of 42
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 42
1.3	Date of Order	Page 3 of 42
1.4	Submitted Sample(s)	Page 3 of 42
1.5	Test Duration	Page 3 of 42
1.6	Country of Origin	Page 3 of 42
1.7	RF Module Details	Page 4 of 42
1.8	Antenna Details	Page 4 of 42
1.9	Channel List	Page 4 of 42
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 42
2.2	Test Standards and Results Summary	Page 5 of 42
<u>3.0</u>	Test Results	
3.1	Emission	Page 6-37 of 42
	Appendix A	
	List of Measurement Equipment	Page 38 of 42
	Appendix B	

Page 39-42 of 42

Photographs of EUT



Date: 2016-06-12 Page 3 of 42

No.: DM123685

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Portable Gluten Sensor Device

Manufacturer: Healthcare Technology International Ltd.

Yin Yang Industrial Zone, Zhang Mu Tou, Dong Guan City

Brand Name: NIMA Model Number: 300-00015

Rating: 5Vd.c. by USB port

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Portable Gluten Sensor Device, modulation by IC; and type of modulation used is frequency hopping speed spectrum Modulation.

1.3 Date of Order

2016-05-18

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2016-05-23 to 2016-06-08

1.6 Country of Origin

China



Date: 2016-06-12 Page 4 of 42

No.: DM123685

1.7 RF Module Details

Module Model Number: Nrf51822 Module FCC ID: N/A

Module Transmission Type: Bluetooth 4.0

Modulation: GFSK Data Rates: 1Mbps

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: Mini 2.45GHz antenna

Antenna Gain: 0.5dBi

1.9 Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480



Date: 2016-06-12 Page 5 of 42

No.: DM123685

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION									
Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Te	st Resu	lt			
			Severity	Pass	Fail	N/A			
Maximum Peak Output Power	FCC 47CFR 15.247(b)(3)	ANSI C63.10: 2013	N/A						
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A						
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A						
Power Spectral Density	FCC 47CFR 15.247(e)	ANSI C63.10: 2013	N/A						
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A						
Band Edge Emissions	FCC 47CFR	ANSI C63.10: 2013	N/A	\boxtimes					
(Radiated)	15.247(d)								
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes					
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A						

Note: N/A - Not Applicable



Date: 2016-06-12 Page 6 of 42

No.: DM123685

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power

Test Requirement: FCC 47CFR 15.247(b)(3)
Test Method: ANSI C63.10: 2013


Test Date: 2016-06-02

Mode of Operation: Bluetooth DTS Tx mode

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

Test Setup:

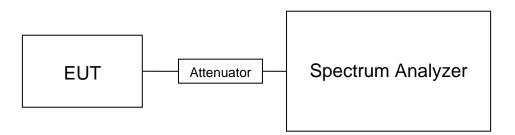

Note: a temporary antenna connector was soldered to the RF output.

Date: 2016-06-12 Page 7 of 42

No.: DM123685

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of BT DTS Tx Mode (2402MHz to 2480MHz) : Pass (TX Unit) (GFSK) Maximum conducted output power						
Channel	Frequency(MHz)	Output Power(Watt)				
0	2402	0.000364				
19	2442	0.000216				
39	2480	0.000129				

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB

1GHz to 26GHz 1.7dB




Date: 2016-06-12 Page 8 of 42

No.: DM123685

Test plot of Maximum Peak Conducted Output Power:

Bluetooth Communication mode (BT DTS-GFSK, 2402MHz)

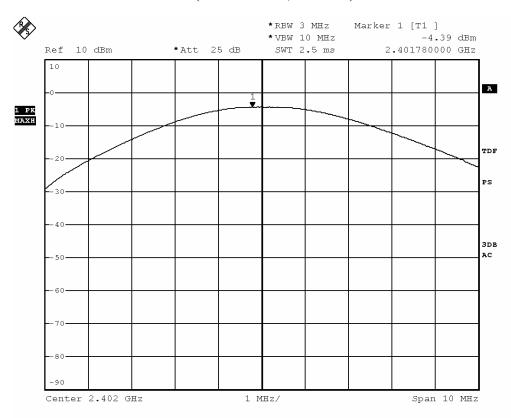

вмр


Date: 2.JUN.2016 15:59:17



Date: 2016-06-12 Page 9 of 42

No.: DM123685

Bluetooth Communication mode (BT DTS-GFSK, 2442MHz)

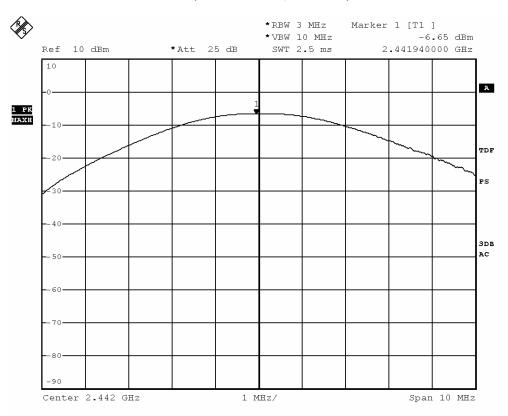

DMD


Date: 2.JUN.2016 15:59:46



Date: 2016-06-12 Page 10 of 42

No.: DM123685

Bluetooth Communication mode (BT DTS-GFSK, 2480MHz)

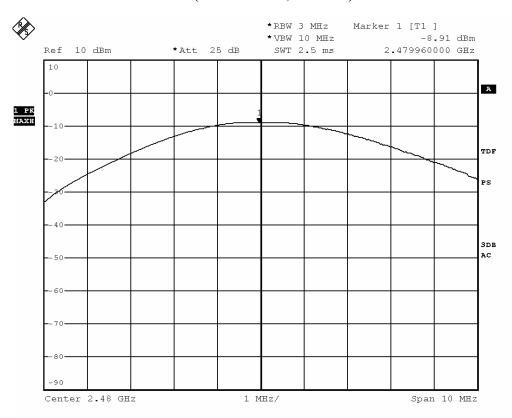

ВМР

Date: 2.JUN.2016 16:01:08



Date: 2016-06-12 Page 11 of 42

No.: DM123685

3.1.2 Radiated Emissions

Test Requirement: FCC 47CFR 15.209 Test Method: ANSI C63.10:2013

Test Date: 2016-05-23


Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK)

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

Test Setup:

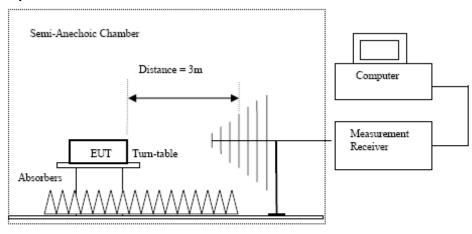

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz hom antennas are used, 9kHz to 30MHz loop antennas are used.



Date: 2016-06-12 Page 12 of 42

No.: DM123685

Limits for Radiated Emissions [FCC 47 CFR 15.247 Class B]:

Elinits for Radiated Elinissions [Fee 47 CFR 13.247 Class b].						
Frequency Range	Quasi-Peak Limits					
[MHz]	$[\mu V/m]$					
0.009-0.490	2400/F (kHz)					
0.490-1.705	24000/F (kHz)					
1.705-30	30					
30-88	100					
88-216	150					
216-960	200					
Above960	500					

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Result of 1x mode (2402.0 MHz) (GFSR) (7RHz – 30MHz). 1 ass							
Field Strength of Spurious Emissions							
	Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m	_	Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m			
4804.0	13.4	41.5	54.9	74.0	19.1	Vertical		
4804.0	12.2	42.4	54.6	74.0	19.4	Horizontal		
7206.0	8.1	45.1	53.2	74.0	20.8	Vertical		
7206.0	7.9	46.2	54.1	74.0	19.9	Horizontal		
9608.0	6.3	48.0	54.3	74.0	19.7	Vertical		
9608.0	4.8	48.8	53.6	74.0	20.4	Horizontal		
12010.0	3.8	51.8	55.6	74.0	18.4	Vertical		
12010.0	3.2	52.4	55.6	74.0	18.4	Horizontal		



Date: 2016-06-12 Page 13 of 42

No.: DM123685

	Field Strength of Spurious Emissions Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dBμV/m			
4804.0	-2.8	41.5	38.7	54.0	15.3	Vertical		
4804.0	-4.0	42.4	38.4	54.0	15.6	Horizontal		
7206.0	-7.0	45.1	38.1	54.0	15.9	Vertical		
7206.0	-8.0	46.2	38.2	54.0	15.8	Horizontal		
9608.0	-9.8	48.0	38.2	54.0	15.8	Vertical		
9608.0	-10.6	48.8	38.2	54.0	15.8	Horizontal		
12010.0	-12.8	51.8	39.0	54.0	15.0	Vertical		
12010.0	-13.9	52.4	38.5	54.0	15.5	Horizontal		

Result of Tx mode (2442.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2442.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dBμV/m		
4880.0	12.9	41.6	54.5	74.0	19.5	Vertical	
4880.0	11.6	42.5	54.1	74.0	19.9	Horizontal	
7320.0	0.9	53.2	54.1	74.0	19.9	Vertical	
7320.0	8.0	46.3	54.3	74.0	19.7	Horizontal	
9760.0	6.2	48.1	54.3	74.0	19.7	Vertical	
9760.0	5.1	48.9	54.0	74.0	20.0	Horizontal	
12200.0	3.7	51.6	55.3	74.0	18.7	Vertical	
12200.0	3.4	52.5	55.9	74.0	18.1	Horizontal	



Date: 2016-06-12 Page 14 of 42

No.: DM123685

	Field Strength of Spurious Emissions						
		A	verage Valu	e			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	$dB\mu V/m$		
4880.0	-3.2	41.6	38.4	54.0	15.6	Vertical	
4880.0	-4.3	42.5	38.2	54.0	15.8	Horizontal	
7320.0	-7.0	45.2	38.2	54.0	15.8	Vertical	
7320.0	-8.2	46.3	38.1	54.0	15.9	Horizontal	
9760.0	-9.7	48.1	38.4	54.0	15.6	Vertical	
9760.0	-10.5	48.9	38.4	54.0	15.6	Horizontal	
12200.0	-13.5	51.6	38.1	54.0	15.9	Vertical	
12200.0	-14.1	52.5	38.4	54.0	15.6	Horizontal	

Result of Tx mode (2480.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dBμV/m	
4960.0	12.6	41.4	54.0	74.0	20.0	Vertical
4960.0	11.2	42.7	53.9	74.0	20.1	Horizontal
7440.0	8.3	45.6	53.9	74.0	20.1	Vertical
7440.0	7.6	46.5	54.1	74.0	19.9	Horizontal
9920.0	5.5	48.6	54.1	74.0	19.9	Vertical
9920.0	4.3	49.7	54.0	74.0	20.0	Horizontal
12400.0	3.9	51.7	55.6	74.0	18.4	Vertical
12400.0	3.1	52.7	55.8	74.0	18.2	Horizontal



Date: 2016-06-12 Page 15 of 42

No.: DM123685

	Field Strength of Spurious Emissions Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m	
4960.0	-3.4	41.4	38.0	54.0	16.0	Vertical
4960.0	-4.7	42.7	38.0	54.0	16.0	Horizontal
7440.0	-7.5	45.6	38.1	54.0	15.9	Vertical
7440.0	-7.3	46.5	39.2	54.0	14.8	Horizontal
9920.0	-10.5	48.6	38.1	54.0	15.9	Vertical
9920.0	-11.3	49.7	38.4	54.0	15.6	Horizontal
12400.0	-13.2	51.7	38.5	54.0	15.5	Vertical
12400.0	-13.9	52.7	38.8	54.0	15.2	Horizontal

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement (9kHz - 30MHz): 3.3dB uncertainty (30MHz - 1GHz): 4.6dB

(1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2016-06-12 Page 16 of 42

No.: DM123685


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilis for Radiated Emissions [1 ee 17 eff 13.207 emiss b].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details

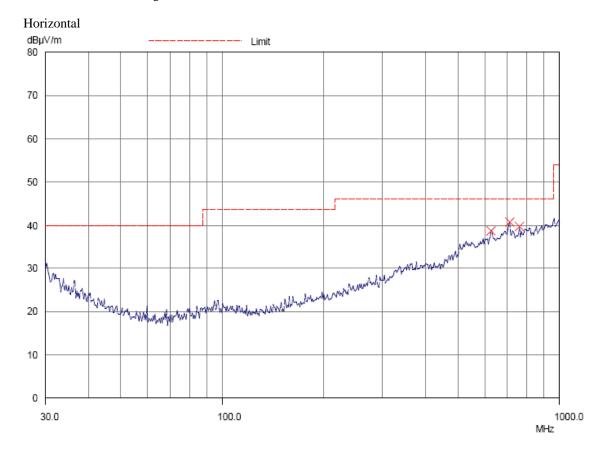



Date: 2016-06-12 Page 17 of 42

No.: DM123685

Result of Bluetooth Communication mode (2402.0 MHz) (30MHz - 1GHz): Pass

Acsult of Diactooth Communication mode (2402.0 Millz) (30Millz 1011z). I ass					
Radiated Emissions					
Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency	Polarity	@3m	@3m	@3m	@3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
623.9	Horizontal	38.7	46.0	86.1	200
711.3	Horizontal	40.8	46.0	109.6	200
758.2	Horizontal	39.8	46.0	97.7	200



Date: 2016-06-12 Page 18 of 42

No.: DM123685


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Elimits for Radiated Elimissions [1 ee 47 ef R 15:207 elass b].					
Frequency Range	Quasi-Peak Limits				
[MHz]	$[\mu V/m]$				
0.009-0.490	2400/F (kHz)				
0.490-1.705	24000/F (kHz)				
1.705-30	30				
30-88	100				
88-216	150				
216-960	200				
Above960	500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details

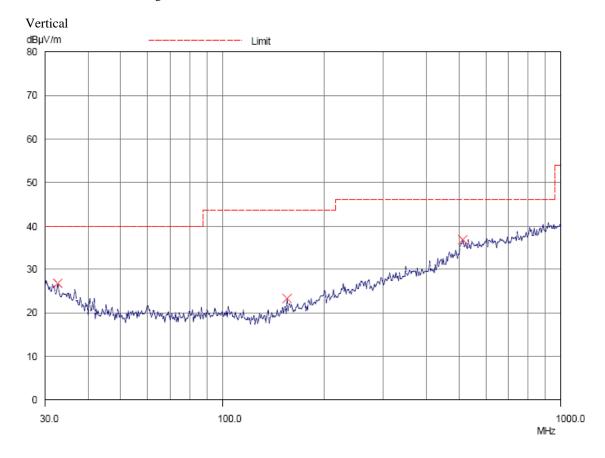



Date: 2016-06-12 Page 19 of 42

No.: DM123685

Result of Bluetooth Communication mode (2402.0 MHz) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency MHz	Polarity	@3m dBµV/m	@3m dBµV/m	@3m µV/m	@3m µV/m
32.6	Vertical	26.8	40.0	21.9	100
155.4	Vertical	23.3	43.5	14.6	150
511.9	Vertical	36.8	46.0	69.2	200

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2016-06-12 Page 20 of 42

No.: DM123685

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)


Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.10: 2013

Test Date: 2016-05-23 Mode of Operation: Charge mode Test Voltage: 120Va.c. 60Hz

Test Method:

The test was performed in accordance with ANSI C63.10: 2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

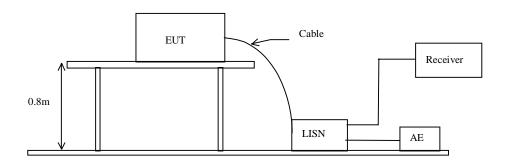



Date: 2016-06-12 Page 21 of 42

No.: DM123685

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dBμV]	Average [dBuV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Charge mode (L): PASS

Please refer to the following diagram for individual results.

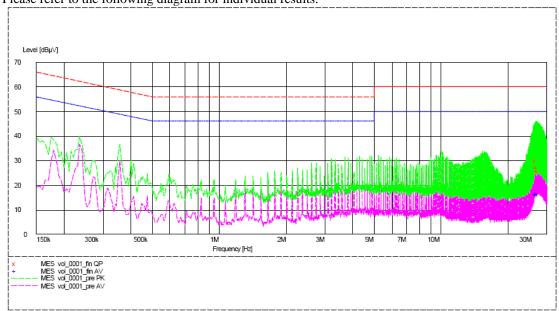

		Quasi-peak		Ave	rage
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	26.705	29.9	60.0	_*_	_*_
Live	26.830	27.2	60.0	_*_	_*_
Live	27.200	26.0	60.0	_*_	_*_
Live	26.705	_*_	_*_	16.3	50.0
Live	26.830	_*_	_*_	16.3	50.0
Live	27.075	_*_	_*_	16.3	50.0



Date: 2016-06-12 Page 22 of 42

No.: DM123685

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Charge mode (N): PASS

Please refer to the following diagram for individual results.

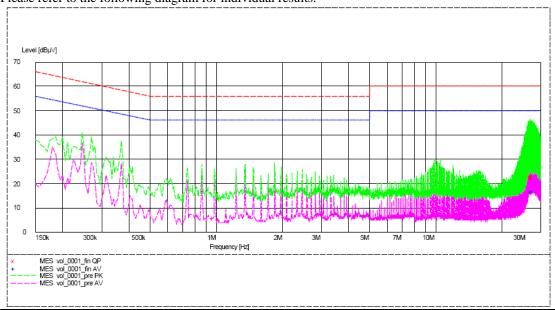

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	26.845	23.0	60.0	_*_	_*_
Neutral	27.340	22.7	60.0	_*_	_*_
Neutral	27.465	22.7	60.0	_*_	_*_
Neutral	27.215	_*_	_*_	16.4	50.0
Neutral	27.340	_*_	_*_	16.5	50.0
Neutral	27.465	_*_	_*_	16.6	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.

STC (Dongguan) Company Limited



Date: 2016-06-12 Page 23 of 42

No.: DM123685

3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)
Test Method: ANSI C63.10: 2013

Test Date: 2016-06-02

Mode of Operation: Bluetooth DTS Tx mode

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz , VBW= 10 KHz , Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Results of Bluetooth DTS Mode (Tx:2402MHz to 2480MHz): Pass (TX Unit) Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band	Maximum Power spectral density / 3kHz band limit
(IVIIIZ)	(dBm)	/ Skiiz band mint
2402.0	-18.16	8dBm
2442.0	-20.25	8dBm
2480.0	-22.19	8dBm




Date: 2016-06-12 Page 24 of 42

No.: DM123685

Bluetooth DTS mode (Tx: 2402MHz to 2480MHz)

2402.0 MHz

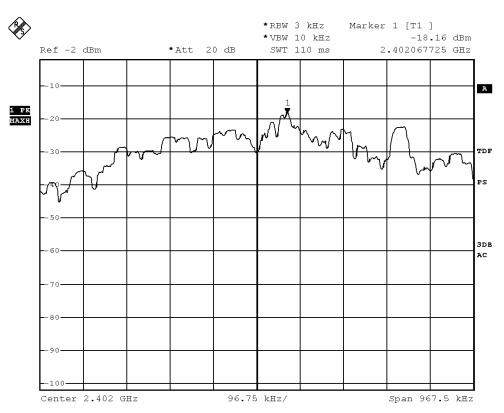

BMP


Date: 2.JUN.2016 15:58:34



Date: 2016-06-12 Page 25 of 42

No.: DM123685

2442.0 MHz

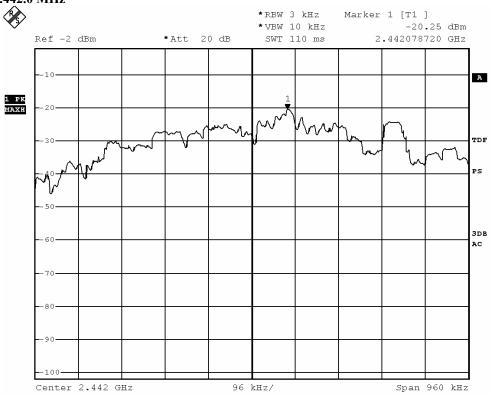

ВМР


Date: 2.JUN.2016 15:57:20



Date: 2016-06-12 Page 26 of 42

No.: DM123685

2480.0 MHz

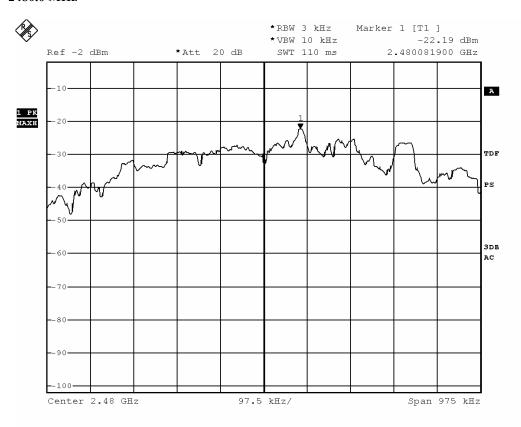

BMP

Date: 2.JUN.2016 15:56:10



Date: 2016-06-12 Page 27 of 42

No.: DM123685

3.1.5 6dB Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(2)
Test Method: ANSI C63.10: 2013

Test Date: 2016-06-02

Mode of Operation: Bluetooth DTS Tx mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date: 2016-06-12 Page 28 of 42

No.: DM123685

Limits for 6dB Bandwidth Measurement:

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
2402.0	645	> 500

6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2402MHz)

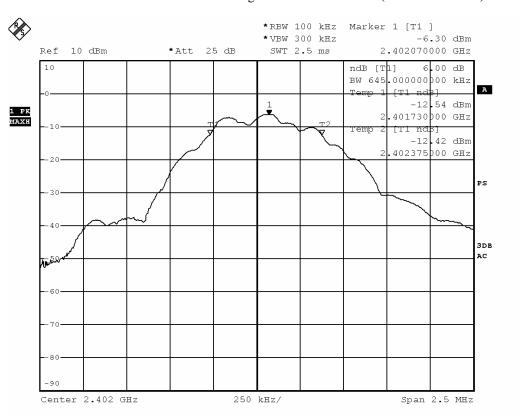

 BMP

Date: 2.JUN.2016 15:51:20




Date: 2016-06-12 Page 29 of 42

No.: DM123685

Limits for 6dB Bandwidth Measurement:

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
2442.0	645	> 500

6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2440MHz)

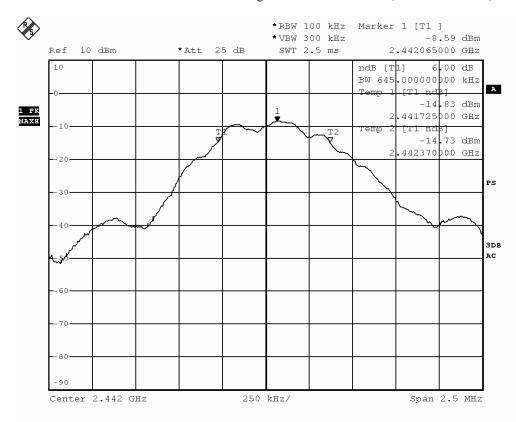

ВМР

Date: 2.JUN.2016 15:52:54




Date: 2016-06-12 Page 30 of 42

No.: DM123685

Limits for 6dB Bandwidth Measurement:

Center Frequ	nency 6dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
2480.0	650	> 500

6 dB Bandwidth Plot on Configuration Bluetooth DTS (GFSK: 2480MHz)

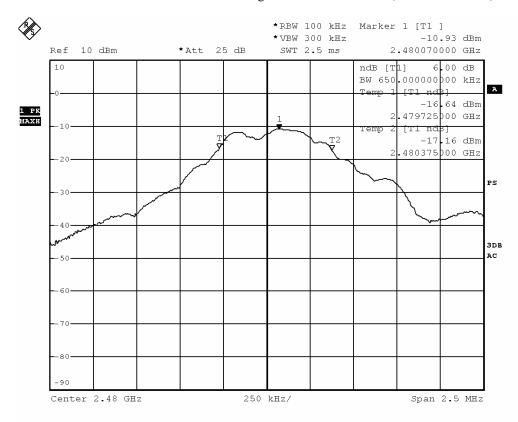

ВМР

Date: 2.JUN.2016 15:54:32



Date: 2016-06-12 Page 31 of 42

No.: DM123685

3.1.6 Band Edges Measurement

Test Requirement: FCC 47CFR 15.247 Test Method: ANSI C63.10: 2013

Test Date: 2016-06-02

Mode of Operation: Bluetooth DTS Tx mode

Test Method:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW are set to 100kHz and VBW are set to 300kHz for this measurement.

Test Setup:

As Test Setup of clause 3.1.2 in this test report.



Date: 2016-06-12 Page 32 of 42

No.: DM123685


Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	46.43

Band-edge Compliance of RF Conducted Emissions – Lowest (GFSK: Bluetooth DTS mode 2402MHz)

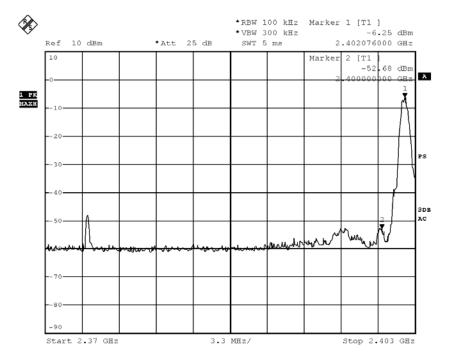

BMP

Date: 2.JUN.2016 16:08:06




Date: 2016-06-12 Page 33 of 42

No.: DM123685

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	39.46

Band-edge Compliance of RF Conducted Emissions – Highest (GFSK: Bluetooth DTS mode 2480MHz)

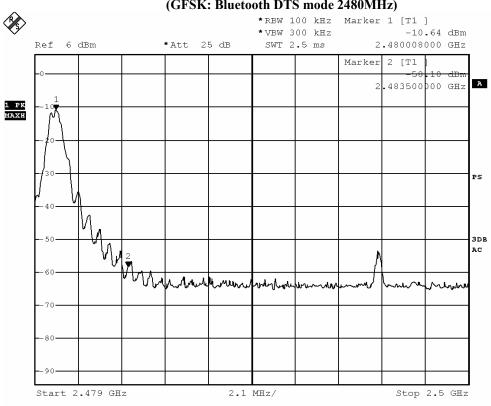

 BMP

Date: 2.JUN.2016 16:06:01

Date: 2016-06-12 Page 34 of 42

No.: DM123685

Band-edge Compliance of RF Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (Lowest)

Field Strength of Band-edge Compliance								
	Peak Value							
Frequency	Frequency Measured Correction Field Limit Margin E-Field							
Level @3m Factor			Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
2390.0	13.5	36.8	50.3	74.0	23.7	Vertical		

Field Strength of Band-edge Compliance								
		A	verage Valu	e				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
2390.0	1.0	36.8	37.8	54.0	16.2	Vertical		

Result: Band-edge Compliance of RF Radiated Emissions (Highest)

Field Strength of Band-edge Compliance									
	Peak Value								
Frequency	Frequency Measured Correction Field Limit Margin E-Field								
Level @3m Fac			Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\muV/m$	$dB\mu V/m$				
2483.5	7.7	36.8	44.5	74.0	29.5	Vertical			

Field Strength of Band-edge Compliance									
	Average Value								
Frequency Measured Correction Field Limit Margin E-Field									
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$				
2483.5	-0.5	36.8	36.3	54.0	17.7	Vertical			



Date: 2016-06-12 Page 35 of 42


No.: DM123685

Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

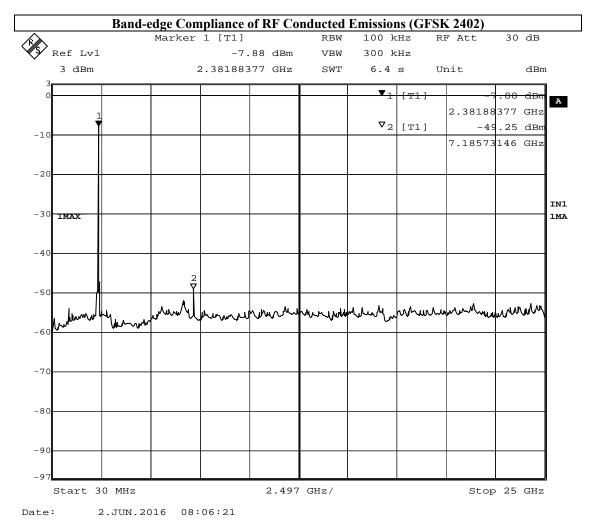



Date: 2016-06-12 Page 36 of 42

No.: DM123685

3.1.7 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is Mini 2.45GHz antenna. There is no external antenna, the antenna gain = 0.5dBi. All component install on inside of EUT. User unable to remove or changed the Antenna.



Date: 2016-06-12 Page 37 of 42

No.: DM123685

3.1.8 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2016-06-08 Mode of Operation: Tx mode

Requirements:

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter.

Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB 447498 D01 General RF Exposure Guidance v06, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

Test Results:

RF Exposure Evaluation

The Maximum conducted output power = 0.364 mW (at frequency = 2.402 GHz)

It's Conducted source-based time-averaging output power = 0.321 mW (at frequency = 2.402 GHz)

Since the SAR test exclusion thresholds for 2450MHz at test separation distances \leq 5 mm = 10mW and the Conducted source-based time-averaging output power is less than 10mW.

Therefore. the SAR evaluation can be exempted.



Date: 2016-06-12 Page 38 of 42

No.: DM123685

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2016.3.29	2017.3.29
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2016.3.29	2017.3.29
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2016.3.29	2017.3.29
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2016.3.29	2017.3.29
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2016.3.29	2017.3.29
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2016.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2016.3.29	2017.3.29
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2016.3.29	2017.3.29
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2016.3.29	2017.3.29
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2015.04.28	2017.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.04.09	2017.04.09
RE01	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27
RE02	RF cable	N/A	N/A	N/A	2014-9-28	2016-9-27

Remarks:-

N/A Not Applicable or Not Available



Date: 2016-06-12 Page 39 of 42

No.: DM123685

Appendix B

Photographs of EUT


Front View of the product



Inside View of the product




Inner Circuit Top View




Rear View of the product



Inside View of the product



Inner Circuit Bottom View





Date: 2016-06-12 Page 40 of 42

No.: DM123685

Photographs of EUT

Inner Circuit Top View









Date: 2016-06-12 Page 41 of 42

No.: DM123685

Photographs of EUT

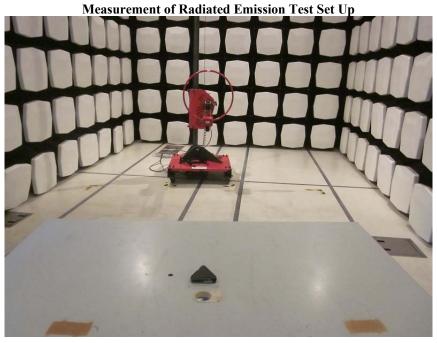

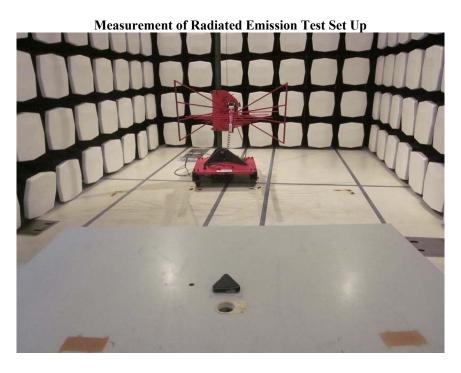

STC (Dongguan) Company Limited



Date: 2016-06-12 Page 42 of 42

No.: DM123685

Photographs of EUT

Measurement of Radiated Emission Test Set Up

Measurement of Radiated Emission Test Set Up

Measurement of Conducted Emission Test Set Up

**** End of Test Report ****

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org