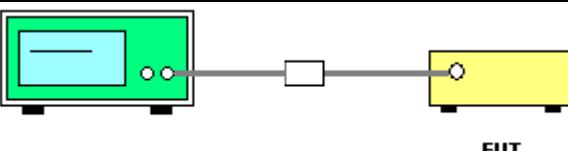


6.5. Power Spectral Density

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = RMS, Sweep time = auto couple. 6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test data(worst)

Ant1

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
WSCT	2412	-12.72	8	Pass
b	2437	-11.46	8	Pass
b	2462	-11.87	8	Pass
g	2412	-15.62	8	Pass
g	2437	-16.5	8	Pass
g	2462	-16.03	8	Pass
n20	2412	-15.13	8	Pass
n20	2437	-16.47	8	Pass
n20	2462	-15.18	8	Pass
n40	2422	-19.59	8	Pass
n40	2437	-18.93	8	Pass
n40	2452	-20.88	8	Pass
ax20	2412	-17.02	8	Pass
ax20	2437	-17.14	8	Pass
ax20	2462	-16.86	8	Pass
ax40	2422	-21.19	8	Pass
ax40	2437	-21.19	8	Pass
ax40	2452	-20.39	8	Pass

Ant2

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-8.75	8	Pass
b	2437	-8.69	8	Pass
b	2462	-8.84	8	Pass
g	2412	-12.27	8	Pass
g	2437	-14.14	8	Pass
g	2462	-13.17	8	Pass
n20	2412	-12.53	8	Pass
n20	2437	-13.51	8	Pass
n20	2462	-13.38	8	Pass
n40	2422	-17.09	8	Pass
n40	2437	-18.67	8	Pass
n40	2452	-17.01	8	Pass
ax20	2412	-15	8	Pass
ax20	2437	-15.35	8	Pass
ax20	2462	-15.13	8	Pass
ax40	2422	-17.57	8	Pass
ax40	2437	-17.45	8	Pass
ax40	2452	-18.23	8	Pass


Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1


Issued Date: 20 June 2025


MIMO


Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
n20	2412	-10.63	8	Pass
n20	2437	-11.73	8	Pass
n20	2462	-11.18	8	Pass
n40	2422	-15.15	8	Pass
n40	2437	-15.79	8	Pass
n40	2452	-15.52	8	Pass
ax20	2412	-12.88	8	Pass
ax20	2437	-13.14	8	Pass
ax20	2462	-12.90	8	Pass
ax40	2422	-16.00	8	Pass
ax40	2437	-15.92	8	Pass
ax40	2452	-16.17	8	Pass




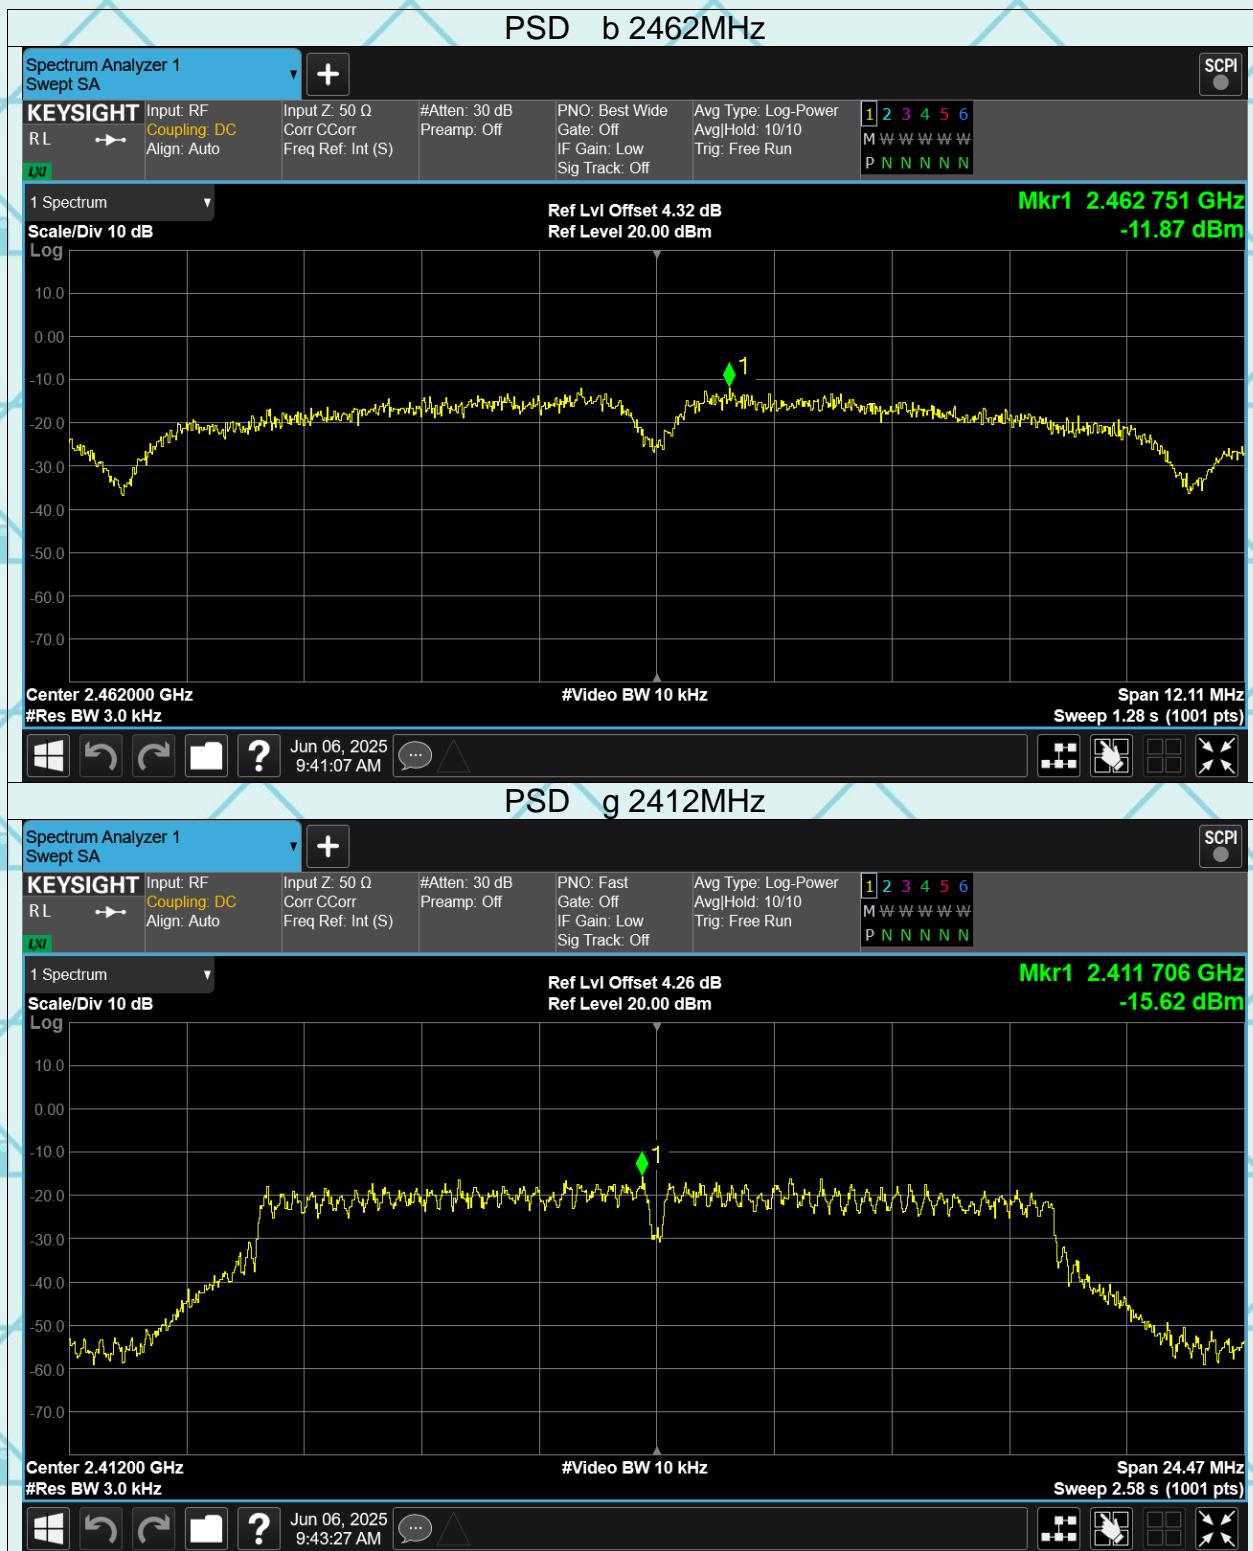


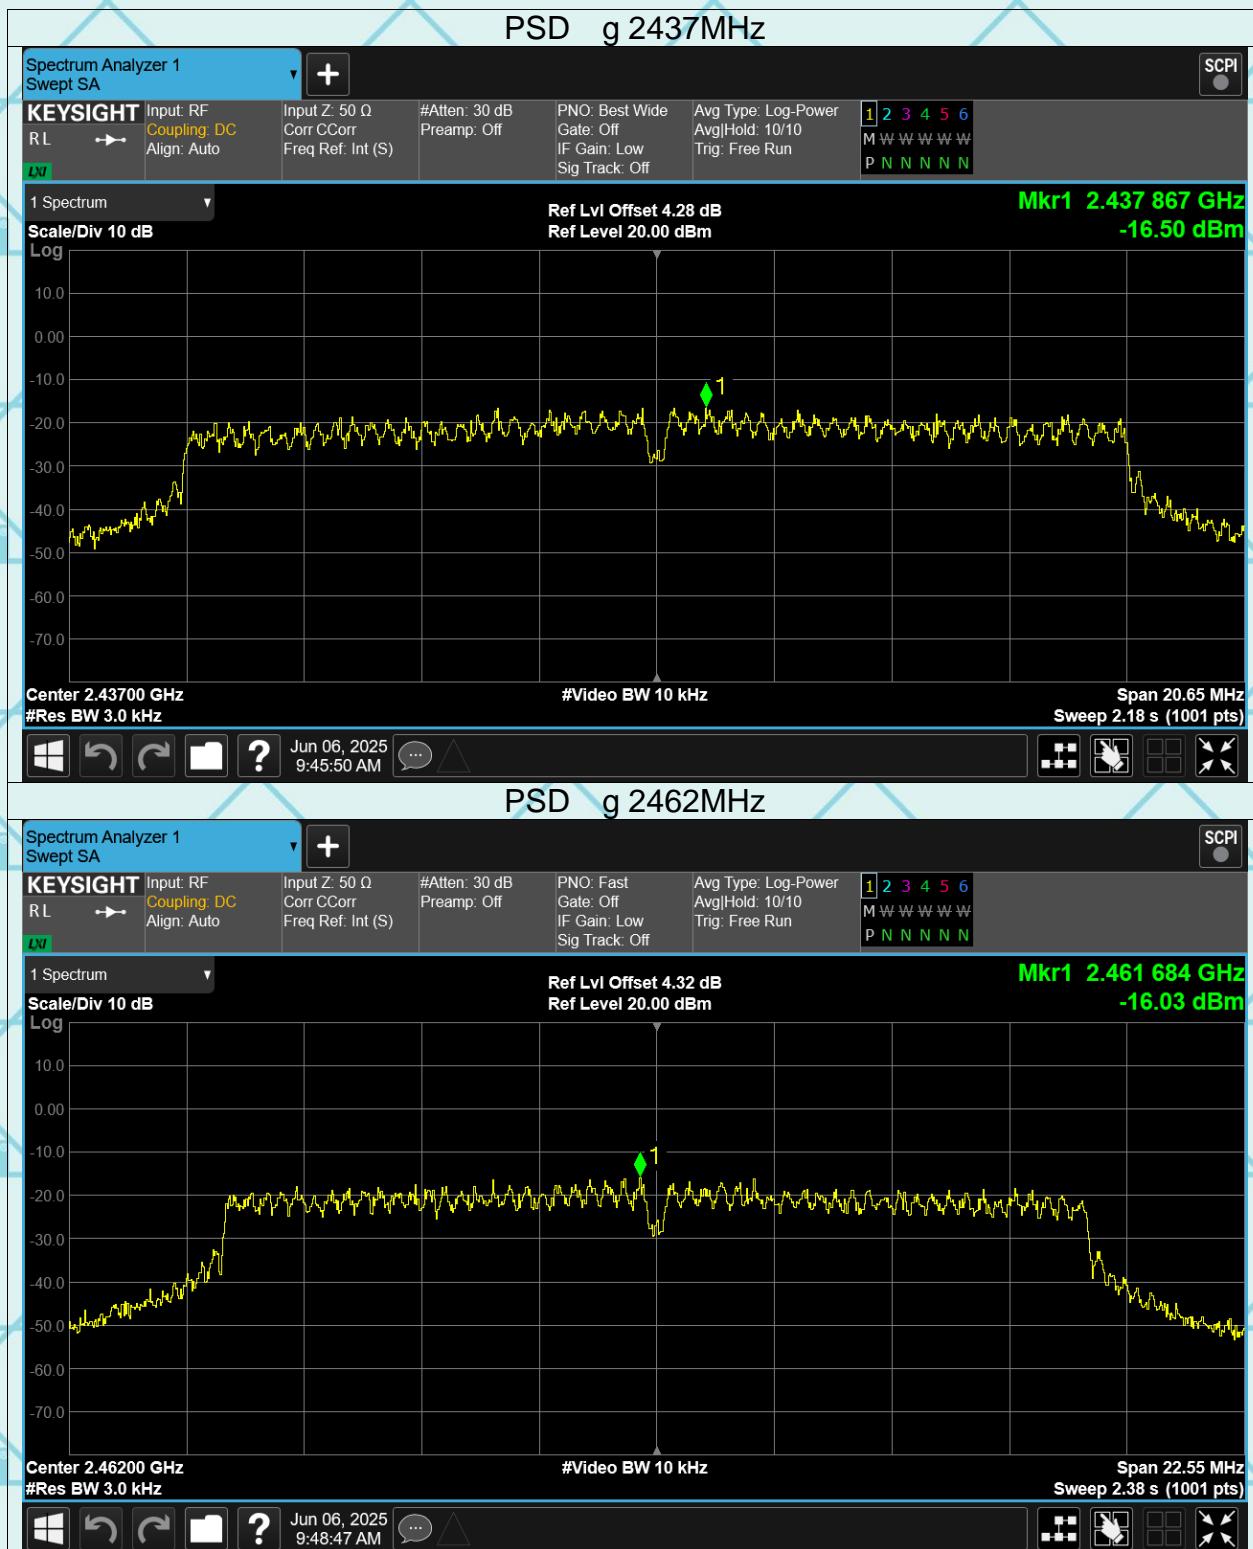


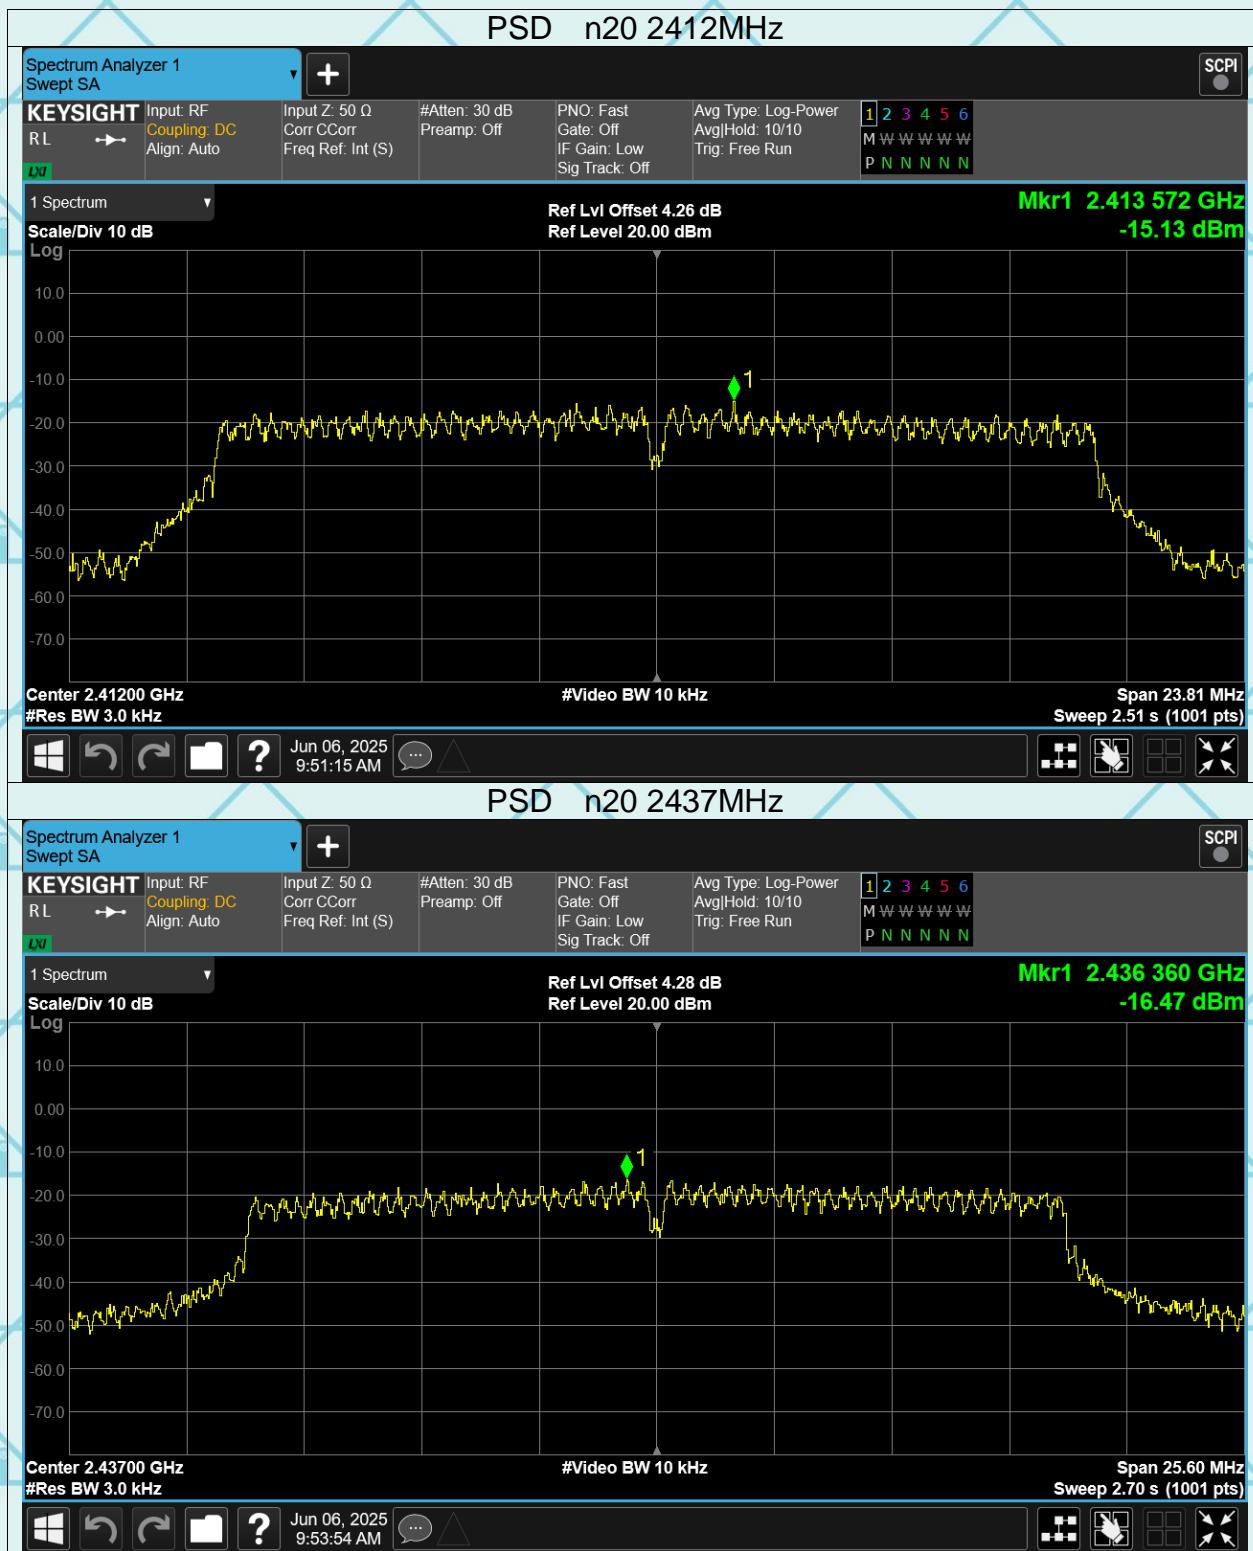

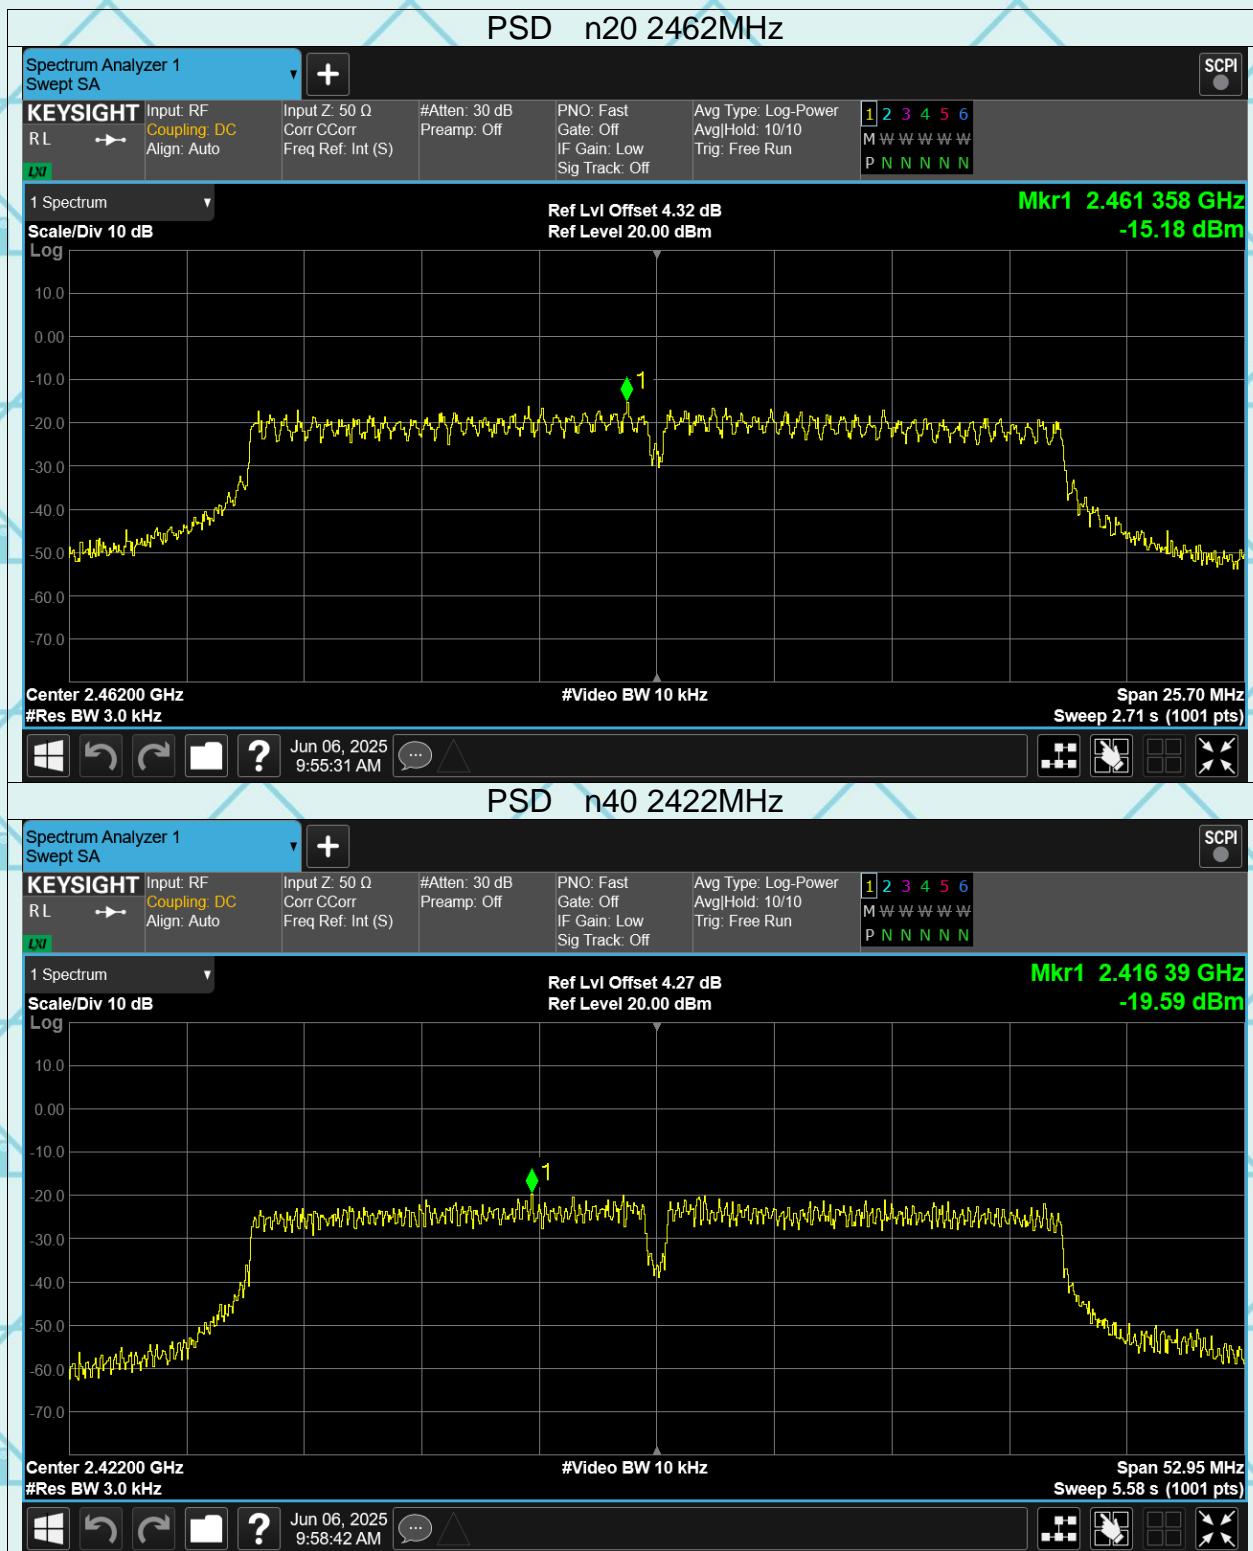

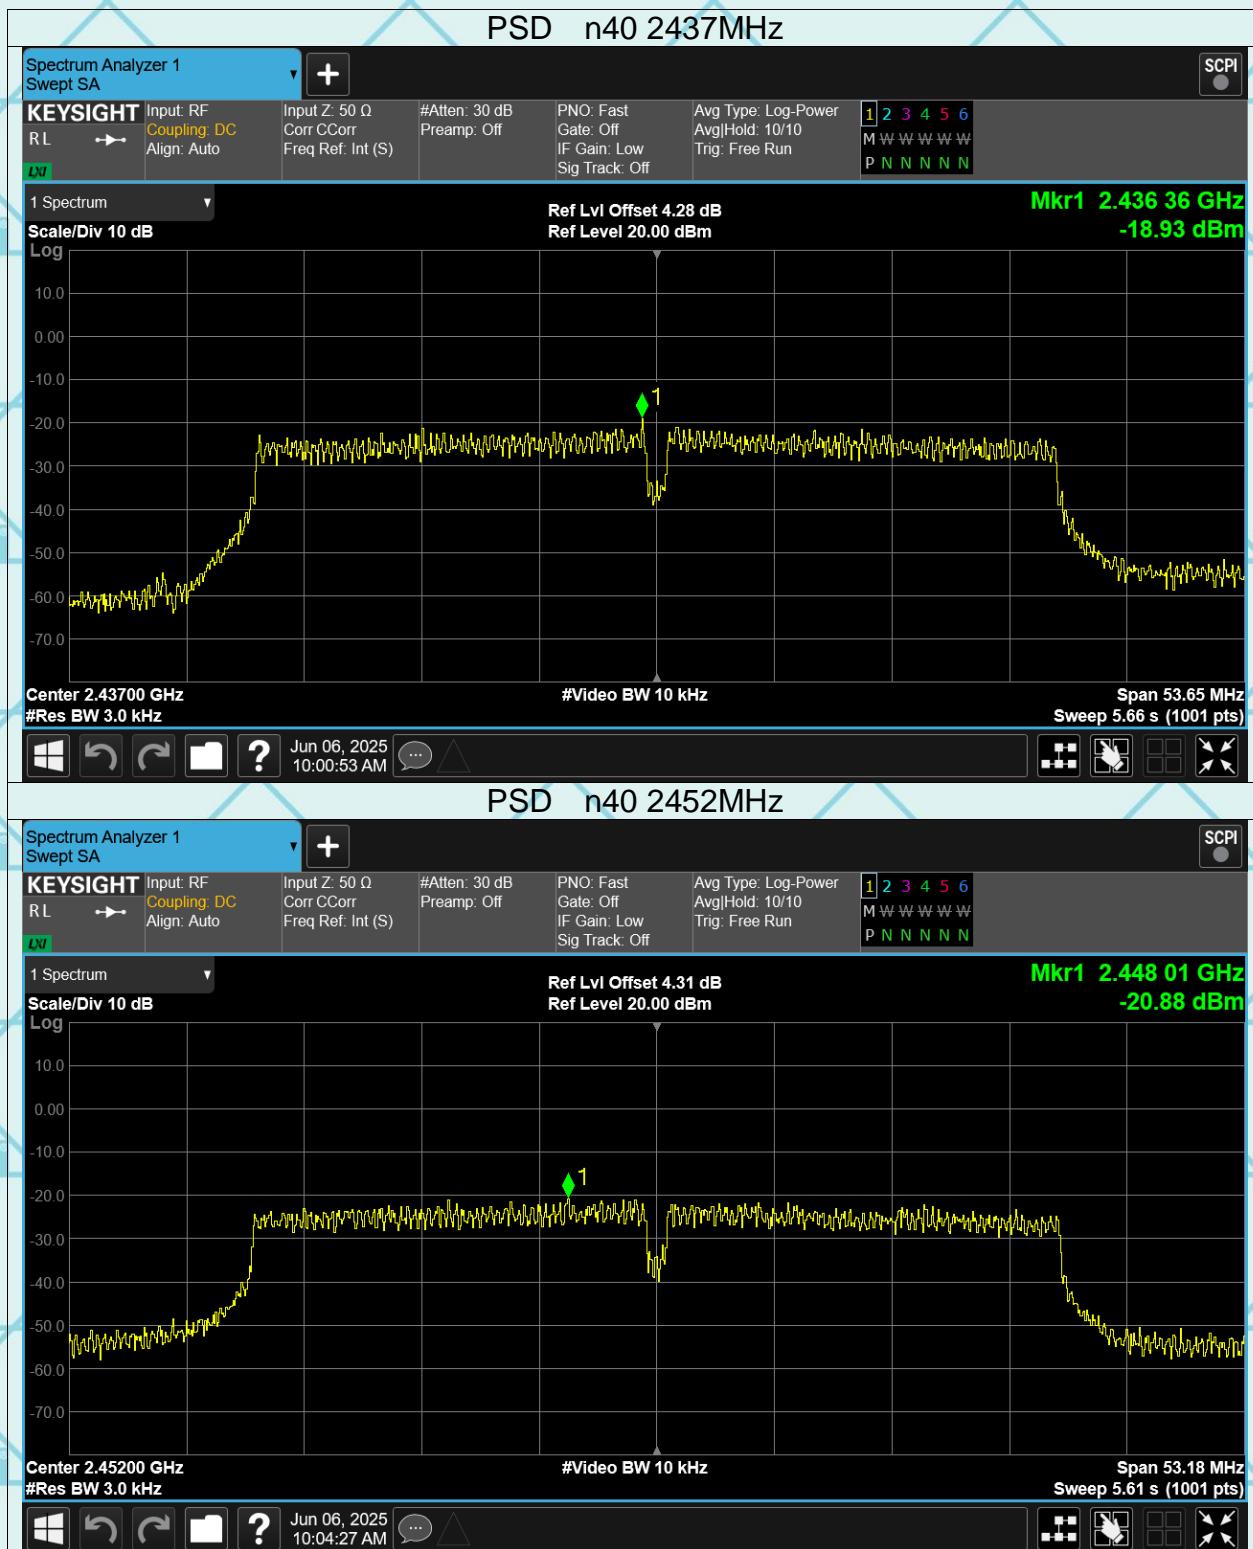

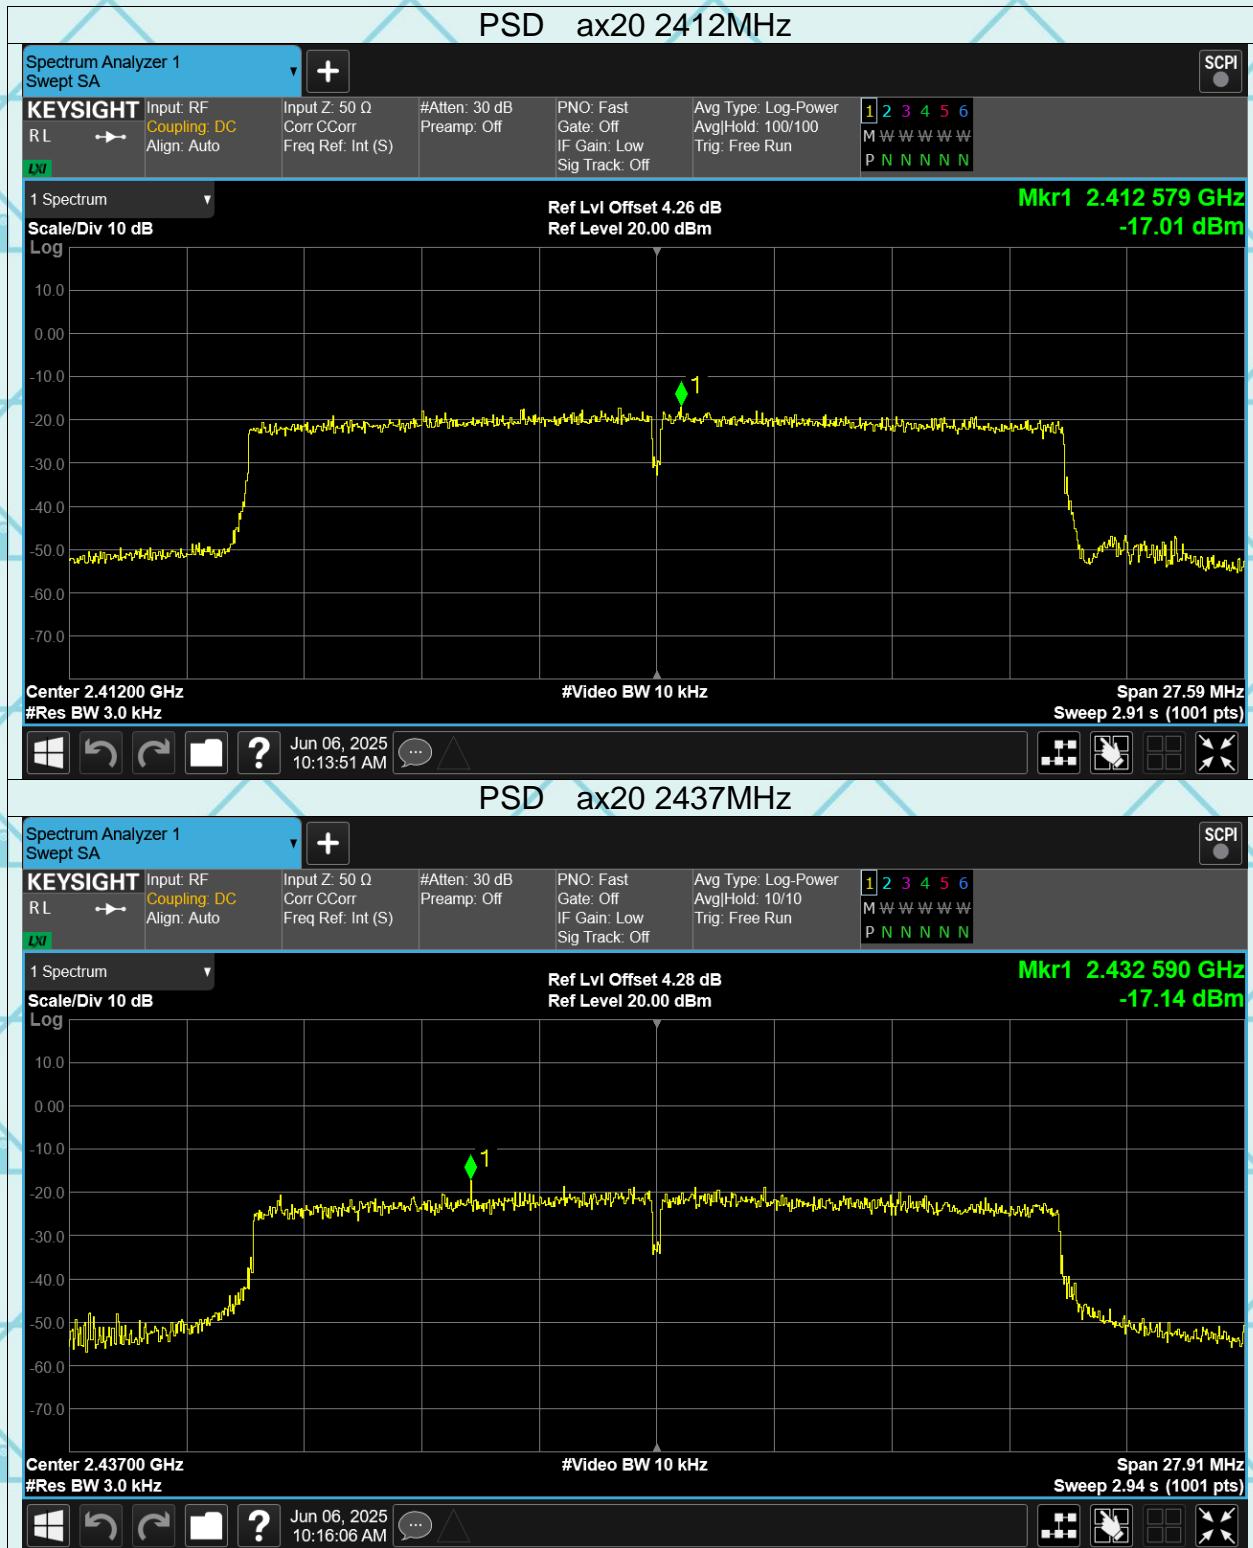

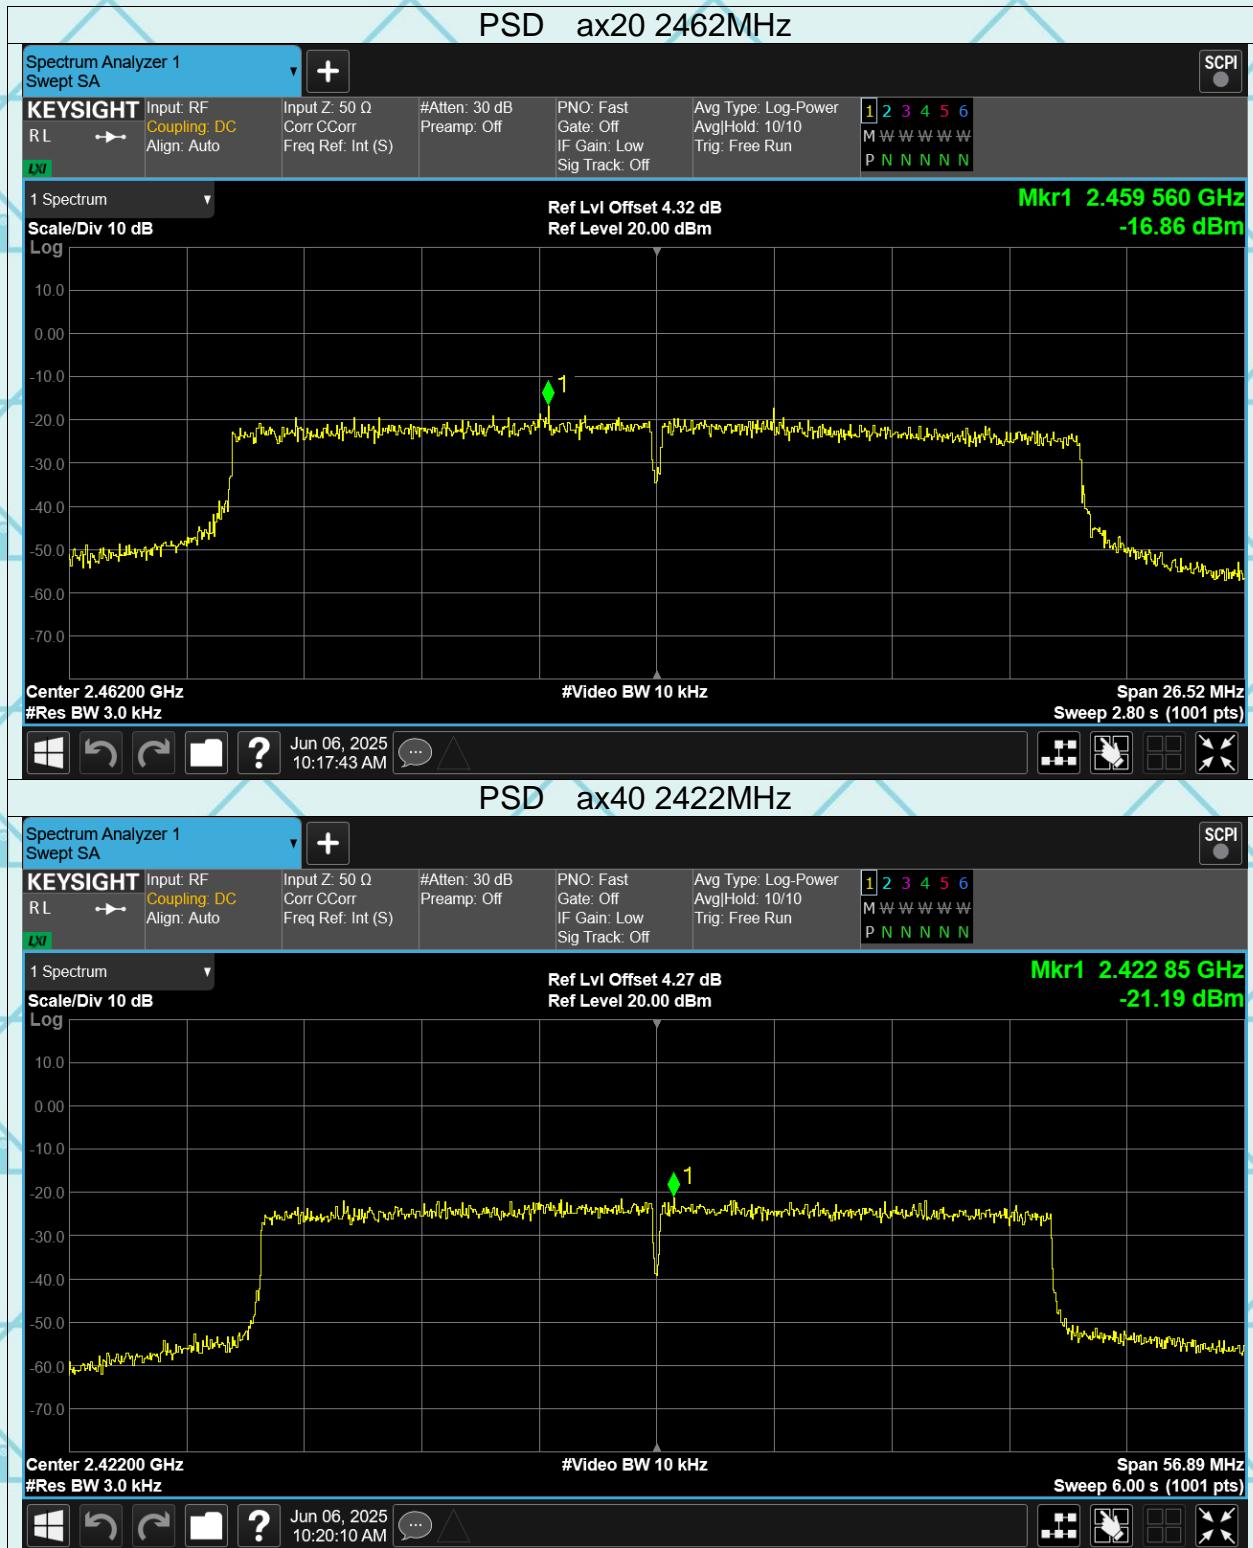





Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1


Issued Date: 20 June 2025


ANT2




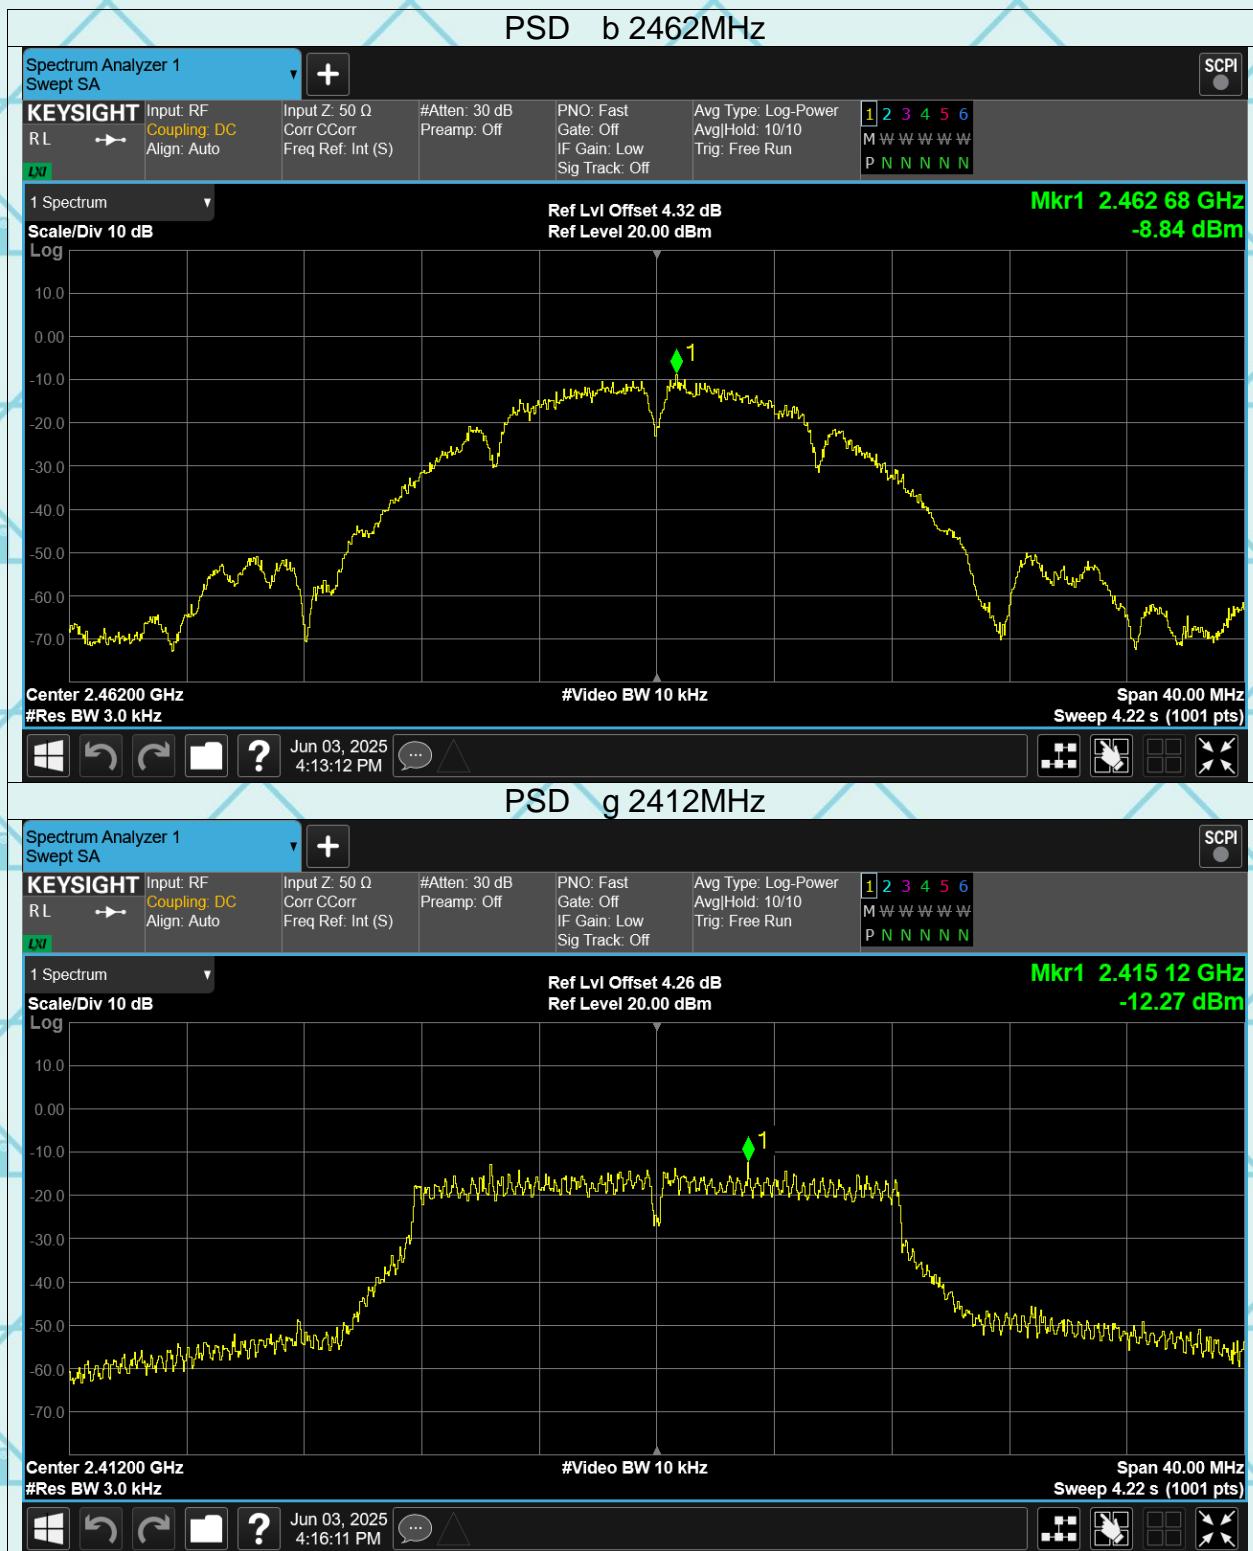


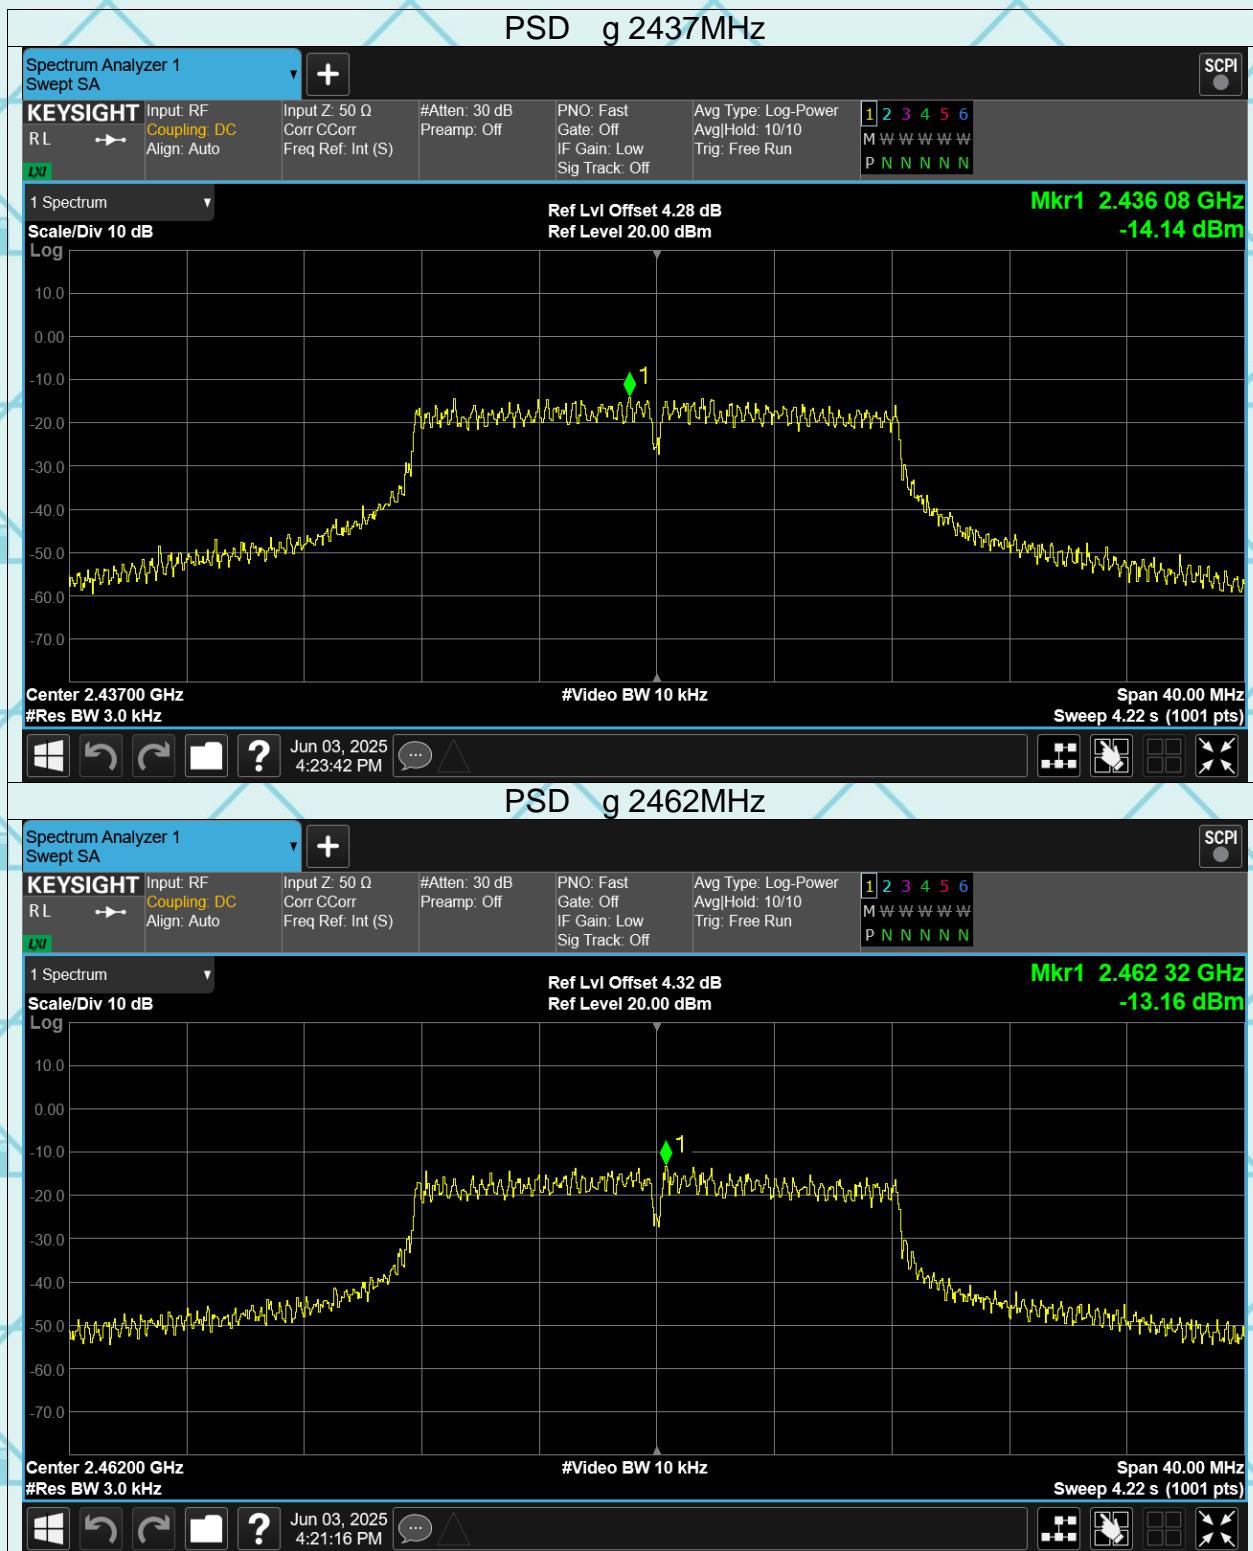


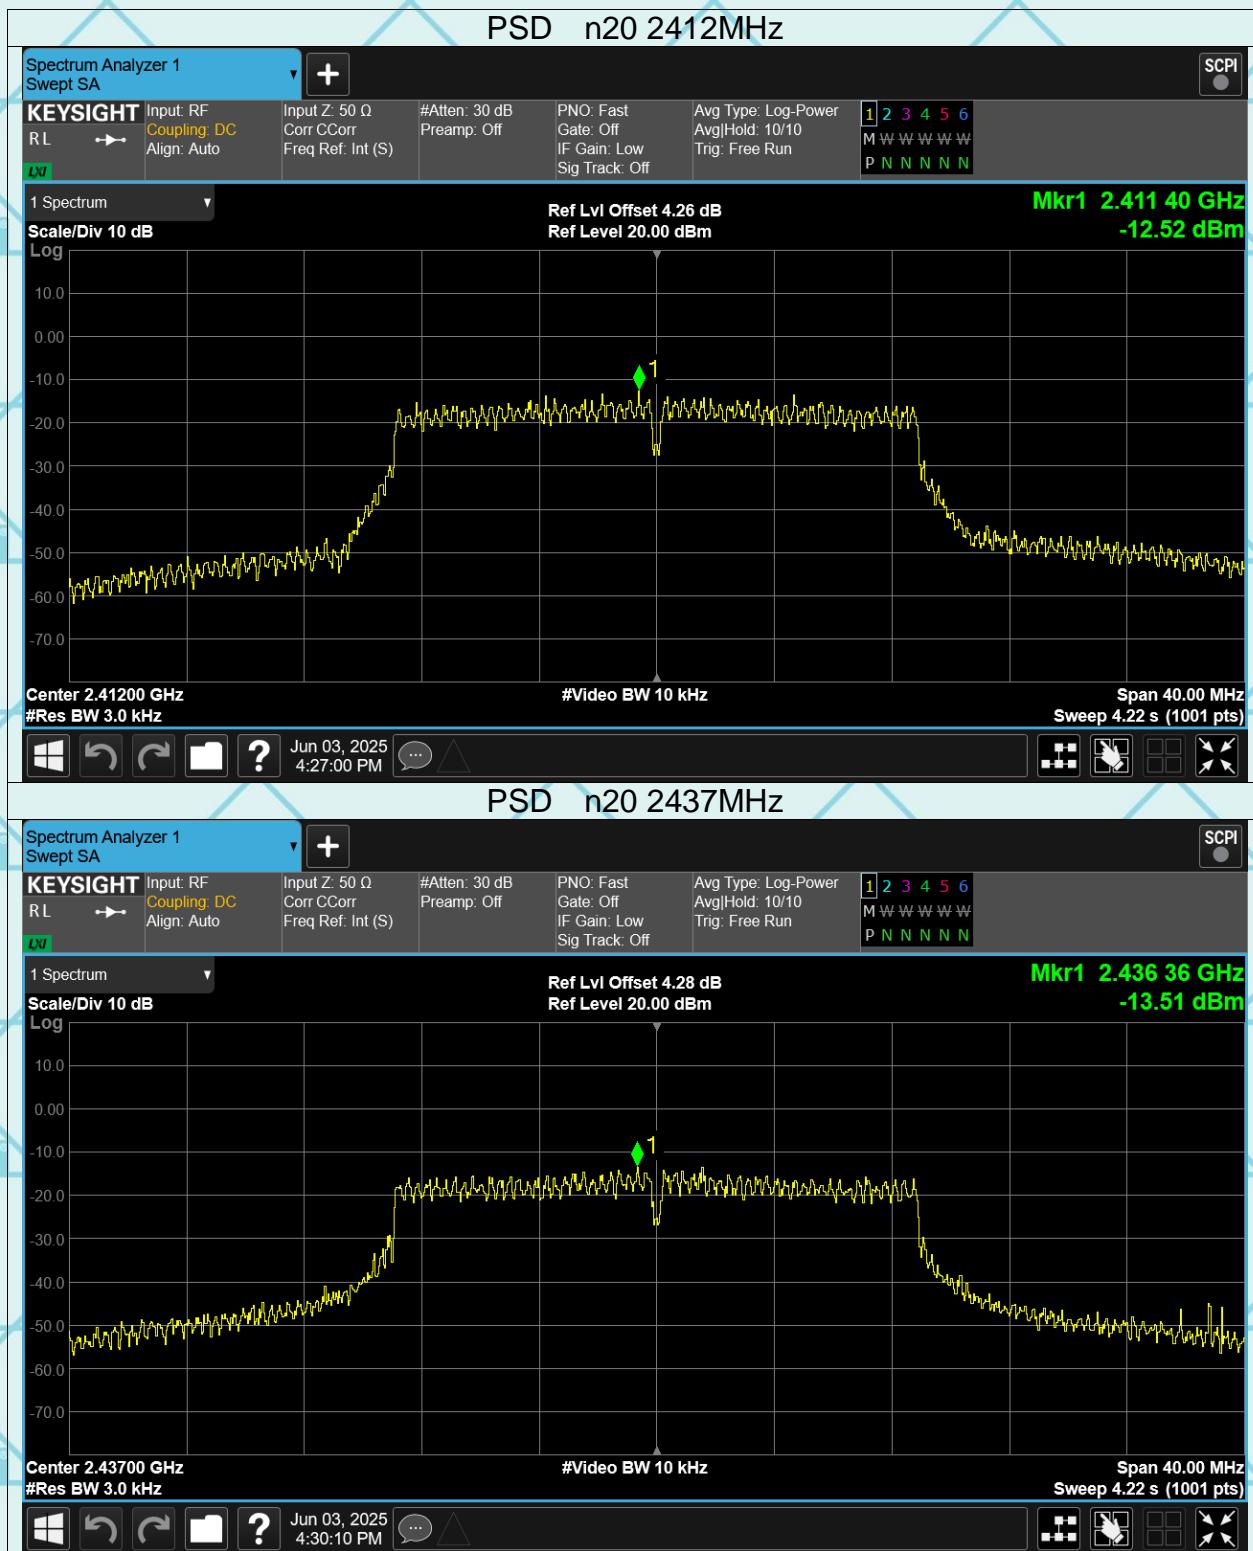


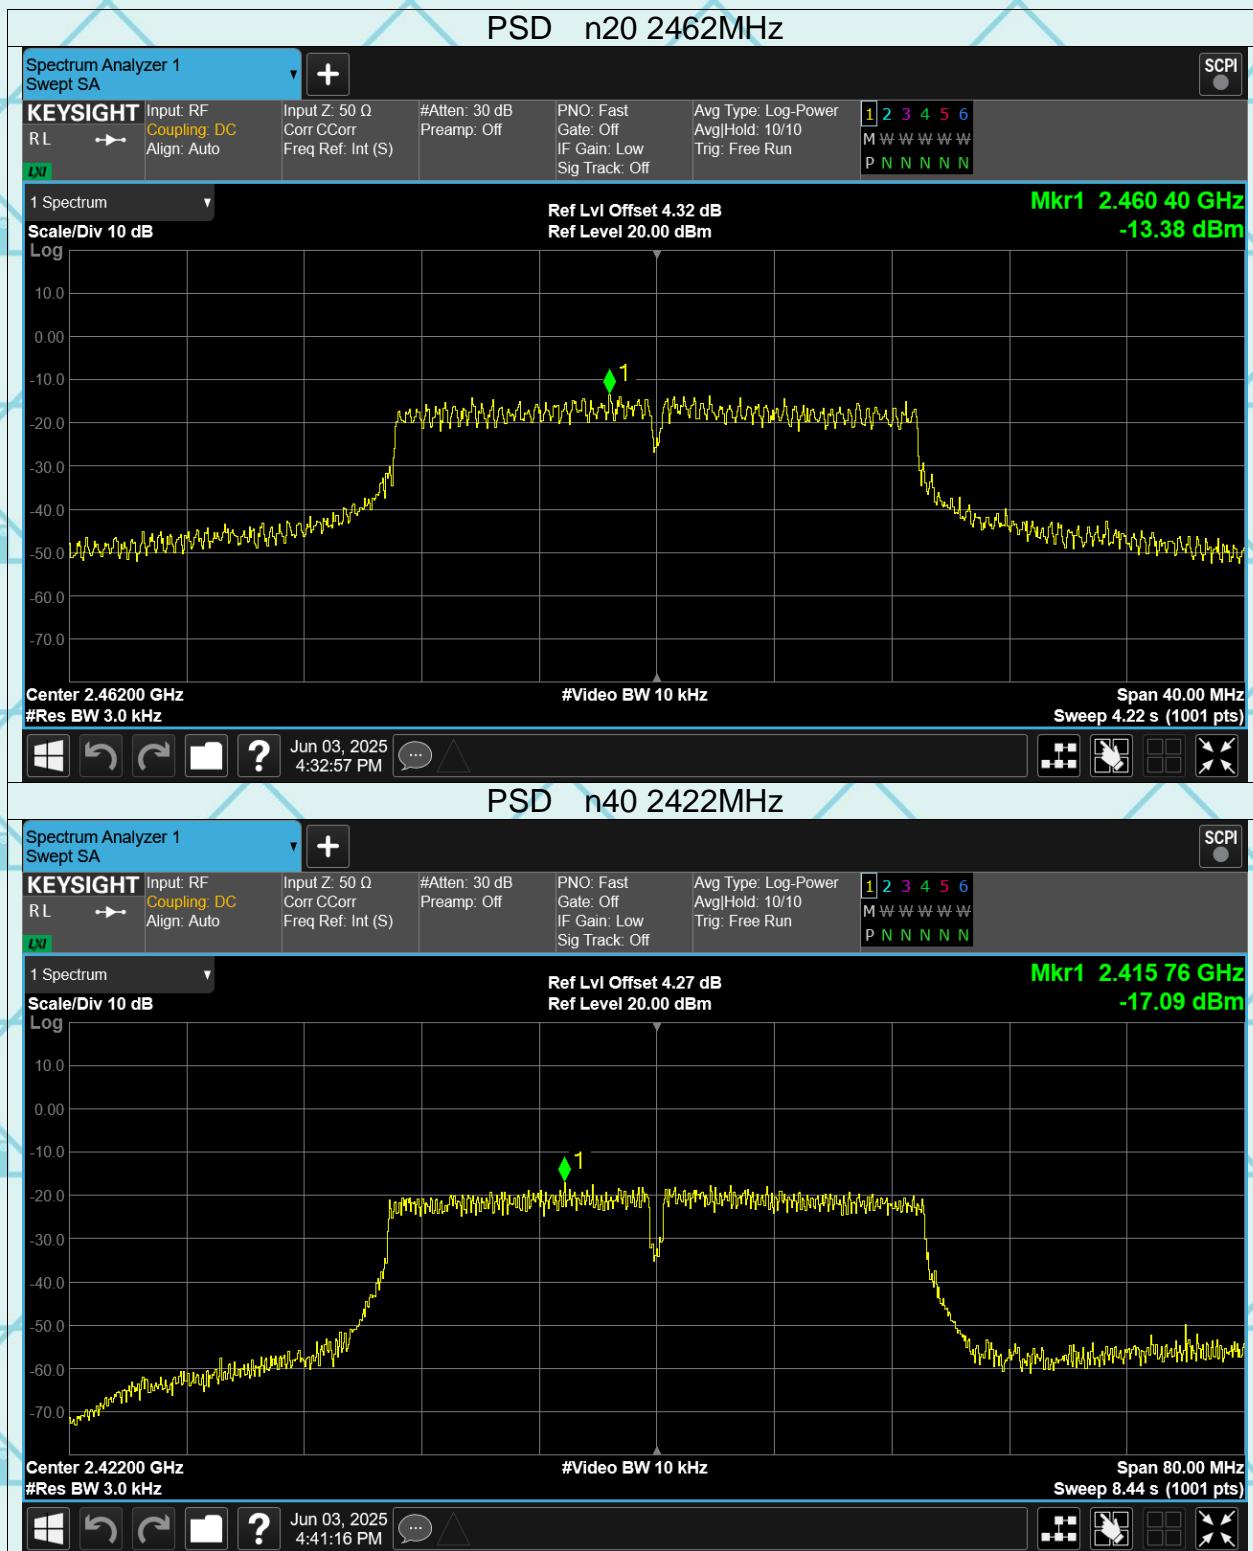

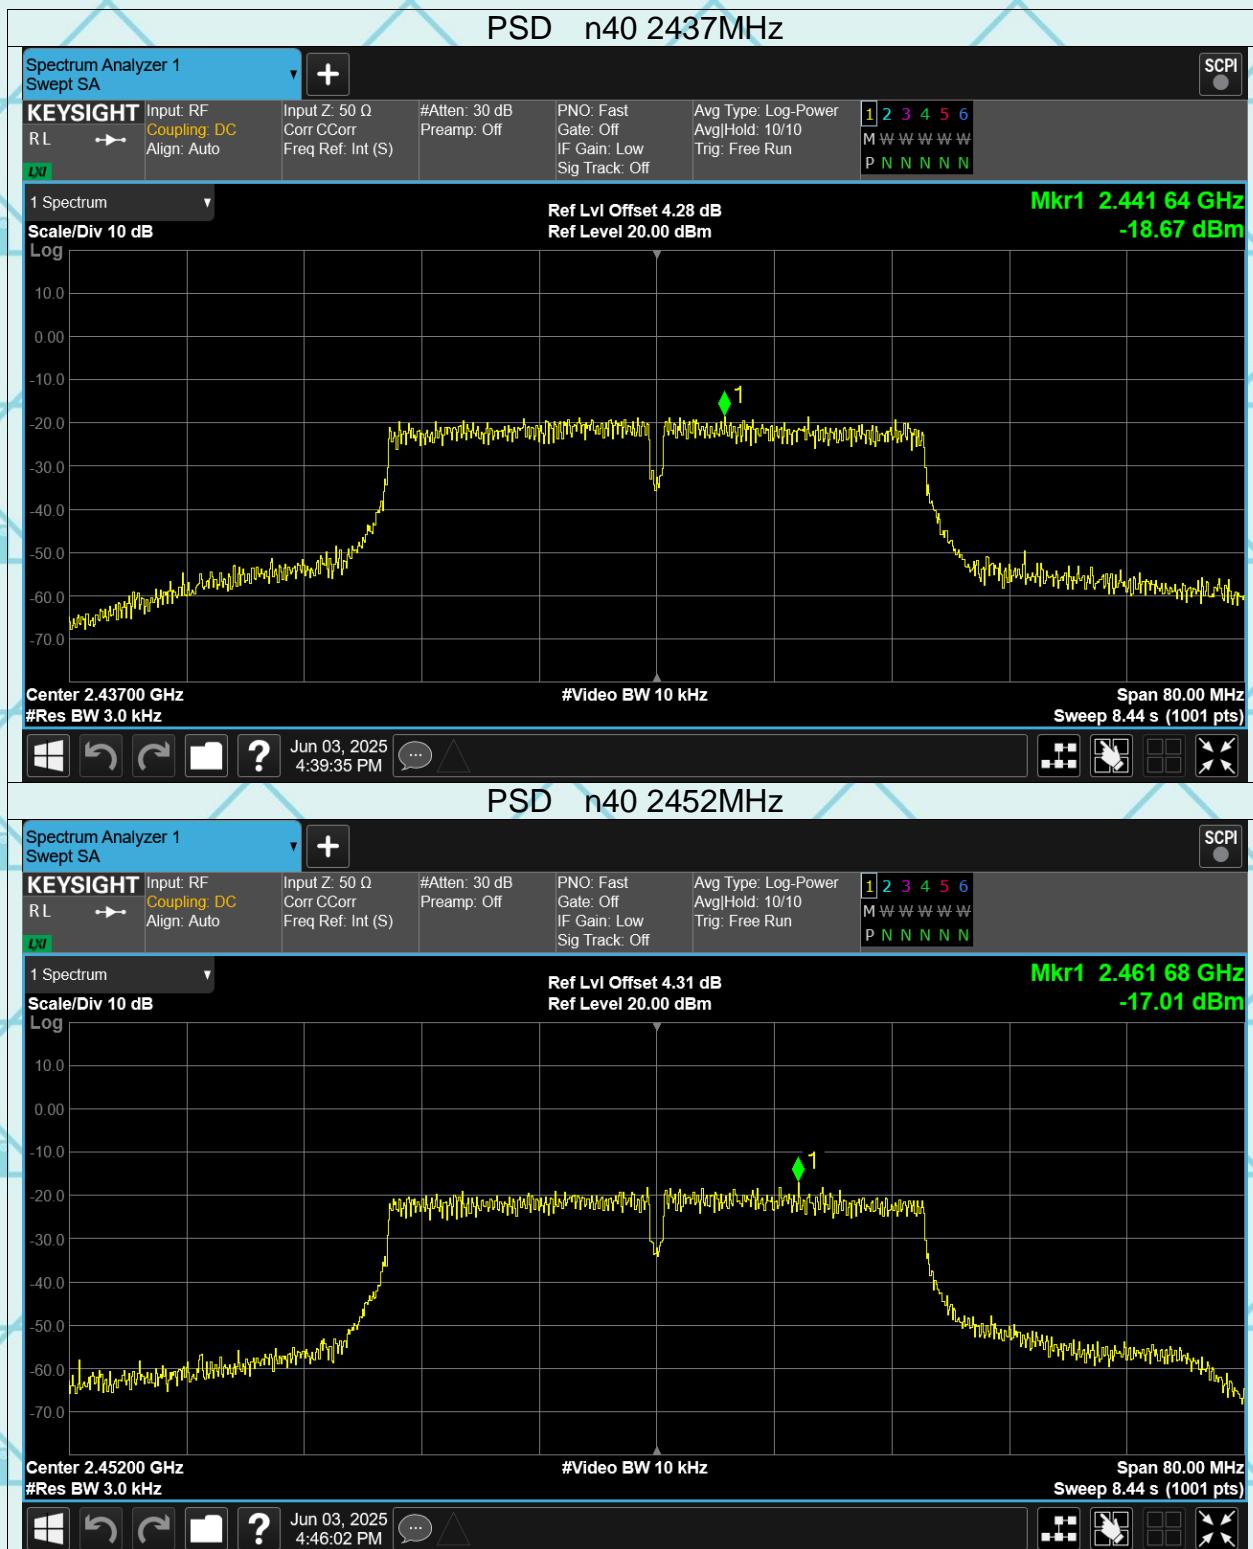

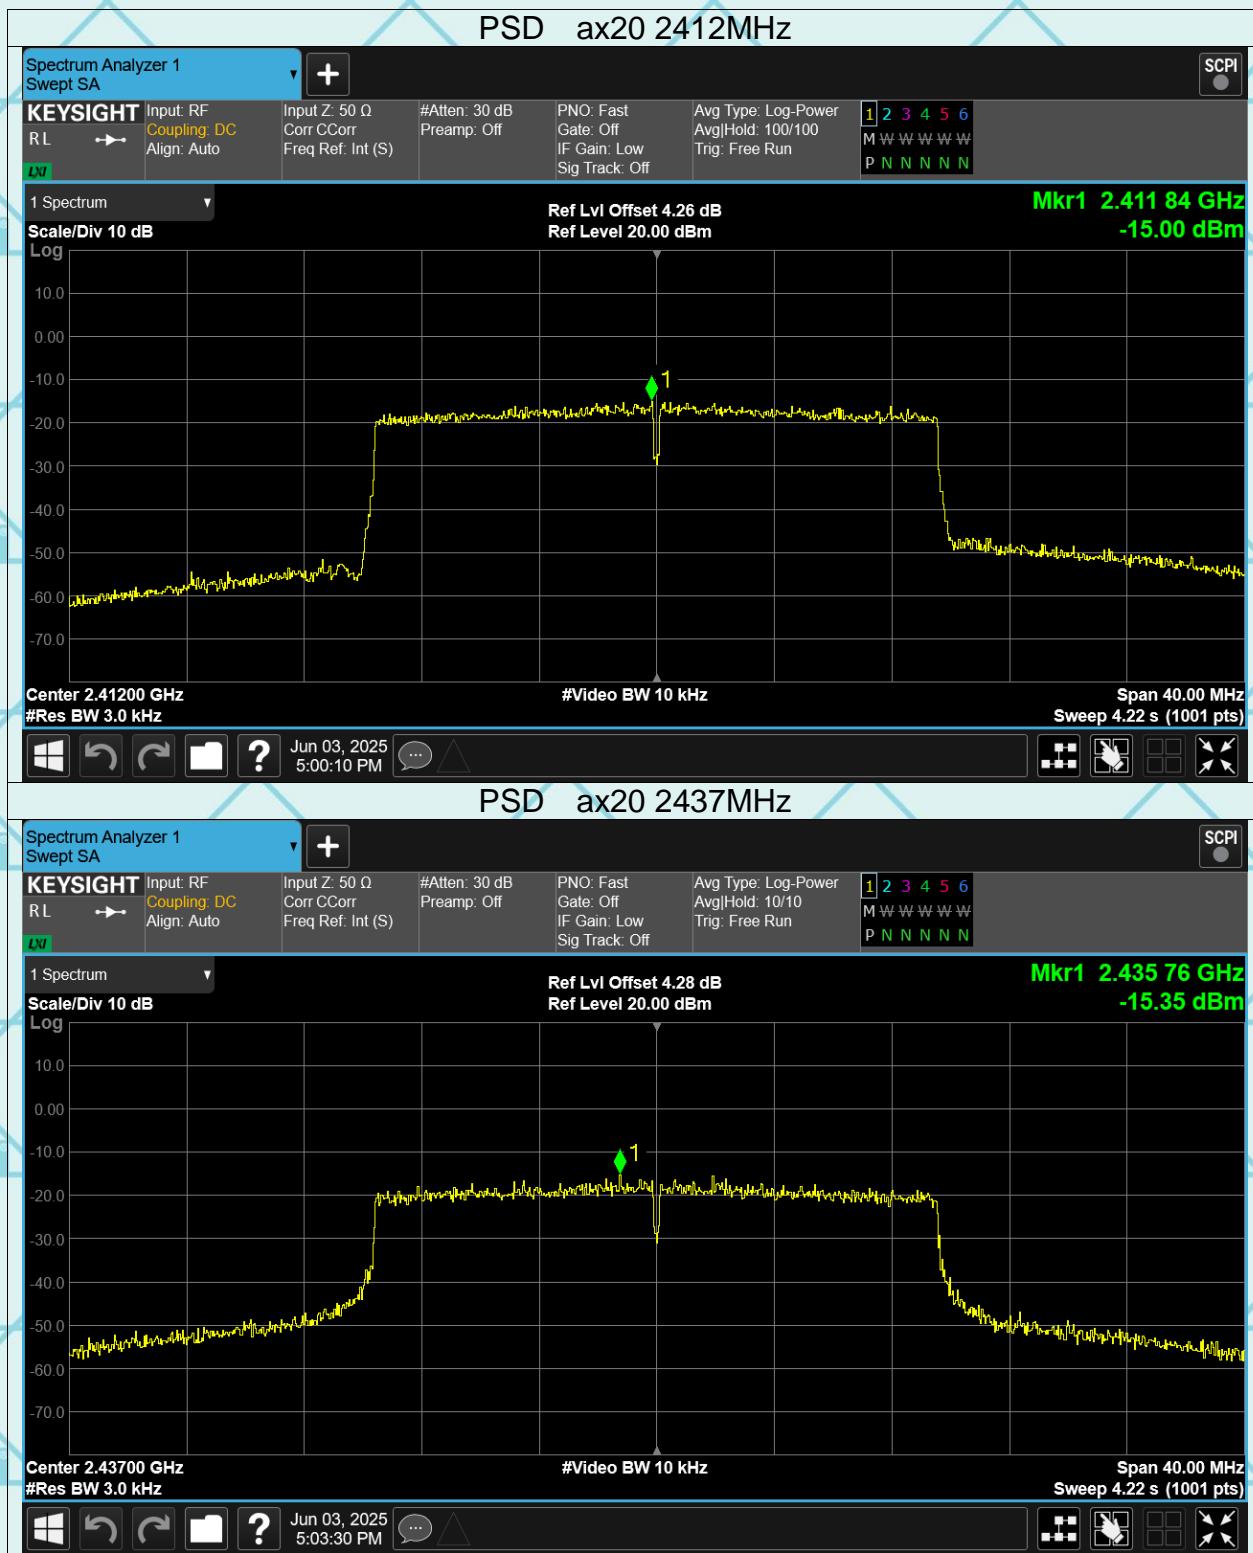


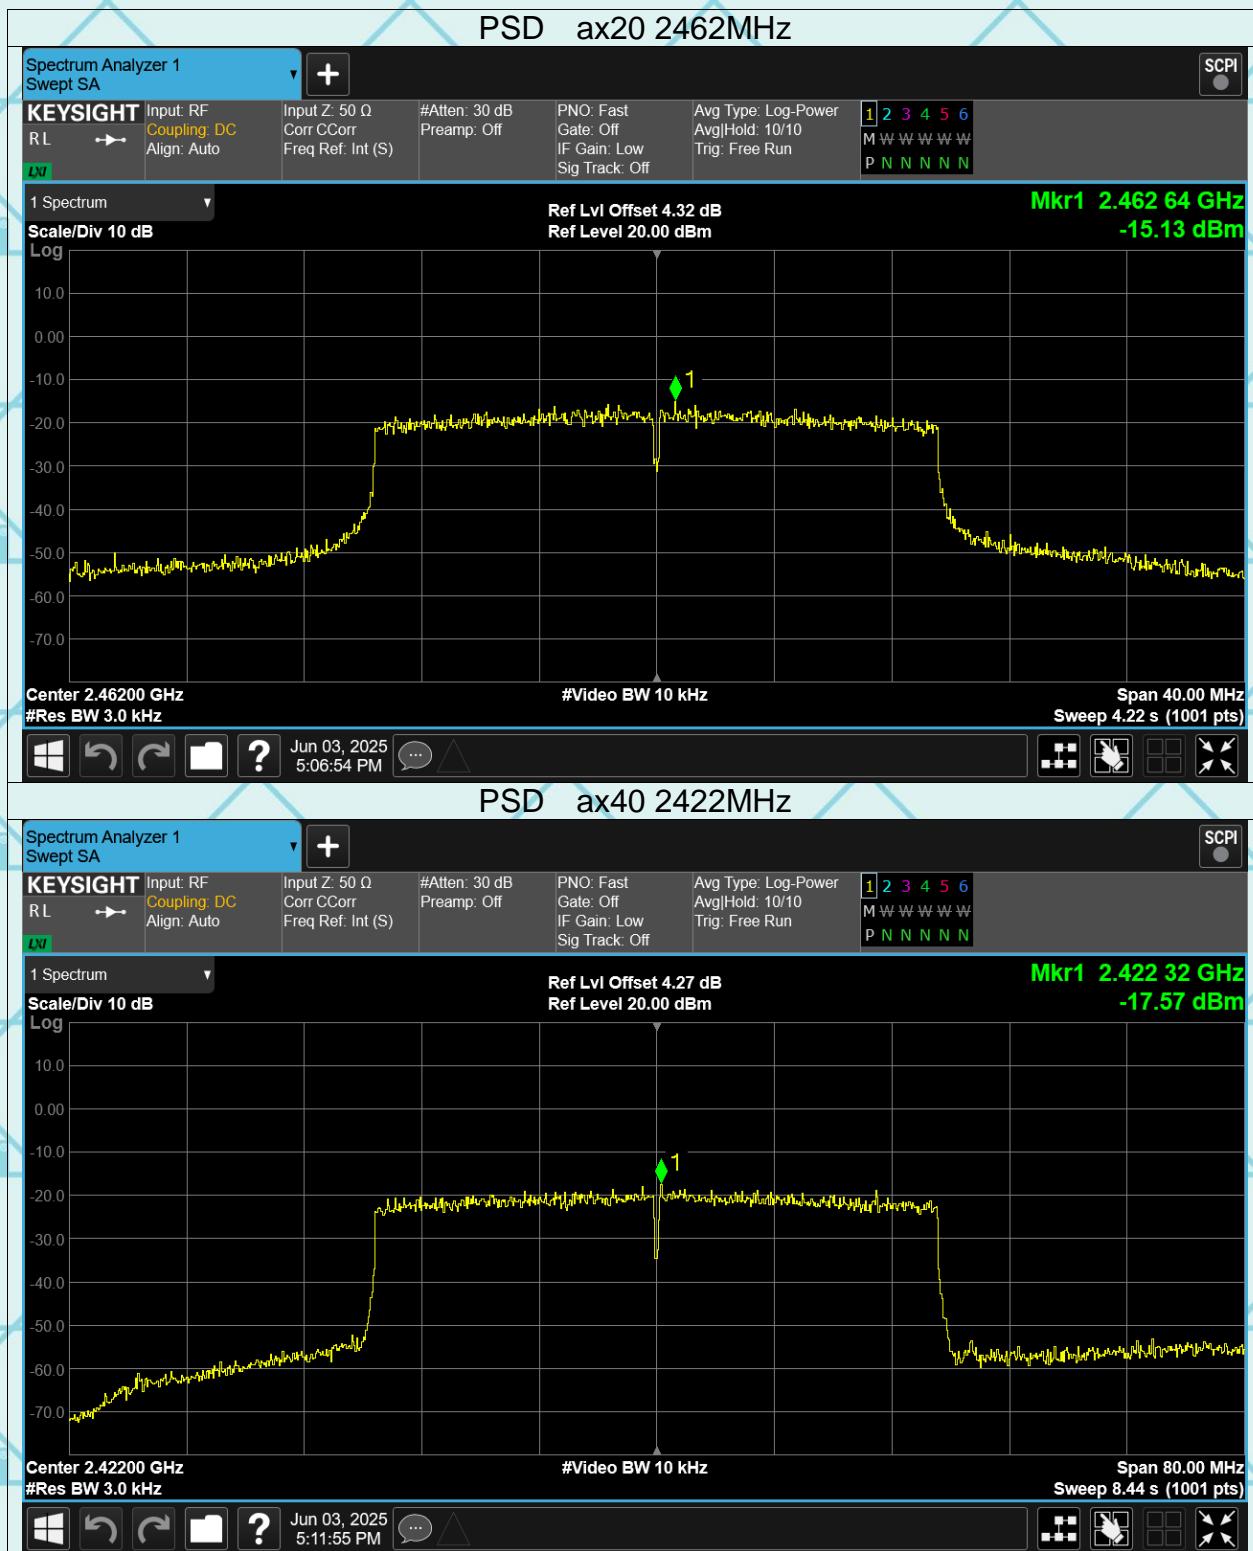

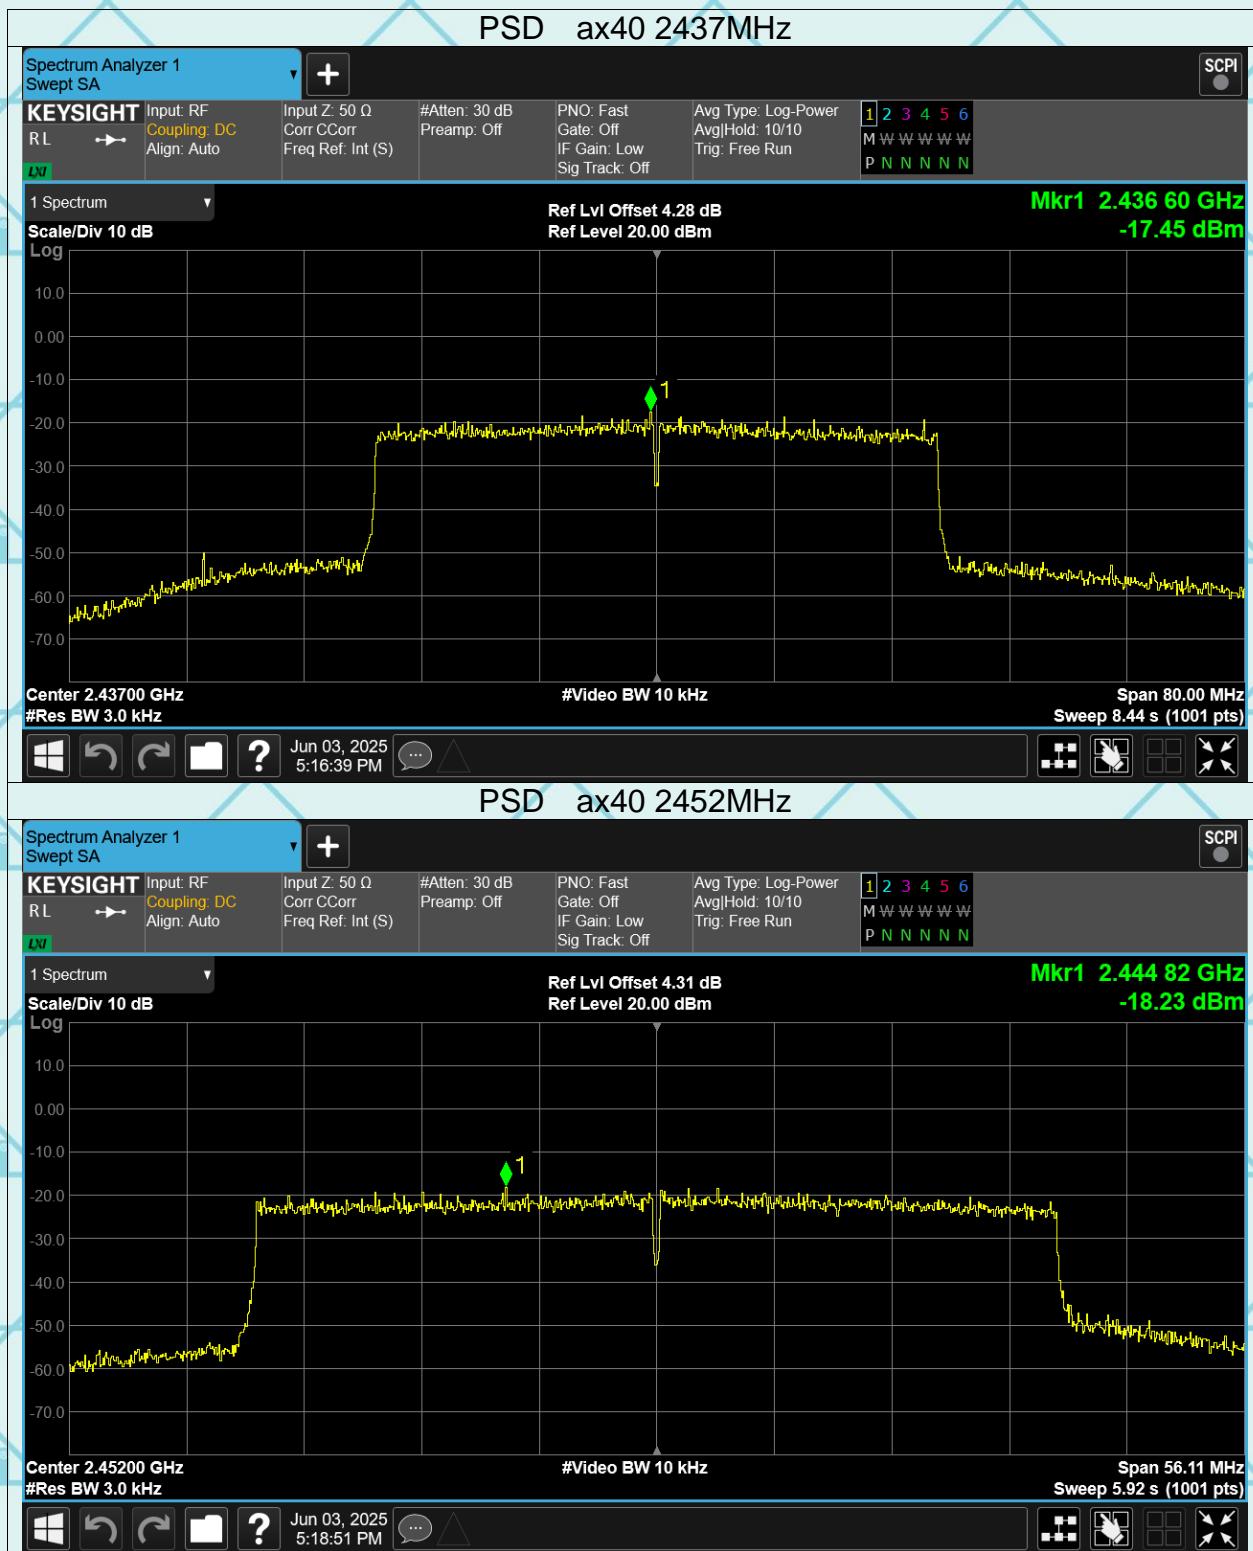

6.6. Conducted Band Edge and Spurious Emission Measurement

6.6.1. Test Specification

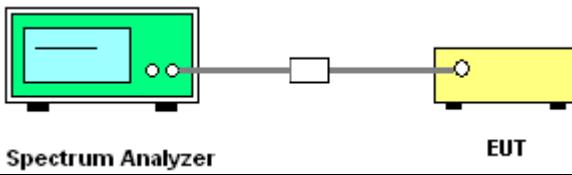Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1

Issued Date: 20 June 2025

Test Data

Band Edge





Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1

Issued Date: 20 June 2025





Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1

Issued Date: 20 June 2025









Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1

Issued Date: 20 June 2025

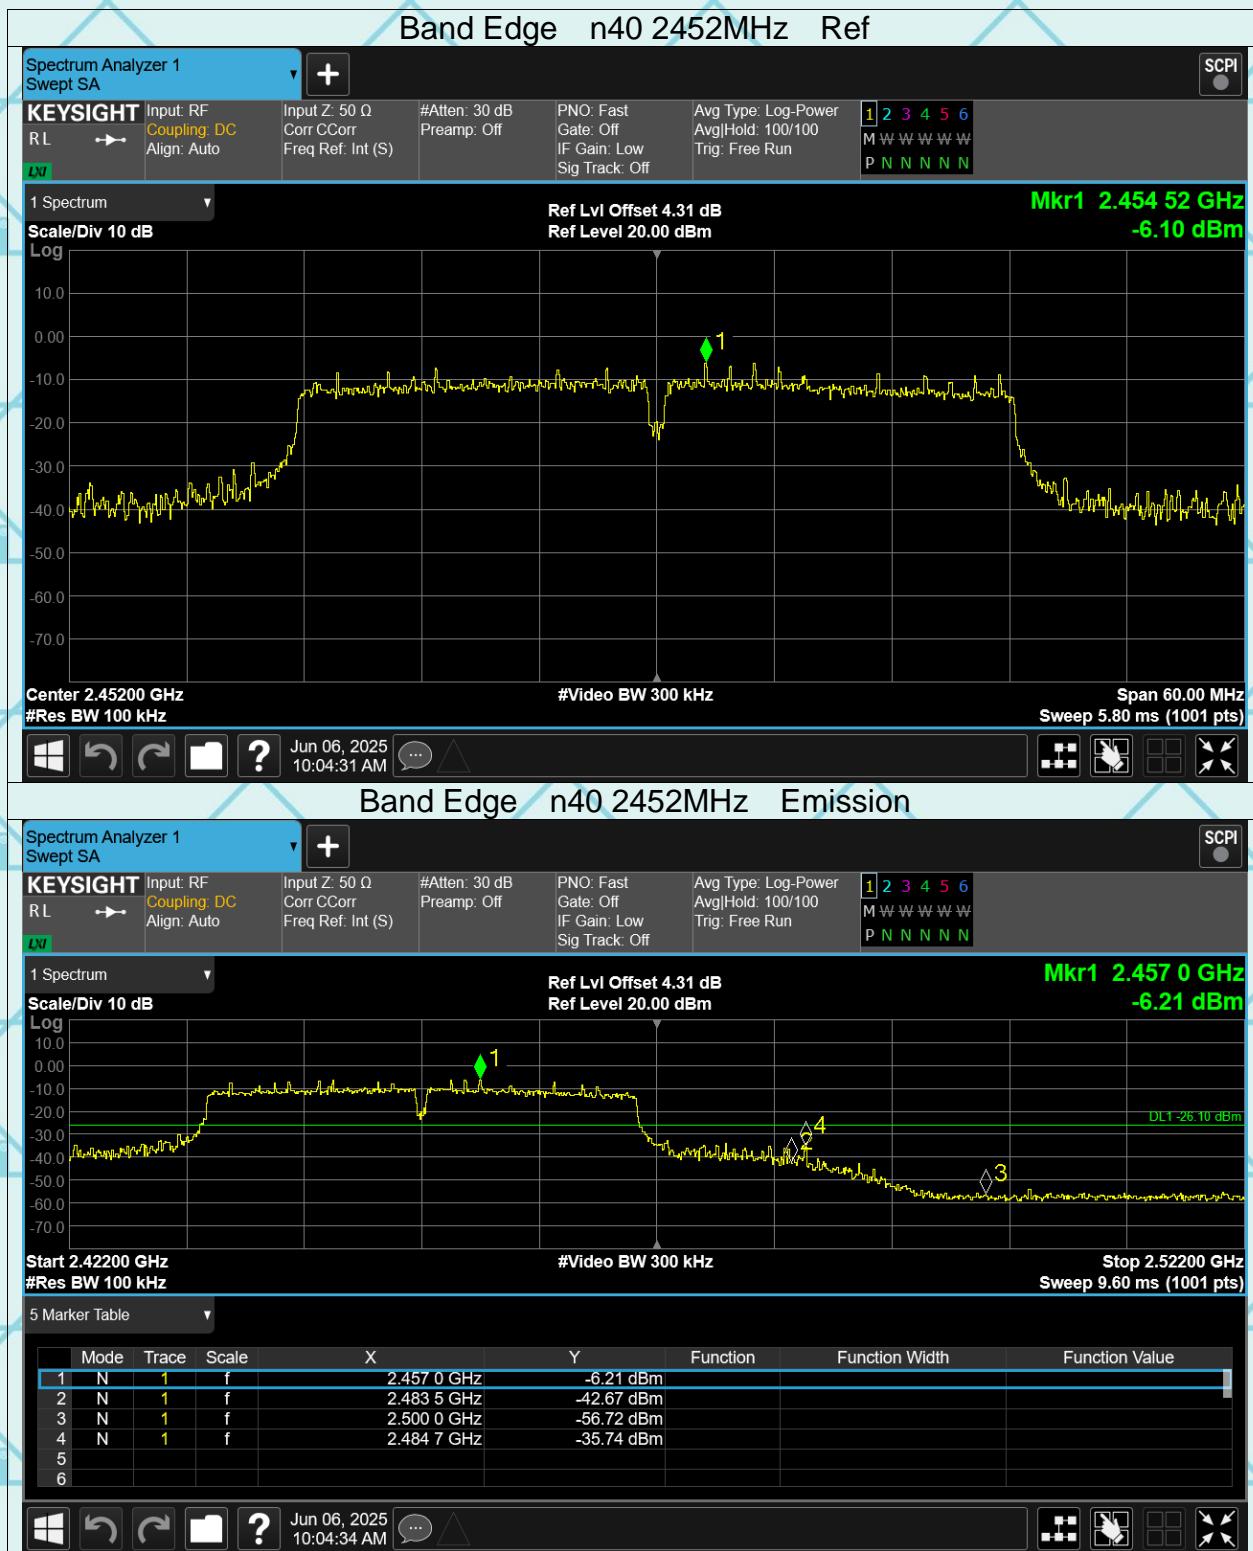


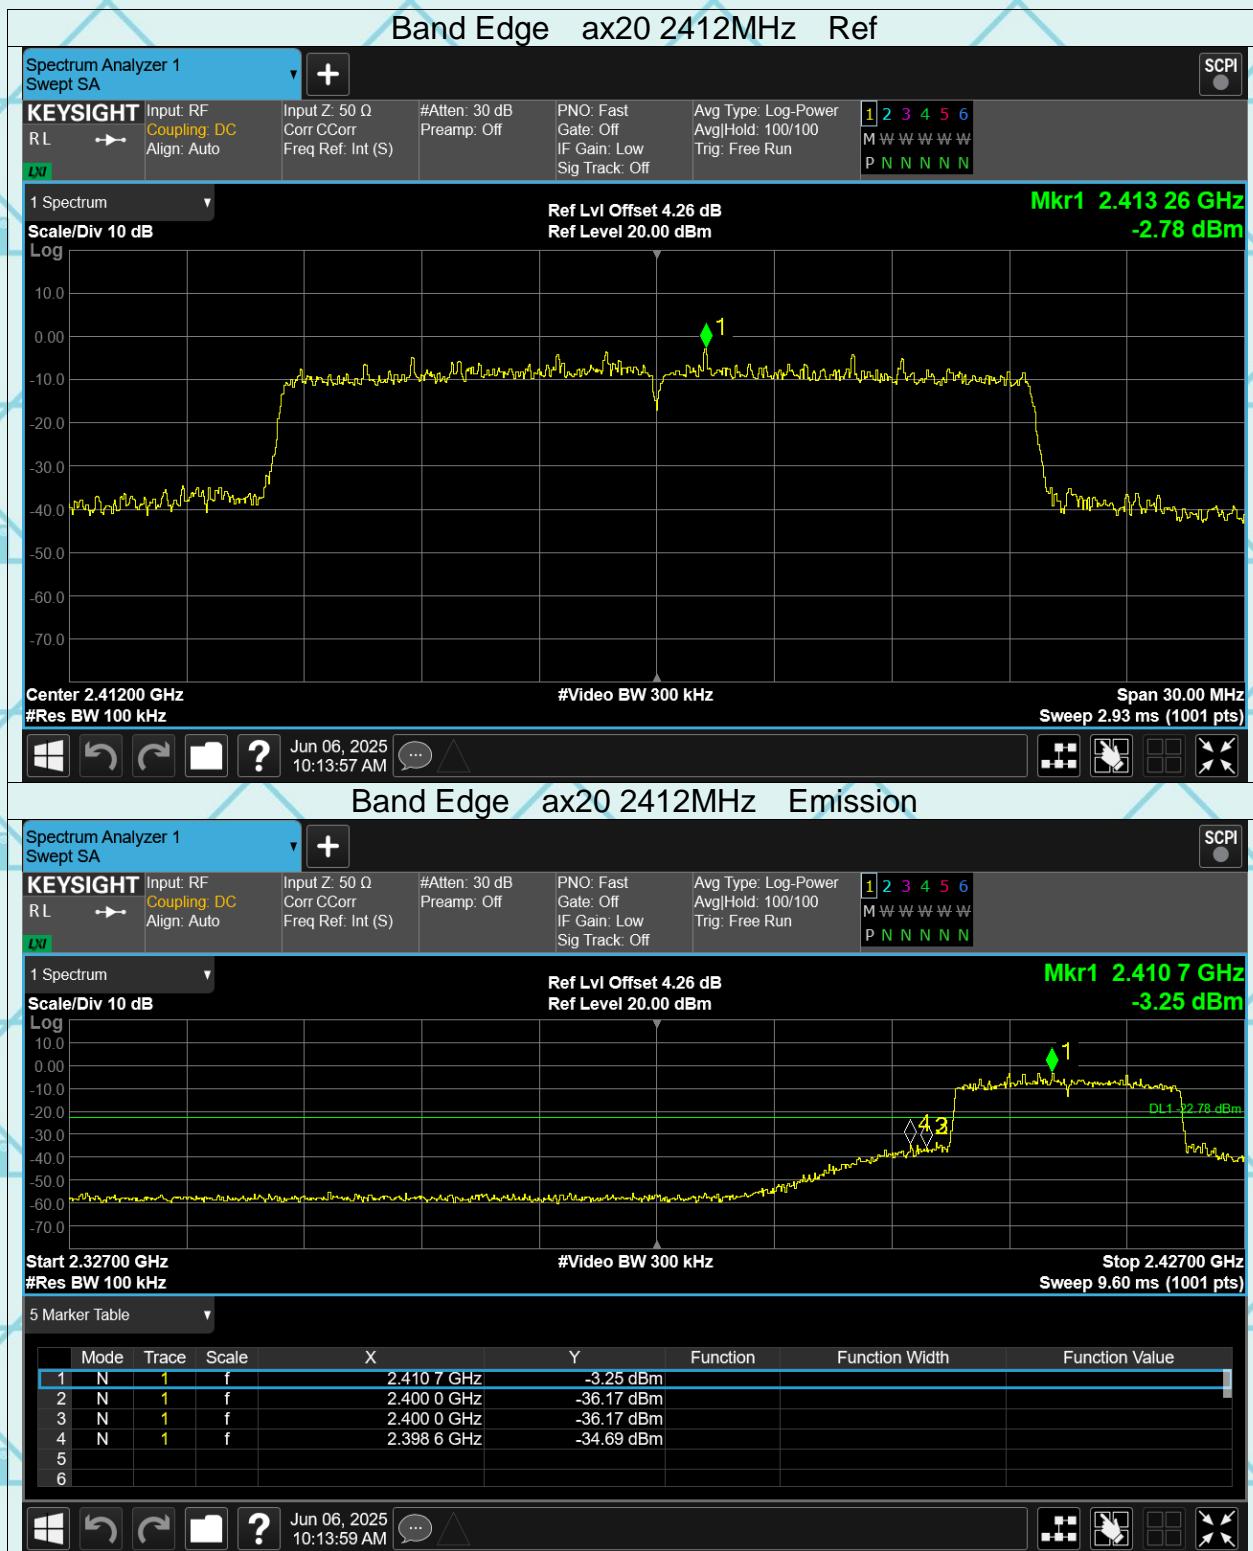


Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1

Issued Date: 20 June 2025



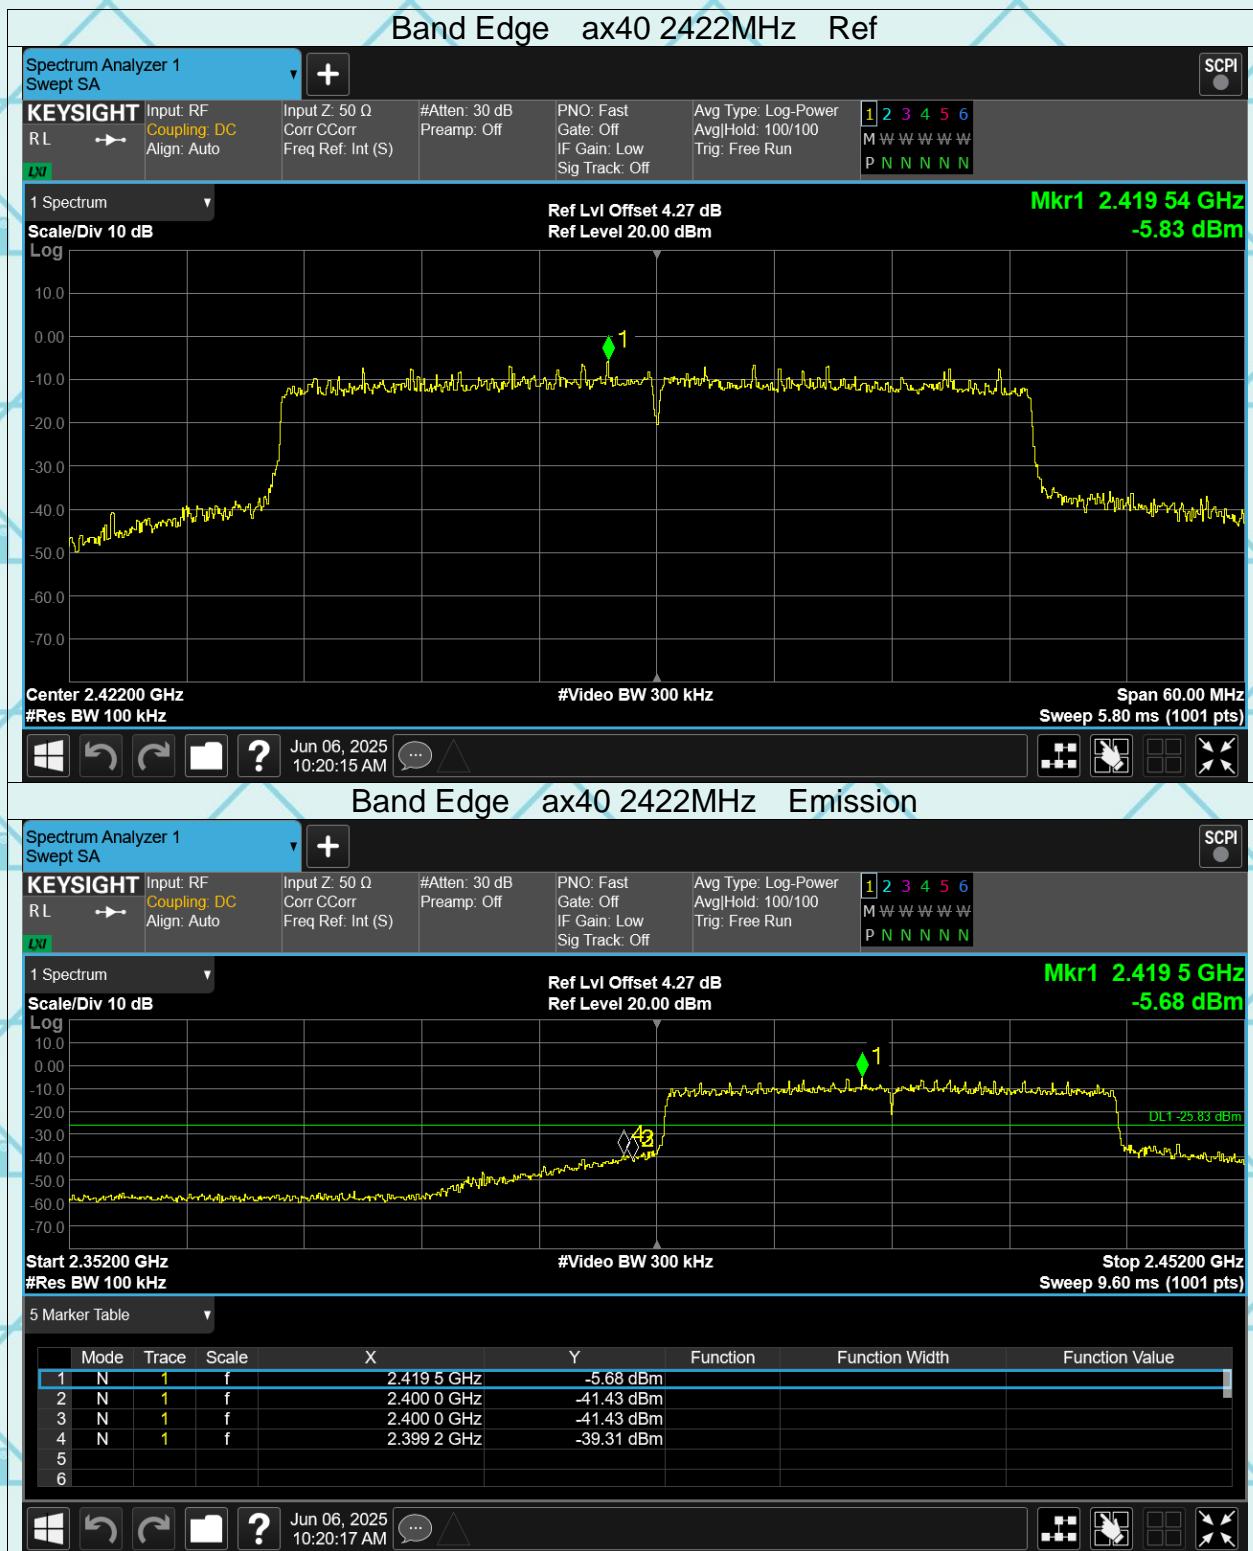

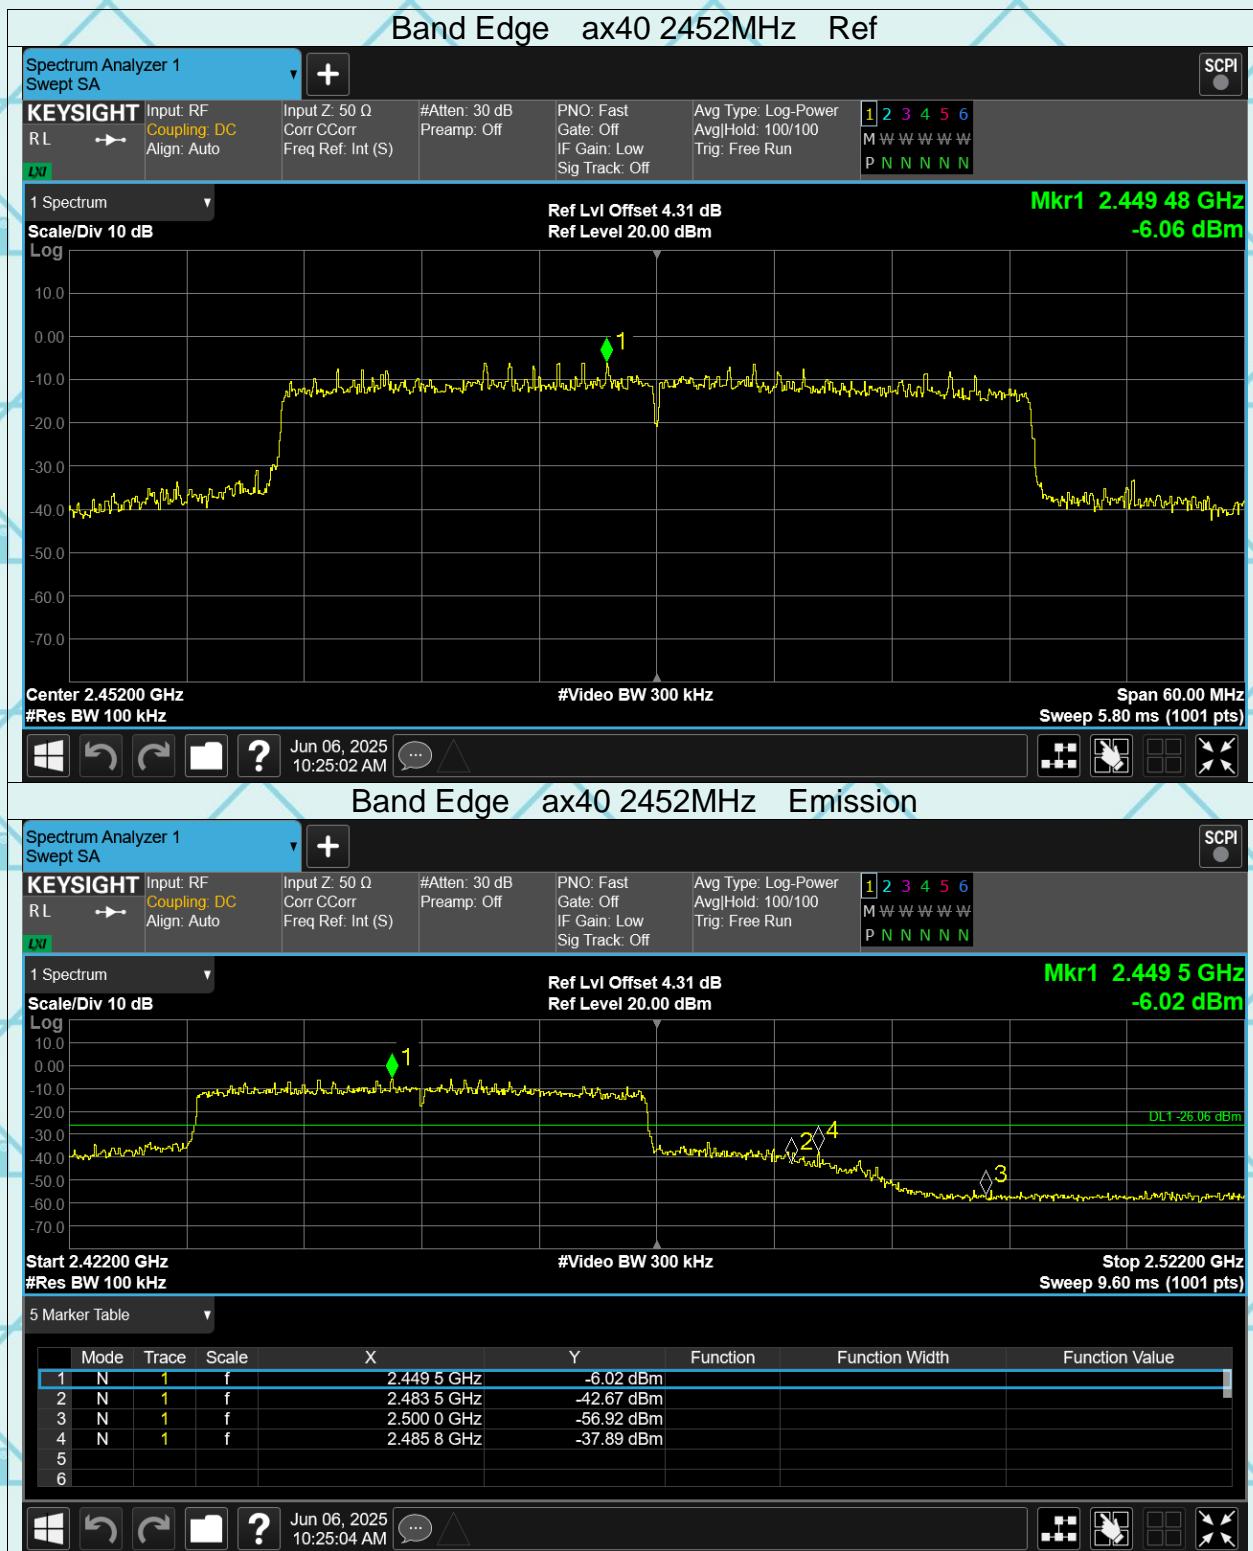

Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1 Issued Date: 20 June 2025

Conducted RF Spurious Emission

Test Graphs



Report No.: WSCT-ANAB-R&E250500038A-Wi-Fi1

Issued Date: 20 June 2025

