



## FCC TEST REPORT

FOR

Signifi Mobile Inc

Cellular Signal Booster

Test Model: U65XC with N Type

Additional Model No.: U60C with N Type,U60C with F Type,U65C with N Type,

U65C with F Type,U65XC with F Type,UM50 with SMA,

UM2M with SMA

|                                |   |                                                                                                       |
|--------------------------------|---|-------------------------------------------------------------------------------------------------------|
| Prepared for                   | : | Signifi Mobile Inc                                                                                    |
| Address                        | : | 2207-1751 Richardson St.Montreal, Quebec,H3K 1G6,Canada                                               |
| Prepared by                    | : | Shenzhen LCS Compliance Testing Laboratory Ltd.                                                       |
| Address                        | : | 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,<br>Baoan District, Shenzhen, China |
| Tel                            | : | (+86)755-82591330                                                                                     |
| Fax                            | : | (+86)755-82591332                                                                                     |
| Web                            | : | www.LCS-cert.com                                                                                      |
| Mail                           | : | webmaster@LCS-cert.com                                                                                |
| Date of receipt of test sample | : | November 25, 2022                                                                                     |
| Number of tested samples       | : | 2                                                                                                     |
| Serial number                  | : | Prototype                                                                                             |
| Date of Test                   | : | November 25, 2022 ~ December 19,2022                                                                  |
| Date of Report                 | : | December 19,2022                                                                                      |



Scan code to check authenticity



| <b>FCC TEST REPORT</b>                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC CFR 47 PART 20.21</b>                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                |
| <b>Report Reference No. .... : LCSA112222040EA</b>                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                |
| Date of Issue..... : December 19,2022                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                |
| <b>Testing Laboratory Name ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.</b>                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                |
| Address.....                                                                                                                                                                                                                                                                                                                                                                                                                                   | 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China                             |
| Testing Location/ Procedure .....                                                                                                                                                                                                                                                                                                                                                                                                              | Full application of Harmonised standards ■<br>Partial application of Harmonised standards □<br>Other standard testing method □ |
| <b>Applicant's Name ..... : Signifi Mobile Inc</b>                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                |
| Address..... : 2207-1751 Richardson St.Montreal, Quebec,H3K 1G6,Canada                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                |
| <b>Test Specification</b>                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                |
| Standard..... : FCC CFR Title 47 Part 20.21                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                |
| Test Report Form No..... : LCSEMC-1.0                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                |
| TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                |
| Master TRF ..... : Dated 2011-03                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                |
| <b>Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.</b>                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                |
| This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. |                                                                                                                                |
| <b>Test Item Description..... : Cellular Signal Booster</b>                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                |
| Trade Mark..... : Signifi Mobile                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                |
| Test Model ..... : U65XC with N Type                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                |
| For AC Adapter(model: GM53-120300-F):                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                |
| Ratings.....                                                                                                                                                                                                                                                                                                                                                                                                                                   | Input: AC 100-240V,50/60Hz,2.0A<br>Output: DC 12.0V=3.0A,36.0W                                                                 |
| <b>Result ..... : Positive</b>                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                |

Compiled by:

Jack Liu/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager

**FCC -- TEST REPORT**

|                          |                        |                                          |
|--------------------------|------------------------|------------------------------------------|
| <b>Test Report No. :</b> | <b>LCSA112222040EA</b> | <u>December 19,2022</u><br>Date of issue |
|--------------------------|------------------------|------------------------------------------|

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| Test Model.....          | : U65XC with N Type                                       |
| EUT.....                 | : Cellular Signal Booster                                 |
| <b>Applicant.....</b>    | <b>: Signifi Mobile Inc</b>                               |
| Address.....             | : 2207-1751 Richardson St.Montreal, Quebec,H3K 1G6,Canada |
| Telephone.....           | : 514-500-1181                                            |
| Fax.....                 | : 514-500-1181                                            |
| <b>Manufacturer.....</b> | <b>: Signifi Mobile Inc</b>                               |
| Address.....             | : 2207-1751 Richardson St.Montreal, Quebec,H3K 1G6,Canada |
| Telephone.....           | : 514-500-1181                                            |
| Fax.....                 | : 514-500-1181                                            |
| <b>Factory.....</b>      | <b>: /</b>                                                |
| Address.....             | : /                                                       |
| Telephone.....           | : /                                                       |
| Fax.....                 | : /                                                       |

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



## Revision History

| Revision | Issue Date       | Revisions     | Revised By  |
|----------|------------------|---------------|-------------|
| 000      | December 19,2022 | Initial Issue | Gavin Liang |
|          |                  |               |             |
|          |                  |               |             |



## TABLE OF CONTENTS

| Description                                  | Page      |
|----------------------------------------------|-----------|
| <b>1.GENERAL INFORMATION</b>                 | <b>6</b>  |
| 1.1 Description of Device (EUT)              | 6         |
| 1.2 Support equipment List                   | 8         |
| 1.3 External I/O Cable                       | 8         |
| 1.4 Description of Test Facility             | 8         |
| 1.5 Statement of the Measurement Uncertainty | 9         |
| 1.6 Measurement Uncertainty                  | 9         |
| 1.7 Operation Band                           | 9         |
| <b>2. TEST METHODOLOGY</b>                   | <b>10</b> |
| 2.1 EUT Configuration                        | 10        |
| 2.2 General Test Procedures                  | 10        |
| <b>3. SYSTEM TEST CONFIGURATION</b>          | <b>11</b> |
| 3.1 Justification                            | 11        |
| 3.2 EUT Exercise Software                    | 11        |
| 3.3 Special Accessories                      | 11        |
| 3.4 Block Diagram/Schematics                 | 11        |
| 3.5 Equipment Modifications                  | 11        |
| 3.6 Test Setup                               | 11        |
| <b>4. SUMMARY OF TEST RESULTS</b>            | <b>12</b> |
| <b>5. SUMMARY OF TEST EQUIPMENT</b>          | <b>13</b> |
| <b>6. MEASUREMENT RESULTS</b>                | <b>14</b> |
| 6.1 Authorized Frequency Band Verification   | 14        |
| 6.2 Maximum power measurement                | 17        |
| 6.3 Maximum booster gain computation         | 21        |
| 6.4 Intermodulation Product                  | 23        |
| 6.5 Out of Band Emission                     | 30        |
| 6.6. Conducted Spurious Emission             | 44        |
| 6.7. Noise Limits                            | 54        |
| 6.8. Uplink Inactivity                       | 59        |
| 6.9. Variable Booster Gain                   | 61        |
| 6.10. Occupied Bandwidth                     | 67        |
| 6.11. Oscillation Detection and Mitigation   | 77        |
| <b>7. RADIATION SPURIOUS EMISSION</b>        | <b>86</b> |
| <b>8. TEST SETUP PHOTOGRAPHS OF EUT</b>      | <b>86</b> |
| <b>9. EXTERIOR PHOTOGRAPHS OF THE EUT</b>    | <b>86</b> |
| <b>10. INTERIOR PHOTOGRAPHS OF THE EUT</b>   | <b>86</b> |



## 1.GENERAL INFORMATION

### 1.1 Description of Device (EUT)

|                                |                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT                            | : Cellular Signal Booster                                                                                                                                                                                                                                                                                                                             |
| Equipment Type                 | : Fixed Wideband Consumer Signal Booster                                                                                                                                                                                                                                                                                                              |
| Test Model                     | : U65XC with N Type                                                                                                                                                                                                                                                                                                                                   |
| Additional Model No.           | : U60C with N Type,U60C with F Type,U65C with N Type,<br>U65C with F Type,U65XC with F Type,UM50 with SMA,<br>UM2M with SMA                                                                                                                                                                                                                           |
| Model Declaration              | : PCB board, structure and internal of these model(s) are the same, So<br>no additional models were tested                                                                                                                                                                                                                                            |
| Power Supply                   | : For AC Adapter(model: GM53-120300-F):<br>Input: AC 100-240V,50/60Hz, 2.0A<br>Output: DC 12.0V---3.0A,36.0W                                                                                                                                                                                                                                          |
| Hardware Version               | : LCPA33C-FCC-V01                                                                                                                                                                                                                                                                                                                                     |
| Software Version               | : LCPA33C-FCC-V01.hex                                                                                                                                                                                                                                                                                                                                 |
| Frequency Range                | : Lower 700MHz Band(B12)<br>Uplink: 698~716MHz, Downlink: 728~746 MHz<br>Upper 700MHz Band(B13)<br>Uplink: 776~787MHz, Downlink: 746~757 MHz<br>Cellular Band(B5)<br>Uplink: 824~849MHz, Downlink: 869~894 MHz<br>PCS Band(B2& B25)<br>Uplink: 1850~1915MHz, Downlink: 1930~1995 MHz<br>AWS Band(B4)<br>Uplink: 1710~1755MHz, Downlink: 2110~2155 MHz |
| Max .Gain                      | : ≤58dB                                                                                                                                                                                                                                                                                                                                               |
| Max. Antenna Port Output power | : Uplink: 24dBm<br>Downlink:17dBm                                                                                                                                                                                                                                                                                                                     |
| Emission Designator            | : F9W, G7D, G7W, GXW, W7D                                                                                                                                                                                                                                                                                                                             |
| FCC Classification             | : B2W/Wideband Consumer Booster(CMRS)                                                                                                                                                                                                                                                                                                                 |
| Operating Temperature          | : -25°C~+55°C                                                                                                                                                                                                                                                                                                                                         |



| Outdoor Antenna | Outdoor Antenna Gain |              |          |     |     |
|-----------------|----------------------|--------------|----------|-----|-----|
|                 | Lower 700MHz         | Upper 700MHz | Celluler | PCS | AWS |
| Yagi antenna    | 9.5                  | 9.5          | 9.5      | 10  | 10  |
| Panel antenna   | 7                    | 7            | 7        | 9   | 9   |
| Outdoor Cable   |                      |              |          |     |     |
| Outdoor cable   | Outdoor Cable Loss   |              |          |     |     |
|                 | Lower 700MHz         | Upper 700MHz | Celluler | PCS | AWS |
| 10m 5D-FB       | 1.7                  | 1.7          | 1.7      | 2.7 | 2.7 |
| Indoor Antenna  |                      |              |          |     |     |
| Indoor Antenna  | Indoor Antenna Gain  |              |          |     |     |
|                 | Lower 700MHz         | Upper 700MHz | Celluler | PCS | AWS |
| Omni Antenna    | 3                    | 3            | 3        | 3   | 3   |
| Panel Antenna   | 7                    | 7            | 7        | 9   | 9   |
| Indoor Cable    |                      |              |          |     |     |
| Indoor Cable    | Indoor Cable Loss    |              |          |     |     |
|                 | Lower 700MHz         | Upper 700MHz | Celluler | PCS | AWS |
| 5m 5D-FB        | 0.8                  | 0.8          | 0.8      | 1.4 | 1.4 |



## 1.2 Support equipment List

| Manufacturer                                      | Description   | Model         | Serial Number | Certificate |
|---------------------------------------------------|---------------|---------------|---------------|-------------|
| FOSHAN SHUNDE<br>GUANYUDA POWER<br>SUPPLY CO.,LTD | AC/DC Adapter | GM53-120300-F | ---           | FCC SDoC    |

## 1.3 External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| Antenna Port         | 2        | N/A   |
| DC IN Port           | 1        | N/A   |

## 1.4 Description of Test Facility

FCC Registration Number is 254912.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Industry Canada Registration Number is 9642A.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 VSWR requirement for radiated emission above 1GHz.



## 1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

| Test Item              |   | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty  | : | 9KHz~30MHz      | 3.10dB      | (1)  |
|                        |   | 30MHz~200MHz    | 2.96dB      | (1)  |
|                        |   | 200MHz~1000MHz  | 3.10dB      | (1)  |
|                        |   | 1GHz~26.5GHz    | 3.80dB      | (1)  |
|                        |   | 26.5GHz~40GHz   | 3.90dB      | (1)  |
| Conduction Uncertainty | : | 150kHz~30MHz    | 1.63dB      | (1)  |
| Power disturbance      | : | 30MHz~300MHz    | 1.60dB      | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Operation Band

| Uplink Frequency(MHz)   | Downlink Frequency(MHz) |
|-------------------------|-------------------------|
| 698-716(Lower 700 Band) | 728-746(Lower 700 Band) |
| 776-787(Upper 700 Band) | 746-757(Upper 700 Band) |
| 824-849(Cellular Band)  | 869-894(Cellular Band)  |
| 1850-1915(PCS Band)     | 1930-1995(PCS Band)     |
| 1710-1755(AWS Band)     | 2110-2155(AWS Band)     |



## 2. TEST METHODOLOGY

All tests and measurements indicated in this document were performed in accordance with:

- 1) The Code of federal Regulations Title 47, Part 2, Part 22, Part 24, Part 27, Part 20.21;
- 2) ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services;
- 3) KDB 935210 D03 Signal Booster Measurements v04r04.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 General Test Procedures

#### 2.2.1 Radiated spurious emissions

The EUT is placed on the turntable, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated spurious emissions measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2 EUT Exercise Software

N/A

#### 3.3 Special Accessories

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| --           | --          | --    | --            | --          |

#### 3.4 Block Diagram/Schematics

Please refer to the related document.

#### 3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6 Test Setup

Please refer to the test setup photo.



#### 4. SUMMARY OF TEST RESULTS

| Requirement                                                      | CFR 47 Section                                                                       | Result |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| Authorized Frequency Band Verification Test                      | §20.21(e)(3)                                                                         | PASS   |
| Maximum Power Measurement Procedure                              | §20.21(e)(8)(i)(D)<br>§20.21(e)(8)(i)(B)&§20.21(e)(4)                                | PASS   |
| Maximum Booster Gain Computation                                 | §20.21(e)(8)(i)(C)(2)<br>§20.21(e)(8)(i)(B)&§20.21(e)(4)                             | PASS   |
| Intermodulation Product                                          | §20.21(e)(8)(i)(F)                                                                   | PASS   |
| Out of Band Emissions                                            | §20.21(e)(8)(i)(E)                                                                   | PASS   |
| Conducted Spurious Emission                                      | §2.1051                                                                              | PASS   |
| Noise Limit Procedure<br>Variable Noise Variable Noise<br>Timing | §20.21(e)(8)(i)(A)(2)(i)<br>§20.21(e)(8)(i)(A)(1)<br>§20.21(e)(8)(i)(H)&§20.21(e)(4) | PASS   |
| Uplink inactivity                                                | §20.21(e)(8)(i)(I)<br>&§20.21(e)(4)                                                  | PASS   |
| Variable Booster Gain<br>Variable Uplink Gain Timing             | §20.21(e)(8)(i)(C) (1), (2)(i)<br>§20.21(e)(8)(i)(H)                                 | PASS   |
| Occupied Band Width                                              | §2.1049                                                                              | PASS   |
| Anti-Oscillation                                                 | §20.21(e)(8)(ii)(A)&§20.21(e)(4)                                                     | PASS   |
| Radiated Spurious Emission                                       | §2.1053                                                                              | PASS   |
| Spectrum Block Filter                                            | N/A                                                                                  | N/A    |

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



## 5. SUMMARY OF TEST EQUIPMENT

| Item | Equipment                           | Manufacturer     | Model No.    | Serial No. | Cal Date   | Due Date   |
|------|-------------------------------------|------------------|--------------|------------|------------|------------|
| 1    | LTE Test Software                   | Tonscend         | JS1120-1     | N/A        | N/A        | N/A        |
| 2    | RF Control Unit                     | Tonscend         | JS0806       | 158060009  | 2022-06-20 | 2023-06-19 |
| 3    | MXA Signal Analyzer                 | Agilent          | N9020A       | MY51250905 | 2022-06-20 | 2023-06-19 |
| 4    | DC Power Supply                     | Agilent          | E3642A       | N/A        | 2022-11-24 | 2023-11-23 |
| 5    | MXG Vector Signal Generator         | Agilent          | N5182A       | MY47071151 | 2022-06-20 | 2023-06-19 |
| 6    | PSG Analog Signal Generator         | Agilent          | E8257D       | MY4520521  | 2022-06-20 | 2023-06-19 |
| 7    | Temperature & Humidity Chamber      | GUANGZHOU GOGNWN | GDS-100      | 70932      | 2022-10-06 | 2023-10-05 |
| 8    | EMI Test Software                   | EZ               | EZ-EMC       | /          | N/A        | N/A        |
| 9    | 3m Semi Anechoic Chamber            | SIDT FRANKONIA   | SAC-3M       | 03CH03-HY  | 2022-06-20 | 2023-06-19 |
| 10   | Positioning Controller              | MF               | MF7082       | MF78020803 | 2022-06-20 | 2023-06-19 |
| 11   | Active Loop Antenna                 | SCHWARZBECK      | FMZB 1519B   | 00005      | 2022-07-25 | 2023-07-24 |
| 12   | By-log Antenna                      | SCHWARZBECK      | VULB9163     | 9163-470   | 2022-06-20 | 2023-06-19 |
| 13   | Horn Antenna                        | SCHWARZBECK      | BBHA 9120D   | 9120D-1925 | 2022-06-30 | 2025-06-29 |
| 14   | Broadband Horn Antenna              | SCHWARZBECK      | BBHA 9170    | 791        | 2020-09-20 | 2023-09-19 |
| 15   | Broadband Preamplifier              | SCHWARZBECK      | BBV9745      | 9719-025   | 2022-06-20 | 2023-06-19 |
| 16   | EMI Test Receiver                   | R&S              | ESR 7        | 101181     | 2022-06-20 | 2023-06-19 |
| 17   | RS SPECTRUM ANALYZER                | R&S              | FSP40        | 100503     | 2022-06-20 | 2023-06-19 |
| 18   | Broadband Preamplifier              | /                | BP-01M18G    | P190501    | 2022-06-20 | 2023-06-19 |
| 19   | RF Cable-R03m                       | Jye Bao          | RG142        | CB021      | 2022-06-20 | 2023-06-19 |
| 20   | RF Cable-HIGH                       | SUHNER           | SUCOFLEX 106 | 03CH03-HY  | 2022-06-20 | 2023-06-19 |
| 21   | WIDEBAND RADIO COMMUNICATION TESTER | R&S              | CMW 500      | 103818     | 2022-06-20 | 2023-06-19 |
| 22   | RF Filter                           | Micro-Tronics    | BRC50718     | S/N-017    | 2022-06-20 | 2023-06-19 |
| 23   | RF Filter                           | Micro-Tronics    | BRC50719     | S/N-011    | 2022-06-20 | 2023-06-19 |
| 24   | RF Filter                           | Micro-Tronics    | BRC50720     | S/N-011    | 2022-06-20 | 2023-06-19 |
| 25   | RF Filter                           | Micro-Tronics    | BRC50721     | S/N-013    | 2022-06-20 | 2023-06-19 |
| 26   | RF Filter                           | Micro-Tronics    | BRM50702     | S/N-195    | 2022-06-20 | 2023-06-19 |
| 27   | 6dB Attenuator                      | /                | 100W/6dB     | 1172040    | 2022-06-20 | 2023-06-19 |
| 28   | 3dB Attenuator                      | /                | 2N-3dB       | /          | 2022-06-20 | 2023-06-19 |
| 29   | RS SPECTRUM ANALYZER                | R&S              | FSP40        | 100503     | 2022-06-20 | 2023-06-19 |



## 6. MEASUREMENT RESULTS

### 6.1 Authorized Frequency Band Verification

#### Applicable Standard

According to § 20.21(e)(3) Frequency Bands.

This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In other words, the signal booster shall reject amplification of other signals outside of its passband. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.

#### Test Procedure

According to section 7.1 of KDB 935210 D03 Signal Booster Measurement v04r04:

- Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor) port connected to the spectrum analyzer.
- Set the spectrum analyzer resolution bandwidth (RBW) for 100 kHz with the video bandwidth (VBW)  $\geq 3$  the RBW, using a PEAK detector with the MAX HOLD function.
- Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz.
- Set the signal generator for CW mode and tune to the center frequency of the operational band under test.
- Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer.
- Slowly increase the signal generator power level until the output signal reaches the AGC operational level.
- Reduce the signal generator power to a level that is 3 dB below the level noted above, then manually reset the EUT (e.g., cycle ac/dc power).
- Reset the spectrum analyzer span to 2 the width of the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep 2 the width of the CMRS band using the sweep function. The AGC must be deactivated throughout the entire sweep.
- Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on).
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

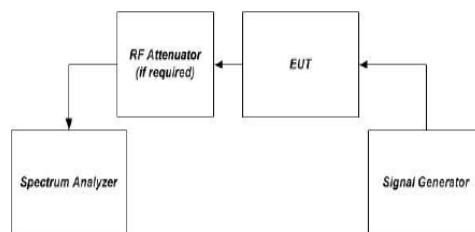


Figure 1 – Band verification test instrumentation setup




## Test Data


|               |          |           |              |
|---------------|----------|-----------|--------------|
| Temperature   | 23.1 °C  | Humidity  | 54.2%        |
| Test Engineer | Ling Zhu | Test Mode | Transmitting |

## Test Graphs


## Uplink

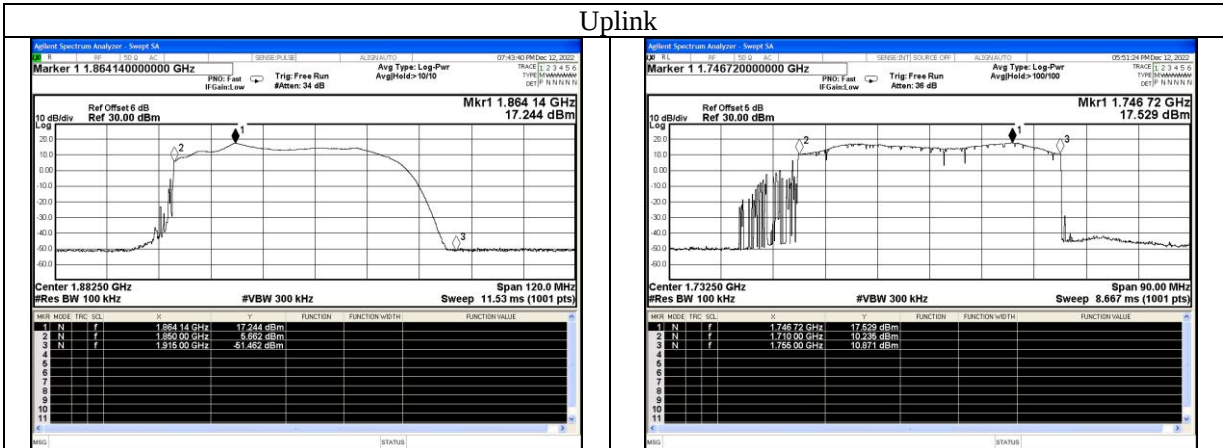


## PCS Band

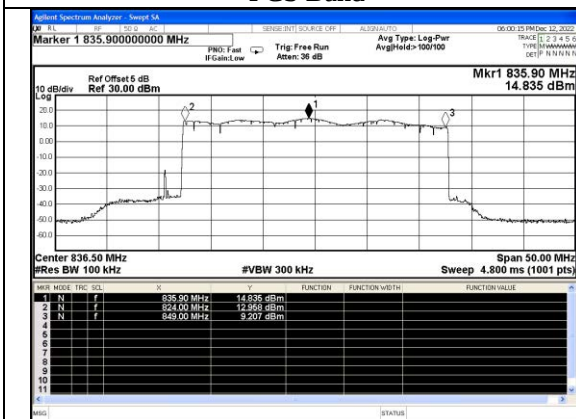


## AWS Band

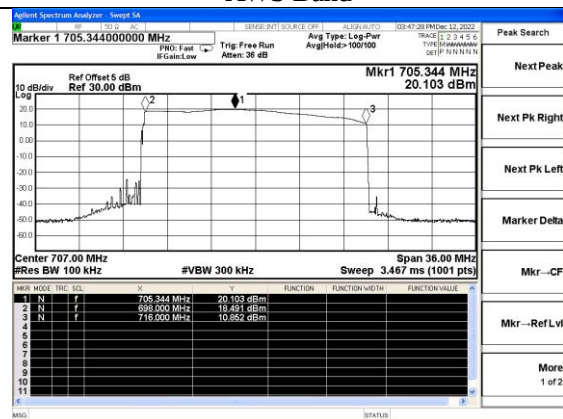

## Cellular band

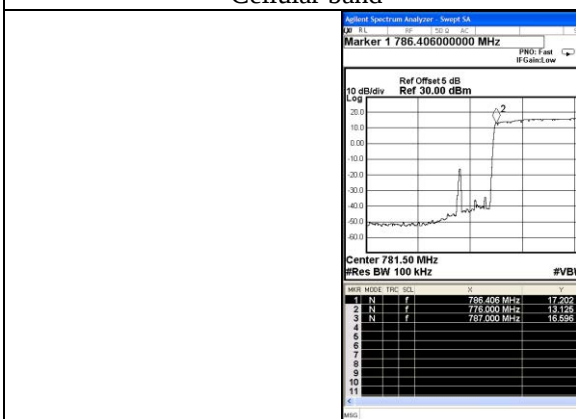

## Lower 700MHz

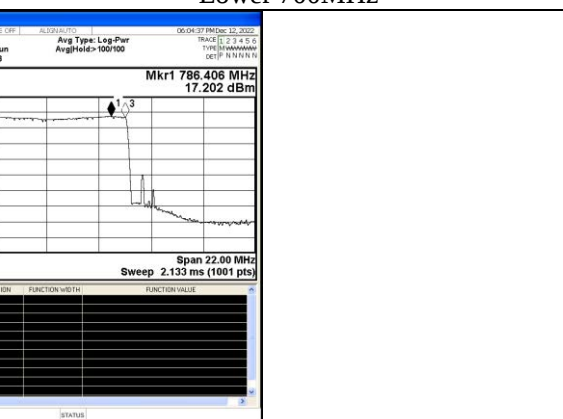


## Upper 700MHz







## Downlink

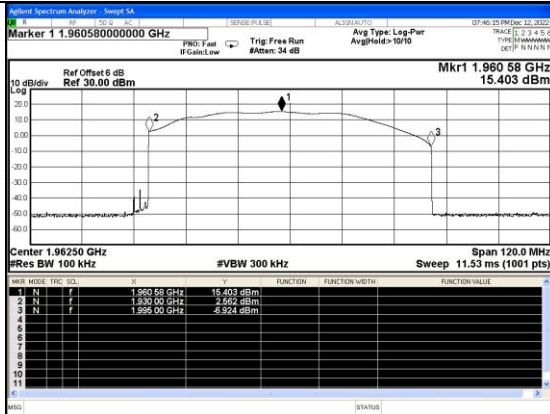


PCS Band

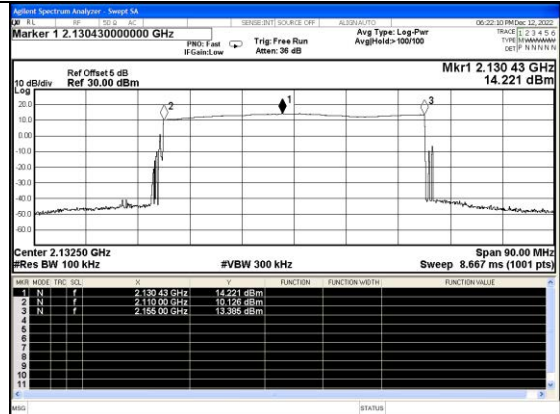


AWS Band

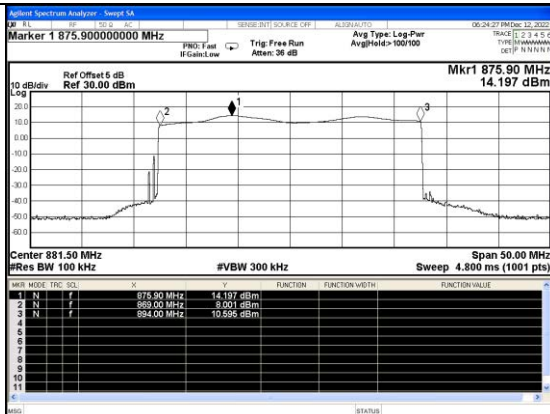

Cellular band

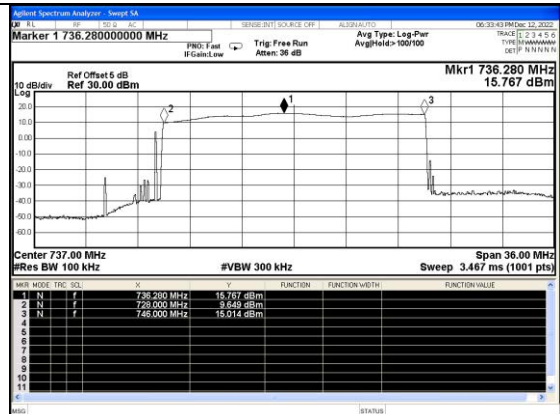

Lower 700MHz

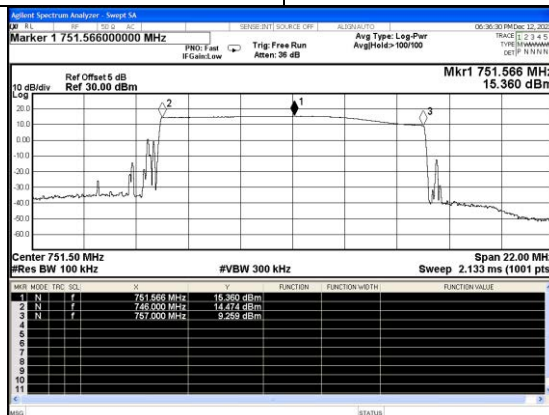

Upper 700MHz



## 6.2 Maximum power measurement

### Applicable Standard

According to §20.21(e)(8)(i)(D) Power Limits; §20.21(e)(8)(i)(B) Bidirectional Capability (uplink minimum conducted power output); §20.21(e)(4) Self-monitoring:

1. A booster's uplink power must not exceed 1 watt composite conducted power and equivalent isotropic radiated power (EIRP) for each band of operation. Composite downlink power shall not exceed 0.05 watt (17 dBm) conducted and EIRP for each band of operation.
2. Consumer Boosters must be able to provide equivalent uplink and downlink gain and conducted uplink power output that is at least 0.05 watts

This procedure shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in Sections 20.21(e)(8)(i)(D) and 20.21(e)(8)(i)(B) for wideband consumer signal boosters.

### Test Procedure

According to section 7.2.1 of KDB 935210 D03 Signal Booster Measurement v04r04:

- a) Compliance to applicable EIRP limits must be shown using the highest gains from the list of antennas, cabling, and coupling devices declared by the manufacturer for use with the consumer booster.
- b) In addition, the maximum power levels measured in this procedure will be used in calculating the maximum gain as described in the next subclause.
- c) The frequency with the highest power level in each operational band as determined in 7.1 is to be measured discretely by applying the following procedure using the stated emission and power detector types independently.
- d) Use a signal generator to create a pulsed CW or GSM signal with a pulse width of 570  $\mu$ s and a duty cycle of 12.5% (i.e., one GSM timeslot), then measure using the burst power function of the measuring instrument.
- e) Use a signal generator to create an AWGN signal with a 99% occupied bandwidth (OBW) of 4.1 MHz, then measure using the channel power or band power function of the measuring instrumentation.
- f) All modes of operation must be verified to maintain operation within applicable limits at the maximum uplink and downlink test levels per device type as defined in 5.5, by increasing the power level in 2 dB steps from the AGC level to the maximum input level specified in 5.5.

According to section 7.2.2 of KDB 935210 D03 Signal Booster Measurement v04r04:

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor) port connected to the spectrum analyzer.
- b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz.
- c) Set the initial signal generator power to a level well below that which causes AGC activation.
- d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased).
- e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.
- f) Slowly increase the signal generator power to a level just below (and within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as  $P_{in}$ .
- g) Measure the output power,  $P_{out}$ , with the spectrum analyzer as follows.



- 1) Set RBW = 100 kHz for AWGN signal type, or 300 kHz for CW or GSM signal type.
- 2) Set VBW  $\geq 3$  RBW.
- 3) Select either the BURST POWER or CHANNEL POWER measurement mode, as required for each signal type. For AWGN, the channel power integration bandwidth shall be the 99% OBW of the 4.1 MHz signal.
- 4) Select the power averaging (rms) detector.
- 5) Affirm that the number of measurement points per sweep  $\geq (2 \text{ span})/\text{RBW}$ .
- NOTE—This requirement does not apply for BURST power measurement mode.
- 6) Set sweep time = auto couple, or as necessary (but no less than auto couple value).
- 7) Trace average at least 100 traces in power averaging (i.e., rms) mode.

8) Record the measured power level  $P_{out}$ , with one set of results for the GSM or CW input stimulus, and another set of results for the AWGN input stimulus.

## Test Data

|               |          |           |              |
|---------------|----------|-----------|--------------|
| Temperature   | 23.1℃    | Humidity  | 54.2%        |
| Test Engineer | Ling Zhu | Test Mode | Transmitting |

For Outdoor Antenna(Yagi antenna)/Indoor Antenna(Omni Antenna)

| Max. Output Power |                |             |                              |                        |                      |            |             |         |
|-------------------|----------------|-------------|------------------------------|------------------------|----------------------|------------|-------------|---------|
| Mode              | Operation Band | Signal Type | Conducted Output Level (dBm) | Max. Antenna Gain (dB) | Min. Cable Loss (dB) | EIRP (dBm) | Limit (dBm) | Verdict |
| Uplink            | PCS            | CW          | 20.90                        | 10                     | 2.7                  | 28.20      | 17-30       | PASS    |
|                   |                | AWGN        | 20.29                        | 10                     | 2.7                  | 27.59      |             | PASS    |
|                   | AWS            | CW          | 20.29                        | 10                     | 2.7                  | 27.59      |             | PASS    |
|                   |                | AWGN        | 20.12                        | 10                     | 2.7                  | 27.42      |             | PASS    |
|                   | Cellular       | CW          | 20.12                        | 9.5                    | 1.7                  | 27.92      |             | PASS    |
|                   |                | AWGN        | 20.41                        | 9.5                    | 1.7                  | 28.21      |             | PASS    |
|                   | Lower 700      | CW          | 20.11                        | 9.5                    | 1.7                  | 27.91      |             | PASS    |
|                   |                | AWGN        | 20.63                        | 9.5                    | 1.7                  | 28.43      |             | PASS    |
|                   | Upper 700      | CW          | 21.05                        | 9.5                    | 1.7                  | 28.85      |             | PASS    |
|                   |                | AWGN        | 20.99                        | 9.5                    | 1.7                  | 28.79      |             | PASS    |
| Downlink          | PCS            | CW          | 9.11                         | 3.0                    | 1.4                  | 10.71      | $\leq 17$   | PASS    |
|                   |                | AWGN        | 9.05                         | 3.0                    | 1.4                  | 10.65      |             | PASS    |
|                   | AWS            | CW          | 8.79                         | 3.0                    | 1.4                  | 10.39      |             | PASS    |
|                   |                | AWGN        | 8.84                         | 3.0                    | 1.4                  | 10.44      |             | PASS    |
|                   | Cellular       | CW          | 9.02                         | 3.0                    | 0.8                  | 11.22      |             | PASS    |
|                   |                | AWGN        | 9.11                         | 3.0                    | 0.8                  | 11.31      |             | PASS    |
|                   | Lower 700      | CW          | 9.09                         | 3.0                    | 0.8                  | 11.29      |             | PASS    |
|                   |                | AWGN        | 8.97                         | 3.0                    | 0.8                  | 11.17      |             | PASS    |
|                   | Upper 700      | CW          | 9.10                         | 3.0                    | 0.8                  | 11.30      |             | PASS    |
|                   |                | AWGN        | 9.09                         | 3.0                    | 0.8                  | 11.29      |             | PASS    |



## For Outdoor Antenna(Panel antenna)/Indoor Antenna(Panel Antenna)

| Max. Output Power |                |             |                              |                        |                      |            |             |         |
|-------------------|----------------|-------------|------------------------------|------------------------|----------------------|------------|-------------|---------|
| Mode              | Operation Band | Signal Type | Conducted Output Level (dBm) | Max. Antenna Gain (dB) | Min. Cable Loss (dB) | EIRP (dBm) | Limit (dBm) | Verdict |
| Uplink            | PCS            | CW          | 20.90                        | 9                      | 2.7                  | 27.20      | 17-30       | PASS    |
|                   |                | AWGN        | 20.29                        | 9                      | 2.7                  | 26.59      |             | PASS    |
|                   | AWS            | CW          | 20.29                        | 9                      | 2.7                  | 26.59      |             | PASS    |
|                   |                | AWGN        | 20.12                        | 9                      | 2.7                  | 26.42      |             | PASS    |
|                   | Cellular       | CW          | 20.12                        | 7                      | 1.7                  | 25.42      |             | PASS    |
|                   |                | AWGN        | 20.41                        | 7                      | 1.7                  | 25.71      |             | PASS    |
|                   | Lower 700      | CW          | 20.11                        | 7                      | 1.7                  | 25.41      |             | PASS    |
|                   |                | AWGN        | 20.63                        | 7                      | 1.7                  | 25.93      |             | PASS    |
|                   | Upper 700      | CW          | 21.05                        | 7                      | 1.7                  | 26.35      |             | PASS    |
|                   |                | AWGN        | 20.99                        | 7                      | 1.7                  | 26.29      |             | PASS    |
| Downlink          | PCS            | CW          | 9.11                         | 9                      | 1.4                  | 16.71      | ≤17         | PASS    |
|                   |                | AWGN        | 9.05                         | 9                      | 1.4                  | 16.65      |             | PASS    |
|                   | AWS            | CW          | 8.79                         | 9                      | 1.4                  | 16.39      |             | PASS    |
|                   |                | AWGN        | 8.84                         | 9                      | 1.4                  | 16.44      |             | PASS    |
|                   | Cellular       | CW          | 9.02                         | 7                      | 0.8                  | 15.22      |             | PASS    |
|                   |                | AWGN        | 9.11                         | 7                      | 0.8                  | 15.31      |             | PASS    |
|                   | Lower 700      | CW          | 9.09                         | 7                      | 0.8                  | 15.29      |             | PASS    |
|                   |                | AWGN        | 8.97                         | 7                      | 0.8                  | 15.17      |             | PASS    |
|                   | Upper 700      | CW          | 9.10                         | 7                      | 0.8                  | 15.30      |             | PASS    |
|                   |                | AWGN        | 9.09                         | 7                      | 0.8                  | 15.29      |             | PASS    |

Note: EIRP(dBm) = Conducted Output Level + Max. Antenna Gain - Min.Cable Loss



| Max. Input test level |                |             |                        |                             |                             |         |
|-----------------------|----------------|-------------|------------------------|-----------------------------|-----------------------------|---------|
| Mode                  | Operation Band | Signal Type | Max. Input Level (dBm) | Max. Input Level limit(dBm) | Conducted Output Level(dBm) | Verdict |
| Uplink                | PCS            | CW          | 16.52                  | $\leq 27$                   | 20.87                       | PASS    |
|                       |                | AWGN        | 16.25                  |                             | 20.31                       | PASS    |
|                       | AWS            | CW          | 14.32                  |                             | 20.24                       | PASS    |
|                       |                | AWGN        | 13.21                  |                             | 20.15                       | PASS    |
|                       | Cellular       | CW          | 15.21                  |                             | 20.09                       | PASS    |
|                       |                | AWGN        | 13.21                  |                             | 20.38                       | PASS    |
|                       | Lower 700      | CW          | 14.21                  |                             | 20.08                       | PASS    |
|                       |                | AWGN        | 13.52                  |                             | 20.59                       | PASS    |
|                       | Upper 700      | CW          | 14.25                  |                             | 21.04                       | PASS    |
|                       |                | AWGN        | 13.21                  |                             | 20.87                       | PASS    |
| Downlink              | PCS            | CW          | -25.62                 | $\leq -20$                  | 9.08                        | PASS    |
|                       |                | AWGN        | -27.23                 |                             | 9.04                        | PASS    |
|                       | AWS            | CW          | -25.63                 |                             | 8.69                        | PASS    |
|                       |                | AWGN        | -28.12                 |                             | 8.79                        | PASS    |
|                       | Cellular       | CW          | -26.32                 |                             | 9.03                        | PASS    |
|                       |                | AWGN        | -27.12                 |                             | 9.12                        | PASS    |
|                       | Lower 700      | CW          | -26.32                 |                             | 8.97                        | PASS    |
|                       |                | AWGN        | -25.52                 |                             | 8.96                        | PASS    |
|                       | Upper 700      | CW          | -26.32                 |                             | 9.07                        | PASS    |
|                       |                | AWGN        | -27.12                 |                             | 9.06                        | PASS    |



## 6.3 Maximum booster gain computation

### Applicable Standard

According to §20.21(e)(8)(i)(C)(2) Booster Gain Limits (maximum gain); §20.21(e)(8)(i)(B) Bidirectional Capability (equivalent uplink and downlink gain):

The uplink and downlink maximum gain of a Consumer Booster referenced to its input and output ports shall not exceed the following limits:

- (i) Fixed Booster maximum gain shall not exceed  $6.5 \text{ dB} + 20 \text{ Log}_{10} (\text{Frequency})$ ;
- (ii) Where, Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

According to section 7.3 of KDB 935210 D03 Signal Booster Measurement v04r04:

This subclause provides guidance for the calculation of the maximum gain, based on the results obtained from the 7.1 and 7.2 measurements. The NPS limits on maximum gain for fixed and mobile wideband consumer signal boosters are provided in §20.21(e)(8)(i)(C)(2). Additionally, §20.21(e)(8)(i)(B) requires that wideband consumer signal boosters be able to provide equivalent uplink and downlink gain, i.e., within 9 dB.

- a) Calculate the maximum gain of the booster as follows to demonstrate compliance to the applicable gain limits as specified.
- b) For both the uplink and downlink in each supported frequency band, use each of the POUT and PIN result pairs for all signal types used in 7.2 in the following equation to obtain the maximum gain, G:

$$G \text{ (dB)} = \text{POUT(dBm)} - \text{PIN(dBm)}.$$

- c) Record the maximum gain of the uplink and downlink paths for each supported frequency band, and verify that the each gain value complies with the applicable limit.
- d) Provide tabulated results in the test report

### Test Data

|               |          |           |              |
|---------------|----------|-----------|--------------|
| Temperature   | 23.1°C   | Humidity  | 54.2%        |
| Test Engineer | Ling Zhu | Test Mode | Transmitting |



| Max. Gain |                |             |                           |                              |           |                 |         |
|-----------|----------------|-------------|---------------------------|------------------------------|-----------|-----------------|---------|
| Mode      | Operation Band | Signal Type | Pre AGC Input Level (dBm) | Conducted Output Level (dBm) | Gain (dB) | Gain Limit (dB) | Verdict |
| Uplink    | PCS            | CW          | -35.52                    | 20.90                        | 56.42     | ≤71.99          | PASS    |
|           |                | AWGN        | -35.62                    | 20.29                        | 55.91     |                 | PASS    |
|           | AWS            | CW          | -35.21                    | 20.29                        | 55.50     | ≤71.27          | PASS    |
|           |                | AWGN        | -35.63                    | 20.12                        | 55.75     |                 | PASS    |
|           | Cellular       | CW          | -35.61                    | 20.12                        | 55.73     | ≤64.95          | PASS    |
|           |                | AWGN        | -35.64                    | 20.41                        | 56.05     |                 | PASS    |
|           | Lower 700      | CW          | -35.64                    | 20.11                        | 55.75     | ≤63.49          | PASS    |
|           |                | AWGN        | -35.15                    | 20.63                        | 55.78     |                 | PASS    |
|           | Upper 700      | CW          | -35.56                    | 21.05                        | 56.61     | ≤64.36          | PASS    |
|           |                | AWGN        | -35.63                    | 20.99                        | 56.62     |                 | PASS    |
| Downlink  | PCS            | CW          | -46.32                    | 9.11                         | 55.43     | ≤71.99          | PASS    |
|           |                | AWGN        | -47.21                    | 9.05                         | 56.26     |                 | PASS    |
|           | AWS            | CW          | -46.38                    | 8.79                         | 55.17     | ≤71.27          | PASS    |
|           |                | AWGN        | -46.32                    | 8.84                         | 55.16     |                 | PASS    |
|           | Cellular       | CW          | -46.35                    | 9.02                         | 55.37     | ≤64.95          | PASS    |
|           |                | AWGN        | -47.52                    | 9.11                         | 56.63     |                 | PASS    |
|           | Lower 700      | CW          | -46.22                    | 9.09                         | 55.31     | ≤63.49          | PASS    |
|           |                | AWGN        | -46.25                    | 8.97                         | 55.22     |                 | PASS    |
|           | Upper 700      | CW          | -47.62                    | 9.10                         | 56.72     | ≤64.36          | PASS    |
|           |                | AWGN        | -48.62                    | 9.09                         | 57.71     |                 | PASS    |

**Note:** Fixed Booster maximum gain shall not exceed  $6.5 \text{ dB} + 20 \text{ Log}_{10}(\text{Frequency})$ , where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

| Uplink Gain VS Downlink Gain |             |                  |                    |                       |             |         |
|------------------------------|-------------|------------------|--------------------|-----------------------|-------------|---------|
| Band                         | Signal Type | Uplink Gain (dB) | Downlink Gain (dB) | Calculated value(dBc) | Limit (dBc) | Verdict |
| PCS                          | CW          | 56.42            | 55.43              | 0.99                  | <9          | PASS    |
|                              | AWGN        | 55.91            | 56.26              | -0.35                 |             | PASS    |
| AWS                          | CW          | 55.50            | 55.17              | 0.33                  |             | PASS    |
|                              | AWGN        | 55.75            | 55.16              | 0.59                  |             | PASS    |
| Cellular                     | CW          | 55.73            | 55.37              | 0.36                  |             | PASS    |
|                              | AWGN        | 56.05            | 56.63              | -0.58                 |             | PASS    |
| Lower 700                    | CW          | 55.75            | 55.31              | 0.44                  |             | PASS    |
|                              | AWGN        | 55.78            | 55.22              | 0.56                  |             | PASS    |
| Upper 700                    | CW          | 56.61            | 56.72              | -0.11                 |             | PASS    |
|                              | AWGN        | 56.62            | 57.71              | -1.09                 |             | PASS    |



## 6.4 Intermodulation Product

### Applicable Standard

According to §20.21(e)(8)(i)(F) Intermodulation Limits:

The transmitted intermodulation products of a consumer booster at its uplink and downlink ports shall not exceed the power level of  $-19$  dBm for the supported bands of operation.

### Test Procedure

According to section 7.4 of KDB 935210 D03 Signal Booster Measurement v04r04:

- Connect the signal booster to the test equipment as shown in Figure 2. Begin with the uplink output (donor) port connected to the spectrum analyzer.
  - Set the spectrum analyzer RBW = 3 kHz.
  - Set the VBW  $\geq 3$  RBW.
  - Select the rms detector.
  - Set the spectrum analyzer center frequency to the center of the supported operational band under test.
  - Set the span to 5 MHz. Affirm that the number of measurement points per sweep  $\geq (2 \times \text{span})/\text{RBW}$ .
  - Configure the two signal generators for CW operation with generator #1 tuned 300 kHz below the operational band center frequency and generator #2 tuned 300 kHz above the operational band center frequency. If the maximum output power is not at the operational-band (booster pass band) center frequency, configure the test signal pair around the frequency with maximum output power as determined per 7.2.
  - Set the signal generator amplitudes so that the power from each into the EUT is equivalent, then turn on the RF output.
  - Simultaneously increase each signal generators' amplitude equally until just before the EUT begins AGC, then affirm that all intermodulation-product emissions (if any occur) are below the specified limit of  $-19$  dBm.
  - Use the trace averaging function of the spectrum analyzer, and wait for the trace to stabilize. Place a marker at the highest amplitude intermodulation-product emission.
  - Record the maximum intermodulation product amplitude level that is observed.
  - Capture the spectrum analyzer trace for inclusion in the test report.
  - Repeat 7.4e) to 7.4l) for all uplink and downlink operational bands.
- NOTE—If using a single signal generator with dual outputs, affirm that intermodulation products are not the result of the generator.
- Increase the signal generator amplitude in 2 dB steps to 10 dB above the AGC threshold determined in 7.4i), but not exceeding the maximum input level of 5.5, to affirm that the EUT maintains compliance with the intermodulation limit. The test report shall include either a statement describing that the device complies at 10 dB above AGC or at the 5.5 power levels, or a table showing compliance at the additional input power(s) required.

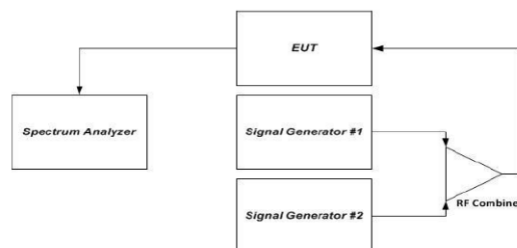



Figure 2 – Intermodulation product instrumentation test setup




## Test Data

|               |          |           |              |
|---------------|----------|-----------|--------------|
| Temperature   | 23.1°C   | Humidity  | 54.2%        |
| Test Engineer | Ling Zhu | Test Mode | Transmitting |


## Test Graphs

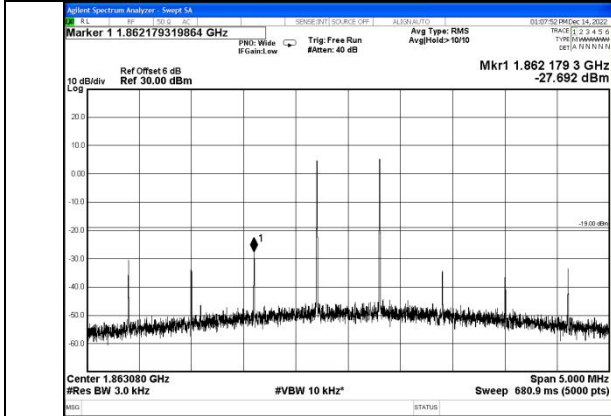


PCS Band Pre AGC, UL

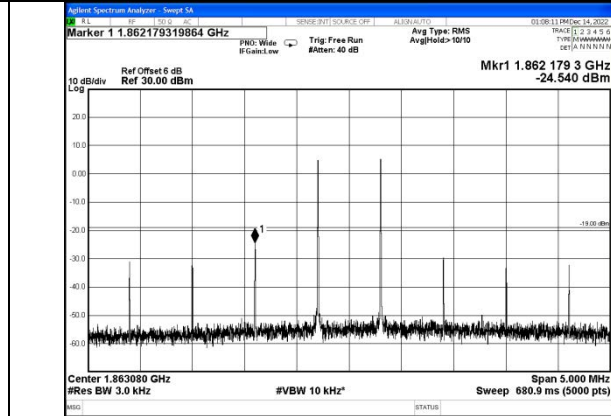


PCS Band AGC+10dB, UL

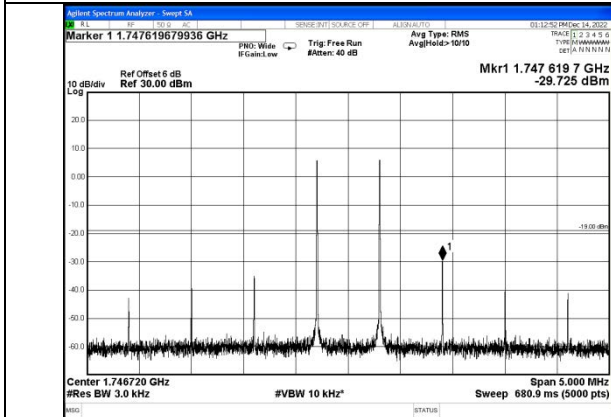


AWS Band Pre AGC, UL

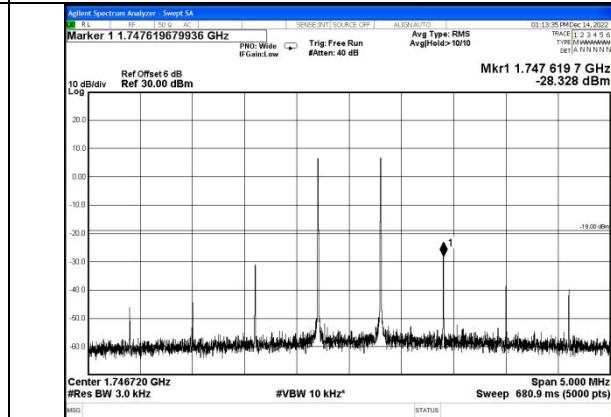


AWS Band AGC+10dB, UL

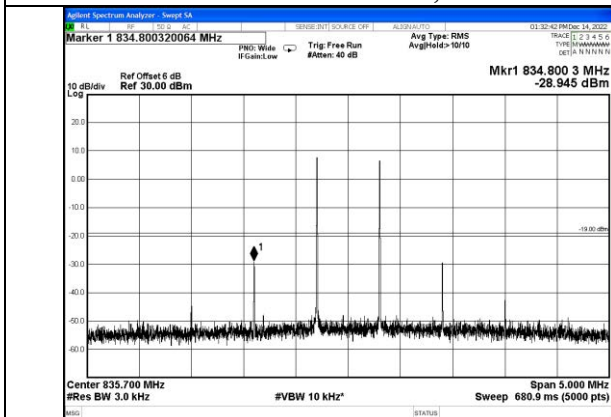


Cellular Band Pre AGC, UL

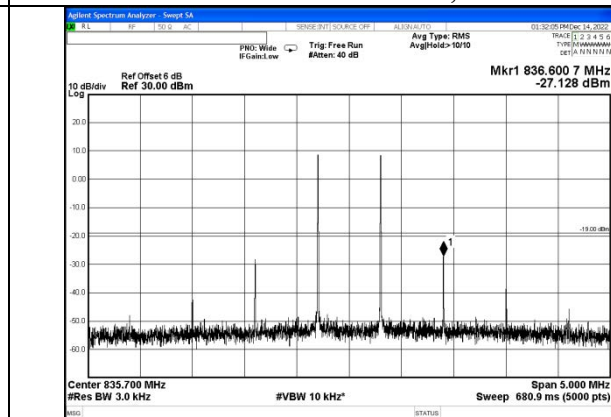


Cellular Band AGC+10dB, UL

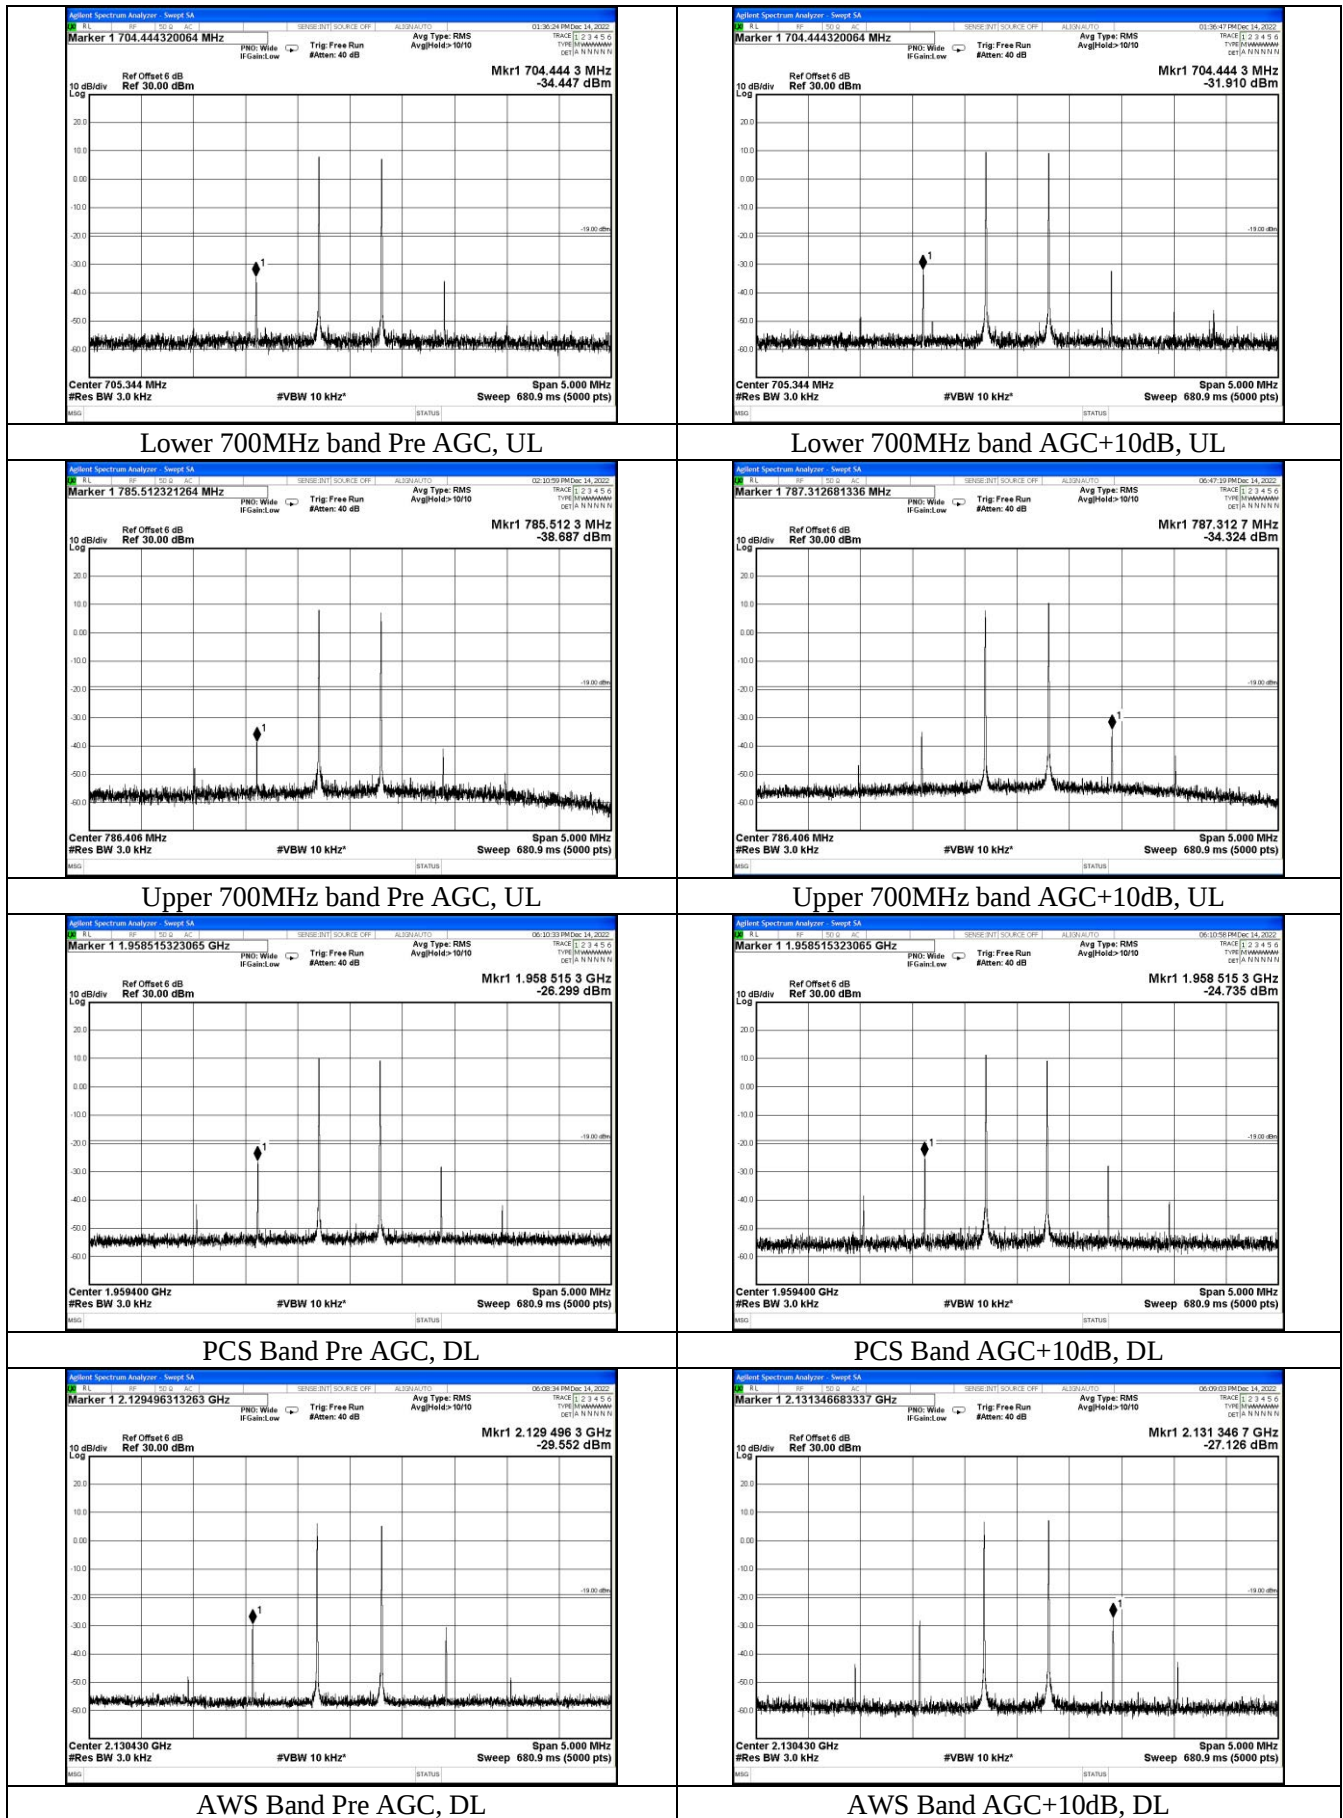


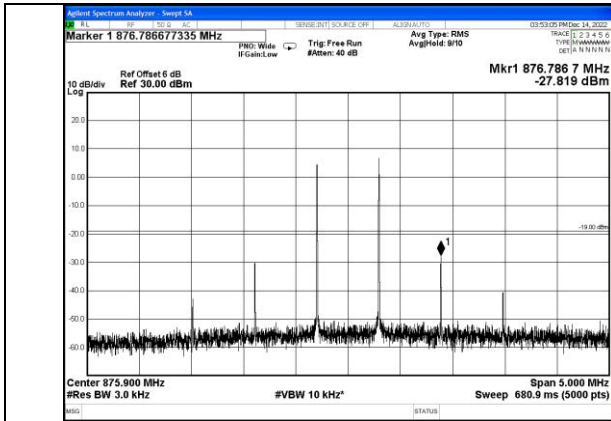


Cellular Band Pre AGC, DL

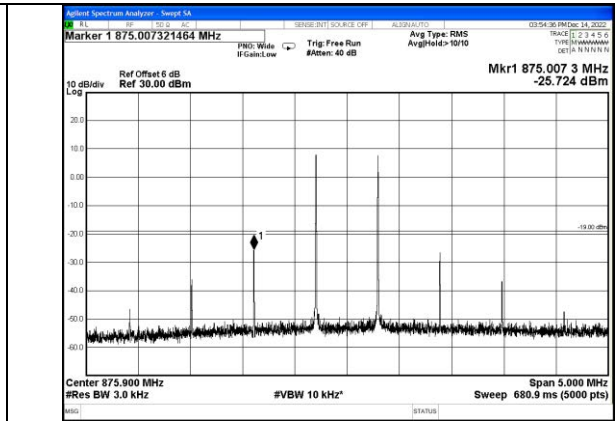


Cellular Band AGC+10dB, DL

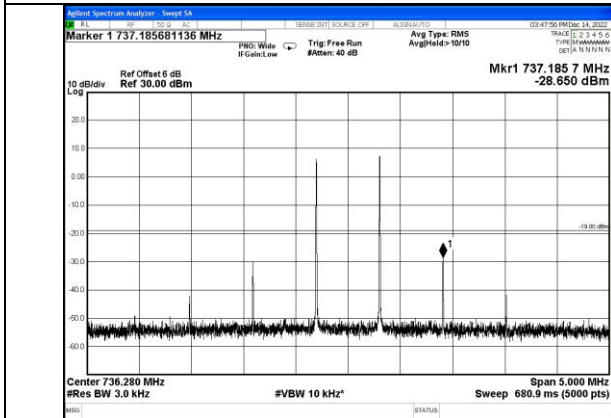


Lower 700MHz band Pre AGC, DL

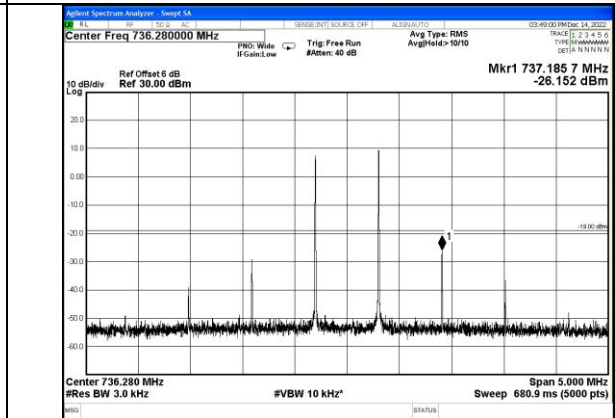

Lower 700MHz band AGC+10dB, DL

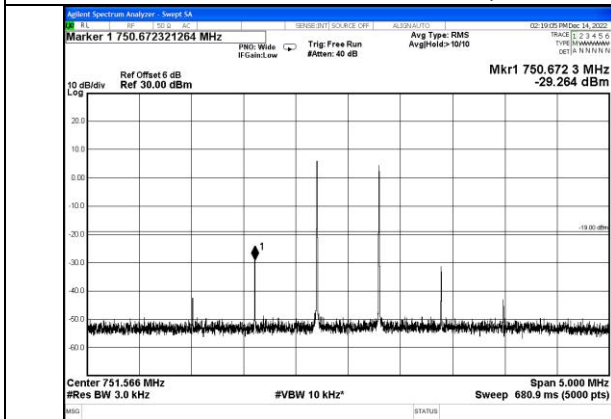

Upper 700MHz band Pre AGC, DL

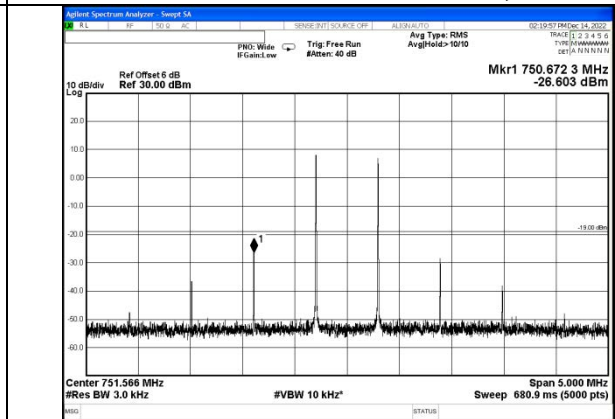

Upper 700MHz band AGC+10dB, DL



## 6.5 Out of Band Emission

### Applicable Standard

According to § 20.21(e)(8)(i)(E) Out of Band Emission Limits:

Booster out of band emissions (OOBE) shall be at least 6 dB below the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.

For B2: Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

For B4: Per §27.53(h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

For B5: Per FCC §22.917 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

For B12: Per §27.53 (g): For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB.

For B13: Per §27.53 (c): For operations in the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.

Calculation: Limit (dBm) =  $[P - 43 + 10 \log(P)] - 6 = -19$  dBm

### Test Procedure

According to section 7.5 of KDB 935210 D03 Signal Booster Measurement v04r04:

a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor) port connected to the spectrum analyzer.

b) Configure the signal generator for the appropriate operation for all uplink and downlink bands:

1) GSM: 0.2 MHz from upper and lower band edges.

2) LTE (5 MHz): 2.5 MHz from upper and lower band edges.

3) CDMA: 1.25 MHz from upper and lower band edges, except for cellular band as follows (only the upper and lower frequencies need to be tested):

824.88 MHz, 845.73 MHz, 836.52 MHz, 848.10 MHz,

869.88 MHz, 890.73 MHz, 881.52 MHz, 893.10 MHz.

NOTE 1–Alternative test modulation types:

- CDMA (alternative 1.25 MHz AWGN)

- LTE 5 MHz (alternative W-CDMA or 4.1 MHz AWGN)

NOTE 2–For LTE, the signal generator should use the uplink and downlink signal types for these modulations in uplink and downlink tests, respectively. LTE shall use 5 MHz signal, 25 resource blocks transmitting.

NOTE 3–When using an AWGN test signal, the bandwidth shall be the measured 99% OBW.

c) Set the signal generator amplitude to the maximum power level prior to AGC similar to 7.2.2e)



to 7.2.2f) of the power measurement procedures for the appropriate modulations.

d) Set RBW = measurement bandwidth specified in the applicable rule section for the supported frequency band (see Appendix A for cross-reference to applicable rule section).

e) NOTE 3—Within 300 kHz and 3 MHz away from band edge, if smaller RBW is used (i.e., RBW < 100 kHz or 1 MHz, for above and below 1 GHz, respectively), per Parts 24 and 27 the smaller RBW is applicable only for frequencies within 100 kHz or 1 MHz (for above and below 1 GHz, respectively) away from the band edge.

f) Set VBW = 3 RBW.

g) Select the power averaging (rms) detector.

h) Sweep time = auto-couple.

i) Set the analyzer start frequency to the upper band/block edge frequency and the stop frequency to the upper band/block edge frequency plus: 300 kHz (when operational frequency is < 1 GHz), or 3 MHz (when operational frequency is  $\geq$  1 GHz).

j) Trace average at least 100 traces in power averaging (i.e., rms) mode.

k) Use peak marker function to find the maximum power level.

l) Capture the spectrum analyzer trace of the power level for inclusion in the test report.

m) Increase the signal generator amplitude in 2 dB steps until the maximum input level per 5.5 is reached. Affirm that the EUT maintains compliance with the OOB limits. The test report shall include either a statement describing that the device complies at 10 dB above AGC or at the 5.5 power levels, or a table showing compliance at the additional input power(s) required.

n) Reset the analyzer start frequency to the lower band/block edge frequency minus: 300 kHz (when operational frequency is < 1 GHz), or 3 MHz (when operational frequency is  $\geq$  1 GHz), and the stop frequency to the lower band/block edge frequency, then repeat 7.5i) to 7.5l).


Repeat 7.5b) through 7.5m) for each uplink and downlink operational band.




## Test data


|               |          |           |              |
|---------------|----------|-----------|--------------|
| Temperature   | 23.1 °C  | Humidity  | 54.2%        |
| Test Engineer | Ling Zhu | Test Mode | Transmitting |

## Test Graphs

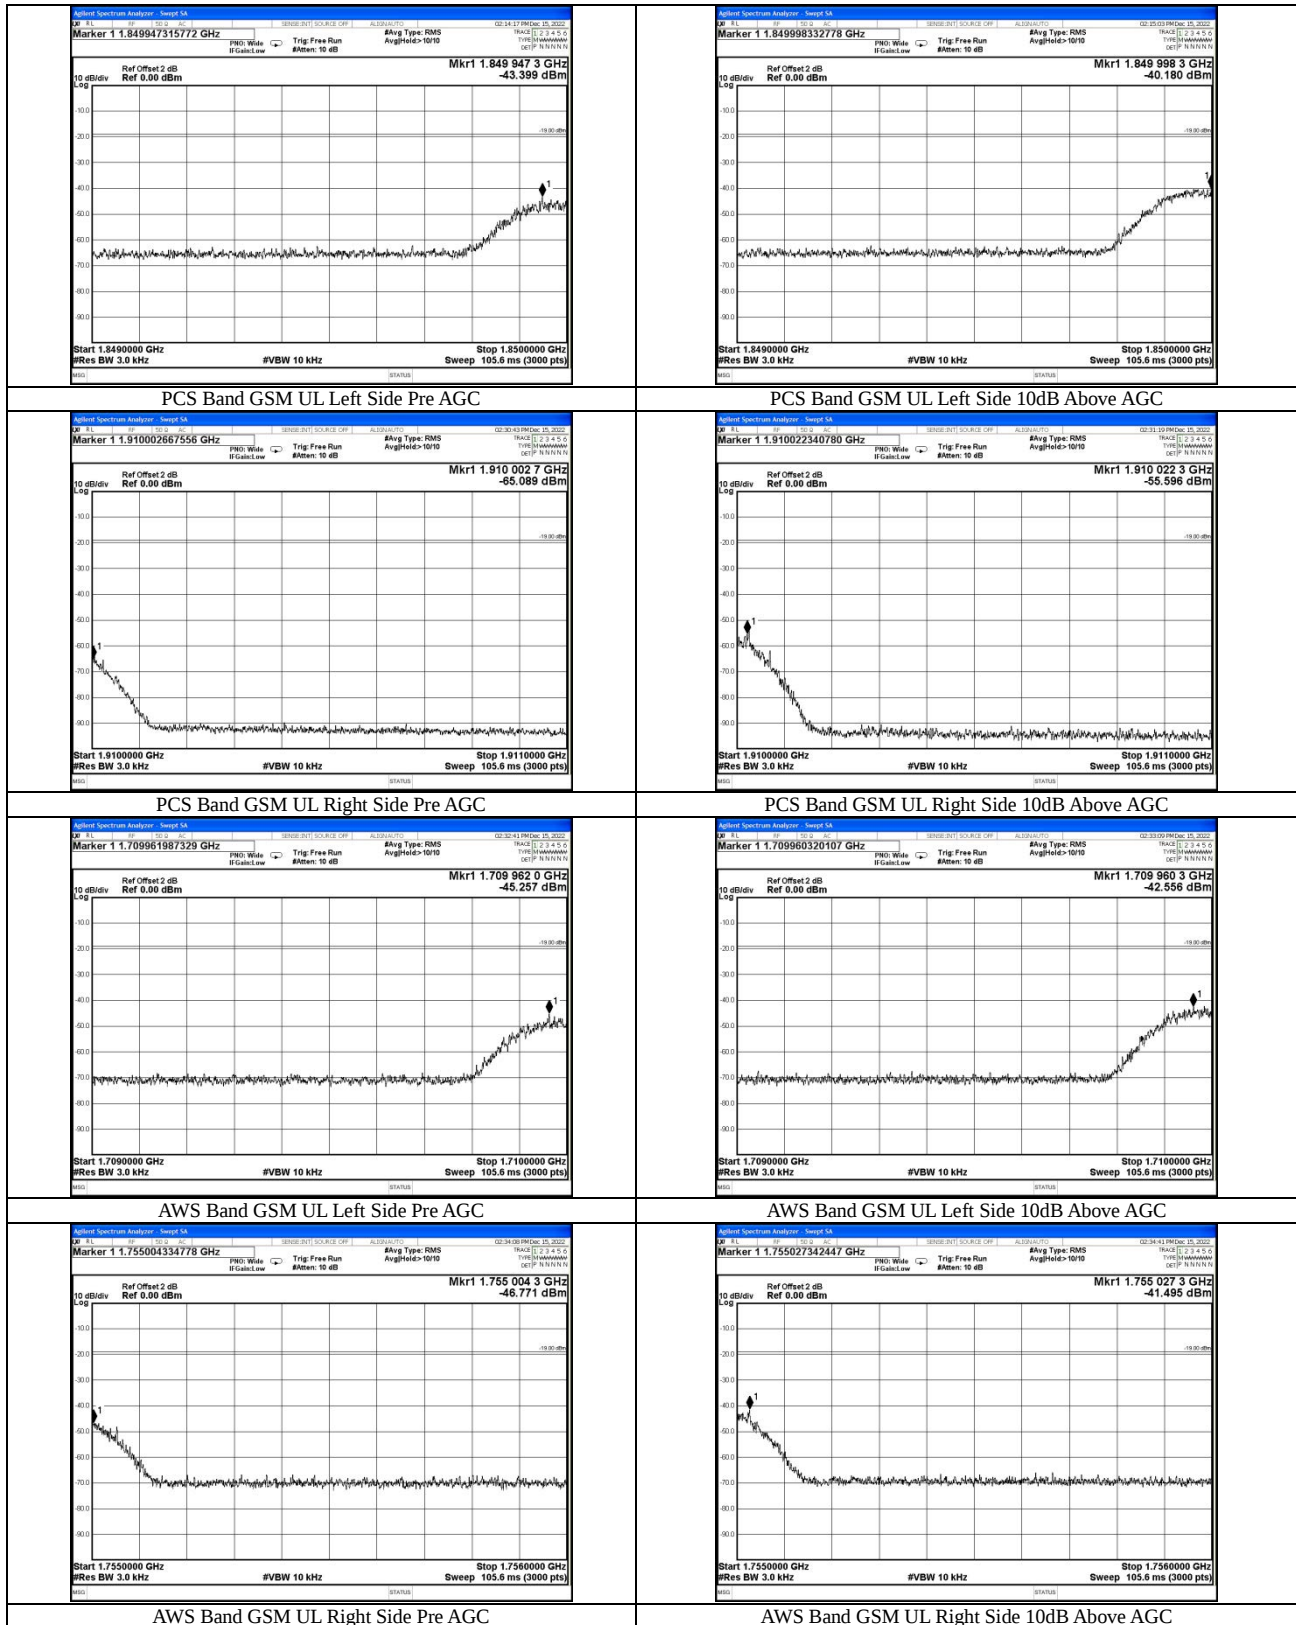


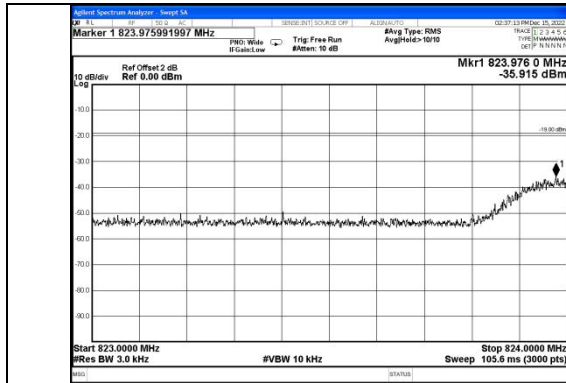


Cellular Band GSM UL Left Side Pre AGC

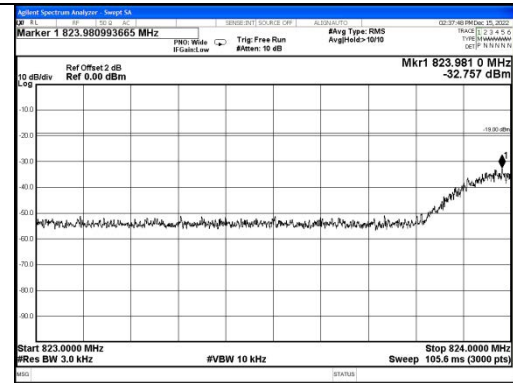


Cellular Band GSM UL Left Side 10dB Above AGC

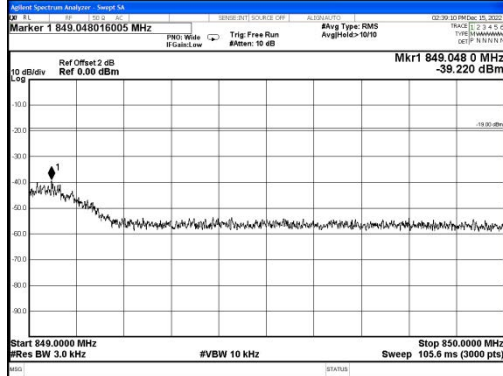


Cellular Band GSM UL Right Side Pre AGC

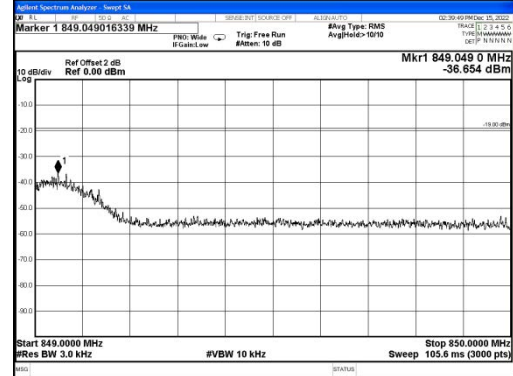


Cellular Band GSM UL Right Side 10dB Above AGC

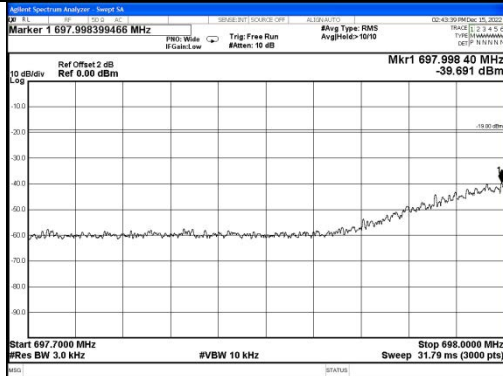


Lower 700MHz band GSM UL Left Side Pre AGC

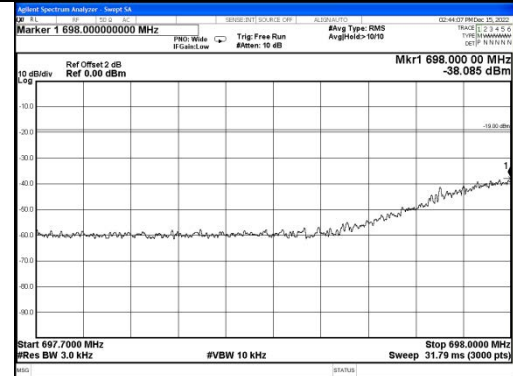


Lower 700MHz band GSM UL Left Side 10dB Above AGC

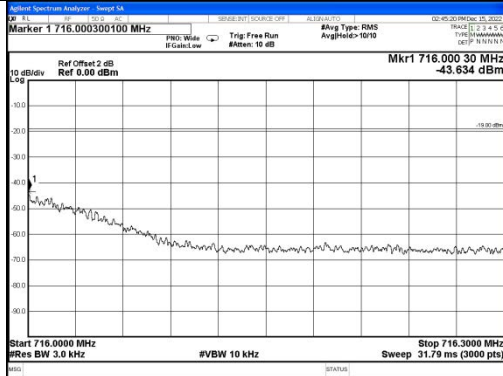


Lower 700MHz band GSM UL Right Side Pre AGC

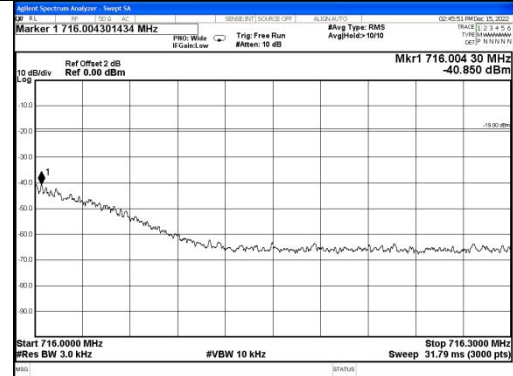


Lower 700MHz band GSM UL Right Side 10dB Above AGC

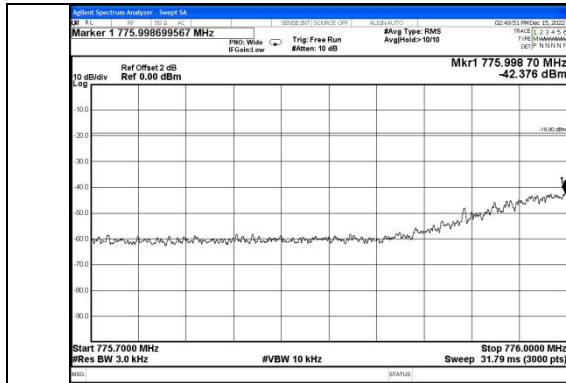


Upper 700MHz band GSM UL Left Side Pre AGC

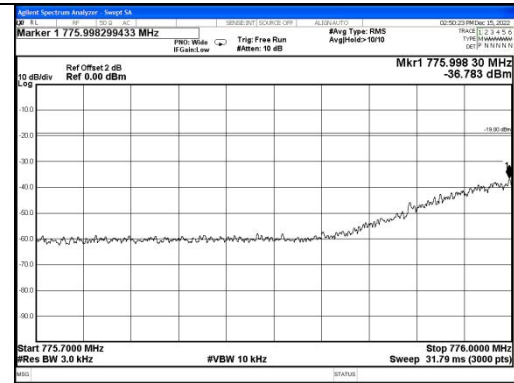


Upper 700MHz band UL Left Side 10dB Above AGC

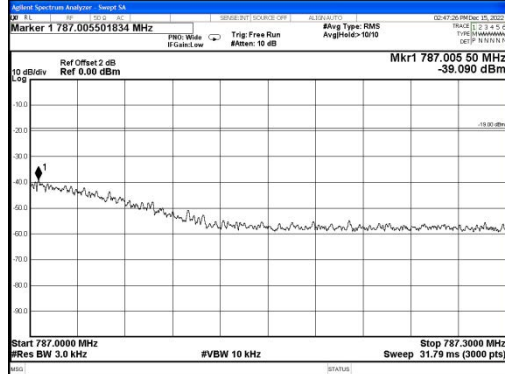


Upper 700MHz band GSM UL Right Side Pre AGC

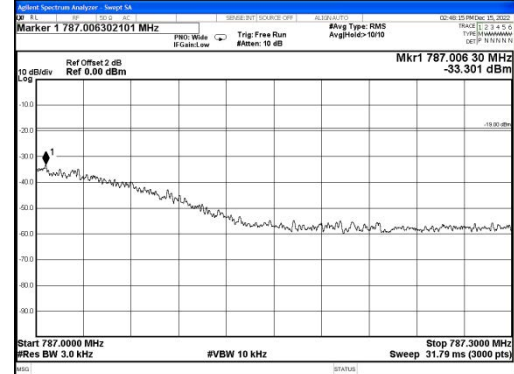


Upper 700MHz band GSM UL Right Side 10dB Above AGC

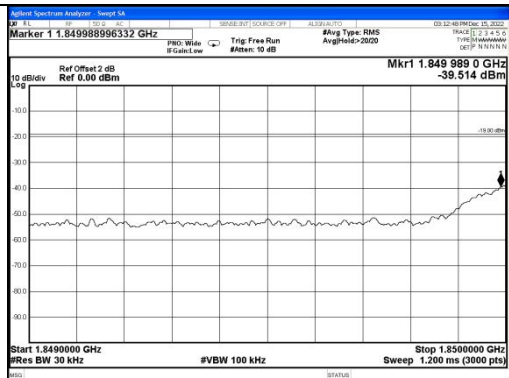


PCS Band CDMA UL Left Side Pre AGC

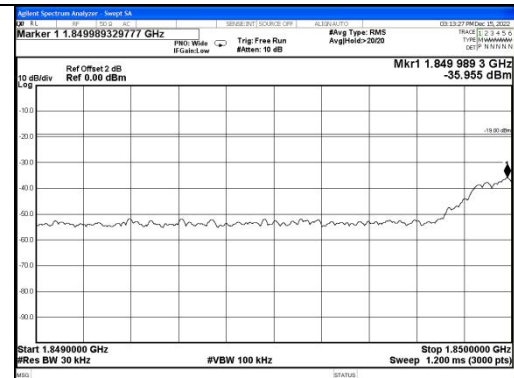


PCS Band CDMA UL Left Side 10dB Above AGC

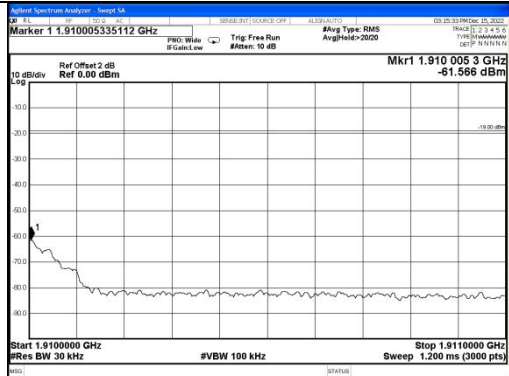


PCS Band CDMA UL Right Side Pre AGC

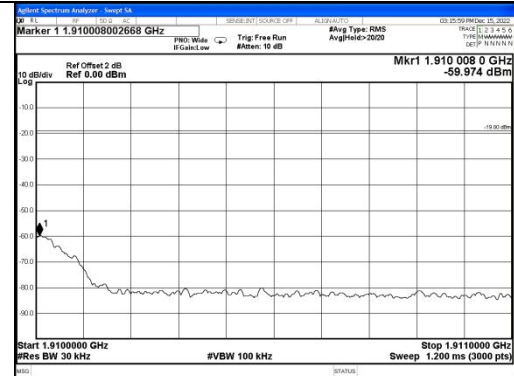


PCS Band CDMA UL Right Side 10dB Above AGC

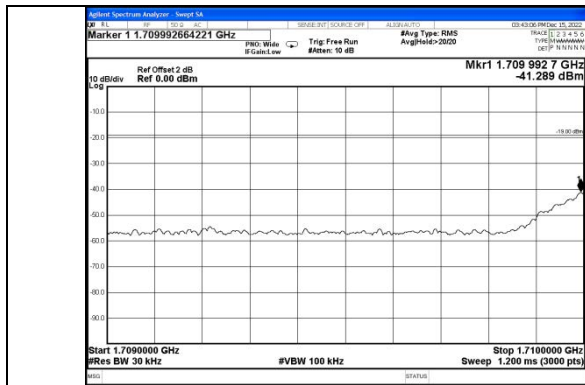


AWS Band CDMA UL Left Side Pre AGC

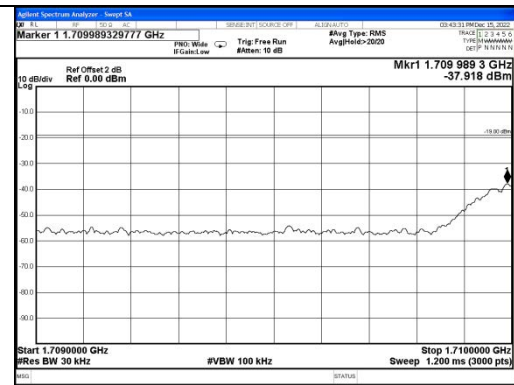


AWS Band CDMA UL Left Side 10dB Above AGC

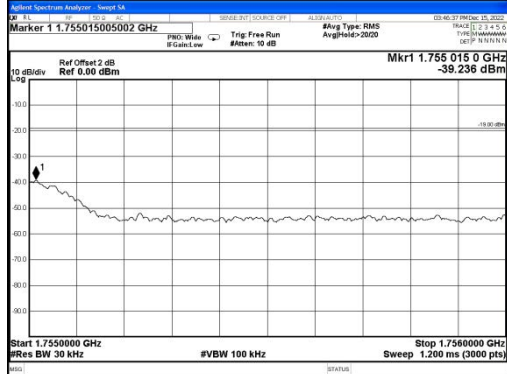


AWS Band CDMA UL Right Side Pre AGC

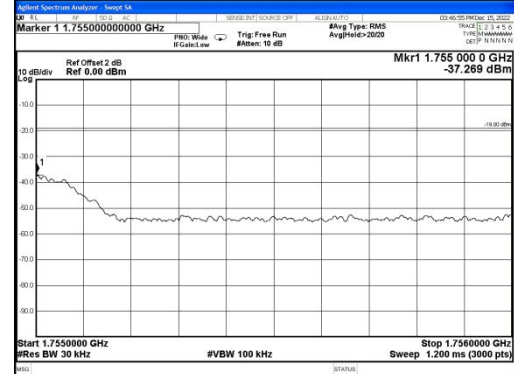


AWS Band CDMA UL Right Side 10dB Above AGC

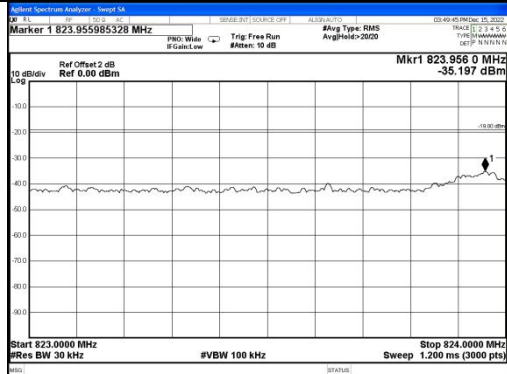


Cellular Band CDMA UL Left Side Pre AGC

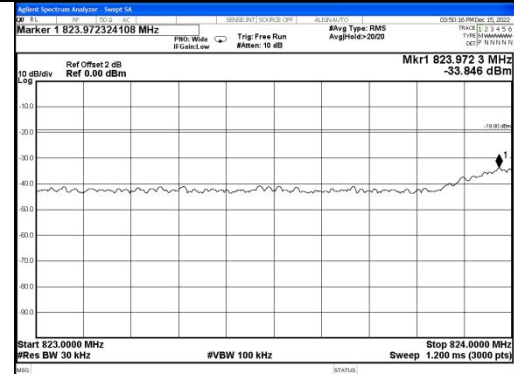

Cellular Band CDMA UL Left Side 10dB Above AGC

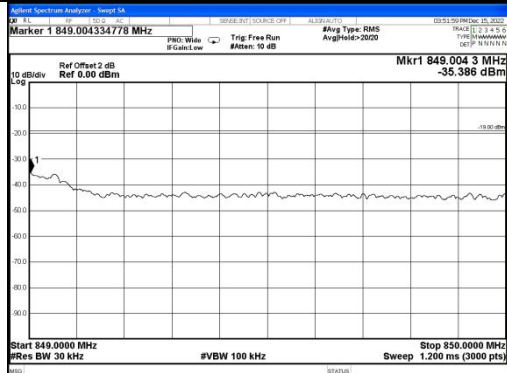

Cellular Band CDMA UL Right Side Pre AGC

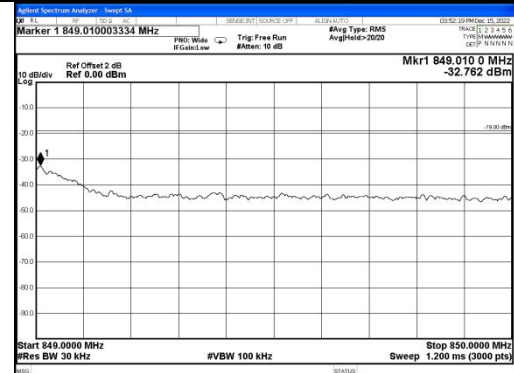


Cellular Band CDMA UL Right Side 10dB Above AGC




Lower 700MHz band CDMA UL Left Side Pre AGC




Lower 700MHz band CDMA UL Left Side 10dB Above AGC

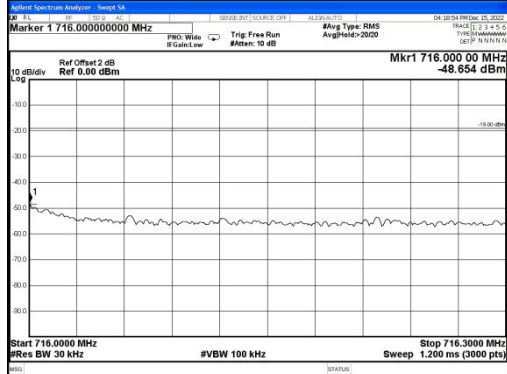


Lower 700MHz band CDMA UL Right Side Pre AGC

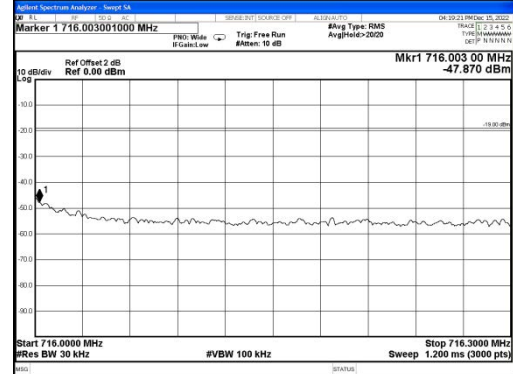


Lower 700MHz band CDMA UL Right Side 10dB Above AGC

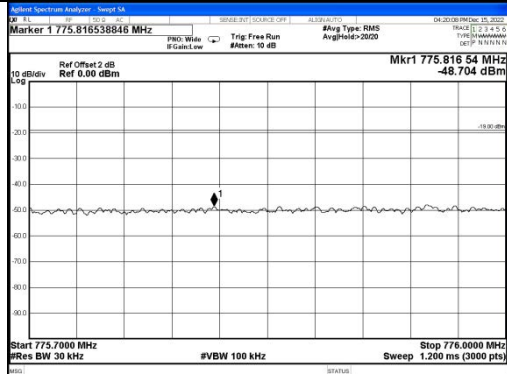


Upper 700MHz band CDMA UL Left Side Pre AGC

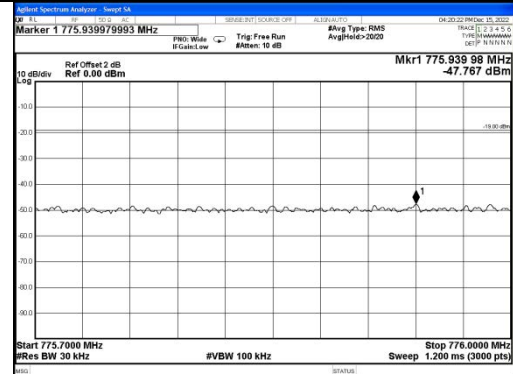


Upper 700MHz band CDMA UL Left Side 10dB Above AGC

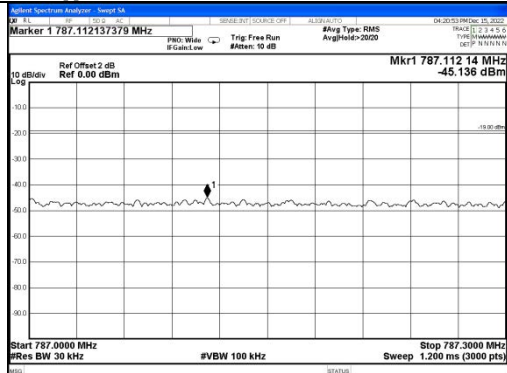



Upper 700MHz band CDMA UL Right Side Pre AGC

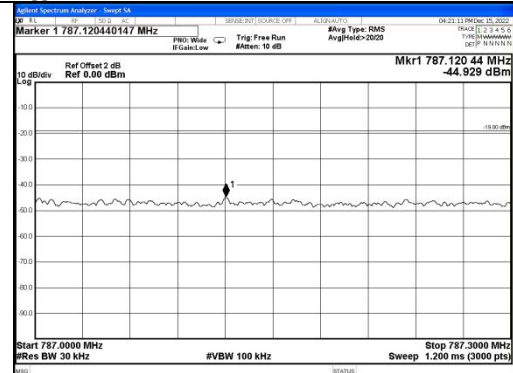


Upper 700MHz band CDMA UL Right Side 10dB Above AGC

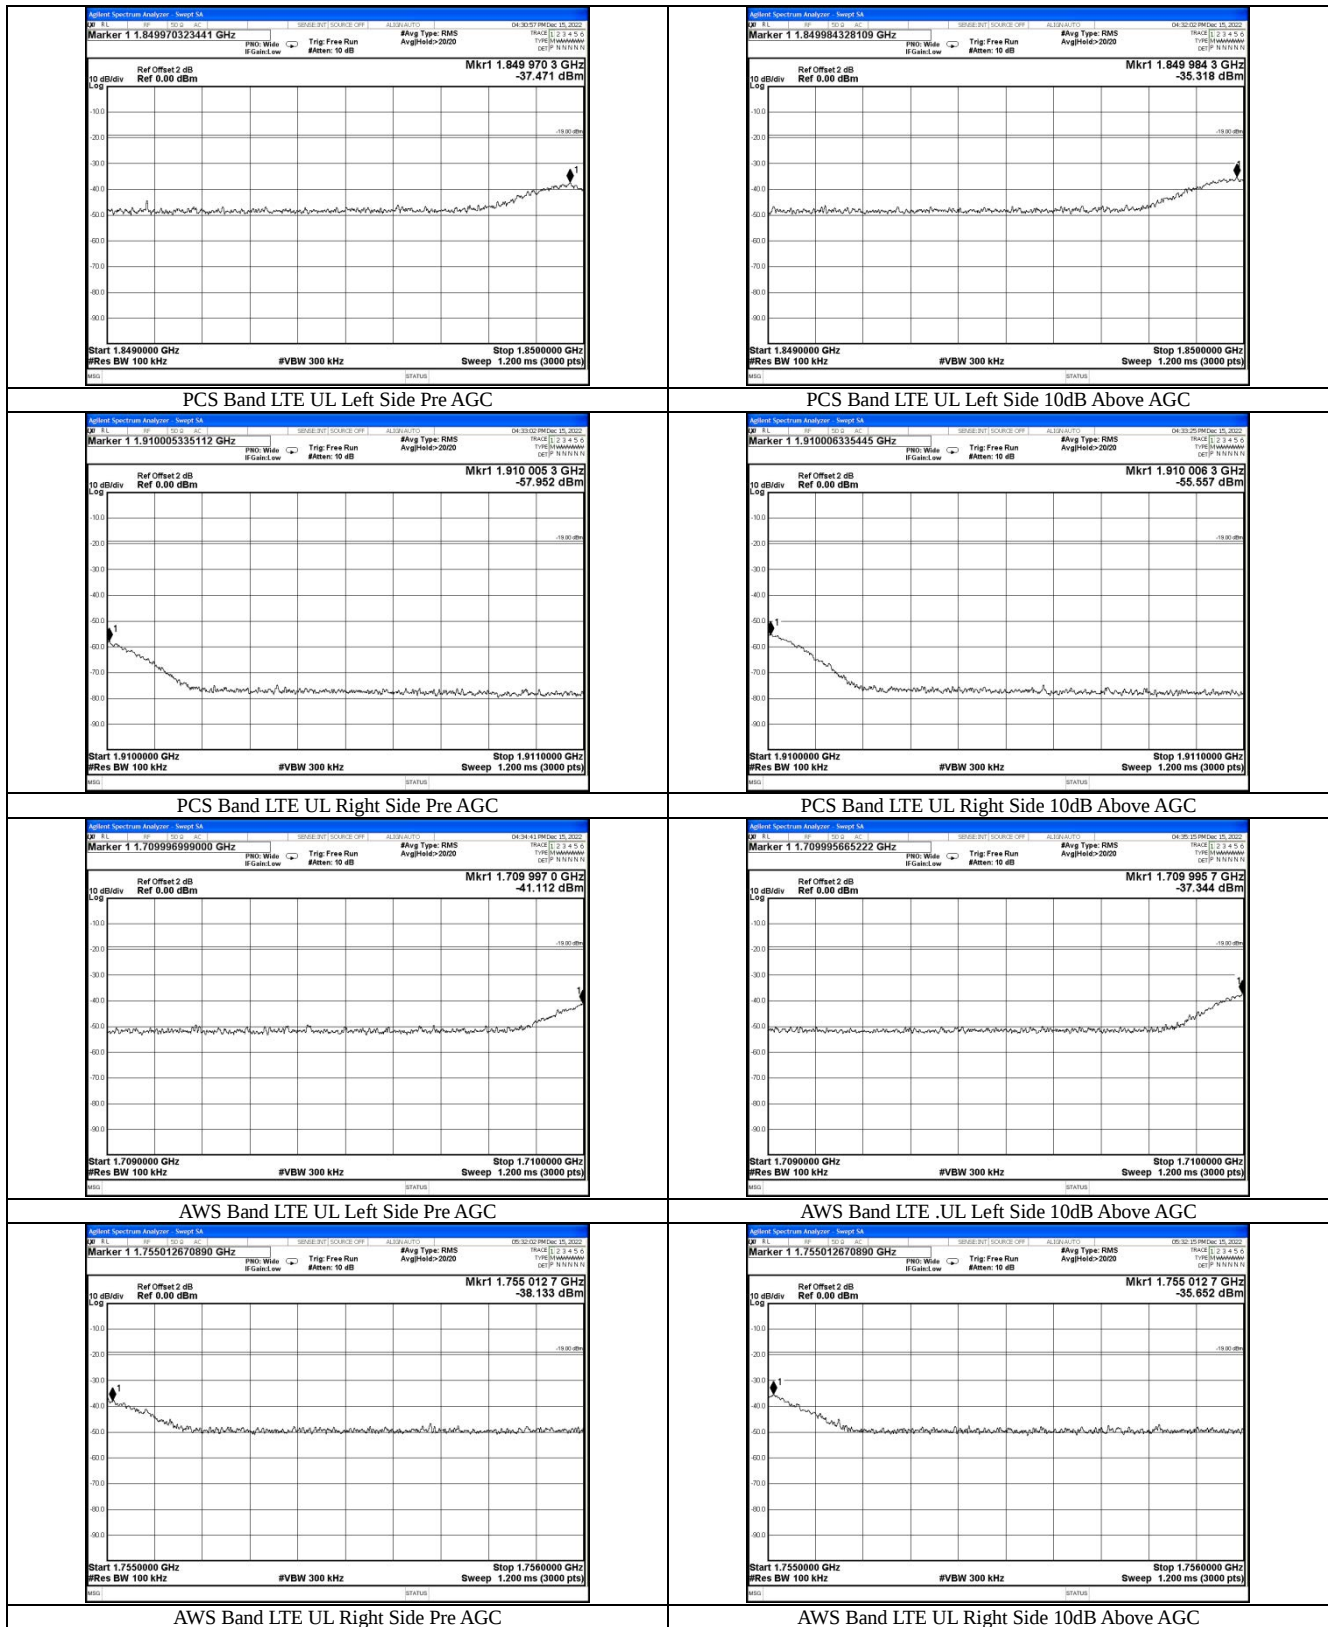

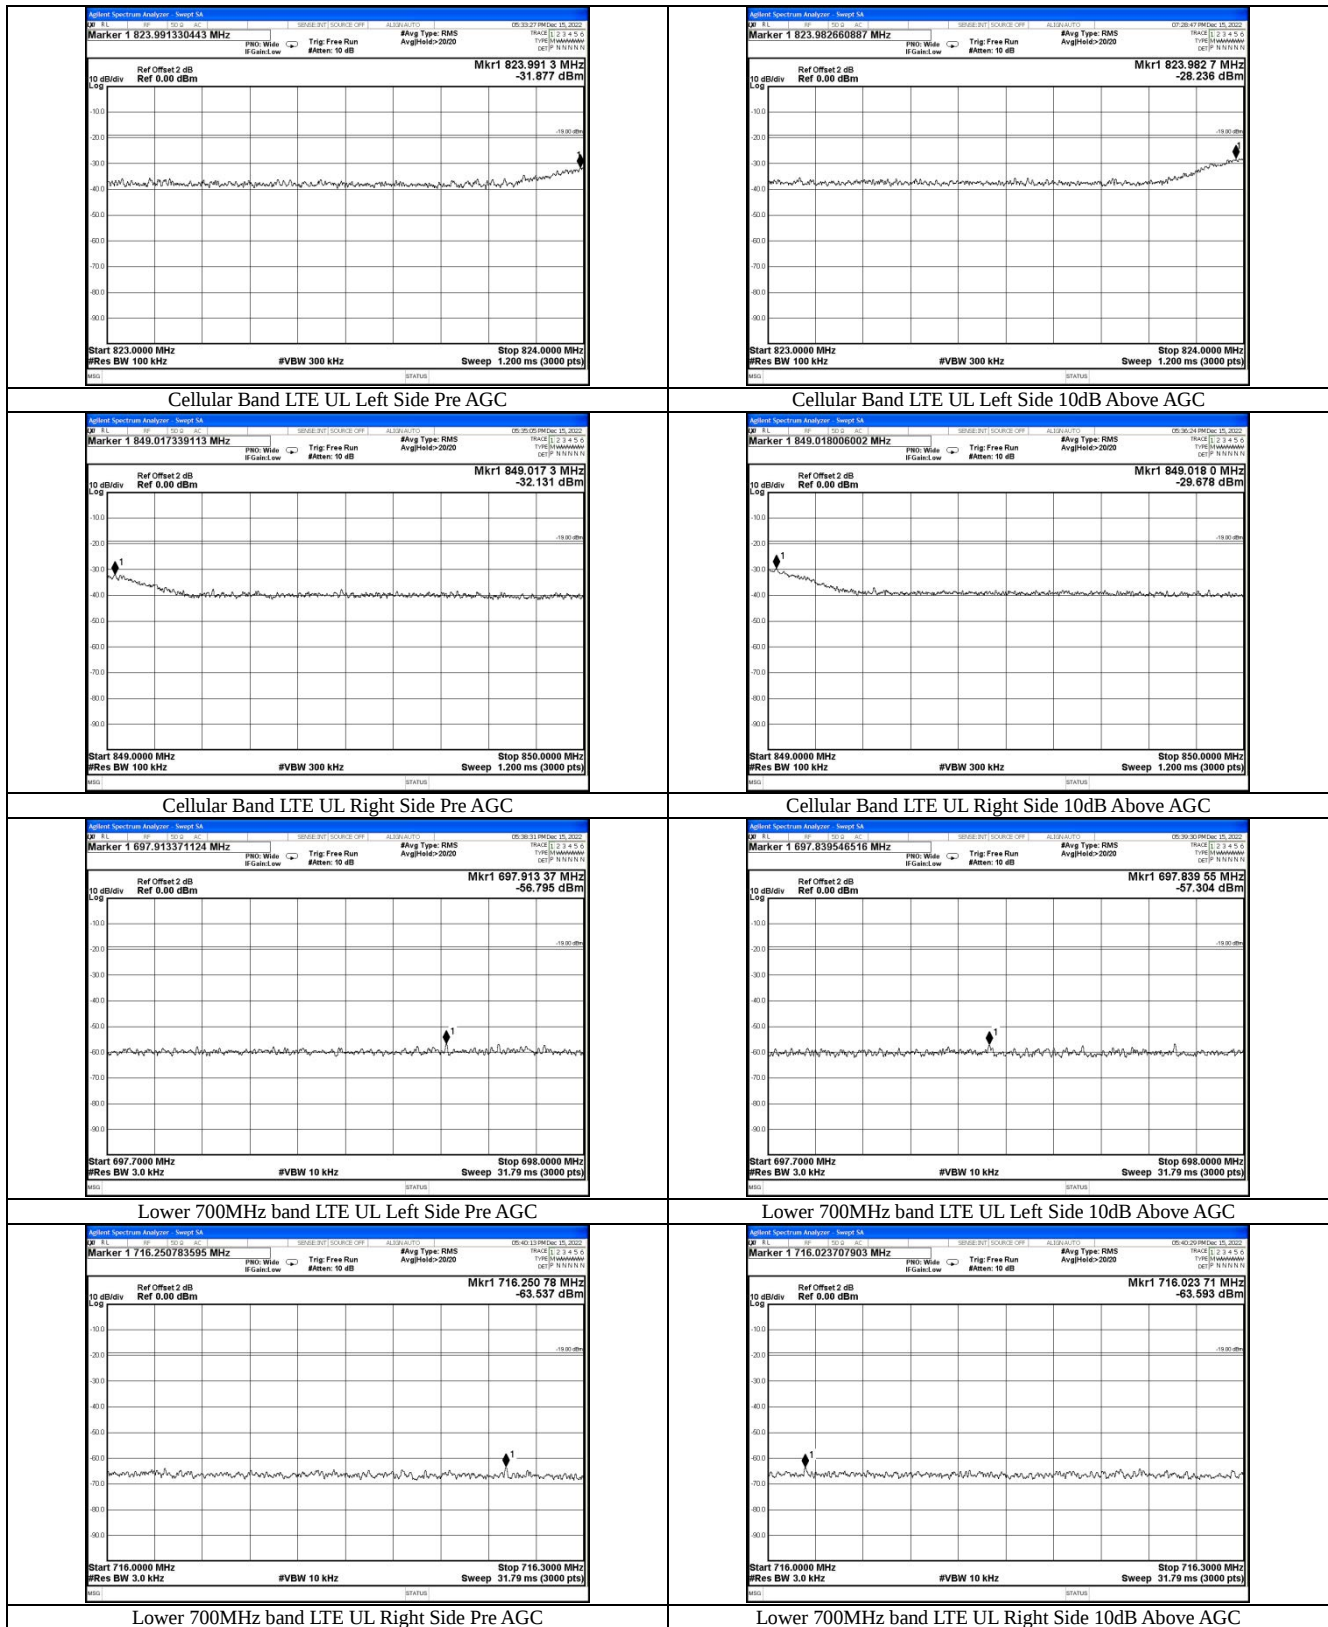


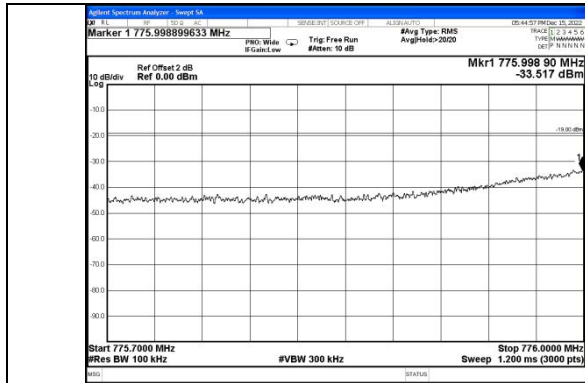


Upper 700MHz band LTE UL Left Side Pre AGC

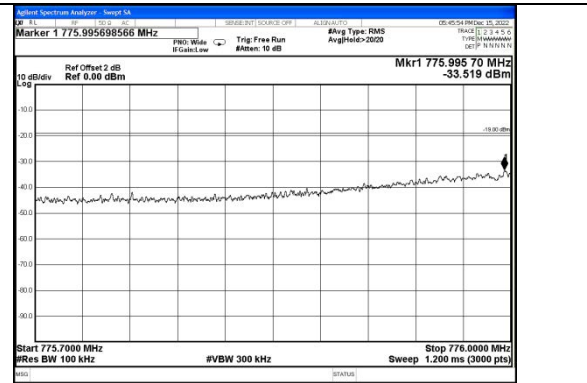


Upper 700MHz band LTE UL Left Side 10dB Above AGC

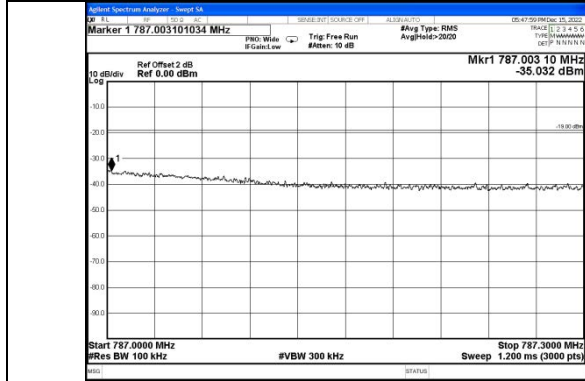


Upper 700MHz band LTE UL Right Side Pre AGC

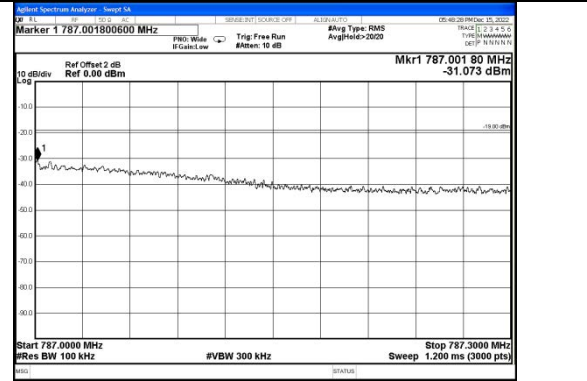


Upper 700MHz band3 LTE UL Right Side 10dB Above AGC

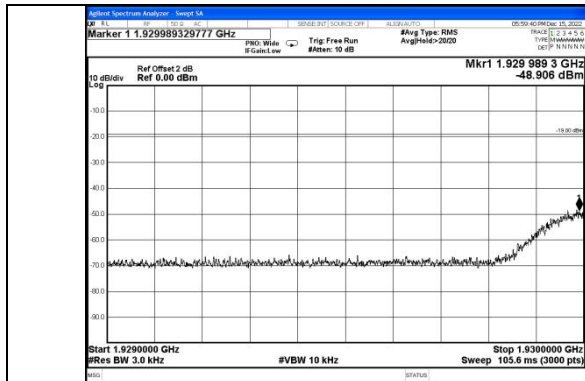


PCS Band GSM DL Left Side Pre AGC

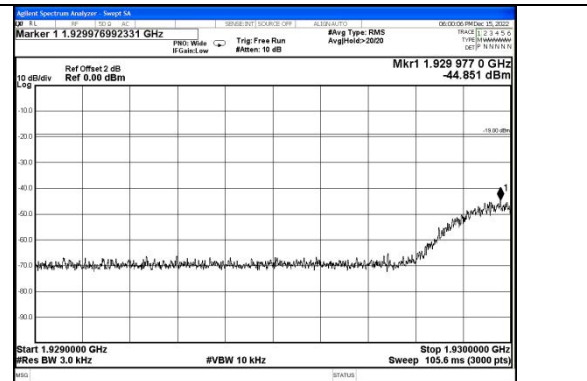


PCS Band GSM DL Left Side 10dB Above AGC

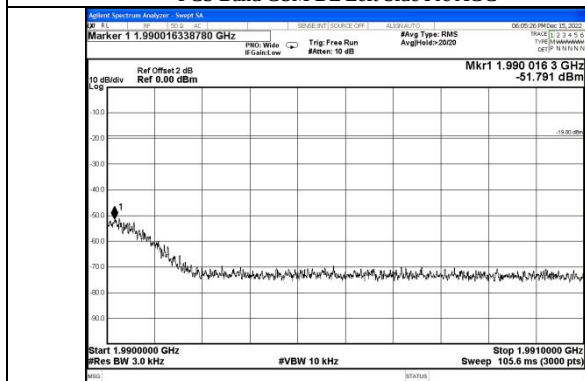


PCS Band GSM DL Right Side Pre AGC

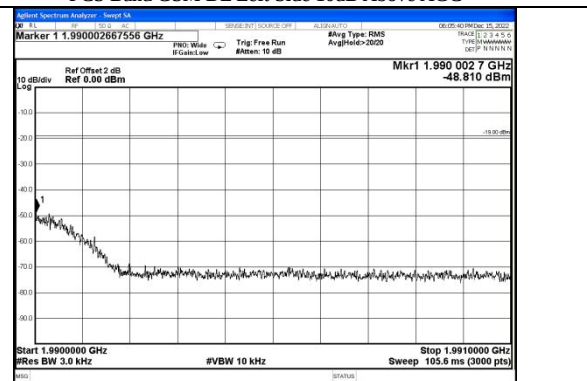


PCS Band GSM DL Right Side 10dB Above AGC

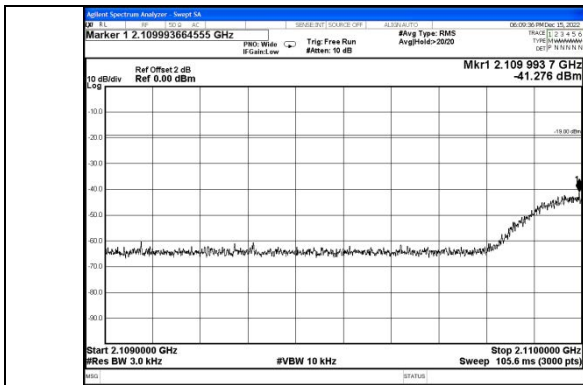


AWS Band GSM DL Left Side Pre AGC

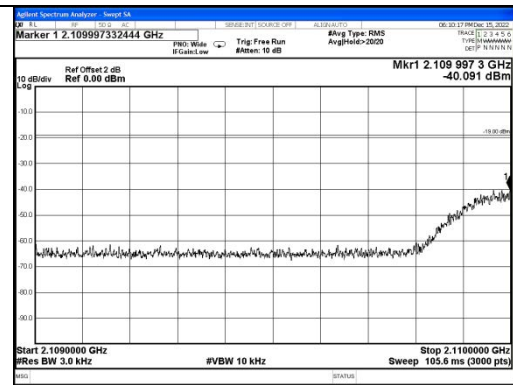


AWS Band GSM DL Left Side 10dB Above AGC

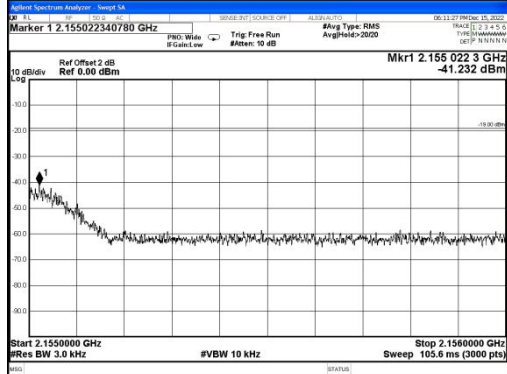


AWS Band GSM DL Right Side Pre AGC

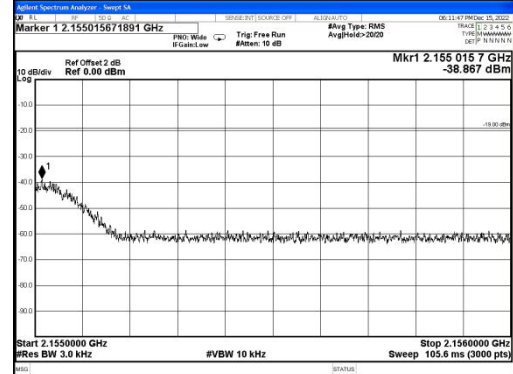


AWS Band GSM DL Right Side 10dB Above AGC

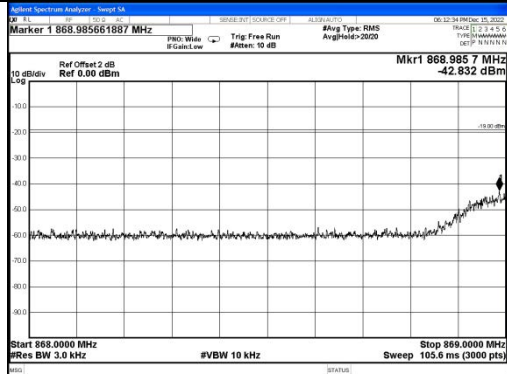


Cellular Band GSM DL Left Side Pre AGC

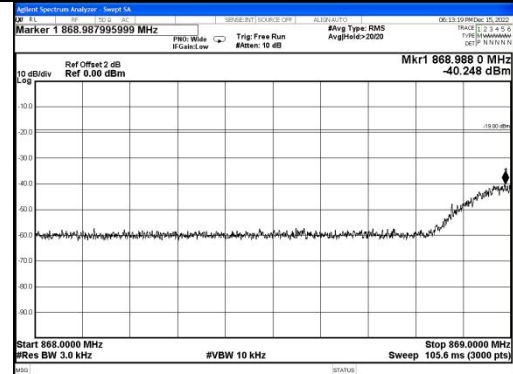

Cellular Band GSM DL Left Side 10dB Above AGC

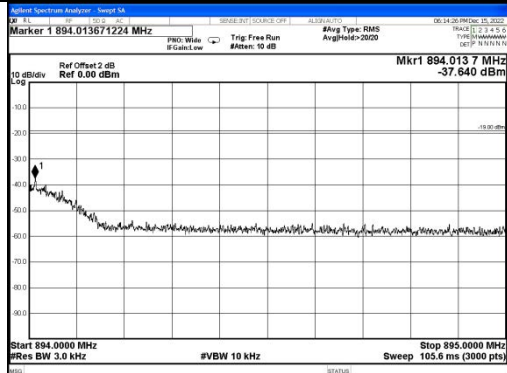


Cellular Band GSM DL Right Side Pre AGC

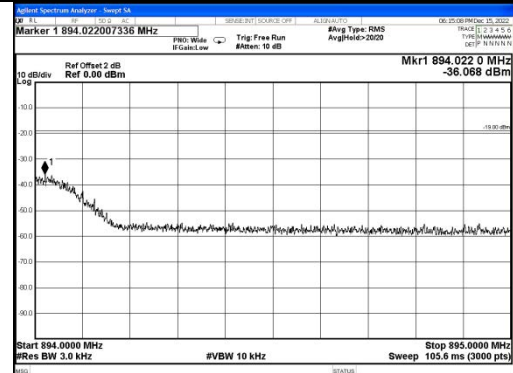


Cellular Band GSM DL Right Side 10dB Above AGC




Lower 700MHz band GSM DL Left Side Pre AGC

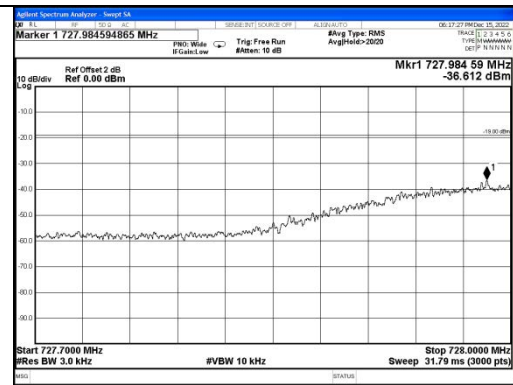


Lower 700MHz band GSM DL Left Side 10dB Above AGC

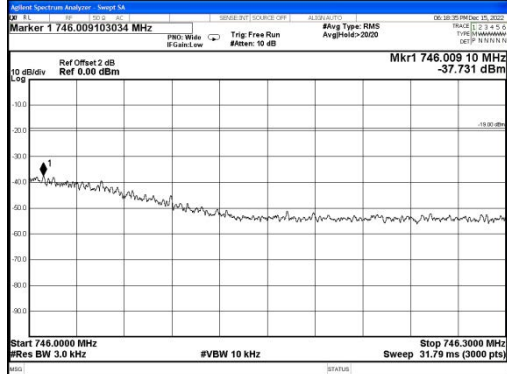


Lower 700MHz band GSM DL Right Side Pre AGC

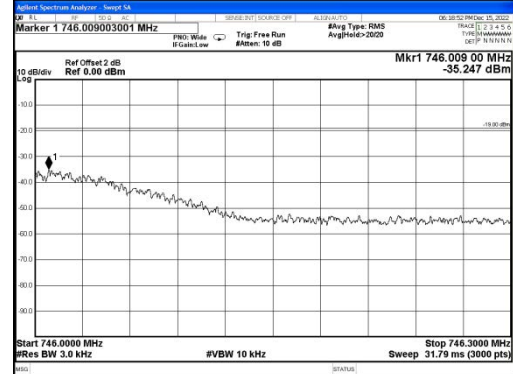


Lower 700MHz band2 GSM DL Right Side 10dB Above AGC

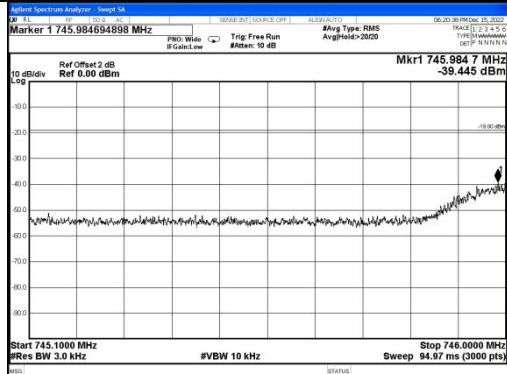


Upper 700MHz band GSM DL Left Side Pre AGC

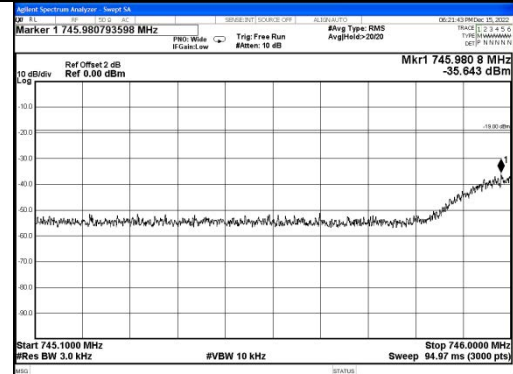


Upper 700MHz band GSM DL Left Side 10dB Above AGC

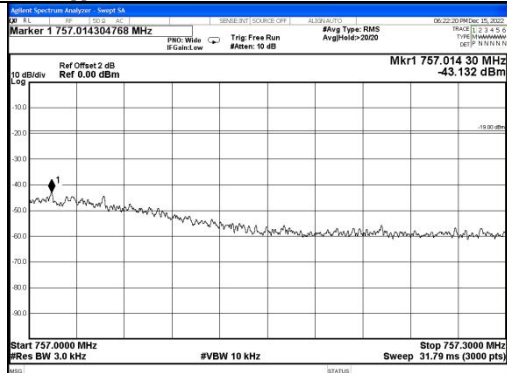


Upper 700MHz band GSM DL Right Side Pre AGC

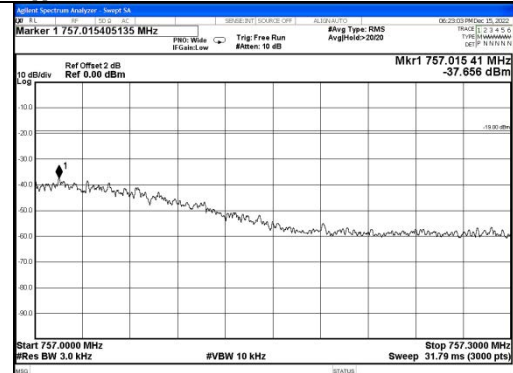


Upper 700MHz band GSM DL Right Side 10dB Above AGC

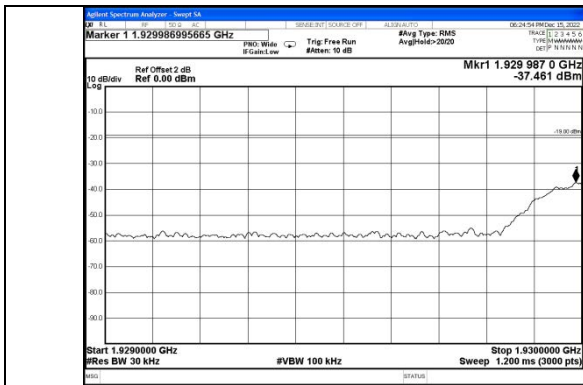

PCS Band CDMA DL Left Side Pre AGC

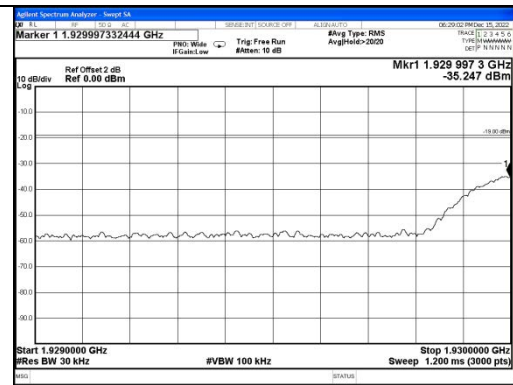


PCS Band CDMA DL Left Side 10dB Above AGC

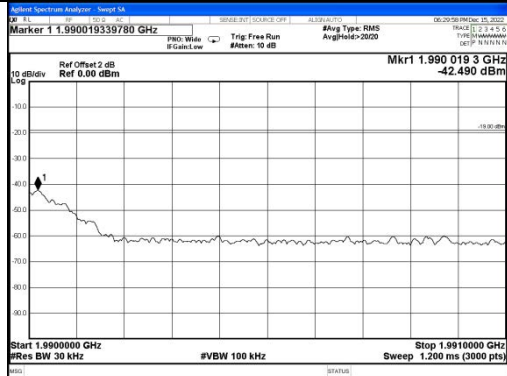


PCS Band CDMA DL Right Side Pre AGC



PCS Band CDMA DL Right Side 10dB Above AGC

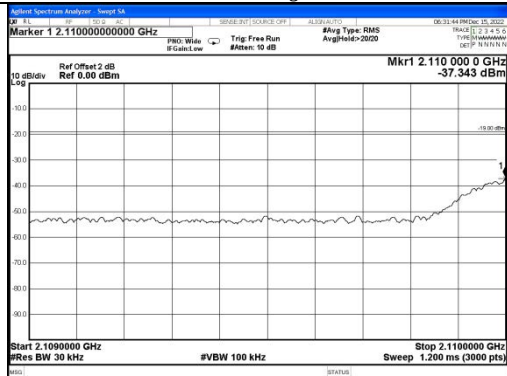


AWS Band CDMA UL Left Side Pre AGC

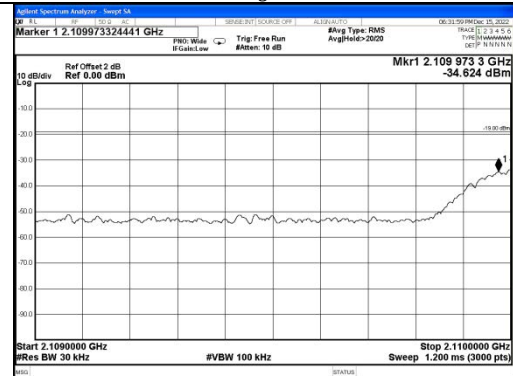

AWS Band CDMA DL Left Side 10dB Above AGC



AWS Band CDMA DL Right Side Pre AGC

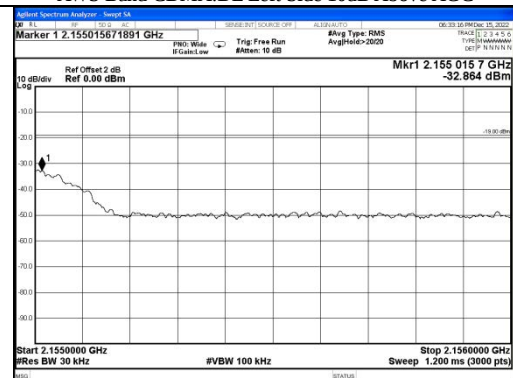

AWS Band CDMA DL Right Side 10dB Above AGC

