

TEST REPORT

FCC ID: 2AJMN-A6611L

Product: Mobile Phone

Model No.: A6611L

Trade Mark: itel

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi

Issued Date: 19 August 2025

Issued for:

ITEL MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyant
Street, Bao'an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Genera Information.....	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	8
5. Facilities and Accreditations	9
5.1. FACILITIES	9
5.2. ACCREDITATIONS	9
5.3. MEASUREMENT UNCERTAINTY	10
5.4. MEASUREMENT INSTRUMENTS	11
6. Test Results and Measurement Data	12
6.1. ANTENNA REQUIREMENT	12
6.2. CONDUCTED EMISSION	13
6.3. MAXIMUM CONDUCTED OUTPUT POWER	17
6.4. EMISSION BANDWIDTH.....	19
6.5. POWER SPECTRAL DENSITY	26
6.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	33
6.7. RADIATED SPURIOUS EMISSION MEASUREMENT	49
7. Test Setup Photographs	61



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

1. Test Certification

Product:	Mobile Phone
Model No.:	A6611L
Trade Mark:	itel
Applicant:	ITEL MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	ITEL MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of Test:	02 July 2025 to 19 August 2025
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Wang Xiang
(Wang Xiang)

Checked By: Chen Xu
(Chen Xu)

Approved By: Qin Shuiquan
(Qin Shuiquan)

Date: 19 August 2025



2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



3. EUT Description

Product:	Mobile Phone
Model No.:	A6611L
Trade Mark:	itel
Operation Frequency:	2412MHz~2462MHz (802.11b/g/n(HT20))
Channel Separation:	5MHz
Modulation type:	DSSS (DBPSK, DQPSK, CCK) for IEEE 802.11b OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) for IEEE 802.11g/n
Antenna Type:	Integral Antenna
Antenna Gain	ANT1: -0.3dBi
Operating Voltage:	Adapter1:U100ISB Input: 100-240V~50/60Hz 0.3A Output: 5.0V---2.0A 10.0W Rechargeable Li-ion Polymer Battery :BL-49NI Rated Voltage: 3.85V Rated Capacity:4900mAh/18.86Wh Typical Capacity:5000mAh/19.25Wh Limited Charge Voltage:4.4V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification& Testing Group (Shenzhen) Co., Ltd assumes no responsibility.



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Operation Frequency each of channel For 802.11b/g/n (HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode
802.11b
802.11g
802.11n(H20)

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.2.According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20).Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	U100ISB	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyuan Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA

ANAB - Certificate Number: AT-3951

China

CNAS (Registration Number: L3732)

Canada

ISED(CAB identifier:CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>



5.3. Measurement Uncertainty

No.	Item	MU
1	Conducted Emission Test	±3.2dB
2	RF power, conducted	±2.4%
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(<1GHz)	±4.7dB
5	All emissions, radiated(>1GHz)	±4.7dB
6	Temperature	±0.5°C
7	Humidity	±2.0%
8	Receiver Spurious Emissions	±2.5%
9	Transmitter Unwanted Emissions in the Spurious Domain	±2.5%
10	Transmitter Unwanted Emission in the out-of Band	±1.3%
11	Occupied Channel Bandwidth	±2.4%

NOTE:1.The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows : any additionan uncertainty in the test system over and above that specified in harmonized standard should be used to tighter the test requirements-making the test harder to pass. This procedure will ensure that a test system not compliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system compliant with harmonized standard had been used.

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

5.4. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2024	11/04/2025
LISN	AFJ	LS16	16010222119	11/05/2024	11/04/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2024	11/04/2025
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2024	11/04/2025
Coaxial cable	Megalon	LMR400	N/A	11/05/2024	11/04/2025
GPIB cable	Megalon	GPIB	N/A	11/05/2024	11/04/2025
Spectrum Analyzer	R&S	FSU	100114	11/05/2024	11/04/2025
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2024	11/04/2025
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2024	11/04/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2024	7/28/2025
9*6*6 Anechoic	--	--	--	11/05/2024	11/04/2025
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2024	11/04/2025
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2024	11/04/2025
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2024	11/04/2025
Loop Antenna	EMCO	6502	00042960	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2024	11/04/2025
Power meter	Anritsu	ML2487A	6K00003613	11/05/2024	11/04/2025
Power sensor	Anritsu	MX248XD	--	11/05/2024	11/04/2025
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2024	11/04/2025



6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
-----------------------	-------------------------------------

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.


E.U.T Antenna:

The Bluetooth antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is "ANT1: -0.3dBi".

Please refer to the attached "A6611L Internal Photo" for the antenna location

6.2. Conducted Emission

6.2.1. Test Specification

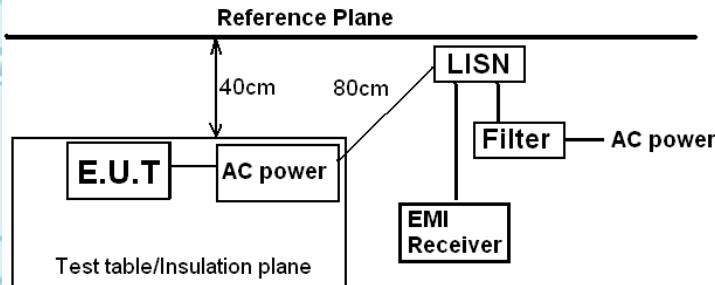Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2014														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p>  <p>Test table/Insulation plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	<ol style="list-style-type: none"> The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2014 on conducted measurement. 														
Test Result:	PASS														

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

6.2.2. EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.




Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

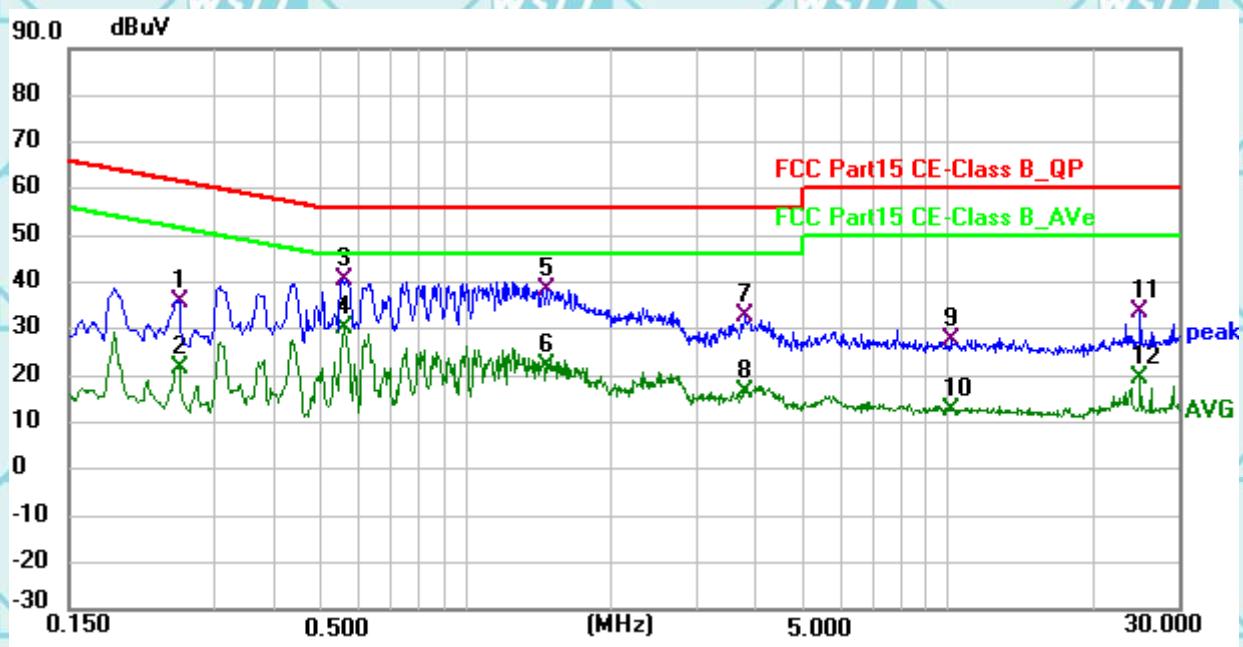


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2535	15.23	20.66	35.89	61.64	-25.75	QP
2	0.2535	0.99	20.66	21.65	51.64	-29.99	AVG
3 *	0.5639	19.92	20.52	40.44	56.00	-15.56	QP
4	0.5639	9.50	20.52	30.02	46.00	-15.98	AVG
5	1.4685	17.81	20.64	38.45	56.00	-17.55	QP
6	1.4685	1.28	20.64	21.92	46.00	-24.08	AVG
7	3.8040	12.00	20.59	32.59	56.00	-23.41	QP
8	3.8040	-3.99	20.59	16.60	46.00	-29.40	AVG
9	10.1985	7.36	20.44	27.80	60.00	-32.20	QP
10	10.1985	-7.81	20.44	12.63	50.00	-37.37	AVG
11	24.9360	13.19	20.60	33.79	60.00	-26.21	QP
12	24.9360	-0.91	20.60	19.69	50.00	-30.31	AVG



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

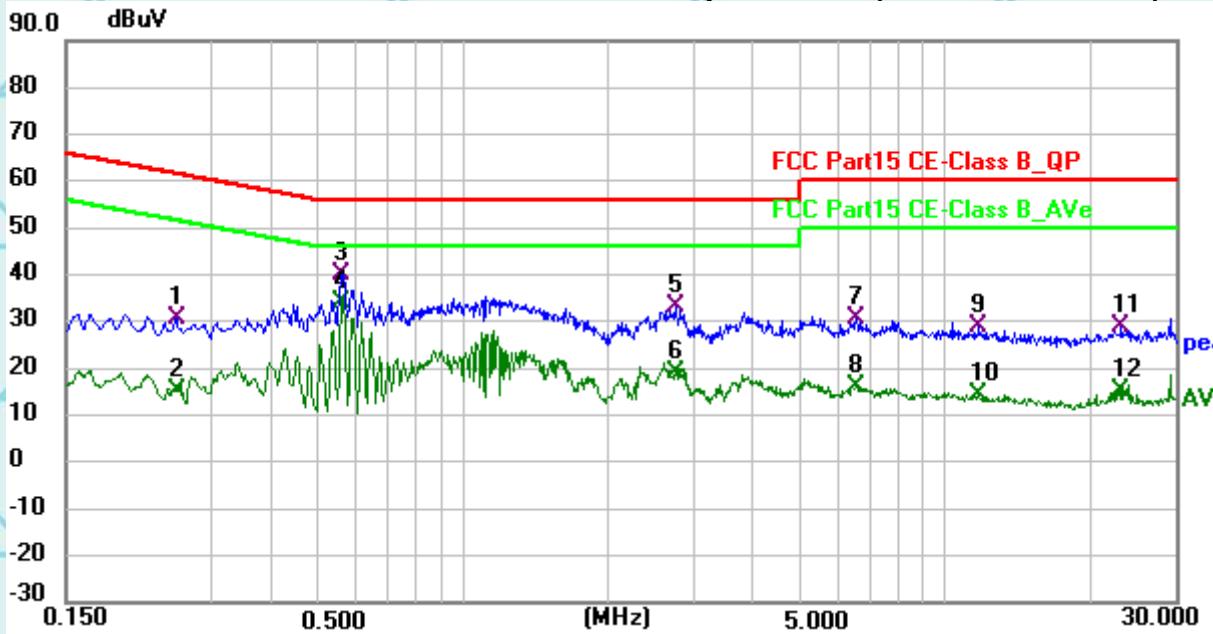

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2535	9.79	20.66	30.45	61.64	-31.19	QP
2	0.2535	-5.47	20.66	15.19	51.64	-36.45	AVG
3	0.5639	19.64	20.52	40.16	56.00	-15.84	QP
4 *	0.5639	13.65	20.52	34.17	46.00	-11.83	AVG
5	2.7645	12.57	20.60	33.17	56.00	-22.83	QP
6	2.7645	-1.36	20.60	19.24	46.00	-26.76	AVG
7	6.5310	9.98	20.52	30.50	60.00	-29.50	QP
8	6.5310	-4.35	20.52	16.17	50.00	-33.83	AVG
9	11.8050	8.41	20.35	28.76	60.00	-31.24	QP
10	11.8050	-5.82	20.35	14.53	50.00	-35.47	AVG
11	23.1494	8.32	20.47	28.79	60.00	-31.21	QP
12	23.1494	-5.15	20.47	15.32	50.00	-34.68	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

6.3. Maximum Conducted Output Power

6.3.1. Test Specification

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

6.3.2. Test Data

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	16.48	30	Pass
b	2437	18.24	30	Pass
b	2462	15.88	30	Pass
g	2412	16.34	30	Pass
g	2437	16.29	30	Pass
g	2462	17.55	30	Pass
n20	2412	18.23	30	Pass
n20	2437	18.13	30	Pass
n20	2462	17.68	30	Pass

6.4. Emission Bandwidth

6.4.1. Test Specification

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

6.4.2. Test data(worst)

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	8.052	0.5	Pass
b	2437	9.037	0.5	Pass
b	2462	8.112	0.5	Pass
g	2412	16.11	0.5	Pass
g	2437	16.32	0.5	Pass
g	2462	16.07	0.5	Pass
n20	2412	16.99	0.5	Pass
n20	2437	16.66	0.5	Pass
n20	2462	16.90	0.5	Pass




Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025




Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

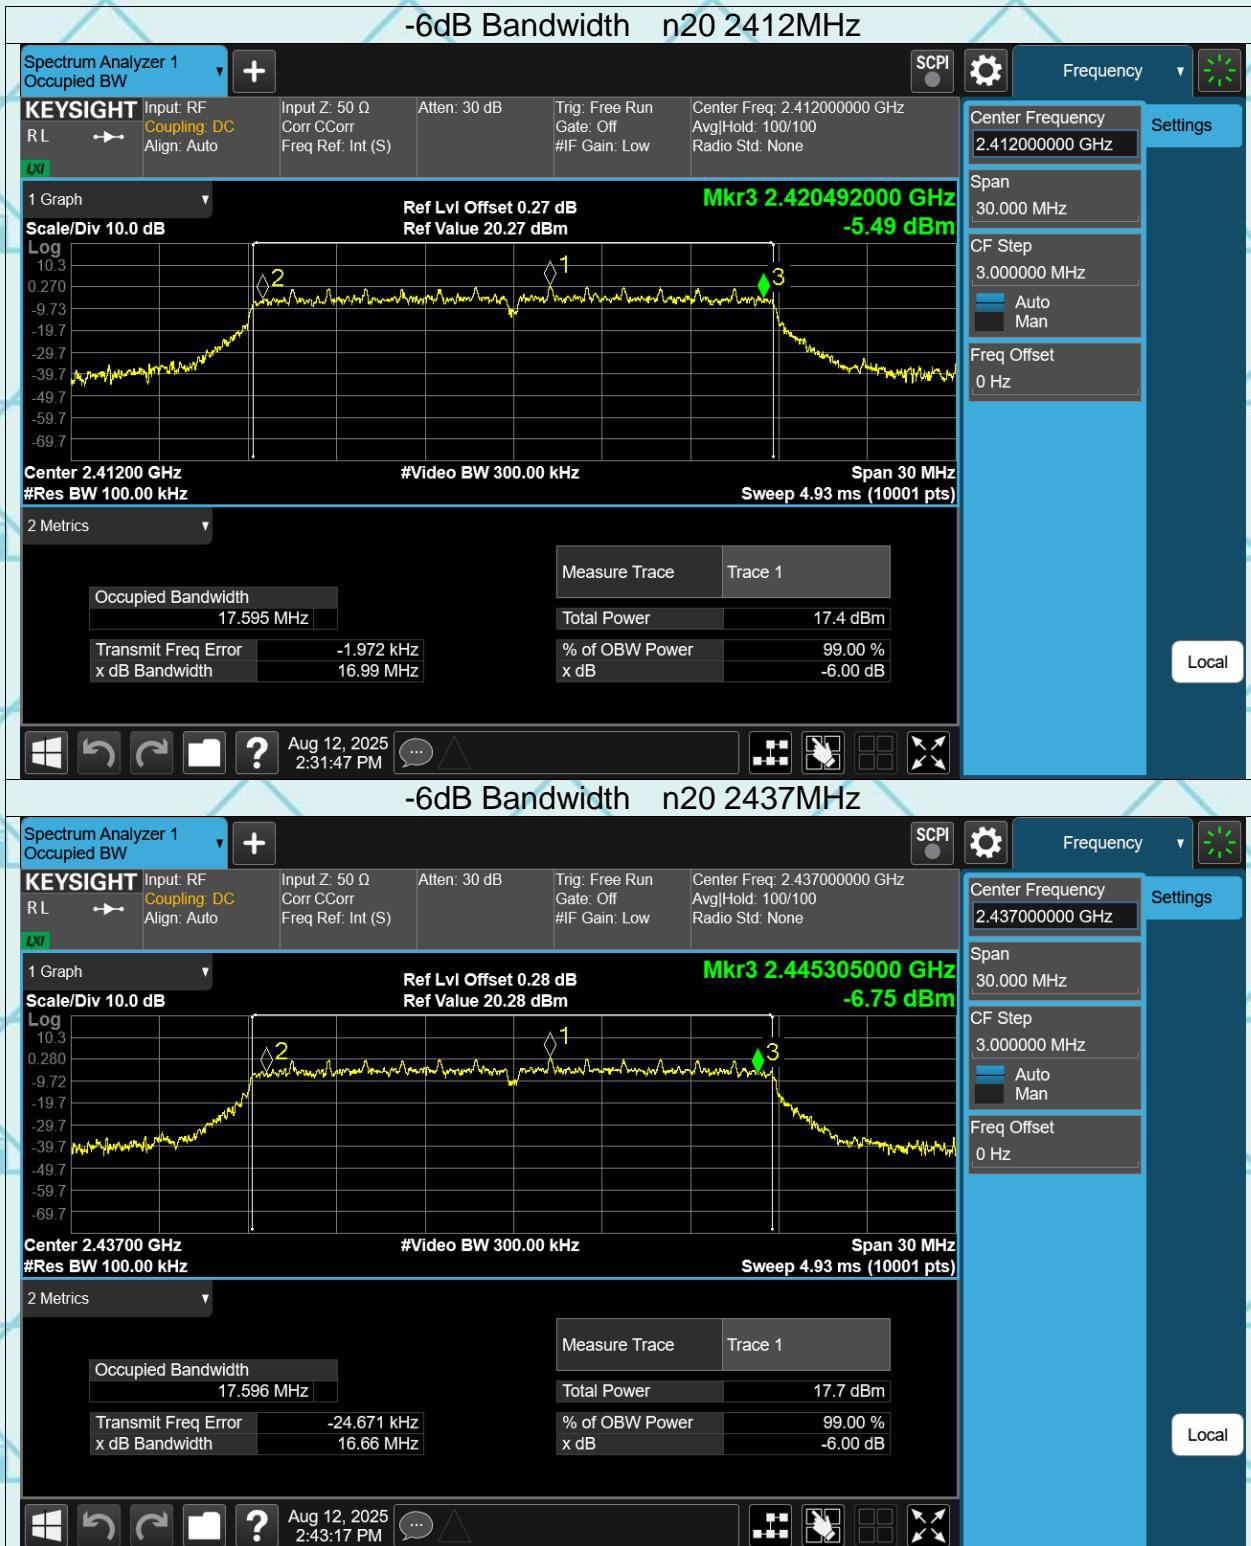


Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

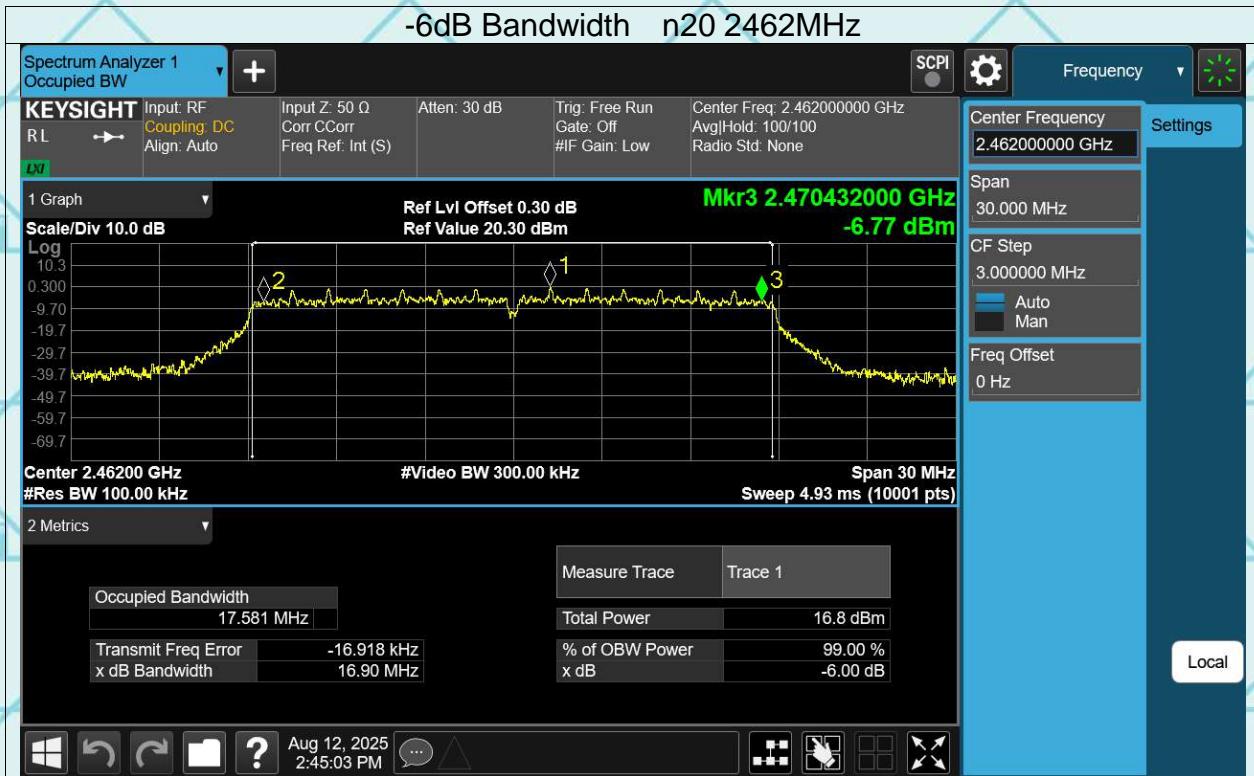

6.5. Power Spectral Density

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = RMS, Sweep time = auto couple. 6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025


6.5.2. Test data(worst)

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-4.86	8	Pass
b	2437	-5.57	8	Pass
b	2462	-11.18	8	Pass
g	2412	-15.51	8	Pass
g	2437	-16.57	8	Pass
g	2462	-13.25	8	Pass
n20	2412	-13.84	8	Pass
n20	2437	-13.10	8	Pass
n20	2462	-14.50	8	Pass

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

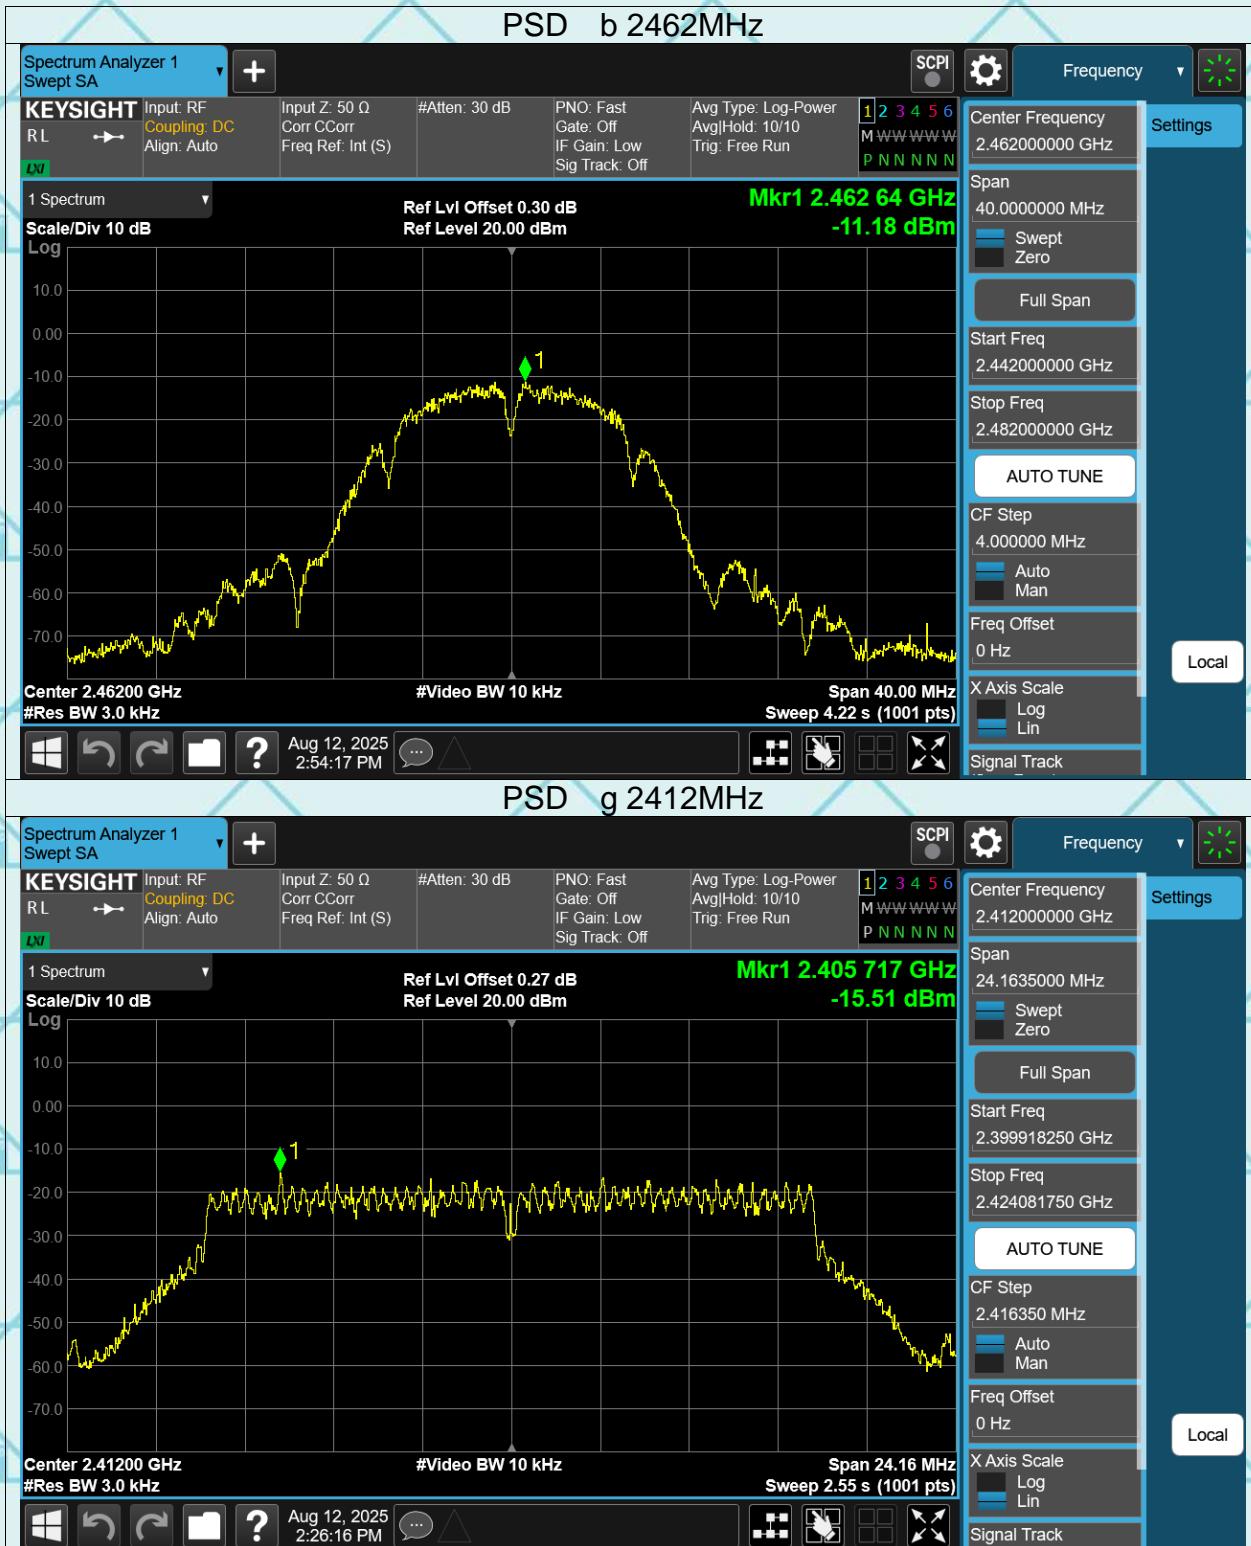


Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

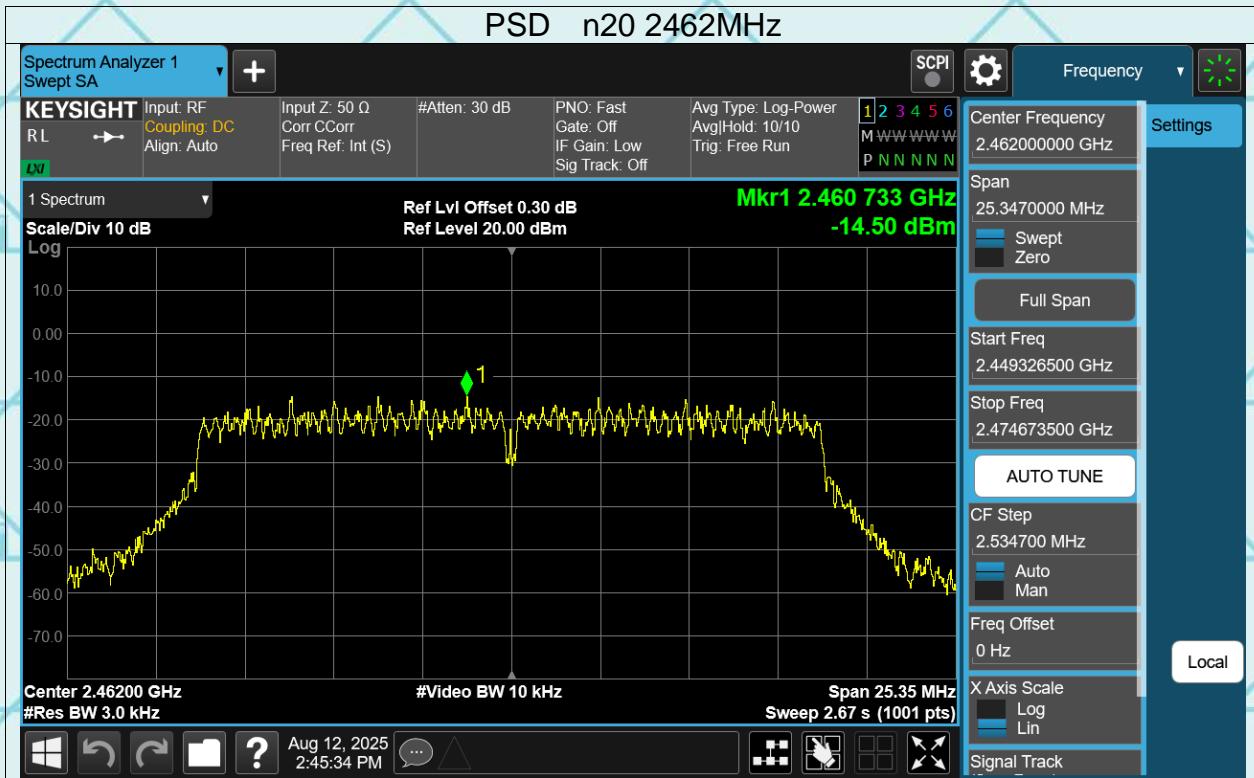

6.6. Conducted Band Edge and Spurious Emission Measurement

6.6.1. Test Specification

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Test Data

Band Edge



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025




Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

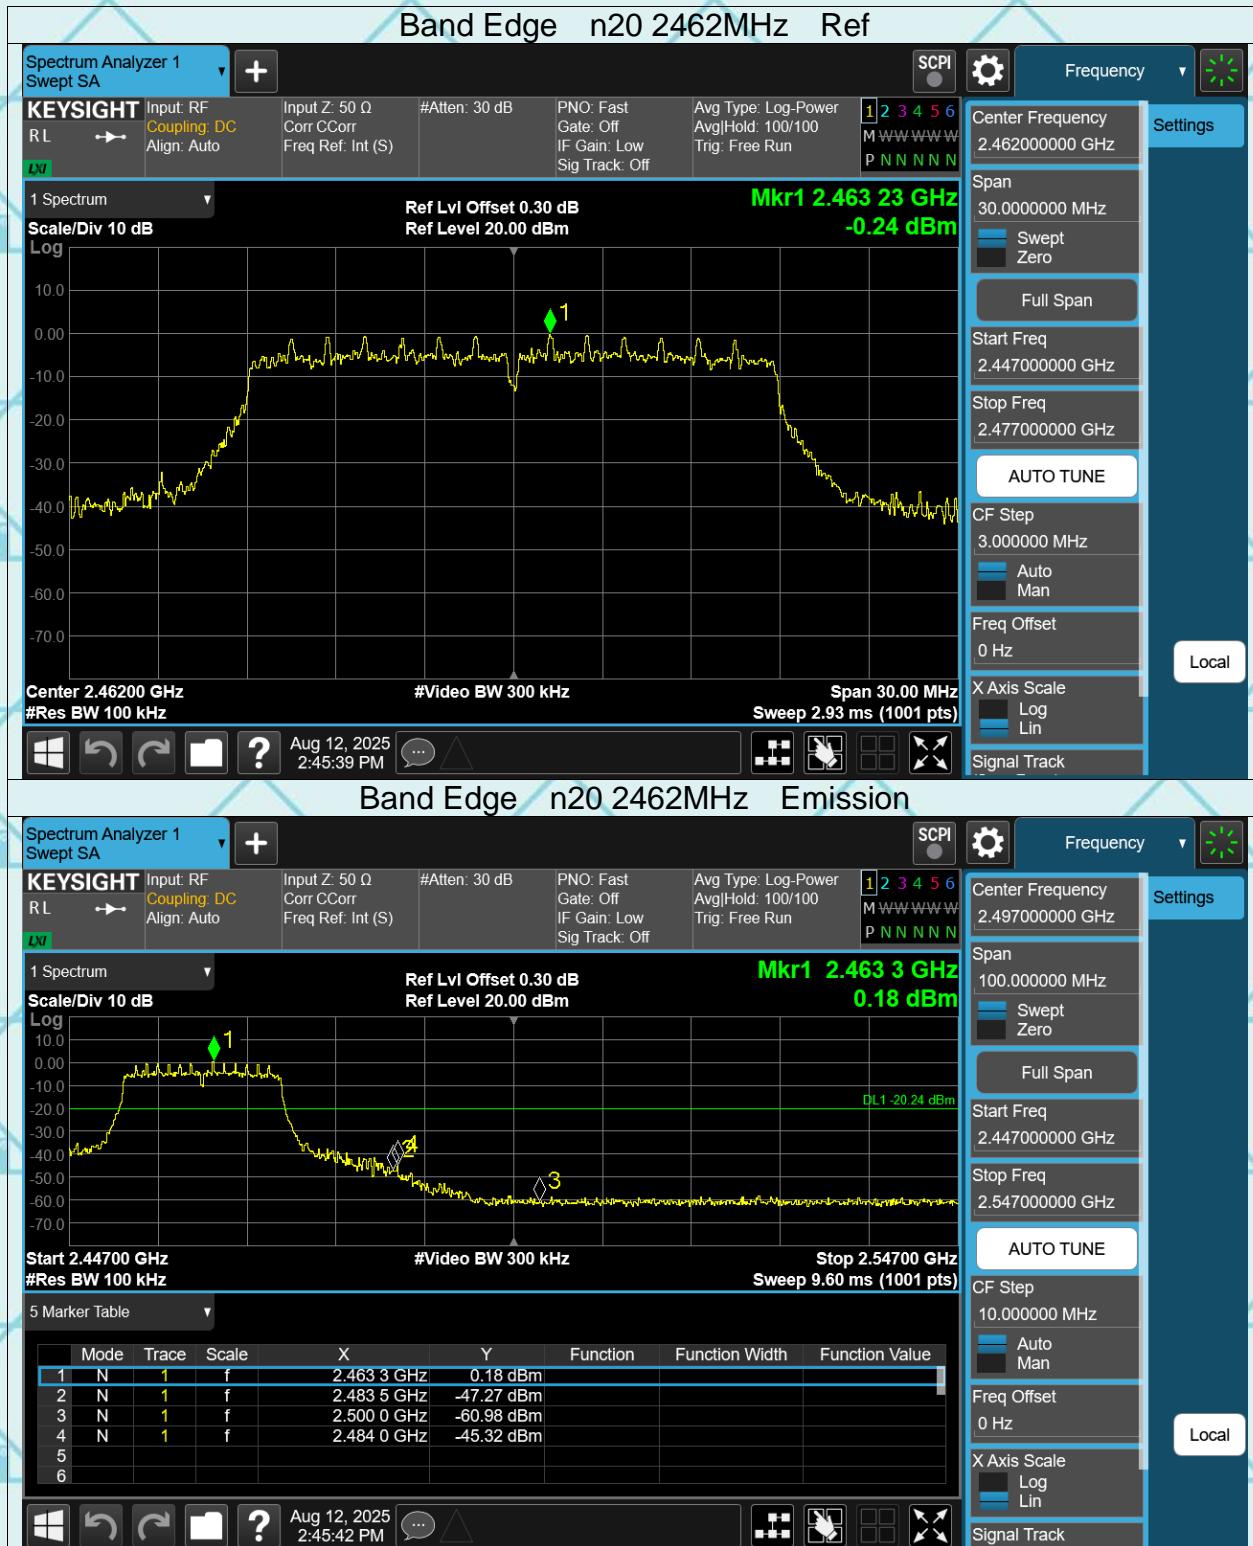

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Conducted RF Spurious Emission

Test Graphs



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025




Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

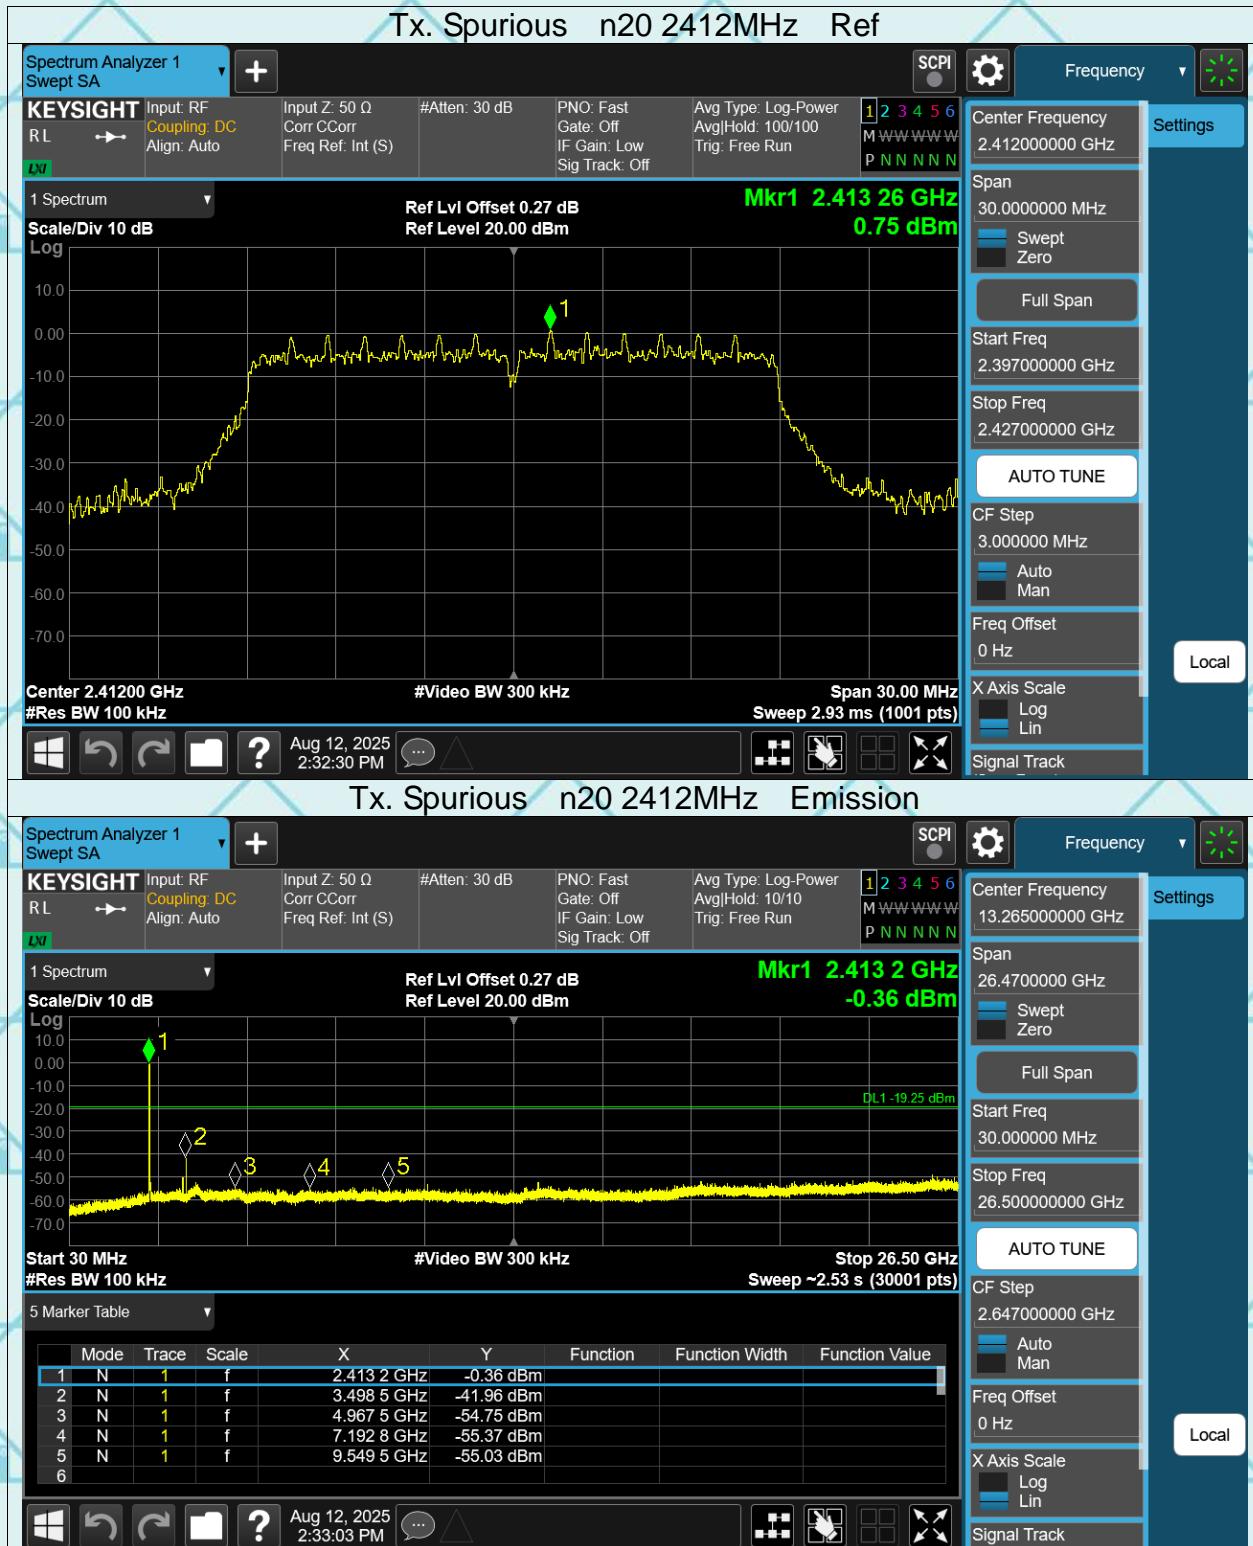

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025






Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025



6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

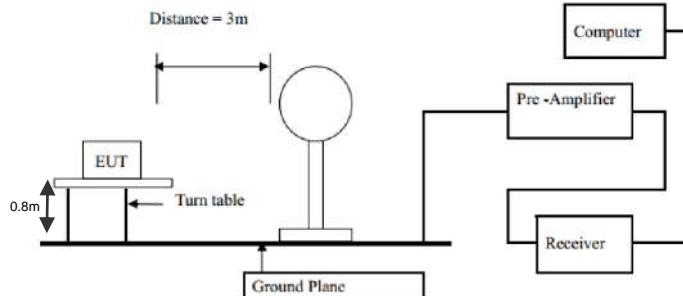Test Requirement:	FCC Part15 C Section 15.209							
Test Method:	ANSI C63.10: 2014							
Frequency Range:	9 kHz to 25 GHz							
Measurement Distance:	3 m							
Antenna Polarization:	Horizontal & Vertical							
Operation mode:	Transmitting mode with modulation							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value			
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value			
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
		Peak	1MHz	10Hz	Average Value			
Limit:	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)				
	0.009-0.490	2400/F(KHz)		300				
	0.490-1.705	24000/F(KHz)		30				
	1.705-30	30		30				
	30-88	100		3				
	88-216	150		3				
	216-960	200		3				
	Above 960	500		3				
Test setup:	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	Detector			
	Above 1GHz	500		3	Average			
		5000		3	Peak			
For radiated emissions below 30MHz								
								
30MHz to 1GHz								

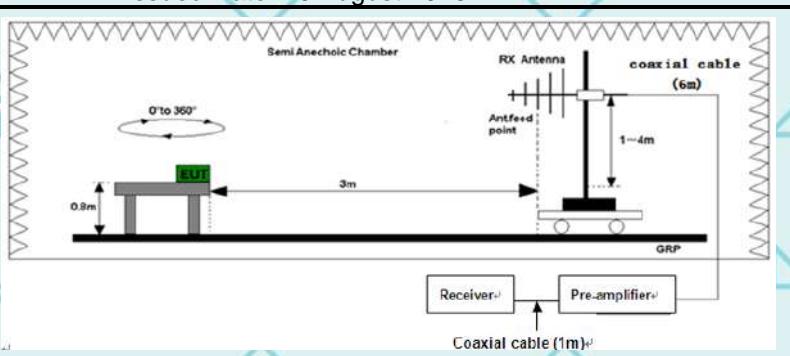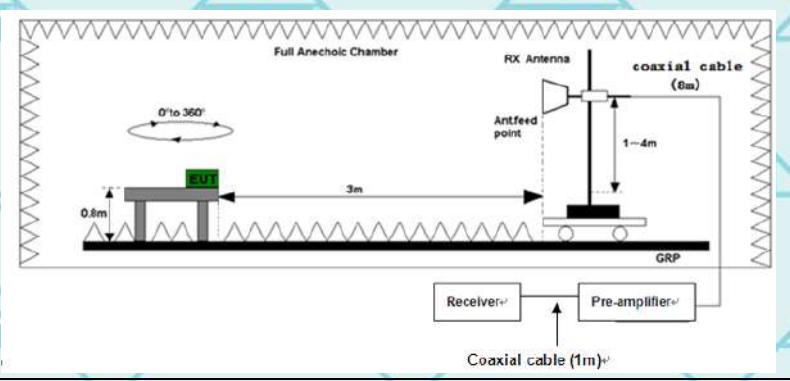 <p>Above 1GHz</p> 	<p>1. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.</p> <p>For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p>
<p>Test Procedure:</p>	

	<p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement. <p>For average measurement: $VBW = 10$ Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS

Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

6.7.2. Test Data(worst)

Please refer to following diagram for individual
Below 1GHz


Horizontal:



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	97.9000	41.84	-11.42	30.42	43.50	-13.08	QP
2		256.9800	32.46	-8.14	24.32	46.00	-21.68	QP
3		339.4300	31.49	-5.28	26.21	46.00	-19.79	QP
4		566.4099	27.76	0.05	27.81	46.00	-18.19	QP
5		782.7199	26.61	4.49	31.10	46.00	-14.90	QP
6		974.7800	26.29	7.65	33.94	54.00	-20.06	QP



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025
Vertical:

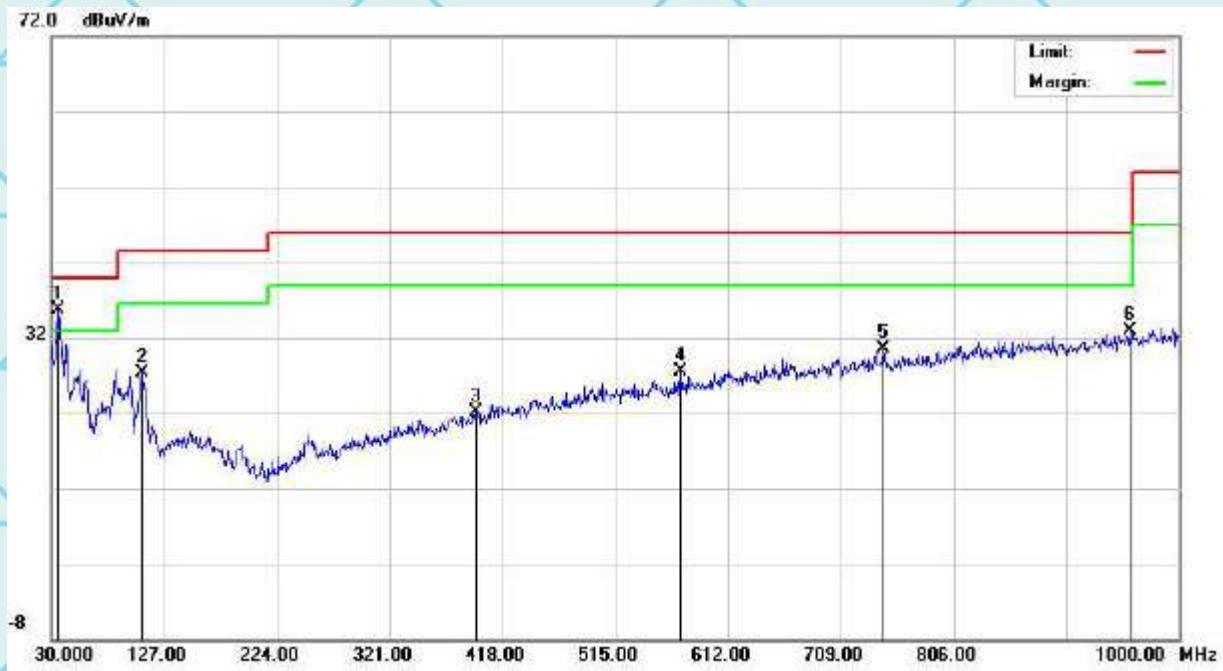

No.	Mk.	Freq. MHz	Reading Level dB μ V	Correct Factor dB	Measure- ment dB μ V/m	Limit dB μ V/m	Over dB	Detector
1	*	35.8200	56.32	-20.53	35.79	40.00	-4.21	QP
2		108.5700	47.40	-20.16	27.24	43.50	-16.26	QP
3		394.7200	40.99	-18.79	22.20	46.00	-23.80	QP
4		571.2600	45.47	-17.89	27.58	46.00	-18.42	QP
5		745.8600	47.44	-16.96	30.48	46.00	-15.52	QP
6		957.3200	48.46	-15.57	32.89	46.00	-13.11	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3: Report and only recorded the worst-case scenario 802.11b.

1 GHz to 18 GHz, ANT H 802.11b Low Channel

Horizontal:

**Suspected Data List**

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1393.1250	39.66	25.08	14.58	74	-34.34	11.4	Horizontal	PK	Pass
1	1393.1250	30.79	25.08	5.71	54	-23.21	11.4	Horizontal	AV	Pass
2	2400.6250	47.18	27.26	19.92	74	-26.82	317.4	Horizontal	PK	Pass
2	2400.6250	38.11	27.26	10.85	54	-15.89	317.4	Horizontal	AV	Pass
3	3910.0000	50.96	29.48	21.48	74	-23.04	360.1	Horizontal	PK	Pass
3	3910.0000	41.89	29.48	12.41	54	-12.11	360.1	Horizontal	AV	Pass
4	8070.0000	42.02	8.41	33.61	74	-31.98	83.4	Horizontal	PK	Pass
4	8070.0000	34.44	8.41	26.03	54	-19.56	83.4	Horizontal	AV	Pass
5	10162.5000	44.02	12.86	31.16	74	-29.98	9.8	Horizontal	PK	Pass
5	10162.5000	36.74	12.86	23.88	54	-17.26	9.8	Horizontal	AV	Pass
6	14101.5000	50.18	19.03	31.15	74	-23.82	320.1	Horizontal	PK	Pass
6	14101.5000	42.54	19.03	23.51	54	-11.46	320.1	Horizontal	AV	Pass



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Vertical :



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1523.7500	40	24.98	15.02	74	-34	316.1	Vertical	PK	Pass
1	1523.7500	30.7	24.98	5.72	54	-23.3	316.1	Vertical	AV	Pass
2	2398.1250	46.64	27.25	19.39	74	-27.36	270.6	Vertical	PK	Pass
2	2398.1250	37.52	27.25	10.27	54	-16.48	270.6	Vertical	AV	Pass
3	4946.8750	54.71	31.49	23.22	74	-19.29	360.1	Vertical	PK	Pass
3	4946.8750	44.66	31.49	13.17	54	-9.34	360.1	Vertical	AV	Pass
4	7663.5000	41.19	7.96	33.23	74	-32.81	349.2	Vertical	PK	Pass
4	7663.5000	33.67	7.96	25.71	54	-20.33	349.2	Vertical	AV	Pass
5	10356.0000	45.54	13.46	32.08	74	-28.46	132	Vertical	PK	Pass
5	10356.0000	36.9	13.46	23.44	54	-17.1	132	Vertical	AV	Pass
6	13960.5000	49.04	19.01	30.03	74	-24.96	275.4	Vertical	PK	Pass
6	13960.5000	42.47	19.01	23.46	54	-11.53	275.4	Vertical	AV	Pass



Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

Horizontal:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1776.2500	40.16	24.99	15.17	74	-33.84	71.4	Horizontal	PK	Pass
1	1776.2500	31.57	24.99	6.58	54	-22.43	71.4	Horizontal	AV	Pass
2	2457.5000	46.5	27.46	19.04	74	-27.5	165.8	Horizontal	PK	Pass
2	2457.5000	37.5	27.46	10.04	54	-16.5	165.8	Horizontal	AV	Pass
3	5280.0000	55.59	31.82	23.77	74	-18.41	255.5	Horizontal	PK	Pass
3	5280.0000	46.86	31.82	15.04	54	-7.14	255.5	Horizontal	AV	Pass
4	6348.0000	39.71	4.45	35.26	74	-34.29	267.1	Horizontal	PK	Pass
4	6348.0000	31.75	4.45	27.3	54	-22.25	267.1	Horizontal	AV	Pass
5	9861.0000	43.57	12.05	31.52	74	-30.43	36.4	Horizontal	PK	Pass
5	9861.0000	36.27	12.05	24.22	54	-17.73	36.4	Horizontal	AV	Pass
6	14125.5000	49.49	19	30.49	74	-24.51	227.7	Horizontal	PK	Pass
6	14125.5000	42.59	19	23.59	54	-11.41	227.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Vertical :




Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1589.3750	40.85	24.91	15.94	74	-33.15	165.9	Vertical	PK	Pass
1	1589.3750	30.88	24.91	5.97	54	-23.12	165.9	Vertical	AV	Pass
2	2409.3750	46.08	27.29	18.79	74	-27.92	0	Vertical	PK	Pass
2	2409.3750	37.72	27.29	10.43	54	-16.28	0	Vertical	AV	Pass
3	5008.7500	53.95	31.61	22.34	74	-20.05	358.8	Vertical	PK	Pass
3	5008.7500	45.35	31.61	13.74	54	-8.65	358.8	Vertical	AV	Pass
4	7605.0000	41.52	7.94	33.58	74	-32.48	360.1	Vertical	PK	Pass
4	7605.0000	33.78	7.94	25.84	54	-20.22	360.1	Vertical	AV	Pass
5	9684.0000	43.8	11.59	32.21	74	-30.2	246.8	Vertical	PK	Pass
5	9684.0000	36.13	11.59	24.54	54	-17.87	246.8	Vertical	AV	Pass
6	14080.5000	50.36	19.05	31.31	74	-23.64	231.3	Vertical	PK	Pass
6	14080.5000	42.57	19.05	23.52	54	-11.43	231.3	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

1 GHz to 18 GHz, ANT H 802.11b High Channel

Horizontal:

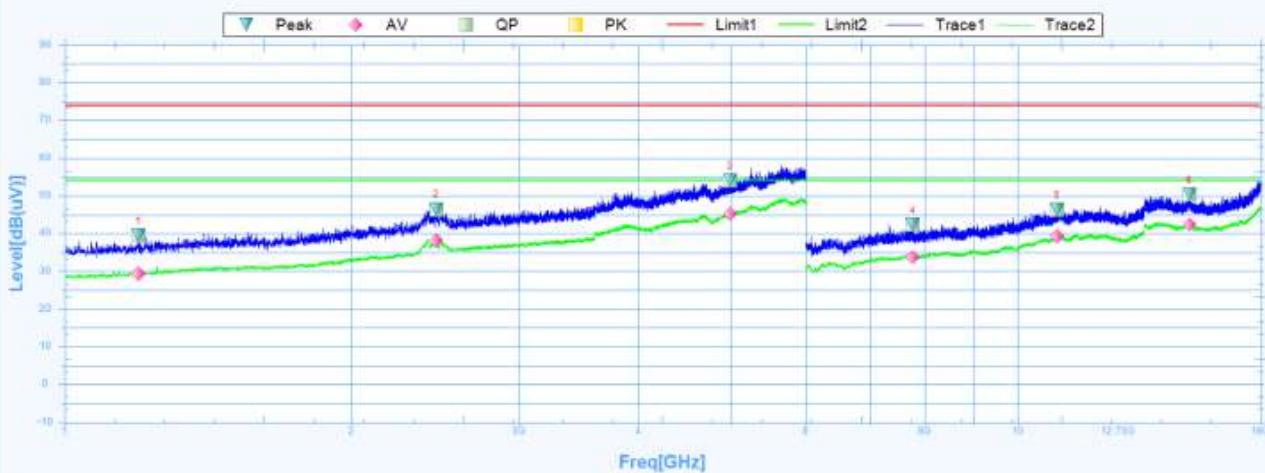

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1195.0000	39.4	24.4	15	74	-34.6	82.2	Horizontal	PK	Pass
1	1195.0000	29.27	24.4	4.87	54	-24.73	82.2	Horizontal	AV	Pass
2	2453.7500	46.44	27.44	19	74	-27.56	218.5	Horizontal	PK	Pass
2	2453.7500	38.17	27.44	10.73	54	-15.83	218.5	Horizontal	AV	Pass
3	4992.5000	54.15	31.58	22.57	74	-19.85	59.4	Horizontal	PK	Pass
3	4992.5000	45.34	31.58	13.76	54	-8.66	59.4	Horizontal	AV	Pass
4	7765.5000	42.42	7.97	34.45	74	-31.58	297	Horizontal	PK	Pass
4	7765.5000	33.81	7.97	25.84	54	-20.19	297	Horizontal	AV	Pass
5	11007.0000	46.25	15.63	30.62	74	-27.75	227.6	Horizontal	PK	Pass
5	11007.0000	39.17	15.63	23.54	54	-14.83	227.6	Horizontal	AV	Pass
6	15163.5000	50.28	19.42	30.86	74	-23.72	351.1	Horizontal	PK	Pass
6	15163.5000	42.3	19.42	22.88	54	-11.7	351.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

Vertical :



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1478.1250	40.01	25.02	14.99	74	-33.99	170.7	Vertical	PK	Pass
1	1478.1250	30.82	25.02	5.8	54	-23.18	170.7	Vertical	AV	Pass
2	2446.2500	46.91	27.42	19.49	74	-27.09	96.6	Vertical	PK	Pass
2	2446.2500	37.81	27.42	10.39	54	-16.19	96.6	Vertical	AV	Pass
3	4698.1250	53.68	31	22.68	74	-20.32	199.4	Vertical	PK	Pass
3	4698.1250	44.55	31	13.55	54	-9.45	199.4	Vertical	AV	Pass
4	7305.0000	40.97	6.87	34.1	74	-33.03	131.9	Vertical	PK	Pass
4	7305.0000	33.29	6.87	26.42	54	-20.71	131.9	Vertical	AV	Pass
5	10804.5000	45.55	14.78	30.77	74	-28.45	228.8	Vertical	PK	Pass
5	10804.5000	37.95	14.78	23.17	54	-16.05	228.8	Vertical	AV	Pass
6	15106.5000	49.82	19.66	30.16	74	-24.18	110.5	Vertical	PK	Pass
6	15106.5000	42.16	19.66	22.5	54	-11.84	110.5	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note: Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Level (dB μ V) – Limits (dB μ V)

Report No.: WSCT-ANAB-R&E250700058A-Wi-Fi Issued Date: 19 August 2025

6.7.3. Restricted Bands Requirements

Test result for 802.11b Mode (the worst case)

Frequency (MHz)	Reading (dB μ V/m)	Correct Factor dB/m	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polar H/V	Detector
Low Channel							
2390	65.85	-5.24	60.61	74	13.39	H	PK
2390	51.94	-5.24	46.70	54	7.30	H	AV
2390	63.43	-4.87	58.56	74	15.44	V	PK
2390	51.27	-4.87	46.40	54	7.60	V	AV
High Channel							
2483.5	64.43	-5.24	59.19	74	14.81	H	PK
2483.5	53.13	-5.24	47.89	54	6.11	H	AV
2483.5	66.20	-4.87	61.33	74	12.67	V	PK
2483.5	50.20	-4.87	45.33	54	8.67	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Level (dB μ V) – Limits (dB μ V)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*****END OF REPORT*****