



TEST REPORT

No. I18Z60289-WMD03

for

HMD Global Oy

Smart phone

Model Name: TA-1081

FCC ID: 2AJOTTA-1081

with

Hardware Version: 0317/0309

Software Version: 00WW_0_266

Issued Date: 2018-05-24



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z60289-WMD03	Rev.0	1st edition	2018-05-24

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS.....	11
6.3. EXPLANATION OF RE-USE OF TEST DATA	11
7. TEST EQUIPMENTS UTILIZED.....	12
ANNEX A: MEASUREMENT RESULTS	13
A.1 OUTPUT POWER	13
A.2 EMISSION LIMIT	40
A.3 FREQUENCY STABILITY	55
A.4 OCCUPIED BANDWIDTH.....	59
A.5 EMISSION BANDWIDTH	88
A.6 BAND EDGE COMPLIANCE.....	117
A.7 CONDUCTED SPURIOUS EMISSION	136
A.8 PEAK-TO-AVERAGE POWER RATIO	140
ANNEX B: ACCREDITATION CERTIFICATE	142

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2018-04-02

Testing End Date: 2018-05-08

1.4. Signature



Shen Yi

(Prepared this test report)



Zhou Yu

(Reviewed this test report)



Zhao Hui Lin

Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: HMD Global Oy
Address /Post: Karaportti 2 02610 Espoo FINLAND
Contact: Mikko Kahlos
Email: mikko.kahlos@hmdglobal.com
Telephone: +358 408036126
Fax: +97143697604

2.2. Manufacturer Information

Company Name: HMD Global Oy
Address /Post: Karaportti 2 02610 Espoo FINLAND
Contact: Mikko Kahlos
Email: mikko.kahlos@hmdglobal.com
Telephone: +358 408036126
Fax: +97143697604

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart phone
Model Name	TA-1081
FCC ID	2AJOTTA-1081
Antenna	Embedded
Output power	24.23dBm maximum EIRP measured for Band 2
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
/	/	/	/	/
/	/	/	/	/

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Travel charger
AE3	Travel charger
AE1	
Model	HE336
Manufacturer	SCUD(Fujian) Electronics Co., Ltd.
Capacitance	2900mAh
AE2	
Model	AD-10W
Manufacturer	Salcomp
AE3	
Model	AD-10W
Manufacturer	DVE

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of Smart phone with Embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-17 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-17 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-17 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
TIA-102.CAAA-E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	BR	Re-use test data from basic model report.
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	BR
2	Emission Limit	24.238(a), 2.1051	A.2	BR
3	Frequency Stability	24.235, 2.1055	A.3	BR
4	Occupied Bandwidth	2.1049(h)(i)	A.4	BR
5	Emission Bandwidth	24.238(a)	A.5	BR
6	Band Edge Compliance	24.238(a)	A.6	BR
7	Conducted Spurious Emission	24.238, 2.1057	A.7	BR
8	Peak to Average Power Ratio	24.232 (d)	A.8	BR

LTE Band 4

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(d)(4)	A.1	BR
2	Emission Limit	27.53(h), 2.1051	A.2	BR
3	Frequency Stability	27.54, 2.1055	A.3	BR
4	Occupied Bandwidth	2.1049(h)(i)	A.4	BR
5	Emission Bandwidth	27.53(h)	A.5	BR
6	Band Edge Compliance	27.53(h)	A.6	BR
7	Conducted Spurious Emission	27.53(h), 2.1057	A.7	BR
8	Peak to Average Power Ratio	27.50(a)	A.8	BR

LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	§2.1046(a), 22.913(a)	A.1	BR
2	Emission Limit	22.917, 2.1051	A.2	BR
3	Frequency Stability	22.235, 2.1055	A.3	BR
4	Occupied Bandwidth	2.1049(h)(i)	A.4	BR
5	Emission Bandwidth	22.917(b)	A.5	BR
6	Band Edge Compliance	22.917(b)	A.6	BR
7	Conducted Spurious Emission	22.917, 2.1057	A.7	BR

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	BR
2	Emission Limit	27.53(m), 2.1051	A.2	BR
3	Frequency Stability	27.54, 2.1055	A.3	BR
4	Occupied Bandwidth	2.1049(h)(i)	A.4	BR
5	Emission Bandwidth	27.53(m)	A.5	BR
6	Band Edge Compliance	27.53(m)	A.6	BR
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	BR
8	Peak to Average Power Ratio	27.50(a)	A.8	BR

LTE Band 12

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(c)(10)	A.1	BR
2	Emission Limit	27.53(g), 2.1051	A.2	BR
3	Frequency Stability	27.54, 2.1055	A.3	BR
4	Occupied Bandwidth	2.1049(h)(i)	A.4	BR
5	Emission Bandwidth	27.53(g)	A.5	BR
6	Band Edge Compliance	27.53(g)	A.6	BR
7	Conducted Spurious Emission	27.53(g), 2.1057	A.7	BR
8	Peak to Average Power Ratio	27.50(a)	A.8	BR

LTE Band 38

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	BR
2	Emission Limit	27.53(m), 2.1051	A.2	BR
3	Frequency Stability	27.54, 2.1055	A.3	BR
4	Occupied Bandwidth	2.1049(h)(i)	A.4	BR
5	Emission Bandwidth	27.53(m)	A.5	BR
6	Band Edge Compliance	27.53(m)	A.6	BR
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	BR
8	Peak to Average Power Ratio	27.50(a)	A.8	BR

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.

6.3. Explanation of re-use of test data

The Equipment Under Test (EUT) model TA-1081 (FCC ID: 2AJOTTA-1081) is a variant product(FCC ID: 2AJOTTA-1088) of TA-1088, according to the declaration of changes provided by the applicant and FCC KDB publication 178919 D01, all the test results are derived from test report No.I18Z60296-WMD03. For detail differences between two models please refer the Declaration of Changes document.

7. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	Test Receiver	ESU26	100235	R&S	2019-03-31	1 year
2	Test Receiver	ESU26	100376	R&S	2018-12-27	1 year
3	EMI Antenna	3117	00058889	ETS-Lindgren	2020-05-27	3 year
4	Universal Radio Communication Tester	CMW500	159082	R&S	2019-01-05	1 year
5	Spectrum Analyzer	FSU26	200030	R&S	2018-06-10	1 year
6	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-05-10	3 year
7	Signal Generator	SMF100A	101295	R&S	2018-12-23	1 year
8	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
9	Loop Antenna	HFH2-Z2	829324/007	R&S	2018-12-14	3 year

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1909.3	21.99	21.27
		1880.0	22.06	21.40
		1850.7	22.16	21.41
	1 RB low	1909.3	21.98	21.37
		1880.0	22.08	21.35
		1850.7	22.15	21.34
	50% RB mid	1909.3	22.12	21.29
		1880.0	22.17	21.29
		1850.7	22.27	21.33
	100% RB	1909.3	21.13	20.25
		1880.0	21.16	20.20
		1850.7	21.26	20.30
3MHz	1 RB high	1908.5	22.14	21.44
		1880.0	22.19	21.41
		1851.5	22.24	21.52
	1 RB low	1908.5	22.17	21.35
		1880.0	22.22	21.40
		1851.5	22.28	21.42
	50% RB mid	1908.5	21.18	20.25
		1880.0	21.21	20.24
		1851.5	21.29	20.29

	100% RB	1908.5	21.18	20.21
		1880.0	21.21	20.21
		1851.5	21.32	20.31
5MHz	1 RB high	1907.5	22.13	21.39
		1880.0	22.17	21.39
		1852.5	22.20	21.43
	1 RB low	1907.5	22.14	21.38
		1880.0	22.21	21.44
		1852.5	22.28	21.46
	50% RB mid	1907.5	21.17	20.17
		1880.0	21.20	20.21
		1852.5	21.28	20.28
	100% RB	1907.5	21.13	20.13
		1880.0	21.16	20.15
		1852.5	21.26	20.23
10MHz	1 RB high	1905.0	22.16	21.41
		1880.0	22.19	21.45
		1855.0	22.22	21.44
	1 RB low	1905.0	22.15	21.40
		1880.0	22.24	21.46
		1855.0	22.33	21.53
	50% RB mid	1905.0	21.14	20.15
		1880.0	21.24	20.20
		1855.0	21.29	20.23
	100% RB	1905.0	21.16	20.15
		1880.0	21.20	20.20
		1855.0	21.29	20.26
15MHz	1 RB high	1902.5	22.18	21.43
		1880.0	22.23	21.45
		1857.5	22.26	21.46
	1 RB low	1902.5	22.26	21.52
		1880.0	22.35	21.57
		1857.5	22.43	21.66
	50% RB mid	1902.5	21.17	20.15
		1880.0	21.23	20.22
		1857.5	21.27	20.24
	100% RB	1902.5	21.16	20.16
		1880.0	21.22	20.22
		1857.5	21.31	20.27

20MHz	1 RB high	1900.0	22.19	21.50
		1880.0	22.23	21.51
		1860.0	22.29	21.50
	1 RB low	1900.0	22.30	21.55
		1880.0	22.38	21.59
		1860.0	22.47	21.66
	50% RB mid	1900.0	21.13	20.15
		1880.0	21.22	20.20
		1860.0	21.27	20.24
	100% RB	1900.0	21.12	20.14
		1880.0	21.27	20.28
		1860.0	21.26	20.25

LTE band 4

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1754.3	22.24	21.58
		1732.5	22.25	21.56
		1710.7	22.17	21.46
	1 RB low	1754.3	22.23	21.61
		1732.5	22.25	21.63
		1710.7	22.16	21.49
	50% RB mid	1754.3	22.35	21.51
		1732.5	22.37	21.56
		1710.7	22.27	21.42
	100% RB	1754.3	21.37	20.47
		1732.5	21.36	20.46
		1710.7	21.27	20.36
3MHz	1 RB high	1753.5	22.37	21.68
		1732.5	22.43	21.61
		1711.5	22.32	21.46
	1 RB low	1753.5	22.44	21.62
		1732.5	22.45	21.64
		1711.5	22.37	21.63
	50% RB mid	1753.5	21.40	20.48
		1732.5	21.43	20.48
		1711.5	21.32	20.42
	100% RB	1753.5	21.42	20.48
		1732.5	21.43	20.49
		1711.5	21.33	20.38
5MHz	1 RB high	1752.5	22.33	21.56
		1732.5	22.34	21.57
		1712.5	22.27	21.47
	1 RB low	1752.5	22.36	21.59
		1732.5	22.42	21.62
		1712.5	22.34	21.52
	50% RB mid	1752.5	21.37	20.42
		1732.5	21.39	20.43
		1712.5	21.28	20.31
	100% RB	1752.5	21.34	20.39
		1732.5	21.36	20.40
		1712.5	21.25	20.28
10MHz	1 RB high	1750	22.38	21.67
		1732.5	22.40	21.67

	1 RB low	1715	22.31	21.55
		1750	22.44	21.74
		1732.5	22.44	21.67
		1715	22.39	21.68
	50% RB mid	1750	21.39	20.43
		1732.5	21.39	20.43
		1715	21.28	20.33
	100% RB	1750	21.36	20.38
		1732.5	21.40	20.42
		1715	21.26	20.28
15MHz	1 RB high	1747.5	22.38	21.68
		1732.5	22.45	21.64
		1717.5	22.41	21.69
	1 RB low	1747.5	22.50	21.75
		1732.5	22.50	21.73
		1717.5	22.42	21.77
	50% RB mid	1747.5	21.39	20.42
		1732.5	21.40	20.43
		1717.5	21.30	20.32
	100% RB	1747.5	21.35	20.38
		1732.5	21.43	20.47
		1717.5	21.33	20.34
20MHz	1 RB high	1745	22.45	21.60
		1732.5	22.48	21.71
		1720	22.50	21.72
	1 RB low	1745	22.59	21.81
		1732.5	22.55	21.76
		1720	22.52	21.74
	50% RB mid	1745	21.40	20.42
		1732.5	21.42	20.45
		1720	21.35	20.38
	100% RB	1745	21.39	20.43
		1732.5	21.50	20.54
		1720	21.37	20.39

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	22.22	21.52
		836.5	22.30	21.67
		824.7	22.32	21.58
	1 RB low	848.3	22.20	21.61
		836.5	22.26	21.69
		824.7	22.28	21.71
	50% RB mid	848.3	22.29	21.52
		836.5	22.37	21.60
		824.7	22.39	21.59
	100% RB	848.3	21.32	20.38
		836.5	21.40	20.47
		824.7	21.42	20.47
3MHz	1 RB high	847.5	22.37	21.58
		836.5	22.46	21.72
		825.5	22.48	21.76
	1 RB low	847.5	22.39	21.67
		836.5	22.47	21.69
		825.5	22.48	21.74
	50% RB mid	847.5	21.39	20.43
		836.5	21.47	20.50
		825.5	21.50	20.51
	100% RB	847.5	21.39	20.41
		836.5	21.47	20.50
		825.5	21.48	20.50
5MHz	1 RB high	846.5	22.30	21.49
		836.5	22.38	21.64
		826.5	22.44	21.77
	1 RB low	846.5	22.36	21.66
		836.5	22.41	21.66
		826.5	22.40	21.69
	50% RB mid	846.5	21.39	20.39
		836.5	21.43	20.45
		826.5	21.45	20.46
	100% RB	846.5	21.33	20.33
		836.5	21.40	20.41
		826.5	21.39	20.38

10MHz	1 RB high	844.0	22.34	21.69
		836.5	22.42	21.67
		829.0	22.48	21.75
	1 RB low	844.0	22.44	21.70
		836.5	22.46	21.76
		829.0	22.44	21.73
	50% RB mid	844.0	21.38	20.38
		836.5	21.43	20.44
		829.0	21.48	20.47
	100% RB	844.0	21.37	20.34
		836.5	21.47	20.46
		829.0	21.45	20.43

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	22.53	21.74
		2535	22.24	21.56
		2502.5	22.10	21.34
	1 RB low	2567.5	22.47	21.69
		2535	22.16	21.46
		2502.5	22.11	21.37
	50% RB mid	2567.5	21.53	20.61
		2535	21.27	20.29
		2502.5	21.19	20.19
	100% RB	2567.5	21.51	20.57
		2535	21.25	20.26
		2502.5	21.17	20.15
10MHz	1 RB high	2565	22.58	21.85
		2535	22.30	21.58
		2505	22.14	21.38
	1 RB low	2565	22.41	21.64
		2535	22.13	21.44
		2505	22.12	21.40
	50% RB mid	2565	21.50	20.56
		2535	21.28	20.28
		2505	21.16	20.16
	100% RB	2565	21.53	20.57
		2535	21.29	20.29
		2505	21.19	20.16
15MHz	1 RB high	2562.5	22.60	21.83
		2535	22.34	21.61
		2507.5	22.15	21.34
	1 RB low	2562.5	22.38	21.65
		2535	22.19	21.40
		2507.5	22.18	21.39
	50% RB mid	2562.5	21.47	20.53
		2535	21.28	20.28
		2507.5	21.16	20.13
	100% RB	2562.5	21.49	20.56
		2535	21.30	20.31
		2507.5	21.19	20.20

20MHz	1 RB high	2560	22.65	21.92
		2535	22.42	21.66
		2510	22.21	21.48
	1 RB low	2560	22.35	21.62
		2535	22.19	21.48
		2510	22.18	21.36
	50% RB mid	2560	21.47	20.50
		2535	21.30	20.29
		2510	21.16	20.13
	100% RB	2560	21.52	20.56
		2535	21.36	20.36
		2510	21.17	20.15

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	715.3	22.19	21.54
		707.5	22.18	21.55
		699.7	22.20	21.49
	1 RB low	715.3	22.15	21.45
		707.5	22.17	21.51
		699.7	22.13	21.40
	50% RB mid	715.3	22.26	21.44
		707.5	22.26	21.45
		699.7	22.29	21.45
	100% RB	715.3	21.33	20.38
		707.5	21.31	20.38
		699.7	21.36	20.39
3MHz	1 RB high	714.5	22.36	21.58
		707.5	22.35	21.60
		700.5	22.36	21.65
	1 RB low	714.5	22.31	21.54
		707.5	22.35	21.62
		700.5	22.33	21.58
	50% RB mid	714.5	21.38	20.39
		707.5	21.39	20.4
		700.5	21.42	20.42
	100% RB	714.5	21.39	20.40
		707.5	21.40	20.39
		700.5	21.43	20.43
5MHz	1 RB high	713.5	22.32	21.54
		707.5	22.33	21.56
		701.5	22.35	21.60
	1 RB low	713.5	22.22	21.46
		707.5	22.27	21.49
		701.5	22.25	21.49
	50% RB mid	713.5	21.35	20.35
		707.5	21.36	20.36
		701.5	21.39	20.36
	100% RB	713.5	21.33	20.29
		707.5	21.34	20.31
		701.5	21.35	20.32



10MHz	1 RB high	711.0	22.40	21.58
		707.5	22.36	21.57
		704.0	22.37	21.66
	1 RB low	711.0	22.29	21.57
		707.5	22.30	21.52
		704.0	22.28	21.46
	50% RB mid	711.0	21.37	20.33
		707.5	21.36	20.36
		704.0	21.39	20.37
	100% RB	711.0	21.28	20.25
		707.5	21.37	20.34
		704.0	21.44	20.40

LTE band 38

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2617.5	22.1	21.04
		2595.0	22.24	21.16
		2572.5	22.40	21.35
	1 RB low	2617.5	22.07	21.02
		2595.0	22.30	21.22
		2572.5	22.46	21.42
	50% RB mid	2617.5	21.09	20.17
		2595.0	21.26	20.32
		2572.5	21.44	20.51
	100% RB	2617.5	21.04	20.07
		2595.0	21.21	20.24
		2572.5	21.39	20.42
10MHz	1 RB high	2615.0	22.09	21.07
		2595.0	22.21	21.18
		2575.0	22.39	21.38
	1 RB low	2615.0	22.06	21.01
		2595.0	22.29	21.22
		2575.0	22.44	21.41
	50% RB mid	2615.0	21.05	20.09
		2595.0	21.26	20.29
		2575.0	21.39	20.42
	100% RB	2615.0	21.05	20.03
		2595.0	21.22	20.21
		2575.0	21.38	20.38
15MHz	1 RB high	2612.5	22.12	21.08
		2595.0	22.23	21.16
		2577.5	22.39	21.33
	1 RB low	2612.5	22.11	21.07
		2595.0	22.36	21.29
		2577.5	22.51	21.47
	50% RB mid	2612.5	21.06	20.06
		2595.0	21.25	20.24
		2577.5	21.40	20.37
	100% RB	2612.5	21.05	20.02
		2595.0	21.27	20.23
		2577.5	21.39	20.37
20MHz	1 RB high	2610.0	22.13	21.11

		2595.0	22.23	21.19
		2580.0	22.39	21.32
	1 RB low	2610.0	22.18	21.12
		2595.0	22.39	21.32
		2580.0	22.56	21.48
	50% RB mid	2610.0	21.06	20.05
		2595.0	21.23	20.22
		2580.0	21.36	20.34
	100% RB	2610.0	21.09	20.08
		2595.0	21.30	20.32
		2580.0	21.43	20.43

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 22.913(a) specifies "Mobile stations are limited to 2.0 watts EIRP."

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".

Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP."

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP."


Rule Part 27.50(a)(3) specifies "For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth."

Rule Part 90.542 specifies "Portable stations (hand-held devices) transmitting in the 758–768 MHz band and the 788–798 MHz band are limited to 3 watts ERP. "


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

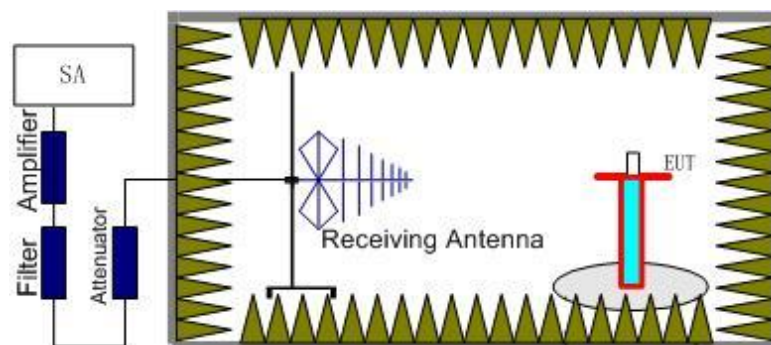

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

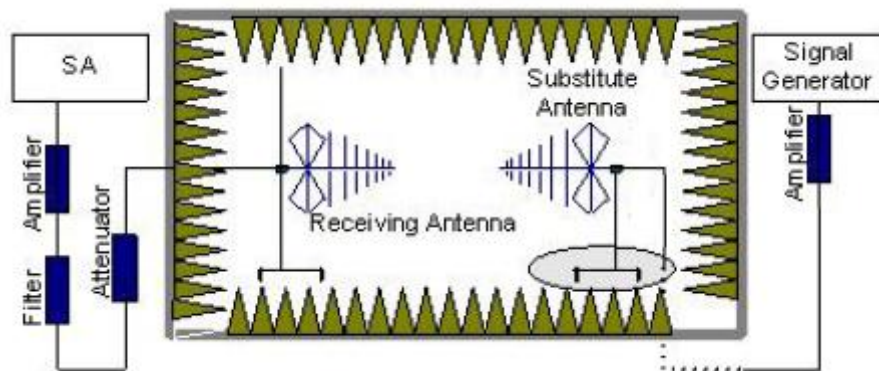

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-25.16	2.92	43.75	4.87	20.54	33.00	12.46	H
1880.00	-23.27	2.85	43.75	4.82	22.45	33.00	10.55	H
1909.30	-21.43	2.87	43.77	4.76	24.23	33.00	8.77	H

LTE Band 2_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-25.12	2.87	43.75	4.87	20.63	33.00	12.37	H
1880.00	-23.31	2.85	43.75	4.82	22.41	33.00	10.59	H
1908.50	-21.46	2.89	43.78	4.76	24.19	33.00	8.81	H

LTE Band 2_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-25.09	2.87	43.75	4.87	20.66	33.00	12.34	H
1880.00	-23.31	2.85	43.75	4.82	22.41	33.00	10.59	H
1907.50	-21.57	2.84	43.77	4.77	24.13	33.00	8.87	H

LTE Band 2_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-24.94	2.88	43.74	4.86	20.78	33.00	12.22	H
1880.00	-23.24	2.85	43.75	4.82	22.48	33.00	10.52	H
1905.00	-21.66	2.87	43.77	4.77	24.01	33.00	8.99	H

LTE Band 2_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-24.77	2.87	43.75	4.86	20.97	33.00	12.03	H
1880.00	-23.18	2.85	43.75	4.82	22.54	33.00	10.46	H
1902.50	-21.89	2.86	43.77	4.78	23.80	33.00	9.20	H

LTE Band 2_20 MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-24.53	2.86	43.75	4.85	21.21	33.00	11.79	H
1880.00	-23.21	2.85	43.75	4.82	22.51	33.00	10.49	H
1900.00	-21.98	2.87	43.77	4.78	23.70	33.00	9.30	H

LTE Band 2 1.4MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-26.09	2.92	43.75	4.87	19.61	33.00	13.39	H
1880.00	-24.19	2.85	43.75	4.82	21.53	33.00	11.47	H
1909.30	-22.33	2.87	43.77	4.76	23.33	33.00	9.67	H

LTE Band 2 3MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-26.16	2.87	43.75	4.87	19.59	33.00	13.41	H
1880.00	-24.30	2.85	43.75	4.82	21.42	33.00	11.58	H
1908.50	-22.45	2.89	43.78	4.76	23.20	33.00	9.80	H

LTE Band 2 5MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-26.03	2.87	43.75	4.87	19.72	33.00	13.28	H
1880.00	-24.27	2.85	43.75	4.82	21.45	33.00	11.55	H
1907.50	-22.47	2.84	43.77	4.77	23.23	33.00	9.77	H

LTE Band 2 10MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-25.95	2.88	43.74	4.86	19.77	33.00	13.23	H
1880.00	-24.13	2.85	43.75	4.82	21.59	33.00	11.41	H
1905.00	-22.66	2.87	43.77	4.77	23.01	33.00	9.99	H

LTE Band 2 15MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-25.74	2.87	43.75	4.86	20.00	33.00	13.00	H
1880.00	-24.11	2.85	43.75	4.82	21.61	33.00	11.39	H
1902.50	-22.85	2.86	43.77	4.78	22.84	33.00	10.16	H

LTE Band 2 20 MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-25.34	2.86	43.75	4.85	20.40	33.00	12.60	H
1880.00	-24.19	2.85	43.75	4.82	21.53	33.00	11.47	H
1900.00	-22.93	2.87	43.77	4.78	22.75	33.00	10.25	H

LTE Band 4- EIRP 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 4_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-27.01	3.17	44.10	5.12	19.04	30.00	10.96	H
1732.50	-25.95	3.33	44.14	5.08	19.94	30.00	10.06	H
1754.30	-22.46	3.76	44.14	5.04	22.96	30.00	7.04	H

LTE Band 4_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-26.80	3.40	44.10	5.12	19.02	30.00	10.98	H
1732.50	-25.98	3.33	44.14	5.08	19.91	30.00	10.09	H
1753.50	-22.46	3.80	44.13	5.04	22.91	30.00	7.09	H

LTE Band 4_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-26.45	3.66	44.10	5.12	19.11	30.00	10.89	H
1732.50	-26.00	3.33	44.14	5.08	19.89	30.00	10.11	H
1752.50	-22.58	3.82	44.14	5.05	22.79	30.00	7.21	H

LTE Band 4_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-26.50	3.56	44.10	5.11	19.15	30.00	10.85	H
1732.50	-25.93	3.33	44.14	5.08	19.96	30.00	10.04	H
1750.00	-23.80	3.00	44.15	5.05	22.40	30.00	7.60	H

LTE Band 4_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-26.58	3.47	44.11	5.11	19.17	30.00	10.83	H
1732.50	-25.89	3.33	44.14	5.08	20.00	30.00	10.00	H
1747.50	-23.92	3.34	44.15	5.05	21.94	30.00	8.06	H

LTE Band 4_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-26.59	3.37	44.11	5.10	19.25	30.00	10.75	H
1732.50	-25.87	3.33	44.14	5.08	20.02	30.00	9.98	H
1745.00	-23.74	3.68	44.16	5.06	21.80	30.00	8.20	H

LTE Band 4 1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-27.89	3.17	44.10	5.12	18.16	30.00	11.84	H
1732.50	-26.90	3.33	44.14	5.08	18.99	30.00	11.01	H
1754.30	-23.31	3.76	44.14	5.04	22.11	30.00	7.89	H

LTE Band 4 3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-27.75	3.40	44.10	5.12	18.07	30.00	11.93	H
1732.50	-26.94	3.33	44.14	5.08	18.95	30.00	11.05	H
1753.50	-23.28	3.80	44.13	5.04	22.09	30.00	7.91	H

LTE Band 4 5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-27.34	3.66	44.10	5.12	18.22	30.00	11.78	H
1732.50	-26.89	3.33	44.14	5.08	19.00	30.00	11.00	H
1752.50	-23.42	3.82	44.14	5.05	21.95	30.00	8.05	H

LTE Band 4 10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-27.44	3.56	44.10	5.11	18.21	30.00	11.79	H
1732.50	-26.72	3.33	44.14	5.08	19.17	30.00	10.83	H
1750.00	-24.72	3.00	44.15	5.05	21.48	30.00	8.52	H

LTE Band 4 15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-27.50	3.47	44.11	5.11	18.25	30.00	11.75	H
1732.50	-26.71	3.33	44.14	5.08	19.18	30.00	10.82	H
1747.50	-24.85	3.34	44.15	5.05	21.01	30.00	8.99	H

LTE Band 4 20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-27.52	3.37	44.11	5.10	18.32	30.00	11.68	H
1732.50	-26.80	3.33	44.14	5.08	19.09	30.00	10.91	H
1745.00	-24.71	3.68	44.16	5.06	20.83	30.00	9.17	H

LTE Band 5- ERP 22.913(a)
Limits: ≤38.45dBm (7W)

LTE Band 5_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-28.91	2.26	45.79	0.95	2.15	17.72	38.45	20.73	H
836.50	-27.76	2.26	45.66	0.82	2.15	18.61	38.45	19.84	H
848.30	-27.70	2.27	45.55	0.80	2.15	18.53	38.45	19.92	H

LTE Band 5_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-24.56	2.26	45.79	0.94	2.15	17.76	38.45	20.69	H
836.50	-23.46	2.26	45.66	0.82	2.15	18.61	38.45	19.84	H
847.50	-23.39	2.27	45.56	0.81	2.15	18.56	38.45	19.89	H

LTE Band 5_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-24.44	2.25	45.77	0.93	2.15	17.86	38.45	20.59	H
836.50	-23.45	2.26	45.66	0.82	2.15	18.62	38.45	19.83	H
846.50	-23.41	2.26	45.56	0.82	2.15	18.56	38.45	19.89	H

LTE Band 5_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-24.24	2.13	45.74	0.90	2.15	18.12	38.45	20.33	H
836.50	-23.41	2.26	45.66	0.82	2.15	18.66	38.45	19.79	H
844.00	-23.40	2.26	45.59	0.82	2.15	18.60	38.45	19.85	H

LTE Band 5_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-29.84	2.26	45.79	0.95	2.15	16.79	38.45	21.66	H
836.50	-28.57	2.26	45.66	0.82	2.15	17.80	38.45	20.65	H
848.30	-28.66	2.27	45.55	0.80	2.15	17.57	38.45	20.88	H

LTE Band 5_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-25.60	2.26	45.79	0.94	2.15	16.72	38.45	21.73	H
836.50	-24.28	2.26	45.66	0.82	2.15	17.79	38.45	20.66	H
847.50	-24.43	2.27	45.56	0.81	2.15	17.52	38.45	20.93	H

LTE Band 5_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-25.38	2.25	45.77	0.93	2.15	16.92	38.45	21.53	H
836.50	-24.33	2.26	45.66	0.82	2.15	17.74	38.45	20.71	H
846.50	-24.45	2.26	45.56	0.82	2.15	17.52	38.45	20.93	H

LTE Band 5_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-25.12	2.13	45.74	0.90	2.15	17.24	38.45	21.21	H
836.50	-24.35	2.26	45.66	0.82	2.15	17.72	38.45	20.73	H
844.00	-24.55	2.26	45.59	0.82	2.15	17.45	38.45	21.00	H

LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-27.50	3.58	45.68	6.10	20.70	33.00	12.30	H
2535.00	-27.00	3.63	44.82	6.16	20.35	33.00	12.65	H
2567.50	-27.38	3.65	44.92	6.22	20.11	33.00	12.89	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-27.51	3.59	45.64	6.11	20.65	33.00	12.35	H
2535.00	-26.97	3.63	44.82	6.16	20.38	33.00	12.62	H
2565.00	-27.40	3.65	44.97	6.22	20.14	33.00	12.86	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-27.07	3.59	44.92	6.11	20.37	33.00	12.63	H
2535.00	-26.93	3.63	44.82	6.16	20.42	33.00	12.58	H
2562.50	-28.00	3.65	45.67	6.21	20.23	33.00	12.77	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-27.57	3.58	45.36	6.12	20.33	33.00	12.67	H
2535.00	-26.99	3.63	44.82	6.16	20.36	33.00	12.64	H
2560.00	-28.24	3.64	45.98	6.21	20.31	33.00	12.69	H

LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-27.50	3.58	45.68	6.10	20.70	33.00	12.30	H
2535.00	-27.00	3.63	44.82	6.16	20.35	33.00	12.65	H
2567.50	-27.38	3.65	44.92	6.22	20.11	33.00	12.89	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-27.51	3.59	45.64	6.11	20.65	33.00	12.35	H
2535.00	-26.97	3.63	44.82	6.16	20.38	33.00	12.62	H
2565.00	-27.40	3.65	44.97	6.22	20.14	33.00	12.86	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-27.07	3.59	44.92	6.11	20.37	33.00	12.63	H
2535.00	-26.93	3.63	44.82	6.16	20.42	33.00	12.58	H
2562.50	-28.00	3.65	45.67	6.21	20.23	33.00	12.77	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-27.57	3.58	45.36	6.12	20.33	33.00	12.67	H
2535.00	-26.99	3.63	44.82	6.16	20.36	33.00	12.64	H
2560.00	-28.24	3.64	45.98	6.21	20.31	33.00	12.69	H

LTE Band 12 - ERP 27.50(c)(10)

Limits: $\leq 34.77\text{dBm}$ (3W)

LTE Band 12_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
699.70	-27.16	1.90	44.66	0.77	2.15	14.22	34.77	20.55	V
707.50	-27.55	1.91	44.94	0.62	2.15	13.95	34.77	20.82	V
715.30	-27.36	1.92	45.26	0.50	2.15	14.33	34.77	20.44	V

LTE Band 12_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
700.50	-27.10	1.90	44.68	0.76	2.15	14.29	34.77	20.48	V
707.50	-27.57	1.91	44.94	0.62	2.15	13.93	34.77	20.84	V
714.50	-27.38	1.92	45.26	0.50	2.15	14.31	34.77	20.46	V

LTE Band 12_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
701.50	-27.21	1.90	44.81	0.74	2.15	14.29	34.77	20.48	V
707.50	-27.57	1.91	44.94	0.62	2.15	13.93	34.77	20.84	V
713.50	-27.35	1.92	45.22	0.50	2.15	14.30	34.77	20.47	V

LTE Band 12_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
704.00	-27.30	1.91	44.93	0.70	2.15	14.27	34.77	20.50	H
707.50	-27.49	1.91	44.94	0.62	2.15	14.01	34.77	20.76	V
711.00	-27.48	1.92	45.19	0.53	2.15	14.17	34.77	20.60	V

LTE Band 12_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
699.70	-28.12	1.90	44.66	0.77	2.15	13.26	34.77	21.51	V
707.50	-28.33	1.91	44.94	0.62	2.15	13.17	34.77	21.60	V
715.30	-28.24	1.92	45.26	0.50	2.15	13.45	34.77	21.32	V

LTE Band 12_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
700.50	-28.18	1.90	44.68	0.76	2.15	13.21	34.77	21.56	V
707.50	-28.35	1.91	44.94	0.62	2.15	13.15	34.77	21.62	V
714.50	-28.33	1.92	45.26	0.50	2.15	13.36	34.77	21.41	V

LTE Band 12_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
701.50	-28.18	1.90	44.81	0.74	2.15	13.32	34.77	21.45	V
707.50	-28.42	1.91	44.94	0.62	2.15	13.08	34.77	21.69	V
713.50	-28.28	1.92	45.22	0.50	2.15	13.37	34.77	21.40	V

LTE Band 12_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
704.00	-28.31	1.91	44.93	0.70	2.15	13.26	34.77	21.51	H
707.50	-28.31	1.91	44.94	0.62	2.15	13.19	34.77	21.58	H
711.00	-28.31	1.92	45.19	0.53	2.15	13.34	34.77	21.43	V

LTE Band 38- EIRP Part 27.50(h)(2)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 38_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2572.50	-32.06	3.66	44.92	6.23	15.43	33.00	17.57	H
2595.00	-31.99	3.68	44.91	6.27	15.51	33.00	17.49	V
2617.50	-32.57	3.68	44.94	6.31	15.00	33.00	18.00	H

LTE Band 38_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2575.00	-32.11	3.66	44.92	6.23	15.38	33.00	17.62	H
2595.00	-32.00	3.68	44.91	6.27	15.50	33.00	17.50	V
2615.00	-32.49	3.68	44.94	6.31	15.08	33.00	17.92	H

LTE Band 38_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2577.50	-32.05	3.66	44.92	6.23	15.44	33.00	17.56	H
2595.00	-31.88	3.68	44.91	6.27	15.62	33.00	17.38	V
2612.50	-32.79	3.68	44.94	6.30	14.77	33.00	18.23	H

LTE Band 38_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2580.00	-32.28	3.67	44.92	6.24	15.21	33.00	17.79	H
2595.00	-32.03	3.68	44.91	6.27	15.47	33.00	17.53	V
2610.00	-33.13	3.68	44.94	6.30	14.43	33.00	18.57	H

LTE Band 38_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2572.50	-33.11	3.66	44.92	6.23	14.38	33.00	18.62	H
2595.00	-33.00	3.68	44.91	6.27	14.50	33.00	18.50	V
2617.50	-32.53	3.68	44.94	6.31	15.04	33.00	17.96	H

LTE Band 38_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2575.00	-33.10	3.66	44.92	6.23	14.39	33.00	18.61	H
2595.00	-33.05	3.68	44.91	6.27	14.45	33.00	18.55	V
2615.00	-33.33	3.68	44.94	6.31	14.24	33.00	18.76	H

LTE Band 38_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2577.50	-33.01	3.66	44.92	6.23	14.48	33.00	18.52	H
2595.00	-32.95	3.68	44.91	6.27	14.55	33.00	18.45	V
2612.50	-33.64	3.68	44.94	6.30	13.92	33.00	19.08	H

LTE Band 38_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2580.00	-33.21	3.67	44.92	6.24	14.28	33.00	18.72	H
2595.00	-33.08	3.68	44.91	6.27	14.42	33.00	18.58	V
2610.00	-34.05	3.68	44.94	6.30	13.51	33.00	19.49	H

Peak EIRP(dBm) = P_{Mea}(-21.34dBm) - G_a (-4.76dB) - P_{Ag} (-43.77dB) - P_{cl} (2.87dB) = 24.23dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 0.96 \text{ dB}$, $k = 2$.

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2 4 5 7 12 38.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

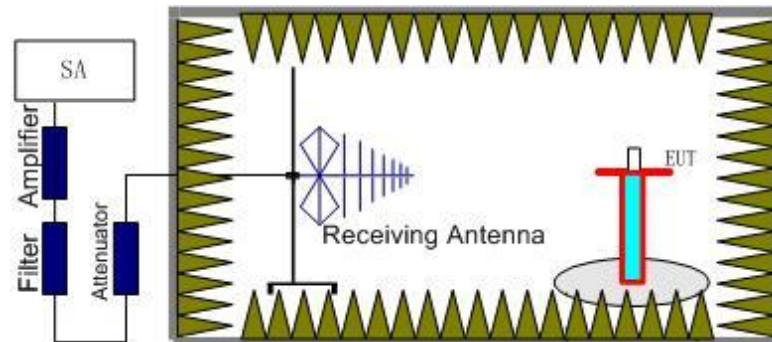

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

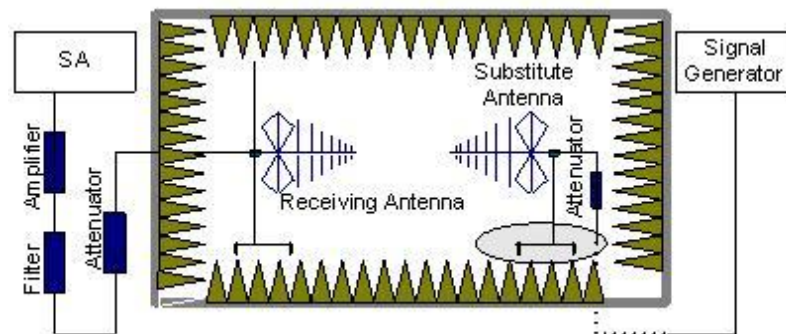

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log(P)$ dB below 2288 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz.

Part 90.691 states that out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed

from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2 4 5 7 12 38. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2 4 5 7 12 38 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency(MHz)	P _{Mea} (dB m)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3681.02	-56.13	6.47	8.45	-54.15	-13.00	41.15	H
5553.02	-45.60	7.18	10.59	-42.19	-13.00	29.19	H
7402.01	-55.02	8.12	12.08	-51.06	-13.00	38.06	V
9237.01	-54.33	9.01	13.24	-50.10	-13.00	37.10	H
11079.01	-52.12	9.87	13.18	-48.81	-13.00	35.81	V
12932.01	-49.59	10.49	13.46	-46.62	-13.00	33.62	H

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency(MHz)	P _{Mea} (dB m)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3760.02	-51.40	6.26	8.56	-49.10	-13.00	36.10	V
5645.02	-46.09	7.27	10.57	-42.79	-13.00	29.79	H
7565.01	-55.14	8.12	12.25	-51.01	-13.00	38.01	V
9446.01	-54.52	9.27	13.37	-50.42	-13.00	37.42	V
11247.01	-50.94	9.68	13.15	-47.47	-13.00	34.47	H
13167.01	-48.04	10.64	13.73	-44.95	-13.00	31.95	V

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency(MHz)	P _{Mea} (dB m)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3819.02	-54.68	6.08	8.65	-52.11	-13.00	39.11	H
5732.02	-42.86	7.29	10.55	-39.60	-13.00	26.60	H
7643.01	-51.75	8.17	12.31	-47.61	-13.00	34.61	V
9575.01	-54.19	9.27	13.32	-50.14	-13.00	37.14	H
11472.01	-51.07	9.88	13.11	-47.84	-13.00	34.84	H
13392.01	-47.91	10.57	14.05	-44.43	-13.00	31.43	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3702.02	-55.33	6.42	8.48	-53.27	-13.00	40.27	H
5558.02	-49.45	7.19	10.59	-46.05	-13.00	33.05	H
7429.01	-55.41	8.20	12.11	-51.50	-13.00	38.50	H
9224.01	-55.10	8.98	13.23	-50.85	-13.00	37.85	H
11149.01	-51.20	9.62	13.17	-47.65	-13.00	34.65	V
13002.01	-48.81	10.48	13.50	-45.79	-13.00	32.79	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3760.02	-51.65	6.26	8.56	-49.35	-13.00	36.35	V
5643.02	-45.26	7.27	10.57	-41.96	-13.00	28.96	H
7523.01	-55.05	8.30	12.22	-51.13	-13.00	38.13	H
9449.01	-54.30	9.28	13.37	-50.21	-13.00	37.21	H
11279.01	-51.55	9.87	13.14	-48.28	-13.00	35.28	H
13114.01	-47.36	10.87	13.66	-44.57	-13.00	31.57	V

LTE Band 2, 1.4MHz, 16QAM, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3819.02	-54.68	6.08	8.65	-52.11	-13.00	39.11	H
5730.02	-43.15	7.29	10.55	-39.89	-13.00	26.89	H
7639.01	-53.06	8.15	12.31	-48.90	-13.00	35.90	V
9544.01	-53.77	9.38	13.36	-49.79	-13.00	36.79	V
11487.01	-50.99	9.84	13.10	-47.73	-13.00	34.73	V
13341.01	-48.53	10.57	13.98	-45.12	-13.00	32.12	V

LTE Band 4, 1.4MHz QPSK, Channel 19957

Frequency(MHz)	P _{Mea} (dB m)	Path Loss	Antenn a Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarizatio n
3447.02	-57.84	5.42	8.07	-55.19	-13.00	42.19	H
5133.02	-51.32	6.86	10.09	-48.09	-13.00	35.09	V
6844.01	-48.14	7.83	11.41	-44.56	-13.00	31.56	V
8593.01	-54.99	8.51	13.02	-50.48	-13.00	37.48	H
10225.01	-52.67	9.39	12.99	-49.07	-13.00	36.07	H
12017.01	-49.42	10.10	13.01	-46.51	-13.00	33.51	H

LTE Band 4, 1.4MHz, QPSK, Channel 20175

Frequency(MHz)	P _{Mea} (dB m)	Path Loss	Antenn a Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarizatio n
3465.02	-56.41	5.46	8.12	-53.75	-13.00	40.75	H
5202.02	-50.86	6.96	10.18	-47.64	-13.00	34.64	H
6912.01	-52.11	7.74	11.49	-48.36	-13.00	35.36	H
8674.01	-55.00	8.39	13.03	-50.36	-13.00	37.36	H
10361.01	-51.59	9.74	13.04	-48.29	-13.00	35.29	H
12140.01	-49.01	10.23	13.06	-46.18	-13.00	33.18	V

LTE Band 4, 1.4MHz, QPSK, Channel 20393

Frequency(MHz)	P _{Mea} (dB m)	Path Loss	Antenn a Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarizatio n
3492.02	-57.47	5.51	8.18	-54.80	-13.00	41.80	H
5263.02	-47.52	6.99	10.27	-44.24	-13.00	31.24	V
7019.01	-51.85	8.27	11.62	-48.50	-13.00	35.50	V
8736.01	-54.64	8.47	13.05	-50.06	-13.00	37.06	H
10533.01	-51.13	9.53	13.11	-47.55	-13.00	34.55	V
12271.01	-49.64	10.01	13.11	-46.54	-13.00	33.54	H

LTE Band 4, 1.4MHz, 16QAM, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422.02	-57.09	5.38	8.01	-54.46	-13.00	41.46	H
5133.02	-51.56	6.86	10.09	-48.33	-13.00	35.33	H
6843.01	-45.43	7.83	11.41	-41.85	-13.00	28.85	V
8552.01	-55.38	8.58	13.01	-50.95	-13.00	37.95	H
10306.01	-52.44	9.65	13.02	-49.07	-13.00	36.07	H
12005.01	-50.41	10.07	13.00	-47.48	-13.00	34.48	V

LTE Band 4, 1.4MHz, 16QAM, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3465.02	-57.31	5.46	8.12	-54.65	-13.00	41.65	H
5199.02	-50.81	6.96	10.18	-47.59	-13.00	34.59	H
6960.01	-55.44	7.99	11.55	-51.88	-13.00	38.88	V
8650.01	-55.06	8.43	13.03	-50.46	-13.00	37.46	H
10390.01	-51.62	9.79	13.06	-48.35	-13.00	35.35	V
12170.01	-49.48	10.15	13.07	-46.56	-13.00	33.56	H

LTE Band 4, 1.4MHz, 16QAM, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3471.02	-57.32	5.47	8.13	-54.66	-13.00	41.66	H
5265.02	-48.88	6.99	10.27	-45.60	-13.00	32.60	H
7020.01	-49.66	8.27	11.62	-46.31	-13.00	33.31	H
8782.01	-55.06	8.61	13.06	-50.61	-13.00	37.61	V
10513.01	-50.80	9.60	13.10	-47.30	-13.00	34.30	H
12274.01	-49.85	10.01	13.11	-46.75	-13.00	33.75	V

LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1656.01	-59.35	3.57	5.22	2.15	-59.85	-13.00	46.85	H
2474.00	-51.95	4.60	6.02	2.15	-52.68	-13.00	39.68	V
3299.02	-51.63	5.29	7.72	2.15	-51.35	-13.00	38.35	H
4124.02	-52.14	6.04	9.02	2.15	-51.31	-13.00	38.31	H
4948.01	-54.97	6.69	9.85	2.15	-53.96	-13.00	40.96	H
5775.01	-54.21	7.23	10.54	2.15	-53.05	-13.00	40.05	H

LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-59.34	3.58	5.19	2.15	-59.88	-13.00	46.88	V
2522.00	-51.86	4.65	6.14	2.15	-52.52	-13.00	39.52	H
3354.02	-53.86	5.32	7.85	2.15	-53.48	-13.00	40.48	H
4172.02	-55.63	6.14	9.07	2.15	-54.85	-13.00	41.85	V
5004.01	-55.65	6.60	9.91	2.15	-54.49	-13.00	41.49	H
5846.01	-54.49	7.22	10.53	2.15	-53.33	-13.00	40.33	V

LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1689.01	-59.58	3.59	5.16	2.15	-60.16	-13.00	47.16	H
2545.00	-50.38	4.66	6.18	2.15	-51.01	-13.00	38.01	V
3393.02	-53.72	5.36	7.94	2.15	-53.29	-13.00	40.29	H
4242.02	-53.36	6.25	9.14	2.15	-52.62	-13.00	39.62	H
5093.01	-55.94	6.75	10.03	2.15	-54.81	-13.00	41.81	H
5939.01	-51.53	7.47	10.51	2.15	-50.64	-13.00	37.64	H

LTE Band 5, 1.4MHz, 16QAM, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1656.01	-59.67	3.57	5.22	2.15	-60.17	-13.00	47.17	H
2474.00	-52.99	4.60	6.02	2.15	-53.72	-13.00	40.72	V
3299.02	-53.30	5.29	7.72	2.15	-53.02	-13.00	40.02	H
4124.02	-53.56	6.04	9.02	2.15	-52.73	-13.00	39.73	H
4963.01	-55.75	6.67	9.86	2.15	-54.71	-13.00	41.71	H
5787.01	-54.78	7.21	10.54	2.15	-53.60	-13.00	40.60	V

LTE Band 5, 1.4MHz, 16QAM, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-59.65	3.58	5.19	2.15	-60.19	-13.00	47.19	V
2510.00	-49.54	4.63	6.12	2.15	-50.20	-13.00	37.20	V
3346.02	-53.51	5.31	7.83	2.15	-53.14	-13.00	40.14	H
4182.02	-55.53	6.17	9.08	2.15	-54.77	-13.00	41.77	H
5014.01	-55.34	6.58	9.92	2.15	-54.15	-13.00	41.15	V
5861.01	-53.30	7.27	10.53	2.15	-52.19	-13.00	39.19	V

LTE Band 5, 1.4MHz, 16QAM, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1711.01	-59.90	3.61	5.12	2.15	-60.54	-13.00	47.54	H
2545.00	-52.23	4.66	6.18	2.15	-52.86	-13.00	39.86	V
3393.02	-54.99	5.36	7.94	2.15	-54.56	-13.00	41.56	H
4242.02	-56.30	6.25	9.14	2.15	-55.56	-13.00	42.56	H
5099.01	-55.86	6.77	10.04	2.15	-54.74	-13.00	41.74	H
5941.01	-52.46	7.47	10.51	2.15	-51.57	-13.00	38.57	H

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5008.02	-53.63	6.59	9.91	-50.31	-13.00	37.31	V
7511.01	-50.28	8.35	12.21	-46.42	-13.00	33.42	V
10001.01	-53.55	9.18	12.90	-49.83	-13.00	36.83	V
12502.01	-49.69	10.18	13.20	-46.67	-13.00	33.67	V
15024.00	-45.67	11.25	13.99	-42.93	-13.00	29.93	H
17519.00	-43.19	12.80	14.93	-41.06	-13.00	28.06	H

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5071.02	-53.35	6.69	10.00	-50.04	-13.00	37.04	V
7606.01	-51.65	8.00	12.28	-47.37	-13.00	34.37	V
10126.01	-52.39	9.42	12.95	-48.86	-13.00	35.86	H
12683.01	-49.61	10.33	13.31	-46.63	-13.00	33.63	H
15190.00	-46.72	11.39	13.89	-44.22	-13.00	31.22	V
17745.00	-43.96	12.43	15.24	-41.15	-13.00	28.15	H

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5137.02	-55.39	6.86	10.09	-52.16	-13.00	39.16	V
7705.01	-52.84	8.42	12.36	-48.90	-13.00	35.90	H
10274.01	-52.80	9.55	13.01	-49.34	-13.00	36.34	H
12845.01	-47.62	10.65	13.41	-44.86	-13.00	31.86	V
15411.00	-46.32	11.41	13.75	-43.98	-13.00	30.98	V
17971.00	-44.51	12.89	15.56	-41.84	-13.00	28.84	V

LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5007.02	-56.14	6.59	9.91	-52.82	-13.00	39.82	V
7514.01	-55.17	8.34	12.21	-51.30	-13.00	38.30	H
10029.01	-53.11	9.26	12.91	-49.46	-13.00	36.46	V
12518.01	-49.89	10.23	13.21	-46.91	-13.00	33.91	H
15020.00	-45.36	11.24	13.99	-42.61	-13.00	29.61	V
17512.00	-44.23	12.77	14.92	-42.08	-13.00	29.08	H

LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5072.02	-53.76	6.69	10.00	-50.45	-13.00	37.45	V
7607.01	-52.92	8.00	12.29	-48.63	-13.00	35.63	V
10150.01	-52.00	9.38	12.96	-48.42	-13.00	35.42	H
12690.01	-49.14	10.31	13.31	-46.14	-13.00	33.14	V
15228.00	-46.67	11.37	13.86	-44.18	-13.00	31.18	H
17735.00	-44.00	12.38	15.23	-41.15	-13.00	28.15	V

LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5135.02	-56.85	6.86	10.09	-53.62	-13.00	40.62	V
7703.01	-52.96	8.42	12.36	-49.02	-13.00	36.02	H
10257.01	-53.50	9.50	13.00	-50.00	-13.00	37.00	H
12837.01	-46.55	10.67	13.40	-43.82	-13.00	30.82	V
15388.00	-46.29	11.38	13.77	-43.90	-13.00	30.90	H
17971.00	-44.70	12.89	15.56	-42.03	-13.00	29.03	V

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1399.01	-58.32	3.23	4.97	2.15	-58.73	-13.00	45.73	V
2107.00	-56.31	4.20	4.92	2.15	-57.74	-13.00	44.74	H
2784.00	-52.18	4.89	6.61	2.15	-52.61	-13.00	39.61	H
3484.02	-56.21	5.49	8.16	2.15	-55.69	-13.00	42.69	H
4190.02	-55.32	6.18	9.09	2.15	-54.56	-13.00	41.56	V
4887.01	-56.06	6.73	9.79	2.15	-55.15	-13.00	42.15	V

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1415.01	-57.99	3.25	5.06	2.15	-58.33	-13.00	45.33	H
2123.00	-53.62	4.21	4.97	2.15	-55.01	-13.00	42.01	H
2844.00	-52.68	4.96	6.72	2.15	-53.07	-13.00	40.07	H
3526.02	-56.26	5.58	8.24	2.15	-55.75	-13.00	42.75	H
4250.02	-55.35	6.24	9.15	2.15	-54.59	-13.00	41.59	H
4967.01	-55.11	6.66	9.87	2.15	-54.05	-13.00	41.05	V

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1431.01	-59.69	3.28	5.14	2.15	-59.98	-13.00	46.98	H
2146.00	-55.67	4.24	5.04	2.15	-57.02	-13.00	44.02	H
2863.00	-52.57	4.96	6.75	2.15	-52.93	-13.00	39.93	V
3585.02	-56.10	6.18	8.32	2.15	-56.11	-13.00	43.11	V
4294.02	-54.48	6.20	9.19	2.15	-53.64	-13.00	40.64	H
5006.01	-55.49	6.59	9.91	2.15	-54.32	-13.00	41.32	V

LTE Band 12, 1.4MHz, 16QAM, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1400.01	-57.68	3.24	4.98	2.15	-58.09	-13.00	45.09	V
2114.00	-55.80	4.20	4.94	2.15	-57.21	-13.00	44.21	V
2810.00	-52.85	4.93	6.66	2.15	-53.27	-13.00	40.27	V
3490.02	-56.64	5.50	8.18	2.15	-56.11	-13.00	43.11	H
4187.02	-56.13	6.18	9.09	2.15	-55.37	-13.00	42.37	V
4904.01	-55.42	6.73	9.80	2.15	-54.50	-13.00	41.50	H

LTE Band 12, 1.4MHz 16QAM, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1415.01	-60.46	3.25	5.06	2.15	-60.80	-13.00	47.80	V
2134.00	-55.57	4.23	5.00	2.15	-56.95	-13.00	43.95	V
2829.00	-52.98	4.95	6.69	2.15	-53.39	-13.00	40.39	V
3541.02	-56.27	5.73	8.26	2.15	-55.89	-13.00	42.89	V
4258.02	-55.76	6.23	9.16	2.15	-54.98	-13.00	41.98	H
4967.01	-56.09	6.66	9.87	2.15	-55.03	-13.00	42.03	H

LTE Band 12, 1.4MHz, 16QAM, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1441.01	-61.05	3.29	5.19	2.15	-61.30	-13.00	48.30	H
2153.00	-55.41	4.25	5.06	2.15	-56.75	-13.00	43.75	V
2855.00	-52.28	4.96	6.74	2.15	-52.65	-13.00	39.65	H
3575.02	-55.75	6.08	8.31	2.15	-55.67	-13.00	42.67	V
4302.02	-55.54	6.19	9.20	2.15	-54.68	-13.00	41.68	V
5020.01	-56.07	6.57	9.93	2.15	-54.86	-13.00	41.86	H

LTE Band 38, 5MHz, QPSK, Channel 37775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5147.02	-41.33	6.88	10.11	-38.10	-13.00	25.10	V
7717.01	-54.98	8.40	12.37	-51.01	-13.00	38.01	H
10294.01	-51.80	9.62	13.02	-48.40	-13.00	35.40	H
12862.01	-49.71	10.61	13.42	-46.90	-13.00	33.90	V
15433.00	-45.81	11.44	13.74	-43.51	-13.00	30.51	V
16725.00	-43.84	11.82	13.69	-41.97	-13.00	28.97	V

LTE Band 38, 5MHz, QPSK, Channel 38000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5193.02	-46.69	6.95	10.17	-43.47	-13.00	30.47	V
7787.01	-51.30	8.31	12.43	-47.18	-13.00	34.18	V
10377.01	-51.72	9.76	13.05	-48.43	-13.00	35.43	H
12984.01	-48.20	10.47	13.49	-45.18	-13.00	32.18	V
15576.00	-46.05	11.50	13.70	-43.85	-13.00	30.85	V
16860.00	-42.25	12.04	13.74	-40.55	-13.00	27.55	V

LTE Band 38, 5MHz, QPSK, Channel 38225

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5235.02	-40.20	7.00	10.23	-36.97	-13.00	23.97	V
7853.01	-55.34	8.36	12.48	-51.22	-13.00	38.22	V
10468.01	-52.42	9.70	13.09	-49.03	-13.00	36.03	V
13093.01	-47.76	10.90	13.63	-45.03	-13.00	32.03	V
15709.00	-47.03	11.61	13.70	-44.94	-13.00	31.94	V
17016.00	-42.86	12.42	13.84	-41.44	-13.00	28.44	H

LTE Band 38, 5MHz, 16QAM, Channel 37775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5146.02	-41.29	6.88	10.10	-38.07	-13.00	25.07	V
7719.01	-54.06	8.40	12.38	-50.08	-13.00	37.08	V
10304.01	-52.87	9.65	13.02	-49.50	-13.00	36.50	V
12873.01	-49.26	10.58	13.42	-46.42	-13.00	33.42	H
15438.00	-45.25	11.45	13.74	-42.96	-13.00	29.96	V
16737.00	-42.76	11.87	13.69	-40.94	-13.00	27.94	H

LTE Band 38, 5MHz, 16QAM, Channel 38000

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5189.02	-41.10	6.94	10.16	-37.88	-13.00	24.88	V
7785.01	-51.05	8.31	12.43	-46.93	-13.00	33.93	V
10386.01	-52.04	9.78	13.05	-48.77	-13.00	35.77	V
12980.01	-49.19	10.47	13.49	-46.17	-13.00	33.17	H
15567.00	-45.45	11.50	13.70	-43.25	-13.00	30.25	V
16862.00	-43.05	12.04	13.74	-41.35	-13.00	28.35	H

LTE Band 38, 5MHz, 16QAM, Channel 38225

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5237.02	-42.01	7.00	10.23	-38.78	-13.00	25.78	V
7854.01	-54.94	8.36	12.48	-50.82	-13.00	37.82	H
10472.01	-52.22	9.69	13.09	-48.82	-13.00	35.82	H
13091.01	-48.84	10.89	13.63	-46.10	-13.00	33.10	V
15711.00	-47.41	11.61	13.70	-45.32	-13.00	32.32	V
17013.00	-43.36	12.41	13.83	-41.94	-13.00	28.94	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2 \text{ dB}$, $k = 2$.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2 4 5 7 12 38, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.35VDC, with a nominal voltage of 3.85VDC.

A.3.2.2 For equipment powered by primary supply voltage

The frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.3.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	2.82	5.08	0.001	0.003
3.8	-4.31	8.60	0.002	0.005
4.2	-2.50	9.40	0.001	0.005

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-0.74	11.17	0.000	0.006
40	3.30	11.47	0.002	0.006
30	0.39	10.03	0.000	0.005
20	2.25	9.87	0.001	0.005
10	4.69	7.54	0.002	0.004
0	3.15	10.14	0.002	0.005
- 10	0.93	6.58	0.000	0.004

LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	2.37	-4.95	0.001	0.005
3.8	-7.20	-11.22	0.004	0.007
4.2	4.98	-8.45	0.003	0.006

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	5.38	-12.20	0.003	0.008
40	3.53	-10.31	0.002	0.005
30	2.86	-11.72	0.002	0.006
20	4.56	-12.09	0.003	0.006
10	3.55	-8.01	0.002	0.005
0	1.65	-9.30	0.001	0.006
- 10	0.46	-8.35	0.000	0.007

LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	0.89	-7.32	0.001	0.009
3.8	-1.95	-9.46	0.002	0.011
4.2	-3.65	-6.27	0.004	0.007

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-0.09	-9.14	0.000	0.011
40	0.63	-6.98	0.001	0.008
30	2.39	-7.20	0.003	0.009
20	0.39	-8.18	0.000	0.010
10	2.06	-8.15	0.002	0.010
0	1.92	-6.02	0.002	0.007
- 10	0.89	-6.38	0.001	0.008

LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	2.32	11.03	0.001	0.004
3.8	2.40	10.70	0.001	0.004
4.2	0.62	17.11	0.000	0.007

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	11.16	9.78	0.004	0.004
40	7.38	11.40	0.003	0.004
30	11.33	7.05	0.004	0.003
20	4.98	9.64	0.002	0.004
10	-0.44	10.90	0.000	0.004
0	-2.05	11.50	0.001	0.005
- 10	1.76	13.18	0.001	0.005

LTE Band 12, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	-0.06	-0.92	0.000	0.001
3.8	-4.13	-3.38	0.006	0.005
4.2	-0.09	-3.25	0.000	0.005

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-1.89	-1.69	0.003	0.002
40	-0.63	-5.36	0.001	0.008
30	0.33	-3.43	0.000	0.005
20	-3.32	-4.71	0.005	0.007
10	1.70	-2.70	0.002	0.004
0	-2.19	-4.73	0.003	0.007
- 10	-1.65	-5.65	0.002	0.008

LTE Band 38, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	2.35	-3.32	0.001	0.001
3.8	-3.59	-3.20	0.002	0.001
4.2	-0.21	3.60	0.000	0.002

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	2.85	-5.02	0.001	0.002
40	4.08	-4.69	0.002	0.002
30	7.42	-7.81	0.003	0.003
20	4.46	-5.75	0.002	0.002
10	-3.65	2.43	0.002	0.001
0	-0.94	-1.77	0.000	0.001
- 10	3.19	-10.26	0.001	0.004

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.4 OCCUPIED BANDWIDTH

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 2, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	1089.74	1089.74

LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)

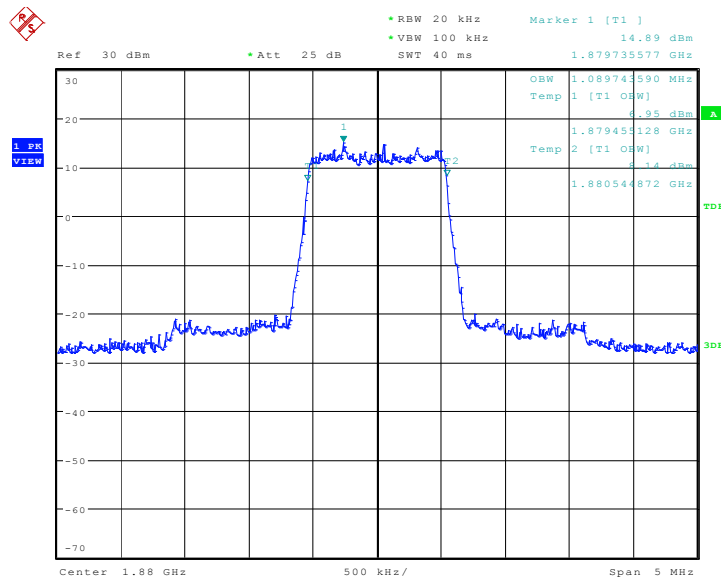

Date: 24.APR.2018 18:13:02

LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)

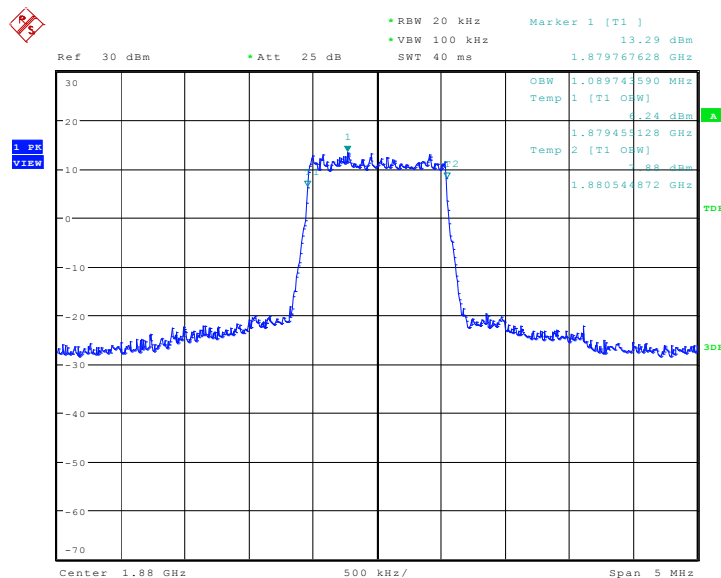


Date: 24.APR.2018 18:13:17

LTE band 2, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	2692.31	2692.31

LTE band 2, 3MHz Bandwidth, QPSK (99% BW)

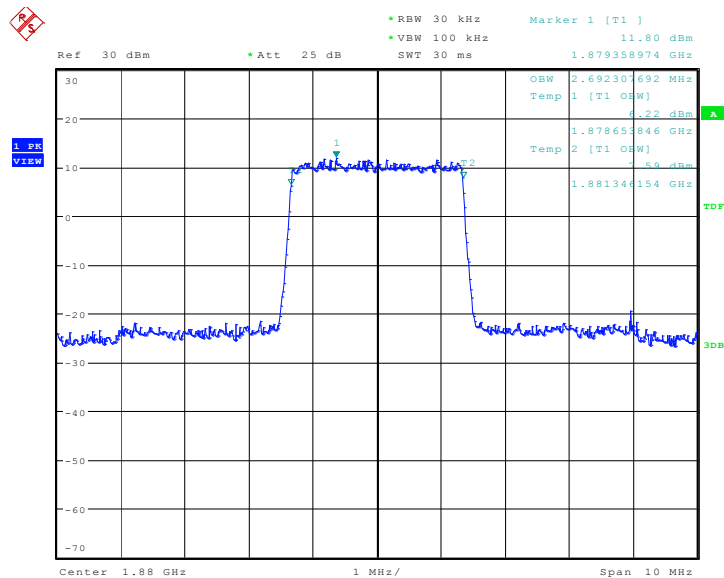

Date: 24.APR.2018 18:20:01

LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)

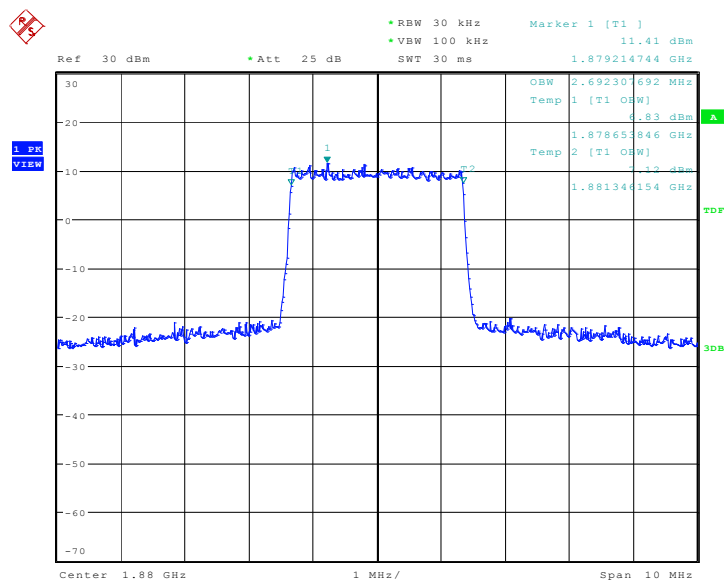


Date: 24.APR.2018 18:20:15

LTE band 2, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	4495.19	4495.19

LTE band 2, 5MHz Bandwidth, QPSK (99% BW)

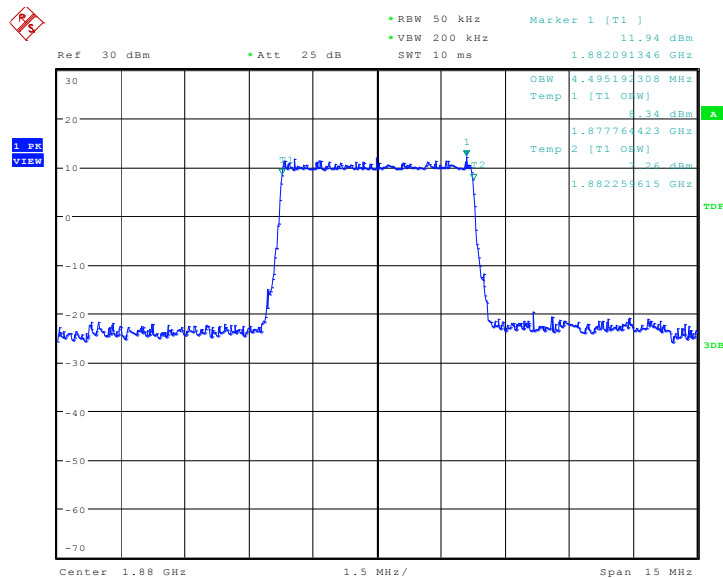

Date: 24.APR.2018 18:27:00

LTE band 2, 5MHz Bandwidth, 16QAM (99% BW)

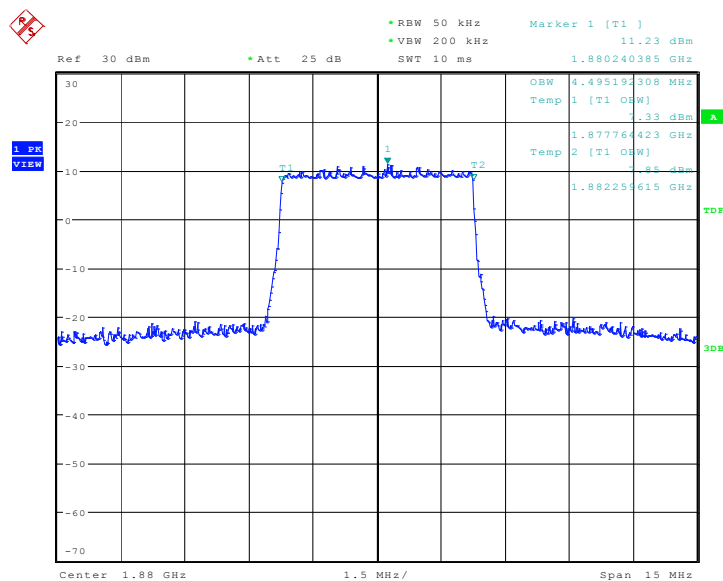


Date: 24.APR.2018 18:27:15

LTE band 2, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	9038.46	9038.46

LTE band 2, 10MHz Bandwidth, QPSK (99% BW)

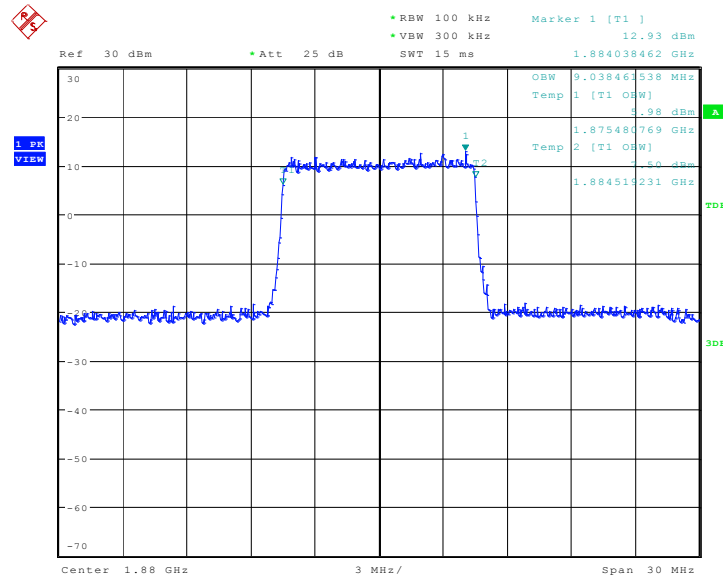

Date: 24.APR.2018 18:33:59

LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)

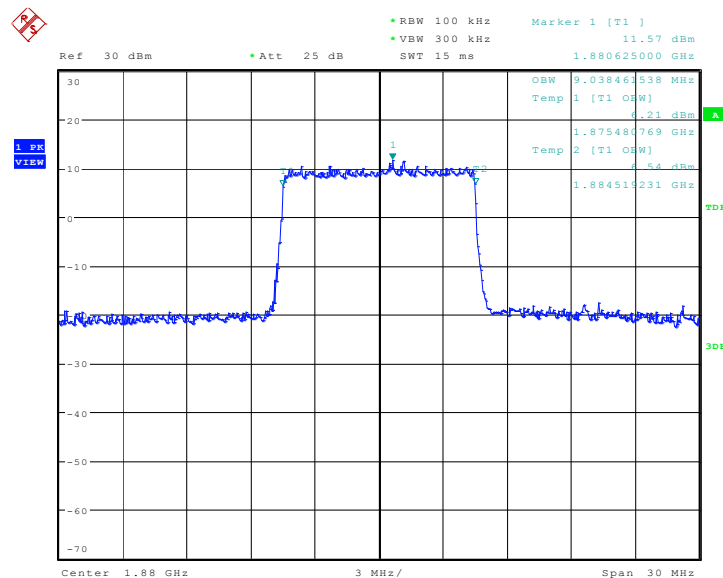


Date: 24.APR.2018 18:34:14

LTE band 2, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	13485.58	13485.58

LTE band 2, 15MHz Bandwidth, QPSK (99% BW)

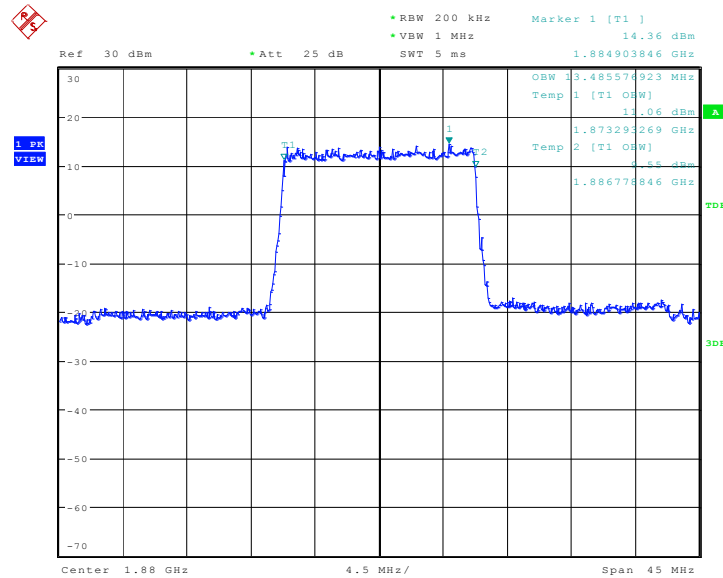

Date: 24.APR.2018 18:41:36

LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)

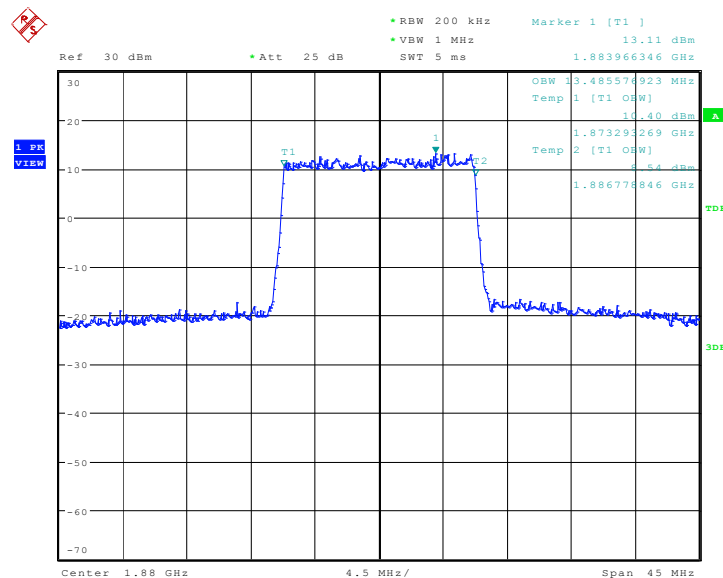


Date: 24.APR.2018 18:41:51

LTE band 2, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	17980.77	17980.77

LTE band 2, 20MHz Bandwidth, QPSK (99% BW)

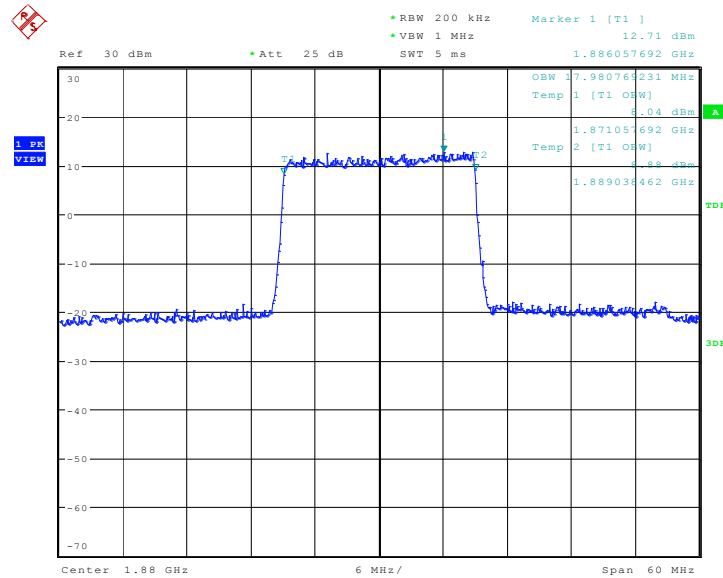

Date: 24.APR.2018 18:49:16

LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)

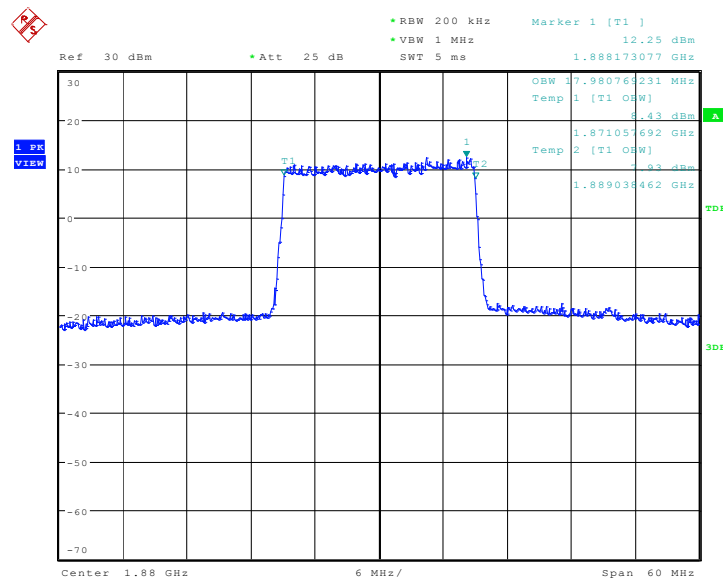


Date: 24.APR.2018 18:49:31

LTE band 4, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	1089.74	1089.74

LTE band 4, 1.4MHz Bandwidth, QPSK (99% BW)

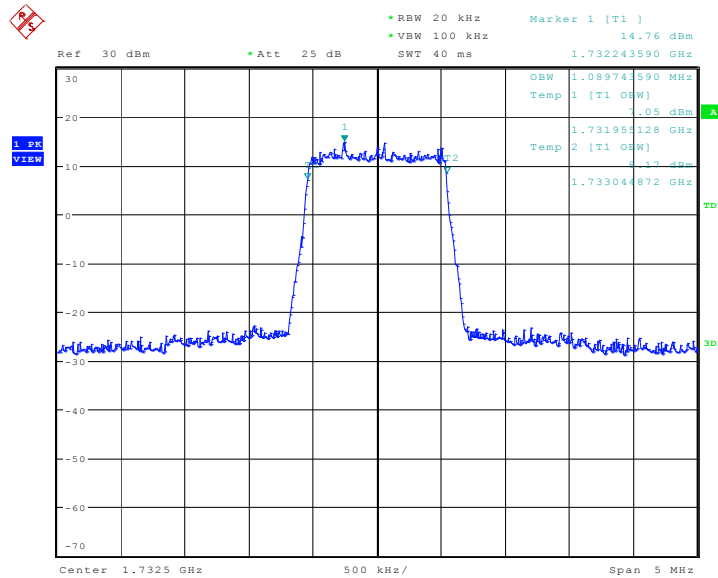

Date: 24.APR.2018 18:56:21

LTE band 4, 1.4MHz Bandwidth, 16QAM (99% BW)

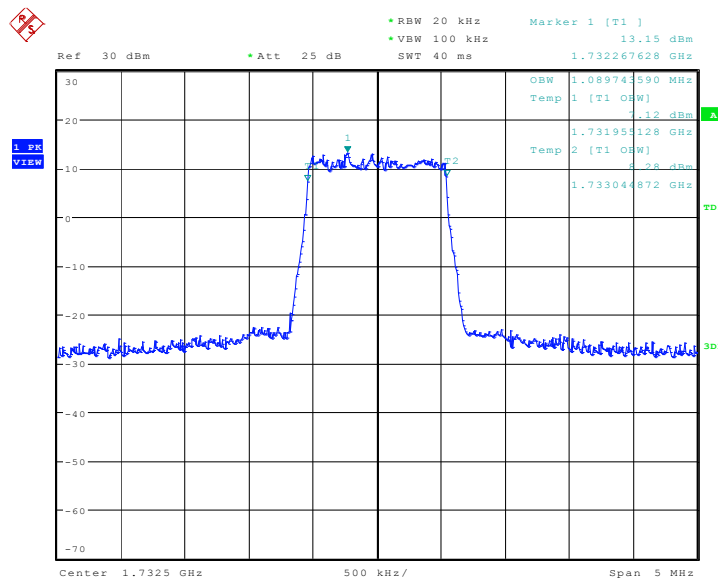


Date: 24.APR.2018 18:56:36

LTE band 4, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	2692.31	2692.31

LTE band 4, 3MHz Bandwidth, QPSK (99% BW)

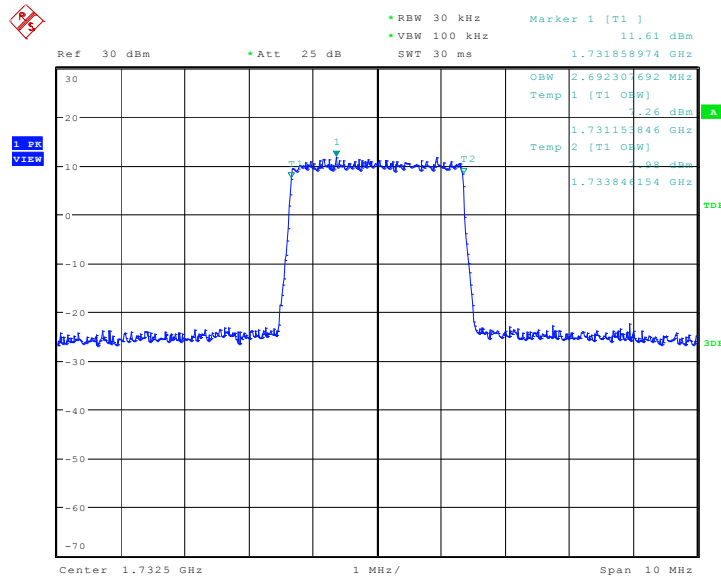

Date: 24.APR.2018 19:03:19

LTE band 4, 3MHz Bandwidth, 16QAM (99% BW)

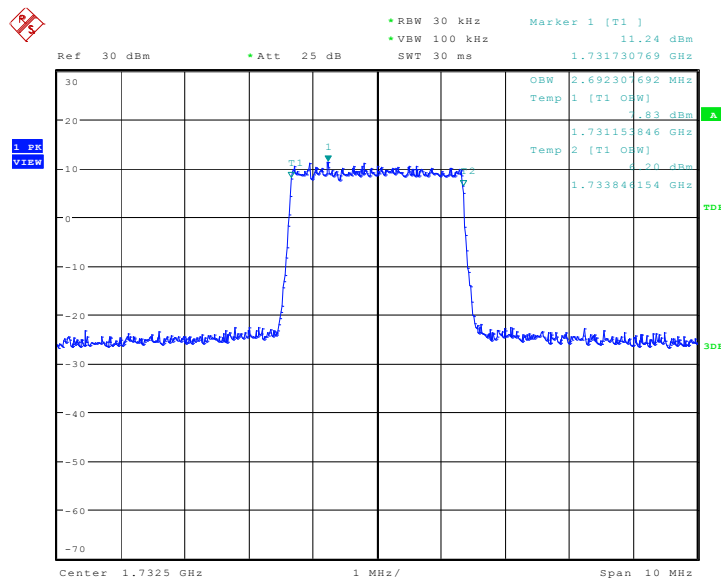


Date: 24.APR.2018 19:03:34

LTE band 4, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	4495.19	4495.19

LTE band 4, 5MHz Bandwidth, QPSK (99% BW)

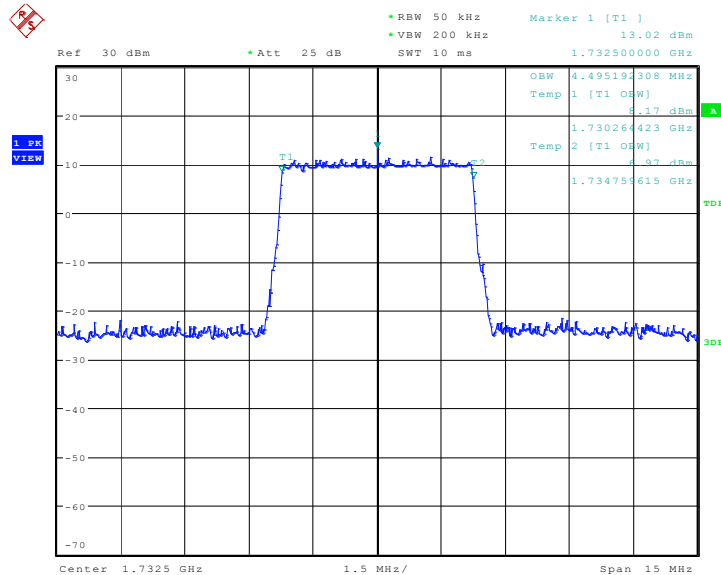

Date: 24.APR.2018 19:10:19

LTE band 4, 5MHz Bandwidth,16QAM (99% BW)

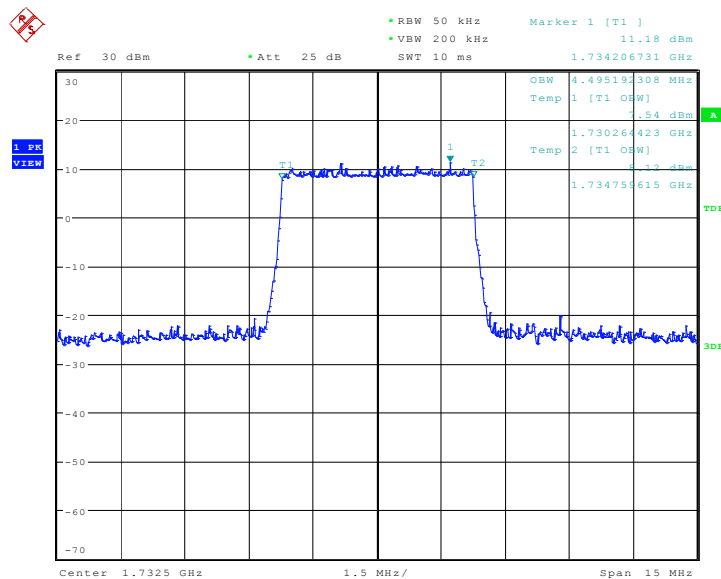


Date: 24.APR.2018 19:10:34

LTE band 4, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	8990.38	9038.46

LTE band 4, 10MHz Bandwidth, QPSK (99% BW)

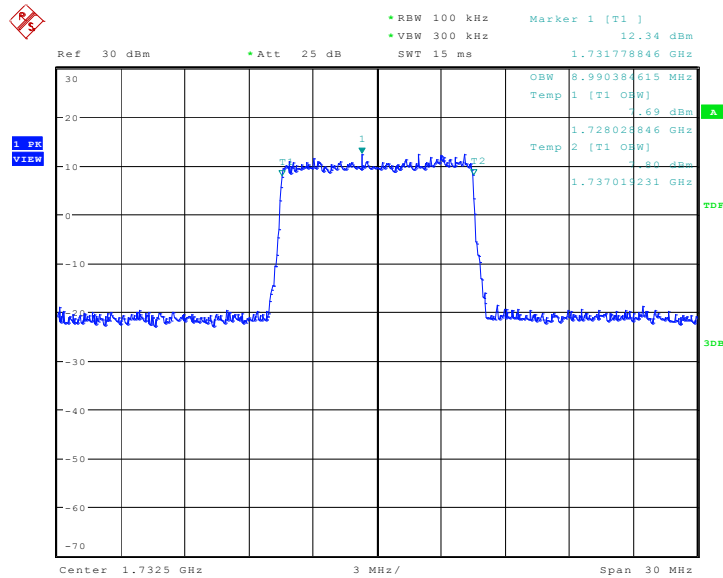

Date: 24.APR.2018 19:17:18

LTE band 4, 10MHz Bandwidth, 16QAM (99% BW)

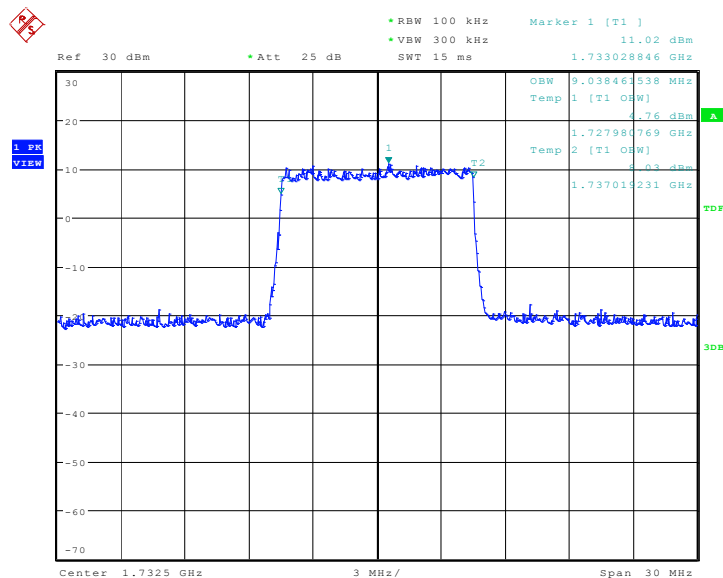


Date: 24.APR.2018 19:17:33

LTE band 4, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	13557.69	13557.69

LTE band 4, 15MHz Bandwidth, QPSK (99% BW)

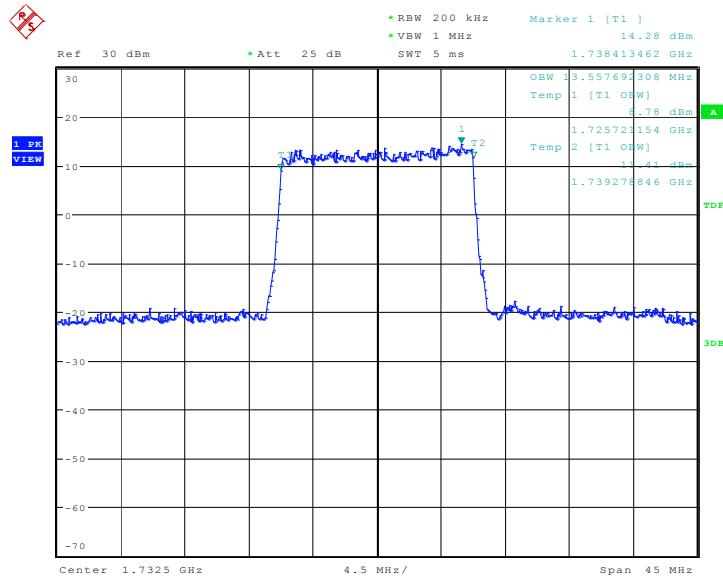

Date: 24.APR.2018 19:24:55

LTE band 4, 15MHz Bandwidth, 16QAM (99% BW)

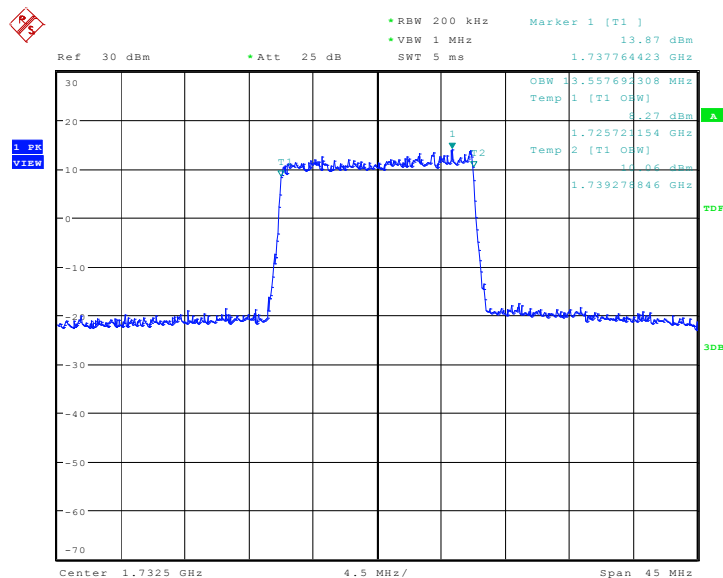


Date: 24.APR.2018 19:25:10

LTE band 4, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	17980.77	17980.77

LTE band 4, 20MHz Bandwidth, QPSK (99% BW)

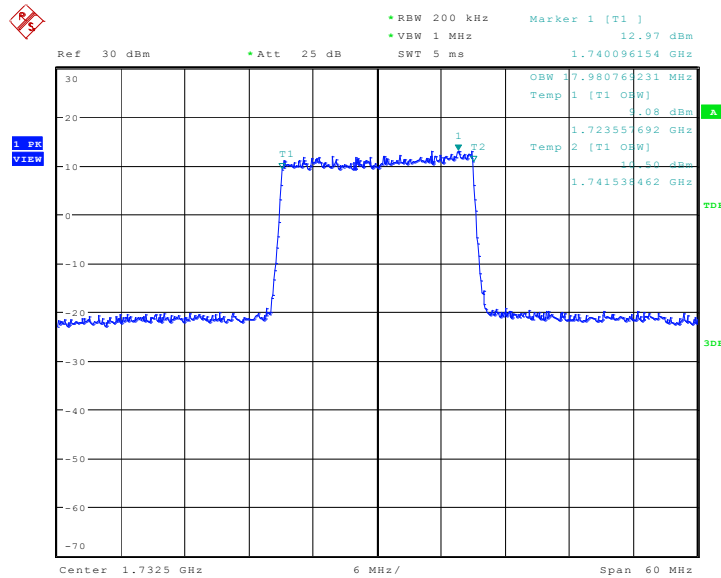

Date: 24.APR.2018 19:32:36

LTE band 4, 20MHz Bandwidth, 16QAM (99% BW)

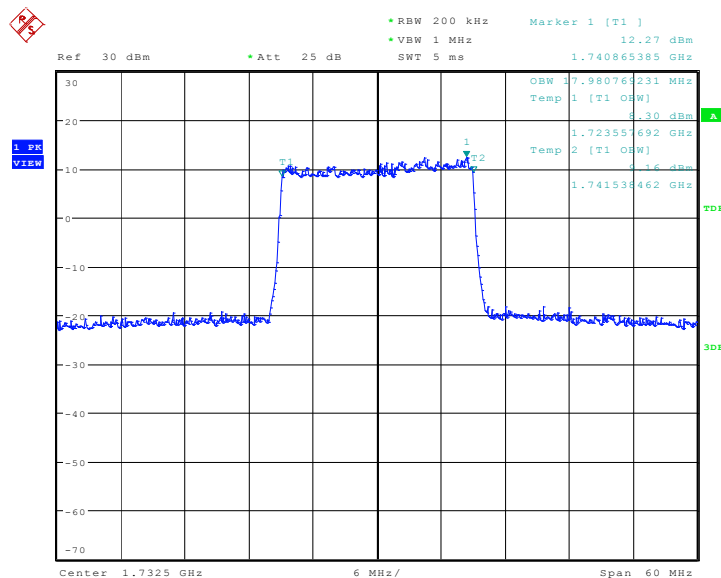


Date: 24.APR.2018 19:32:51

LTE band 5, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	1089.74	1089.74

LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

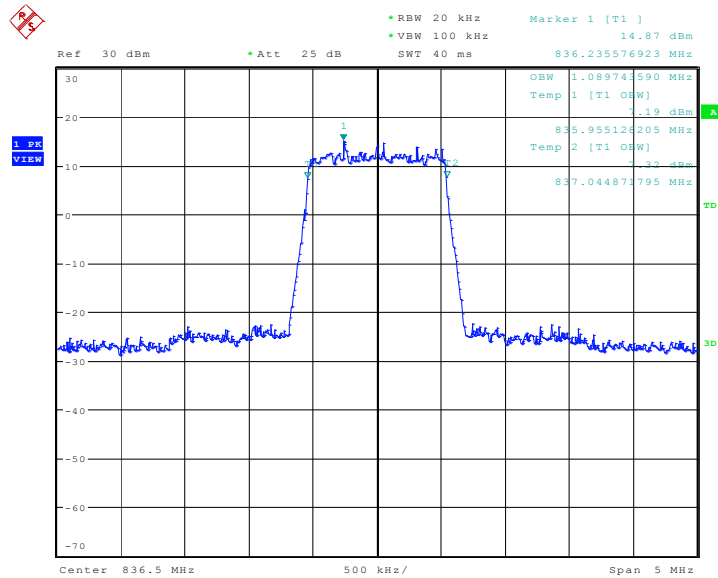

Date: 24.APR.2018 17:44:58

LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)

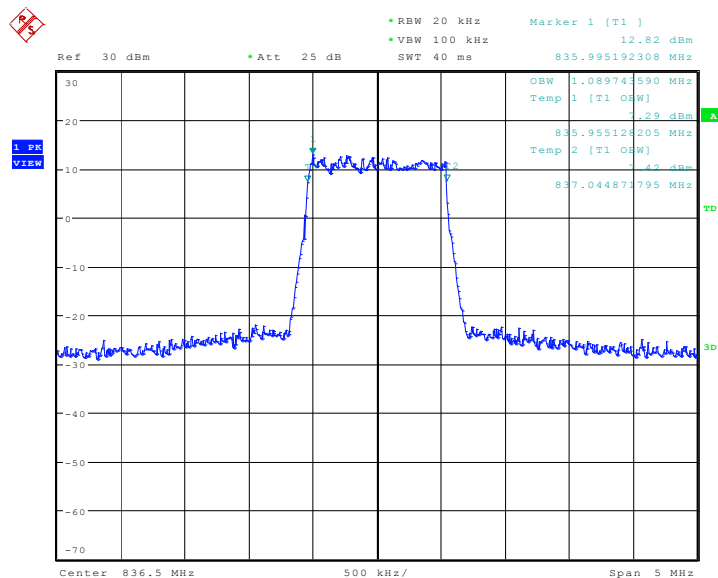


Date: 24.APR.2018 17:45:13

LTE band 5, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	2692.31	2692.31

LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

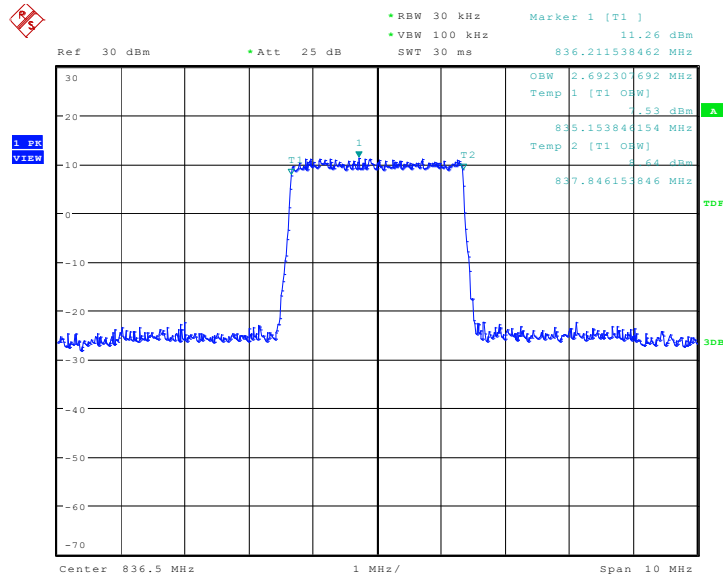

Date: 24.APR.2018 17:51:57

LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)

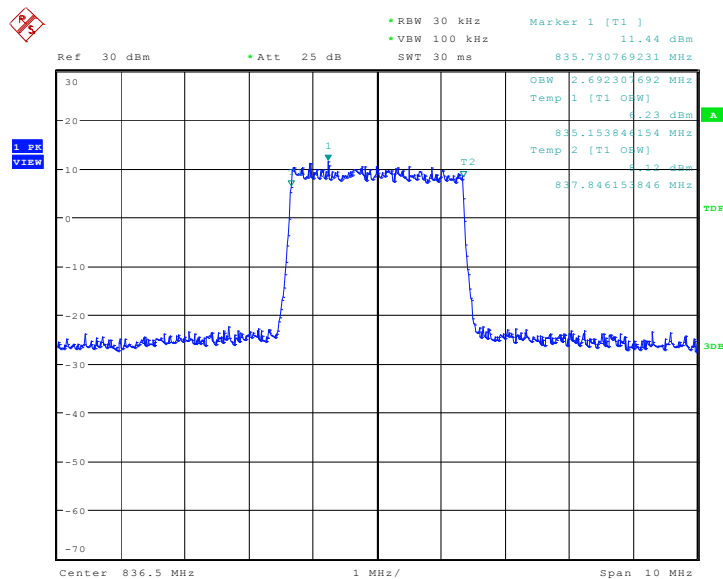


Date: 24.APR.2018 17:52:12

LTE band 5, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	4495.19	4495.19

LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

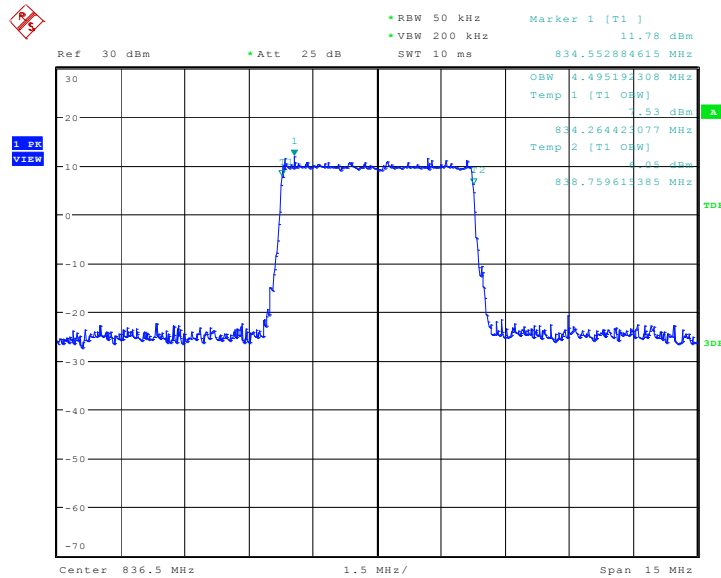

Date: 24.APR.2018 17:58:56

LTE band 5, 5MHz Bandwidth, 16QAM (99% BW)

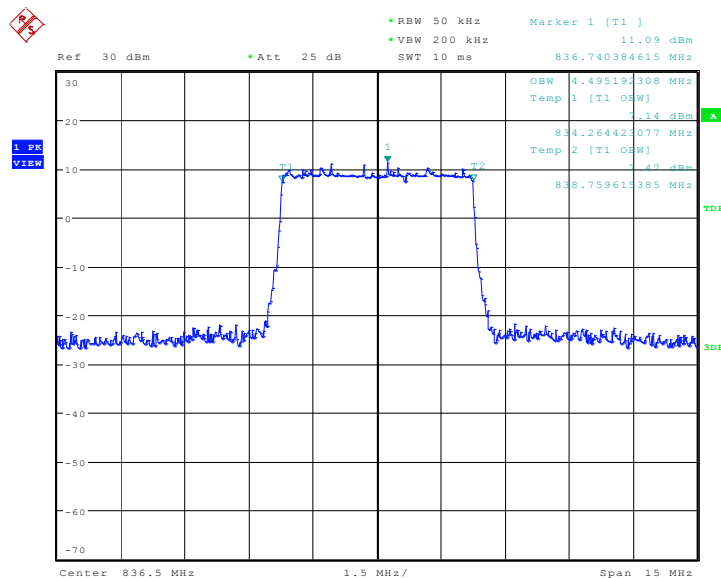


Date: 24.APR.2018 17:59:11

LTE band 5, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	8990.38	8990.38

LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

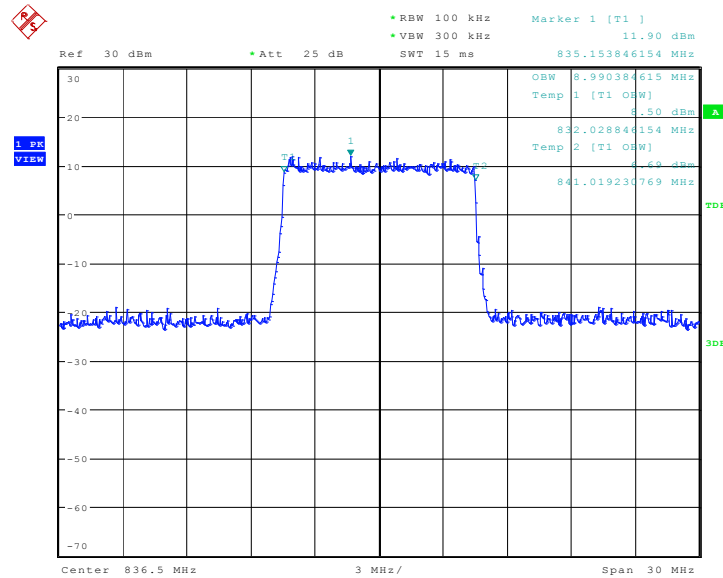

Date: 24.APR.2018 18:05:55

LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)

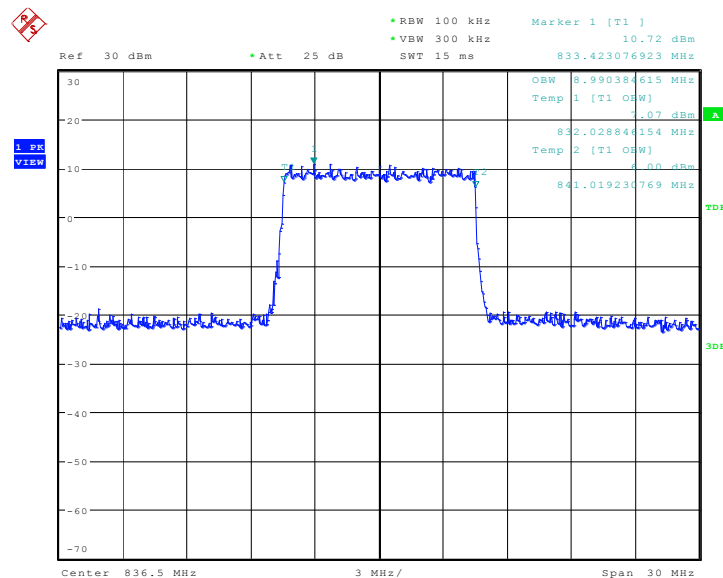


Date: 24.APR.2018 18:06:10

LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	4495.19	4471.15

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

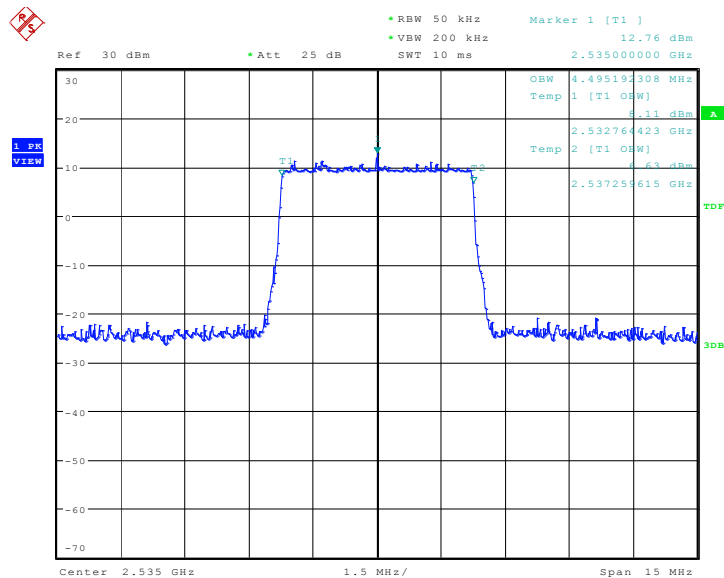

Date: 24.APR.2018 17:15:37

LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)

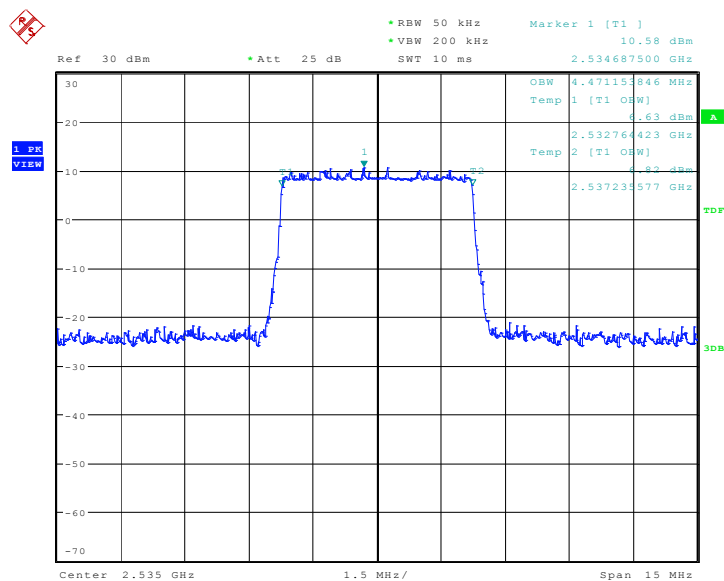


Date: 24.APR.2018 17:15:52

LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	9038.46	9038.46

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

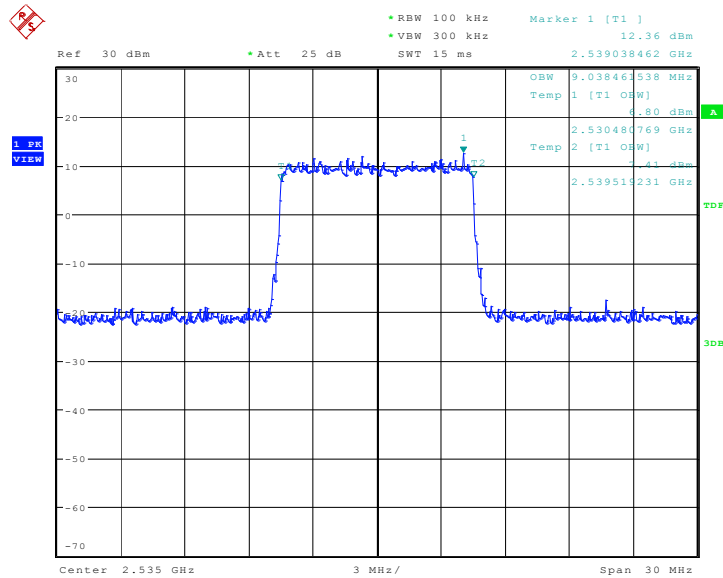

Date: 24.APR.2018 17:22:36

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

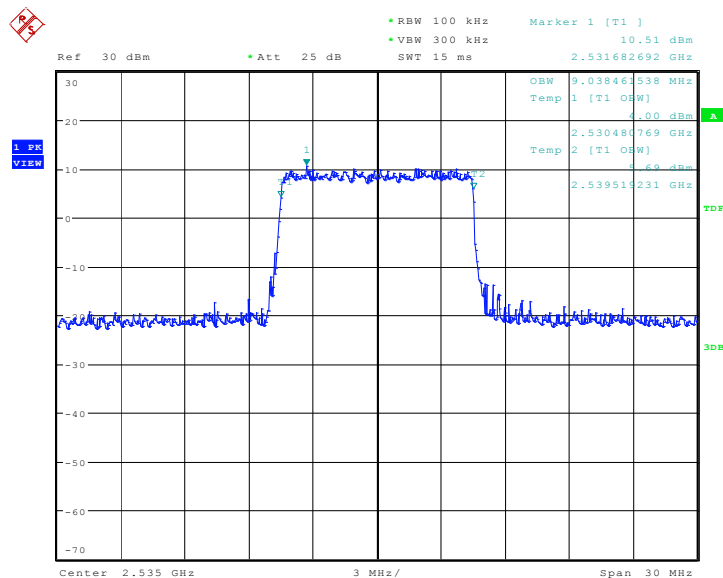


Date: 24.APR.2018 17:22:52

LTE band 7, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	13485.58	13485.58

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

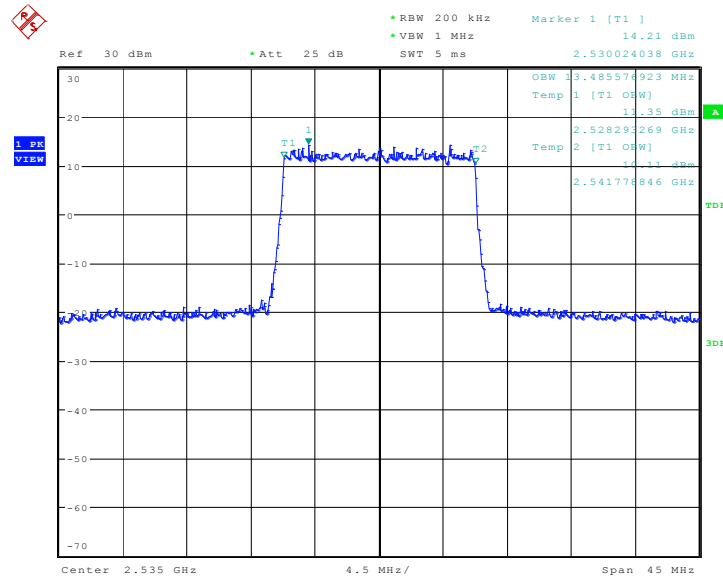

Date: 24.APR.2018 17:30:13

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)

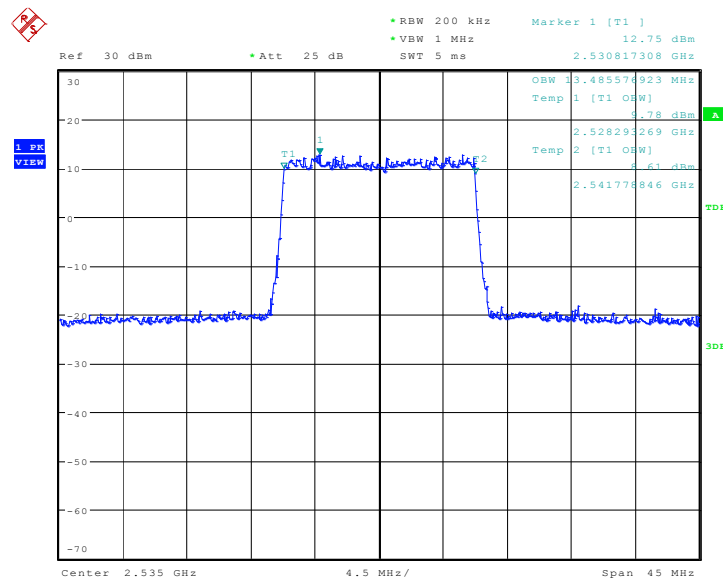


Date: 24.APR.2018 17:30:28

LTE band 7, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	17980.77	17980.77

LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

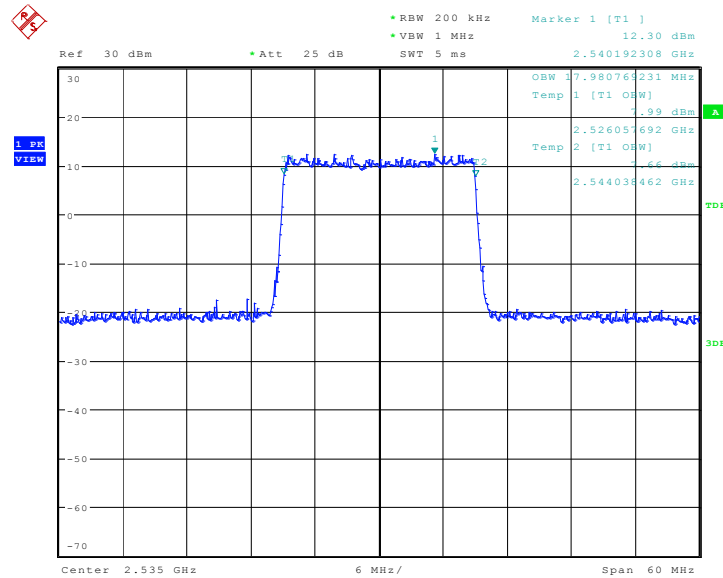

Date: 24.APR.2018 17:37:54

LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)

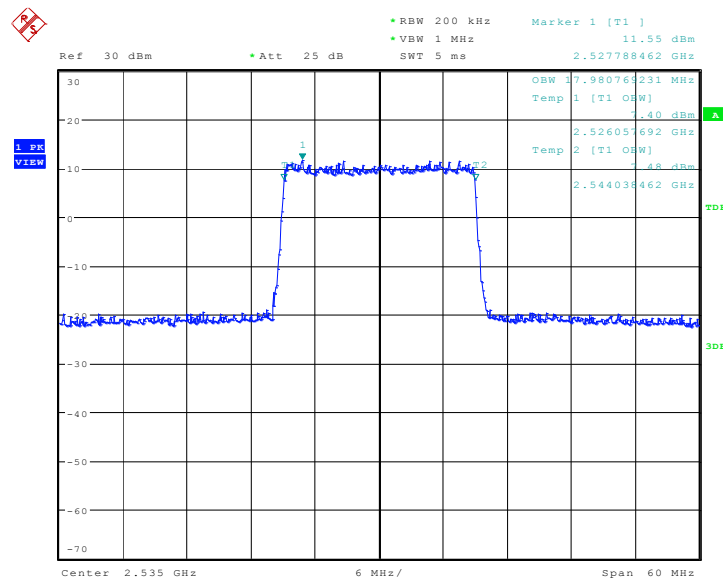


Date: 24.APR.2018 17:38:09

LTE band 12, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	1089.74	1089.74

LTE band 12, 1.4MHz Bandwidth, QPSK (99% BW)

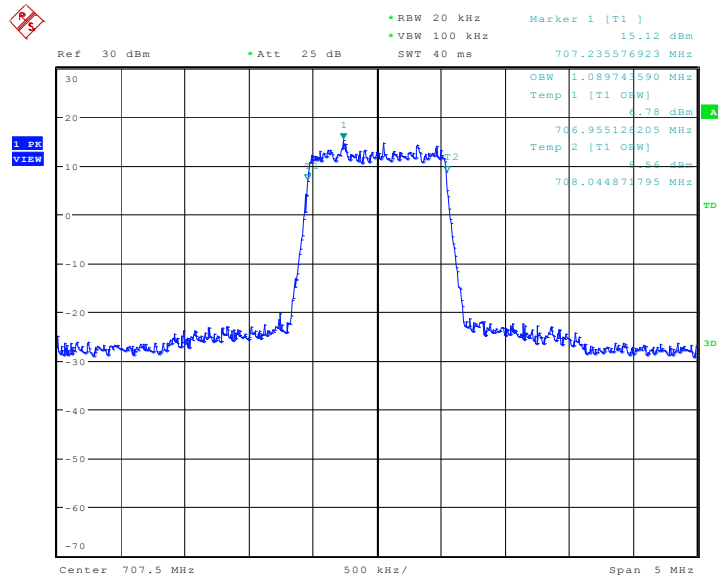

Date: 24.APR.2018 19:39:43

LTE band 12, 1.4MHz Bandwidth, 16QAM (99% BW)

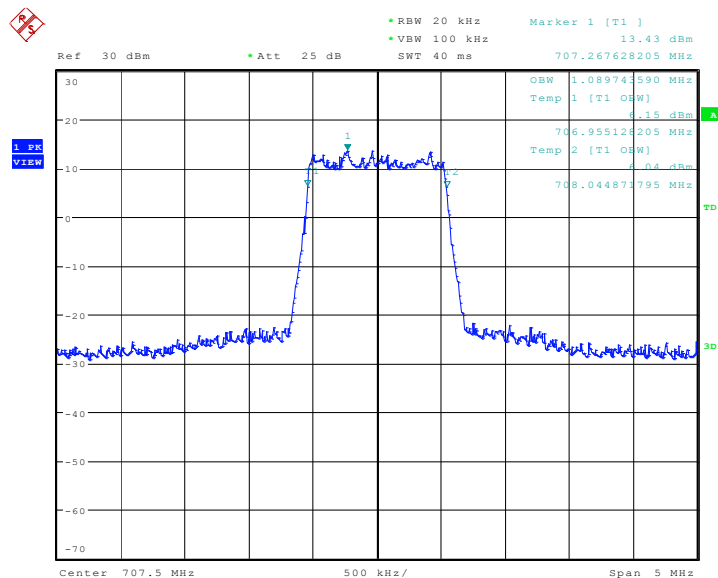


Date: 24.APR.2018 19:39:58

LTE band 12, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	2692.31	2692.31

LTE band 12, 3MHz Bandwidth, QPSK (99% BW)

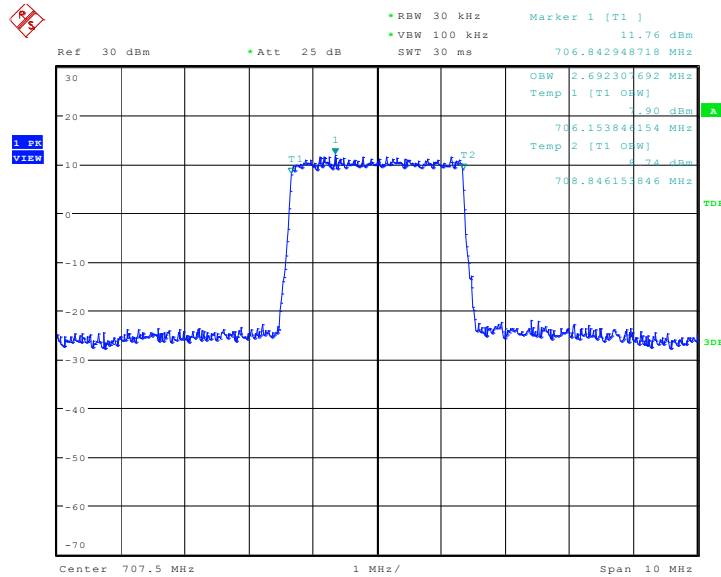

Date: 24.APR.2018 19:46:42

LTE band 12, 3MHz Bandwidth, 16QAM (99% BW)

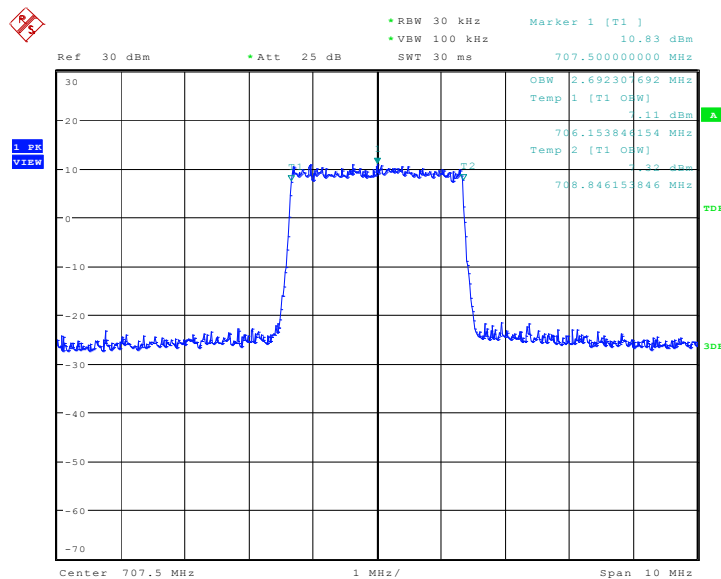


Date: 24.APR.2018 19:46:57

LTE band 12, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	4495.19	4495.19

LTE band 12, 5MHz Bandwidth, QPSK (99% BW)

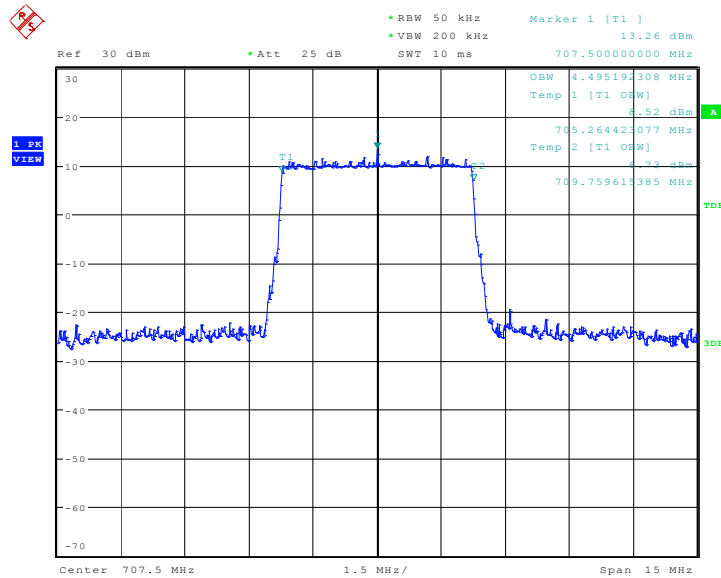

Date: 24.APR.2018 19:53:41

LTE band 12, 5MHz Bandwidth, 16QAM (99% BW)

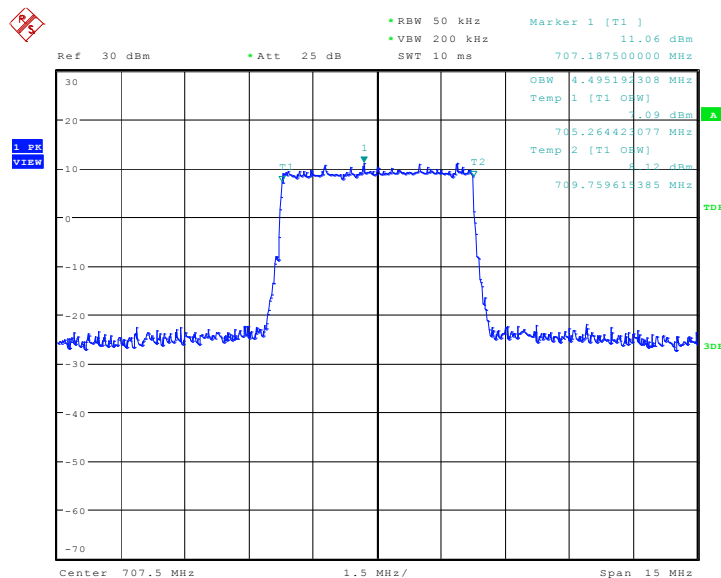


Date: 24.APR.2018 19:53:56

LTE band 12, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	8942.31	8990.38

LTE band 12, 10MHz Bandwidth, QPSK (99% BW)

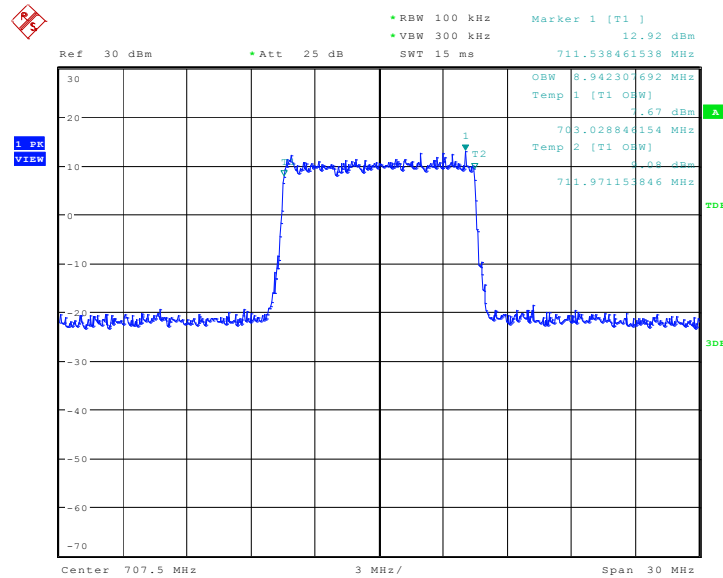

Date: 24.APR.2018 20:00:40

LTE band 12, 10MHz Bandwidth, 16QAM (99% BW)

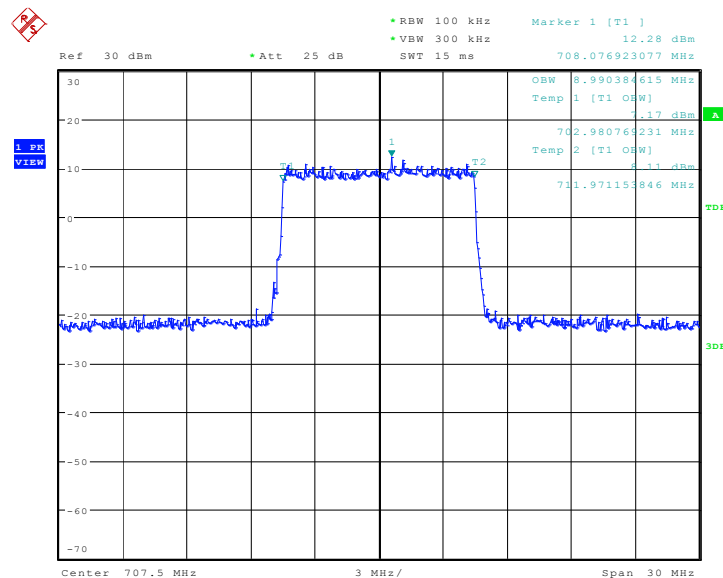


Date: 24.APR.2018 20:00:55

LTE band 38, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2595.0	QPSK	16QAM
	4495.19	4495.19

LTE band 38, 5MHz Bandwidth, QPSK (99% BW)

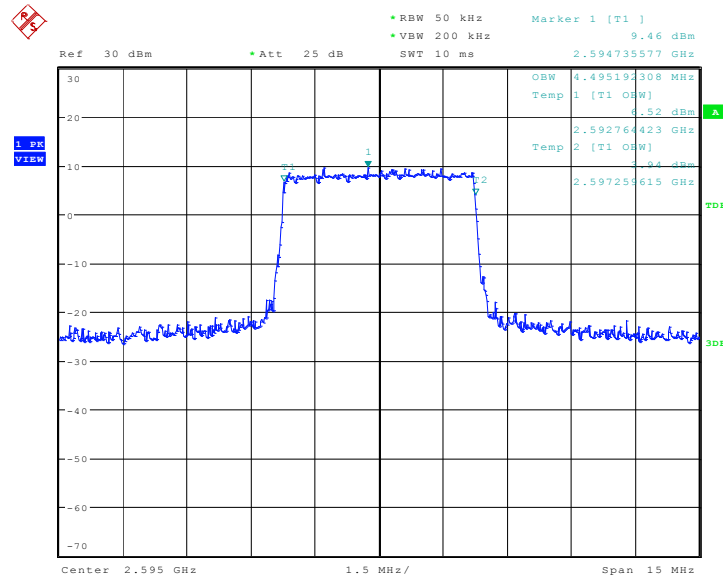

Date: 4.MAY.2018 13:20:59

LTE band 38, 5MHz Bandwidth,16QAM (99% BW)

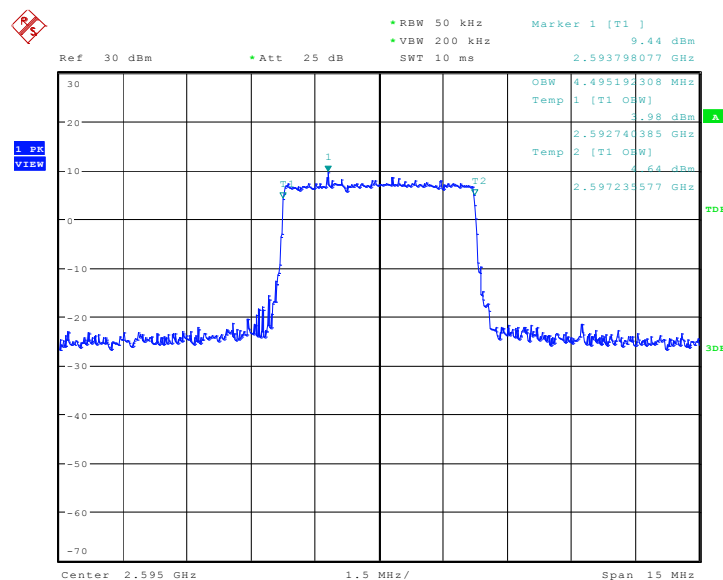


Date: 4.MAY.2018 13:21:14

LTE band 38, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2595.0	QPSK	16QAM
	9038.46	9038.46

LTE band 38, 10MHz Bandwidth, QPSK (99% BW)

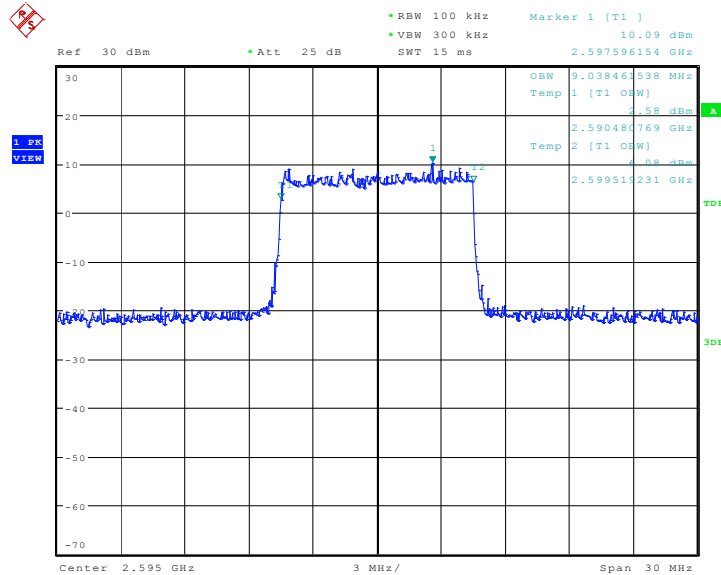

Date: 4.MAY.2018 13:02:03

LTE band 38, 10MHz Bandwidth, 16QAM (99% BW)

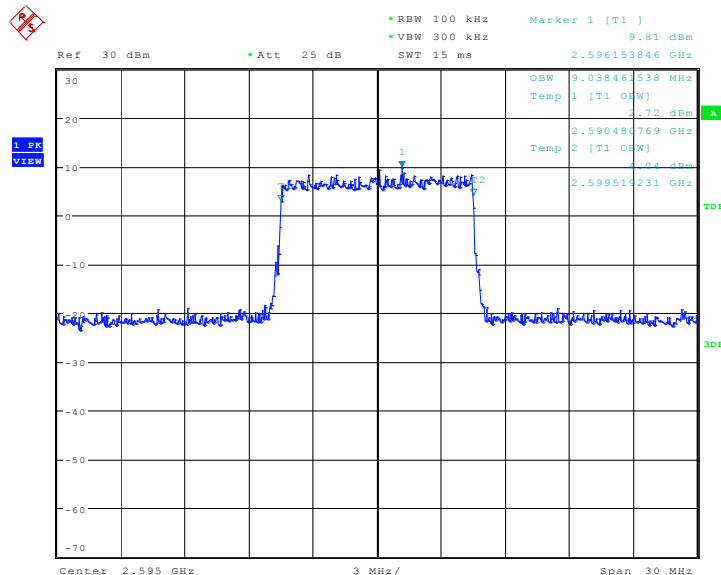


Date: 4.MAY.2018 13:02:18

LTE band 38, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2595.0	QPSK	16QAM
	13485.58	13557.69

LTE band 38, 15MHz Bandwidth, QPSK (99% BW)

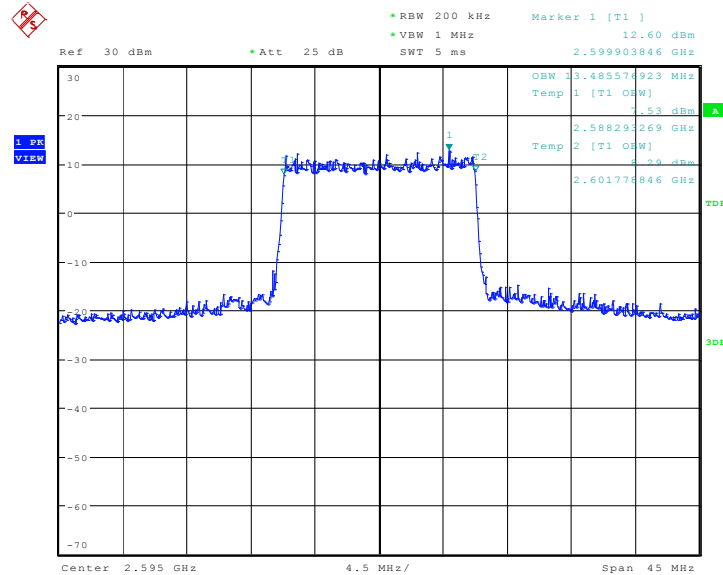


Date: 4.MAY.2018 13:57:19

LTE band 38, 15MHz Bandwidth, 16QAM (99% BW)

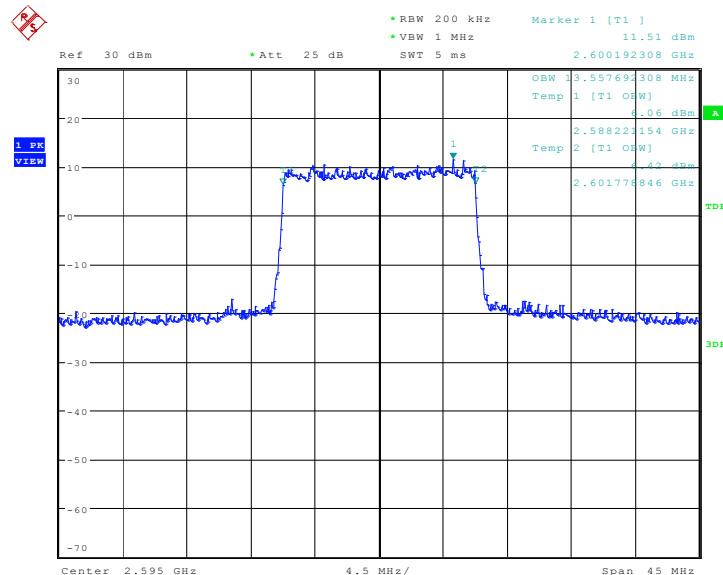

Date: 4.MAY.2018 13:57:34



Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2595.0	QPSK	16QAM
	17980.77	18173.08

• RBW 200 kHz
 • VBW 1 MHz
 • Att 25 dB
 • SWT 5 ms

Marker 1 [T1]
 10.77 dBm
 2.603076923 GHz

Ref 30 dBm
 OSW 17.98076231 MHz
 Temp 1 [T1 OSW]
 1.22 dBm
 2.586051692 GHz
 Temp 2 [T1 OSW]
 1.22 dBm
 2.604038462 GHz

1
 2

30
 20
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70

2.595 GHz
 6 MHz/
 Span 60 MHz

1. PR
 VIEW

30 dB

Date: 4.MAY.2018 13:17:12

• RBW 200 kHz
 • VBW 1 MHz
 • Att 25 dB
 SWT 5 ms

Marker 1 [T1]
 10.62 dBm
 2.599423077 GHz

1 PR
 VIEW

Marker	Frequency (GHz)	Power (dBm)	Temp (°C)
1 [T1] OHW	2.585961538	10.75	18.17307923
2 [T1] OHW	2.604134615	10.92	18.17307923

Center 2.595 GHz
 6 MHz /
 Span 60 MHz

Date: 4.MAY.2018 13:17:27



A.5 EMISSION BANDWIDTH


A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 2, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	1258.01	1258.01

LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)

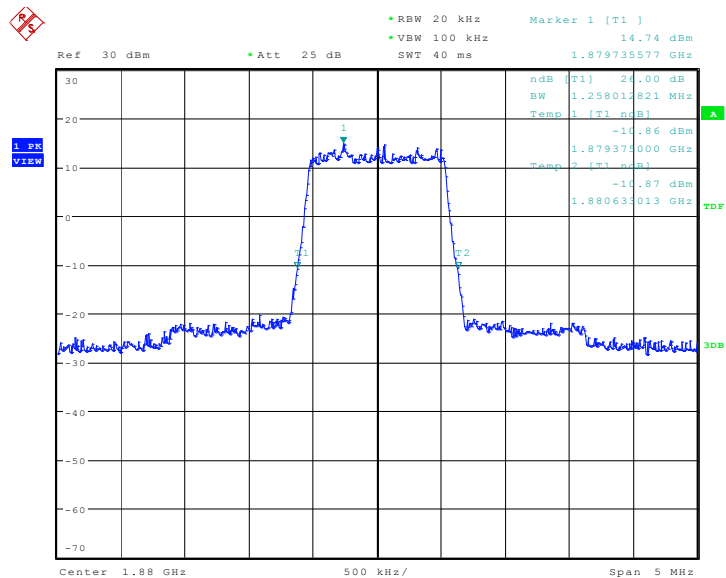

Date: 24.APR.2018 18:14:12

LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

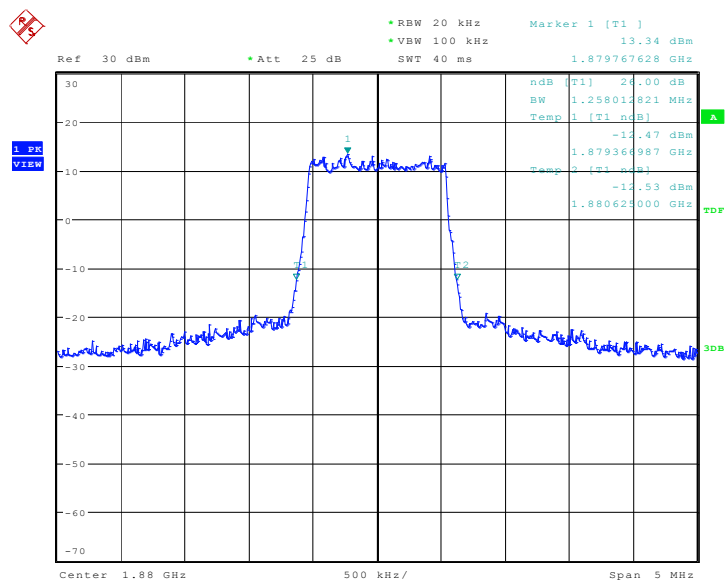


Date: 24.APR.2018 18:14:29

LTE band 2, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	2932.69	2932.69

LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)

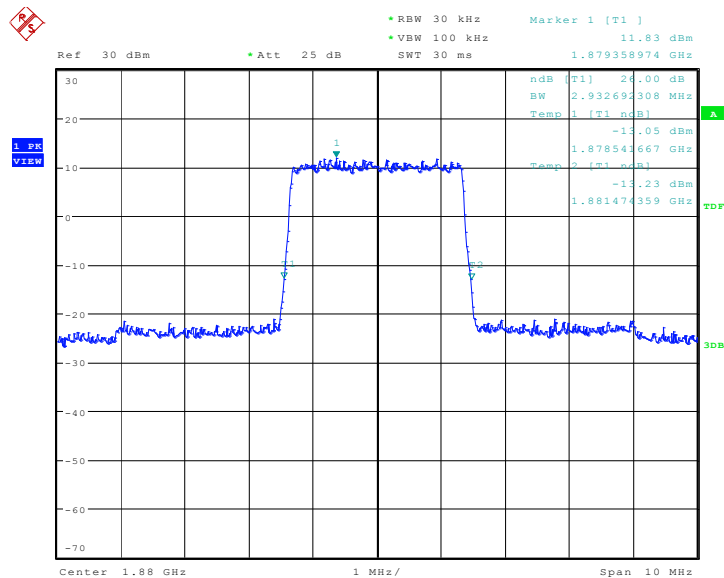

Date: 24.APR.2018 18:21:11

LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)

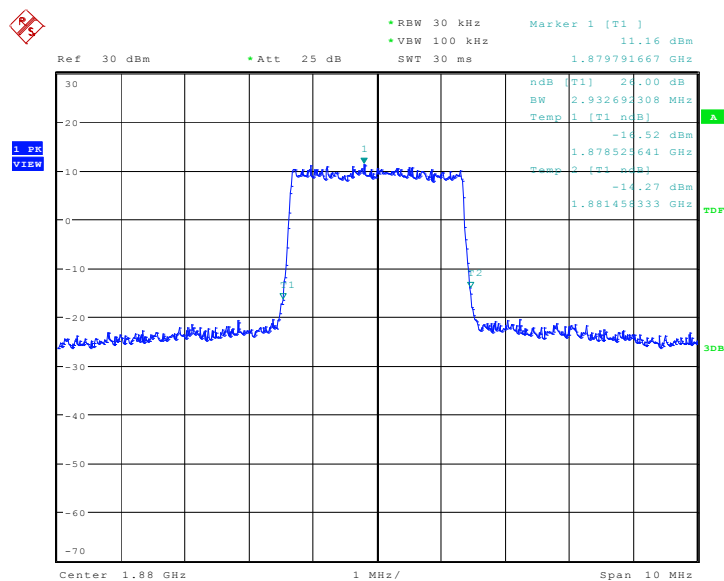


Date: 24.APR.2018 18:21:28

LTE band 2, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	4951.92	4951.92

LTE band 2, 5MHz Bandwidth, QPSK (-26dBc BW)

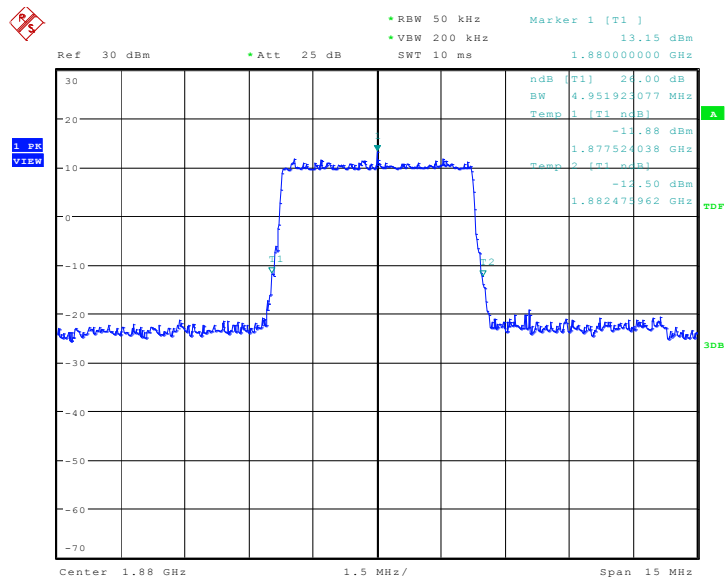

Date: 24.APR.2018 18:28:10

LTE band 2, 5MHz Bandwidth, 16QAM (-26dBc BW)

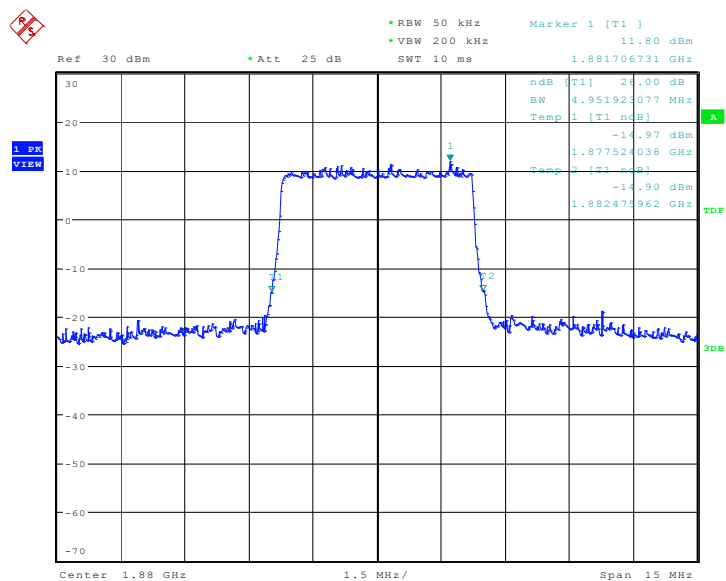


Date: 24.APR.2018 18:28:27

LTE band 2, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	9807.69	9759.62

LTE band 2, 10MHz Bandwidth, QPSK (-26dBc BW)

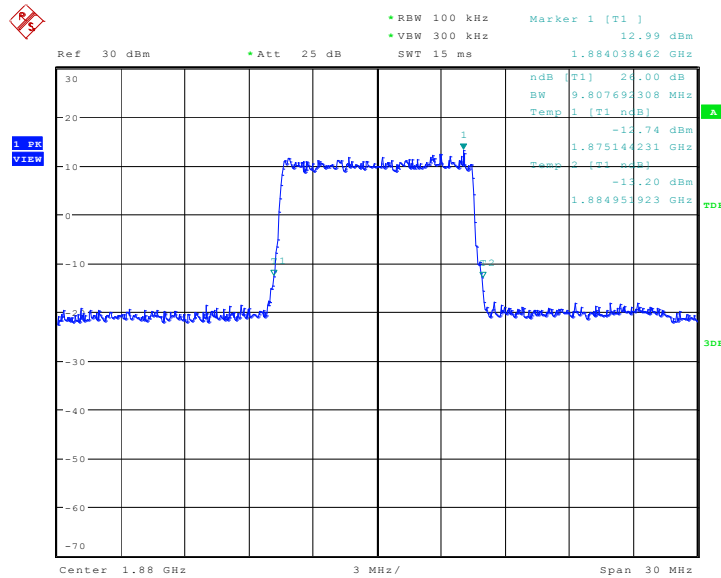

Date: 24.APR.2018 18:35:09

LTE band 2, 10MHz Bandwidth, 16QAM (-26dBc BW)

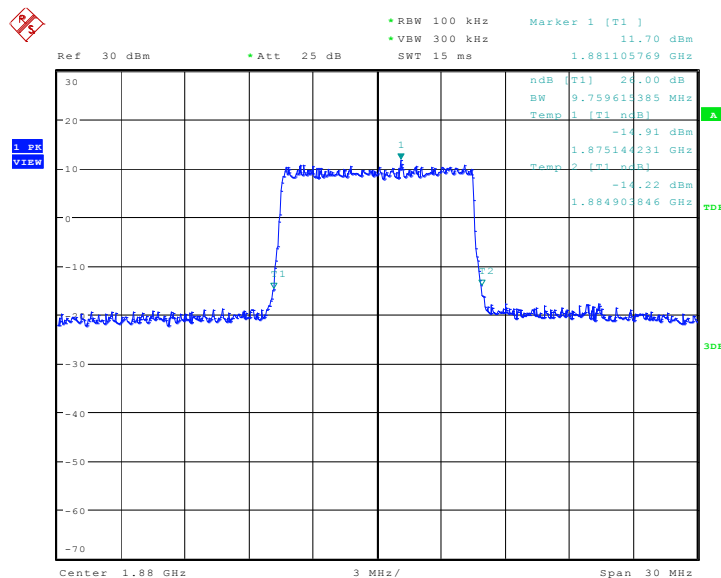


Date: 24.APR.2018 18:35:26

LTE band 2, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	14783.65	14783.65

LTE band 2, 15MHz Bandwidth, QPSK (-26dBc BW)

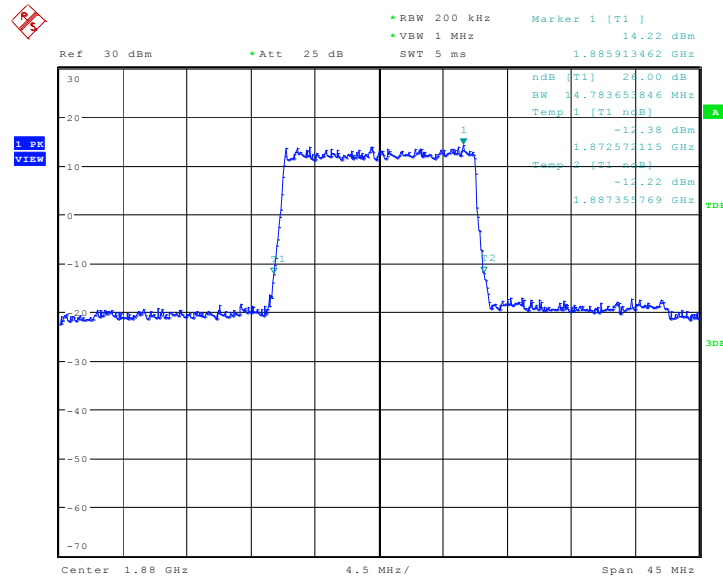

Date: 24.APR.2018 18:42:46

LTE band 2, 15MHz Bandwidth, 16QAM (-26dBc BW)

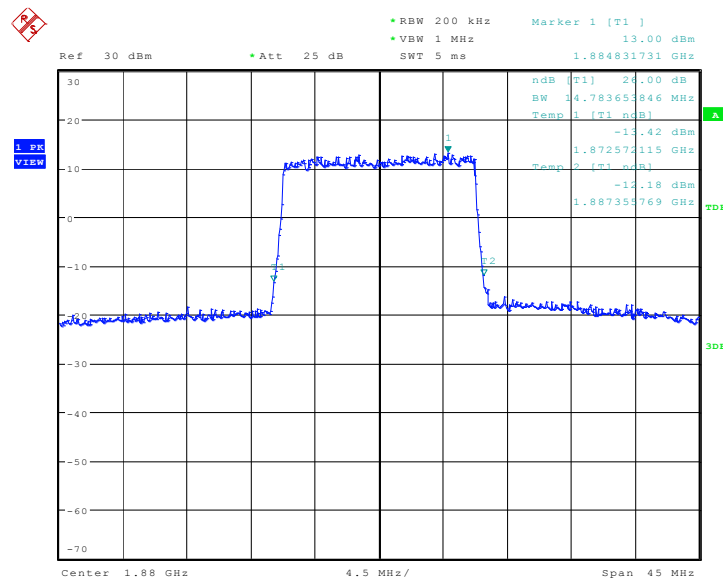


Date: 24.APR.2018 18:43:03

LTE band 2, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	19423.08	19615.38

LTE band 2, 20MHz Bandwidth, QPSK (-26dBc BW)

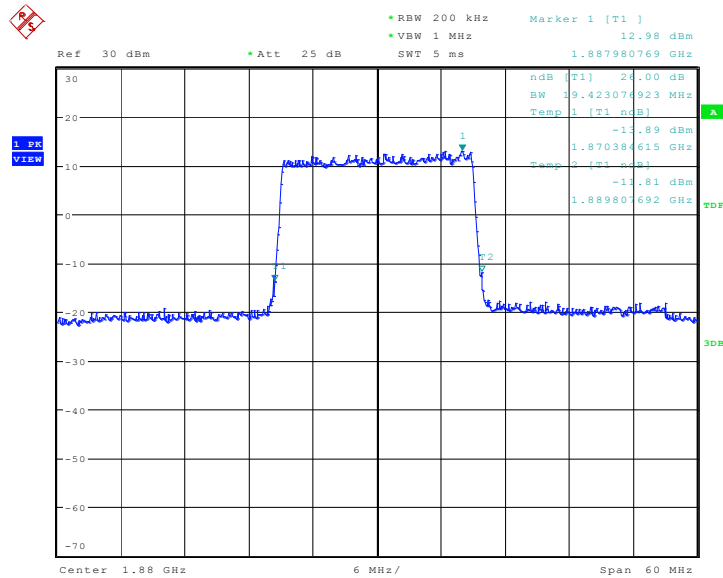

Date: 24.APR.2018 18:50:26

LTE band 2, 20MHz Bandwidth, 16QAM (-26dBc BW)

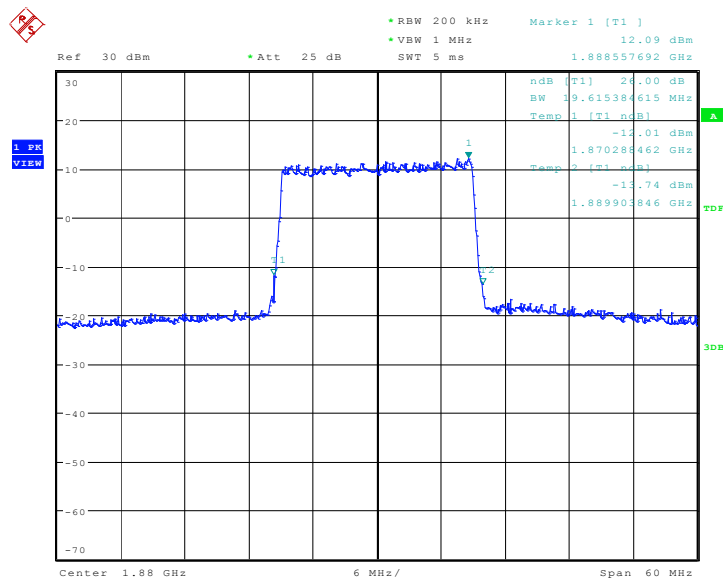


Date: 24.APR.2018 18:50:43

LTE band 4, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	1258.01	1266.03

LTE band 4, 1.4MHz Bandwidth, QPSK (-26dBc BW)

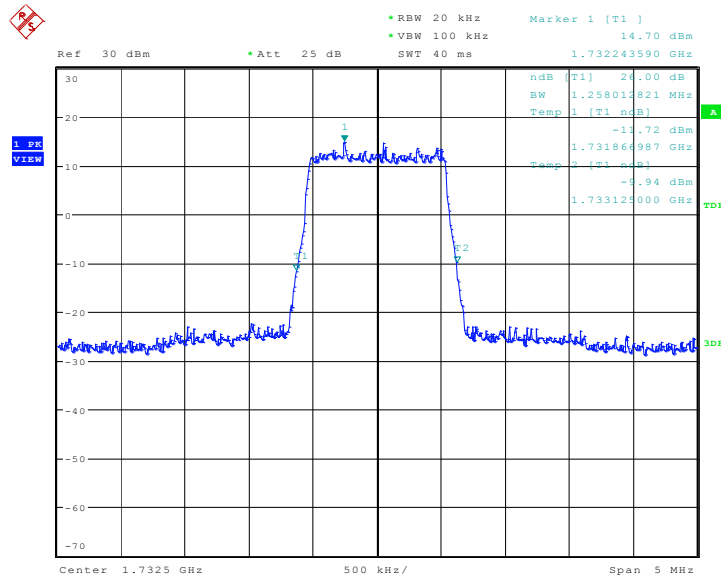

Date: 24.APR.2018 18:57:31

LTE band 4, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

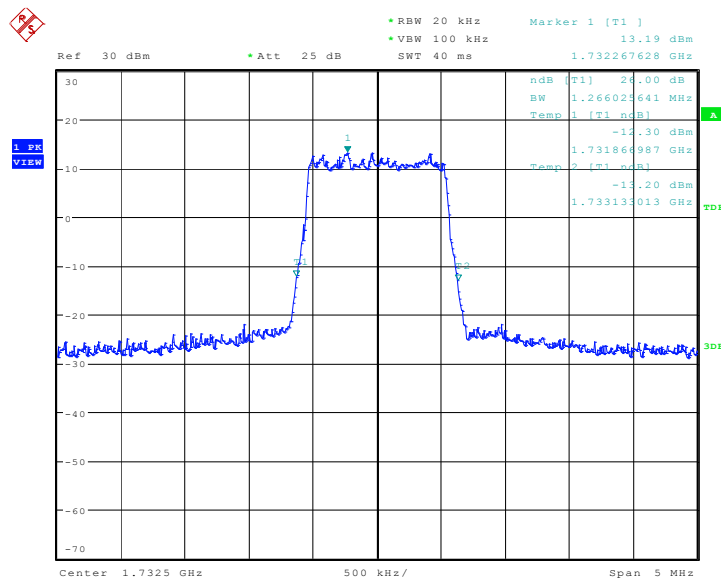


Date: 24.APR.2018 18:57:48

LTE band 4, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	2948.72	2932.69

LTE band 4, 3MHz Bandwidth, QPSK (-26dBc BW)

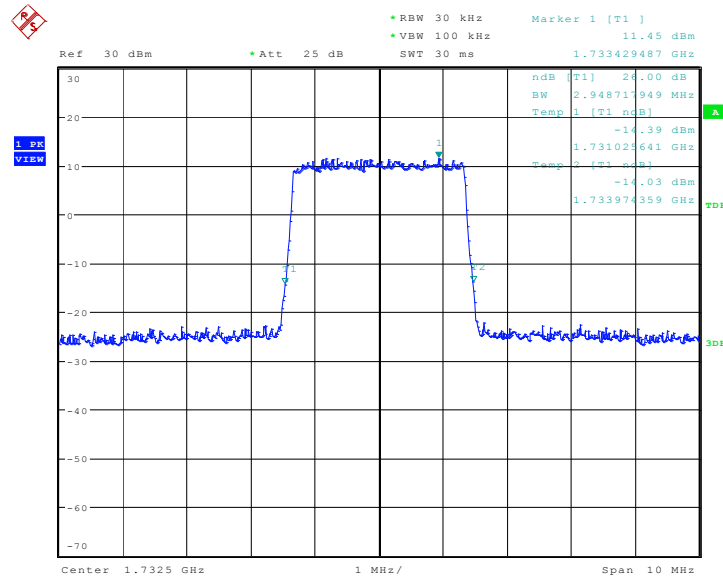

Date: 24.APR.2018 19:04:30

LTE band 4, 3MHz Bandwidth, 16QAM (-26dBc BW)

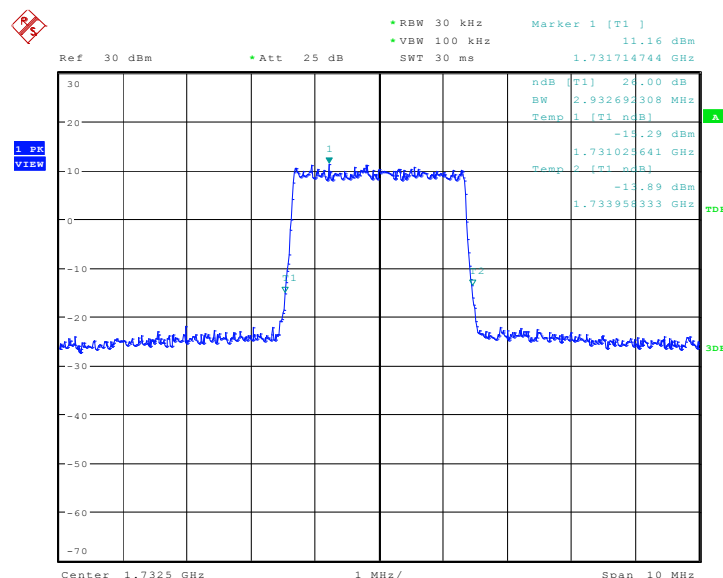


Date: 24.APR.2018 19:04:47

LTE band 4, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	5048.08	5000.00

LTE band 4, 5MHz Bandwidth, QPSK (-26dBc BW)

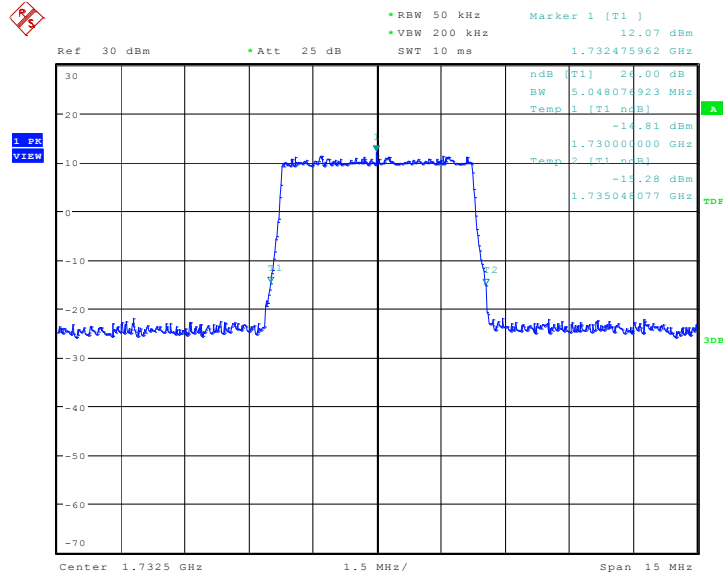

Date: 24.APR.2018 19:11:29

LTE band 4, 5MHz Bandwidth, 16QAM (-26dBc BW)

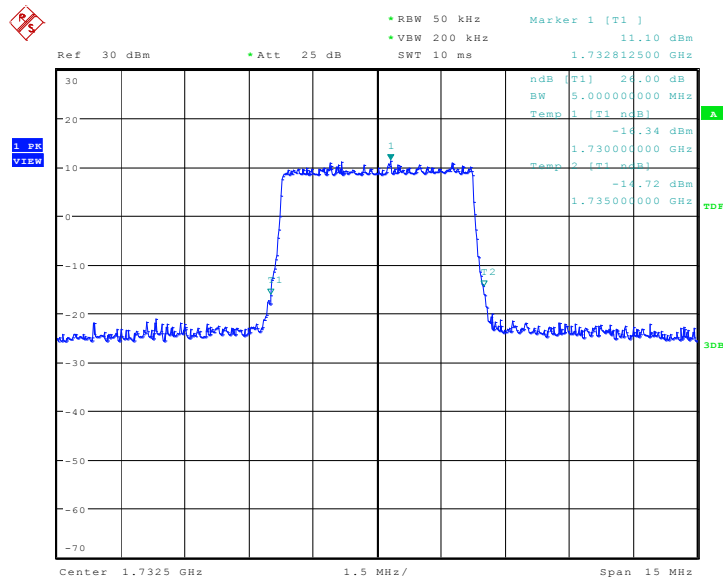


Date: 24.APR.2018 19:11:46

LTE band 4, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	9759.62	9855.77

LTE band 4, 10MHz Bandwidth, QPSK (-26dBc BW)

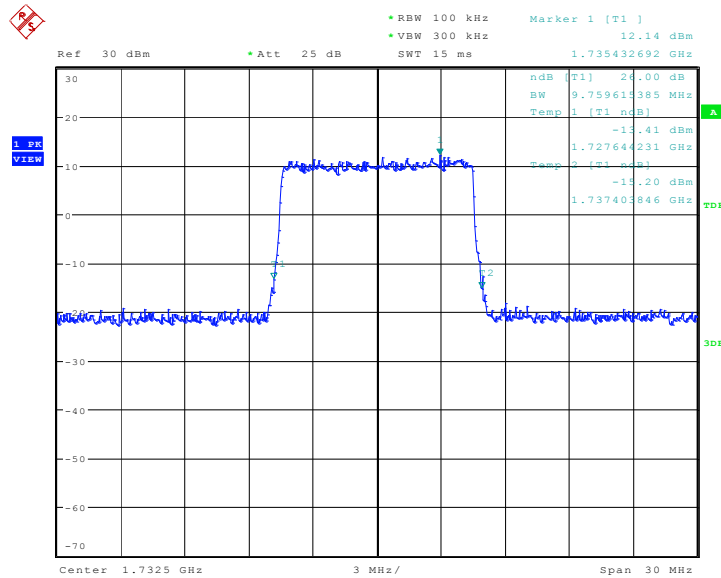

Date: 24.APR.2018 19:18:28

LTE band 4, 10MHz Bandwidth, 16QAM (-26dBc BW)

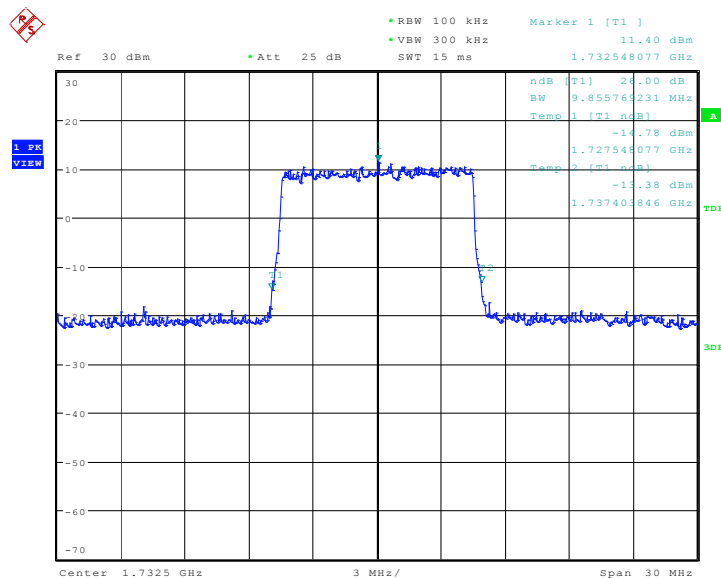


Date: 24.APR.2018 19:18:45

LTE band 4, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	14783.65	14855.77

LTE band 4, 15MHz Bandwidth, QPSK (-26dBc BW)

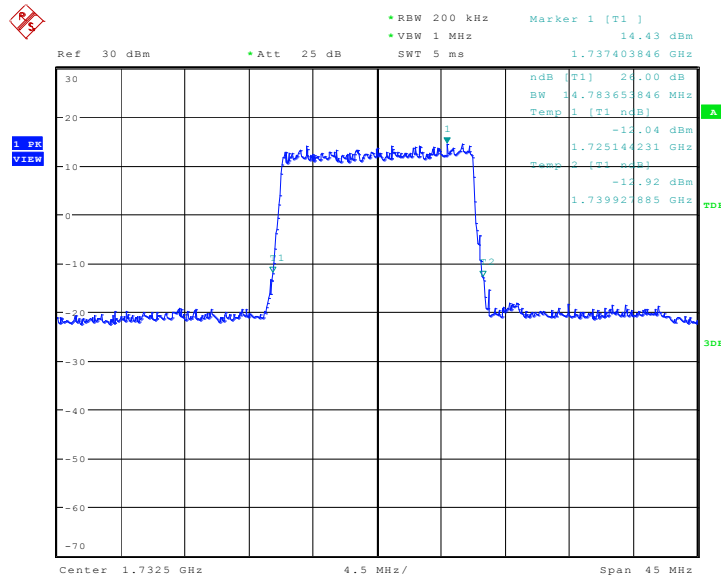

Date: 24.APR.2018 19:26:06

LTE band 4, 15MHz Bandwidth, 16QAM (-26dBc BW)

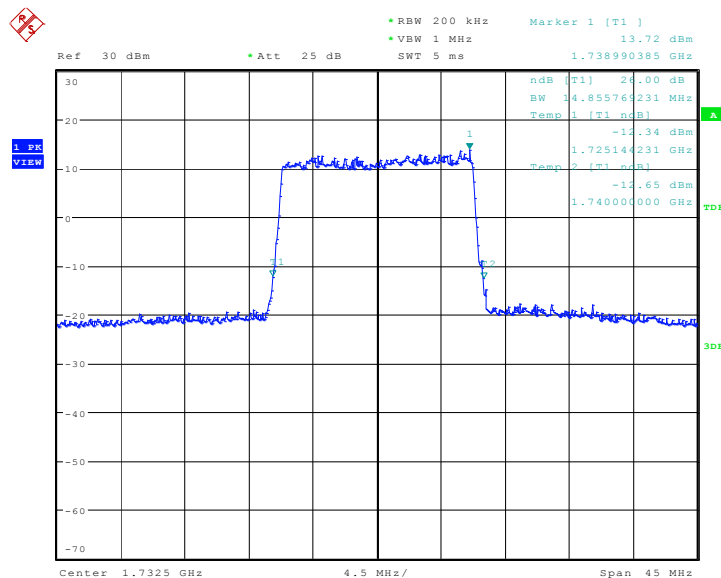


Date: 24.APR.2018 19:26:23

LTE band 4, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	19423.08	19615.38

LTE band 4, 20MHz Bandwidth, QPSK (-26dBc BW)

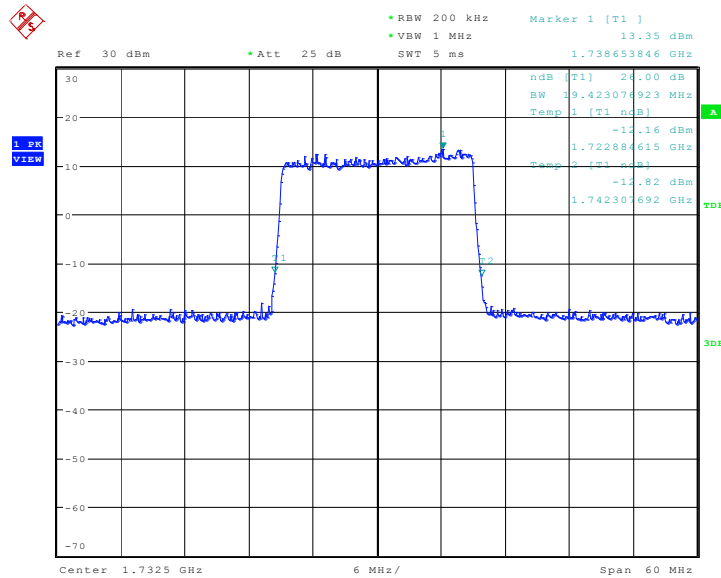

Date: 24.APR.2018 19:33:46

LTE band 4, 20MHz Bandwidth, 16QAM (-26dBc BW)

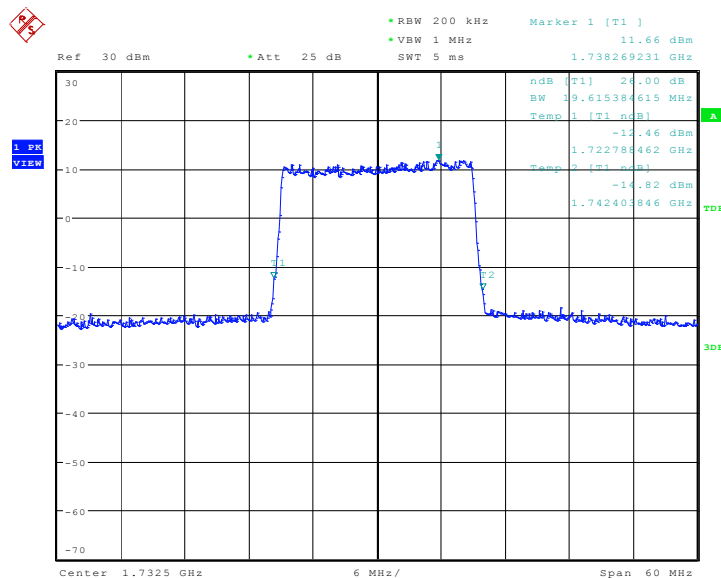


Date: 24.APR.2018 19:34:03

LTE band 5, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	1258.01	1266.03

LTE band 5, 1.4MHz Bandwidth, QPSK (-26dBc BW)

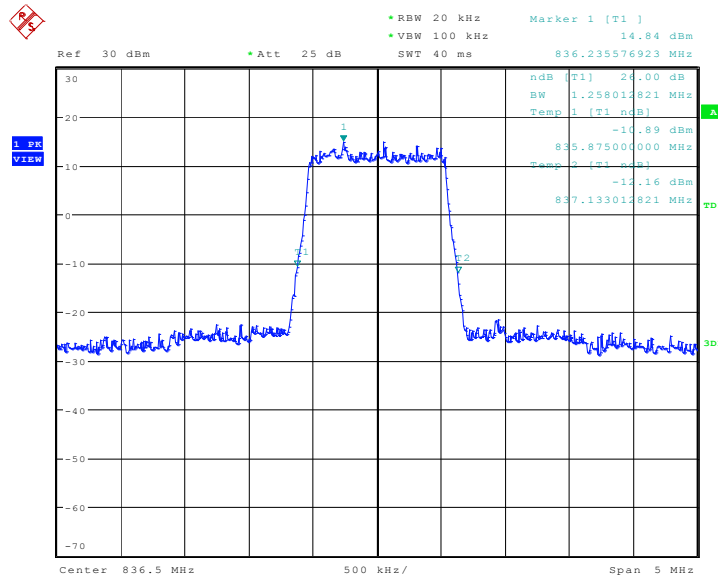

Date: 24.APR.2018 17:46:08

LTE band 5, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

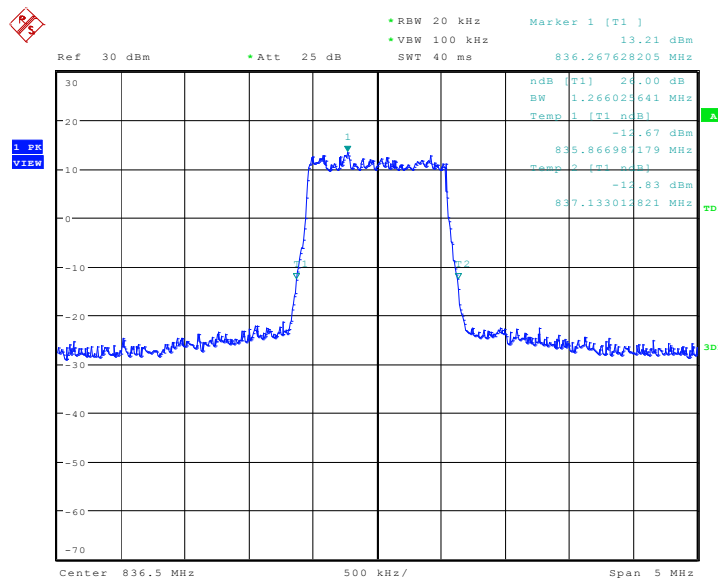


Date: 24.APR.2018 17:46:25

LTE band 5, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	2948.72	2932.69

LTE band 5, 3MHz Bandwidth, QPSK (-26dBc BW)

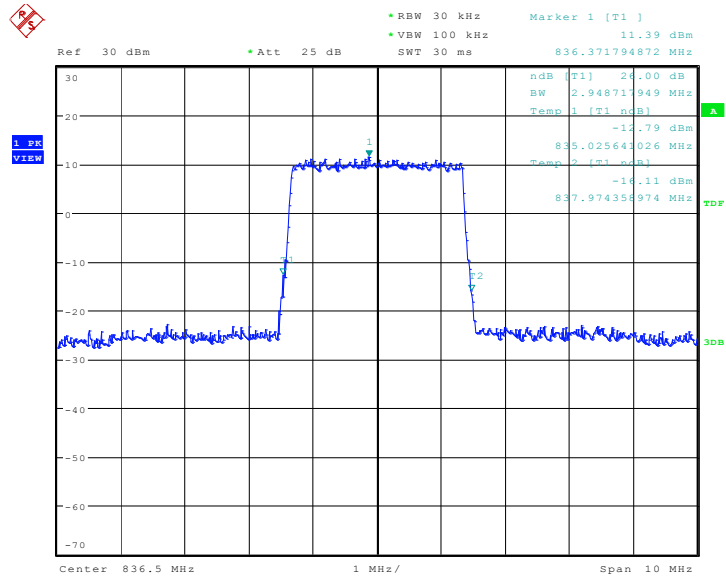

Date: 24.APR.2018 17:53:07

LTE band 5, 3MHz Bandwidth, 16QAM (-26dBc BW)

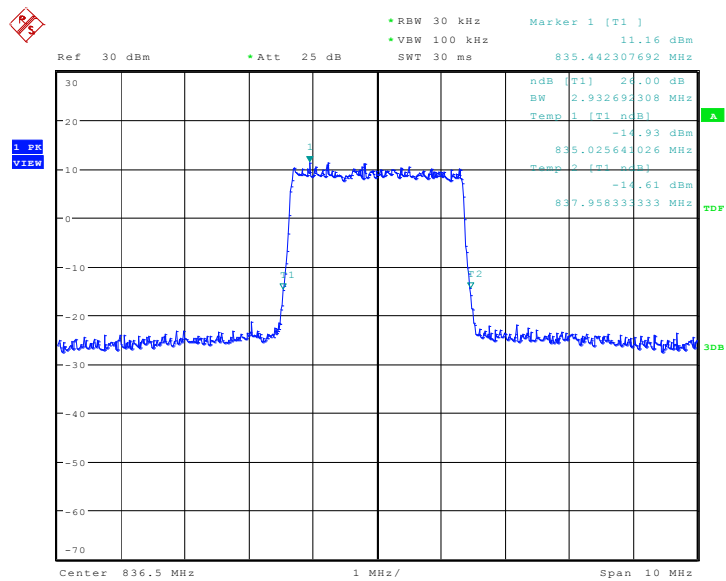


Date: 24.APR.2018 17:53:24

LTE band 5, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	4951.92	4951.92

LTE band 5, 5MHz Bandwidth, QPSK (-26dBc BW)

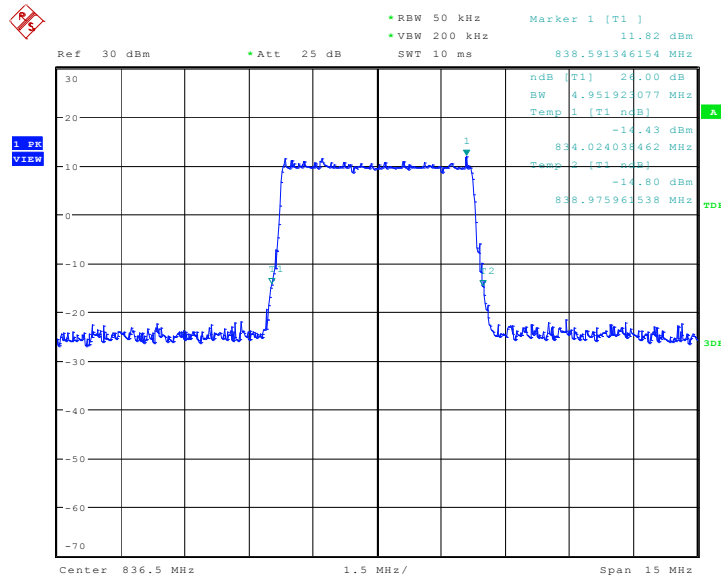

Date: 24.APR.2018 18:00:06

LTE band 5, 5MHz Bandwidth, 16QAM (-26dBc BW)

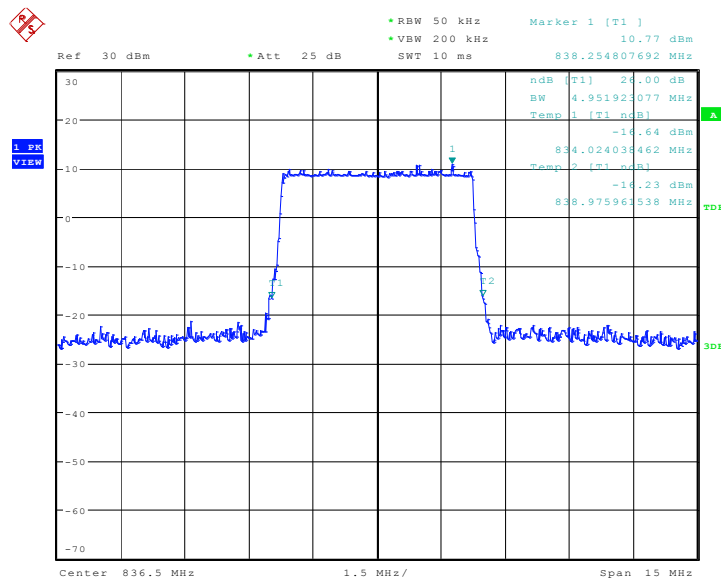


Date: 24.APR.2018 18:00:23

LTE band 5, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	9759.62	9855.77

LTE band 5, 10MHz Bandwidth, QPSK (-26dBc BW)

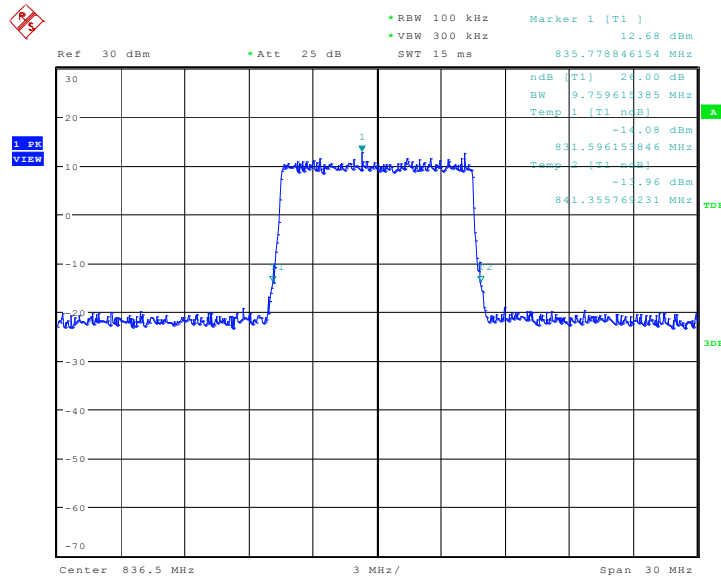

Date: 24.APR.2018 18:07:05

LTE band 5, 10MHz Bandwidth, 16QAM (-26dBc BW)

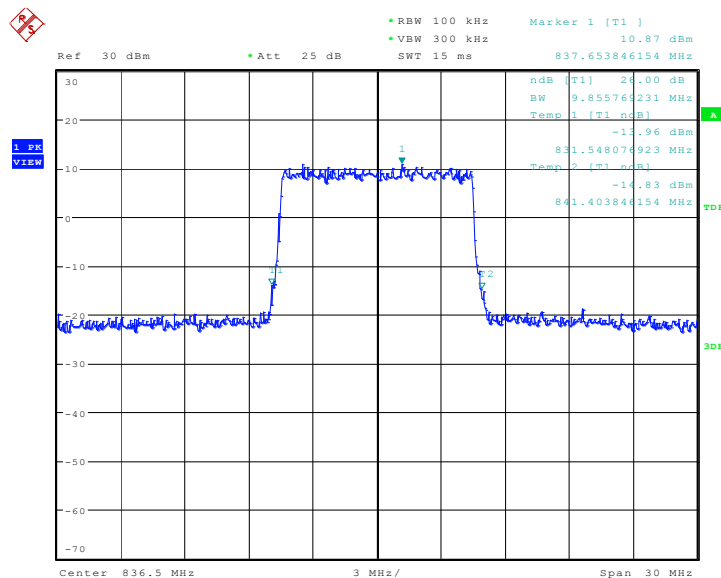


Date: 24.APR.2018 18:07:22

LTE band 7, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	4951.92	4951.92

LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

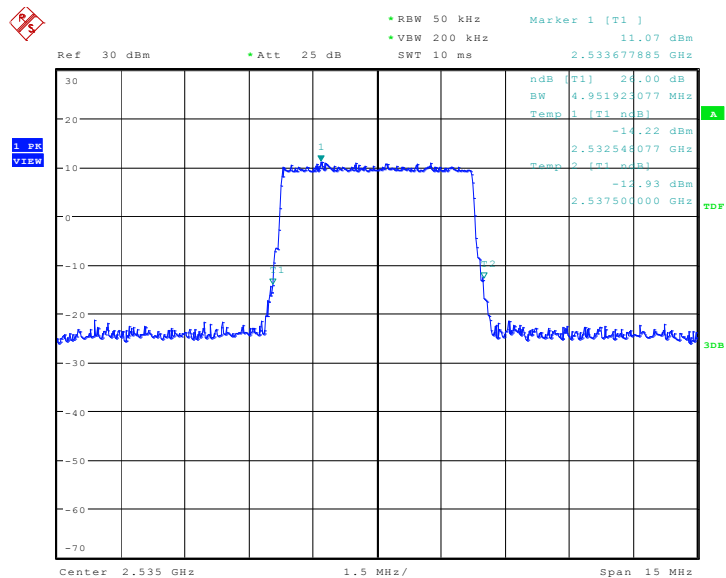

Date: 24.APR.2018 17:16:48

LTE band 7, 5MHz Bandwidth, 16QAM (-26dBc BW)

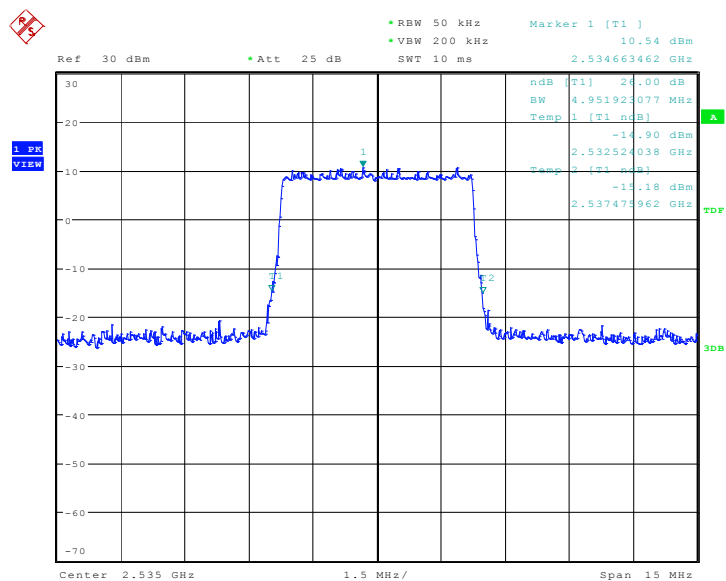


Date: 24.APR.2018 17:17:04

LTE band 7, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	9711.54	9711.54

LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)

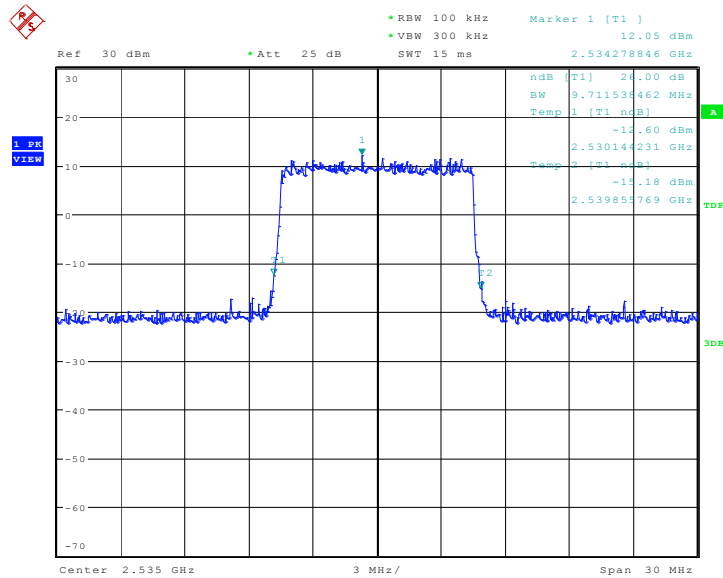

Date: 24.APR.2018 17:23:47

LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)

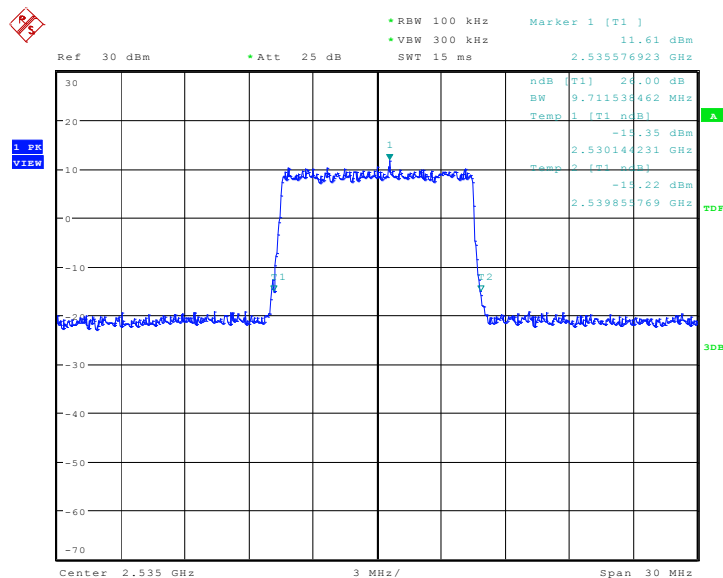


Date: 24.APR.2018 17:24:04

LTE band 7, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	14927.88	14783.65

LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)

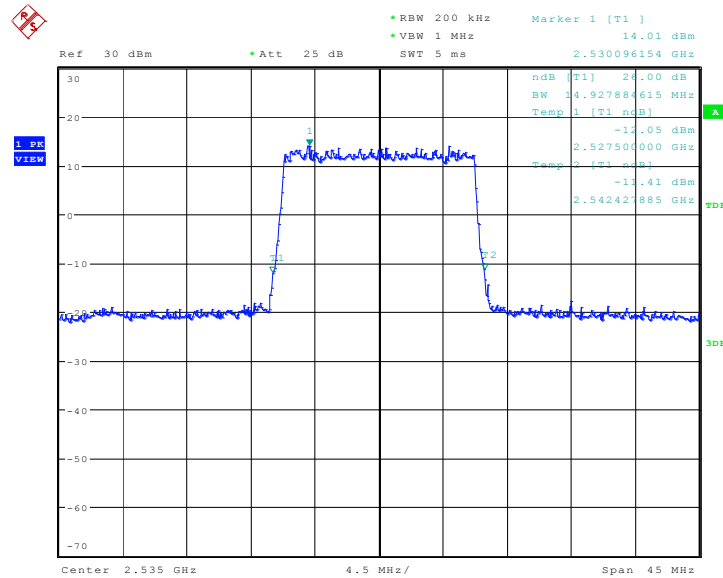

Date: 24.APR.2018 17:31:24

LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)

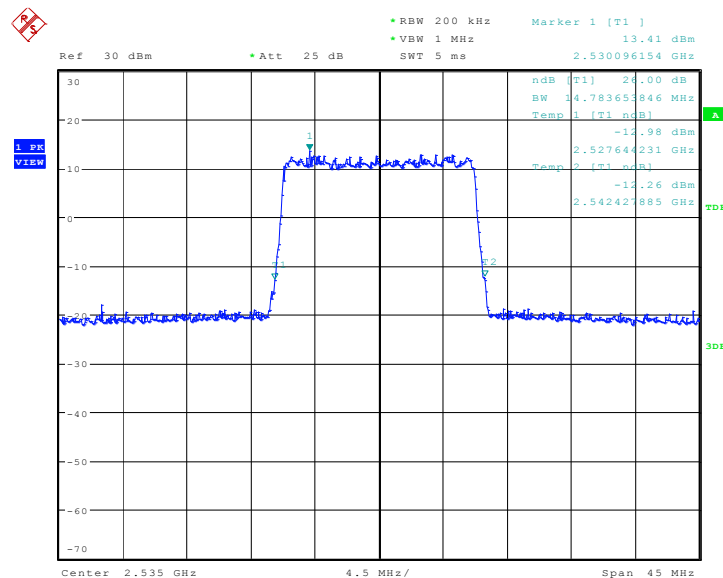


Date: 24.APR.2018 17:31:41

LTE band 7, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	19519.23	19519.23

LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

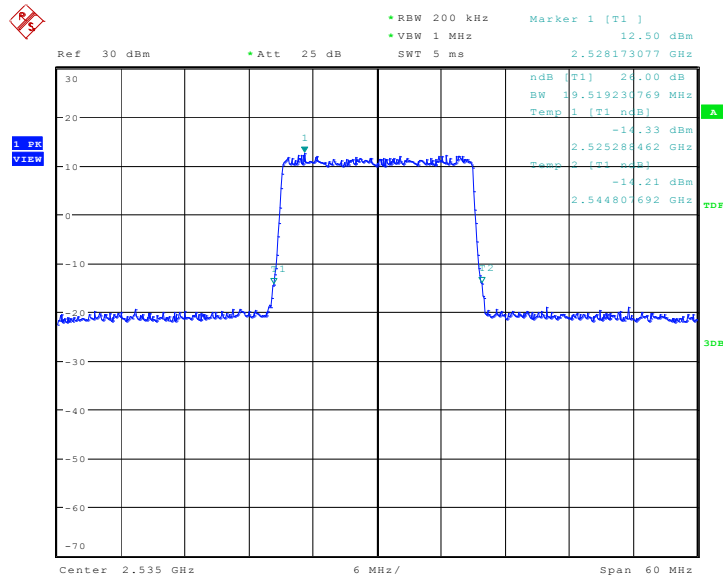

Date: 24.APR.2018 17:39:04

LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)

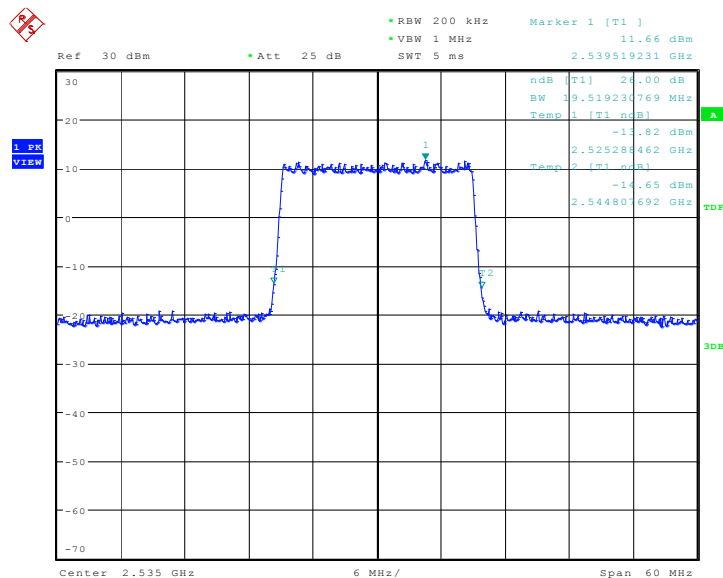


Date: 24.APR.2018 17:39:21

LTE band 12, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	1258.01	1266.03

LTE band 12, 1.4MHz Bandwidth, QPSK (-26dBc BW)

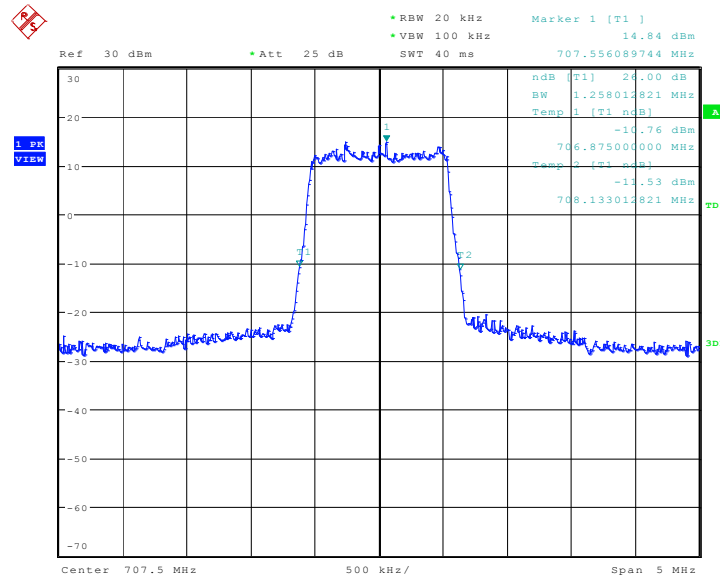

Date: 24.APR.2018 19:40:53

LTE band 12, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

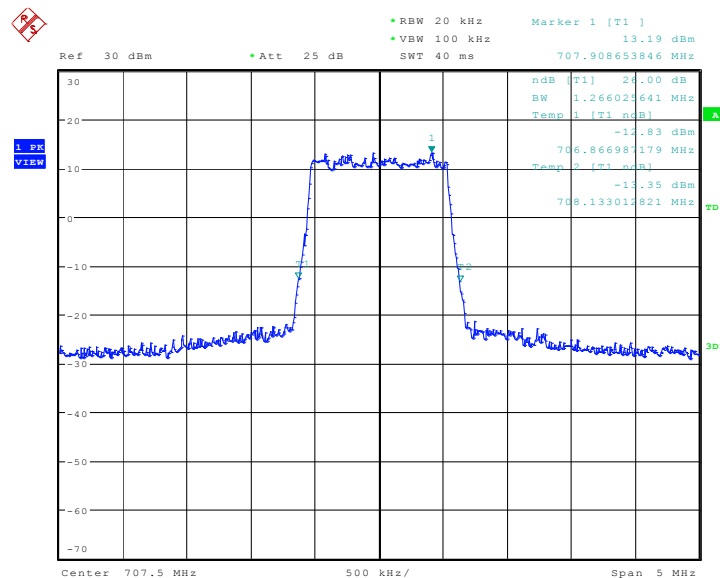


Date: 24.APR.2018 19:41:10

LTE band 12, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	2948.72	2932.69

LTE band 12, 3MHz Bandwidth, QPSK (-26dBc BW)

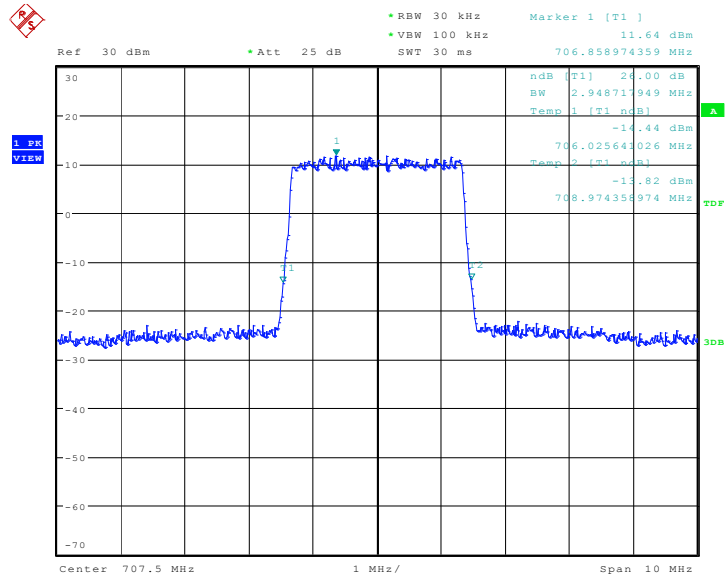

Date: 24.APR.2018 19:47:52

LTE band 12, 3MHz Bandwidth, 16QAM (-26dBc BW)

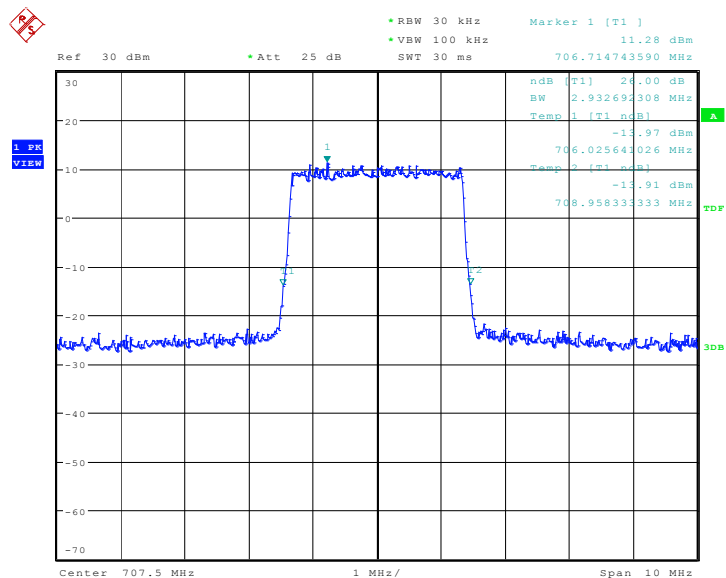


Date: 24.APR.2018 19:48:09

LTE band 12, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	4951.92	4927.88

LTE band 12, 5MHz Bandwidth, QPSK (-26dBc BW)

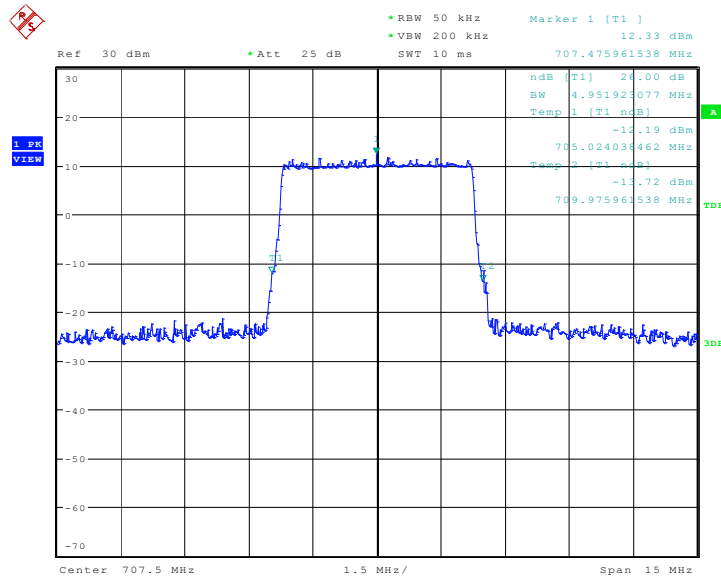

Date: 24.APR.2018 19:54:51

LTE band 12, 5MHz Bandwidth,16QAM (-26dBc BW)

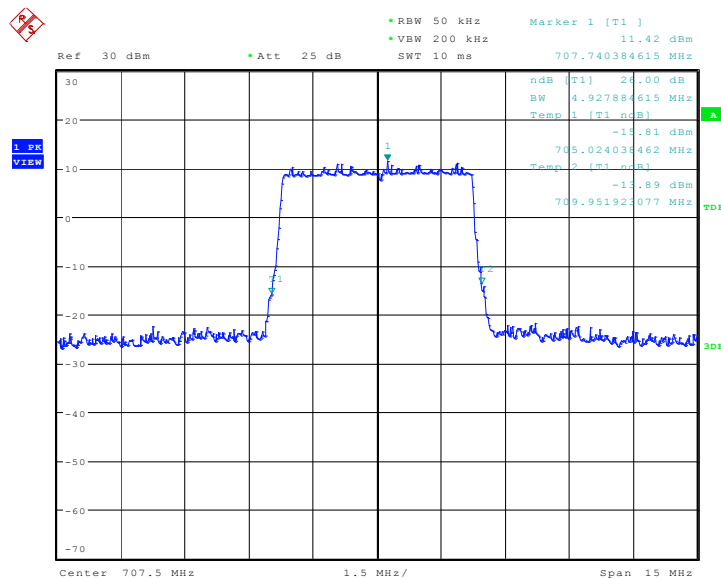


Date: 24.APR.2018 19:55:08

LTE band 12, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	9711.54	9663.46

LTE band 12, 10MHz Bandwidth, QPSK (-26dBc BW)

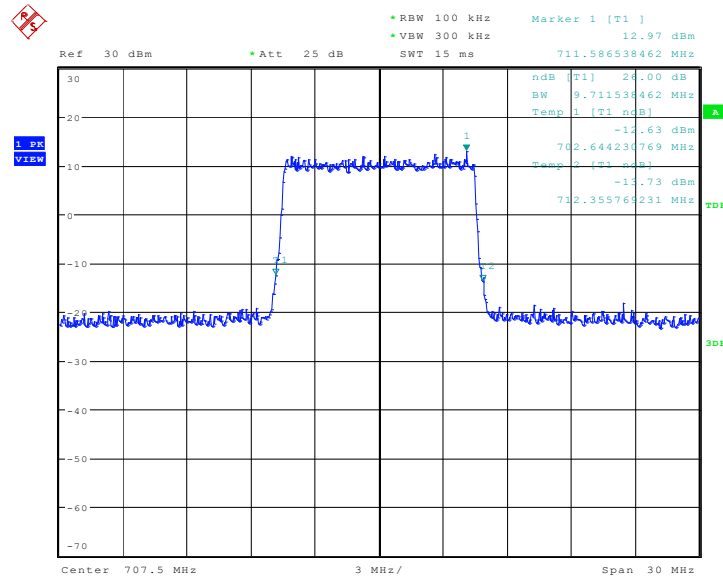

Date: 24.APR.2018 20:01:50

LTE band 12, 10MHz Bandwidth, 16QAM (-26dBc BW)

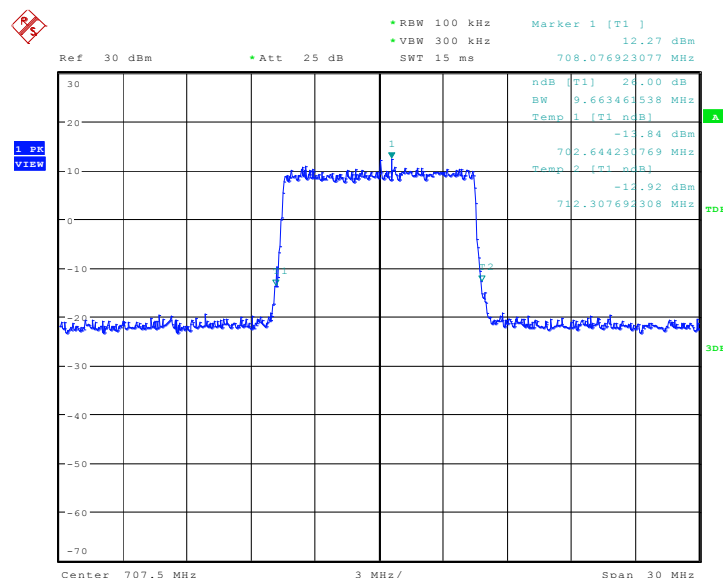


Date: 24.APR.2018 20:02:07

LTE band 38, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc) (kHz)	
2595.0	QPSK	16QAM
	4879.81	4903.85

LTE band 38, 5MHz Bandwidth, QPSK (-26dBc BW)

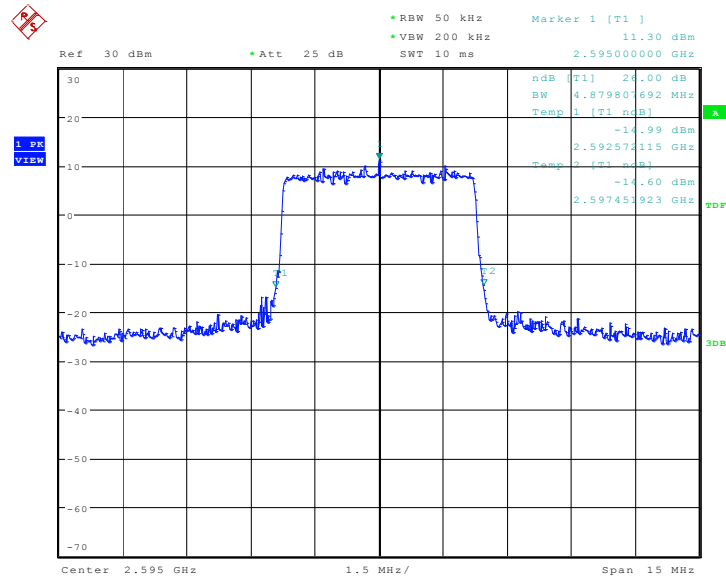

Date: 4.MAY.2018 13:22:09

LTE band 38, 5MHz Bandwidth, 16QAM (-26dBc BW)

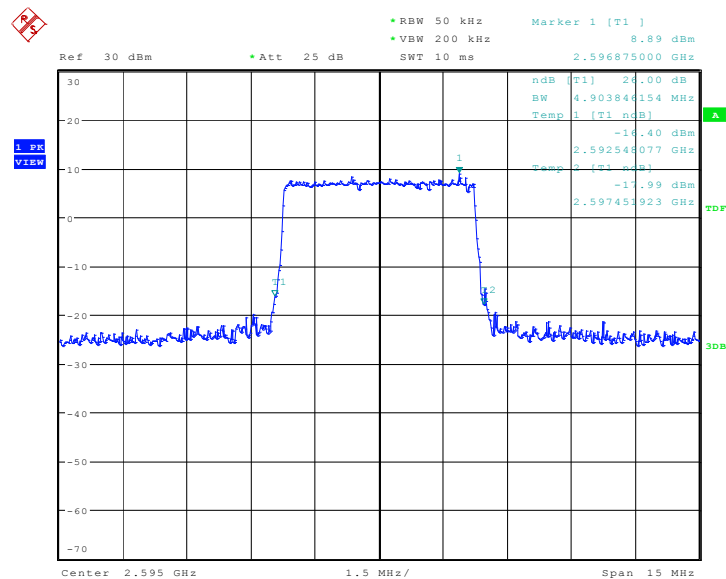


Date: 4.MAY.2018 13:22:26

LTE band 38, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2595.0	QPSK	16QAM
	9855.77	9759.62

LTE band 38, 10MHz Bandwidth, QPSK (-26dBc BW)

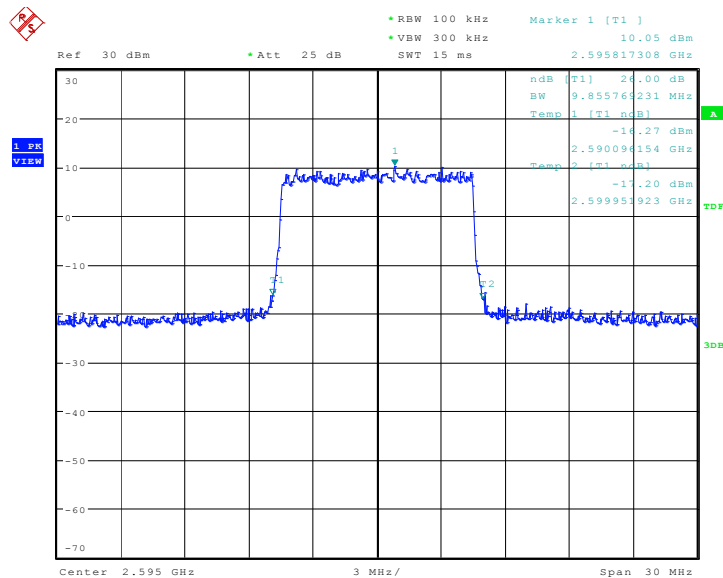

Date: 4.MAY.2018 13:03:11

LTE band 38, 10MHz Bandwidth, 16QAM (-26dBc BW)

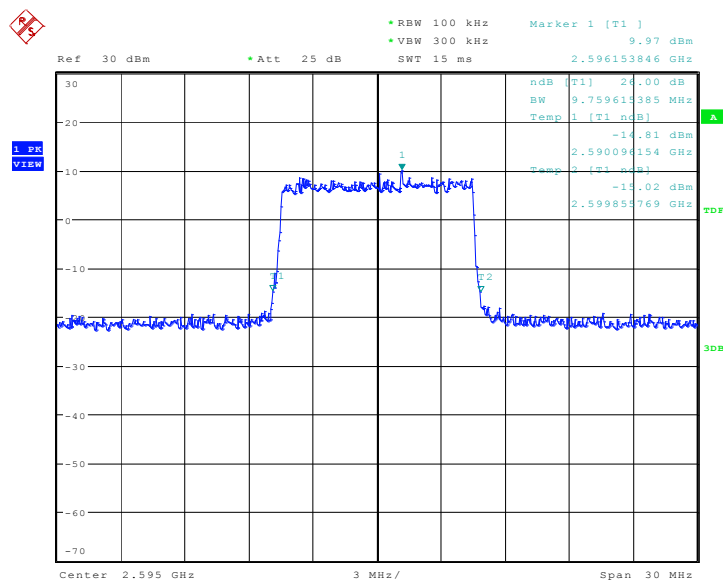


Date: 4.MAY.2018 13:03:28

LTE band 38, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2595.0	QPSK	16QAM
	14783.65	14783.65

LTE band 38, 15MHz Bandwidth, QPSK (-26dBc BW)

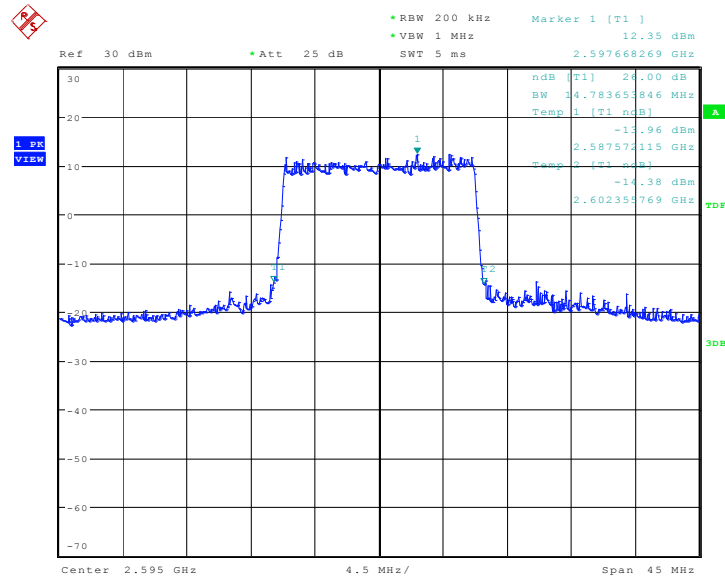

Date: 4.MAY.2018 13:58:28

LTE band 38, 15MHz Bandwidth, 16QAM (-26dBc BW)

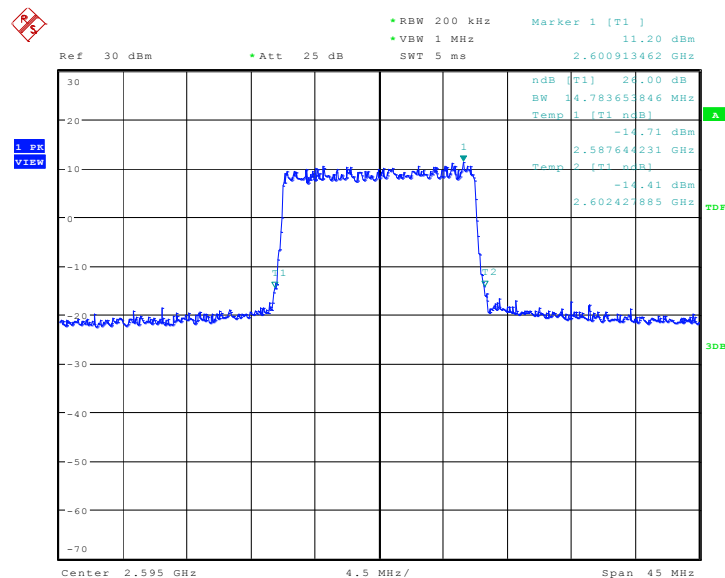


Date: 4.MAY.2018 13:58:45

LTE band 38, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2595.0	QPSK	16QAM
	19423.08	19807.69

LTE band 38, 20MHz Bandwidth, QPSK (-26dBc BW)

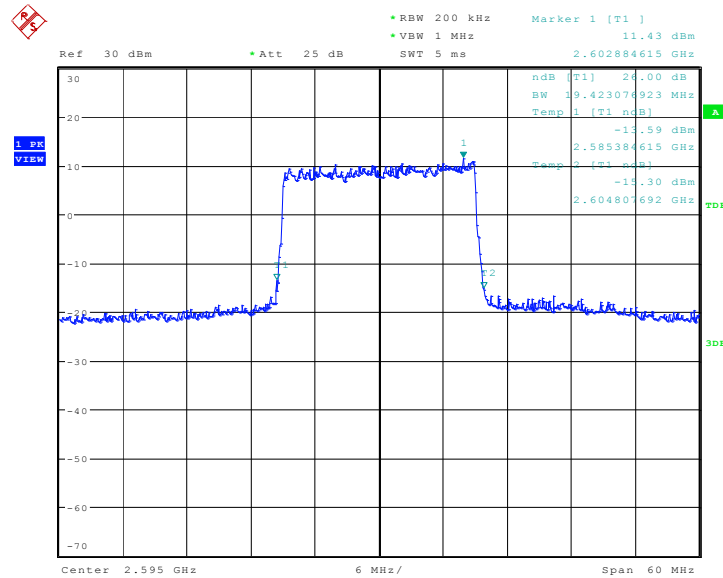

Date: 4.MAY.2018 13:18:20

LTE band 38, 20MHz Bandwidth, 16QAM (-26dBc BW)

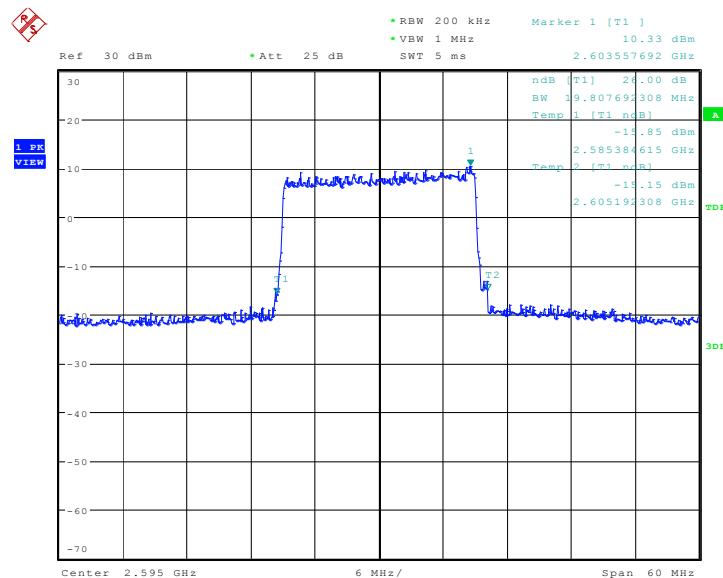

Date: 4.MAY.2018 13:18:37

A.6 BAND EDGE COMPLIANCE

A.6.1 Measurement limit

Part 22.917(b), 24.238(a), 27.53(h) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations


Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log(P)$ dB below 2288 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz.

A.6.2 Measurement result

Only worst case result is given below


LTE band 2

OBW: 1RB-low_offset

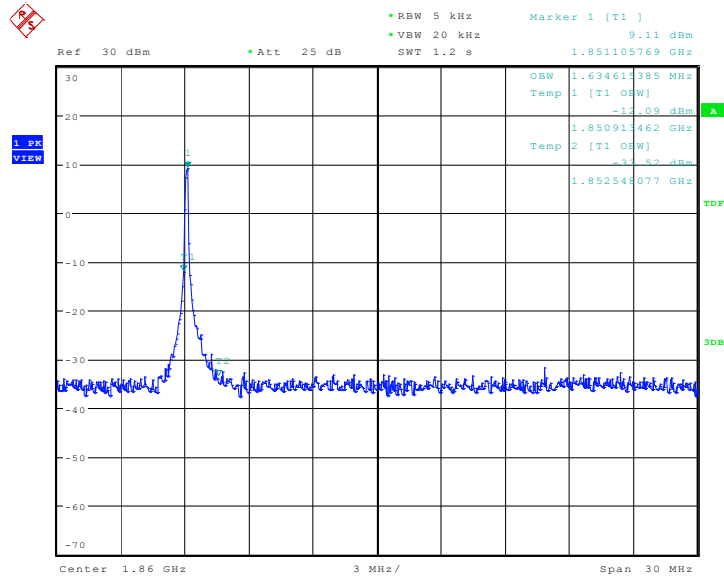


Date: 4.MAY.2018 10:28:17

LOW BAND EDGE BLOCK-1RB-low_offset

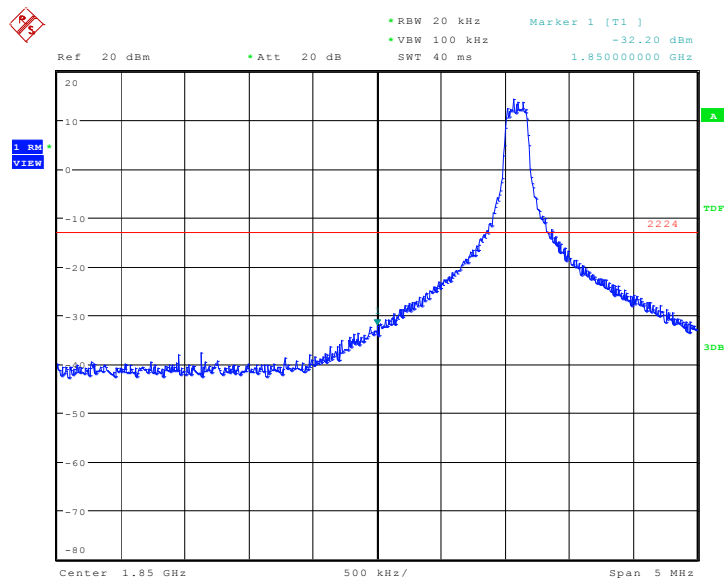


Date: 4.MAY.2018 10:29:10

OBW: 1RB-high_offset

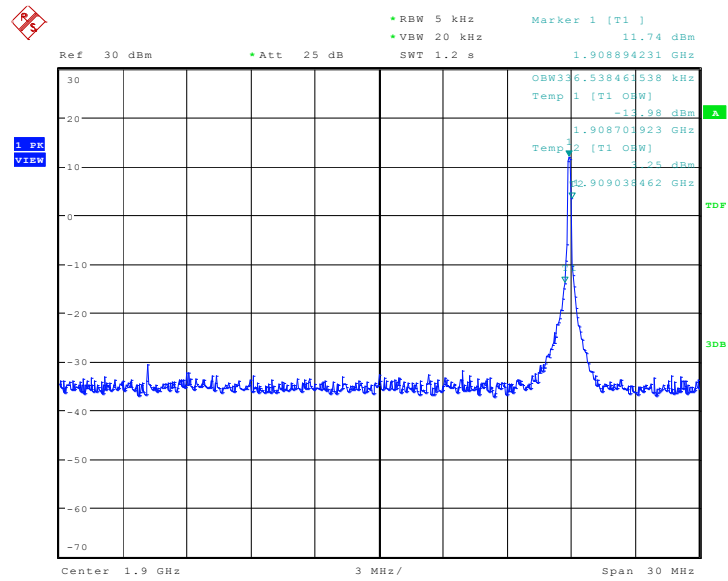


Date: 4.MAY.2018 10:10:12

HIGH BAND EDGE BLOCK-1RB-high_offset

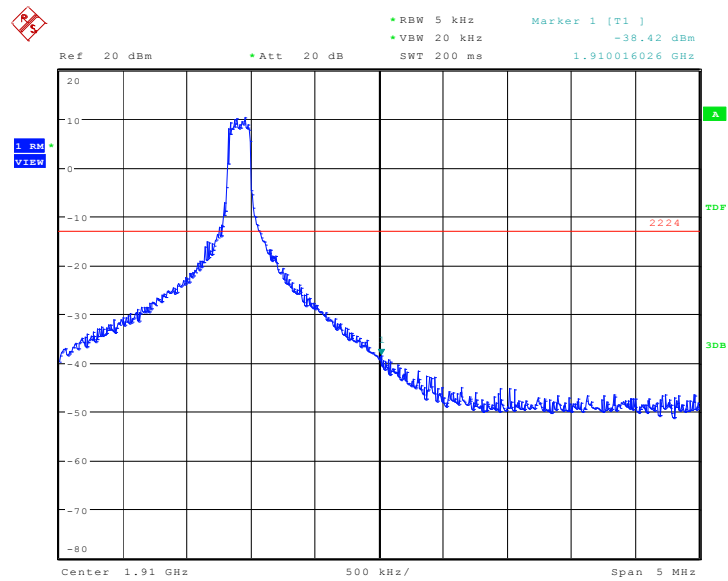


Date: 4.MAY.2018 10:11:06

LOW BAND EDGE BLOCK-20MHz-100%RB

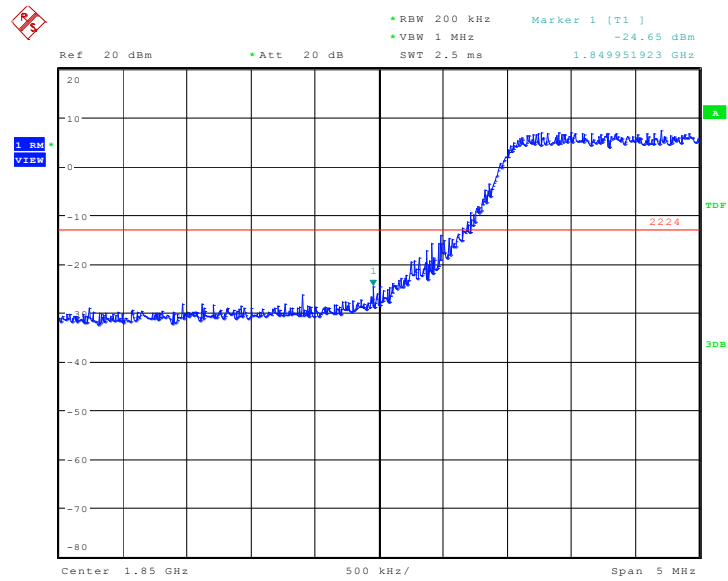


Date: 4.MAY.2018 14:43:19

HIGH BAND EDGE BLOCK-20MHz-100%RB

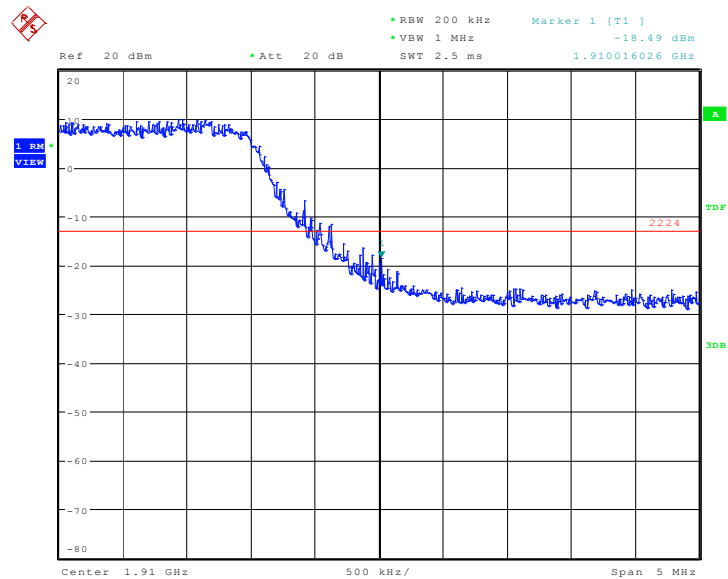


Date: 4.MAY.2018 14:44:14

LTE band 4
OBW: 1RB-low_offset

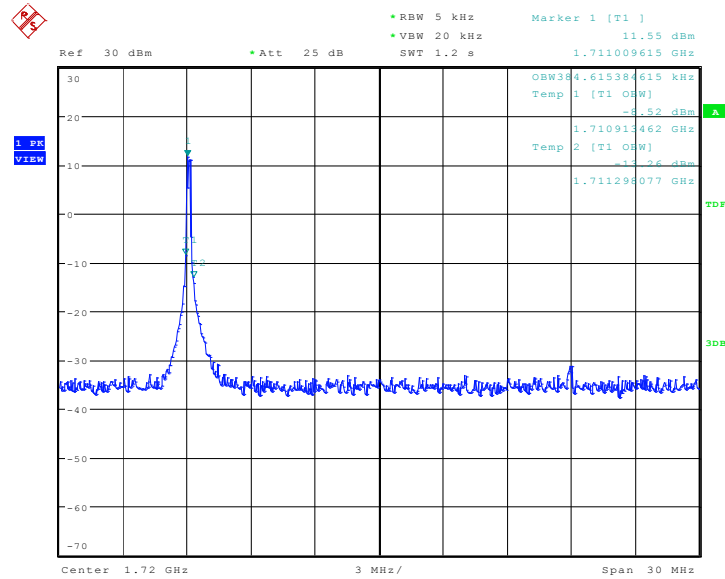


Date: 4.MAY.2018 10:30:08

LOW BAND EDGE BLOCK-1RB-low_offset

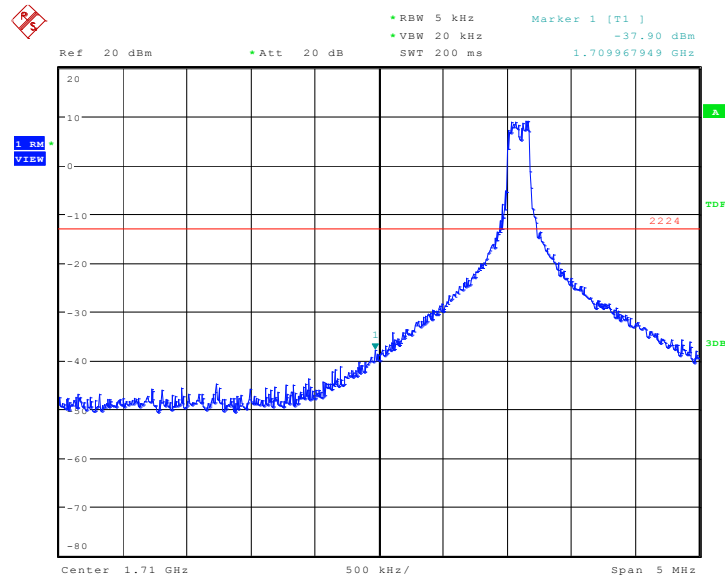


Date: 4.MAY.2018 10:31:01

OBW: 1RB-high_offset

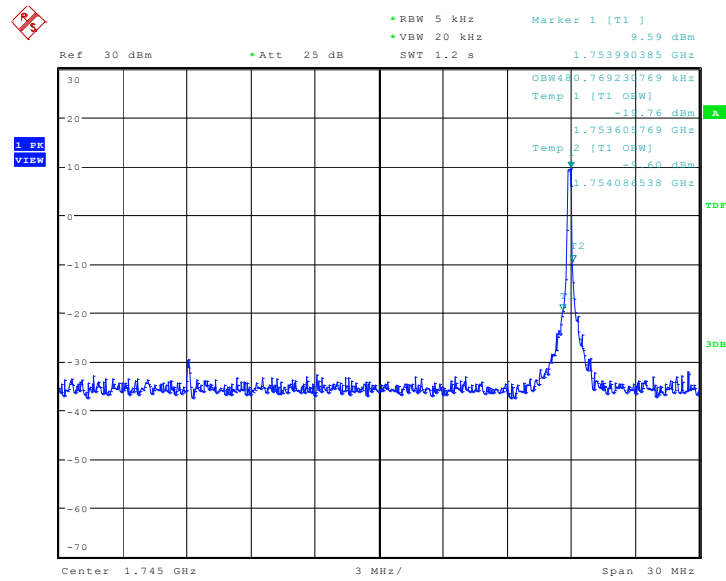


Date: 4.MAY.2018 10:12:06

HIGH BAND EDGE BLOCK-1RB-high_offset

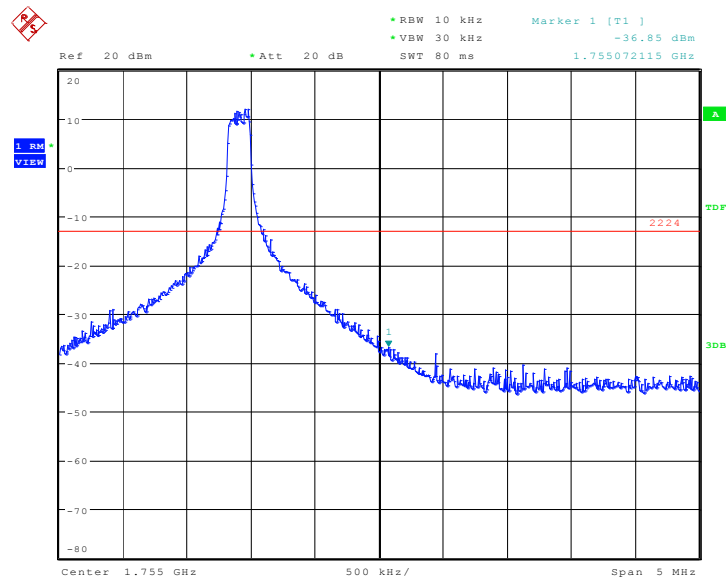


Date: 4.MAY.2018 10:12:57

LOW BAND EDGE BLOCK-20MHz-100%RB

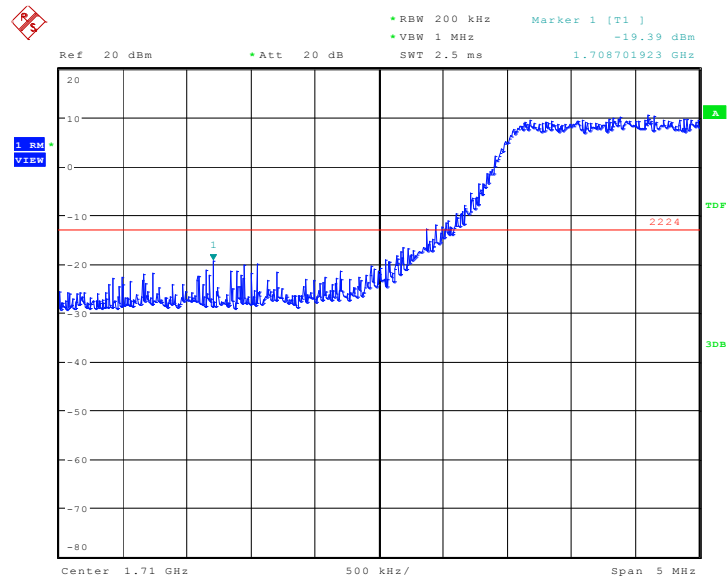


Date: 4.MAY.2018 14:45:11

HIGH BAND EDGE BLOCK-20MHz-100%RB

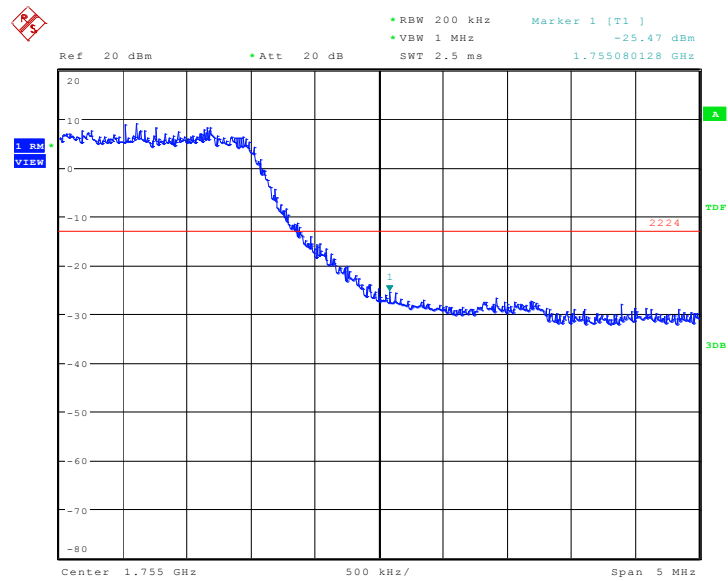


Date: 4.MAY.2018 14:46:07

LTE band 5
OBW: 1RB-low_offset

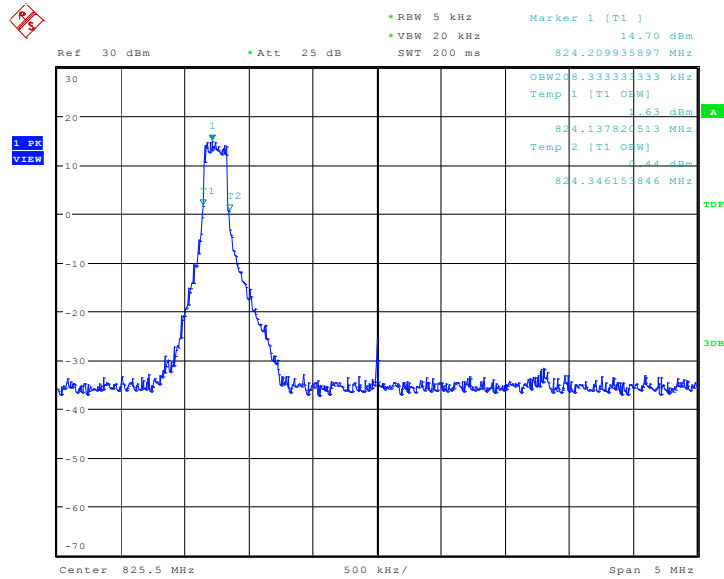


Date: 4.MAY.2018 10:41:25

LOW BAND EDGE BLOCK-1RB-low_offset

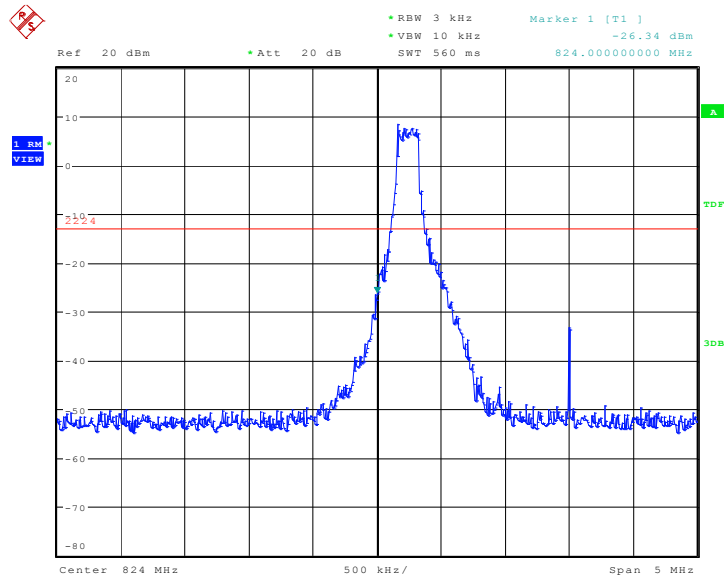


Date: 4.MAY.2018 10:42:16

OBW: 1RB-high_offset

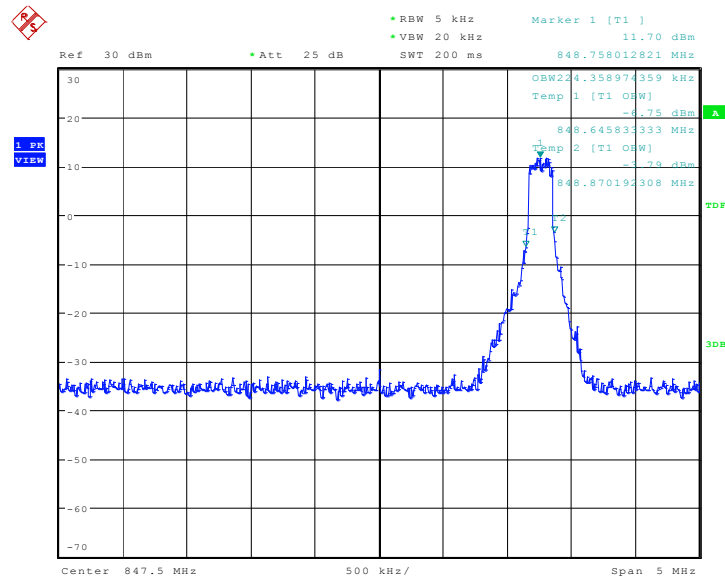


Date: 4.MAY.2018 10:17:35

HIGH BAND EDGE BLOCK-1RB-high_offset

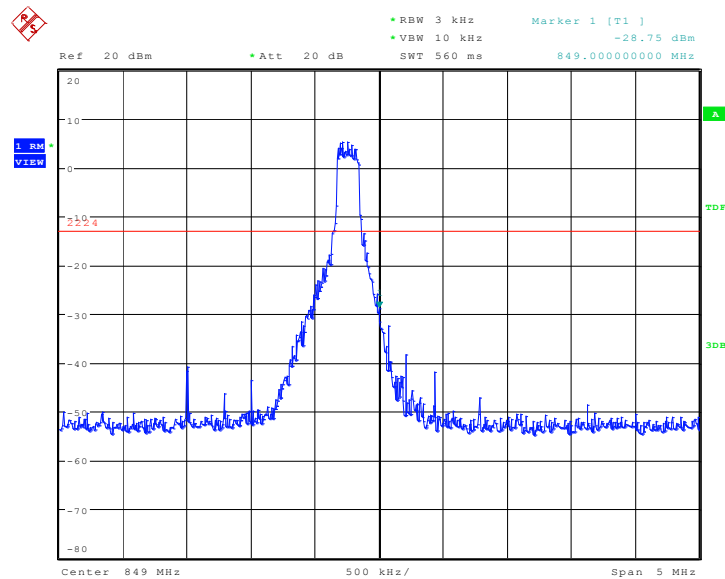


Date: 4.MAY.2018 10:18:28

LOW BAND EDGE BLOCK-10MHz-100%RB

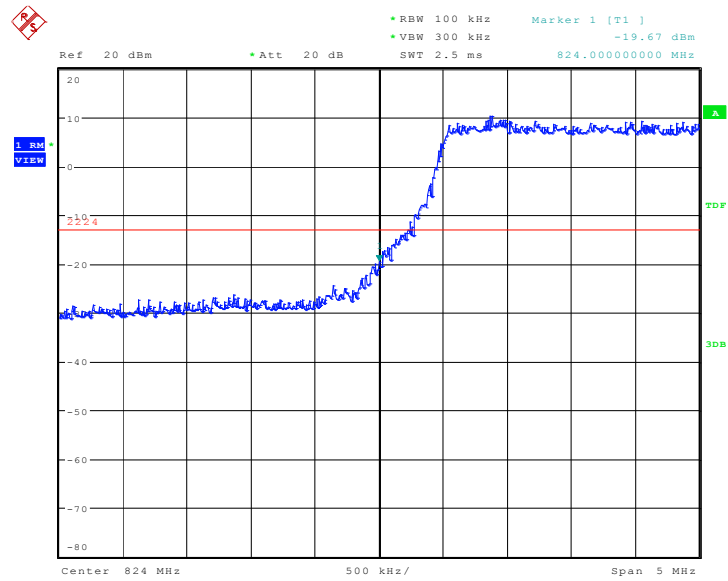


Date: 4.MAY.2018 14:48:18

HIGH BAND EDGE BLOCK-10MHz-100%RB

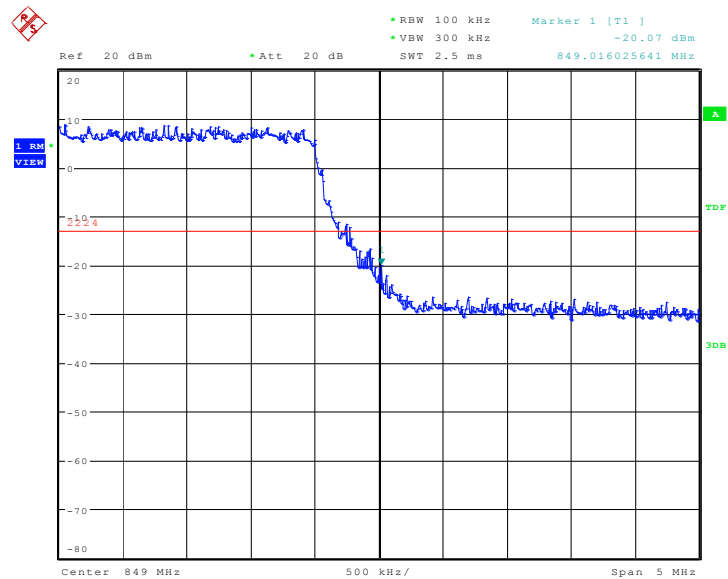


Date: 4.MAY.2018 14:49:14

LTE band 7
OBW: 1RB-low_offset

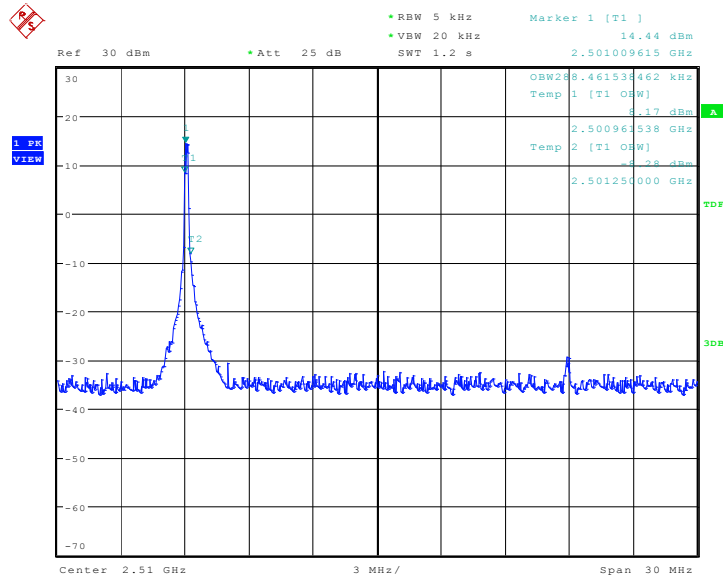


Date: 7.MAY.2018 15:53:20

LOW BAND EDGE BLOCK-1RB-low_offset

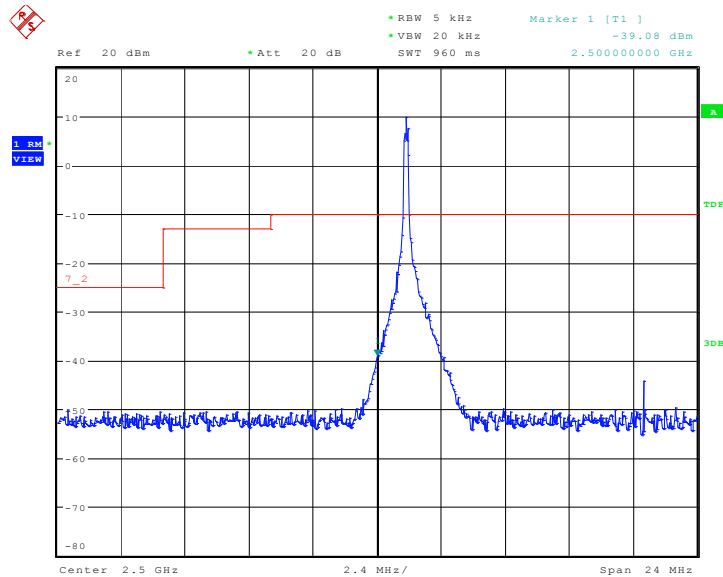


Date: 7.MAY.2018 15:54:06

OBW: 1RB-high_offset

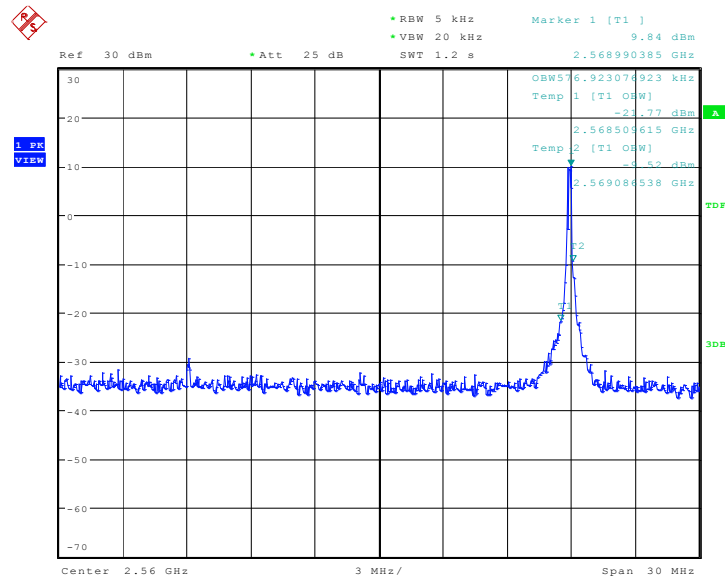


Date: 4.MAY.2018 10:14:24

HIGH BAND EDGE BLOCK-1RB-high_offset

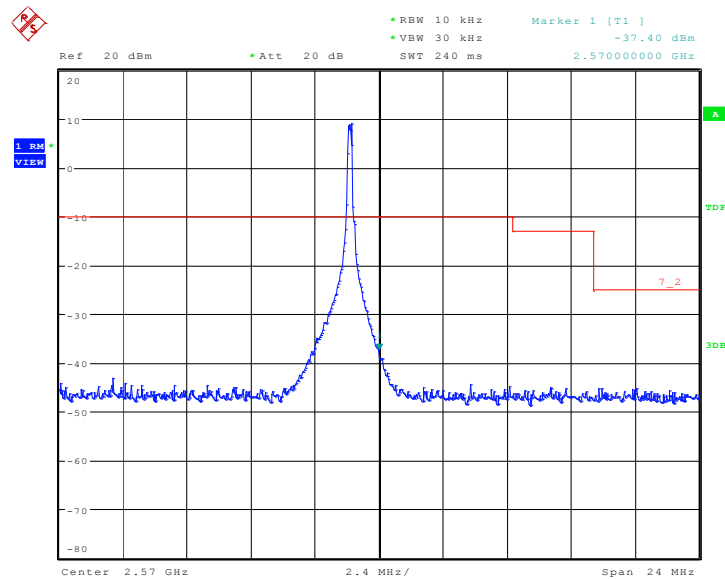


Date: 4.MAY.2018 10:15:16

LOW BAND EDGE BLOCK-20MHz-100%RB

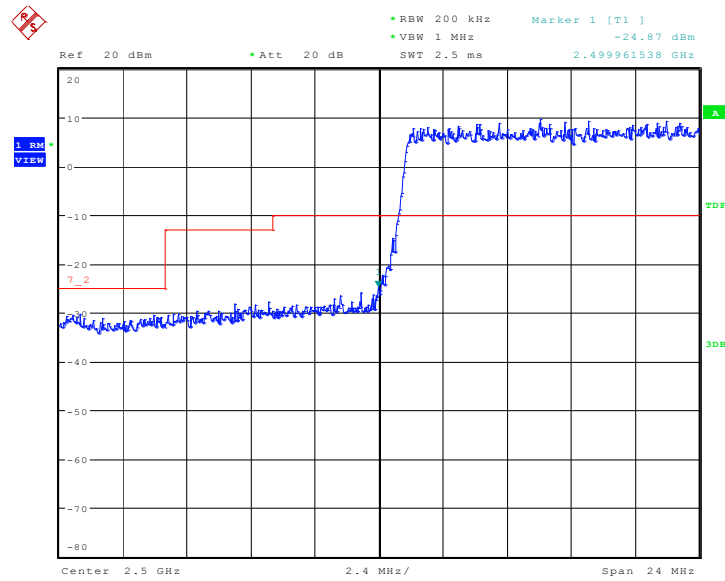


Date: 4.MAY.2018 14:41:26

HIGH BAND EDGE BLOCK-20MHz-100%RB

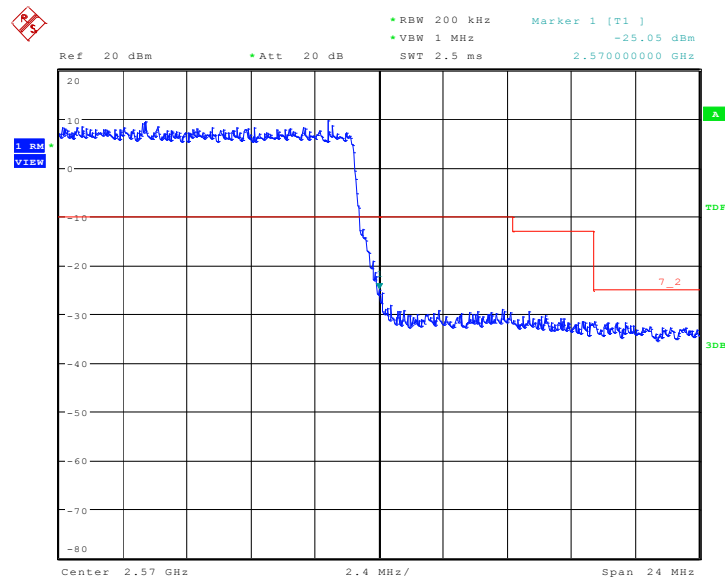


Date: 4.MAY.2018 14:42:22

LTE band 12
OBW: 1RB-low_offset

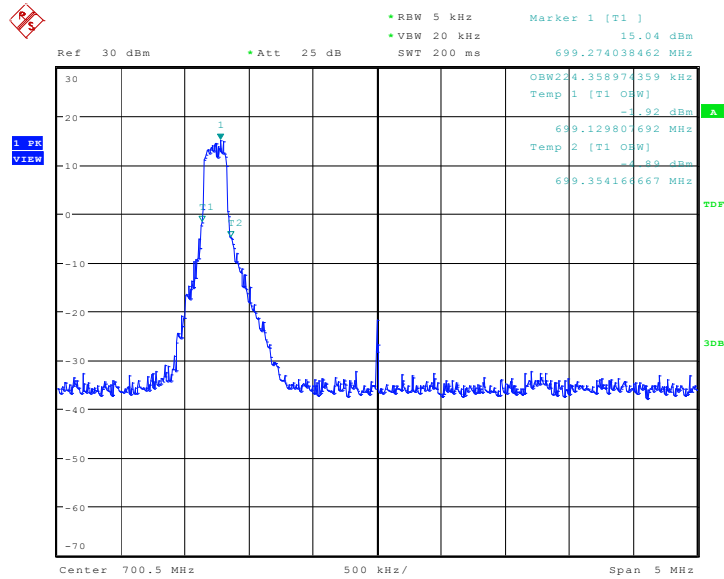


Date: 7.MAY.2018 15:51:26

LOW BAND EDGE BLOCK-1RB-low_offset

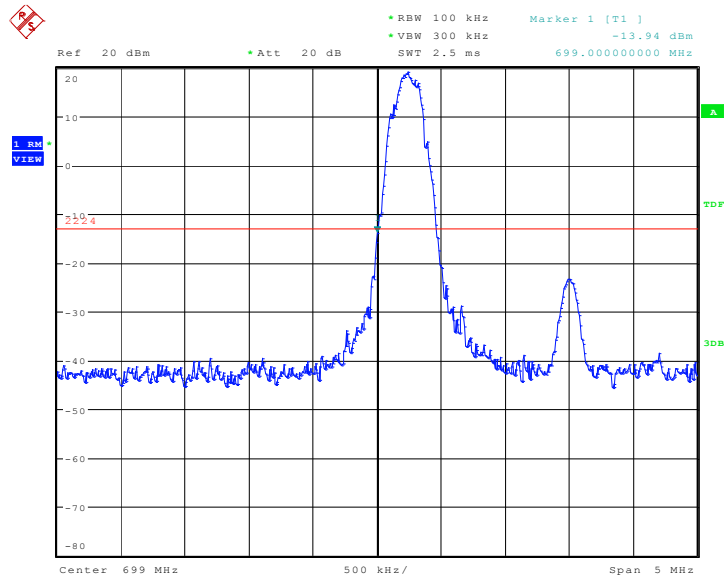


Date: 7.MAY.2018 15:52:10

OBW: 1RB-high_offset

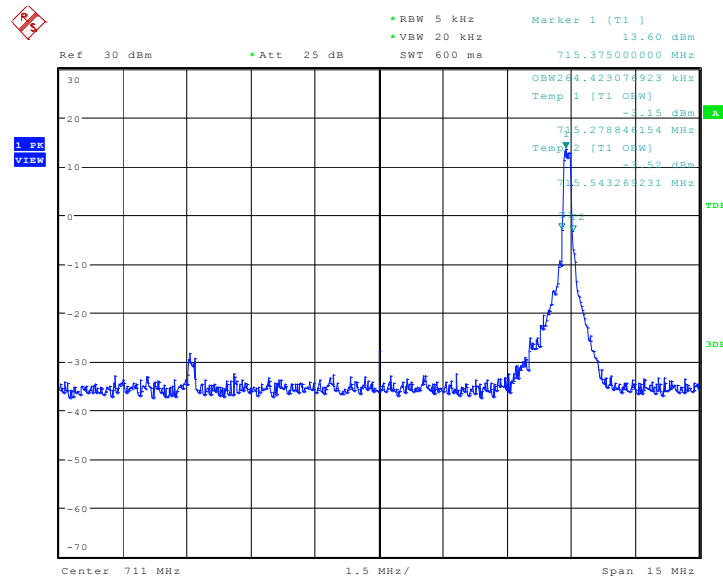


Date: 7.MAY.2018 15:46:29

HIGH BAND EDGE BLOCK-1RB-high_offset

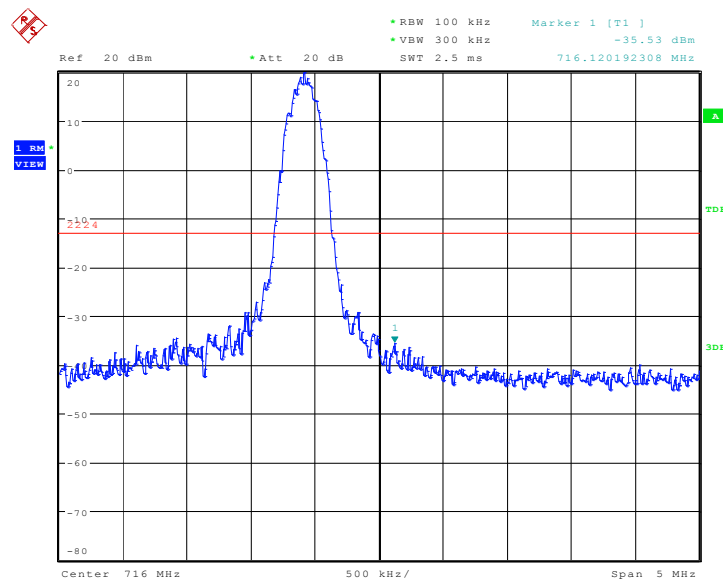


Date: 7.MAY.2018 15:47:14

LOW BAND EDGE BLOCK-10MHz-100%RB

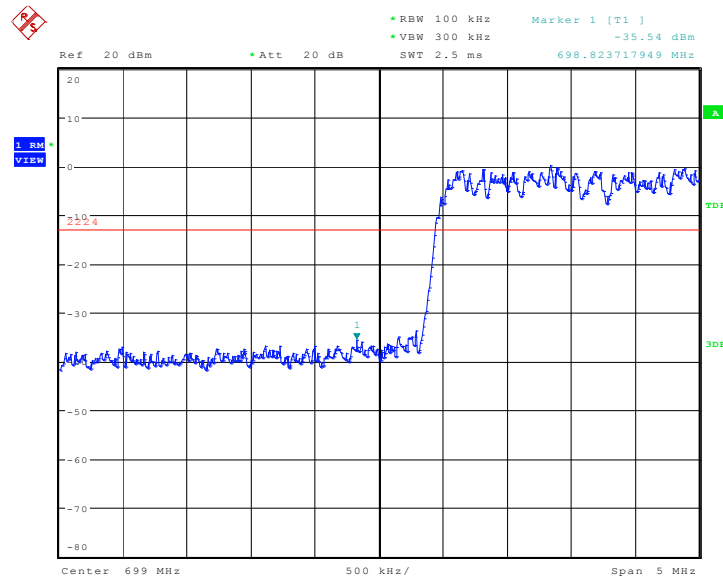


Date: 4.MAY.2018 14:50:13

HIGH BAND EDGE BLOCK-10MHz-100%RB

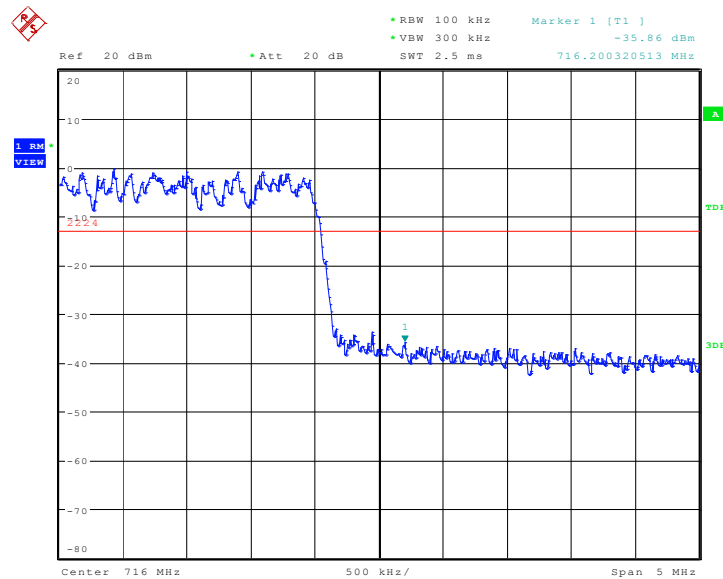


Date: 4.MAY.2018 14:51:08

LTE band 38
OBW: 1RB-low_offset

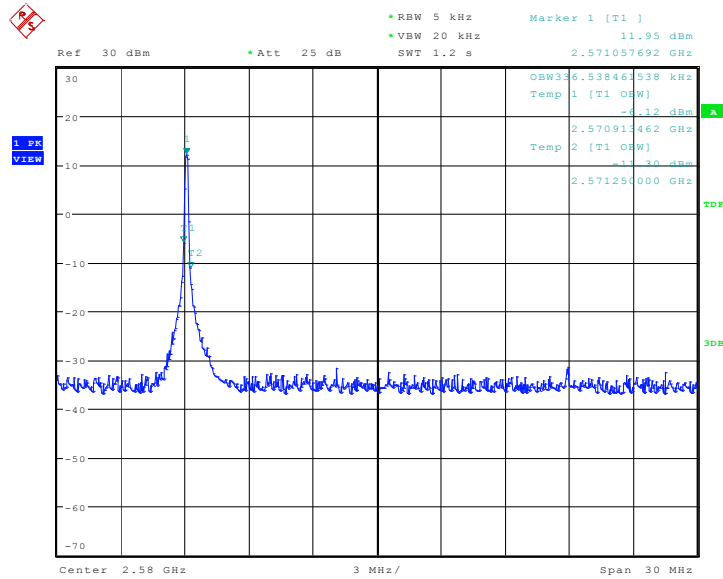


Date: 4.MAY.2018 14:23:55

LOW BAND EDGE BLOCK-1RB-low_offset

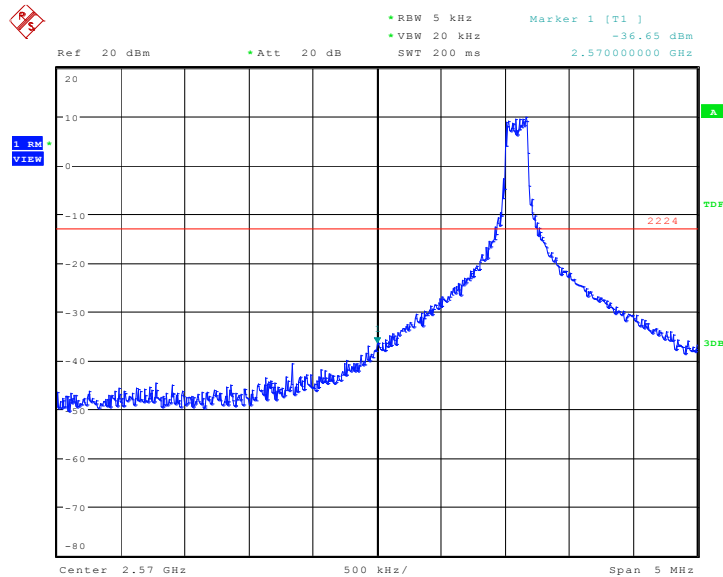


Date: 4.MAY.2018 14:24:48

OBW: 1RB-high_offset

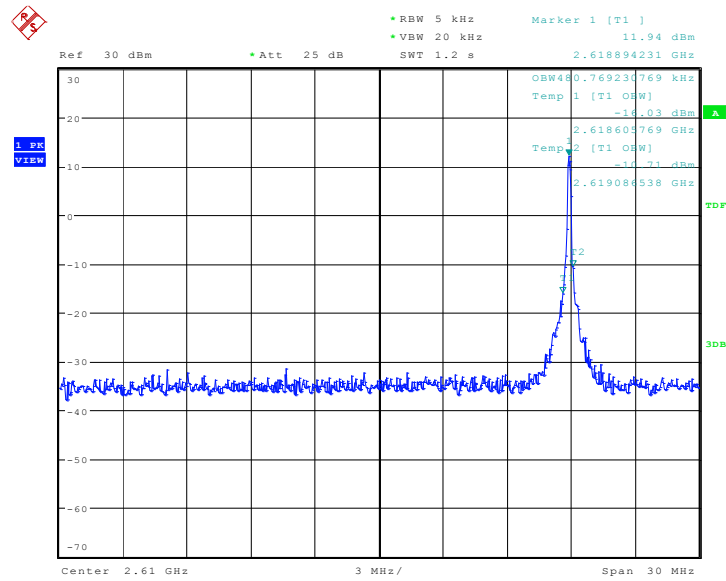


Date: 4.MAY.2018 14:21:47

HIGH BAND EDGE BLOCK-1RB-high_offset

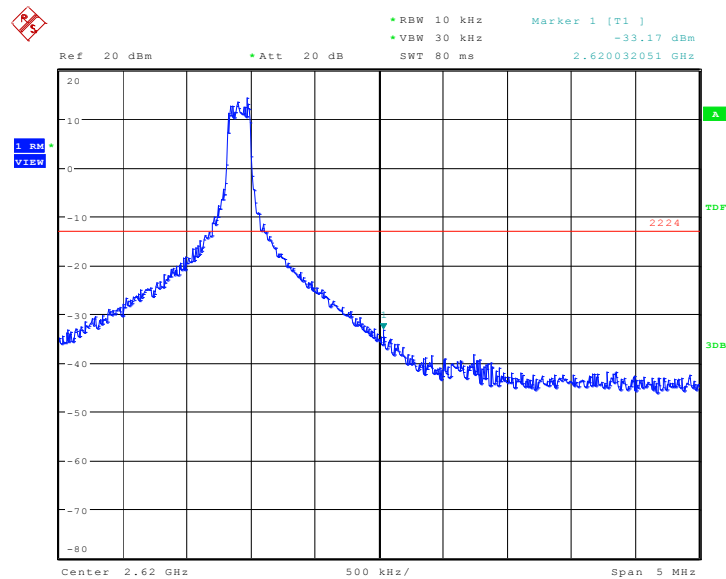


Date: 4.MAY.2018 14:22:39

LOW BAND EDGE BLOCK-20MHz-100%RB

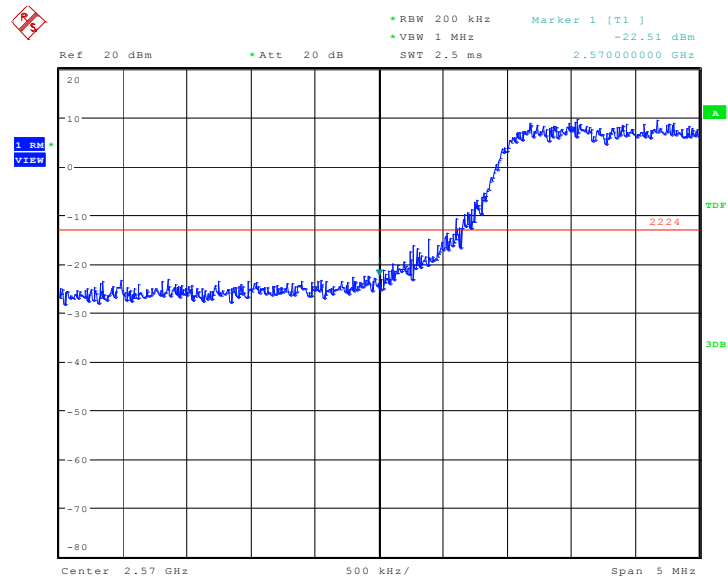

Date: 4.MAY.2018 14:26:45

HIGH BAND EDGE BLOCK-20MHz-100%RB

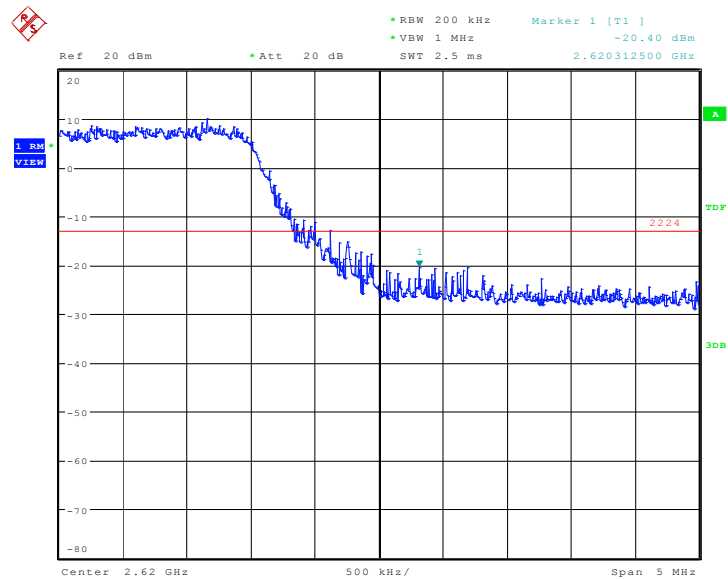

Date: 4.MAY.2018 14:27:39

A.7 CONDUCTED SPURIOUS EMISSION

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log(P)$ dB below 2288 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz.

A. 7.3 Measurement result

Only worst case result is given below

LTE band 2: 30MHz – 20GHz


Spurious emission limit –13dBm.

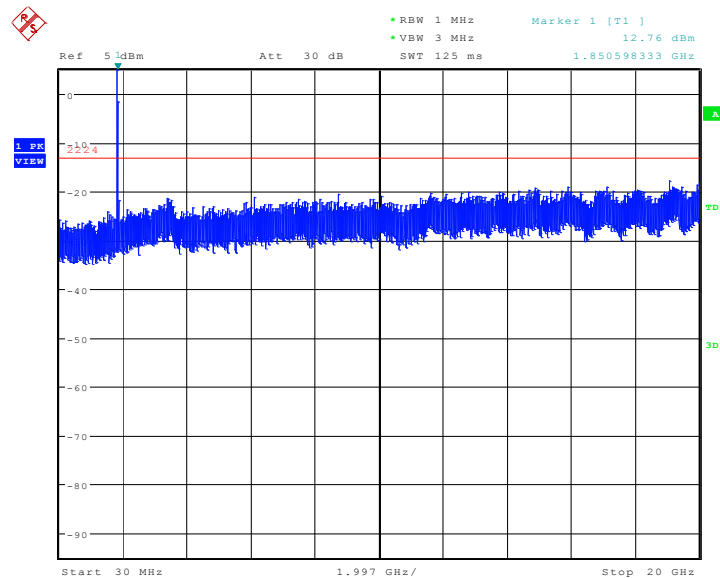

Date: 4.MAY.2018 10:47:39

LTE band 4: 30MHz – 20GHz


Spurious emission limit –13dBm.

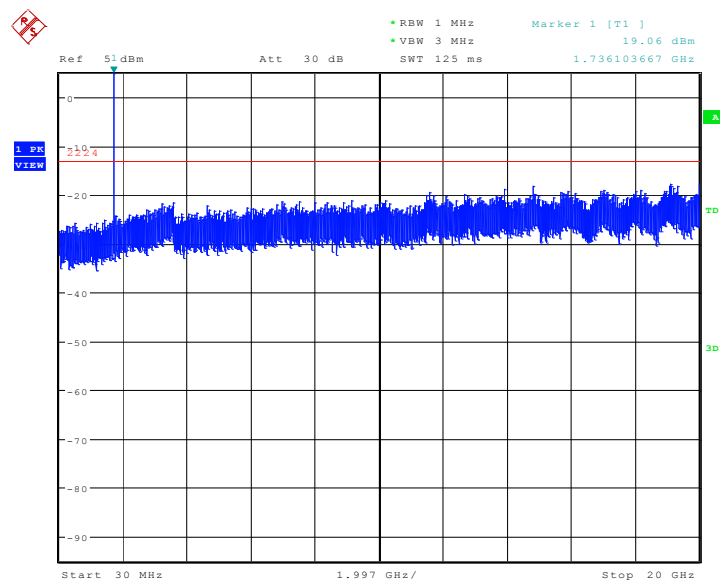

Date: 4.MAY.2018 14:39:12

LTE band 5: 30MHz – 10GHz


Spurious emission limit –13dBm.

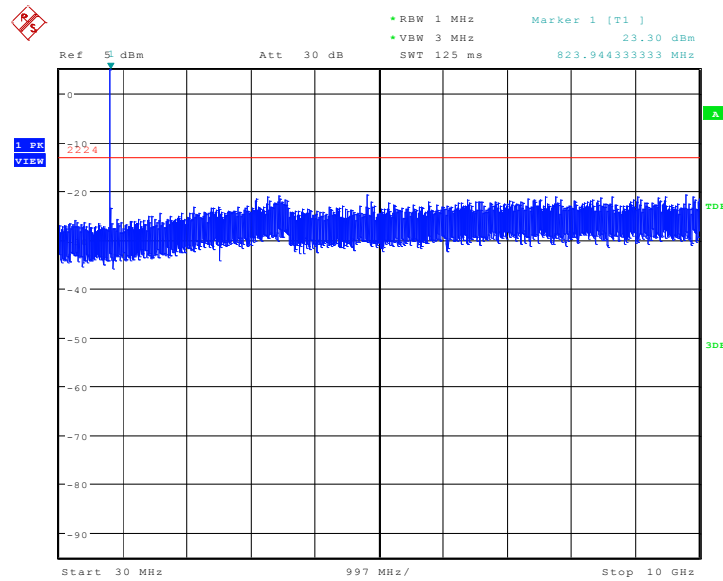

Date: 4.MAY.2018 14:33:39

LTE band 7: 30MHz – 26GHz


Spurious emission limit –13dBm.

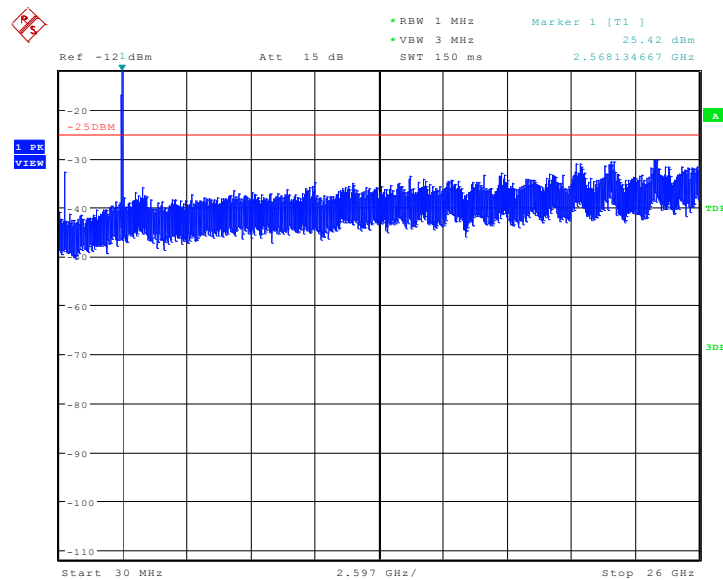

Date: 4.MAY.2018 14:35:55

LTE band 12: 30MHz – 10GHz


Spurious emission limit –13dBm.

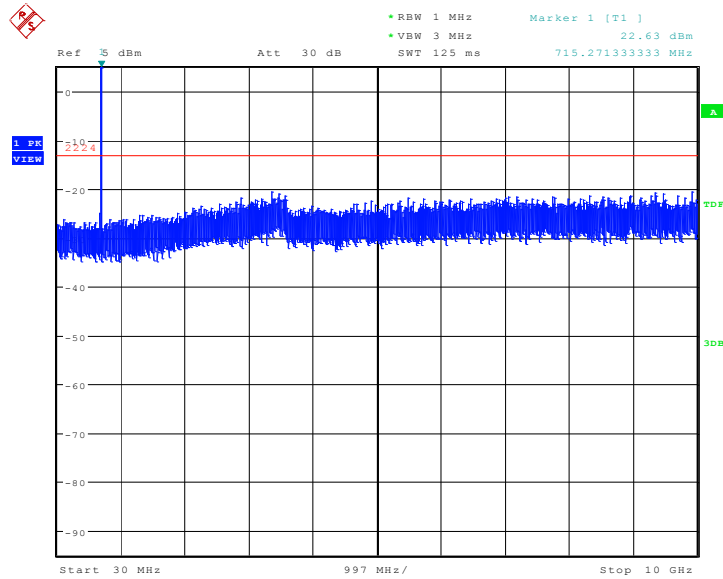

Date: 4.MAY.2018 14:37:09

LTE band 38: 30MHz – 26GHz

Spurious emission limit –13dBm.

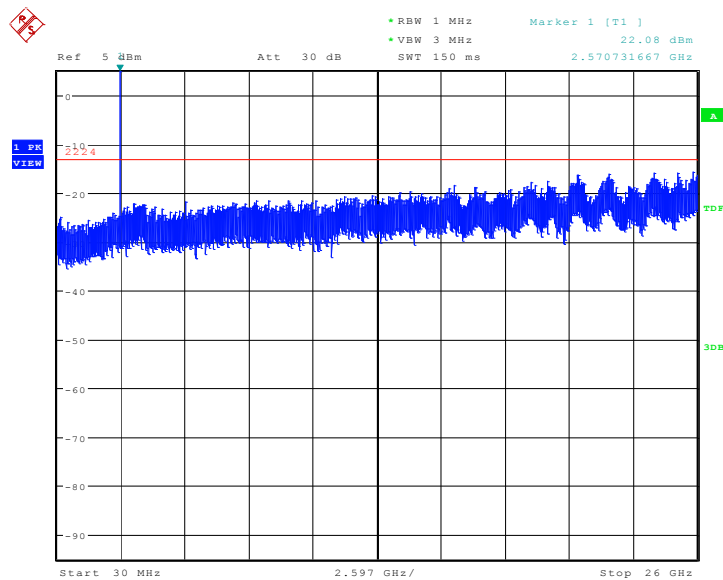

Date: 4.MAY.2018 14:29:23

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232 (d), 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

LTE band 2, 20MHz

Frequency(MHz)	PAPR(dB)	
1860.0	QPSK	16QAM
	6.99	7.66

LTE band 4, 20MHz

Frequency(MHz)	PAPR(dB)	
1745.0	QPSK	16QAM
	6.96	7.60

LTE band 7, 20MHz

Frequency(MHz)	PAPR(dB)	
2510.0	QPSK	16QAM
	7.15	7.53

LTE band 12,10MHz

Frequency(MHz)	PAPR(dB)	
707.5	QPSK	16QAM
	5.71	6.44



LTE band 38, 5MHz

Frequency(MHz)	PAPR(dB)	
	QPSK	16QAM
2595.0	6.89	7.72

ANNEX B: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP[®] Certificate of Accreditation to ISO/IEC 17025:2005 NVLAP LAB CODE: 600118-0 Telecommunication Technology Labs, CAICT Beijing China <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i> Electromagnetic Compatibility & Telecommunications <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i> <table><tr><td> 2017-08-22 through 2018-09-30 <i>Effective Dates</i> </td><td></td><td> <i>For the National Voluntary Laboratory Accreditation Program</i> </td></tr></table>		2017-08-22 through 2018-09-30 <i>Effective Dates</i>		 <i>For the National Voluntary Laboratory Accreditation Program</i>
2017-08-22 through 2018-09-30 <i>Effective Dates</i>		 <i>For the National Voluntary Laboratory Accreditation Program</i>		

*****END OF REPORT*****