



No. I19Z62142-SEM01

For

HMD Global Oy

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model name: TA-1207

With

Hardware Version: 89572_1_12

Software Version: 000T_0_110

FCC ID: 2AJOTTA-1207

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

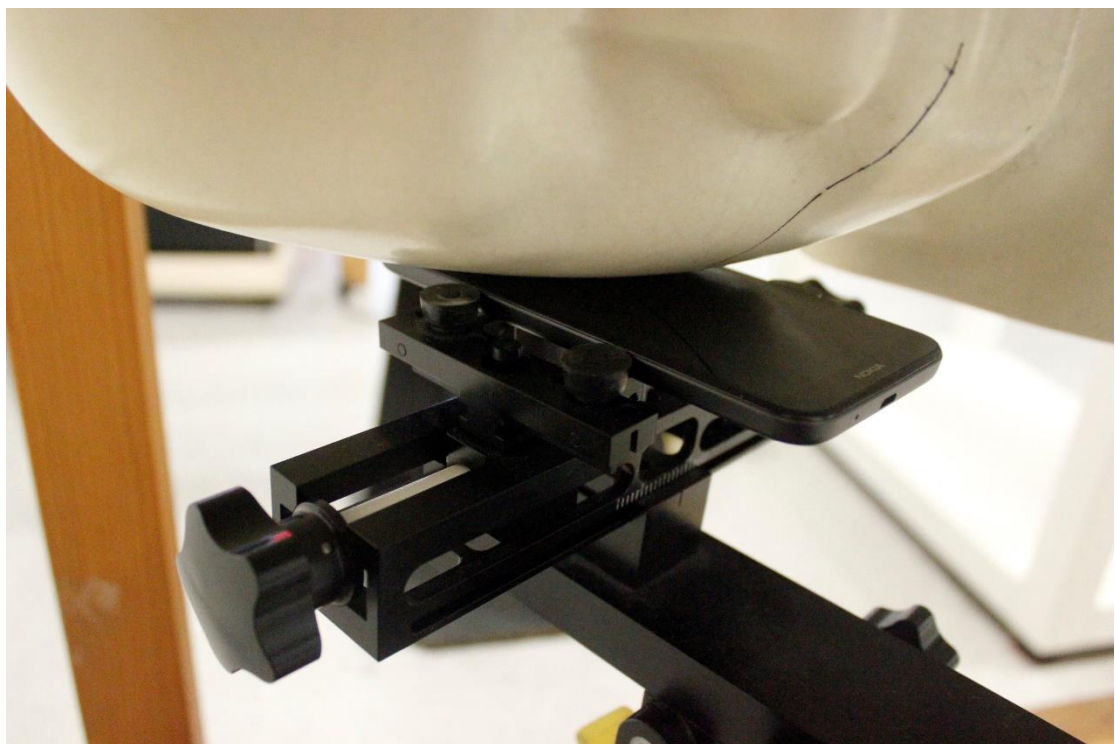


Picture 2: Left Hand Touch Cheek Position

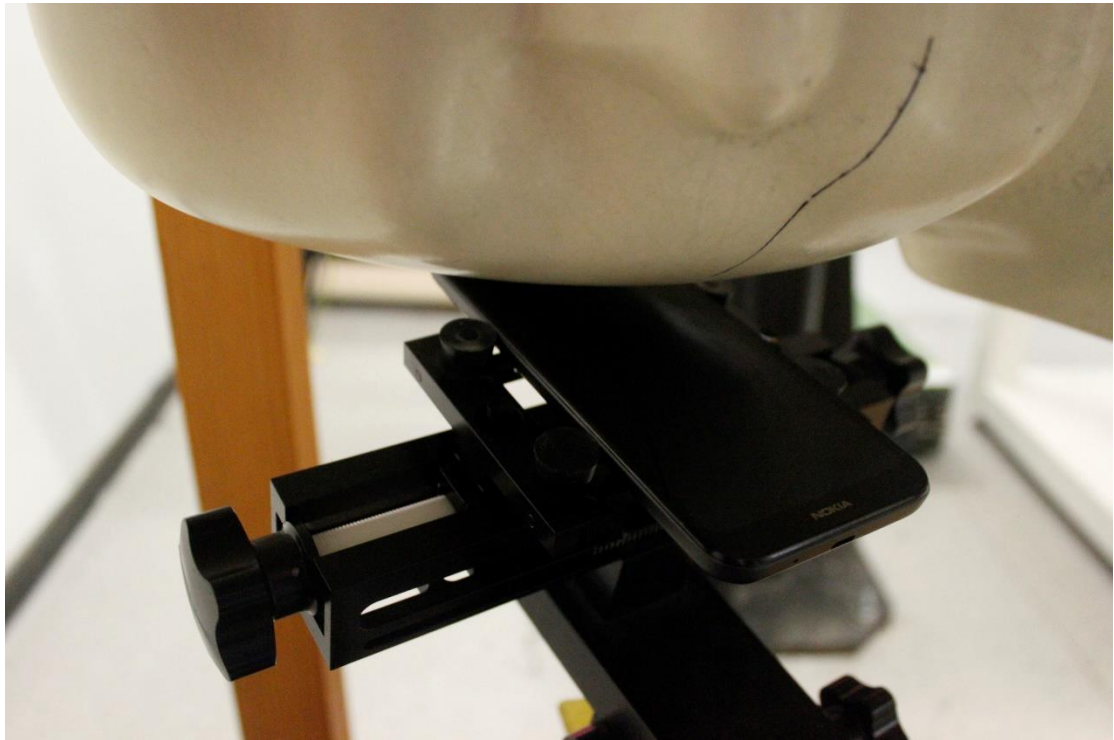

Picture 3: Left Hand Tilt 15° Position

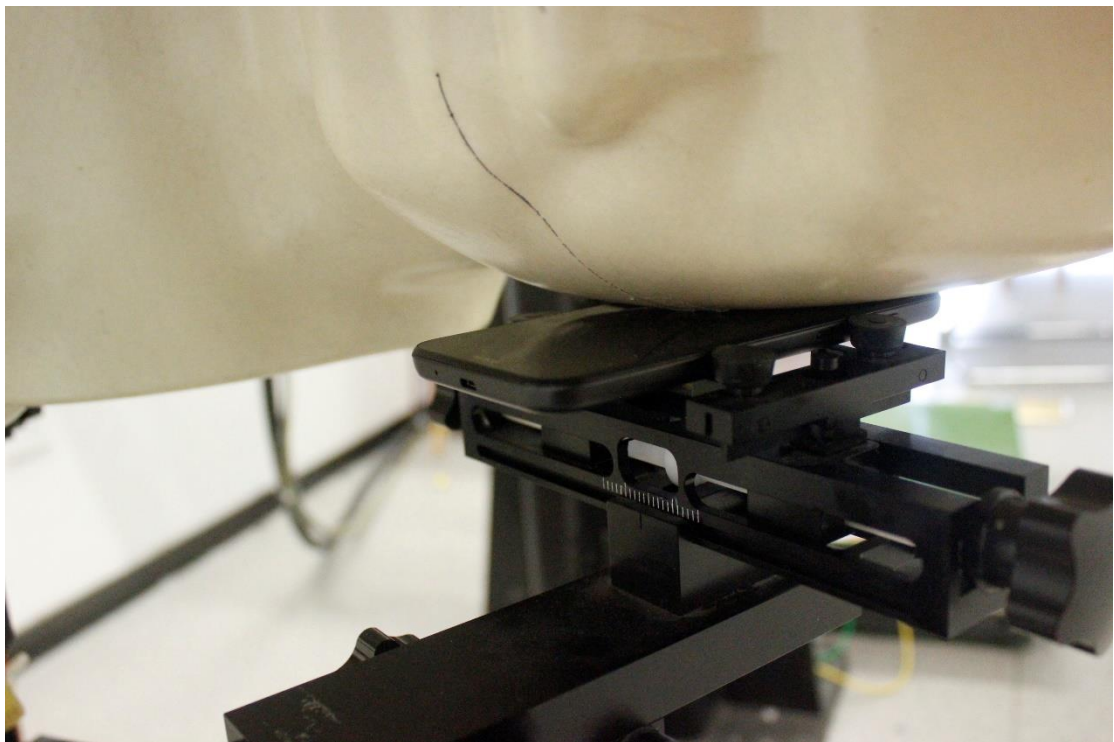


Picture 4: Right Hand Touch Cheek Position

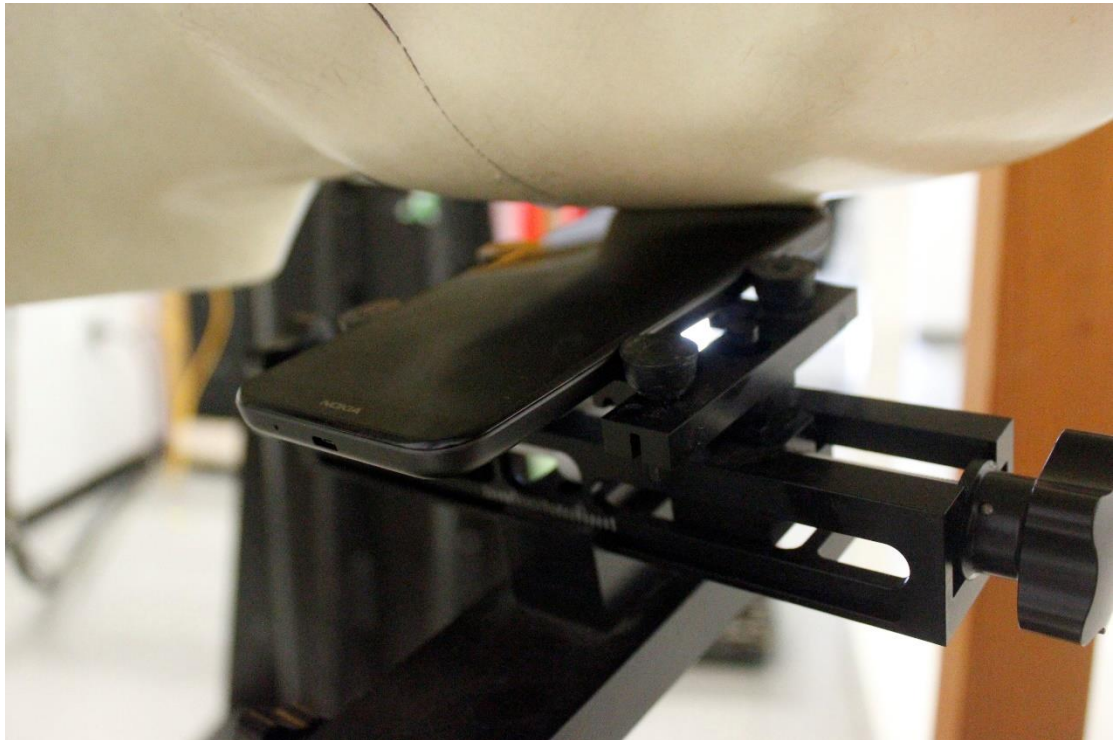


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =10/17mm between the EUT and the phantom bottom:

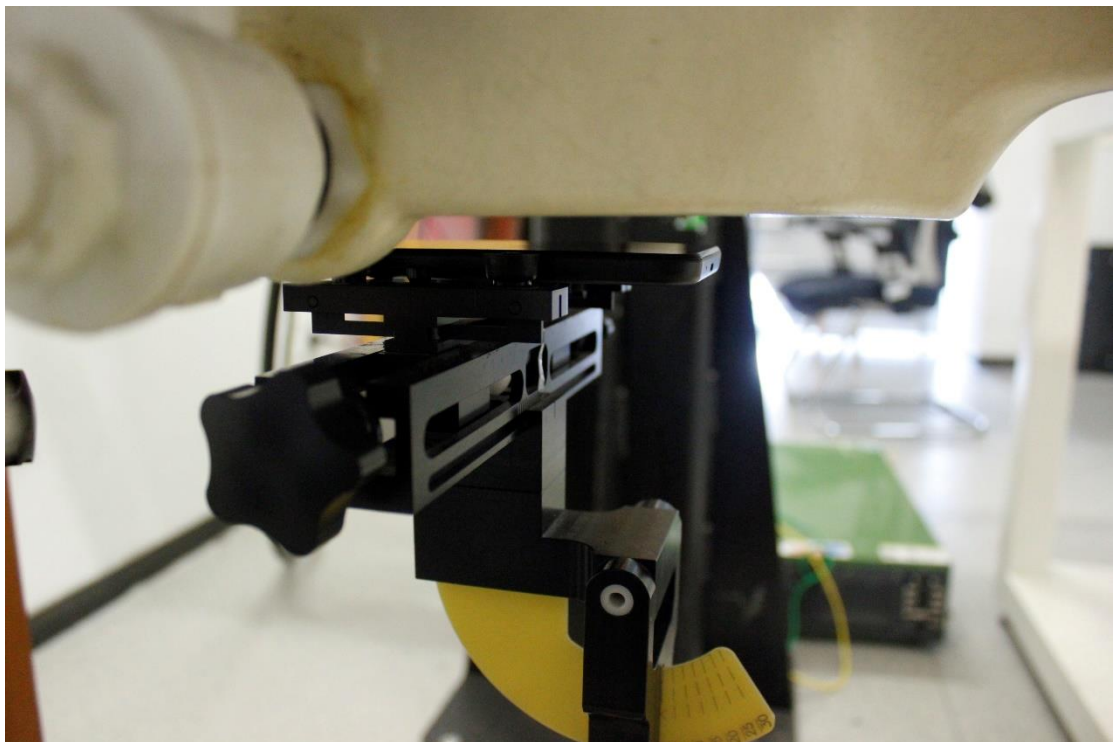


Picture 6: Front 10mm

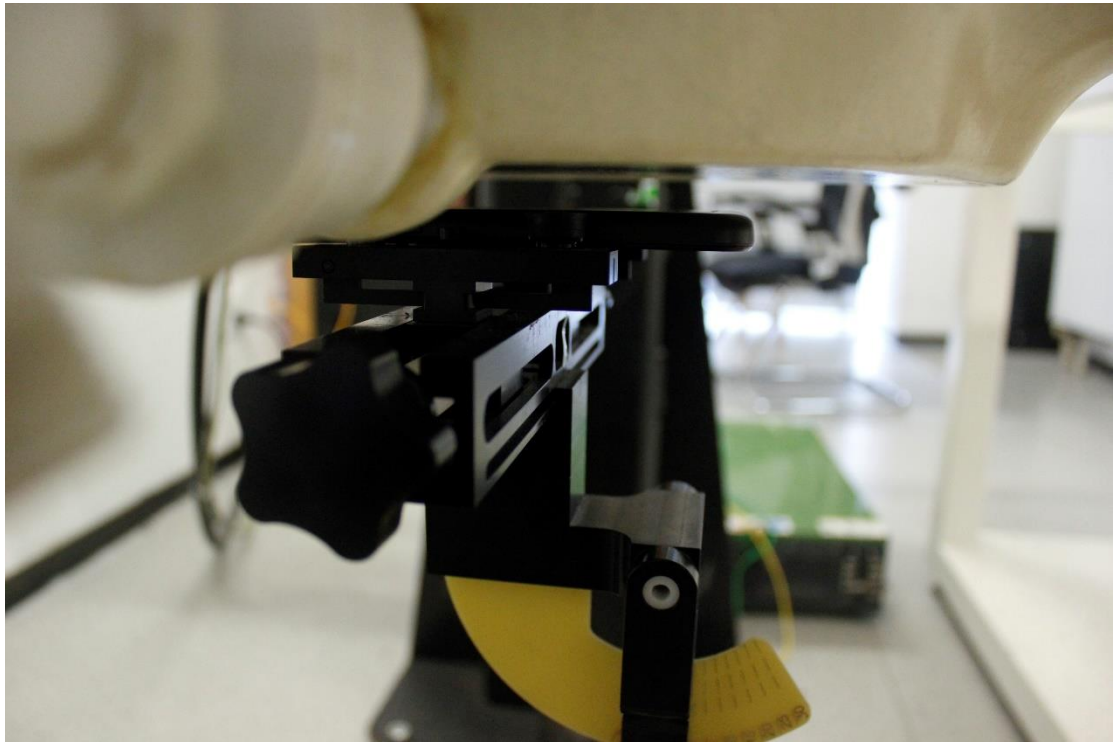


Picture 7: Rear 10mm

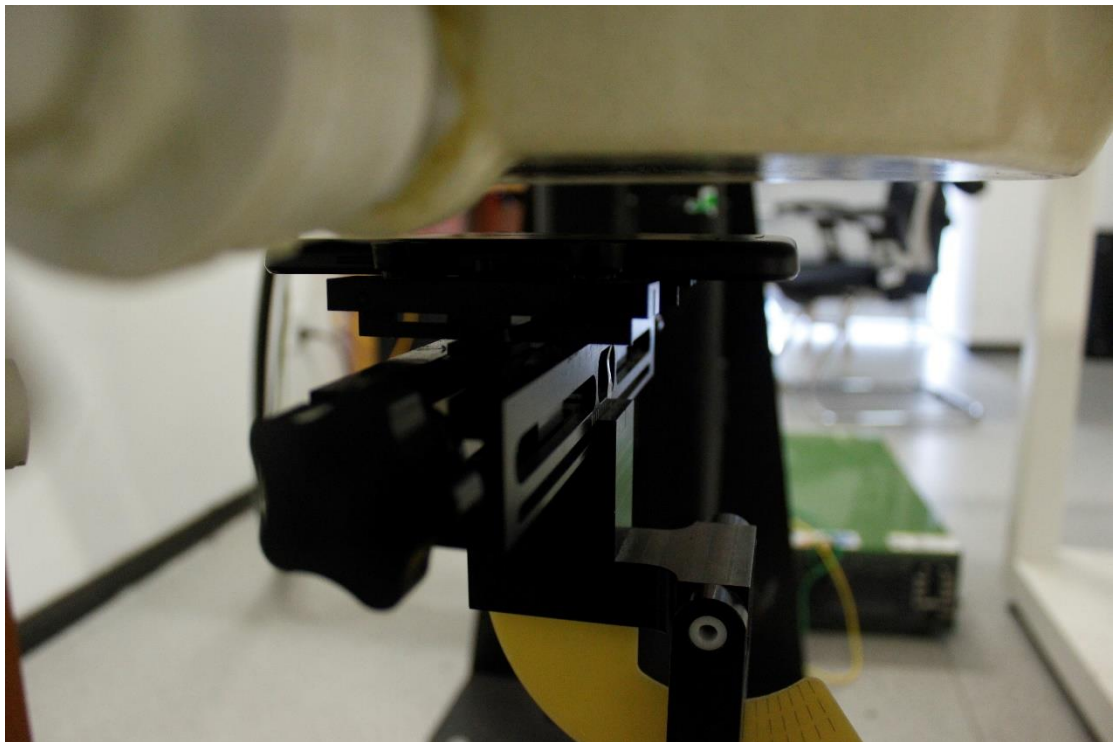


Picture 8: Rear 17mm

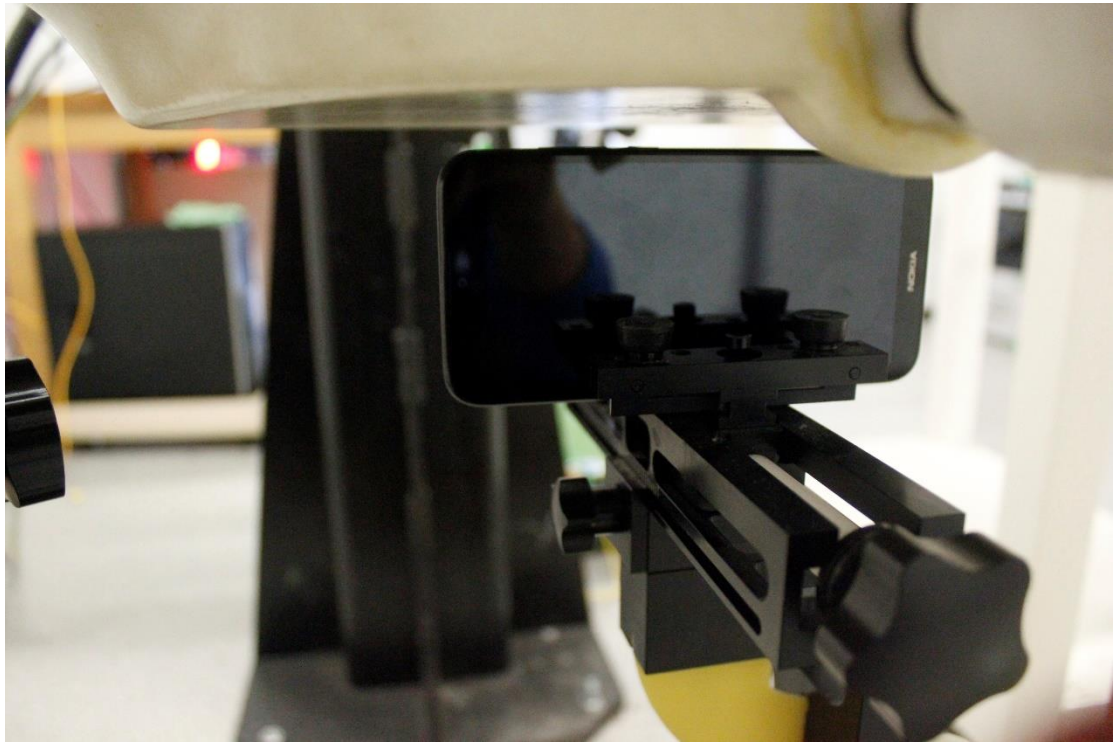


Picture 9: Left 10mm

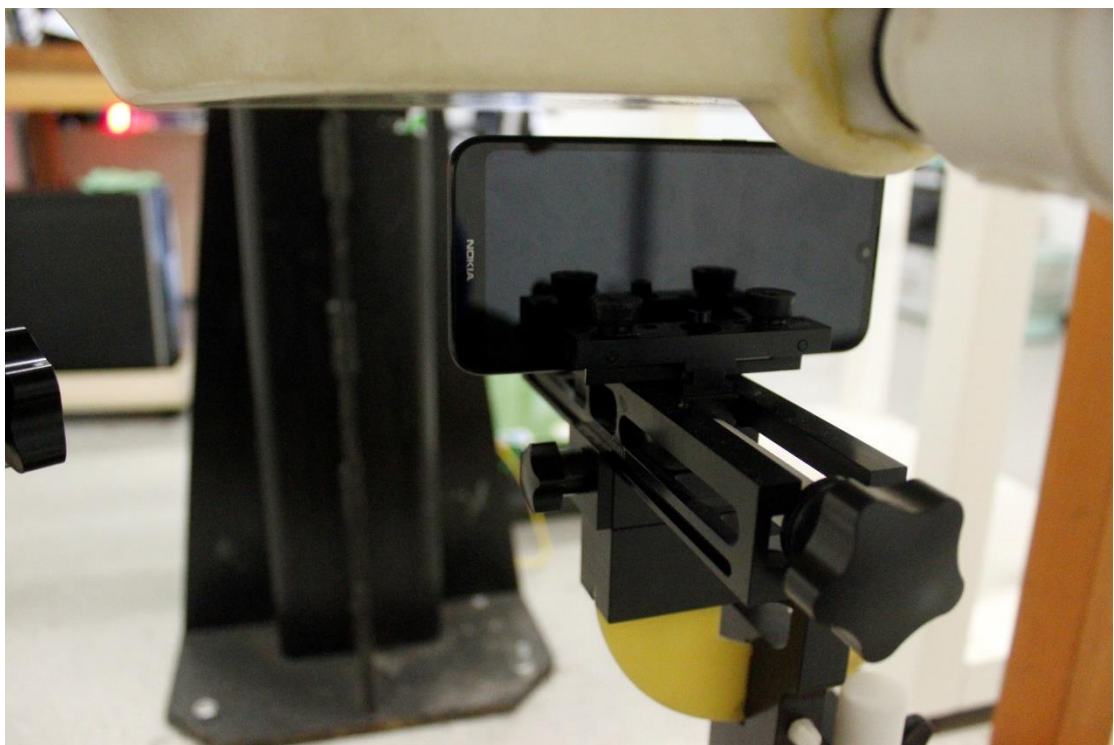


Picture 10: Right 10mm

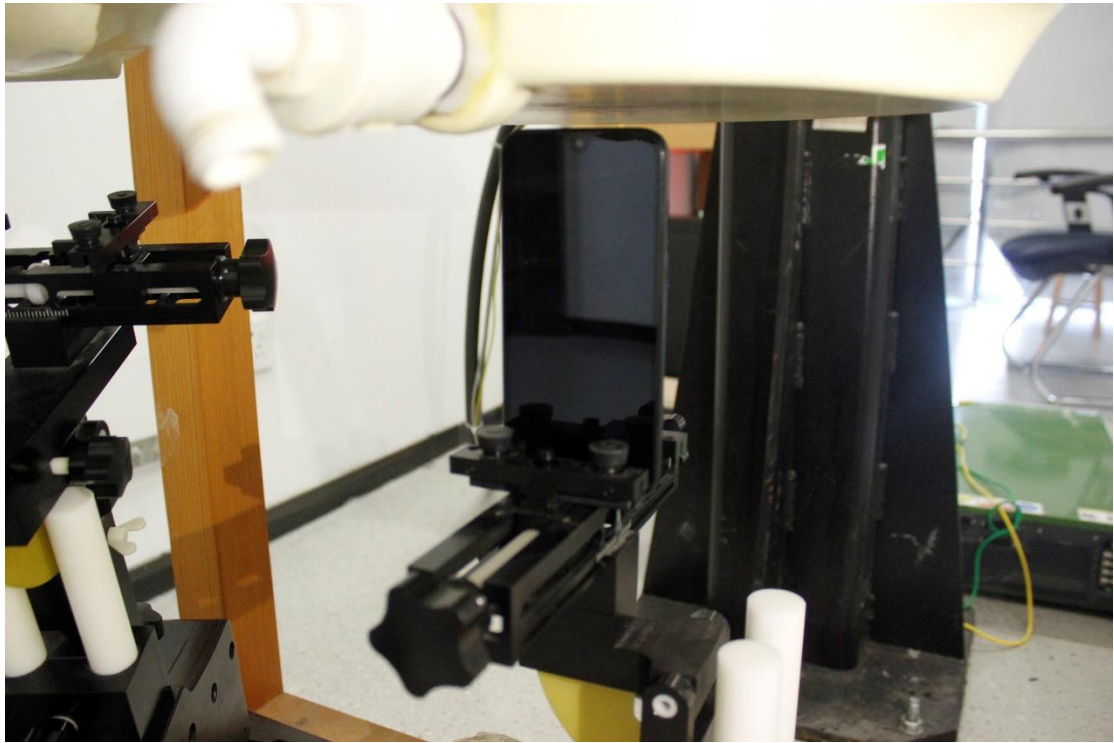

Picture 11: Top 10mm

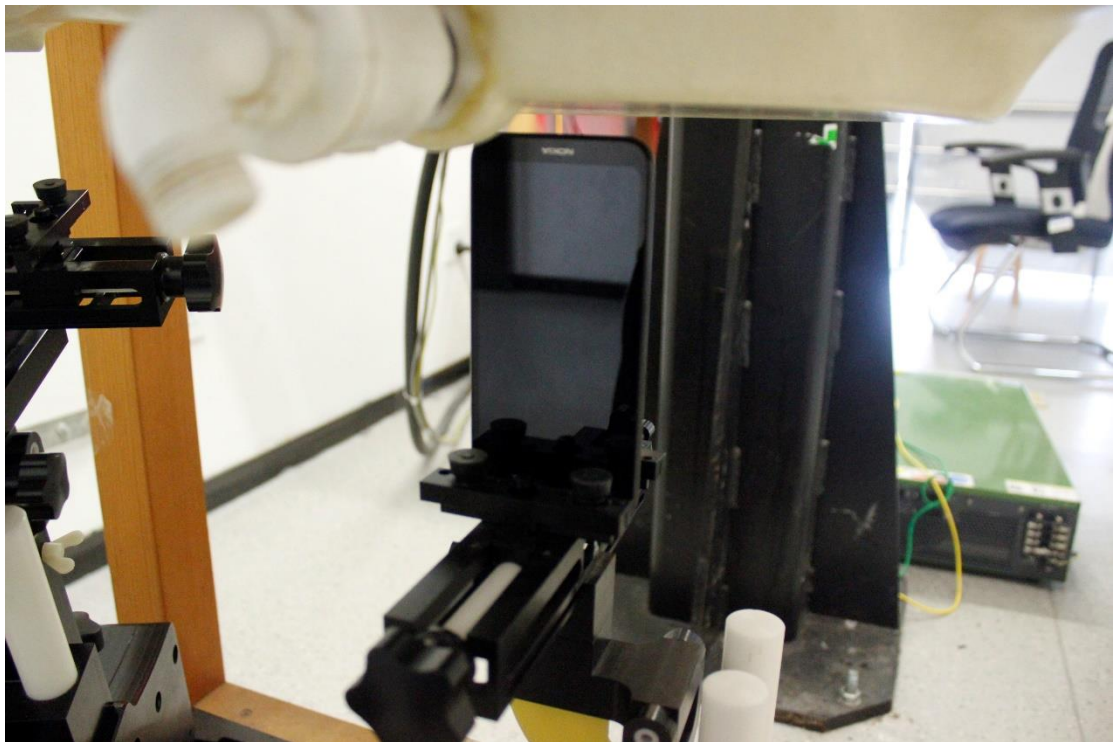

Picture 12: Bottom 10mm

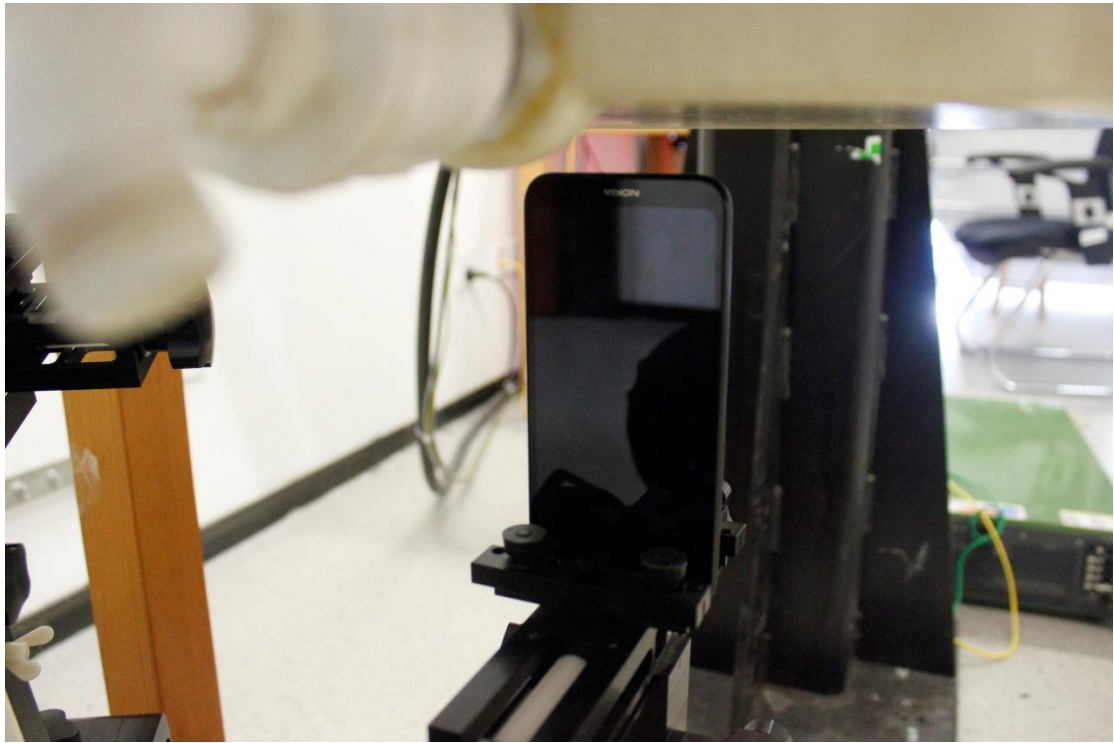

Picture 13: Bottom 17mm