



FCC RF TEST REPORT


Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	Mobile phone
Brand Name:	HMD
Model Name:	H1715V
FCC ID:	2AJOTTA-1715
Date of tests:	Jan. 13, 2025~Mar. 20, 2025

The tests have been carried out according to the requirements of the following standard:

☒ FCC PART 22, Subpart H	☒ FCC Part 2
☒ FCC PART 24, Subpart E	☒ ANSI/TIA/EIA-603-E
☒ FCC Part 27, Subpart C, M	☒ ANSI C63.26-2015
☒ ANSI/TIA/EIA-603-D	

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
	
Date: Mar. 20, 2025	Date: Mar. 20, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

this report, the tests conducted and the correctness of the report contents.

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS	6
1.1 MEASUREMENT UNCERTAINTY	8
1.2 TEST SITE AND INSTRUMENTS	9
2 GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 CONFIGURATION OF SYSTEM UNDER TEST	22
2.3 DESCRIPTION OF SUPPORT UNITS	23
2.4 TEST ITEM AND TEST CONFIGURATION	23
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	36
3 TEST TYPES AND RESULTS	37
3.1 OUTPUT POWER MEASUREMENT	37
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	37
3.1.2 TEST PROCEDURES	38
3.1.3 TEST SETUP	39
3.1.4 TEST RESULTS	40
3.2 FREQUENCY STABILITY MEASUREMENT	79
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	79
3.2.2 TEST PROCEDURE	79
3.2.3 TEST SETUP	79
3.2.4 TEST RESULTS	80
3.3 OCCUPIED BANDWIDTH MEASUREMENT	81
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	81
3.3.2 TEST SETUP	81
3.3.3 TEST PROCEDURES	81
3.3.4 TEST RESULTS	82
3.4 BAND EDGE MEASUREMENT	83
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	83
3.4.2 TEST SETUP	84
3.4.3 TEST PROCEDURES	85
3.4.4 TEST RESULTS	86
3.5 CONDUCTED SPURIOUS EMISSIONS	87
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	87
3.5.2 TEST PROCEDURE	87
3.5.3 TEST SETUP	87
3.5.4 TEST RESULTS	88
3.6 RADIATED EMISSION MEASUREMENT	89
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	89
3.6.2 TEST PROCEDURES	89
3.6.3 DEVIATION FROM TEST STANDARD	89
3.6.4 TEST SETUP	90
3.6.5 TEST RESULTS	92



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

3.7	PEAK TO AVERAGE RATIO	260
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	260
3.7.2	TEST SETUP	260
3.7.3	TEST PROCEDURES	260
3.7.4	TEST RESULTS	261
4	INFORMATION ON THE TESTING LABORATORIES	261
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.	262



Test Report No.: PSU-NQN2412090210RF11

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2412090210RF11	Original release	Mar. 20, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 22/24/27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§24.232(c) §27.50(h)(2) §27.50(d)(4) §27.50(j)(3) §27.50(k)(3)	Equivalent Isotropically Radiated Power (5G NR n2,n66,n77)	Compliance	A
§22.913 (a) §27.50(c)(10)	Equivalent Radiated Power (5G NR n5)	Compliance	A
§2.1055 §22.355 §24.235 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(l)(2) §27.53(m)(4)(6) §27.53(n)(2)	Band Edge Measurements	Compliance	A
§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(l)(2) §27.53(m)(4)(6) §27.53(n)(2)	Conducted Spurious Emissions	Compliance	A

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

§2.1051 §22.917(a) §24.238(a) §27.53(g) §27.53(h) §27.53(l)(2) §27.53(m)(4)(6) §27.53(n)(2)	Radiated Spurious Emissions	Compliance	A
§27.50(j)(4) §22.913(d) n5 §24.232(d) n2 §27.50(d)(5) §27.50(k)(4)	Peak-to-Average Ratio	Compliance	A

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

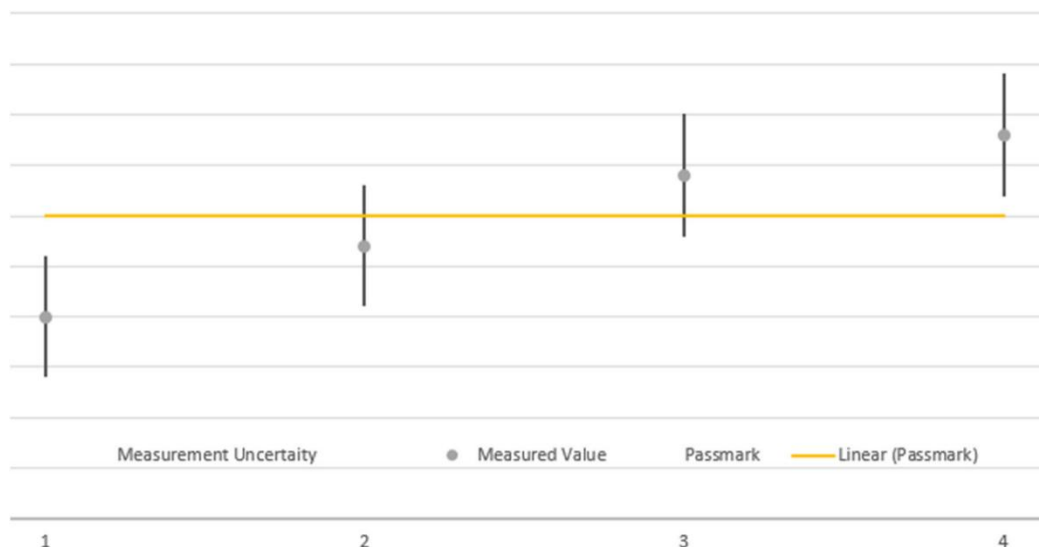

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.29,24	Aug.28,26
Pre-Amplifier	R&S	SCU08F1	101028	Sep.15,24	Sep.14,26
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.24,24	Feb.23,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.21,24	Aug.20,26
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.21,24	Aug.20,26
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.26,24	Jun.25,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Sep.30,24	Sep.39,26
DC Source	HYELEC	HY3010B	551016	Aug.30,24	Aug.29,26
Hygrothermograph	DELI	20210528	SZ014	Sep.05,24	Sep.04,26
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.26,24	Oct.25,25
CABLE	R&S	W12.14	N/A	Apr.26,24	Oct.25,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.26,24	Oct.25,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.26,24	Oct.25,25
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26

- NOTE:** 1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Mobile phone	
BRAND NAME*	HMD	
MODEL NAME*	H1715V	
NOMINAL VOLTAGE*	3.87Vdc(Battery) 5.0Vdc(Adapter)	
MODULATION TECHNOLOGY	5G NR	DFT-s-OFDM(Pi/2BPSK,QPSK,16QAM,64QAM,256QAM); CP-OFDM(QPSK,16QAM,64QAM,256QAM);
LTE ANCHOR BAND FOR NR BAND	NR Band n2	LTE Band 5/13/66
	NR Band n5	LTE Band 2/66
	NR Band n66	LTE Band 2/5/13
	NR Band n77(Part27Q)/(HPUE)	LTE Band 2/5/13/66
	NR Band n77(Part27O)/(HPUE)	LTE Band 2/5/13/66
FREQUENCY RANGE	NR Band n2	1852.5MHz ~ 1907.5MHz
	NR Band n5	826.5MHz ~ 846.5MHz
	NR Band n66	1712.5MHz ~ 1777.5MHz
	NR Band n77(Part27Q)	3455.01MHz ~ 3544.98MHz
	NR Band n77(Part27O)	3705MHz ~ 3974.97MHz
	NR ENDC	DC 5A-n2A DC 13A-n2A DC 66A-n2A DC 2A-n5A DC 66A-n5A DC 2A-n66A DC 5A-n66A DC 66A-n5A DC 2A-n77A DC 5A-n77A DC 13A-n77A DC 66A-n77A



EMISSION DESIGNATOR	NR Band n2 Channel Bandwidth: 5MHz	QPSK: 4M54G7D 16QAM: 4M55W7D 64QAM: 4M52W7D 256QAM: 4M52W7D Pi/2BPSK: 4M55G7D
	NR Band n2 Channel Bandwidth: 10MHz	QPSK: 9M02G7D 16QAM: 9M01W7D 64QAM: 9M05W7D 256QAM: 9M04W7D Pi/2BPSK: 9M04G7D
	NR Band n2 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M6W7D 64QAM: 13M6W7D 256QAM: 13M6W7D Pi/2BPSK: 13M5G7D
	NR Band n2 Channel Bandwidth: 20MHz	QPSK: 18M2G7D 16QAM: 18M1W7D 64QAM: 18M1W7D 256QAM: 18M0W7D Pi/2BPSK: 18M1G7D
	NR Band n5 Channel Bandwidth: 5MHz	QPSK: 4M52G7D 16QAM: 4M55W7D 64QAM: 4M52W7D 256QAM: 4M52W7D Pi/2BPSK: 4M53G7D
	NR Band n5 Channel Bandwidth: 10MHz	QPSK: 9M0G7D 16QAM: 9M99W7D 64QAM: 9M04W7D 256QAM: 9M00W7D Pi/2BPSK: 9M01G7D
	NR Band n5 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M5W7D 64QAM: 13M5W7D 256QAM: 13M5W7D Pi/2BPSK: 13M5G7D
	NR Band n5 Channel Bandwidth: 20MHz	QPSK: 18M1G7D 16QAM: 18M0W7D 64QAM: 18M1W7D 256QAM: 17M9W7D Pi/2BPSK: 18M0G7D



	NR Band n66 Channel Bandwidth: 5MHz	QPSK: 4M53G7D 16QAM: 4M54W7D 64QAM: 4M53W7D 256QAM: 4M53W7D Pi/2BPSK: 4M55G7D
	NR Band n66 Channel Bandwidth: 10MHz	QPSK: 9M01G7D 16QAM: 8M99W7D 64QAM: 9M04W7D 256QAM: 9M03W7D Pi/2BPSK: 9M00G7D
	NR Band n66 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M6W7D 64QAM: 13M5W7D 256QAM: 13M6W7D Pi/2BPSK: 13M5G7D
	NR Band n66 Channel Bandwidth: 20MHz	QPSK: 18M1G7D 16QAM: 18M1W7D 64QAM: 18M1W7D 256QAM: 18M0W7D Pi/2BPSK: 18M1G7D
	NR Band n66 Channel Bandwidth: 25MHz	QPSK: 23M0G7D 16QAM: 23M0W7D 64QAM: 23M0W7D 256QAM: 23M0W7D Pi/2BPSK: 23M0G7D
	NR Band n66 Channel Bandwidth: 30MHz	QPSK: 28M8G7D 16QAM: 28M7W7D 64QAM: 28M6W7D 256QAM: 28M7W7D Pi/2BPSK: 28M7G7D
	NR Band n66 Channel Bandwidth: 40MHz	QPSK: 39M0G7D 16QAM: 38M9W7D 64QAM: 38M9W7D 256QAM: 38M8W7D Pi/2BPSK: 39M0G7D
	NR Band 77(Part27Q) Channel Bandwidth: 10MHz	QPSK: 8M77G7D 16QAM: 8M71W7D 64QAM: 8M75W7D 256QAM: 8M69W7D Pi/2BPSK: 8M73G7D



	NR Band 77(Part27Q) Channel Bandwidth: 15MHz	QPSK: 13M1G7D 16QAM: 13M1W7D 64QAM: 13M1W7D 256QAM: 13M1W7D Pi/2BPSK: 13M1G7D
	NR Band 77(Part27Q) Channel Bandwidth: 20MHz	QPSK: 18M2G7D 16QAM: 18M2W7D 64QAM: 18M2W7D 256QAM: 18M1W7D Pi/2BPSK: 18M1G7D
	NR Band 77(Part27Q) Channel Bandwidth: 30MHz	QPSK: 27M0G7D 16QAM: 27M0W7D 64QAM: 27M0W7D 256QAM: 27M1W7D Pi/2BPSK: 27M0G7D
	NR Band 77(Part27Q) Channel Bandwidth: 40MHz	QPSK: 36M2G7D 16QAM: 36M1W7D 64QAM: 36M1W7D 256QAM: 36M1W7D Pi/2BPSK: 36M2G7D
	NR Band 77(Part27Q) Channel Bandwidth: 50MHz	QPSK: 46M1G7D 16QAM: 46M0W7D 64QAM: 46M1W7D 256QAM: 46M1W7D Pi/2BPSK: 46M2G7D
	NR Band 77(Part27Q) Channel Bandwidth: 60MHz	QPSK: 58M2G7D 16QAM: 58M1W7D 64QAM: 58M2W7D 256QAM: 58M2W7D Pi/2BPSK: 58M1G7D
	NR Band 77(Part27Q) Channel Bandwidth: 70MHz	QPSK: 64M6G7D 16QAM: 64M5W7D 64QAM: 64M7W7D 256QAM: 64M7W7D Pi/2BPSK: 64M7G7D
	NR Band 77(Part27Q) Channel Bandwidth: 80MHz	QPSK: 77M7G7D 16QAM: 77M8W7D 64QAM: 77M9W7D 256QAM: 77M9W7D Pi/2BPSK: 77M9G7D



	NR Band 77(Part27Q) Channel Bandwidth: 90MHz	QPSK: 86M4G7D 16QAM: 86M3W7D 64QAM: 87M3W7D 256QAM: 86M5W7D Pi/2BPSK: 86M5G7D
	NR Band 77(Part27Q) Channel Bandwidth: 100MHz	QPSK: 97M2G7D 16QAM: 97M0W7D 64QAM: 96M9W7D 256QAM: 96M9W7D Pi/2BPSK: 97M1G7D
	NR Band 77(Part27O) Channel Bandwidth: 10MHz	QPSK: 8M75G7D 16QAM: 8M71W7D 64QAM: 8M72W7D 256QAM: 8M69W7D Pi/2BPSK: 8M72G7D
	NR Band 77(Part27O) Channel Bandwidth: 15MHz	QPSK: 13M1G7D 16QAM: 13M1W7D 64QAM: 13M1W7D 256QAM: 13M0W7D Pi/2BPSK: 13M1G7D
	NR Band 77(Part27O) Channel Bandwidth: 20MHz	QPSK: 18M2G7D 16QAM: 18M1W7D 64QAM: 18M2W7D 256QAM: 18M1W7D Pi/2BPSK: 18M2G7D
	NR Band 77(Part27O) Channel Bandwidth: 30MHz	QPSK: 27M0G7D 16QAM: 27M0W7D 64QAM: 27M1W7D 256QAM: 27M1W7D Pi/2BPSK: 27M0G7D
	NR Band 77(Part27O) Channel Bandwidth: 40MHz	QPSK: 36M2G7D 16QAM: 36M1W7D 64QAM: 36M2W7D 256QAM: 36M1W7D Pi/2BPSK: 36M2G7D



	NR Band 77(Part270) Channel Bandwidth: 50MHz	QPSK: 46M0G7D 16QAM: 46M0W7D 64QAM: 46M2W7D 256QAM: 46M1W7D Pi/2BPSK: 46M2G7D
	NR Band 77(Part270) Channel Bandwidth: 60MHz	QPSK: 58M2G7D 16QAM: 58M1W7D 64QAM: 58M3W7D 256QAM: 58M2W7D Pi/2BPSK: 58M2G7D
	NR Band 77(Part270) Channel Bandwidth: 70MHz	QPSK: 64M7G7D 16QAM: 64M6W7D 64QAM: 64M8W7D 256QAM: 64M7W7D Pi/2BPSK: 64M7G7D
	NR Band 77(Part270) Channel Bandwidth: 80MHz	QPSK: 77M8G7D 16QAM: 77M9W7D 64QAM: 77M9W7D 256QAM: 78M0W7D Pi/2BPSK: 78M0G7D
	NR Band 77(Part270) Channel Bandwidth: 90MHz	QPSK: 86M4G7D 16QAM: 86M3W7D 64QAM: 87M3W7D 256QAM: 86M5W7D Pi/2BPSK: 86M5G7D
	NR Band 77(Part270) Channel Bandwidth: 100MHz	QPSK: 97M2G7D 16QAM: 97M0W7D 64QAM: 96M9W7D 256QAM: 96M9W7D Pi/2BPSK: 97M1G7D
	NR Band n2 Channel Bandwidth: 5MHz	179.89mW
	NR Band n2 Channel Bandwidth: 10MHz	179.89mW
	NR Band n2 Channel Bandwidth: 15MHz	179.47mW



	NR Band n2 Channel Bandwidth: 20MHz	181.55mW
	NR Band n5 Channel Bandwidth: 5MHz	51.05mW
	NR Band n5 Channel Bandwidth: 10MHz	50.82mW
	NR Band n5 Channel Bandwidth: 15MHz	50.70mW
	NR Band n5 Channel Bandwidth: 20MHz	51.64mW
	NR Band n66 Channel Bandwidth: 5MHz	199.99mW
	NR Band n66 Channel Bandwidth: 10MHz	197.70mW
	NR Band n66 Channel Bandwidth: 15MHz	196.34mW
	NR Band n66 Channel Bandwidth: 20MHz	195.88mW
	NR Band n66 Channel Bandwidth: 25MHz	199.07mW
	NR Band n66 Channel Bandwidth: 30MHz	200.91mW
	NR Band n66 Channel Bandwidth: 40MHz	203.70mW
	NR Band 77(Part27Q) Channel Bandwidth: 10MHz	150.66mW



	NR Band 77(Part27Q) Channel Bandwidth: 15MHz	149.62mW
	NR Band 77(Part27Q) Channel Bandwidth: 20MHz	149.62mW
	NR Band 77(Part27Q) Channel Bandwidth: 30MHz	142.89mW
	NR Band 77(Part27Q) Channel Bandwidth: 40MHz	144.21mW
	NR Band 77(Part27Q) Channel Bandwidth: 50MHz	144.54mW
	NR Band 77(Part27Q) Channel Bandwidth: 60MHz	144.88mW
	NR Band 77(Part27Q) Channel Bandwidth: 70MHz	144.54mW
	NR Band 77(Part27Q) Channel Bandwidth: 80MHz	148.25mW
	NR Band 77(Part27Q) Channel Bandwidth: 90MHz	149.62mW
	NR Band 77(Part27Q) Channel Bandwidth: 100MHz	152.05mW
	NR Band 77(Part27O) Channel Bandwidth: 10MHz	142.89mW
	NR Band 77(Part27O) Channel Bandwidth: 15MHz	143.55mW
	NR Band 77(Part27O) Channel Bandwidth: 20MHz	143.22mW
	NR Band 77(Part27Q) Channel Bandwidth: 30MHz	139.64mW
	NR Band 77(Part27O) Channel Bandwidth: 40MHz	143.88mW



	NR Band 77(Part27O) Channel Bandwidth: 50MHz	145.88mW
	NR Band 77(Part27O) Channel Bandwidth: 60MHz	145.55mW
	NR Band 77(Part27Q) Channel Bandwidth: 70MHz	148.59mW
	NR Band 77(Part27O) Channel Bandwidth: 80MHz	146.89mW
	NR Band 77(Part27O) Channel Bandwidth: 90MHz	143.22mW
	NR Band 77(Part27Q) Channel Bandwidth: 100MHz	151.36mW
	NR Band 77(Part27Q)(HPUE) Channel Bandwidth: 10MHz	283.79mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 15MHz	272.27mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 20MHz	285.10mW
	NR Band 77(Part27Q) Channel Bandwidth: 30MHz	281.84mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 40MHz	285.10mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 50MHz	284.45mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 60MHz	276.06mW



	NR Band 77(Part27Q) Channel Bandwidth: 70MHz	283.79mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 80MHz	277.33mW
5G SA MAX. EIRP POWER	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 90MHz	282.49mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 100MHz	287.74mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 10MHz	289.07mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 15MHz	289.07mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 20MHz	289.07mW
	NR Band 77(Part27Q) Channel Bandwidth: 30MHz	288.40mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 40MHz	289.07mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 50MHz	284.45mW
	NR Band 77(Part27Q) (HPUE) Channel Bandwidth: 60MHz	283.79mW
	NR Band 77(Part27Q) Channel Bandwidth: 70MHz	289.07mW



	NR Band 77(Part270) (HPUE) Channel Bandwidth: 80MHz	289.73mW
	NR Band 77(Part270) (HPUE) Channel Bandwidth: 90MHz	288.40mW
	NR Band 77(Part270) (HPUE) Channel Bandwidth: 100MHz	300.61mW
ANTENNA TYPE*	5G SA PIFA Antenna with -0.8 dBi gain for NR Band n2 PIFA Antenna with -4.2 dBi gain for NR Band n5 PIFA Antenna with -0.7dBi gain for NR Band n66 PIFA Antenna with -1.34 dBi gain for NR Band n77	
HW VERSION*	V1.0	
SW VERSION*	000T_0_310	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	
EXTREME TEMPERATURE*	-10°C-55°C	
EXTREME VOLTAGE*	3.6V-4.45V	

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and four receivers.

MODULATION MODE	TX FUNCTION
5G NR	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

**BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11**

5. Max ERP/EIRP is according to Max conducted power calculate for SA.
6. The differences between the sample 1 and sample 2 as Listings below, others are the same. And only the worst case was shown in the test report.


Object	Sample 1 1 st source		Sample 2 2 nd source	
	Specifications	Supplier	Specifications	Supplier
Display	JL-P067P003-05	Jinglong	Y92321	Digital
Memory (RAM) Memory (ROM)	FLXC2004G-N1	Longsys	BWCGBX32N2A-32G	Biwin
	MEMDNN064G-M1D03	Longsys	BWCTAMV11X64G	Biwin
Motor	C0830H-C138ZN-021	KunWang	CY0830-05-FPC-182	Chaoying
FPS Side fingerprint	SA-FC15X00-1470-B0	Shenao	HT.ZN-2832B	Huate
Mic	SM2718B381YR2-01	Rayking	S150B381-155	Goertek
GPS LNA	AW5005EDNR	AWINIC	WS7916DE	WILL

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	HMD	HUNAN GAOYUAN BATTERY CO.,LTD	CH426385	Capacity: 3.87Vdc, 4000mAh
USB Cable	Saibao	Saibao (Jiangxi) Industry Co.,Ltd.	SZN-A046A	Signal Line,1.0meter
USB Cable	Juwei	Huizhou Juwei Electronics Co.,Ltd	JWUB1913-ZN01H	Signal Line,1.0meter
Adapter	HMD	Shenzhen Baijunda Electronic Co., Ltd.	HAD-010U	I/P: 100 - 240 Vac, 50/60Hz, 0.35 A, O/P: 5.0 Vdc, 2.0A 10.0W



2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

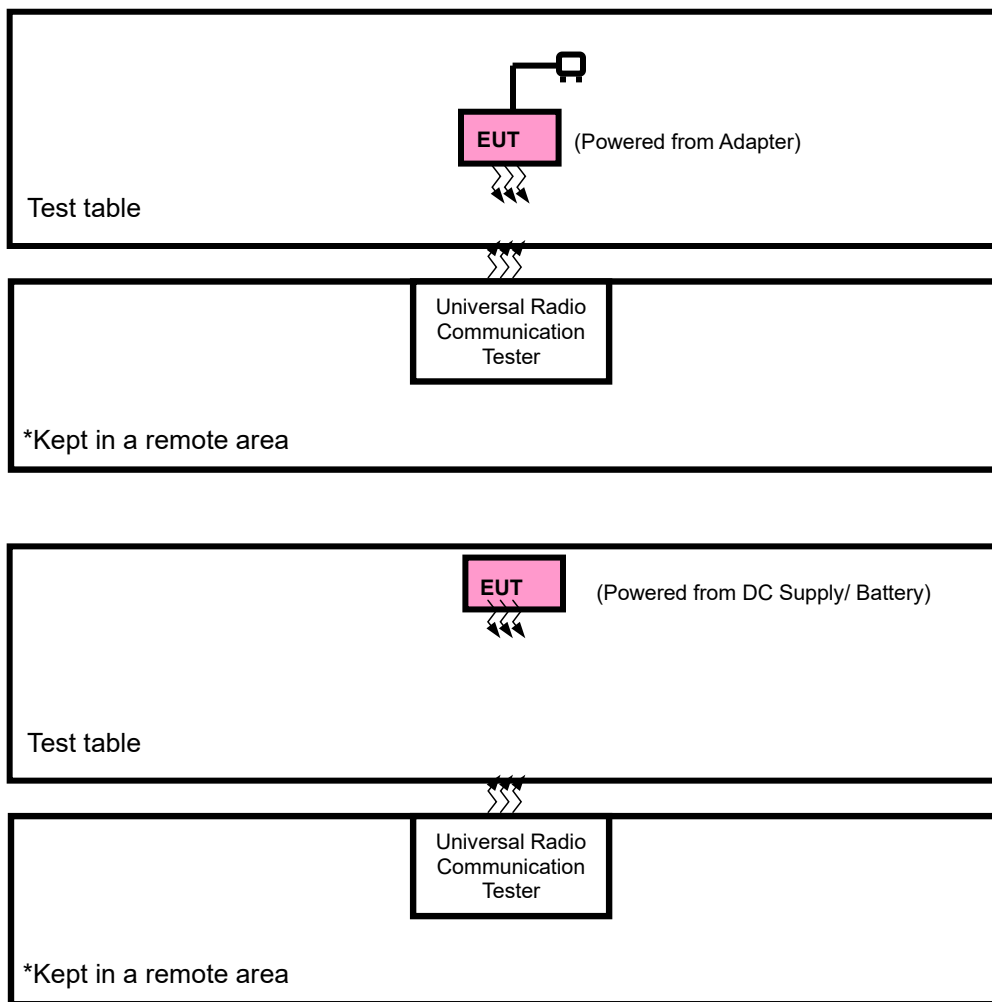



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	ThinkPad E14	HRSW00024	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with 5G NR link
B	EUT + DC Supply with 5G NR link



5G NR n2 MODE (SA_n2)

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CP-OFDM CHANNEL	AVAILABLE DFT-S-OFDM CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE(DFT-S-OFDM) (INCLUDE CP-OFDM)
A	EIRP	370500 to 381500	370500 to 381500	Low, Middle, High	5MHz	QPSK	1RB/ 0RB Offset
		371000 to 381000	371000 to 381000	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		371500 to 380500	371500 to 380500	Low, Middle, High	15MHz	QPSK	1RB/ 0RB Offset
		372000 to 513500	372000 to 513500	Low, Middle, High	20MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	1RB/ 0RB Offset
B	FREQUENCY STABILITY	372000 to 513500	372000 to 513500	Middle	20MHz	QPSK	Outer_ Full
A	PEAK TO AVERAGE RATIO	372000 to 513500	372000 to 513500	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
A	OCCUPIED BANDWIDTH	370500 to 381500	370500 to 381500	Middle	5MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		371000 to 381000	371000 to 381000	Middle	10MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		371500 to 380500	371500 to 380500	Middle	15MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		372000 to 513500	372000 to 513500	Middle	20MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
A	BAND EDGE	370500 to 381500	370500 to 381500	Low	5MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	5MHz	QPSK	1RB/ 24RB Offset
							Outer_ Full
		371000 to 381000	371000 to 381000	Low	10MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	10MHz	QPSK	1RB/ 51RB Offset
							Outer_ Full
		371500 to 380500	371500 to 380500	Low	15MHz	QPSK	1RB/ 0RB Offset
							1RB/ 78RB Offset
				High	15MHz	QPSK	Outer_ Full
							1RB/ 0RB Offset
		372000 to 513500	372000 to 513500	Low	20MHz	QPSK	1RB/ 0RB Offset

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



							Outer_Full
				High	20MHz	QPSK	1RB/ 105RB Offset
A	CONDUCTED EMISSION	370500 to 381500	370500 to 381500	Low, Middle, High	5MHz	QPSK	Outer_Full 1RB/ 0RB Offset
		371000 to 381000	371000 to 381000	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		371500 to 380500	371500 to 380500	Low, Middle, High	15MHz	QPSK	1RB/ 0RB Offset
		372000 to 513500	372000 to 513500	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
A	RADIATED EMISSION	370500 to 381500	370500 to 381500	Middle,	5MHz	QPSK	1RB/ 0RB Offset
		371000 to 381000	371000 to 381000	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		371500 to 380500	371500 to 380500	Middle,	15MHz	QPSK	1RB/ 0RB Offset
		372000 to 513500	372000 to 513500	Middle,	20MHz	QPSK	1RB/ 0RB Offset

Note: 1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. The EIRP calculate presented in the report from worst SA n2.

5G NR n5 MODE

EUT CONFIGU RE MODE	TEST ITEM	AVAILAB LE CP- OFDM CHANNE L	AVAILABLE DFT-S- OFDM CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE(DFT-S- OFDM) (INCLUDE CP- OFDM)
A	ERP	165300 to 169300	165300 to 169300	Low, Middle, High	5MHz	QPSK	1RB/ 0RB Offset
		165800 to 168800	165800 to 168800	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		166300 to 168300	166300 to 168300	Low, Middle, High	15MHz	QPSK	1RB/ 0RB Offset
		166800 to 167800	166800 to 167800	Low, Middle, High	20MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	1RB/ 0RB Offset
B	FREQUENCY STABILITY	166800 to 167800	166800 to 167800	Middle	20MHz	QPSK	Outer_Full
A	PEAK TO AVERAGE RATIO	166800 to 167800	166800 to 167800	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
							Outer_Full



A	OCCUPIED BANDWIDTH	165300 to 169300	165300 to 169300	Middle	5MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		165800 to 168800	165800 to 168800	Middle	10MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		166300 to 168300	166300 to 168300	Middle	15MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		166800 to 167800	166800 to 167800	Middle	20MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
A	BAND EDGE	165300 to 169300	165300 to 169300	Low	5MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	5MHz	QPSK	1RB/ 24RB Offset
							Outer_ Full
		165800 to 168800	165800 to 168800	Low	10MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	10MHz	QPSK	1RB/ 51RB Offset
							Outer_ Full
A	CONDUCTED EMISSION	165300 to 169300	165300 to 169300	Low, Middle, High	5MHz	QPSK	1RB/ 0RB Offset
		165800 to 168800	165800 to 168800	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		166800 to 167800	166800 to 167800	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
A	RADIATED EMISSION	165300 to 169300	165300 to 169300	Middle	5MHz	QPSK	1RB/ 0RB Offset
		165800 to 168800	165800 to 168800	Low,Middle,Hig h	10MHz	QPSK	1RB/ 0RB Offset
		166300 to 168300	166300 to 168300	Middle,	15MHz	QPSK	1RB/ 0RB Offset
		166800 to 167800	166800 to 167800	Middle,	20MHz	QPSK	1RB/ 0RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. The test data presented in the report from worst SA _n5.

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



5G NR n66 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CP-OFDM CHANNEL	AVAILABLE DFT-S-OFDM CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE(DFT-S-OFDM) (INCLUDE CP-OFDM)
A	EIRP	342500 to 355500	342500 to 355500	Low, Middle, High	5MHz	QPSK	1RB/ 0RB Offset
		343000 to 355000	343000 to 355000	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		343500 to 354500	343500 to 354500	Low, Middle, High	15MHz	QPSK	1RB/ 0RB Offset
		344000 to 354000	344000 to 354000	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
		34450 to 353500	34450 to 353500	Low, Middle, High	25MHz	QPSK	1RB/ 0RB Offset
		345000 to 353000	345000 to 353000	Low, Middle, High	30MHz	QPSK	1RB/ 0RB Offset
		346000 to 352000	346000 to 352000	Low, Middle, High	40MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB/ 0RB Offset
A	FREQUENCY STABILITY	346000 to 352000	346000 to 352000	Middle	40MHz	QPSK	Outer_ Full
A	PEAK TO AVERAGE RATIO	346000 to 352000	346000 to 352000	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
A	OCCUPIED BANDWIDTH	342500 to 355500	342500 to 355500	Middle	5MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
		343000 to 355000	343000 to 355000	Middle	10MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
		343500 to 354500	343500 to 354500	Middle	15MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
		344000 to 354000	344000 to 354000	Middle	20MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
		34450 to 353500	34450 to 353500	Middle	25MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
		345000 to 353000	345000 to 353000	Middle	30MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
		346000 to 352000	346000 to 352000	Middle	40MHz	Pi/2BPSK, QPSK, 16QAM, 64QAM, 256QAM	Outer_ Full
A	BAND EDGE	502008 to 535998	502008 to 535998	Low	5MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
		505008 to 532998	505008 to 532998	High	5MHz	QPSK	1RB/ 24RB Offset
							Outer_ Full
		505008 to 532998	505008 to 532998	Low	20MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full



				High	20MHz	QPSK	1RB/ 105RB Offset
							Outer_Full
		345000 to 353000	345000 to 353000	Low	25MHz	QPSK	1RB/ 0RB Offset
							Outer_Full
				High	25MHz	QPSK	1RB/ 105RB Offset
							Outer_Full
		345000 to 353000	345000 to 353000	Low	30MHz	QPSK	1RB/ 0RB Offset
							Outer_Full
				High	30MHz	QPSK	1RB/ 215RB Offset
							Outer_Full
		508002 to 529998	508002 to 529998	Low	40MHz	QPSK	1RB/ 0RB Offset
							Outer_Full
				High	40MHz	QPSK	1RB/ 215RB Offset
							Outer_Full
A	CONDUCTED EMISSION	342500 to 355500	342500 to 355500	Low, Middle, High	5MHz	QPSK	1RB/ 0RB Offset
		344000 to 354000	344000 to 354000	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
		34450 to 353500	34450 to 353500	Low, Middle, High	25MHz	QPSK	1RB/ 0RB Offset
		345000 to 353000	345000 to 353000	Low, Middle, High	30MHz	QPSK	1RB/ 0RB Offset
		346000 to 352000	346000 to 352000	Low, Middle, High	40MHz	QPSK	1RB/ 0RB Offset
A	RADIATED EMISSION	342500 to 355500	342500 to 355500	Middle	5MHz	QPSK	1RB/ 0RB Offset
		343000 to 355000	343000 to 355000	Middle	10MHz	QPSK	1RB/ 0RB Offset
		343500 to 354500	343500 to 354500	Middle	15MHz	QPSK	1RB/ 0RB Offset
		344000 to 354000	344000 to 354000	Middle	20MHz	QPSK	1RB/ 0RB Offset
		34450 to 353500	34450 to 353500	Middle	25MHz	QPSK	1RB/ 0RB Offset
		345000 to 353000	345000 to 353000	Low, Middle, High	30MHz	QPSK	1RB/ 0RB Offset



		346000 to 352000	346000 to 352000	Middle	40MHz	QPSK	1RB/ 0RB Offset
--	--	------------------	------------------	--------	-------	------	-----------------

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. The test data presented in the report from worst SA_n66.

5G NR n77(Part27Q)

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CP-OFDM CHANNEL	AVAILABLE DFT-S-OFDM CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE(DFT-S-OFDM) (INCLUDE CP-OFDM)
A	EIRP	630334 to 636332	630334 to 636332	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		630500 to 636166	630500 to 636166	Low, Middle, High	15MHz	QPSK	1RB/ 0RB Offset
		630668 to 636000	630668 to 636000	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
		631000 to 635666	631000 to 635666	Low, Middle, High	30MHz	QPSK	1RB/ 0RB Offset
		631334 to 635332	631334 to 635332	Low, Middle, High	40MHz	QPSK	1RB/ 0RB Offset
		631668 to 635000	631668 to 635000	Low, Middle, High	50MHz	QPSK	1RB/ 0RB Offset
		632000 to 634666	632000 to 634666	Low, Middle, High	60MHz	QPSK	1RB/ 0RB Offset
		632334 to 634332	632334 to 634332	Low, Middle, High	70MHz	QPSK	1RB/ 0RB Offset
		632668 to 634000	632668 to 634000	Low, Middle, High	80MHz	QPSK	1RB/ 0RB Offset
		633000 to 633666	633000 to 633666	Low, Middle, High	90MHz	QPSK	1RB/ 0RB Offset
		633334	633334	Middle	100MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	1RB/ 0RB Offset
A	FREQUENCY STABILITY	630668 to 636000	630668 to 636000	Middle	20MHz	QPSK	Outer_ Full
A	PEAK TO AVERAGE RATIO	630668 to 636000	630668 to 636000	Low, Middle, High	20MHz	QPSK	Outer_ Full
A	OCCUPIED BANDWIDTH	630334 to 636332	630334 to 636332	Middle	10MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		630500 to 636166	630500 to 636166	Middle	15MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		630668 to 636000	630668 to 636000	Middle	20MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		631000 to 635666	631000 to 635666	Middle	30MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full



		631334 to 635332	631334 to 635332	Middle	40MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		631668 to 635000	631668 to 635000	Middle	50MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		632000 to 634666	632000 to 634666	Middle	60MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		632334 to 634332	632334 to 634332	Middle	70MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		632668 to 634000	632668 to 634000	Middle	80MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		633000 to 633666	633000 to 633666	Middle	90MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		633334	633334	Low, Middle, High	100MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
A	BAND EDGE	630668 to 636000	630668 to 636000	Low	20MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
		632000 to 634666	632000 to 634666	High	20MHz	QPSK	1RB/ 50RB Offset
							Outer_ Full
		633334	633334	Low	60MHz	QPSK	1RB/ 0RB Offset
				High	60MHz	QPSK	1RB/ 161RB Offset
		633334	633334	Low	100MHz	QPSK	1RB/ 0RB Offset
				High	100MHz	QPSK	1RB/ 272RB Offset
							Outer_ Full
A	CONDUCTED EMISSION	630668 to 636000	630668 to 636000	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
		632000 to 634666	632000 to 634666	Low, Middle, High	60MHz	QPSK	1RB/ 0RB Offset
		633334	633334	Low, Middle, High	100MHz	QPSK	1RB/ 0RB Offset
A	RADIATED EMISSION	630334 to 636332	630334 to 636332	Middle	10MHz	QPSK	1RB/ 0RB Offset
		630500 to 636166	630500 to 636166	Middle	15MHz	QPSK	1RB/ 0RB Offset
		630668 to 636000	630668 to 636000	Middle	20MHz	QPSK	1RB/ 0RB Offset
		631000 to 635666	631000 to 635666	Middle	30MHz	QPSK	1RB/ 0RB Offset
		631334 to 635332	631334 to 635332	Low, Middle, High	40MHz	QPSK	1RB/ 0RB Offset



		631668 to 635000	631668 to 635000	Middle	50MHz	QPSK	1RB/ 0RB Offset
		632000 to 634666	632000 to 634666	Middle	60MHz	QPSK	1RB/ 0RB Offset
		632334 to 634332	632334 to 634332	Middle	70MHz	QPSK	1RB/ 0RB Offset
		632668 to 634000	632668 to 634000	Middle	80MHz	QPSK	1RB/ 0RB Offset
		633000 to 633666	633000 to 633666	Middle	90MHz	QPSK	1RB/ 0RB Offset
		633334	633334	Middle	100MHz	QPSK	1RB/ 0RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. The EIRP calculate presented in the report from worst SA n77(Part27Q).



5G NR n77(Part270)

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CP-OFDM CHANNEL	AVAILABLE DFT-S-OFDM CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE(DFT-S-OFDM) (INCLUDE CP-OFDM)
A	EIRP	647000 to 665000	647000 to 665000	Low, Middle, High	10MHz	QPSK	1RB/ 0RB Offset
		647168 to 664832	647168 to 664832	Low, Middle, High	15MHz	QPSK	1RB/ 0RB Offset
		647334 to 664666	647334 to 664666	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
		647668 to 664332	647668 to 664332	Low, Middle, High	30MHz	QPSK	1RB/ 0RB Offset
		648000 to 664000	648000 to 664000	Low, Middle, High	40MHz	QPSK	1RB/ 0RB Offset
		648334 to 663666	648334 to 663666	Low, Middle, High	50MHz	QPSK	1RB/ 0RB Offset
		648668 to 663332	648668 to 663332	Low, Middle, High	60MHz	QPSK	1RB/ 0RB Offset
		649000 to 663000	649000 to 663000	Low, Middle, High	70MHz	QPSK	1RB/ 0RB Offset
		649334 to 662666	649334 to 662666	Low, Middle, High	80MHz	QPSK	1RB/ 0RB Offset
		649668 to 662332	649668 to 662332	Low, Middle, High	90MHz	QPSK	1RB/ 0RB Offset
		650000 to 662000	650000 to 662000	Low, Middle, High	100MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	1RB/ 0RB Offset
A	FREQUENCY STABILITY	647334 to 664666	647334 to 664666	Middle	20MHz	QPSK	Outer_ Full
A	PEAK TO AVERAGE RATIO	647334 to 664666	647334 to 664666	Low, Middle, High	20MHz	QPSK	Outer_ Full
A	OCCUPIED BANDWIDTH	647000 to 665000	647000 to 665000	Middle	10MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		647168 to 664832	647168 to 664832	Middle	15MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		647334 to 664666	647334 to 664666	Middle	20MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		647668 to 664332	647668 to 664332	Middle	30MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		648000 to 664000	648000 to 664000	Middle	40MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		648334 to 663666	648334 to 663666	Middle	50MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		648668 to 663332	648668 to 663332	Middle	60MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		649000 to 663000	649000 to 663000	Middle	70MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		649334 to 662666	649334 to 662666	Middle	80MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full



		649668 to 662332	649668 to 662332	Middle	90MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
		650000 to 662000	650000 to 662000	Low, Middle, High	100MHz	Pi/2BPSK,QPSK,16QAM, 64QAM, 256QAM	Outer_ Full
A	BAND EDGE	647334 to 664666	647334 to 664666	Low	20MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	20MHz	QPSK	1RB/ 50RB Offset
							Outer_ Full
		648668 to 663332	648668 to 663332	Low	60MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	60MHz	QPSK	1RB/ 161RB Offset
							Outer_ Full
		650000 to 662000	650000 to 662000	Low	100MHz	QPSK	1RB/ 0RB Offset
							Outer_ Full
				High	100MHz	QPSK	1RB/ 272RB Offset
							Outer_ Full
A	CONDUCTED EMISSION	647334 to 664666	647334 to 664666	Low, Middle, High	20MHz	QPSK	1RB/ 0RB Offset
		648668 to 663332	648668 to 663332	Low, Middle, High	60MHz	QPSK	1RB/ 0RB Offset
		650000 to 662000	650000 to 662000	Low, Middle, High	100MHz	QPSK	1RB/ 0RB Offset
A	RADIATED EMISSION	647000 to 665000	647000 to 665000	Middle	10MHz	QPSK	1RB/ 0RB Offset
		647168 to 664832	647168 to 664832	Middle	15MHz	QPSK	1RB/ 0RB Offset
		647334 to 664666	647334 to 664666	Middle	20MHz	QPSK	1RB/ 0RB Offset
		647668 to 664332	647668 to 664332	Middle	30MHz	QPSK	1RB/ 0RB Offset
		648000 to 664000	648000 to 664000	Middle	40MHz	QPSK	1RB/ 0RB Offset
		648334 to 663666	648334 to 663666	Middle	50MHz	QPSK	1RB/ 0RB Offset
		648668 to 663332	648668 to 663332	Middle	60MHz	QPSK	1RB/ 0RB Offset
		649000 to 663000	649000 to 663000	Low, Middle, High	70MHz	QPSK	1RB/ 0RB Offset
		649334 to 662666	649334 to 662666	Middle	80MHz	QPSK	1RB/ 0RB Offset
		649668 to 662332	649668 to 662332	Middle	90MHz	QPSK	1RB/ 0RB Offset
		650000 to 662000	650000 to 662000	Middle	100MHz	QPSK	1RB/ 0RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

2. The test data presented in the report from worst SA_n77(Part 27O).



TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu
CONDCUDED EMISSION	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 3.87V By Battery	Hanwen Xu



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22/24/27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p. (n5)

Mobile and portable stations are limited to 2 watts EIRP. (n2/n25)

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.(n7/n38/n41)”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP(n66)

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP(n12/n71)

According to the specific rule Part 27.50(j)(4) and Part 27.50(k)(3) ,Mobile and portable stations are limited to 1 Watt EIRP. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.(n77/n78)



3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);


P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.





3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



1. Connect the DUT transmitter output to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
2. Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
3. Set the span to twice the nominal EBW (span = 2 x EBW).
4. Set the resolution bandwidth (RBW) to approximately 1% of EBW.
5. Set the video bandwidth (VBW) to $\geq 3 \times \text{RBW}$
6. Select the average power (RMS) display detector.
7. Set the number of measurement points to ≥ 1001 .
8. Use auto-coupled sweep time.
9. Perform measurement over an interval of time when the transmission is continuous and at its maximum power level.
10. Utilize trace averaging over 100 traces in the power averaging mode.
11. Use the Band/Channel Power function to determine the integrated power over the full EBW.
12. Record the band power level.
13. Adjust the recorded level by applying appropriate correction factors for the measurement set-up.
14. Determine the EIRP by adding the effective antenna gain to the adjusted power level.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

5G SA

n2 (SCS 15 kHz) (Ant1)

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		372000	376000	380000
		Frequency (MHz)		1860	1880	1900
20M	DFT-s-OFDM Pi/2 BPSK	1	1	23.33	23.30	23.33
		1	53	23.24	23.33	23.24
		1	104	23.23	23.29	23.12
		50	0	23.36	23.35	23.34
		50	28	23.35	23.30	23.38
		50	56	23.38	23.33	23.32
		100	0	23.37	23.31	23.37
	DFT-s-OFDM QPSK	1	1	23.38	23.39	23.37
		1	53	23.26	23.37	23.36
		1	104	23.25	23.29	23.28
		50	0	22.82	22.92	22.84
		50	28	23.33	23.37	23.36
		50	56	22.91	22.92	22.84
		100	0	22.93	22.95	22.90
	DFT-s-OFDM 16QAM	1	1	21.94	22.86	22.97
	DFT-s-OFDM 64QAM	1	1	21.39	21.57	20.95
	DFT-s-OFDM 256QAM	1	1	19.38	18.84	18.82
BW	MCS Index	Channel		371500	376000	380500
		Frequency (MHz)		1857.5	1880	1902.5
15M	DFT-s-OFDM QPSK	1	1	23.34	23.32	23.36
BW	MCS Index	Channel		371000	376000	381000
		Frequency (MHz)		1855	1880	1905
10M	DFT-s-OFDM QPSK	1	1	23.32	23.35	23.34
BW	MCS Index	Channel		370500	376000	381500
		Frequency (MHz)		1852.5	1880	1907.5
5M	DFT-s-OFDM QPSK	1	1	23.31	23.33	23.35



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n5 (SCS 15 kHz) (Ant2)

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		166800	167300	167800
		Frequency (MHz)		834	836.5	839
20M	DFT-s-OFDM Pi/2 BPSK	1	1	23.26	23.27	23.25
		1	53	23.23	23.35	23.29
		1	104	23.28	23.29	23.21
		50	0	23.35	23.40	23.36
		50	28	23.30	23.44	23.37
		50	56	23.37	23.42	23.45
		100	0	23.32	23.47	23.39
	DFT-s-OFDM QPSK	1	1	23.42	23.48	23.38
		1	53	23.32	23.33	23.32
		1	104	23.41	23.44	23.36
		50	0	23.37	23.45	23.33
		50	28	23.41	23.47	23.39
		50	56	23.32	23.39	23.38
		100	0	23.42	23.46	23.43
	DFT-s-OFDM 16QAM	1	1	23.46	23.44	23.45
	DFT-s-OFDM 64QAM	1	1	21.38	21.49	21.50
	DFT-s-OFDM 256QAM	1	1	19.32	19.41	19.34
BW	MCS Index	Channel		166300	167300	168300
		Frequency (MHz)		831.5	836.5	841.5
15M	DFT-s-OFDM QPSK	1	1	23.40	23.32	23.39
BW	MCS Index	Channel		165800	167300	23.38
		Frequency (MHz)		829	836.5	23.38
10M	DFT-s-OFDM QPSK	1	1	23.41	23.34	23.35
BW	MCS Index	Channel		165300	167300	169300
		Frequency (MHz)		826.5	836.5	846.5
5M	DFT-s-OFDM QPSK	1	1	23.43	23.38	23.34



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n66 (SCS 15 kHz) (Ant1)

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		346000	349000	352000
		Frequency (MHz)		1730	1745	1760
40M	DFT-s-OFDM Pi/2 BPSK	1	1	23.66	23.76	23.77
		1	108	23.69	23.58	23.71
		1	214	23.73	23.62	23.77
		108	0	23.01	23.04	22.95
		108	54	23.61	23.56	23.73
		108	108	22.95	22.93	22.73
		216	0	22.92	22.97	22.88
	DFT-s-OFDM QPSK	1	1	23.68	23.79	23.76
		1	108	23.58	23.62	23.73
		1	214	23.62	23.72	23.61
		108	0	22.97	22.94	23.02
		108	54	23.48	23.67	23.59
		108	108	22.91	22.97	22.82
		216	0	22.88	23.02	22.86
	DFT-s-OFDM 16QAM	1	1	23.09	23.18	23.07
	DFT-s-OFDM 64QAM	1	1	20.95	21.03	20.99
	DFT-s-OFDM 256QAM	1	1	18.72	18.71	18.70
BW	MCS Index	Channel		345000	349000	353000
		Frequency (MHz)		1725	1745	1765
30M	DFT-s-OFDM QPSK	1	1	23.65	23.73	23.53
BW	MCS Index	Channel		344500	349000	353500
		Frequency (MHz)		1722.5	1745	1767.5
25M	DFT-s-OFDM QPSK	1	1	23.64	23.69	23.55
BW	MCS Index	Channel		344000	349000	354000
		Frequency (MHz)		1720	1745	1770
20M	DFT-s-OFDM QPSK	1	1	23.62	23.59	23.56
BW	MCS Index	Channel		343500	349000	354500
		Frequency (MHz)		1717.5	1745	1772.5
15M	DFT-s-OFDM QPSK	1	1	23.61	23.63	23.54
BW	MCS Index	Channel		343000	349000	355000
		Frequency (MHz)		1715	1745	1775

Huarui 7layers High Technology
(Suzhou) Co., Ltd.Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui ProvinceTel: +86 (0557)
368 1008

**Test Report No.: PSU-NQN2412090210RF11**

10M	DFT-s-OFDM QPSK	1	1	23.66	23.66	23.50
BW	MCS Index	Channel		342500	349000	355500
		Frequency (MHz)		1712.5	1745	1777.5
5M	DFT-s-OFDM QPSK	1	1	23.64	23.71	23.52



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3450~3550MHz (Ant4) for FCC

		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM Pi/2 BPSK	1	1		22.91	
		1	137		22.66	
		1	271		22.73	
		135	0		22.84	
		135	69		22.81	
		135	138		22.74	
		270	0		22.79	
	DFT-s-OFDM QPSK	1	1		23.16	
		1	137		22.86	
		1	271		22.89	
		135	0		23.04	
		135	69		23.06	
		135	138		22.86	
		270	0		22.96	
	DFT-s-OFDM 16QAM	1	1		23.15	
	DFT-s-OFDM 64QAM	1	1		22.79	
	DFT-s-OFDM 256QAM	1	1		21.19	
BW	MCS Index	Channel		633000	633334	633666
		Frequency (MHz)		3495	3500.01	3504.99
90M	DFT-s-OFDM QPSK	1	1	23.07	23.09	22.67
BW	MCS Index	Channel		632668	633334	634000
		Frequency (MHz)		3490.02	3500.01	3510
80M	DFT-s-OFDM QPSK	1	1	23.05	23.01	22.92
BW	MCS Index	Channel		632334	633334	634332
		Frequency (MHz)		3485.01	3500.01	3514.98
70M	DFT-s-OFDM QPSK	1	1	22.78	22.91	22.94
BW	MCS Index	Channel		632000	633334	634666
		Frequency (MHz)		3480	3500.01	3519.99
60M	DFT-s-OFDM QPSK	1	1	22.95	22.87	22.95
BW	MCS Index	Channel		631668	633334	635000
		Frequency (MHz)		3475.02	3500.01	3525
50M	DFT-s-OFDM QPSK	1	1	22.94	22.87	22.85

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

BW	MCS Index	Channel		631334	633334	635332
		Frequency (MHz)		3470.01	3500.01	3529.98
40M	DFT-s-OFDM QPSK	1	1	22.81	22.93	22.75
BW	MCS Index	Channel		631000	633334	635666
		Frequency (MHz)		3465	3500.01	3534.99
30M	DFT-s-OFDM QPSK	1	1	22.72	22.89	22.82
BW	MCS Index	Channel		630668	633334	636000
		Frequency (MHz)		3460.02	3500.01	3540
20M	DFT-s-OFDM QPSK	1	1	23.09	22.85	22.91
BW	MCS Index	Channel		630500	633334	636166
		Frequency (MHz)		3457.5	3500.01	3542.49
15M	DFT-s-OFDM QPSK	1	1	23.09	22.95	23.04
BW	MCS Index	Channel		630334	633334	636332
		Frequency (MHz)		3455.01	3500.01	3544.98
10M	DFT-s-OFDM QPSK	1	1	23.09	23.12	23.09

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3700~3980MHz (Ant4) for FCC

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		650000	656000	662000
		Frequency (MHz)		3750	3840	3930
100M	DFT-s-OFDM Pi/2 BPSK	1	1	22.52	22.66	22.65
		1	137	22.56	22.75	22.96
		1	271	22.64	22.87	22.54
		135	0	22.65	22.70	22.85
		135	69	22.55	22.77	23.03
		135	138	22.62	22.75	23.09
		270	0	22.58	22.77	23.04
	DFT-s-OFDM QPSK	1	1	22.83	22.92	23.14
		1	137	22.65	22.91	23.01
		1	271	22.82	22.90	23.12
		135	0	22.81	22.74	22.95
		135	69	22.85	22.95	23.08
		135	138	22.77	22.93	23.07
		270	0	22.79	22.84	22.98
	DFT-s-OFDM 16QAM	1	1	22.58	22.60	22.94
	DFT-s-OFDM 64QAM	1	1	22.37	22.30	22.67
	DFT-s-OFDM 256QAM	1	1	20.66	20.65	20.98
BW	MCS Index	Channel		649668	656000	662332
		Frequency (MHz)		3745.02	3840	3934.98
90M	DFT-s-OFDM QPSK	1	1	22.77	22.66	22.90
BW	MCS Index	Channel		649334	656000	662666
		Frequency (MHz)		3740.01	3840	3939.99
80M	DFT-s-OFDM QPSK	1	1	22.78	22.70	23.01
BW	MCS Index	Channel		649000	656000	663000
		Frequency (MHz)		3735	3840	3945
70M	DFT-s-OFDM QPSK	1	1	22.76	22.69	23.06
BW	MCS Index	Channel		648668	656000	663332
		Frequency (MHz)		3730.02	3840	3949.98
60M	DFT-s-OFDM QPSK	1	1	22.73	22.76	22.97
BW	MCS Index	Channel		648334	656000	663666
		Frequency (MHz)		3725.01	3840	3954.99

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

50M	DFT-s-OFDM QPSK	1	1	22.73	22.65	22.98
BW	MCS Index	Channel		648000	656000	664000
		Frequency (MHz)		3720	3840	3960
40M	DFT-s-OFDM QPSK	1	1	22.78	22.56	22.92
BW	MCS Index	Channel		647668	656000	664332
		Frequency (MHz)		3715.02	3840	3964.98
30M	DFT-s-OFDM QPSK	1	1	22.79	22.54	22.79
BW	MCS Index	Channel		647334	656000	664666
		Frequency (MHz)		3710.01	3840	3969.99
20M	DFT-s-OFDM QPSK	1	1	22.80	22.88	22.90
BW	MCS Index	Channel		647168	656000	664832
		Frequency (MHz)		3707.52	3840	3972.48
15M	DFT-s-OFDM QPSK	1	1	22.81	22.91	22.87
BW	MCS Index	Channel		647000	656000	665000
		Frequency (MHz)		3705	3840	3975
10M	DFT-s-OFDM QPSK	1	1	22.76	22.89	22.85



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

PC2_n77 (SCS 30 kHz)_3450~3550MHz (Ant4) for FCC

BW	MCS Index	RB Size	RB Offset		Mid	
		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM Pi/2 BPSK	1	1		25.76	
		1	137		25.66	
		1	271		25.68	
		135	0		25.33	
		135	69		25.77	
		135	138		25.21	
		270	0		25.27	
	DFT-s-OFDM QPSK	1	1		25.93	
		1	137		25.71	
		1	271		25.69	
		135	0		24.82	
		135	69		25.76	
		135	138		24.70	
		270	0		24.72	
	DFT-s-OFDM 16QAM	1	1		24.92	
	DFT-s-OFDM 64QAM	1	1		23.19	
	DFT-s-OFDM 256QAM	1	1		20.96	
BW	MCS Index	Channel		633000	633334	633666
		Frequency (MHz)		3495	3500.01	3504.99
90M	DFT-s-OFDM QPSK	1	1	25.72	25.85	25.77
BW	MCS Index	Channel		632668	633334	634000
		Frequency (MHz)		3490.02	3500.01	3510
80M	DFT-s-OFDM QPSK	1	1	25.71	25.77	25.68
BW	MCS Index	Channel		632334	633334	634332
		Frequency (MHz)		3485.01	3500.01	3514.98
70M	DFT-s-OFDM QPSK	1	1	25.70	25.84	25.87
BW	MCS Index	Channel		632000	633334	634666
		Frequency (MHz)		3480	3500.01	3519.99
60M	DFT-s-OFDM QPSK	1	1	25.75	25.62	25.75
BW	MCS Index	Channel		631668	633334	635000
		Frequency (MHz)		3475.02	3500.01	3525

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

50M	DFT-s-OFDM QPSK	1	1	25.74	25.88	25.72
BW	MCS Index	Channel		631334	633334	635332
		Frequency (MHz)		3470.01	3500.01	3529.98
40M	DFT-s-OFDM QPSK	1	1	25.76	25.89	25.70
BW	MCS Index	Channel		631000	633334	635666
		Frequency (MHz)		3465	3500.01	3534.99
30M	DFT-s-OFDM QPSK	1	1	25.81	25.84	25.82
BW	MCS Index	Channel		630668	633334	636000
		Frequency (MHz)		3460.02	3500.01	3540
20M	DFT-s-OFDM QPSK	1	1	25.89	25.75	25.67
BW	MCS Index	Channel		630500	633334	636166
		Frequency (MHz)		3457.5	3500.01	3542.49
15M	DFT-s-OFDM QPSK	1	1	25.56	25.69	25.66
BW	MCS Index	Channel		630334	633334	636332
		Frequency (MHz)		3455.01	3500.01	3544.98
10M	DFT-s-OFDM QPSK	1	1	25.67	25.87	25.70



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

PC2_n77 (SCS 30 kHz)_3700~3980MHz (Ant4) for FCC

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		650000	656000	662000
		Frequency (MHz)		3750	3840	3930
100M	DFT-s-OFDM Pi/2 BPSK	1	1	25.77	25.69	25.78
		1	137	25.65	25.75	25.96
		1	271	25.53	25.89	26.05
		135	0	25.12	25.14	25.38
		135	69	25.62	25.75	25.99
		135	138	25.09	25.33	25.57
		270	0	25.06	25.23	25.51
	DFT-s-OFDM QPSK	1	1	25.87	25.89	26.12
		1	137	25.75	25.76	25.98
		1	271	25.54	25.85	25.96
		135	0	24.65	24.73	24.96
		135	69	25.54	25.77	25.97
		135	138	24.53	24.81	25.04
		270	0	24.55	24.72	24.98
	DFT-s-OFDM 16QAM	1	1	24.64	24.86	24.88
	DFT-s-OFDM 64QAM	1	1	22.67	22.76	22.89
	DFT-s-OFDM 256QAM	1	1	20.48	20.60	20.82
BW	MCS Index	Channel		649668	656000	662332
		Frequency (MHz)		3745.02	3840	3934.98
90M	DFT-s-OFDM QPSK	1	1	25.82	25.58	25.94
BW	MCS Index	Channel		649334	656000	662666
		Frequency (MHz)		3740.01	3840	3939.99
80M	DFT-s-OFDM QPSK	1	1	25.84	25.59	25.96
BW	MCS Index	Channel		649000	656000	663000
		Frequency (MHz)		3735	3840	3945
70M	DFT-s-OFDM QPSK	1	1	25.86	25.63	25.95
BW	MCS Index	Channel		648668	656000	663332
		Frequency (MHz)		3730.02	3840	3949.98
60M	DFT-s-OFDM QPSK	1	1	25.77	25.83	25.87
BW	MCS Index	Channel		648334	656000	663666
		Frequency (MHz)		3725.01	3840	3954.99

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



50M	DFT-s-OFDM QPSK	1	1	25.67	25.69	25.88
BW	MCS Index	Channel		648000	656000	664000
		Frequency (MHz)		3720	3840	3960
40M	DFT-s-OFDM QPSK	1	1	25.80	25.91	25.95
BW	MCS Index	Channel		647668	656000	664332
		Frequency (MHz)		3715.02	3840	3964.98
30M	DFT-s-OFDM QPSK	1	1	25.76	25.88	25.94
BW	MCS Index	Channel		647334	656000	664666
		Frequency (MHz)		3710.01	3840	3969.99
20M	DFT-s-OFDM QPSK	1	1	25.87	25.95	25.91
BW	MCS Index	Channel		647168	656000	664832
		Frequency (MHz)		3707.52	3840	3972.48
15M	DFT-s-OFDM QPSK	1	1	25.87	25.95	25.94
BW	MCS Index	Channel		647000	656000	665000
		Frequency (MHz)		3705	3840	3975
10M	DFT-s-OFDM QPSK	1	1	25.87	25.90	25.95



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3450~3550MHz (Ant3) for FCC SRS

		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM Pi/2 BPSK	1	1		21.95	
		1	137		21.69	
		1	271		21.67	
		135	0		21.89	
		135	69		21.73	
		135	138		21.76	
		270	0		21.70	
	DFT-s-OFDM QPSK	1	1		22.16	
		1	137		21.84	
		1	271		21.85	
		135	0		22.05	
		135	69		22.08	
		135	138		21.91	
		270	0		21.89	
	DFT-s-OFDM 16QAM	1	1		22.14	
	DFT-s-OFDM 64QAM	1	1		21.77	
	DFT-s-OFDM 256QAM	1	1		20.21	
BW	MCS Index	Channel		633000	633334	633666
		Frequency (MHz)		3495	3500.01	3504.99
90M	DFT-s-OFDM QPSK	1	1	22.11	22.13	22.15
BW	MCS Index	Channel		632668	633334	634000
		Frequency (MHz)		3490.02	3500.01	3510
80M	DFT-s-OFDM QPSK	1	1	22.06	21.99	22.08
BW	MCS Index	Channel		632334	633334	634332
		Frequency (MHz)		3485.01	3500.01	3514.98
70M	DFT-s-OFDM QPSK	1	1	21.97	22.02	22.04
BW	MCS Index	Channel		632000	633334	634666
		Frequency (MHz)		3480	3500.01	3519.99
60M	DFT-s-OFDM QPSK	1	1	22.00	22.10	22.13
BW	MCS Index	Channel		631668	633334	635000
		Frequency (MHz)		3475.02	3500.01	3525
50M	DFT-s-OFDM QPSK	1	1	21.98	22.09	22.14

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

BW	MCS Index	Channel		631334	633334	635332
		Frequency (MHz)		3470.01	3500.01	3529.98
40M	DFT-s-OFDM QPSK	1	1	22.09	22.03	22.06
BW	MCS Index	Channel		631000	633334	635666
		Frequency (MHz)		3465	3500.01	3534.99
30M	DFT-s-OFDM QPSK	1	1	22.06	22.01	22.13
BW	MCS Index	Channel		630668	633334	636000
		Frequency (MHz)		3460.02	3500.01	3540
20M	DFT-s-OFDM QPSK	1	1	21.99	22.12	22.04
BW	MCS Index	Channel		630500	633334	636166
		Frequency (MHz)		3457.5	3500.01	3542.49
15M	DFT-s-OFDM QPSK	1	1	22.02	22.00	22.01
BW	MCS Index	Channel		630334	633334	636332
		Frequency (MHz)		3455.01	3500.01	3544.98
10M	DFT-s-OFDM QPSK	1	1	21.96	22.07	22.06

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3700~3980MHz (Ant3) for FCC SRS

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		650000	656000	662000
		Frequency (MHz)		3750	3840	3930
100M	DFT-s-OFDM Pi/2 BPSK	1	1	21.88	22.06	22.01
		1	137	21.91	22.21	22.42
		1	271	22.00	22.28	21.69
		135	0	22.06	22.17	22.22
		135	69	21.95	22.13	22.41
		135	138	22.08	22.15	22.54
		270	0	21.98	22.21	22.42
	DFT-s-OFDM QPSK	1	1	22.26	22.41	22.57
		1	137	22.06	22.32	22.37
		1	271	22.16	22.29	22.55
		135	0	22.21	22.15	22.38
		135	69	22.24	22.39	22.46
		135	138	22.19	22.33	22.43
		270	0	22.26	22.22	22.45
	DFT-s-OFDM 16QAM	1	1	22.04	22.05	22.30
	DFT-s-OFDM 64QAM	1	1	21.75	21.66	22.06
	DFT-s-OFDM 256QAM	1	1	20.05	20.07	20.38
BW	MCS Index	Channel		649668	656000	662332
		Frequency (MHz)		3745.02	3840	3934.98
90M	DFT-s-OFDM QPSK	1	1	22.18	22.12	22.49
BW	MCS Index	Channel		649334	656000	662666
		Frequency (MHz)		3740.01	3840	3939.99
80M	DFT-s-OFDM QPSK	1	1	22.19	22.25	22.50
BW	MCS Index	Channel		649000	656000	663000
		Frequency (MHz)		3735	3840	3945
70M	DFT-s-OFDM QPSK	1	1	22.16	22.11	22.46
BW	MCS Index	Channel		648668	656000	663332
		Frequency (MHz)		3730.02	3840	3949.98
60M	DFT-s-OFDM QPSK	1	1	22.24	22.14	22.43
BW	MCS Index	Channel		648334	656000	663666
		Frequency (MHz)		3725.01	3840	3954.99

Huarui 7layers High Technology
(Suzhou) Co., Ltd.Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui ProvinceTel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

50M	DFT-s-OFDM QPSK	1	1	22.19	22.14	22.47
BW	MCS Index	Channel		648000	656000	664000
		Frequency (MHz)		3720	3840	3960
40M	DFT-s-OFDM QPSK	1	1	22.12	22.11	22.47
BW	MCS Index	Channel		647668	656000	664332
		Frequency (MHz)		3715.02	3840	3964.98
30M	DFT-s-OFDM QPSK	1	1	22.17	22.13	22.42
BW	MCS Index	Channel		647334	656000	664666
		Frequency (MHz)		3710.01	3840	3969.99
20M	DFT-s-OFDM QPSK	1	1	22.11	22.25	22.46
BW	MCS Index	Channel		647168	656000	664832
		Frequency (MHz)		3707.52	3840	3972.48
15M	DFT-s-OFDM QPSK	1	1	22.21	22.22	22.55
BW	MCS Index	Channel		647000	656000	665000
		Frequency (MHz)		3705	3840	3975
10M	DFT-s-OFDM QPSK	1	1	22.15	22.14	22.48



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3450~3550MHz (Ant6) for FCC SRS

		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM Pi/2 BPSK	1	1		20.55	
		1	137		20.29	
		1	271		20.25	
		135	0		20.56	
		135	69		20.29	
		135	138		20.33	
		270	0		20.40	
	DFT-s-OFDM QPSK	1	1		20.83	
		1	137		20.44	
		1	271		20.53	
		135	0		20.65	
		135	69		20.69	
		135	138		20.50	
		270	0		20.56	
	DFT-s-OFDM 16QAM	1	1		20.59	
	DFT-s-OFDM 64QAM	1	1		20.41	
	DFT-s-OFDM 256QAM	1	1		18.82	
BW	MCS Index	Channel		633000	633334	633666
		Frequency (MHz)		3495	3500.01	3504.99
90M	DFT-s-OFDM QPSK	1	1	20.80	20.82	20.82
BW	MCS Index	Channel		632668	633334	634000
		Frequency (MHz)		3490.02	3500.01	3510
80M	DFT-s-OFDM QPSK	1	1	20.66	20.66	20.75
BW	MCS Index	Channel		632334	633334	634332
		Frequency (MHz)		3485.01	3500.01	3514.98
70M	DFT-s-OFDM QPSK	1	1	20.69	20.74	20.74
BW	MCS Index	Channel		632000	633334	634666
		Frequency (MHz)		3480	3500.01	3519.99
60M	DFT-s-OFDM QPSK	1	1	20.79	20.77	20.77
BW	MCS Index	Channel		631668	633334	635000
		Frequency (MHz)		3475.02	3500.01	3525
50M	DFT-s-OFDM QPSK	1	1	20.75	20.79	20.79

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BW	MCS Index	Channel		631334	633334	635332
		Frequency (MHz)		3470.01	3500.01	3529.98
40M	DFT-s-OFDM QPSK	1	1	20.65	20.80	20.80
BW	MCS Index	Channel		631000	633334	635666
		Frequency (MHz)		3465	3500.01	3534.99
30M	DFT-s-OFDM QPSK	1	1	20.65	20.73	20.73
BW	MCS Index	Channel		630668	633334	636000
		Frequency (MHz)		3460.02	3500.01	3540
20M	DFT-s-OFDM QPSK	1	1	20.74	20.81	20.81
BW	MCS Index	Channel		630500	633334	636166
		Frequency (MHz)		3457.5	3500.01	3542.49
15M	DFT-s-OFDM QPSK	1	1	20.66	20.72	20.72
BW	MCS Index	Channel		630334	633334	636332
		Frequency (MHz)		3455.01	3500.01	3544.98
10M	DFT-s-OFDM QPSK	1	1	20.71	20.78	20.78



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3700~3980MHz (Ant6) for FCC SRS

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		650000	656000	662000
		Frequency (MHz)		3750	3840	3930
100M	DFT-s-OFDM Pi/2 BPSK	1	1	20.21	20.30	20.26
		1	137	20.20	20.64	20.41
		1	271	20.32	19.92	20.60
		135	0	20.39	20.42	20.36
		135	69	20.23	20.61	20.32
		135	138	20.39	20.80	20.36
		270	0	20.31	20.68	20.52
	DFT-s-OFDM QPSK	1	1	20.59	20.90	20.67
		1	137	20.39	20.61	20.51
		1	271	20.45	20.86	20.54
		135	0	20.54	20.60	20.47
		135	69	20.58	20.77	20.60
		135	138	20.44	20.75	20.59
		270	0	20.47	20.64	20.50
	DFT-s-OFDM 16QAM	1	1	20.26	20.54	20.33
	DFT-s-OFDM 64QAM	1	1	20.02	20.32	19.94
	DFT-s-OFDM 256QAM	1	1	18.24	18.59	18.33
BW	MCS Index	Channel		649668	656000	662332
		Frequency (MHz)		3745.02	3840	3934.98
90M	DFT-s-OFDM QPSK	1	1	20.47	20.79	20.66
BW	MCS Index	Channel		649334	656000	662666
		Frequency (MHz)		3740.01	3840	3939.99
80M	DFT-s-OFDM QPSK	1	1	20.43	20.89	20.60
BW	MCS Index	Channel		649000	656000	663000
		Frequency (MHz)		3735	3840	3945
70M	DFT-s-OFDM QPSK	1	1	20.40	20.81	20.66
BW	MCS Index	Channel		648668	656000	663332
		Frequency (MHz)		3730.02	3840	3949.98

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

60M	DFT-s-OFDM QPSK	1	1	20.45	20.87	20.54
BW	MCS Index	Channel		648334	656000	663666
		Frequency (MHz)		3725.01	3840	3954.99
50M	DFT-s-OFDM QPSK	1	1	20.54	20.76	20.60
BW	MCS Index	Channel		648000	656000	664000
		Frequency (MHz)		3720	3840	3960
40M	DFT-s-OFDM QPSK	1	1	20.42	20.82	20.65
BW	MCS Index	Channel		647668	656000	664332
		Frequency (MHz)		3715.02	3840	3964.98
30M	DFT-s-OFDM QPSK	1	1	20.53	20.86	20.56
BW	MCS Index	Channel		647334	656000	664666
		Frequency (MHz)		3710.01	3840	3969.99
20M	DFT-s-OFDM QPSK	1	1	20.53	20.77	20.65
BW	MCS Index	Channel		647168	656000	664832
		Frequency (MHz)		3707.52	3840	3972.48
15M	DFT-s-OFDM QPSK	1	1	20.40	20.87	20.65
BW	MCS Index	Channel		647000	656000	665000
		Frequency (MHz)		3705	3840	3975
10M	DFT-s-OFDM QPSK	1	1	20.45	20.75	20.53



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3450~3550MHz (Ant8) for FCC SRS

BW	MCS Index	RB Size	RB Offset		Mid	
		Channel			633334	
		Frequency (MHz)			3500.01	
100M	DFT-s-OFDM Pi/2 BPSK	1	1		18.81	
		1	137		18.47	
		1	271		18.46	
		135	0		18.75	
		135	69		18.48	
		135	138		18.58	
		270	0		18.66	
	DFT-s-OFDM QPSK	1	1		19.10	
		1	137		18.60	
		1	271		18.78	
		135	0		18.89	
		135	69		18.95	
		135	138		18.74	
		270	0		18.84	
	DFT-s-OFDM 16QAM	1	1		18.74	
	DFT-s-OFDM 64QAM	1	1		18.49	
	DFT-s-OFDM 256QAM	1	1		17.03	
BW	MCS Index	Channel		633000	633334	633666
		Frequency (MHz)		3495	3500.01	3504.99
90M	DFT-s-OFDM QPSK	1	1	19.08	19.09	19.06
BW	MCS Index	Channel		632668	633334	634000
		Frequency (MHz)		3490.02	3500.01	3510
80M	DFT-s-OFDM QPSK	1	1	19.01	19.02	18.94
BW	MCS Index	Channel		632334	633334	634332
		Frequency (MHz)		3485.01	3500.01	3514.98
70M	DFT-s-OFDM QPSK	1	1	18.98	19.08	18.98
BW	MCS Index	Channel		632000	633334	634666
		Frequency (MHz)		3480	3500.01	3519.99
60M	DFT-s-OFDM QPSK	1	1	18.95	18.96	18.95
BW		Channel		631668	633334	635000

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



	MCS Index	Frequency (MHz)		3475.02	3500.01	3525
50M	DFT-s-OFDM QPSK	1	1	18.97	18.95	18.93
BW	MCS Index	Channel		631334	633334	635332
		Frequency (MHz)		3470.01	3500.01	3529.98
40M	DFT-s-OFDM QPSK	1	1	19.03	19.07	19.02
BW	MCS Index	Channel		631000	633334	635666
		Frequency (MHz)		3465	3500.01	3534.99
30M	DFT-s-OFDM QPSK	1	1	18.94	19.05	18.98
BW	MCS Index	Channel		630668	633334	636000
		Frequency (MHz)		3460.02	3500.01	3540
20M	DFT-s-OFDM QPSK	1	1	19.07	19.08	19.00
BW	MCS Index	Channel		630500	633334	636166
		Frequency (MHz)		3457.5	3500.01	3542.49
15M	DFT-s-OFDM QPSK	1	1	19.04	19.02	18.91
BW	MCS Index	Channel		630334	633334	636332
		Frequency (MHz)		3455.01	3500.01	3544.98
10M	DFT-s-OFDM QPSK	1	1	19.05	19.01	19.04



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF11

n77 (SCS 30 kHz)_3700~3980MHz (Ant8) for FCC SRS

BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		650000	656000	662000
		Frequency (MHz)		3750	3840	3930
100M	DFT-s-OFDM Pi/2 BPSK	1	1	19.00	19.00	19.03
		1	137	18.87	19.35	19.14
		1	271	19.08	18.60	19.26
		135	0	19.09	19.07	19.12
		135	69	18.95	19.32	19.06
		135	138	19.08	19.53	19.01
		270	0	19.02	19.39	19.30
	DFT-s-OFDM QPSK	1	1	19.33	19.65	19.58
		1	137	19.14	19.31	19.20
		1	271	19.21	19.63	19.22
		135	0	19.21	19.32	19.19
		135	69	19.27	19.56	19.24
		135	138	19.22	19.49	19.39
		270	0	19.14	19.39	19.15
	DFT-s-OFDM 16QAM	1	1	19.01	19.30	19.04
	DFT-s-OFDM 64QAM	1	1	18.71	19.08	18.63
	DFT-s-OFDM 256QAM	1	1	16.89	17.29	17.08
BW	MCS Index	Channel		649668	656000	662332
		Frequency (MHz)		3745.02	3840	3934.98
90M	DFT-s-OFDM QPSK	1	1	19.22	19.57	19.49
BW	MCS Index	Channel		649334	656000	662666
		Frequency (MHz)		3740.01	3840	3939.99
80M	DFT-s-OFDM QPSK	1	1	19.29	19.51	19.57
BW	MCS Index	Channel		649000	656000	663000
		Frequency (MHz)		3735	3840	3945
70M	DFT-s-OFDM QPSK	1	1	19.18	19.52	19.54
BW	MCS Index	Channel		648668	656000	22.98
		Frequency (MHz)		3730.02	3840	22.98
60M	DFT-s-OFDM QPSK	1	1	19.30	19.59	19.45
BW		Channel		648334	656000	663666

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



	MCS Index	Frequency (MHz)		3725.01	3840	3954.99
50M	DFT-s-OFDM QPSK	1	1	19.29	19.55	19.48
BW	MCS Index	Channel		648000	656000	664000
		Frequency (MHz)		3720	3840	3960
40M	DFT-s-OFDM QPSK	1	1	19.23	19.55	19.46
BW	MCS Index	Channel		647668	656000	664332
		Frequency (MHz)		3715.02	3840	3964.98
30M	DFT-s-OFDM QPSK	1	1	19.25	19.60	19.46
BW	MCS Index	Channel		647334	656000	664666
		Frequency (MHz)		3710.01	3840	3969.99
20M	DFT-s-OFDM QPSK	1	1	19.27	19.55	19.51
BW	MCS Index	Channel		647168	656000	664832
		Frequency (MHz)		3707.52	3840	3972.48
15M	DFT-s-OFDM QPSK	1	1	19.27	19.50	19.56
BW	MCS Index	Channel		647000	656000	665000
		Frequency (MHz)		3705	3840	3975
10M	DFT-s-OFDM QPSK	1	1	19.31	19.58	19.43



n2 (SCS 15kHz)_Ant1							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20M-Pi/2 BPSK	372000	1860	23.38	-0.8	22.58	181.13	2
	376000	1880	23.35	-0.8	22.55	179.89	2
	380000	1900	23.38	-0.8	22.58	181.13	2
20M-QPSK	372000	1860	23.38	-0.8	22.58	181.13	2
	376000	1880	23.39	-0.8	22.59	181.55	2
	380000	1900	23.37	-0.8	22.57	180.72	2
20M-16QAM	372000	1860	21.94	-0.8	21.14	130.02	2
	376000	1880	22.86	-0.8	22.06	160.69	2
	380000	1900	22.97	-0.8	22.17	164.82	2
20M-64QAM	372000	1860	21.39	-0.8	20.59	114.55	2
	376000	1880	21.57	-0.8	20.77	119.40	2
	380000	1900	20.95	-0.8	20.15	103.51	2
20M- 256QAM	372000	1860	19.38	-0.8	18.58	72.11	2
	376000	1880	18.84	-0.8	18.04	63.68	2
	380000	1900	18.82	-0.8	18.02	63.39	2
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
15M-QPSK	371500	1857.5	23.34	-0.8	22.54	179.47	2
	376000	1880	23.32	-0.8	22.52	178.65	2
	380500	1902.5	23.36	-0.8	22.56	180.30	2
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
10M-QPSK	371000	1855	23.32	-0.8	22.52	178.65	2
	376000	1880	23.35	-0.8	22.55	179.89	2
	381000	1905	23.34	-0.8	22.54	179.47	2
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
5M-QPSK	370500	1852.5	23.31	-0.8	22.51	178.24	2
	376000	1880	23.33	-0.8	22.53	179.06	2
	381500	1907.5	23.35	-0.8	22.55	179.89	2



n5 (SCS 15kHz)_Ant2							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	ERP (dBm)	ERP (mW)	FCC Limit (W)
20M-Pi/2 BPSK	166800	834	23.37	-4.2	17.02	50.35	7
	167300	836.5	23.47	-4.2	17.12	51.52	7
	167800	839	23.45	-4.2	17.10	51.29	7
20M-QPSK	166800	834	23.42	-4.2	17.07	50.93	7
	167300	836.5	23.48	-4.2	17.13	51.64	7
	167800	839	23.43	-4.2	17.08	51.05	7
20M-16QAM	166800	834	23.46	-4.2	17.11	51.40	7
	167300	836.5	23.44	-4.2	17.09	51.17	7
	167800	839	23.45	-4.2	17.10	51.29	7
20M-64QAM	166800	834	21.38	-4.2	15.03	31.84	7
	167300	836.5	21.49	-4.2	15.14	32.66	7
	167800	839	21.50	-4.2	15.15	32.73	7
20M- 256QAM	166800	834	19.32	-4.2	12.97	19.82	7
	167300	836.5	19.41	-4.2	13.06	20.23	7
	167800	839	19.34	-4.2	12.99	19.91	7
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	ERP (dBm)	ERP (mW)	FCC Limit (W)
15M-QPSK	166300	831.5	23.40	-4.2	17.05	50.70	7
	167300	836.5	23.32	-4.2	16.97	49.77	7
	168300	841.5	23.39	-4.2	17.04	50.58	7
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	ERP (dBm)	ERP (mW)	FCC Limit (W)
10M-QPSK	165800	829	23.41	-4.2	17.06	50.82	7
	167300	836.5	23.34	-4.2	16.99	50.00	7
	168800	844	23.35	-4.2	17.00	50.12	7
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	ERP (dBm)	ERP (mW)	FCC Limit (W)
5M-QPSK	165300	826.5	23.43	-4.2	17.08	51.05	7
	167300	836.5	23.38	-4.2	17.03	50.47	7
	169300	846.5	23.34	-4.2	16.99	50.00	7



n66 (SCS 15kHz)_Ant1							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
40M-Pi/2 BPSK	346000	1730	23.73	-0.7	23.03	200.91	1
	349000	1745	23.76	-0.7	23.06	202.30	1
	352000	1760	23.77	-0.7	23.07	202.77	1
40M-QPSK	346000	1730	23.68	-0.7	22.98	198.61	1
	349000	1745	23.79	-0.7	23.09	203.70	1
	352000	1760	23.76	-0.7	23.06	202.30	1
40M-16QAM	346000	1730	23.09	-0.7	22.39	173.38	1
	349000	1745	23.18	-0.7	22.48	177.01	1
	352000	1760	23.07	-0.7	22.37	172.58	1
40M-64QAM	346000	1730	20.95	-0.7	20.25	105.93	1
	349000	1745	21.03	-0.7	20.33	107.89	1
	352000	1760	20.99	-0.7	20.29	106.91	1
40M- 256QAM	346000	1730	18.72	-0.7	18.02	63.39	1
	349000	1745	18.71	-0.7	18.01	63.24	1
	352000	1760	18.70	-0.7	18.00	63.10	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
30M-QPSK	345000	1725	23.65	-0.7	22.95	197.24	1
	349000	1745	23.73	-0.7	23.03	200.91	1
	353000	1765	23.53	-0.7	22.83	191.87	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
25M-QPSK	344500	1722.5	23.64	-0.7	22.94	196.79	1
	349000	1745	23.69	-0.7	22.99	199.07	1
	353500	1767.5	23.55	-0.7	22.85	192.75	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20M-QPSK	344000	1720	23.62	-0.7	22.92	195.88	1
	349000	1745	23.59	-0.7	22.89	194.54	1
	354000	1770	23.56	-0.7	22.86	193.20	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
15M-QPSK	343500	1717.5	23.61	-0.7	22.91	195.43	1
	349000	1745	23.63	-0.7	22.93	196.34	1
	354500	1772.5	23.54	-0.7	22.84	192.31	1

**BUREAU VERITAS** Test Report No.: PSU-NQN2412090210RF12

BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
10M-QPSK	343000	1715	23.66	-0.7	22.96	197.70	1
	349000	1745	23.66	-0.7	22.96	197.70	1
	355000	1775	23.50	-0.7	22.80	190.55	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
5M-QPSK	342500	1712.5	23.64	-0.7	22.94	196.79	1
	349000	1745	23.71	-0.7	23.01	199.99	1
	355500	1777.5	23.52	-0.7	22.82	191.43	1


BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

Part27Q_n77 (SCS 30kHz)_Ant4							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
100M-Pi/2 BPSK	633334	3500.01	22.91	-1.34	21.57	143.55	1
100M-QPSK	633334	3500.01	23.16	-1.34	21.82	152.05	1
100M- 16QAM	633334	3500.01	23.15	-1.34	21.81	151.71	1
100M- 64QAM	633334	3500.01	22.79	-1.34	21.45	139.64	1
100M- 256QAM	633334	3500.01	21.19	-1.34	19.85	96.61	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
90M-QPSK	633000	3495	23.07	-1.34	21.73	148.94	1
	633334	3500.01	23.09	-1.34	21.75	149.62	1
	633666	3504.99	22.67	-1.34	21.33	135.83	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
80M-QPSK	632668	3490.02	23.05	-1.34	21.71	148.25	1
	633334	3500.01	23.01	-1.34	21.67	146.89	1
	634000	3510	22.92	-1.34	21.58	143.88	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)



			(dBm)				
70M-QPSK	632334	3485.01	22.78	-1.34	21.44	139.32	1
	633334	3500.01	22.91	-1.34	21.57	143.55	1
	634332	3514.98	22.94	-1.34	21.60	144.54	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
60M-QPSK	632000	3480	22.95	-1.34	21.61	144.88	1
	633334	3500.01	22.87	-1.34	21.53	142.23	1
	634666	3519.99	22.95	-1.34	21.61	144.88	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
50M-QPSK	631668	3475.02	22.94	-1.34	21.60	144.54	1
	633334	3500.01	22.87	-1.34	21.53	142.23	1
	635000	3525	22.85	-1.34	21.51	141.58	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
40M-QPSK	631334	3470.01	22.81	-1.34	21.47	140.28	1
	633334	3500.01	22.93	-1.34	21.59	144.21	1
	635332	3529.98	22.75	-1.34	21.41	138.36	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
30M-QPSK	631000	3465	22.72	-1.34	21.38	137.40	1
	633334	3500.01	22.89	-1.34	21.55	142.89	1
	635666	3534.99	22.82	-1.34	21.48	140.60	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20M-QPSK	630668	3460.02	23.09	-1.34	21.75	149.62	1
	633334	3500.01	22.85	-1.34	21.51	141.58	1
	636000	3540	22.91	-1.34	21.57	143.55	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
15M-QPSK	630500	3457.5	23.09	-1.34	21.75	149.62	1
	633334	3500.01	22.95	-1.34	21.61	144.88	1
	636166	3542.49	23.04	-1.34	21.70	147.91	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

			(dBm)				
10M-QPSK	630334	3455.01	23.09	-1.34	21.75	149.62	1
	633334	3500.01	23.12	-1.34	21.78	150.66	1
	636332	3544.98	23.09	-1.34	21.75	149.62	1



Part270_n77 (SCS 30kHz)_Ant4

BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
100M-Pi/2 BPSK	650000	3750	22.65	-1.34	21.31	135.21	1
	656000	3840	22.87	-1.34	21.53	142.23	1
	662000	3930	23.09	-1.34	21.75	149.62	1
100M-QPSK	650000	3750	22.85	-1.34	21.51	141.58	1
	656000	3840	22.95	-1.34	21.61	144.88	1
	662000	3930	23.14	-1.34	21.80	151.36	1
100M- 16QAM	650000	3750	22.58	-1.34	21.24	133.05	1
	656000	3840	22.60	-1.34	21.26	133.66	1
	662000	3930	22.94	-1.34	21.60	144.54	1
100M- 64QAM	650000	3750	22.37	-1.34	21.03	126.77	1
	656000	3840	22.30	-1.34	20.96	124.74	1
	662000	3930	22.67	-1.34	21.33	135.83	1
100M- 256QAM	650000	3750	20.66	-1.34	19.32	85.51	1
	656000	3840	20.65	-1.34	19.31	85.31	1
	662000	3930	20.98	-1.34	19.64	92.04	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
90M-QPSK	649668	3745.02	22.77	-1.34	21.43	139.00	1
	656000	3840	22.66	-1.34	21.32	135.52	1
	662332	3934.98	22.90	-1.34	21.56	143.22	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
80M-QPSK	649334	3740.01	22.78	-1.34	21.44	139.32	1
	656000	3840	22.70	-1.34	21.36	136.77	1
	662666	3939.99	23.01	-1.34	21.67	146.89	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
70M-QPSK	649000	3735	22.76	-1.34	21.42	138.68	1
	656000	3840	22.69	-1.34	21.35	136.46	1
	663000	3945	23.06	-1.34	21.72	148.59	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
60M-QPSK	648668	3730.02	22.73	-1.34	21.39	137.72	1
	656000	3840	22.76	-1.34	21.42	138.68	1
	663332	3949.98	22.97	-1.34	21.63	145.55	1



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
50M-QPSK	648334	3725.01	22.73	-1.34	21.39	137.56	1
	656000	3840	22.65	-1.34	21.31	135.21	1
	663666	3954.99	22.98	-1.34	21.64	145.88	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
40M-QPSK	648000	3720	22.78	-1.34	21.44	139.32	1
	656000	3840	22.56	-1.34	21.22	132.43	1
	664000	3960	22.92	-1.34	21.58	143.88	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
30M-QPSK	647668	3715.02	22.79	-1.34	21.45	139.64	1
	656000	3840	22.54	-1.34	21.20	131.83	1
	664332	3964.98	22.79	-1.34	21.45	139.64	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20M-QPSK	647334	3710.01	22.80	-1.34	21.46	139.96	1
	656000	3840	22.88	-1.34	21.54	142.56	1
	664666	3969.99	22.90	-1.34	21.56	143.22	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
15M-QPSK	647168	3707.52	22.81	-1.34	21.47	140.28	1
	656000	3840	22.91	-1.34	21.57	143.55	1
	664832	3972.48	22.87	-1.34	21.53	142.23	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
10M-QPSK	647000	3705	22.76	-1.34	21.42	138.68	1
	656000	3840	22.89	-1.34	21.55	142.89	1
	665000	3975	22.85	-1.34	21.51	141.58	1



Part27Q_n77_HPUE (SCS 30kHz)_Ant4							
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
100M-Pi/2 BPSK	633334	3500.01	25.77	-1.34	24.43	277.33	1
100M-QPSK	633334	3500.01	25.93	-1.34	24.59	287.74	1
100M- 16QAM	633334	3500.01	24.92	-1.34	23.58	228.03	1
100M- 64QAM	633334	3500.01	23.19	-1.34	21.85	153.11	1
100M- 256QAM	633334	3500.01	20.96	-1.34	19.62	91.62	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
90M-QPSK	633000	3495	25.72	-1.34	24.38	274.16	1
	633334	3500.01	25.85	-1.34	24.51	282.49	1
	633666	3504.99	25.77	-1.34	24.43	277.33	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
80M-QPSK	632668	3490.02	25.71	-1.34	24.37	273.53	1
	633334	3500.01	25.77	-1.34	24.43	277.33	1
	634000	3510	25.68	-1.34	24.34	271.64	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)



			(dBm)				
70M-QPSK	632334	3485.01	25.70	-1.34	24.36	272.90	1
	633334	3500.01	25.84	-1.34	24.50	281.84	1
	634332	3514.98	25.87	-1.34	24.53	283.79	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
60M-QPSK	632000	3480	25.75	-1.34	24.41	276.06	1
	633334	3500.01	25.62	-1.34	24.28	267.92	1
	634666	3519.99	25.75	-1.34	24.41	276.06	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
50M-QPSK	631668	3475.02	25.74	-1.34	24.40	275.42	1
	633334	3500.01	25.88	-1.34	24.54	284.45	1
	635000	3525	25.72	-1.34	24.38	274.16	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
40M-QPSK	631334	3470.01	25.76	-1.34	24.42	276.69	1
	633334	3500.01	25.89	-1.34	24.55	285.10	1
	635332	3529.98	25.70	-1.34	24.36	272.90	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
30M-QPSK	631000	3465	25.81	-1.34	24.47	279.90	1
	633334	3500.01	25.84	-1.34	24.50	281.84	1
	635666	3534.99	25.82	-1.34	24.48	280.54	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20M-QPSK	630668	3460.02	25.89	-1.34	24.55	285.10	1
	633334	3500.01	25.75	-1.34	24.41	276.06	1
	636000	3540	25.67	-1.34	24.33	271.02	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
15M-QPSK	630500	3457.5	25.56	-1.34	24.22	264.24	1
	633334	3500.01	25.69	-1.34	24.35	272.27	1
	636166	3542.49	25.66	-1.34	24.32	270.40	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

			(dBm)				
10M-QPSK	630334	3455.01	25.67	-1.34	24.33	271.02	1
	633334	3500.01	25.87	-1.34	24.53	283.79	1
	636332	3544.98	25.70	-1.34	24.36	272.90	1



Part27O_n77_HPUE (SCS 30kHz)_Ant4

BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
100M-Pi/2 BPSK	650000	3750	25.77	-1.34	24.43	277.33	1
	656000	3840	25.89	-1.34	24.55	285.10	1
	662000	3930	26.05	-1.34	24.71	295.80	1
100M-QPSK	650000	3750	25.87	-1.34	24.53	283.79	1
	656000	3840	25.89	-1.34	24.55	285.10	1
	662000	3930	26.12	-1.34	24.78	300.61	1
100M- 16QAM	650000	3750	24.64	-1.34	23.30	213.80	1
	656000	3840	24.86	-1.34	23.52	224.91	1
	662000	3930	24.88	-1.34	23.54	225.94	1
100M- 64QAM	650000	3750	22.67	-1.34	21.33	135.83	1
	656000	3840	22.76	-1.34	21.42	138.68	1
	662000	3930	22.89	-1.34	21.55	142.89	1
100M- 256QAM	650000	3750	20.48	-1.34	19.14	82.04	1
	656000	3840	20.60	-1.34	19.26	84.33	1
	662000	3930	20.82	-1.34	19.48	88.72	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
90M-QPSK	649668	3745.02	25.82	-1.34	24.48	280.54	1
	656000	3840	25.58	-1.34	24.24	265.46	1
	662332	3934.98	25.94	-1.34	24.60	288.40	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
80M-QPSK	649334	3740.01	25.84	-1.34	24.50	281.84	1
	656000	3840	25.59	-1.34	24.25	266.07	1
	662666	3939.99	25.96	-1.34	24.62	289.73	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
70M-QPSK	649000	3735	25.86	-1.34	24.52	283.14	1
	656000	3840	25.63	-1.34	24.29	268.53	1
	663000	3945	25.95	-1.34	24.61	289.07	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
60M-QPSK	648668	3730.02	25.77	-1.34	24.43	277.33	1
	656000	3840	25.83	-1.34	24.49	281.19	1
	663332	3949.98	25.87	-1.34	24.53	283.79	1



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
50M-QPSK	648334	3725.01	25.67	-1.34	24.33	271.02	1
	656000	3840	25.69	-1.34	24.35	272.27	1
	663666	3954.99	25.88	-1.34	24.54	284.45	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
40M-QPSK	648000	3720	25.80	-1.34	24.46	279.25	1
	656000	3840	25.91	-1.34	24.57	286.42	1
	664000	3960	25.95	-1.34	24.61	289.07	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
30M-QPSK	647668	3715.02	25.76	-1.34	24.42	276.69	1
	656000	3840	25.88	-1.34	24.54	284.45	1
	664332	3964.98	25.94	-1.34	24.60	288.40	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20M-QPSK	647334	3710.01	25.87	-1.34	24.53	283.79	1
	656000	3840	25.95	-1.34	24.61	289.07	1
	664666	3969.99	25.91	-1.34	24.57	286.42	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
15M-QPSK	647168	3707.52	25.87	-1.34	24.53	283.79	1
	656000	3840	25.95	-1.34	24.61	289.07	1
	664832	3972.48	25.94	-1.34	24.60	288.40	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
10M-QPSK	647000	3705	25.87	-1.34	24.53	283.79	1
	656000	3840	25.90	-1.34	24.56	285.76	1
	665000	3975	25.95	-1.34	24.61	289.07	1
BW [MHz] Modulation	Channel	Frequency (MHz)	Conducted Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

After evaluation, ant4 N77 HPUE mode has the highest power, so EIRP only reflects ant4 data

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12
calculation.

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

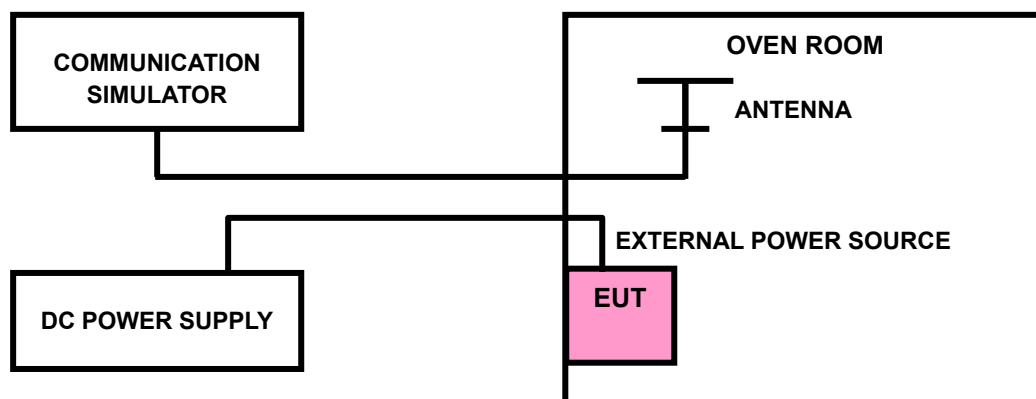



3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.

Note: VL = Low voltage(3.6V); VN/NV = Normal voltage(3.87V); VH = High voltage(4.45V);
NT = Normal temperature (25°C)




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.3.2 TEST SETUP

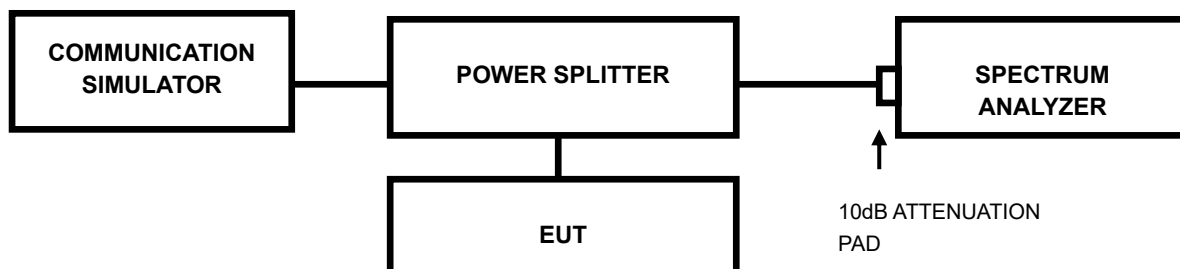

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.



3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.(n2/n5/n25/n66)

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. (n12/n71)

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.(n7/n41)


According to FCC 27.53(l)(2) specified that For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.(n77/n78)

According to FCC 27.53(n)(2) specified that For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of



the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 TEST SETUP

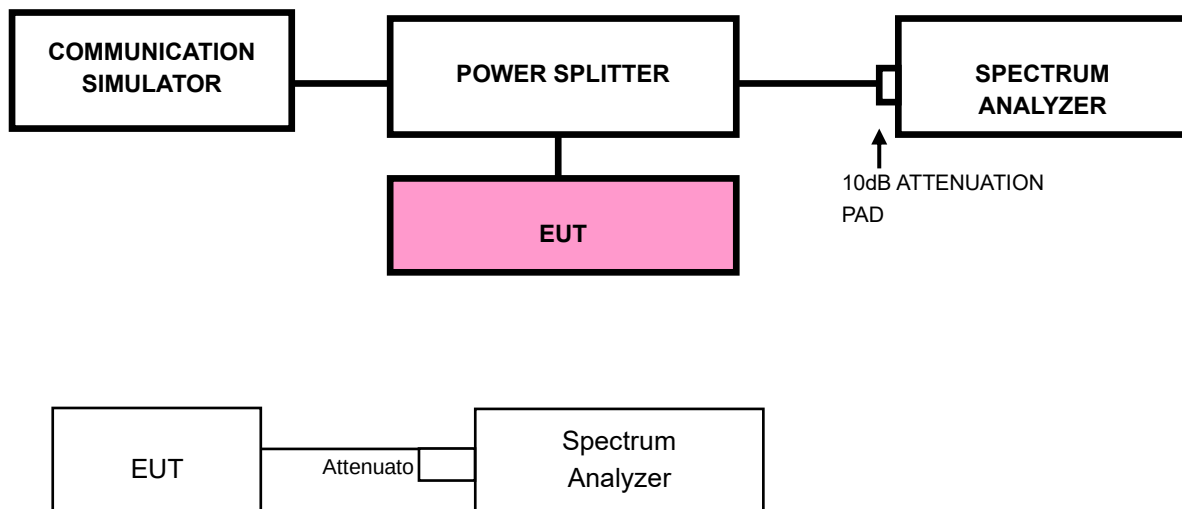



3.4.3 TEST PROCEDURES

- a) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- b) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
- c) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- e) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- f) Select the average power (RMS) display detector.
- g) Set the number of measurement points to ≥ 1001 .
- h) Use auto-coupled sweep time.
- i) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- j) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- k) Record the max trace plot into the test report.



3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.



3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13dBm.


For 5G NR n41:

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

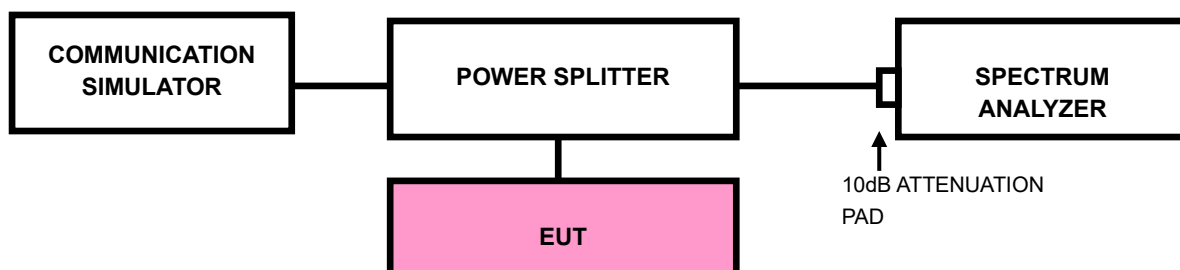



3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13dBm.

For 5G NR n7/n41:

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation





3.6.4 TEST SETUP

< Frequency Range below 30MHz >

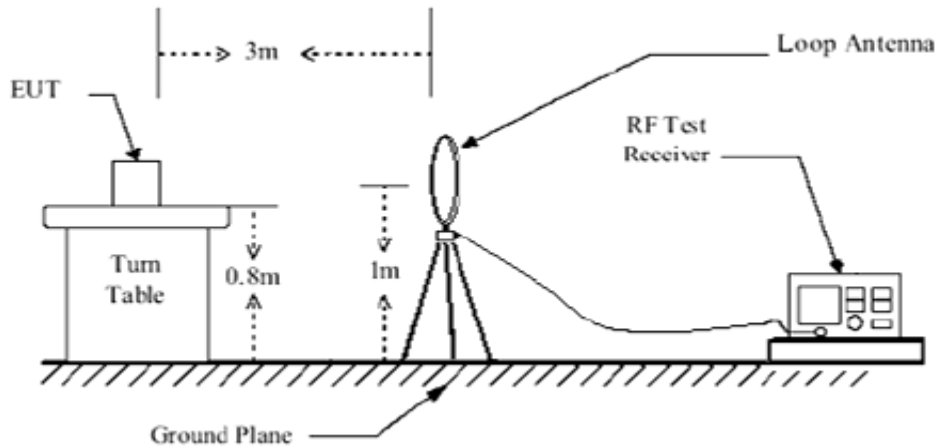

< Frequency Range 30MHz~1GHz >

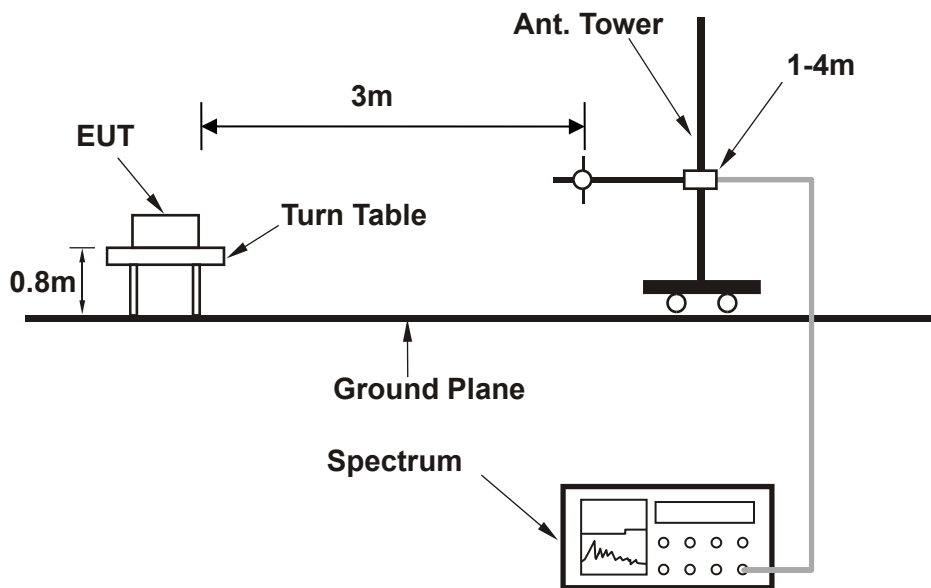

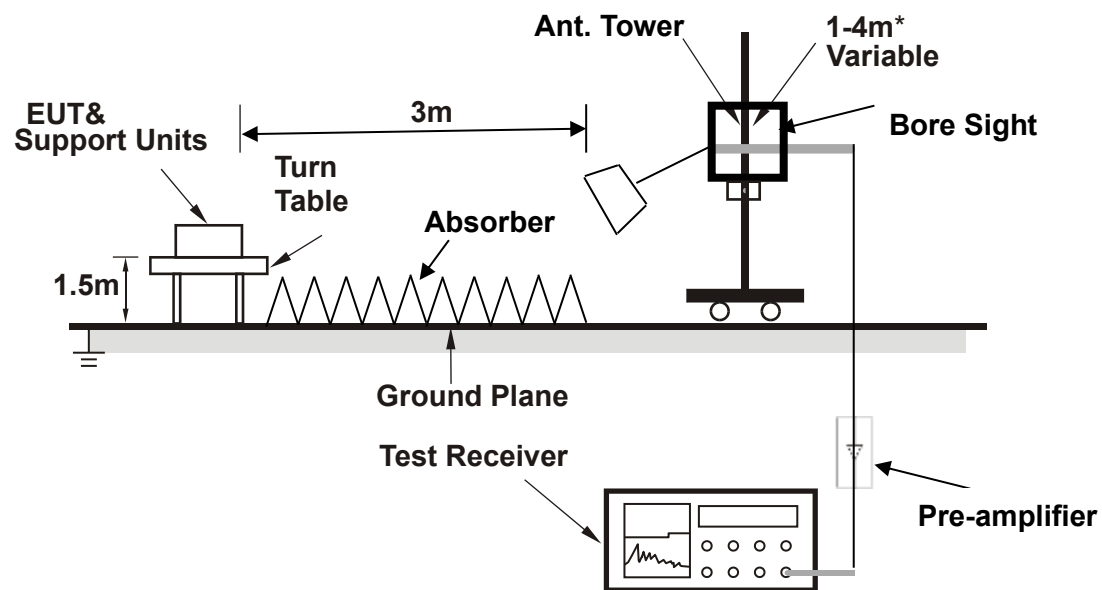

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

5G SA BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

N66

CHANNEL BANDWIDTH: 30MHz / QPSK

MODE	TX channel 349000	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	36.350	-69.32	-13.00	56.32	-0.64	H	1	1.00
1	63.200	-75.73	-13.00	62.73	-7.13	H	359	2.00
1	118.100	-84.34	-13.00	71.34	-11.56	H	359	2.00
1	231.900	-70.62	-13.00	57.62	1.48	H	126	1.00
1	324.250	-73.87	-13.00	60.87	-3.42	H	219.2	1.00
2	466.317	-75.29	-13.00	62.29	1.21	H	53.4	2.00

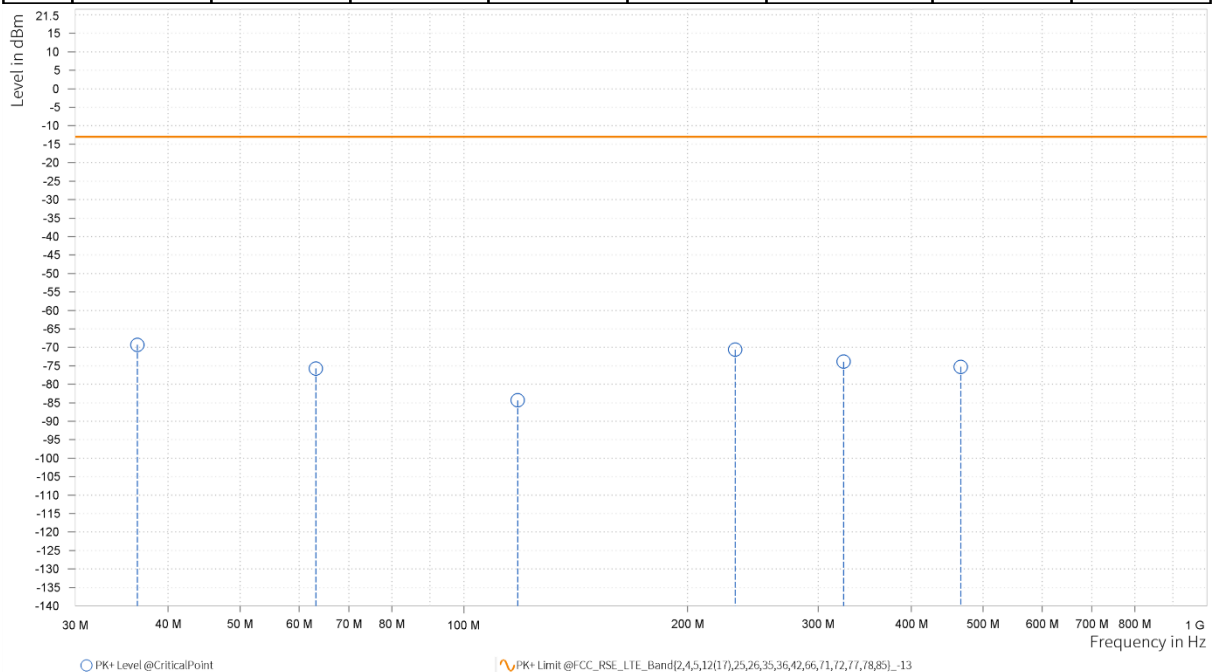



MODE	TX channel 349000	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.550	-68.92	-13.00	55.92	-7.94	V	355.1	2.00
1	57.950	-75.62	-13.00	62.62	-4.31	V	355.1	2.00
1	105.400	-62.94	-13.00	49.94	4.12	V	47.5	2.00
1	199.950	-80.42	-13.00	67.42	-6.58	V	316	1.00
1	323.650	-76.74	-13.00	63.74	-1.91	V	1	2.00
2	540.933	-76.32	-13.00	63.32	-0.77	V	233.5	1.00

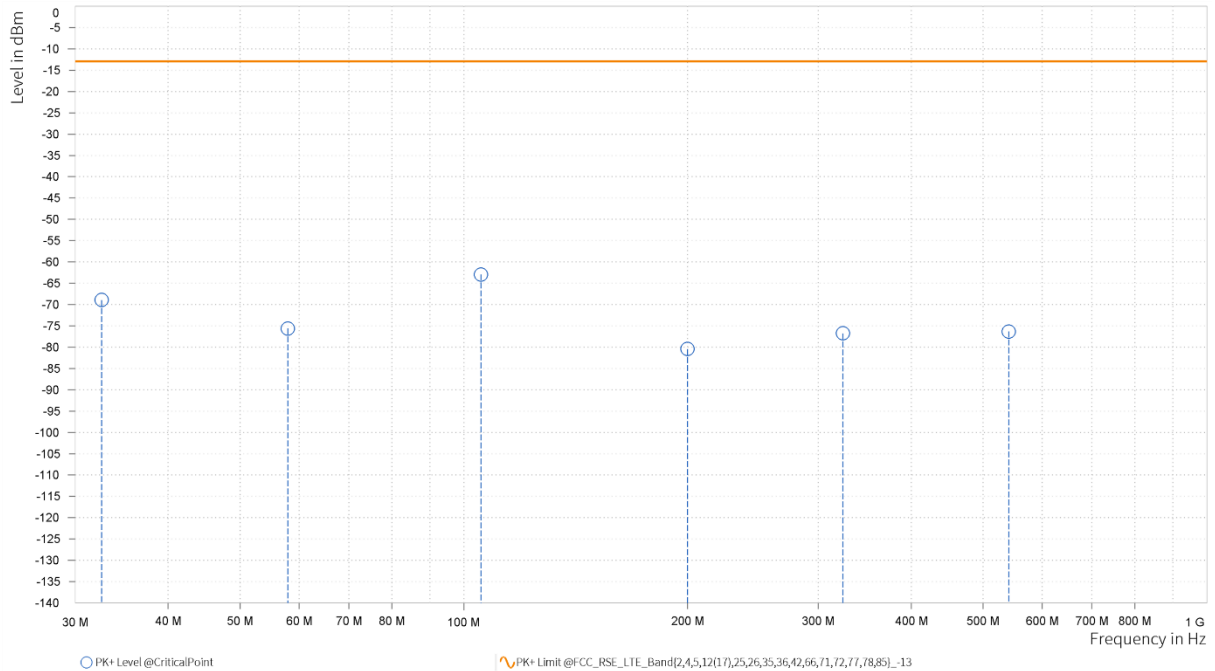


**Test Report No.: PSU-NQN2412090210RF12****ABOVE 1GHz**

Note: For higher frequency, the emission is too low to be detected.

N2**CHANNEL BANDWIDTH: 5MHz / QPSK****CH 376000:**


MODE		TX channel 376000			FREQUENCY RANGE		Above 1000MHz	
ENVIRONMENTAL CONDITIONS		23deg. C, 70%RH			INPUT POWER		DC 12V	
TESTED BY		Hanwen Xu						
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,755.500	-50.11	-13.00	37.11	21.55	H	102.4	2.00
4	5,633.250	-47.49	-13.00	34.49	24.75	H	94	1.00

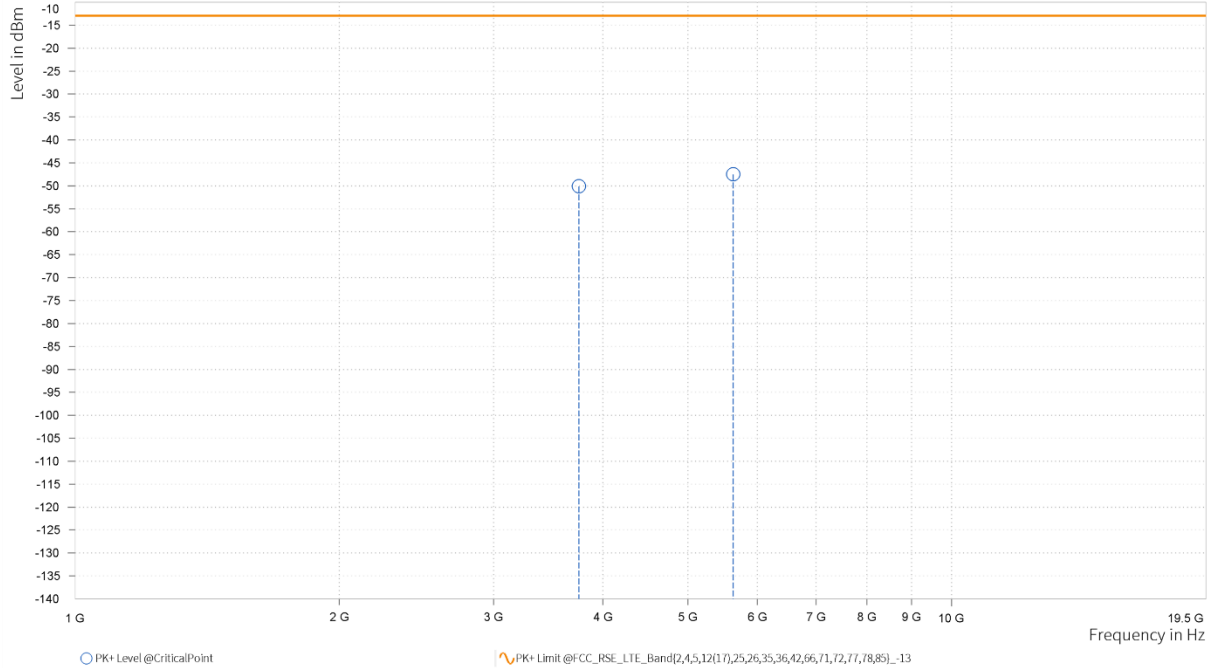



MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,755.500	-51.30	-13.00	38.30	22.10	V	1	1.00
4	5,633.250	-49.24	-13.00	36.24	25.09	V	306.3	1.00

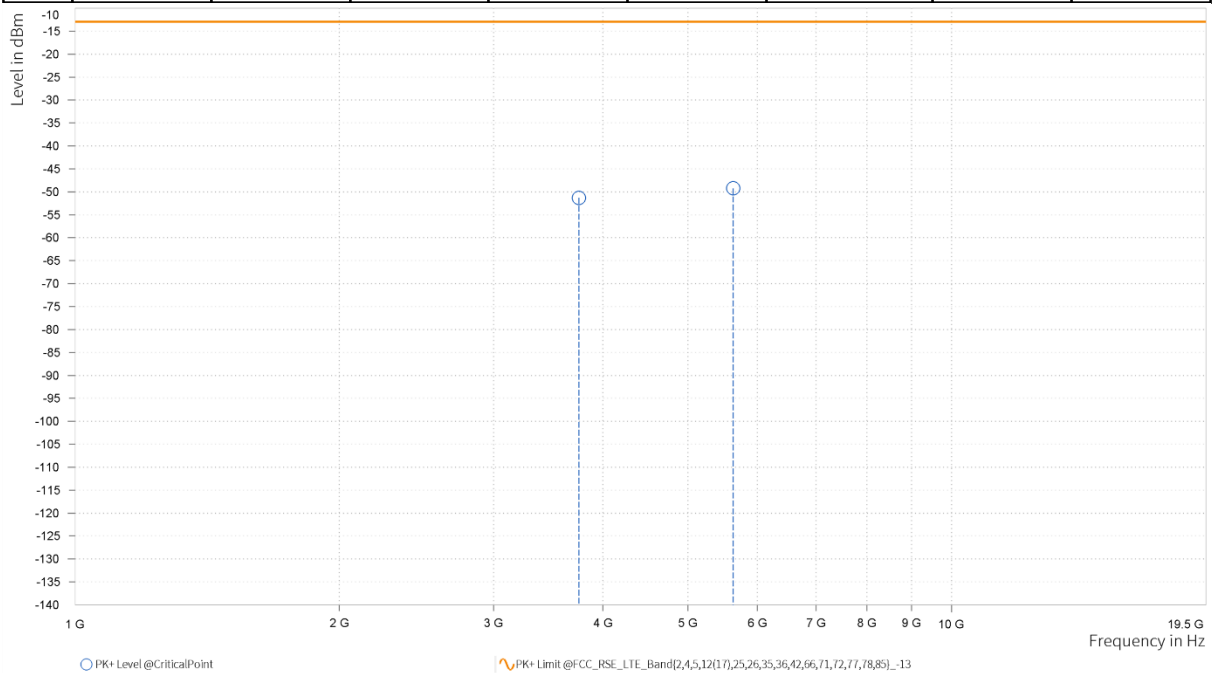




CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 371000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,701.000	-49.71	-13.00	36.71	21.12	H	264.5	2.00
4	5,551.500	-48.92	-13.00	35.92	24.26	H	1	1.00

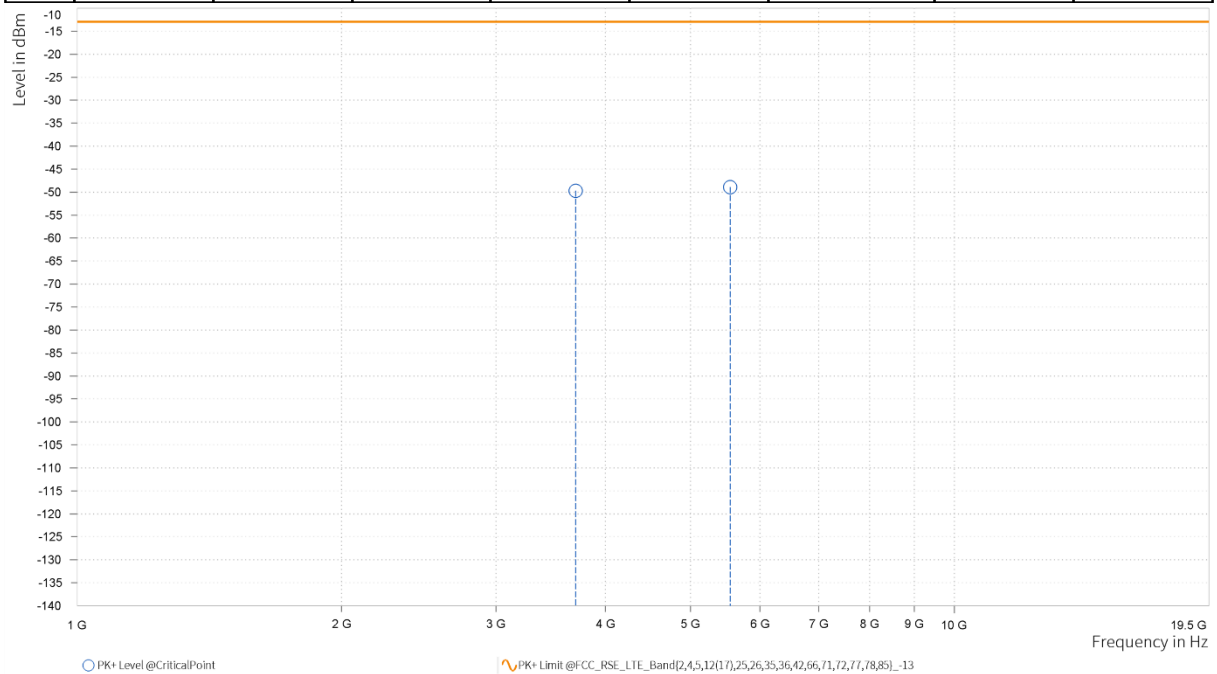



MODE	TX channel 371000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,701.000	-52.11	-13.00	39.11	21.71	V	359	2.00
4	5,551.500	-45.38	-13.00	32.38	24.96	V	267.4	1.00

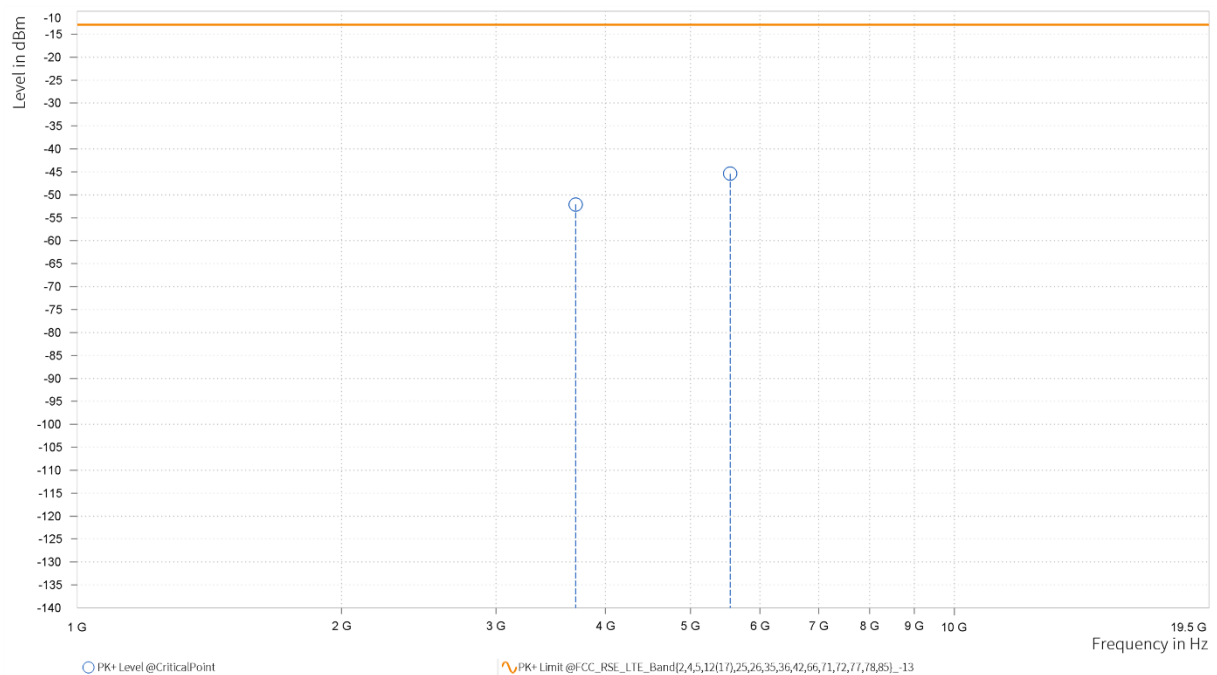




CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.000	-51.25	-13.00	38.25	21.46	H	357.8	1.00
4	5,626.500	-49.35	-13.00	36.35	24.71	H	309.8	1.00

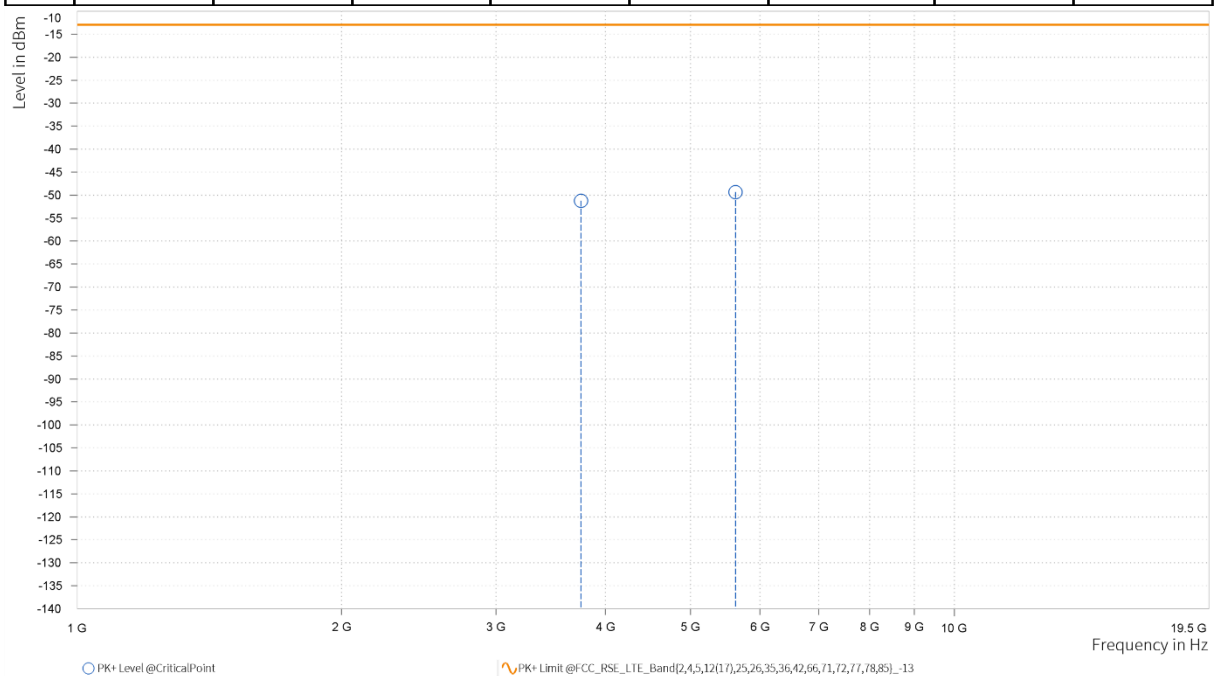



MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.000	-51.09	-13.00	38.09	22.07	V	357.8	1.00
4	5,626.500	-47.46	-13.00	34.46	25.07	V	264.5	2.00

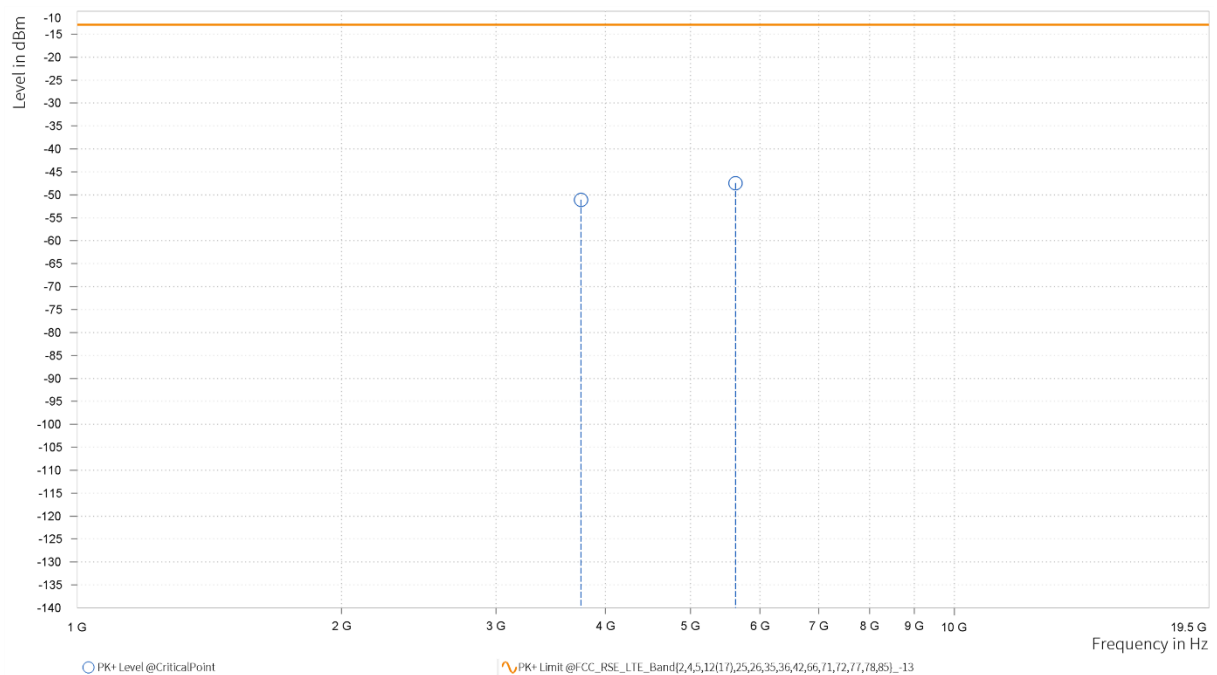




CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 381000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,801.000	-50.50	-13.00	37.50	22.21	H	359	2.00
4	5,701.500	-48.44	-13.00	35.44	25.12	H	268.2	1.00

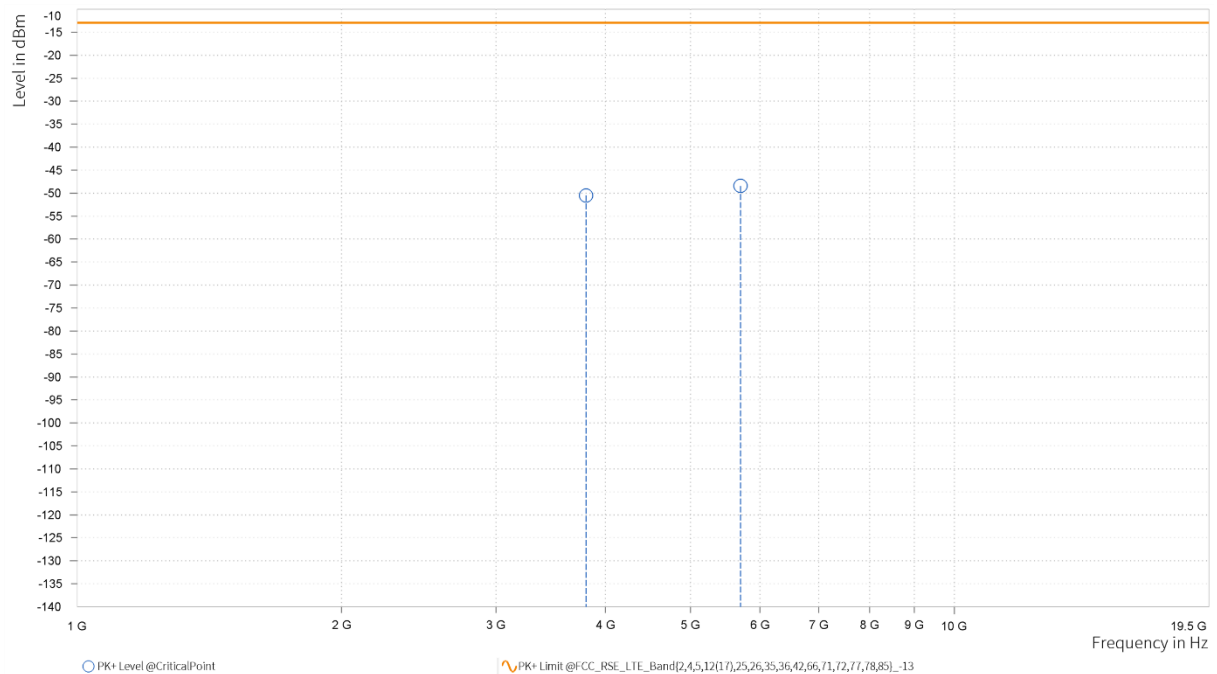




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 381000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,801.000	-48.92	-13.00	35.92	22.47	V	263.8	2.00
4	5,701.500	-47.81	-13.00	34.81	25.55	V	96.2	1.00

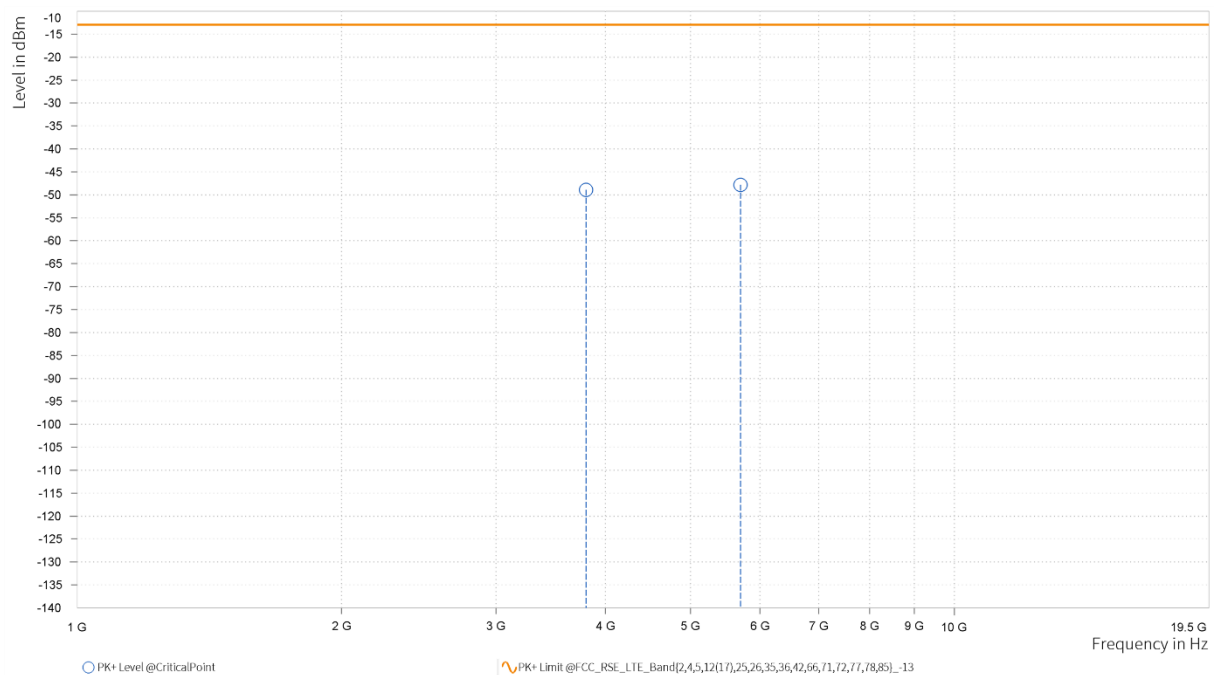




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,746.500	-51.15	-13.00	38.15	21.38	H	0.9	2.00
4	5,619.750	-49.15	-13.00	36.15	24.65	H	359	1.00

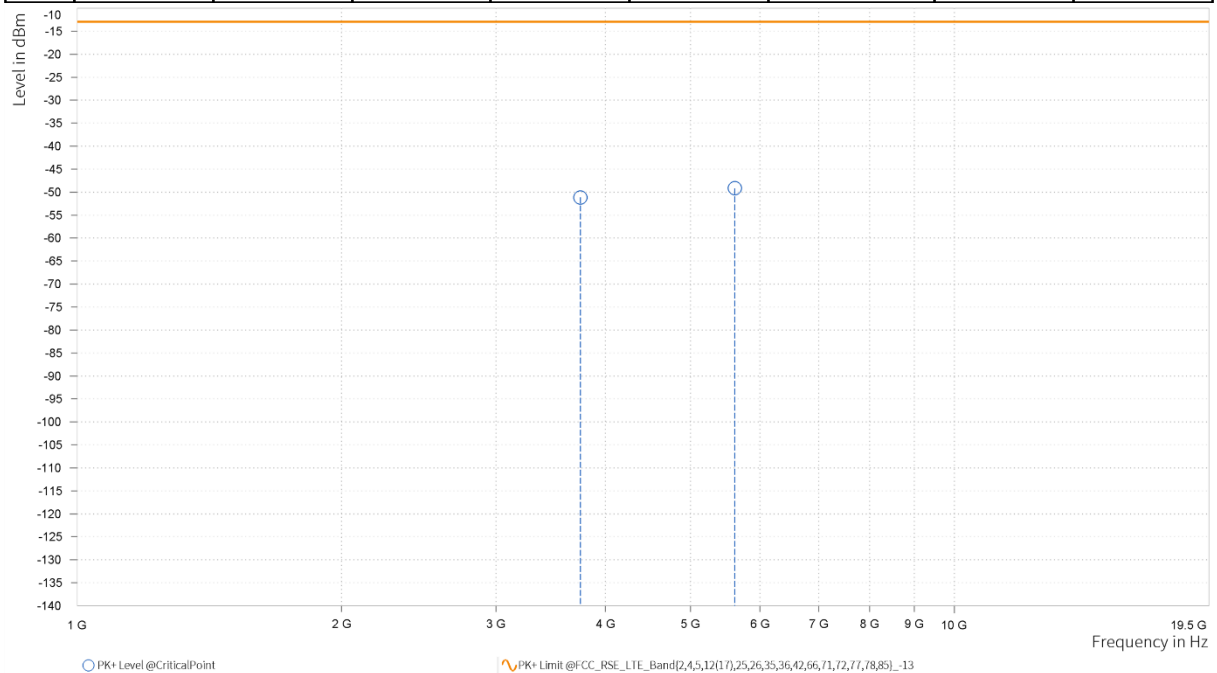




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,746.500	-49.42	-13.00	36.42	22.04	V	34.6	2.00
4	5,619.750	-49.48	-13.00	36.48	25.06	V	1	1.00

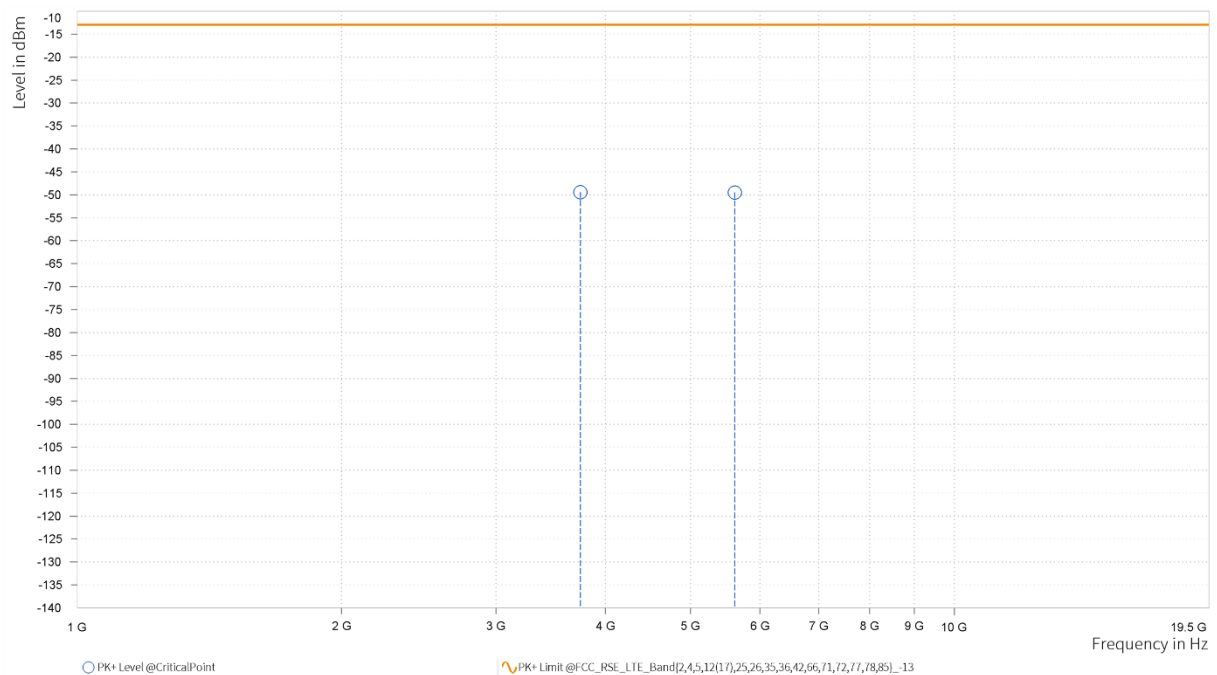




CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-51.48	-13.00	38.48	21.35	H	359	2.00
4	5,613.000	-49.32	-13.00	36.32	24.60	H	45.2	2.00

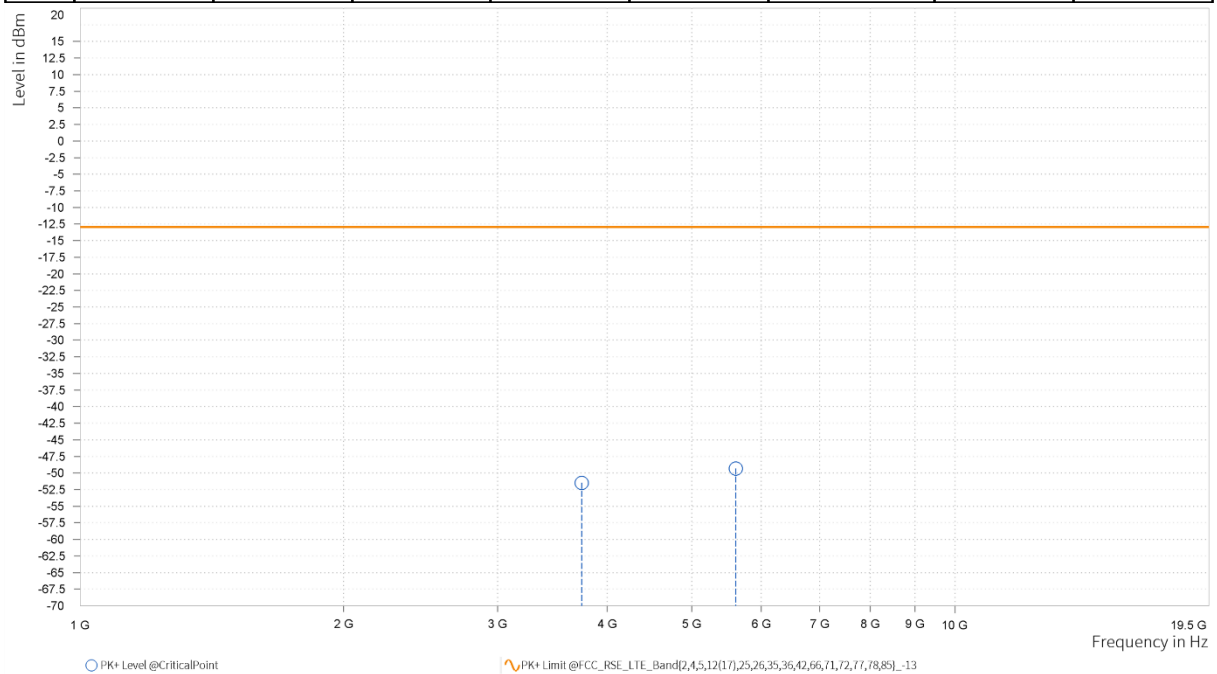



MODE	TX channel 376000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-49.67	-13.00	36.67	22.00	V	0.9	2.00
4	5,613.000	-49.61	-13.00	36.61	25.05	V	357.8	1.00

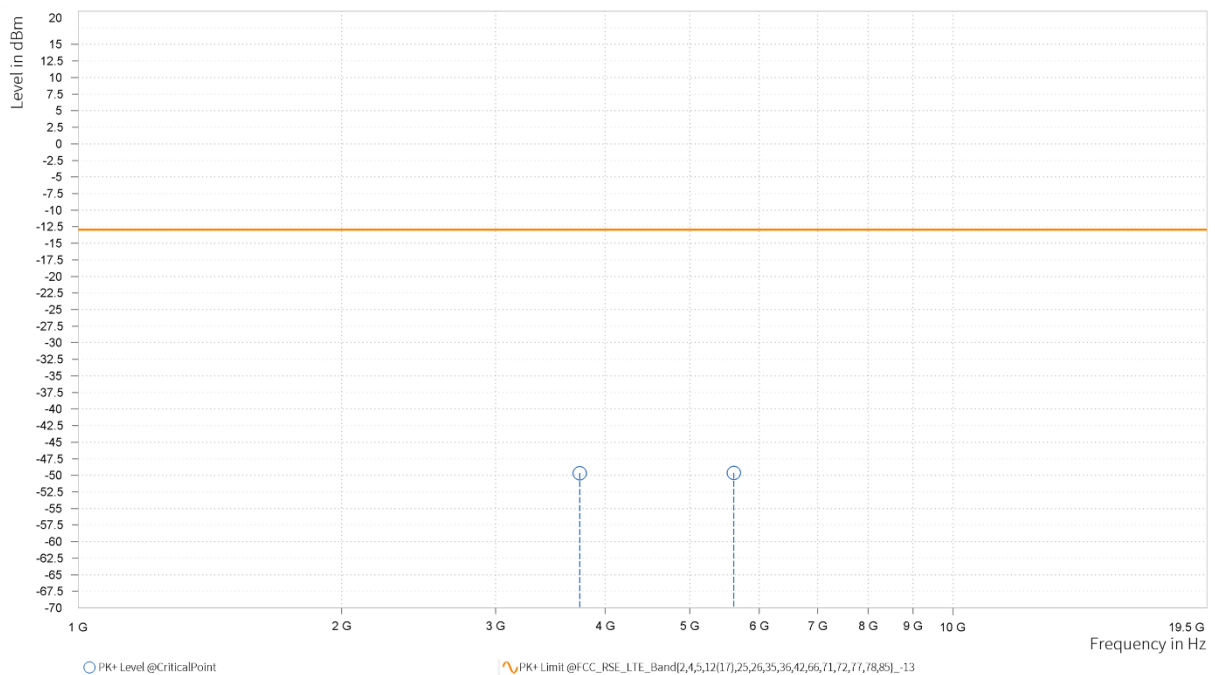




CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-52.69	-13.00	39.69	15.40	H	1	2.00
3	2,502.750	-49.64	-13.00	36.64	20.64	H	1	1.00

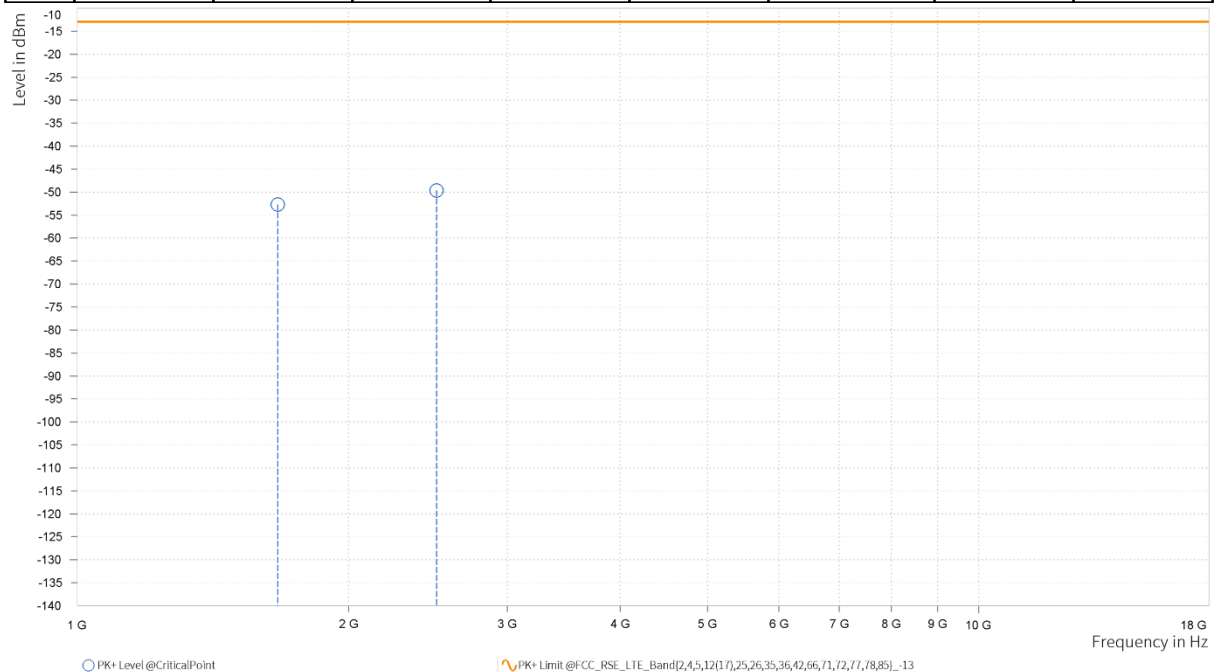



MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-56.11	-13.00	43.11	14.29	V	181.7	2.00
3	2,502.750	-49.19	-13.00	36.19	21.08	V	302.1	1.00

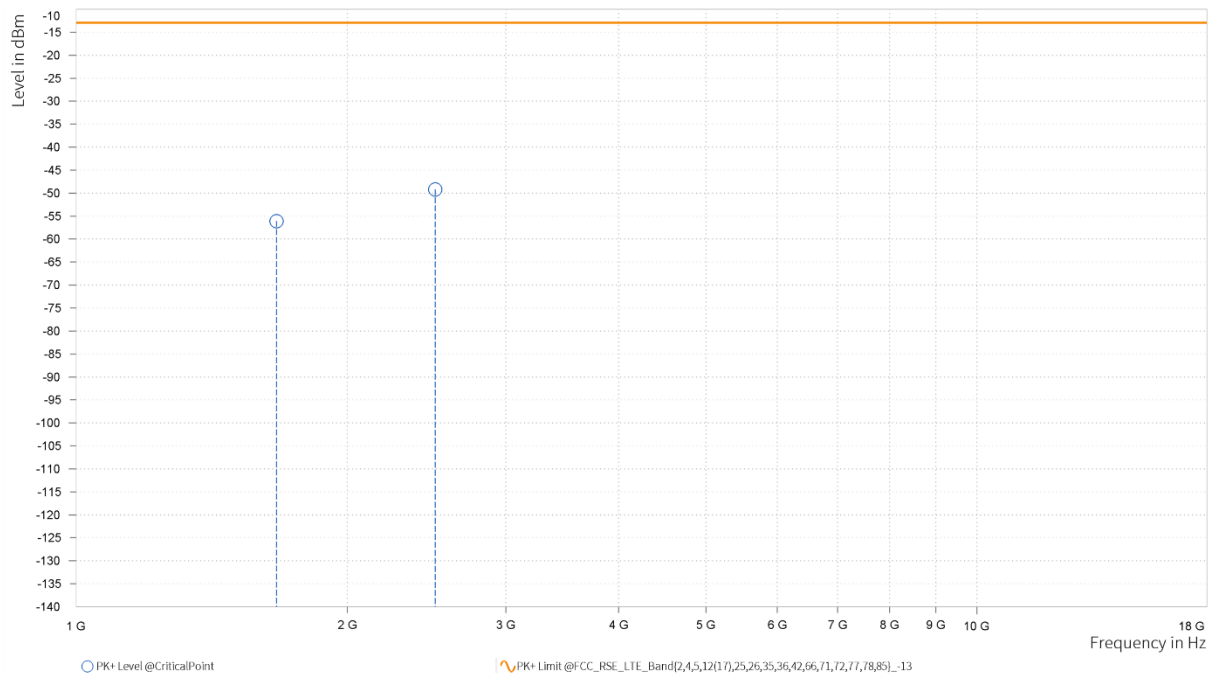




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 165800

MODE	TX channel 165800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-54.69	-13.00	41.69	14.82	H	1.2	2.00
3	2,473.500	-49.37	-13.00	36.37	20.30	H	167.5	2.00

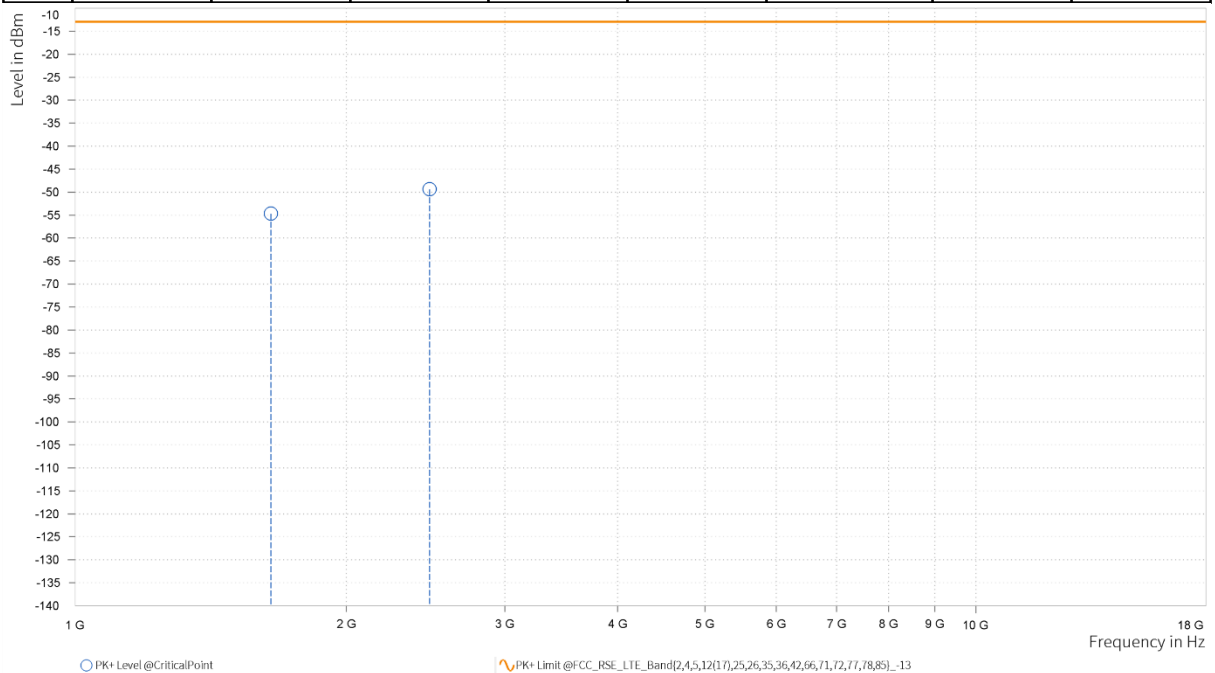



MODE	TX channel 165800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-54.52	-13.00	41.52	14.37	V	359	1.00
3	2,473.500	-49.39	-13.00	36.39	20.55	V	359	1.00

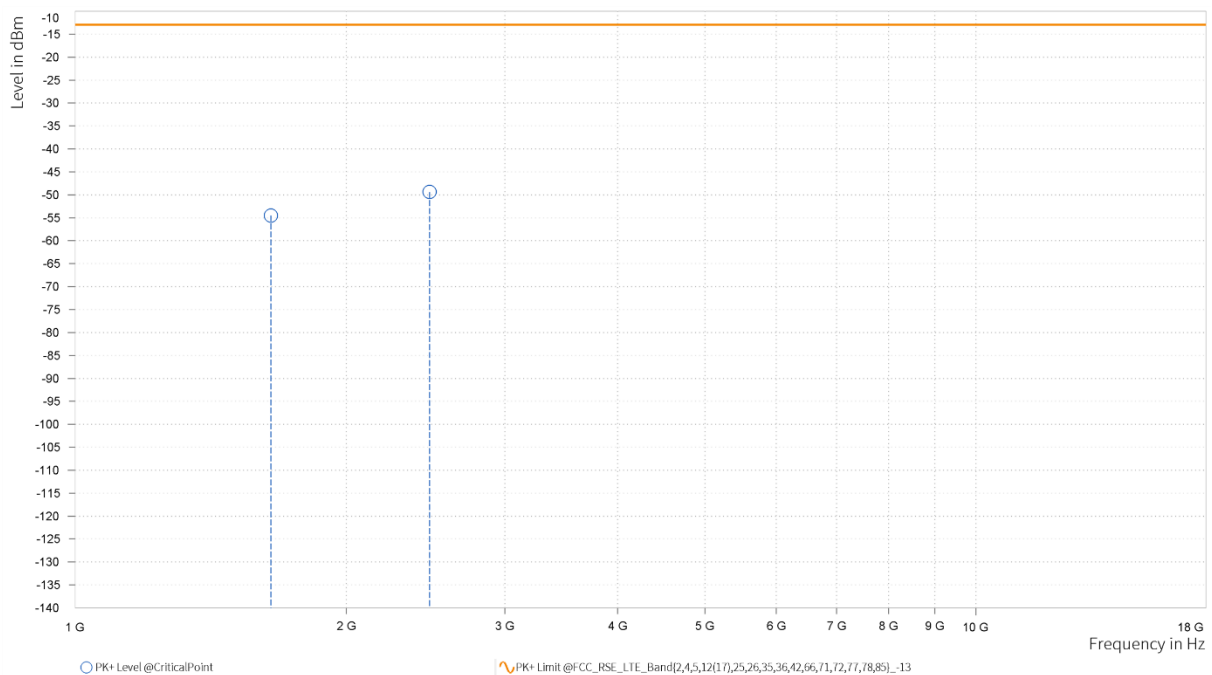



MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-53.77	-13.00	40.77	15.32	H	325.4	2.00
3	2,496.000	-49.95	-13.00	36.95	20.76	H	185.3	1.00

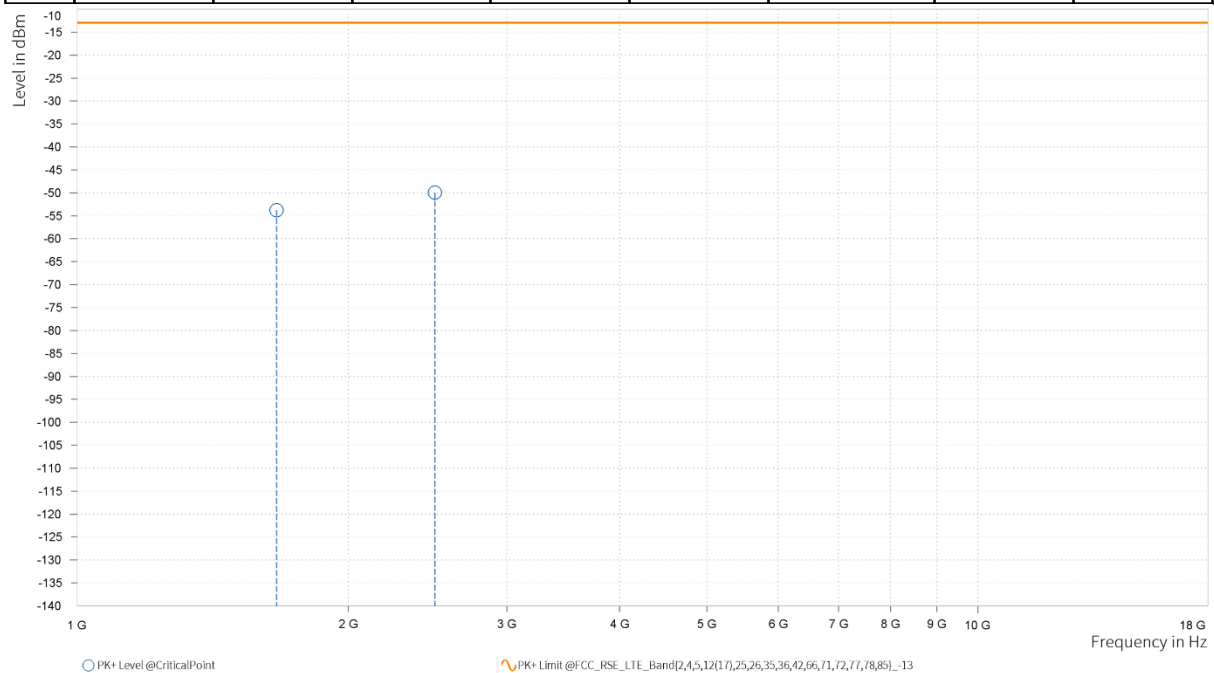



MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-55.39	-13.00	42.39	14.20	V	1	2.00
3	2,496.000	-47.99	-13.00	34.99	21.03	V	190.2	1.00

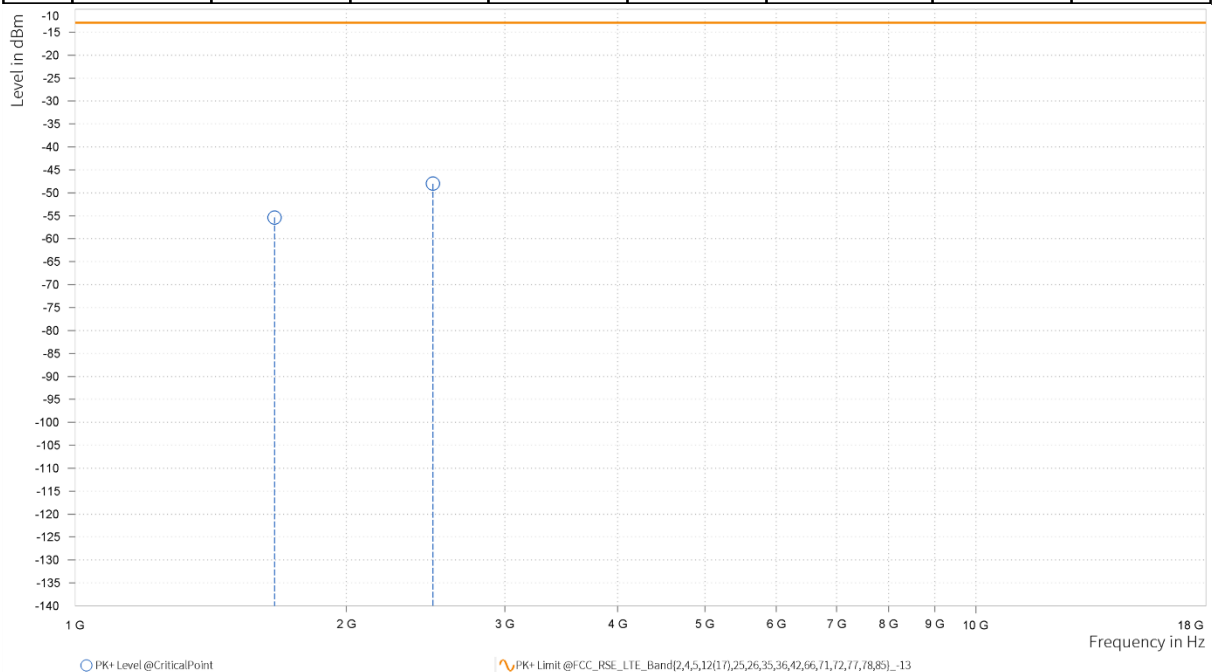



MODE	TX channel 166800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-50.05	-13.00	37.05	15.64	H	1	2.00
3	2,518.500	-50.22	-13.00	37.22	20.28	H	359	2.00

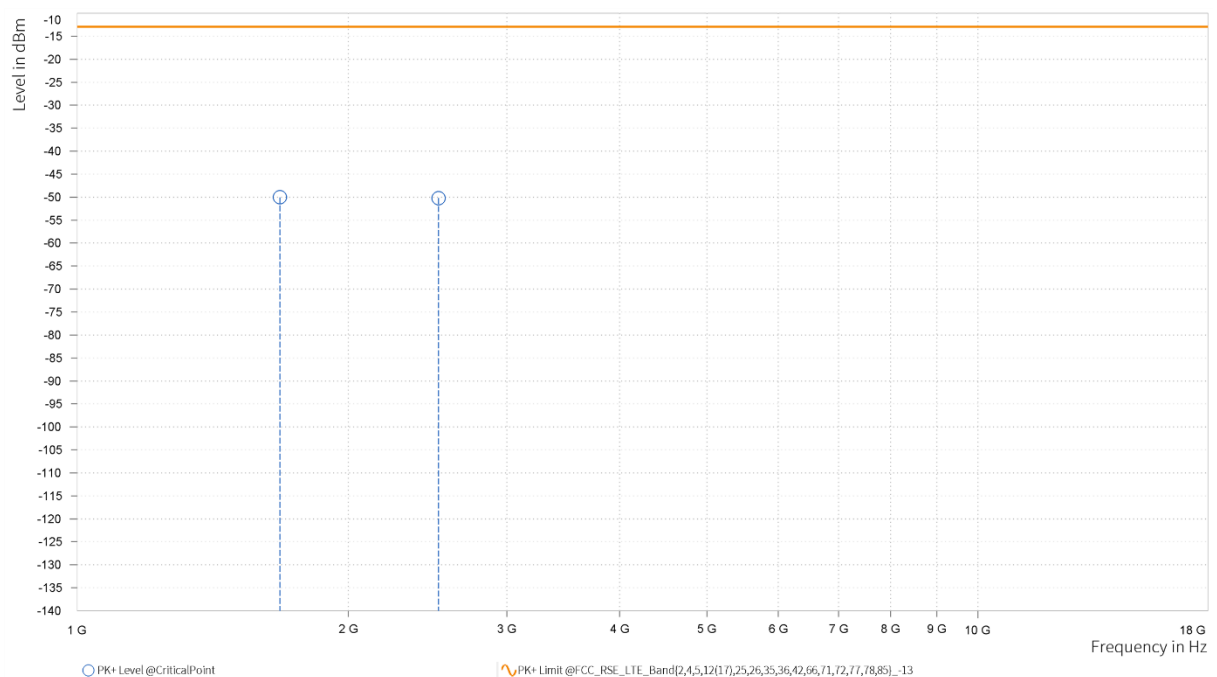



MODE	TX channel 166800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,679.000	-55.31	-13.00	42.31	14.56	V	185.3	1.00
3	2,518.500	-49.53	-13.00	36.53	21.13	V	166.8	2.00

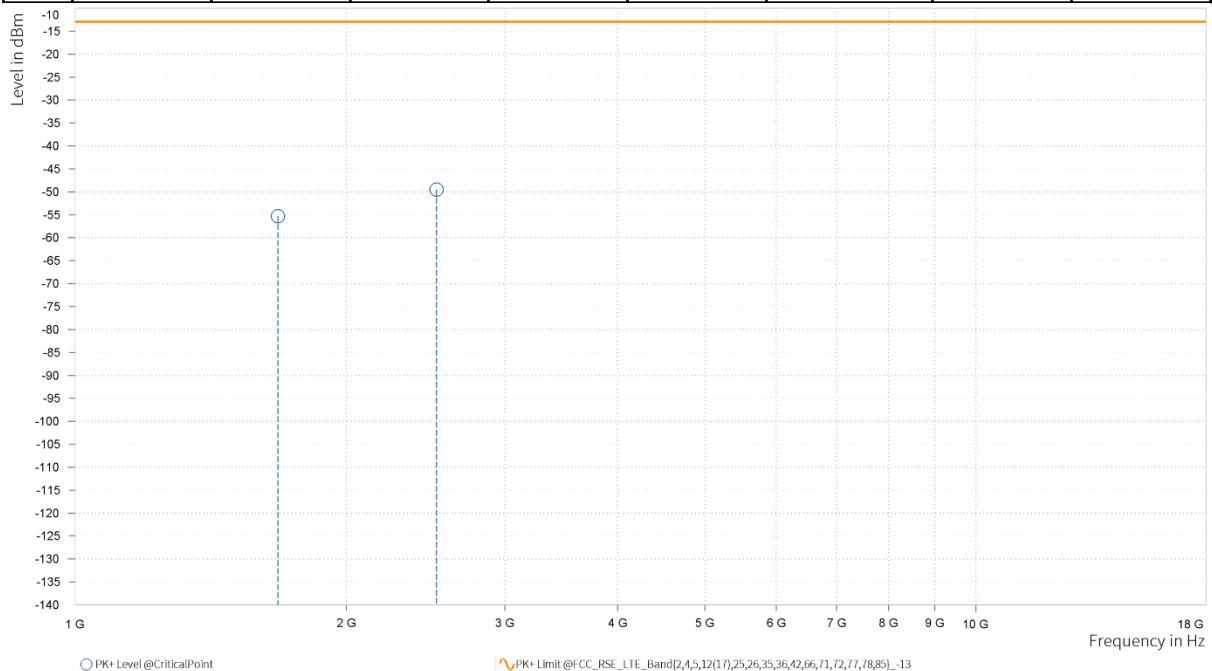




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,659.500	-53.37	-13.00	40.37	15.24	H	1.4	2.00
3	2,489.250	-48.64	-13.00	35.64	20.68	H	192.4	1.00

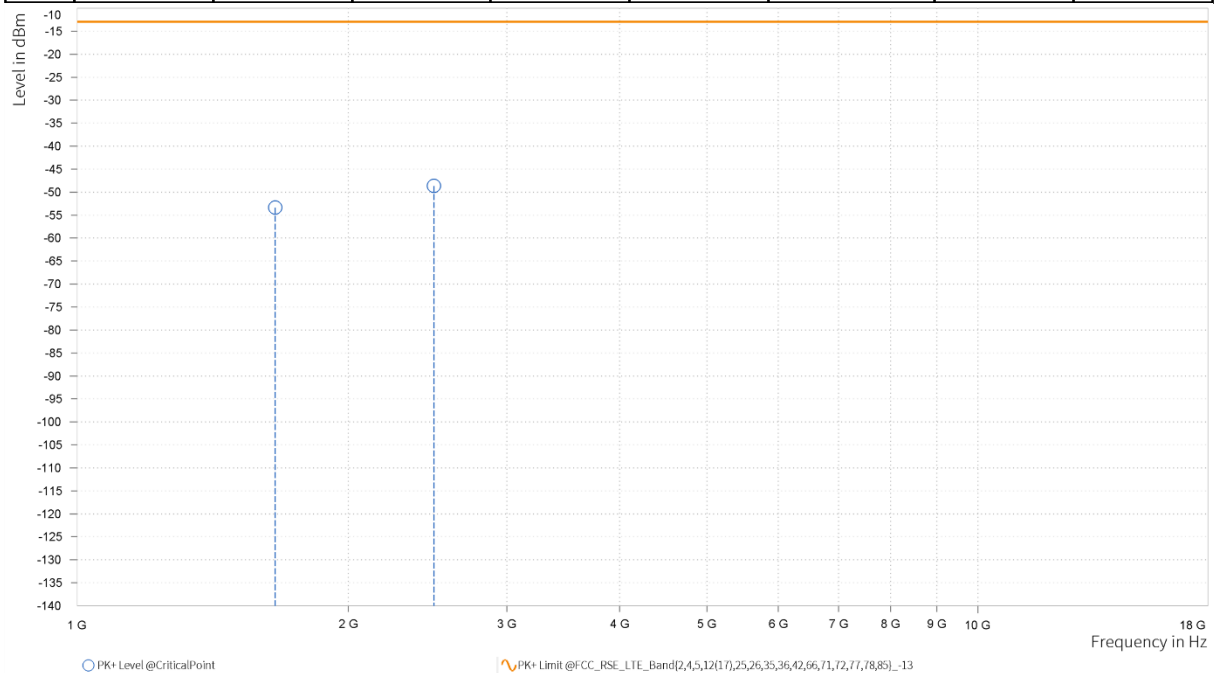



MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,659.500	-56.45	-13.00	43.45	14.12	V	0.9	2.00
3	2,489.250	-48.64	-13.00	35.64	20.91	V	359	2.00

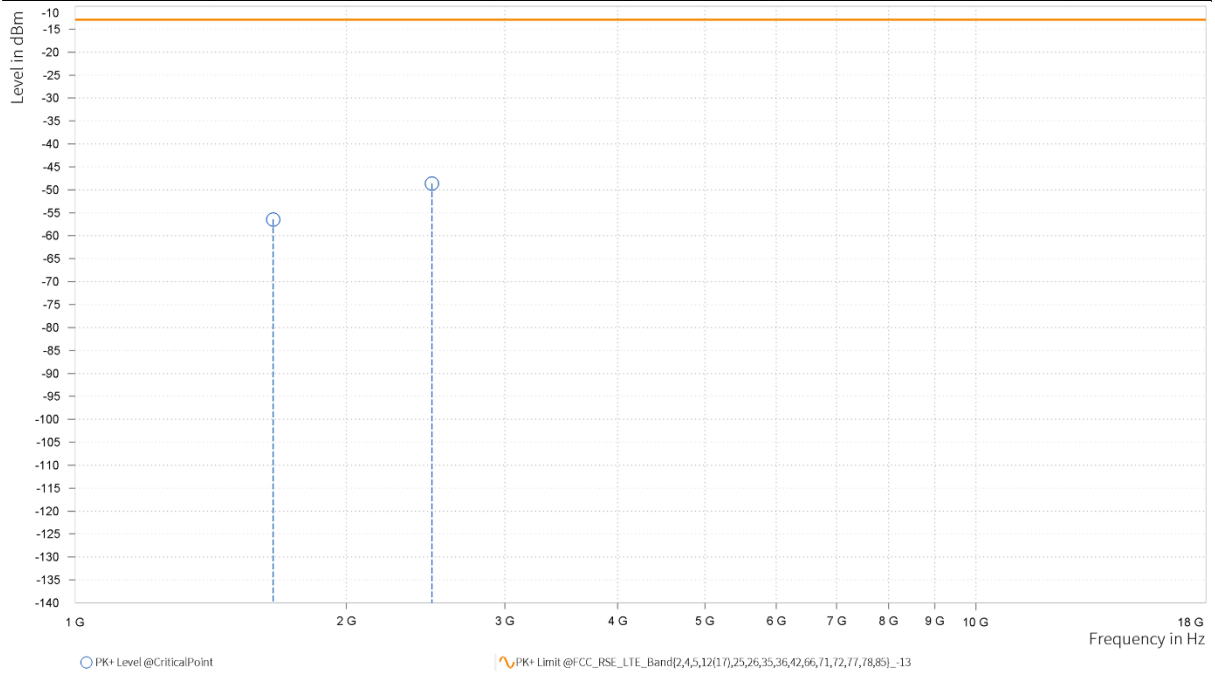




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,655.000	-54.69	-13.00	41.69	15.06	H	1	2.00
3	2,482.500	-49.76	-13.00	36.76	20.52	H	1	2.00

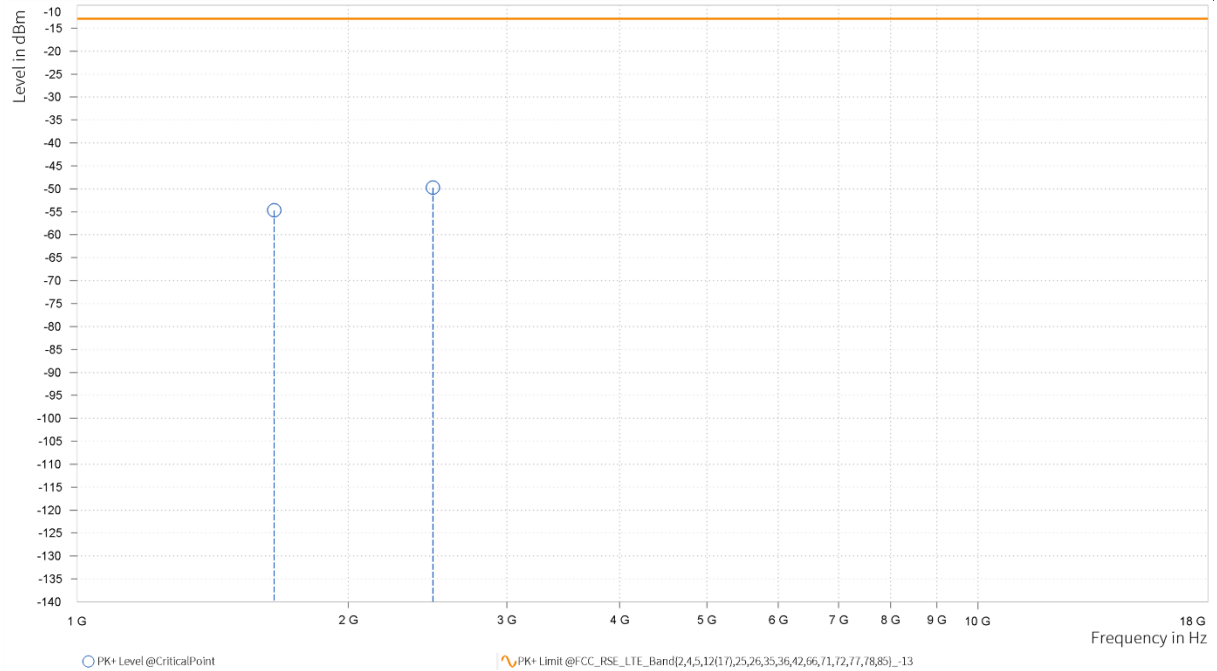

Huarui 7layers High Technology
(Suzhou) Co., Ltd.


Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province

Tel: +86 (0557)
368 1008



MODE	TX channel 167300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,655.000	-55.59	-13.00	42.59	14.23	V	6.4	2.00
3	2,482.500	-48.88	-13.00	35.88	20.76	V	1	1.00

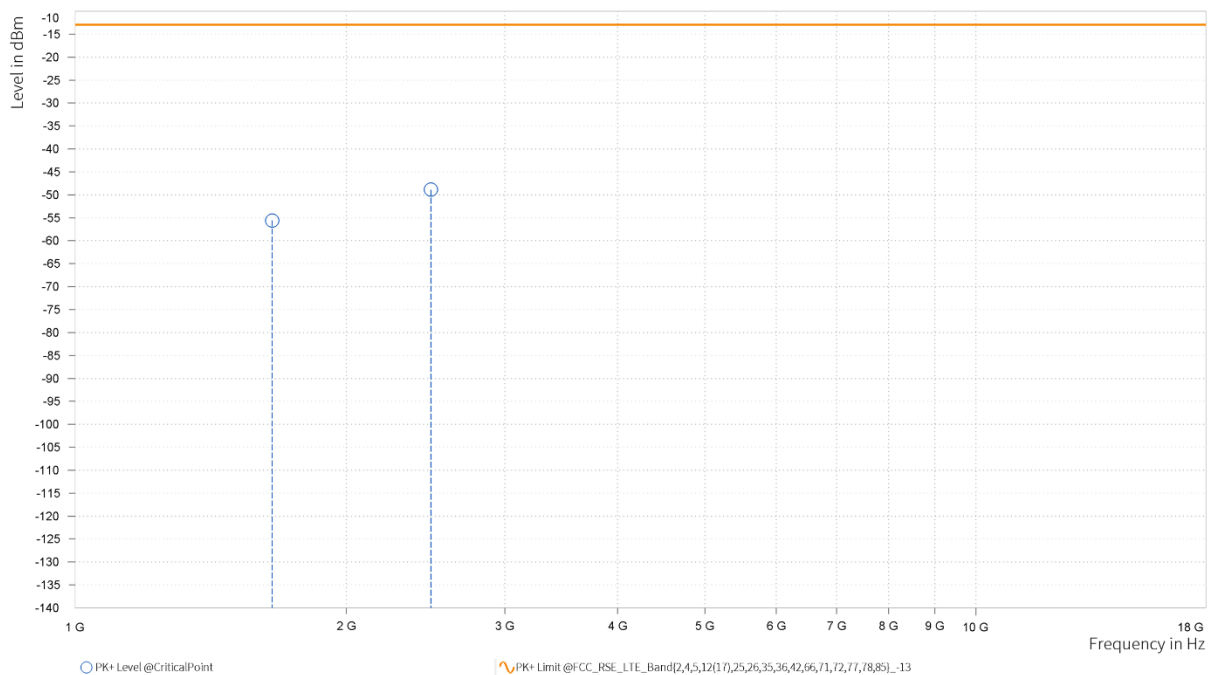




N66

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,485.500	-50.45	-13.00	37.45	20.46	H	40.9	2.00
4	5,228.500	-49.39	-13.00	36.39	24.00	H	40.9	2.00

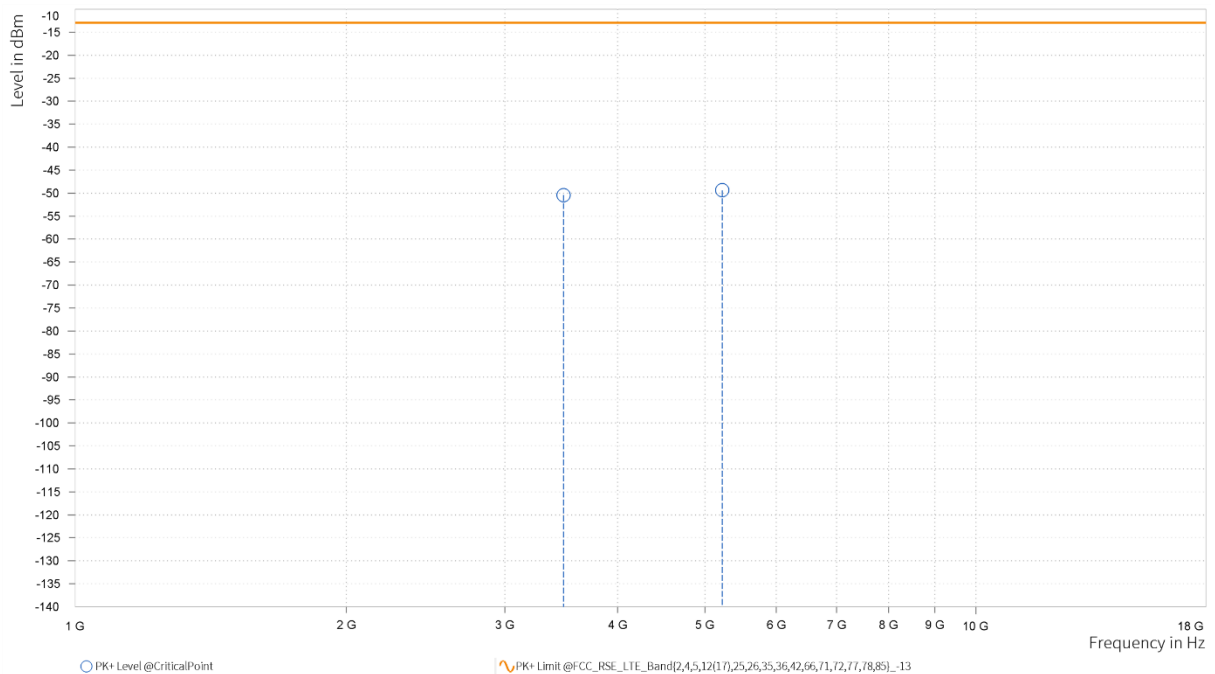




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,485.500	-51.37	-13.00	38.37	21.24	V	0.9	2.00
4	5,228.250	-49.74	-13.00	36.74	24.54	V	1	1.00

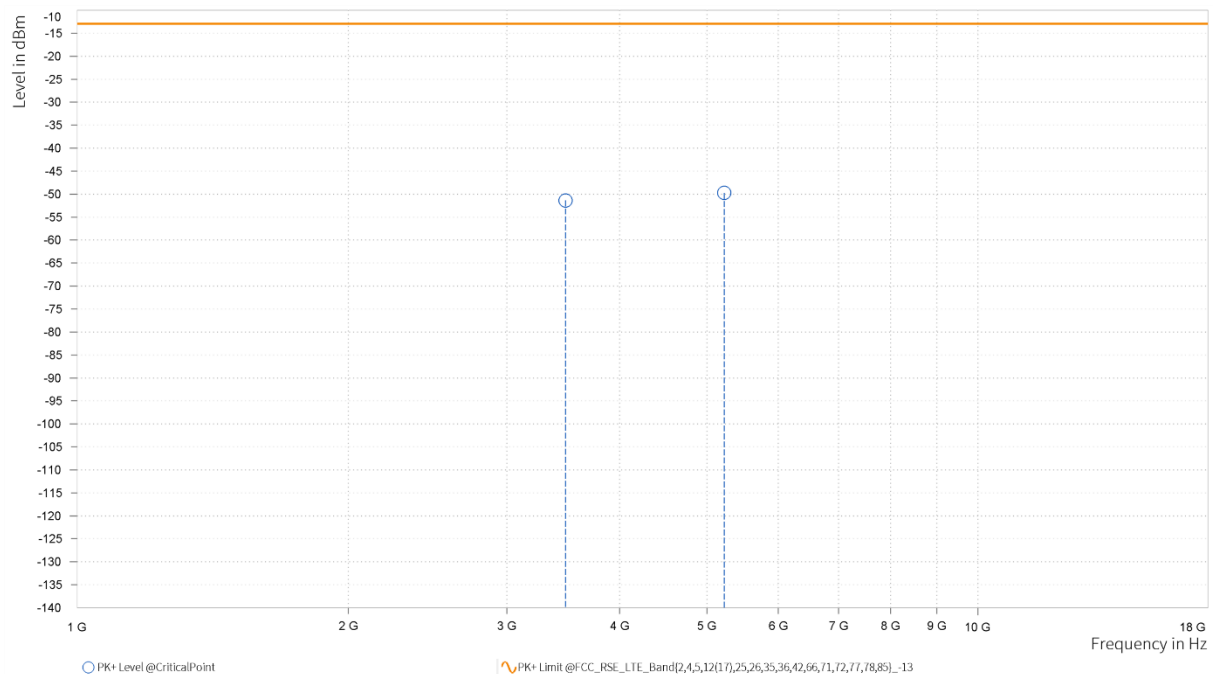




BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,481.000	-52.19	-13.00	39.19	20.42	H	3.3	2.00
4	5,221.500	-49.39	-13.00	36.39	23.97	H	359	1.00

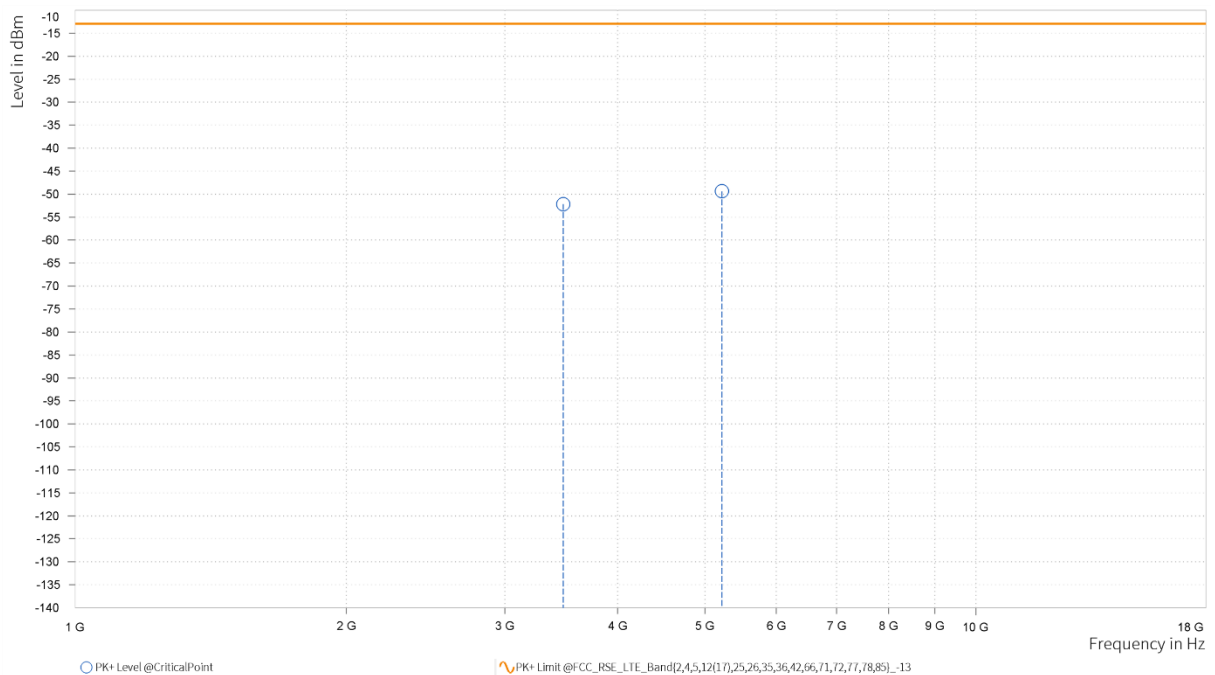

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech District,
Suzhou City, Anhui Province


Tel: +86 (0557)
368 1008



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,481.000	-50.94	-13.00	37.94	21.18	V	1	2.00
4	5,221.500	-48.52	-13.00	35.52	24.53	V	18.9	2.00

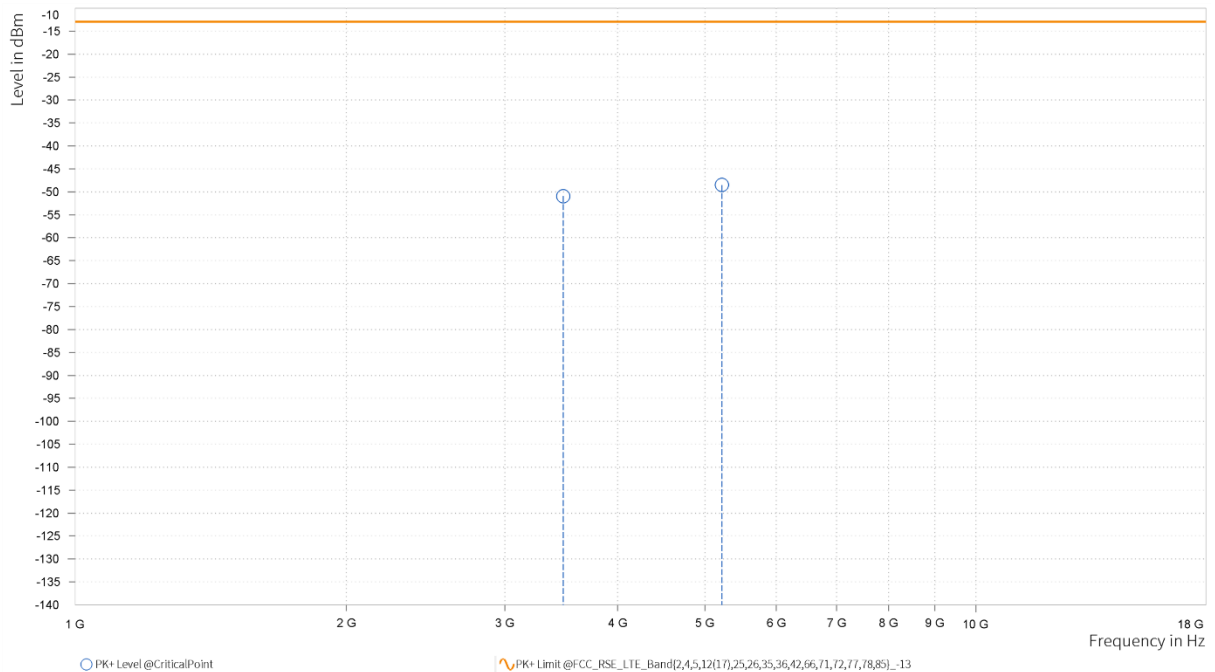




CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,476.500	-50.57	-13.00	37.57	20.39	H	1	1.00
4	5,214.750	-49.14	-13.00	36.14	23.93	H	359	1.00

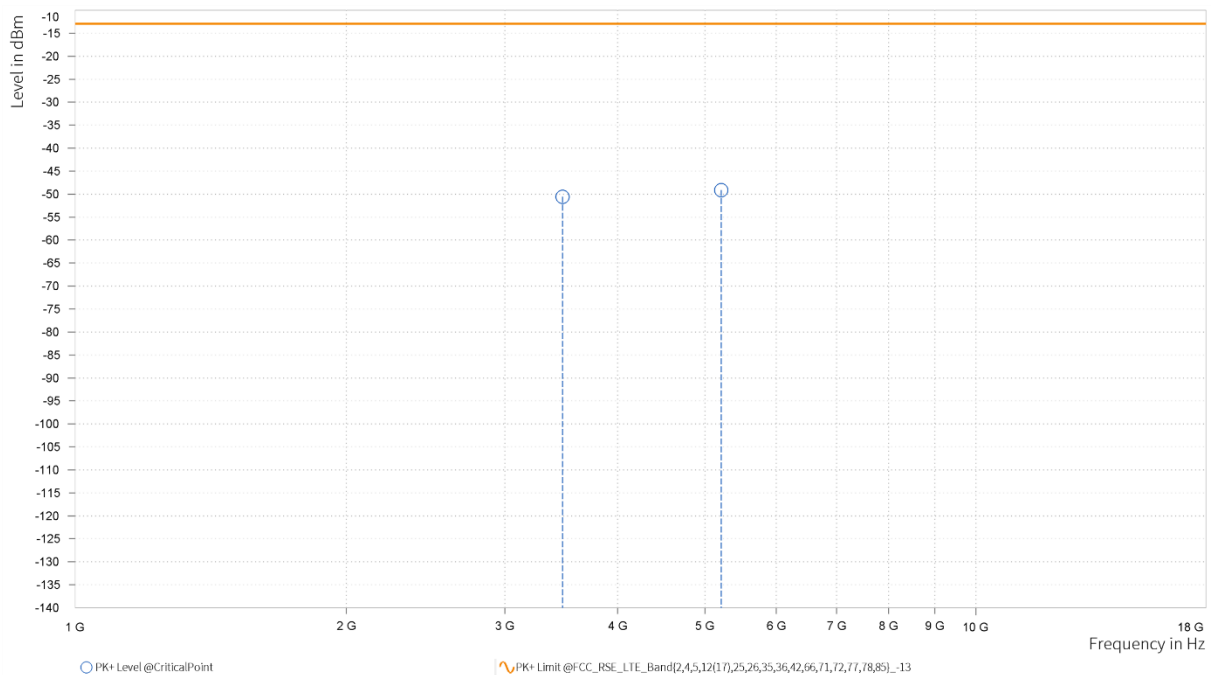



MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,476.500	-51.25	-13.00	38.25	21.13	V	255.4	1.00
4	5,214.750	-48.25	-13.00	35.25	24.51	V	42.3	2.00

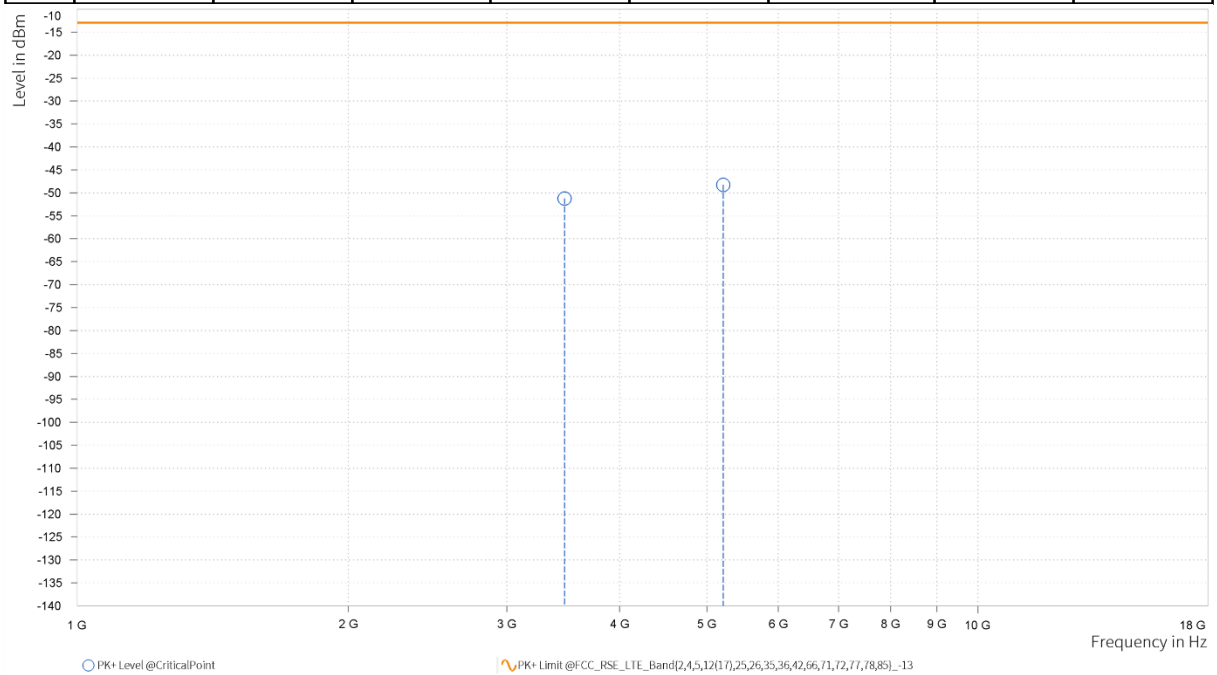



BUREAU VERITAS Test Report No.: PSU-NQN2412090210RF12

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 349000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,472.000	-51.83	-13.00	38.83	20.35	H	161.9	2.00
4	5,208.000	-49.73	-13.00	36.73	23.90	H	38.1	2.00

