

FCC TEST REPORT

For

South Surveying & Mapping Technology Co., Ltd.

GNSS RECEIVER

Test Model: G2

Additional Model No.: Please Refer to Page 6

Prepared for	:	South Surveying & Mapping Technology Co., Ltd.
Address	:	No.39, Sicheng Road, Tianhe District, Guangzhou, China
Prepared by	:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	:	101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel	:	(+86)755-82591330
Fax	:	(+86)755-82591332
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	August 18, 2021
Number of tested samples	:	2
Sample No.	:	210812034A-1, 210812034A-2
Serial number	:	Prototype
Date of Test	:	August 18, 2021 ~October 26, 2021
Date of Report	:	October 27, 2021

**FCC TEST REPORT
FCC Part 90****Report Reference No.** : LCS210812034AEH

Date of Issue : October 27, 2021

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method **Applicant's Name** : South Surveying & Mapping Technology Co., Ltd.

Address : No.39, Sicheng Road, Tianhe District, Guangzhou, China

Test Specification

Standard : FCC CFR Title 47 Part 2, Part 90

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : GNSS RECEIVER


Trade Mark : SOUTH, KOLIDA, SANDING, RUIDE, TIANYU

Test Model : G2


Ratings : Please Refer to Page 6

Result : Positive**Compiled by:**

Diamond.Lu/ File administrator

Supervised by:

Jin.Wang/ Technique principal

Approved by:

Gavin Liang/ Manager

RADIO -- TEST REPORT

Test Report No. : LCS210812034AEH	<u>October 27, 2021</u> Date of issue
--	--

Test Model.....	: G2
EUT.....	: GNSS RECEIVER
Applicant.....	: South Surveying & Mapping Technology Co., Ltd.
Address.....	: No.39, Sicheng Road, Tianhe District, Guangzhou, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: South Surveying & Mapping Technology Co., Ltd.
Address.....	: No.39, Sicheng Road, Tianhe District, Guangzhou, China
Telephone.....	: /
Fax.....	: /
Factory.....	: South Surveying & Mapping Technology Co., Ltd.
Address.....	: No.39, Sicheng Road, Tianhe District, Guangzhou, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	October 27, 2021	Initial Issue	Gavin Liang

TABLE OF CONTENTS

Test Report Description	Page
1. GENERAL INFORMATION.....	7
1.1. DESCRIPTION OF DEVICE (EUT).....	7
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS.....	10
1.3. EXTERNAL I/O CABLE.....	10
1.4. DESCRIPTION OF TEST FACILITY.....	10
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	10
1.6. MEASUREMENT UNCERTAINTY.....	11
1.7. DESCRIPTION OF TEST MODES.....	11
2. SYSTEM TEST CONFIGURATION.....	15
2.1. TEST STANDARDS.....	15
2.2. EUT CONFIGURATION.....	15
2.3. EUT EXERCISE.....	15
2.4. TEST SAMPLE.....	15
3. SYSTEM TEST CONFIGURATION.....	16
3.1. JUSTIFICATION.....	16
3.2. EUT EXERCISE SOFTWARE.....	16
3.3. SPECIAL ACCESSORIES.....	16
3.4. BLOCK DIAGRAM/SCHEMATICS.....	16
3.5. EQUIPMENT MODIFICATIONS.....	16
3.6. TEST SETUP.....	16
4. SUMMARY OF TEST RESULT.....	17
5. TEST CONDITIONS AND RESULTS.....	18
5.1. MAXIMUM TRANSMITTER POWER.....	18
5.1.1 <i>Test Applicable</i>	18
5.1.2 <i>Test Procedure</i>	18
5.1.3 <i>Test Configuration</i>	18
5.1.4 <i>Test Results</i>	18
5.2. OCCUPIED BANDWIDTH AND EMISSION MASK TEST.....	21
5.2.1 <i>Test Applicable</i>	21
5.2.2 <i>Test Configuration</i>	21
5.2.3 <i>Test Procedure</i>	21
5.2.4 <i>Test Results</i>	22
5.3. TRANSMITTER RADIATED SPURIOUS EMISSION.....	26
5.3.1 <i>Test Applicable</i>	26
5.3.2 <i>Test Configuration</i>	26
5.3.3 <i>Test Arrangement</i>	27
5.3.4 <i>Test Procedure</i>	27
5.3.5 <i>Limit</i>	28
5.3.5 <i>Test Results</i>	28
5.4. SPURIOUS EMISSION ON ANTENNA PORT.....	31
5.4.1 <i>Test Applicable</i>	31
5.4.2 <i>Test Procedure</i>	31
5.4.3 <i>Test Configuration</i>	31
5.4.4 <i>Limit</i>	31
5.4.5 <i>Test Results</i>	32
5.5. MODULATION CHARACTERISTICS - MODULATION LIMITING.....	39
5.5.1 <i>Test Applicable</i>	39
5.5.2 <i>Test Procedure</i>	39
5.5.3 <i>Test Configuration</i>	39
5.5.4 <i>Test Results</i>	39
5.6. FREQUENCY STABILITY TEST.....	40
5.6.1 <i>Test Applicable</i>	40
5.6.2 <i>Test Procedure</i>	40
5.6.3 <i>Test Configuration</i>	40
5.6.4 <i>Test Limits</i>	40
5.6.5 <i>Test Results</i>	41

5.7. TRANSMITTER FREQUENCY BEHAVIOR.....	42
5.7.1 <i>Test Applicable</i>	42
5.7.2 <i>Test Configuration</i>	42
5.7.3 <i>Test Procedure</i>	42
5.7.4 <i>Test Results</i>	43
6. LIST OF MEASURING EQUIPMENT.....	44
7. TEST SETUP PHOTOGRAPHS OF EUT.....	45
8. EXTERIOR PHOTOGRAPHS OF THE EUT.....	45
9. INTERIOR PHOTOGRAPHS OF THE EUT.....	45

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: GNSS RECEIVER
Test Model	: G2
Additional Model No.	: T9, T9 Pro, C8, RENO1, R1, K3IMU, K3X, K30 Pro, K58plus, K7, K7X, K8, K8X, K9, K9X, K30, K30X, R93i, T7, T8, C6, C7, C9, P30, G1, G3, G4, G5, G7, G8, G9, S680
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Power Supply	: For AC Adapter(model: DAS-45PDA FUS) Input:100-240V~, 50/60Hz, 1.5A Max Output: 5.0V=3.0A, 9.0V=3.0A, 12.0V=3.0A, 15.0V=3.0A, 20V=2.25A, 45W Max DC 7.4V by Rechargeable Li-ion Battery, 6800mAh
Hardware Version	: SC20-K803_V2R0
Software Version	: 1.09.210624.RA40PY
Bluetooth	:
Frequency Range	: 2402MHz ~ 2480MHz
Chanel Number	: 79 channels for Bluetooth V4.2(DSS) 40 channels for Bluetooth V4.2 (DTS)
Chanel Spacing	: 1MHz for Bluetooth V4.2 (DSS) 2MHz for Bluetooth V4.2 (DTS)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.2(DSS) GFSK for Bluetooth V4.2 (DTS)
Bluetooth Version	: V4.2
Antenna Description	: Internal Antenna, 5.5dBi (max.)
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz ~ 2462MHz
Channel Spacing	: 5MHz
Channel Number	: 11 Channels for 20MHz bandwidth (2412~2462MHz) 7 Channels for 40MHz bandwidth (2422~2452MHz)
Modulation Type	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: Internal Antenna, 5.5dBi (max.)
2G	:
Support Band	: <input checked="" type="checkbox"/> GSM 900 (EU-Band) <input checked="" type="checkbox"/> DCS 1800 (EU-Band) <input checked="" type="checkbox"/> GSM 850 (U.S.-Band) <input checked="" type="checkbox"/> PCS 1900 (U.S.-Band)
Release Version	: R99
GPRS Class	: Class 12

EGPRS Class	: Class 12
Type Of Modulation	: GMSK for GSM/GPRS; 8PSK for EGPRS
Antenna Description	: Internal Antenna 2.0dBi (max.) For GSM 850 2.0dBi (max.) For PCS 1900
3G	:
Support Band	: <input type="checkbox"/> WCDMA Band II (U.S.-Band) <input checked="" type="checkbox"/> WCDMA Band V (U.S.-Band) <input type="checkbox"/> WCDMA Band IV (U.S.-Band) <input checked="" type="checkbox"/> WCDMA Band I (EU-Band) <input checked="" type="checkbox"/> WCDMA Band VIII (EU-Band)
Release Version	: R8
Type Of Modulation	: WCDMA: QPSK; HSDPA/HSUPA: QPSK
Antenna Description	: Internal Antenna 2.0dBi (max.) For WCDMA Band V
LTE	:
Support Band	: <input checked="" type="checkbox"/> E-UTRA Band 5(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 7(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 38(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 41(U.S.-Band)
LTE Release Version	: R9
Type Of Modulation	: QPSK/16QAM
Antenna Description	: Internal Antenna 2.0dBi (max.) For E-UTRA Band 5 2.0dBi (max.) For E-UTRA Band 7 2.0dBi (max.) For E-UTRA Band 38 2.0dBi (max.) For E-UTRA Band 41
Power Class	: Class 3
NFC	:
Operating Frequency	: 13.56MHz;
Modulation Type	: ASK
Antenna Description	: Loop Antenna, 2.0dBi(Max.)
PMR	:
Operating Frequency	: 410 ~ 470MHz
Channel Separation	: 12.5KHz & 25KHz
Modulation Type	: GMSK (Digital modulation)
Emission Designator	: 8K25G1D for GMSK Modulation at 12.5KHz Channel Separation 16K4G1D for GMSK Modulation at 25KHz Channel Separation
Antenna Type	: SMA Antenna
Antenna Gain	: 5.0dBi (max.) for PMR
GPS function	: Support and only RX

Extreme temp. : -30°C to +50°C

Tolerance

Extreme vol. Limits : 6.3VDC to 8.4VDC (nominal: 7.4VDC)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
Diwen Enterprise Co., LTD	Adapter	DSA-45PDA-FCH	---	FCC SDOC

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
Type-C Port	1	N/A
Antenna Port	1	N/A
SIM Card Slot	1	N/A
5-pin cable socket	1	N/A
7-pin data cable socket	1	N/A

1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912

The sites are constructed in conformance with the requirements of ANSI C63.4 (2014) and CISPR Publication 22.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 “ Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics” and is documented in the Shenzhen LCS Compliance Testing Laboratory Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Uncertainty	Note
Frequency error	30 Hz	(1)
Transmitter power conducted	0.62 dB	(1)
Transmitter power Radiated	2.67 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.22 dB	(1)
Conducted Emission 9KHz-30MHz	1.63 dB	(1)
Radiated spurious emission 30~1000MHz	3.10 dB	(1)
Radiated spurious emission 1~18GHz	3.80 dB	(1)
Radiated spurious emission 18-40GHz	3.90 dB	(1)
Occupied Bandwidth	N/A	N/A
Emission Mask	N/A	N/A
Modulation Characteristic	N/A	N/A
Transmitter Frequency Behavior	N/A	N/A

(1) . This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under typical operating condition. As, test modes selected as below by the technical parameters of the EUT:

Operation Mode	Description of operation mode	Additional information
TM1	GMSK+BW12.5KHz+TX	The EUT is set with GMSK modulation and 12.5KHz bandwidth at maximum rated power for transmitter, powered by DC 7.40V power Rechargeable Li-ion Battery
TM2	GMSK+BW12.5KHz+TX	The EUT is set with GMSK modulation and 12.5KHz bandwidth at minimum rated power for transmitter, powered by DC 7.40V power Rechargeable Li-ion Battery
TM3	GMSK+BW25KHz+TX	The EUT is set with GMSK modulation and 25KHz bandwidth at maximum rated power for transmitter, powered by DC 7.40V power Rechargeable Li-ion Battery
TM4	GMSK+BW25KHz+TX	The EUT is set with GMSK modulation and 25KHz bandwidth at minimum rated power for transmitter, powered by DC 7.40V power Rechargeable Li-ion Battery

Frequency list:

Modulation Type	Channel Separation	Channel	Frequency (MHz)	Channel	Frequency (MHz)
GMSK	12.5KHz	101	410.125	111	415.125
		102	410.625	112	415.625
		103	411.125	113	416.125
		104	411.625	114	416.625
		105	412.125	115	417.125
		106	412.625	116	417.625
		107	413.125	117	418.125
		108	413.625	118	418.625
		109	414.125	119	419.125
		110	414.625	120	419.625
GMSK	25KHz	101	410.125	111	415.125
		102	410.625	112	415.625
		103	411.125	113	416.125
		104	411.625	114	416.625
		105	412.125	115	417.125
		106	412.625	116	417.625
		107	413.125	117	418.125
		108	413.625	118	418.625
		109	414.125	119	419.125
		110	414.625	120	419.625

Modulation Type	Channel Separation	Channel	Frequency (MHz)	Channel	Frequency (MHz)
GMSK	12.5KHz	81	420.125	91	425.125
		82	420.625	92	425.625
		83	421.125	93	426.125
		84	421.625	94	426.625
		85	422.125	95	427.125
		86	422.625	96	427.625
		87	423.125	97	428.125
		88	423.625	98	428.625
		89	424.125	99	429.125
		90	424.625	100	429.625
GMSK	25KHz	81	420.125	91	425.125
		82	420.625	92	425.625
		83	421.125	93	426.125
		84	421.625	94	426.625
		85	422.125	95	427.125
		86	422.625	96	427.625
		87	423.125	97	428.125
		88	423.625	98	428.625
		89	424.125	99	429.125
		90	424.625	100	429.625

Modulation Type	Channel Separation	Channel	Frequency (MHz)	Channel	Frequency (MHz)
GMSK	12.5KHz	61	430.125	71	435.125
		62	430.625	72	435.625
		63	431.125	73	436.125
		64	431.625	74	436.625
		65	432.125	75	437.125
		66	432.625	76	437.625
		67	433.125	77	438.125
		68	433.625	78	428.625
		69	434.125	79	439.125
		70	434.625	80	439.625
GMSK	25KHz	61	430.125	71	435.125
		62	430.625	72	435.625
		63	431.125	73	436.125
		64	431.625	74	436.625
		65	432.125	75	437.125
		66	432.625	76	437.625
		67	433.125	77	438.125
		68	433.625	78	428.625
		69	434.125	79	439.125
		70	434.625	80	439.625

Modulation Type	Channel Separation	Channel	Frequency (MHz)	Channel	Frequency (MHz)
GMSK	12.5KHz	41	440.125	51	445.125
		42	440.625	52	445.625
		43	441.125	53	446.125
		44	441.625	54	446.625
		45	442.125	55	447.125
		46	442.625	56	447.625
		47	443.125	57	448.125
		48	443.625	58	448.625
		49	444.125	59	449.125
		50	444.625	60	449.625
GMSK	25KHz	41	440.125	51	445.125
		42	440.625	52	445.625
		43	441.125	53	446.125
		44	441.625	54	446.625
		45	442.125	55	447.125
		46	442.625	56	447.625
		47	443.125	57	448.125
		48	443.625	58	448.625
		49	444.125	59	449.125
		50	444.625	60	449.625

Modulation Type	Channel Separation	Channel	Frequency (MHz)	Channel	Frequency (MHz)
GMSK	12.5KHz	21	450.125	31	455.125
		22	450.625	32	455.625
		23	451.125	33	456.125
		24	451.625	34	456.625
		25	452.125	35	457.125
		26	452.625	36	457.625
		27	453.125	37	458.125
		28	453.625	38	458.625
		29	454.125	39	459.125
		30	454.625	40	459.625
GMSK	25KHz	21	450.125	31	455.125
		22	450.625	32	455.625
		23	451.125	33	456.125
		24	451.625	34	456.625
		25	452.125	35	457.125
		26	452.625	36	457.625
		27	453.125	37	458.125
		28	453.625	38	458.625
		29	454.125	39	459.125
		30	454.625	40	459.625

Modulation Type	Channel Separation	Channel	Frequency (MHz)	Channel	Frequency (MHz)
GMSK	12.5KHz	1	460.125	11	465.125
		2	460.625	12	465.625
		3	461.125	13	466.125
		4	461.625	14	466.625
		5	462.125	15	467.125
		6	462.625	16	467.625
		7	463.125	17	468.125
		8	463.625	18	468.625
		9	464.125	19	469.125
		10	464.625	20	469.625
GMSK	25KHz	1	460.125	11	465.125
		2	460.625	12	465.625
		3	461.125	13	466.125
		4	461.625	14	466.625
		5	462.125	15	467.125
		6	462.625	16	467.625
		7	463.125	17	468.125
		8	463.625	18	468.625
		9	464.125	19	469.125
		10	464.625	20	469.625

Note: The line display in grey was the channel selected for test.

2. SYSTEM TEST CONFIGURATION

2.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 90](#): PRIVATE LAND MOBILE RADIO SERVICES.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATION AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[ANSI C63.26:2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.2. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.3. EUT Exercise

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.4. Test Sample

The application provides 1 samples to meet requirement;

Sample Number	Description
Sample 1	continuous transmit

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

N/ A

3.3. Special Accessories

N/ A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULT

Transmitter Requirements				
FCC General Rules Part (47CFR)	Description of Test	Test Sample	Result	Remark
2.1046 90.205	Maximum Transmitter Power	Sample 1	Compliant	Note 1
2.1047 (a) 90.207	Modulation Characteristics - Audio Frequency Response	Sample 1	N/A*	Note 2
2.1047 (b) 90.207	Modulation Characteristics - Modulation Limiting	Sample 1	Compliant	Note 1
2.1049 90.210	Occupied Bandwidth Tests; Emission Mask	Sample 1	Compliant	Note 1
2.1055 90.213	Frequency Stability	Sample 1	Compliant	Note 1
90.214	Transmitter Frequency Behavior	Sample 1	Compliant	Note 1
2.1053 90.210	Transmitter Radiated Spurious Emission	Sample 1	Compliant	Note 1
2.1051 90.210	Spurious Emission On Antenna Port	Sample 1	Compliant	Note 1

Remark:

1. Note 1 – Test results inside test report;
2. Note 2 – N/A* - Not Applicable for this device.

5. TEST CONDITIONS AND RESULTS

5.1. Maximum Transmitter Power

5.1.1 Test Applicable

Per FCC Part 2.1046 and Part 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area

5.1.2 Test Procedure


Measurements shall be made to establish the radio frequency power delivered by the transmitter the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The EUT connect to the Receiver through 20 dB attenuator.

Measurement with Spectrum Analyzer conducted external power supply with 7.4 V stabilized supply voltage.

5.1.3 Test Configuration

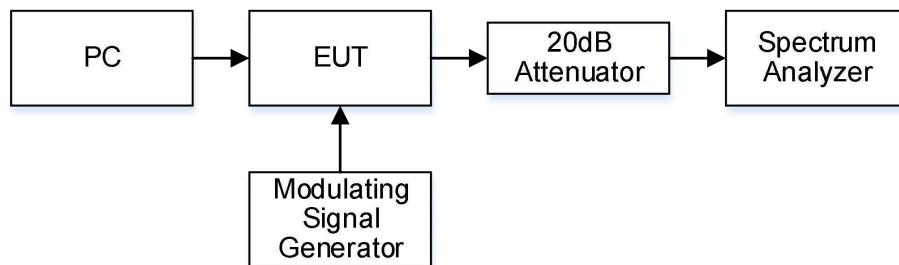


5.1.4 Test Results


Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Test Results (dBm)	Test Results (W)	Limit (W)	
Digital GMSK	12.5KHz	TM1	Ch101	410.125	33.633	2.3083	500	
			Ch27	453.125	33.469	2.2228	500	
			Ch20	469.625	33.403	2.1893	500	
	25KHz	TM2	Ch101	410.125	28.502	0.70827	500	
			Ch27	453.125	28.615	0.72694	500	
			Ch20	469.625	28.908	0.77768	500	
Digital GMSK	25KHz	TM3	Ch101	410.125	33.712	2.3507	500	
			Ch27	453.125	33.461	2.2187	500	
			Ch20	469.625	33.480	2.2284	500	
	25KHz	TM4	Ch101	410.125	28.154	0.65373	500	
			Ch27	453.125	28.635	0.73030	500	
			Ch20	469.625	29.039	0.80149	500	
Limit	The limit is dependent upon the station's antenna HAAT and required service area.							
Test Results	PASS							

Remark:

1. The station's antenna high (HAAT) is 15m and the service area radius is 15Km;
2. Please refer to following plot.

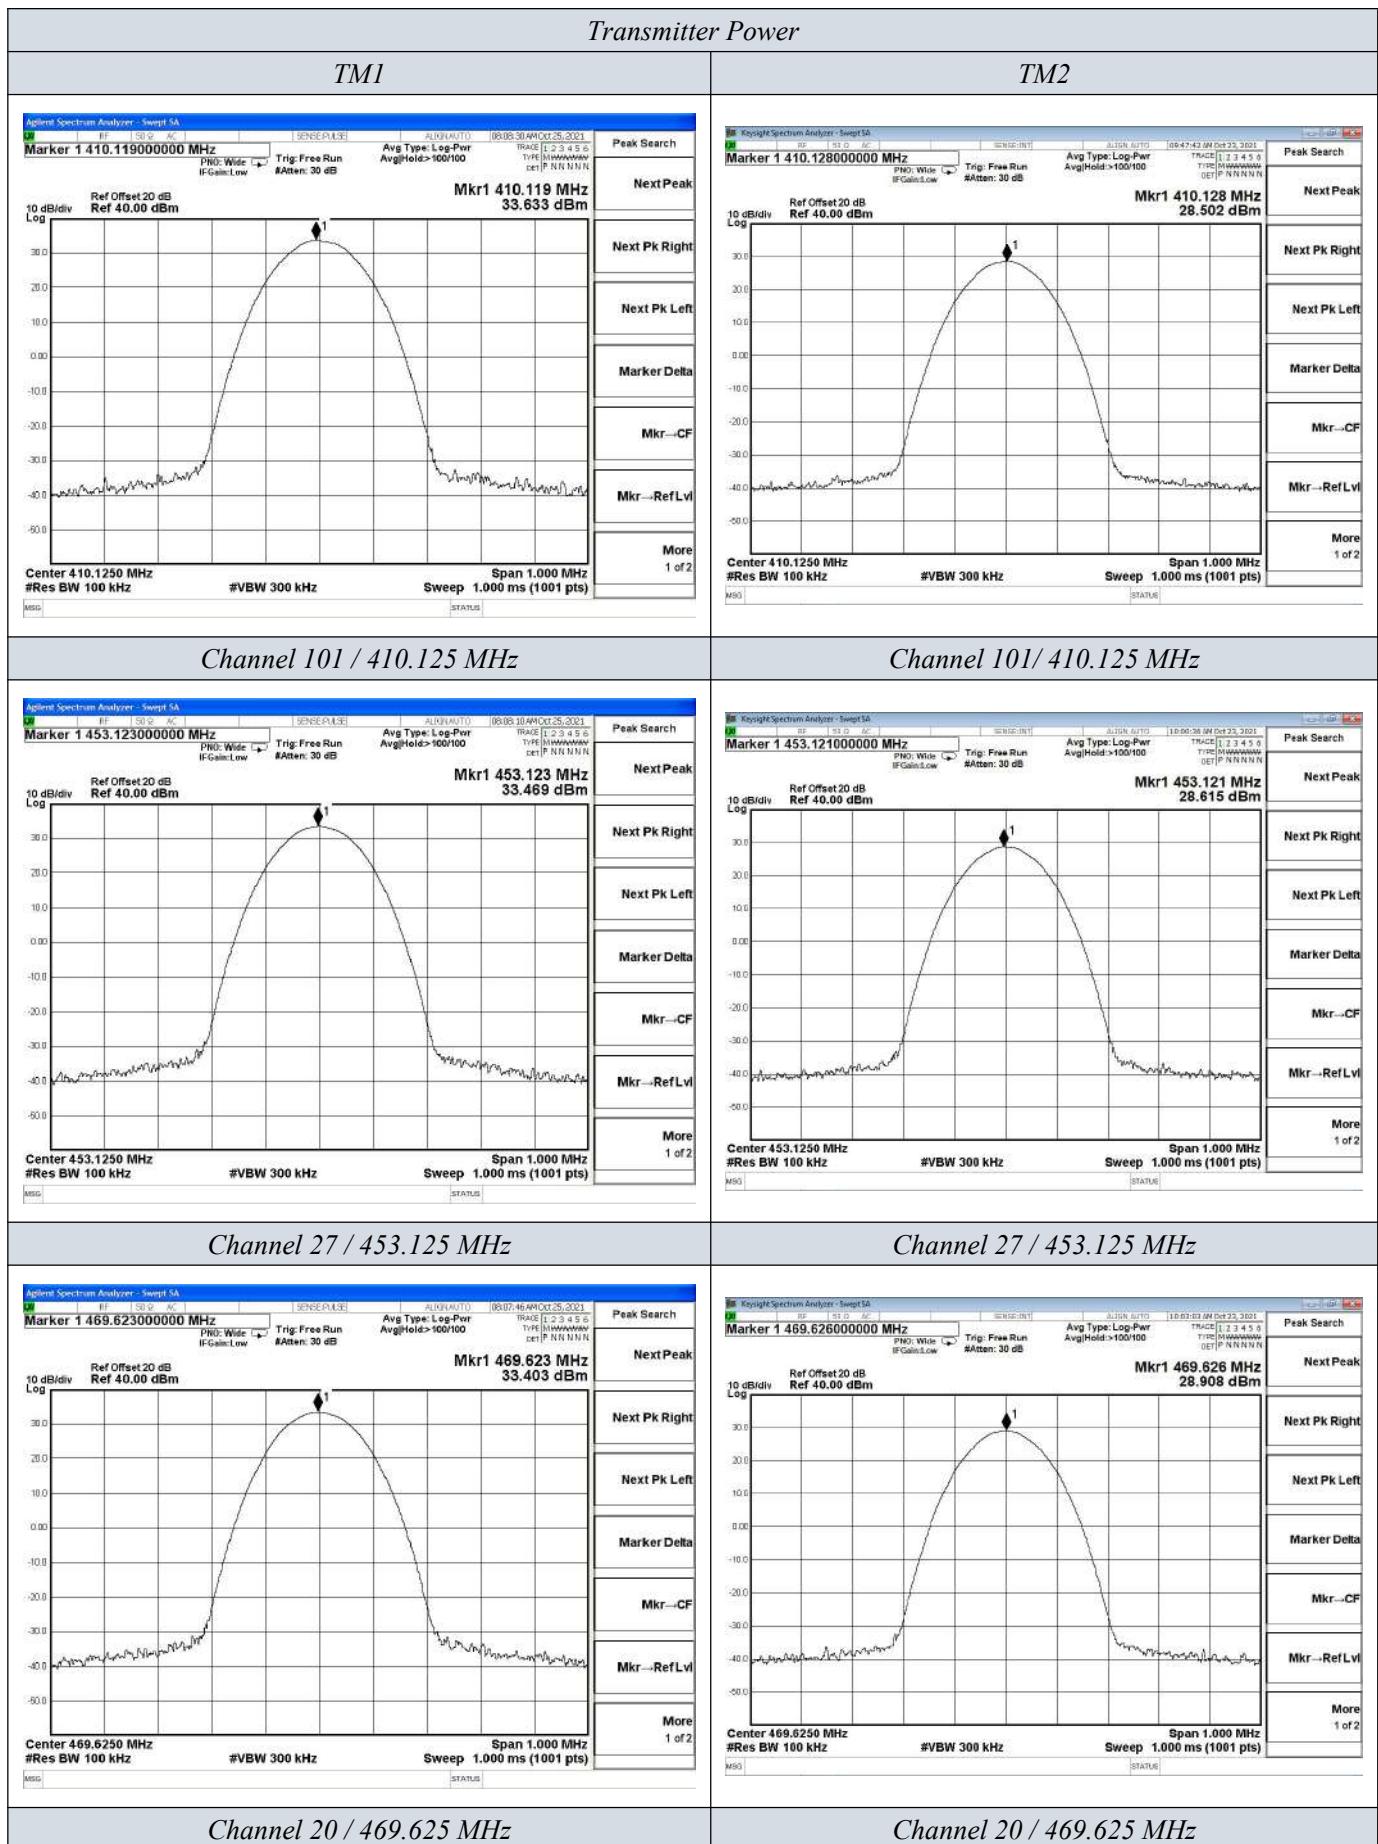

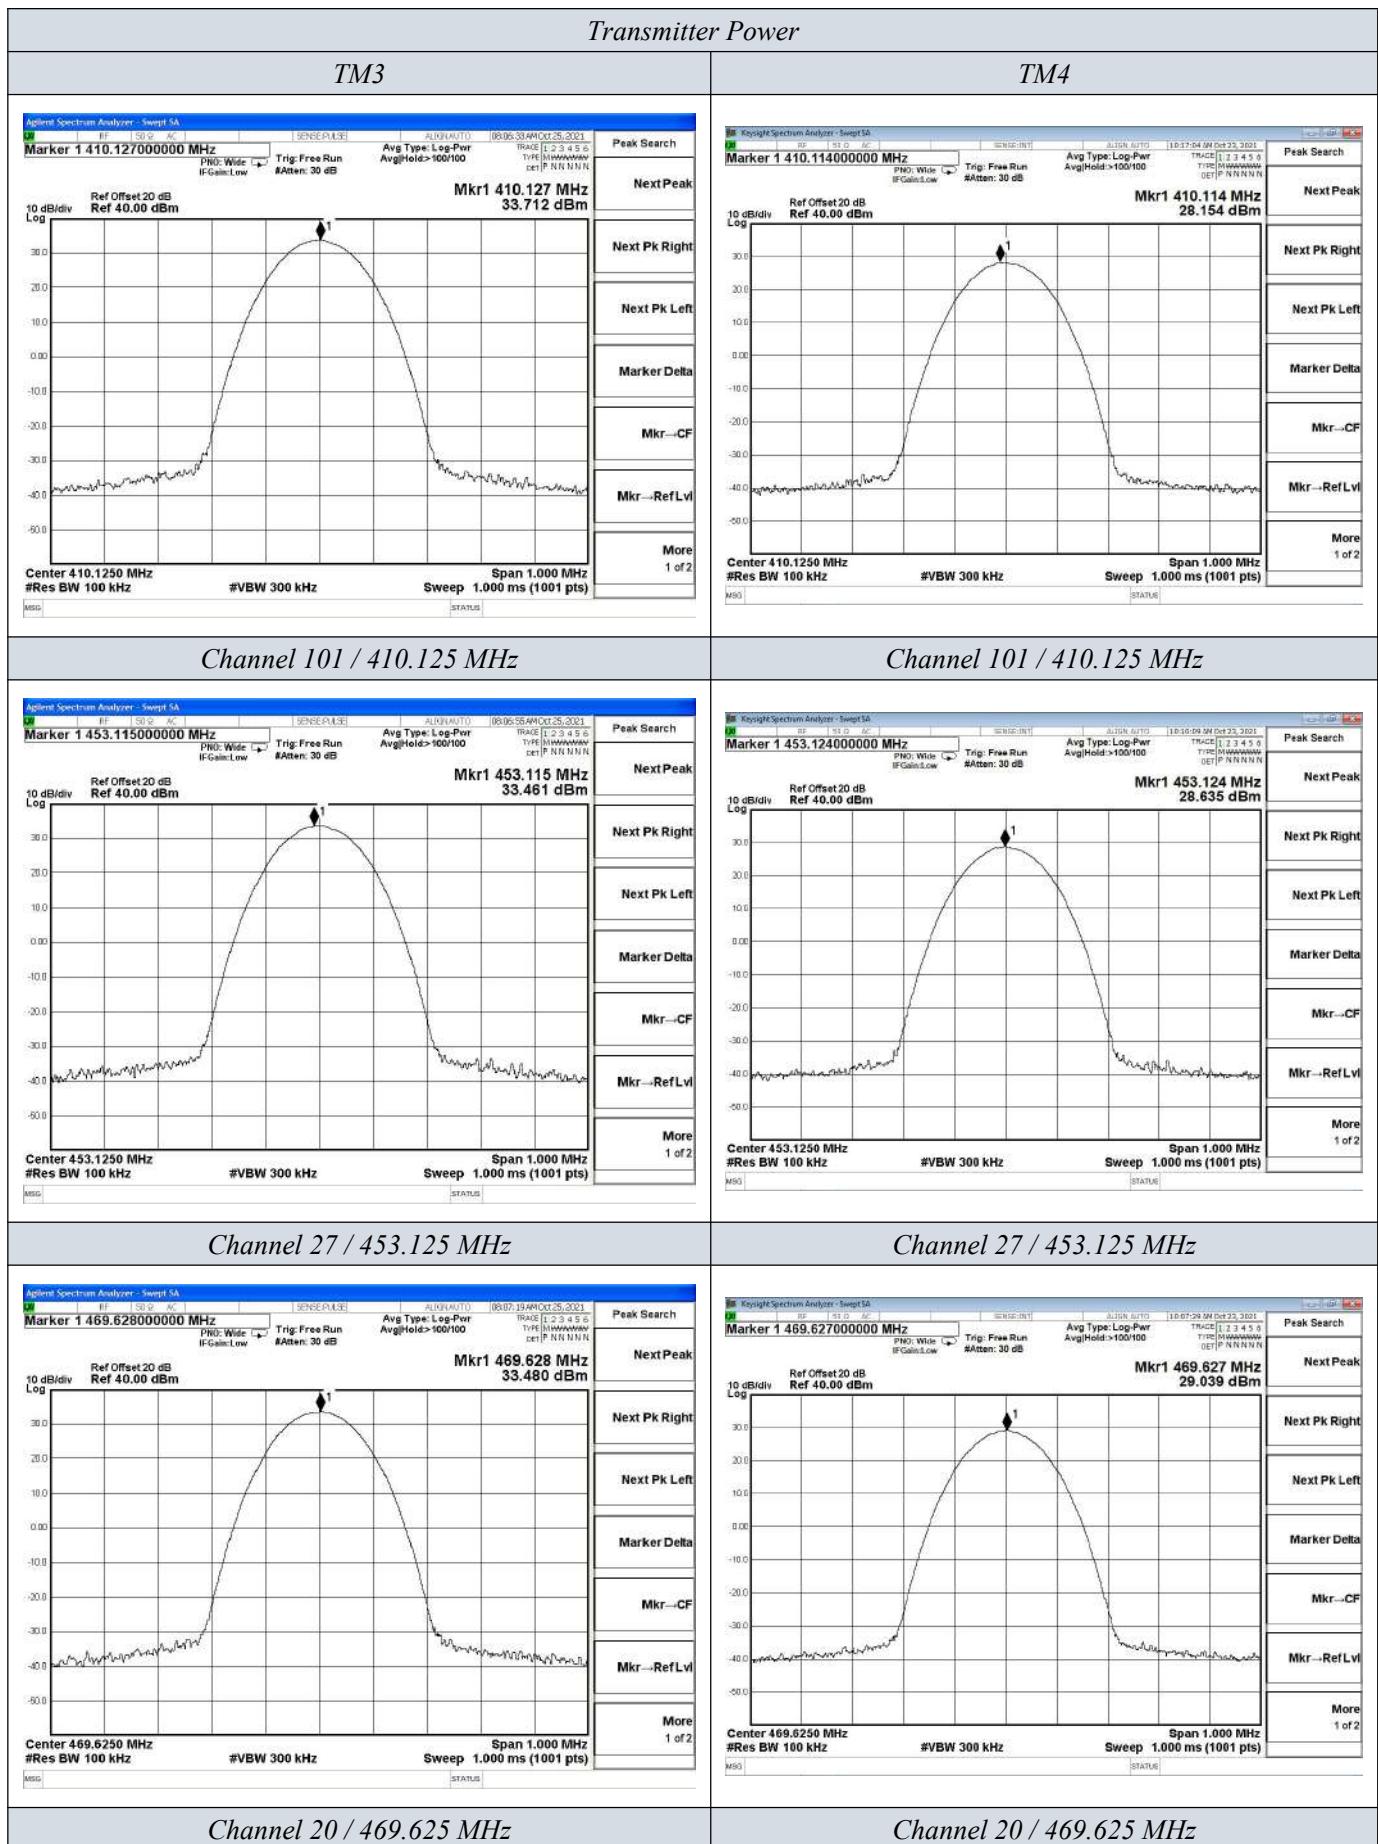

5.2. Occupied Bandwidth and Emission Mask Test

5.2.1 Test Applicable

(a). Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyser via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyser.


(b). Emission Mask B: For transmitters that are equipped with an audio low-pass filter pursuant to §90.211(a), the power of any emission must be below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

(c). Emission Mask D, 12.5 kHz channel bandwidth equipment: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the centre of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

5.2.2 Test Configuration

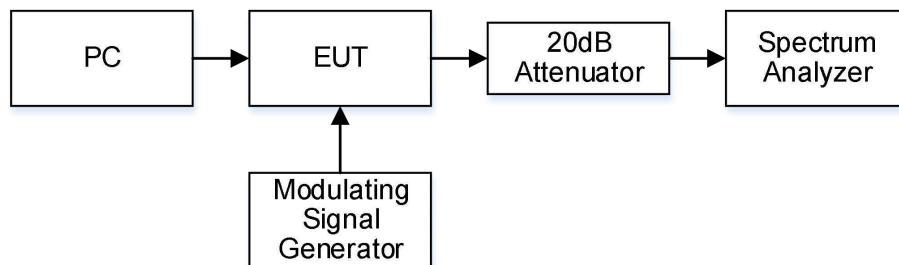

5.2.3 Test Procedure

- 1 Set EUT as normal operation.
- 2 Set SPA Centre Frequency = fundamental frequency, RBW=300Hz, VBW= 1 KHz, span =50 KHz .
- 3 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.

5.2.4 Test Results


Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Occupied Bandwidth

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)			
					99%	26dB		
GMSK	12.5 KHz	TM1	Ch101	410.125	8.248	9.488		
			Ch27	453.125	8.221	9.436		
			Ch20	469.625	8.150	9.492		
	25 KHz	TM3	Ch101	410.125	16.280	18.60		
			Ch27	453.125	16.366	18.48		
			Ch20	469.625	16.238	18.53		
Limit			11.25KHz for 12.5KHz Channel Separation 20KHz for 25KHz Channel Separation					
Test Results			PASS					

Remark:

1. Measured at TM1 to TM4, recorded worst case at TM1 and TM3;
2. Please refer to following plots.

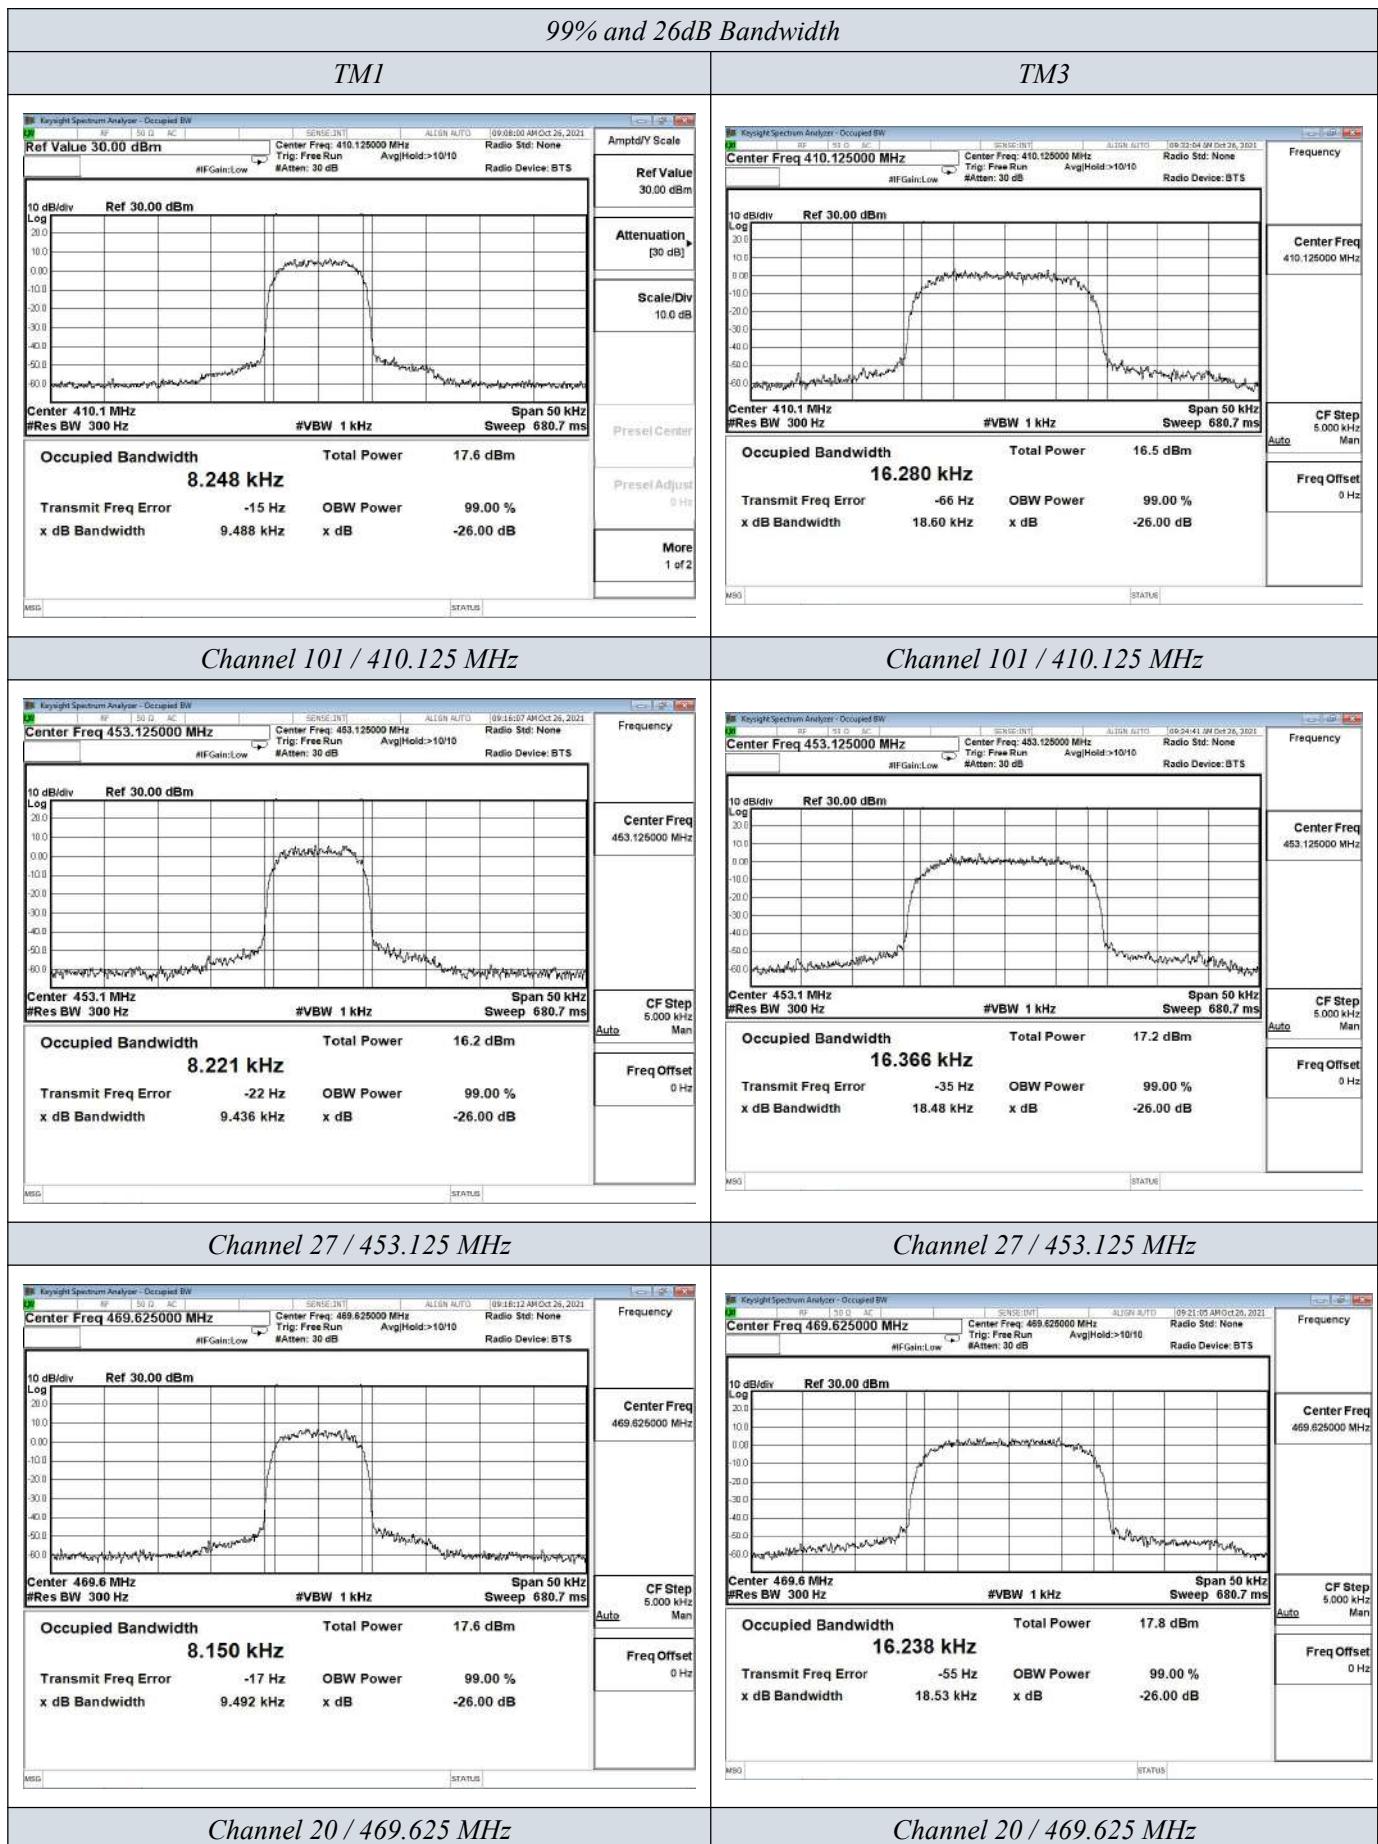

Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Emission Mask

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)
GMSK	12.5 KHz	TM1	Ch101	410.125	D	300
			Ch27	453.125	D	300
			Ch20	469.625	D	300
	25 KHz	TM3	Ch101	410.125	B	300
			Ch27	453.125	B	300
			Ch20	469.625	B	300
Test Results			PASS			



Remark:

1. Measured at TM1 to TM4, recorded worst case at TM1 and TM3;
2. Please refer to following plots.

Emission Mask



TMI

TM3

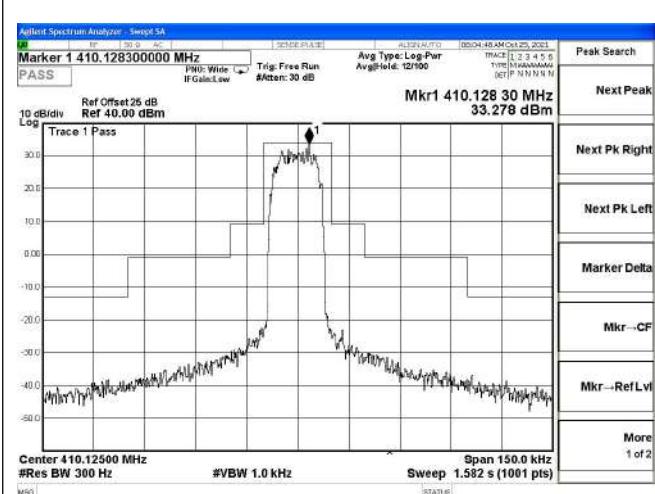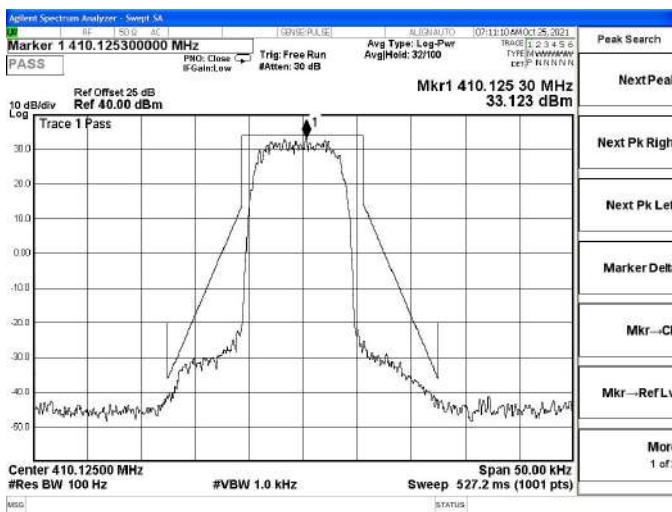



Channel 101 / 410.125 MHz

Channel 101 / 410.125 MHz

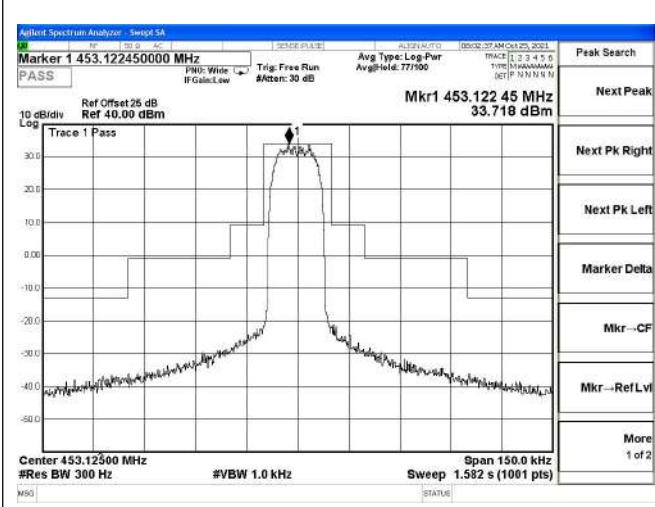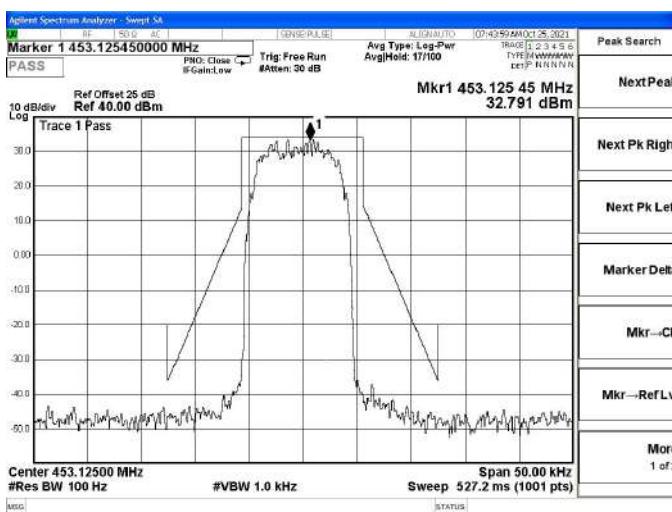

Channel 27 / 453.125 MHz

Channel 27 / 453.125 MHz

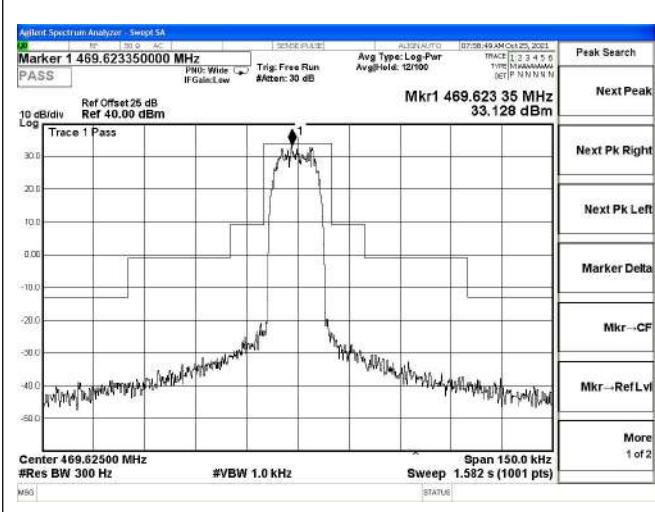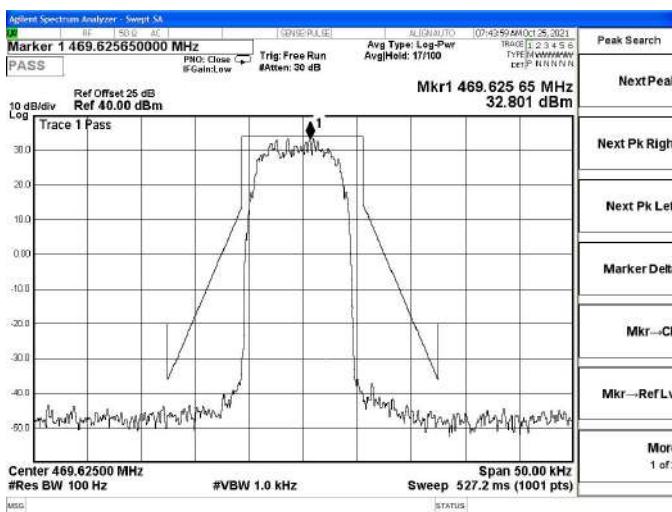

Channel 20 / 469.625 MHz

Channel 20 / 469.625 MHz

5.3. Transmitter Radiated Spurious Emission

5.3.1 Test Applicable


According to the ANSI C63.26:2015 test method, and according to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- 1 On any frequency removed from the centre of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- 2 On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27dB
- 3 On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50+10 \log (P)$ dB or 70 dB, whichever is lesser attenuation.


For transmitters designed to transmit with 25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:

- 1 On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2 On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3 On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43+10\log (P)$ dB.

5.3.2 Test Configuration

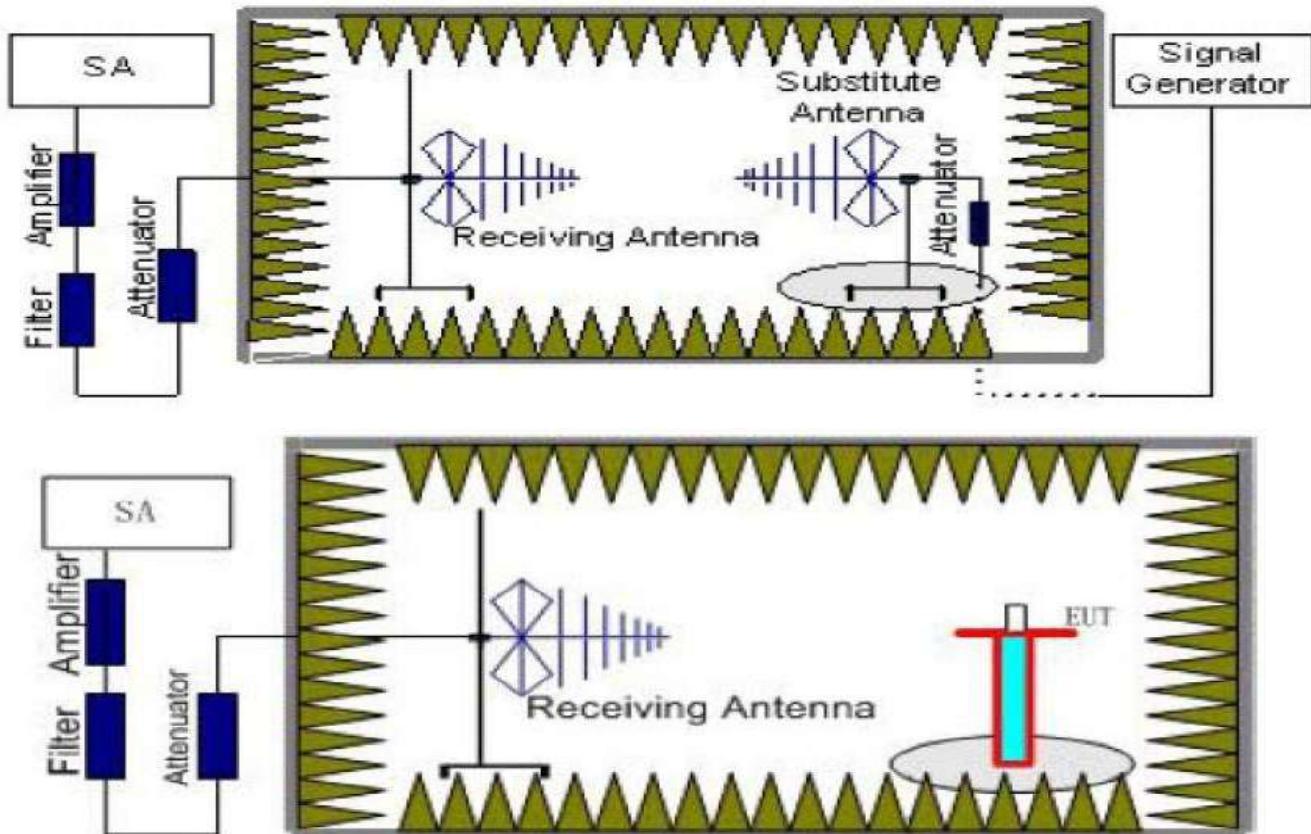

5.3.3 Test Arrangement

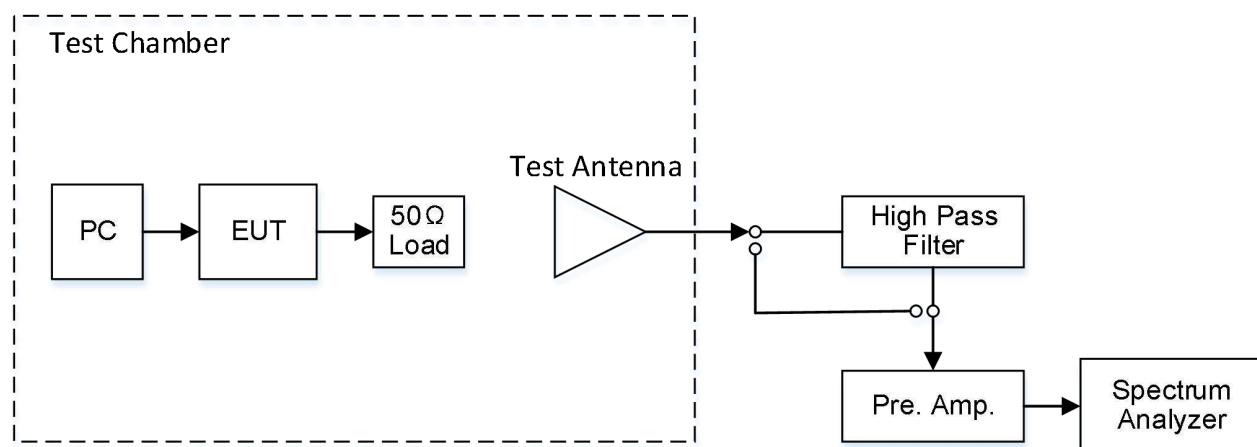

5.3.4 Test Procedure

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in six channels were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100 KHz, VBW=300 KHz for 30MHz to 1GHz, and the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$
The measurement results are amending as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{cl} - G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

5.3.5 Limit

Modulation Type: GMSK

FCC Part 90.210:

For 12.5 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

Calculation: Limit (dBm) = $EL - 50 - 10\log(TP) = -20\text{ dBm}$

Notes: EL is the emission level of the Output Power expressed in dBm.

For 25 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 62.5 kHz at least:

Calculation: Limit (dBm) = $EL - 43 - 10\log_{10}(TP) = -13\text{ dBm}$

Notes: EL is the emission level of the Output Power expressed in dBm.

Note: 1. In general, the worst case attenuation requirement shown above was applied.

2. The measurement frequency range from 9 KHz to 5 GHz.

3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

4. ERP for below 1GHz and EIRP above 1GHz.

5.3.5 Test Results

Temperature	22.6 °C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Remark:

1. Measured at TM1 to TM4, recorded worst case at TM1 and TM3;

2. Please refer to following page.

Modulation Type: GMSK							
Operation Mode: TM1				Channel Separation: 12.5KHz			
Test Channel: Channel 101				Test Frequency: 410.125MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak EIRP (dBm)	Limit (dBm)	Polarization
913.07	-41.10	5.26	9.88	2.15	-34.33	-20.00	H
1223.258	-52.67	6.11	11.36	2.15	-45.27	-20.00	H
2422.387	-46.48	7.01	11.42	2.15	-39.92	-20.00	H
913.07	-54.41	5.26	9.88	2.15	-47.64	-20.00	V
1223.258	-50.44	6.11	11.36	2.15	-43.04	-20.00	V
2422.387	-56.61	7.01	11.42	2.15	-50.05	-20.00	V

Modulation Type: GMSK							
Operation Mode: TM1				Channel Separation: 12.5KHz			
Test Channel: Channel 27				Test Frequency: 453.125MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak EIRP (dBm)	Limit (dBm)	Polarization
922.387	-41.22	5.39	9.38	2.15	-35.08	-20.00	H
1288.325	-52.82	5.67	11.02	2.15	-45.32	-20.00	H
2236.214	-46.30	6.59	10.98	2.15	-39.76	-20.00	H
922.387	-54.30	5.39	9.38	2.15	-48.16	-20.00	V
1288.325	-50.50	5.67	11.02	2.15	-43.00	-20.00	V
2236.214	-56.85	6.59	10.98	2.15	-50.31	-20.00	V

Modulation Type: GMSK							
Operation Mode: TM1				Channel Separation: 12.5KHz			
Test Channel: Channel 20				Test Frequency: 469.625MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak EIRP (dBm)	Limit (dBm)	Polarization
915.741	-46.78	5.28	9.37	2.15	-40.54	-20.00	H
1231.014	-52.26	5.62	10.90	2.15	-44.83	-20.00	H
2432.523	-46.68	6.73	10.83	2.15	-40.43	-20.00	H
915.741	-50.41	5.28	9.31	2.15	-44.23	-20.00	V
1231.014	-49.12	5.84	11.01	2.15	-41.80	-20.00	V
2432.523	-55.69	6.75	11.06	2.15	-49.23	-20.00	V

Modulation Type: GMSK							
Operation Mode: TM3				Channel Separation: 25KHz			
Test Channel: Channel 101				Test Frequency: 410.125MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak EIRP (dBm)	Limit (dBm)	Polarization
913.07	-41.36	5.26	9.88	2.15	-34.59	-13.00	H
1223.258	-52.73	6.11	11.36	2.15	-45.33	-13.00	H
2422.387	-46.16	7.01	11.42	2.15	-39.60	-13.00	H
913.07	-54.15	5.26	9.88	2.15	-47.38	-13.00	V
1223.258	-50.40	6.11	11.36	2.15	-43.00	-13.00	V
2422.387	-56.81	7.01	11.42	2.15	-50.25	-13.00	V

Modulation Type: GMSK							
Operation Mode: TM3				Channel Separation: 25KHz			
Test Channel: Channel 27				Test Frequency: 453.125MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak EIRP (dBm)	Limit (dBm)	Polarization
922.387	-41.01	5.39	9.38	2.15	-34.87	-13.00	H
1288.325	-52.70	5.67	11.02	2.15	-45.20	-13.00	H
2236.214	-46.48	6.59	10.98	2.15	-39.94	-13.00	H
922.387	-54.26	5.39	9.38	2.15	-48.12	-13.00	V
1288.325	-50.37	5.67	11.02	2.15	-42.87	-13.00	V
2236.214	-56.93	6.59	10.98	2.15	-50.39	-13.00	V

Modulation Type: GMSK							
Operation Mode: TM3				Channel Separation: 25KHz			
Test Channel: Channel 20				Test Frequency: 469.625MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak EIRP (dBm)	Limit (dBm)	Polarization
915.741	-46.55	5.28	9.37	2.15	-40.31	-13.00	H
1231.014	-51.90	5.62	10.9	2.15	-44.47	-13.00	H
2432.523	-46.77	6.73	10.83	2.15	-40.52	-13.00	H
915.741	-50.59	5.28	9.31	2.15	-44.41	-13.00	V
1231.014	-49.14	5.84	11.01	2.15	-41.82	-13.00	V
2432.523	-55.77	6.75	11.06	2.15	-49.31	-13.00	V

Notes:

- 1). Measuring frequencies from 9 KHz~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz;
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode;
- 3). Peak EIRP = P_{Mea} + Path Loss + Antenna Gain + Correction Value (2.15).

5.4. Spurious Emission on Antenna Port

5.4.1 Test Applicable


The same as Section 5.3

5.4.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range. Set RBW 1KHz, VBW 3KHz in the frequency band 9KHz to 150KHz, set RBW 10KHz, VBW 30 KHz in the frequency band 150KHz to 30 MHz, set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz. VBW=3MHz from the 1GHz to 10th Harmonic.

The audio input was set to 0 to get the unmodulated carrier, the resulting picture is print out for each channel separation.

5.4.3 Test Configuration

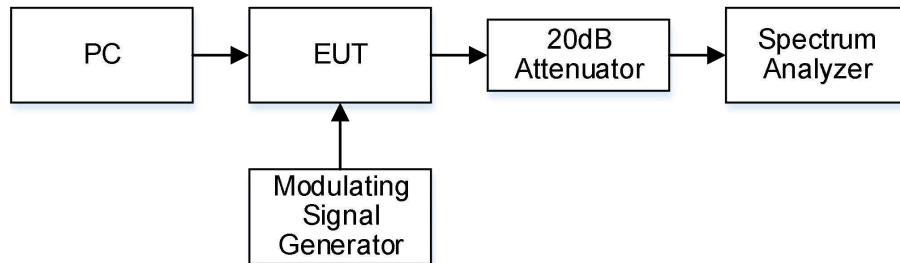

5.4.4 Limit

Modulation Type: GMSK

FCC Part and 90.210:

For 12.5 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

Calculation: Limit (dBm) = $EL - 50 - 10\log(TP) = -20$ dBm

For 25 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 62.5 kHz at least:

Calculation: Limit (dBm) = $EL - 43 - 10\log(TP) = -13$ dBm

Notes: EL is the emission level of the Output Power expressed in dBm.

Note: 1. In general, the worst case attenuation requirement shown above was applied.

2. The measurement frequency range from 9 KHz to 6GHz.


5.4.5 Test Results


Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage


Operation Mode	Test Channel	Test Frequency (MHz)	Measured Frequency Range	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
TM1	Ch101	410.125	9 KHz – 6 GHz	<-20	-20	PASS
	Ch27	453.125	9 KHz – 6 GHz	<-20		
	Ch20	469.625	9 KHz – 6 GHz	<-20		
TM3	Ch101	410.125	9 KHz – 6 GHz	<-13	-13	PASS
	Ch27	453.125	9 KHz – 6 GHz	<-13		
	Ch20	469.625	9 KHz – 6 GHz	<-13		


Remark:


1. Measured at TM1 to TM4, recorded worst case at TM1 and TM3;
2. Please refer to following plot.

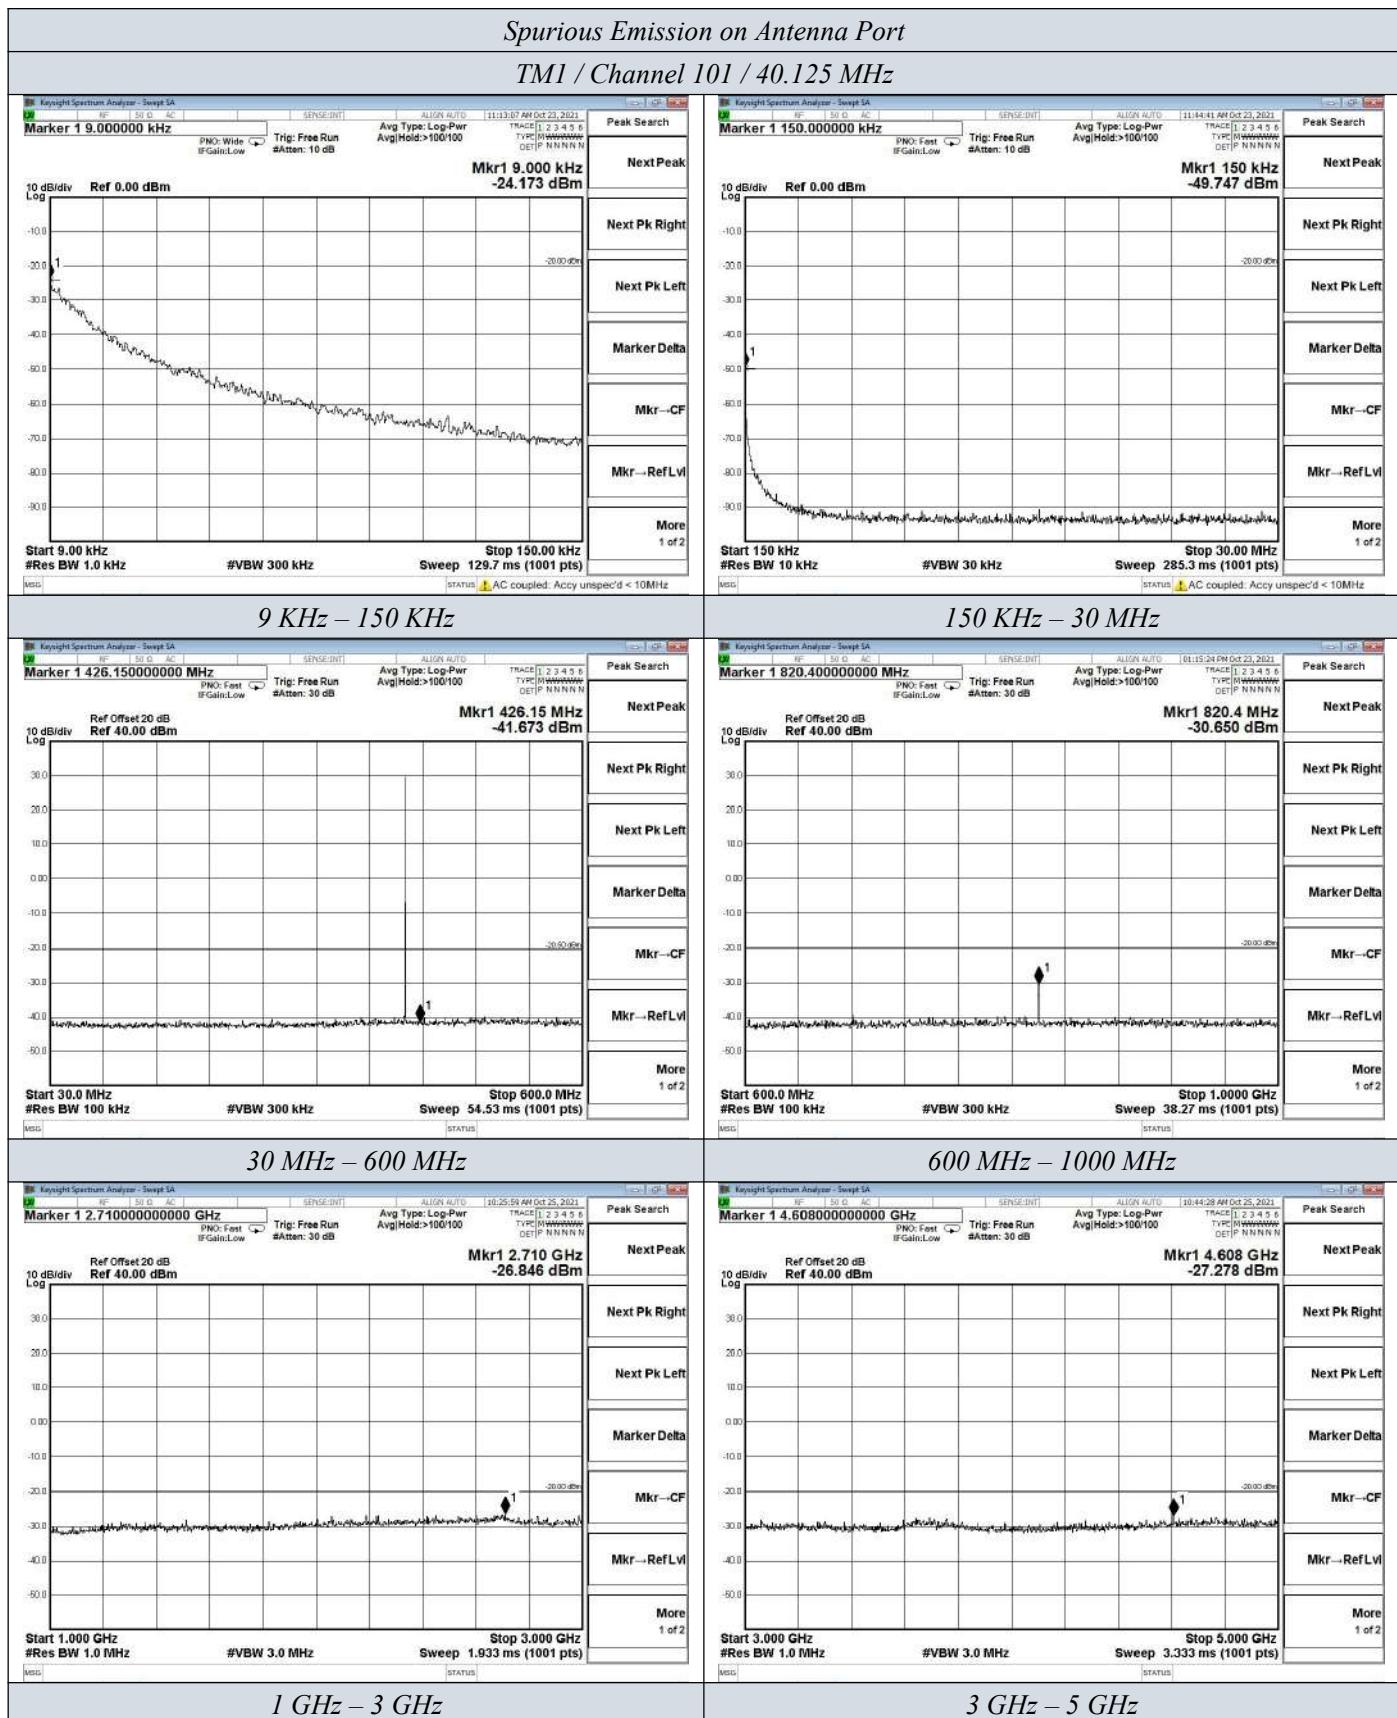

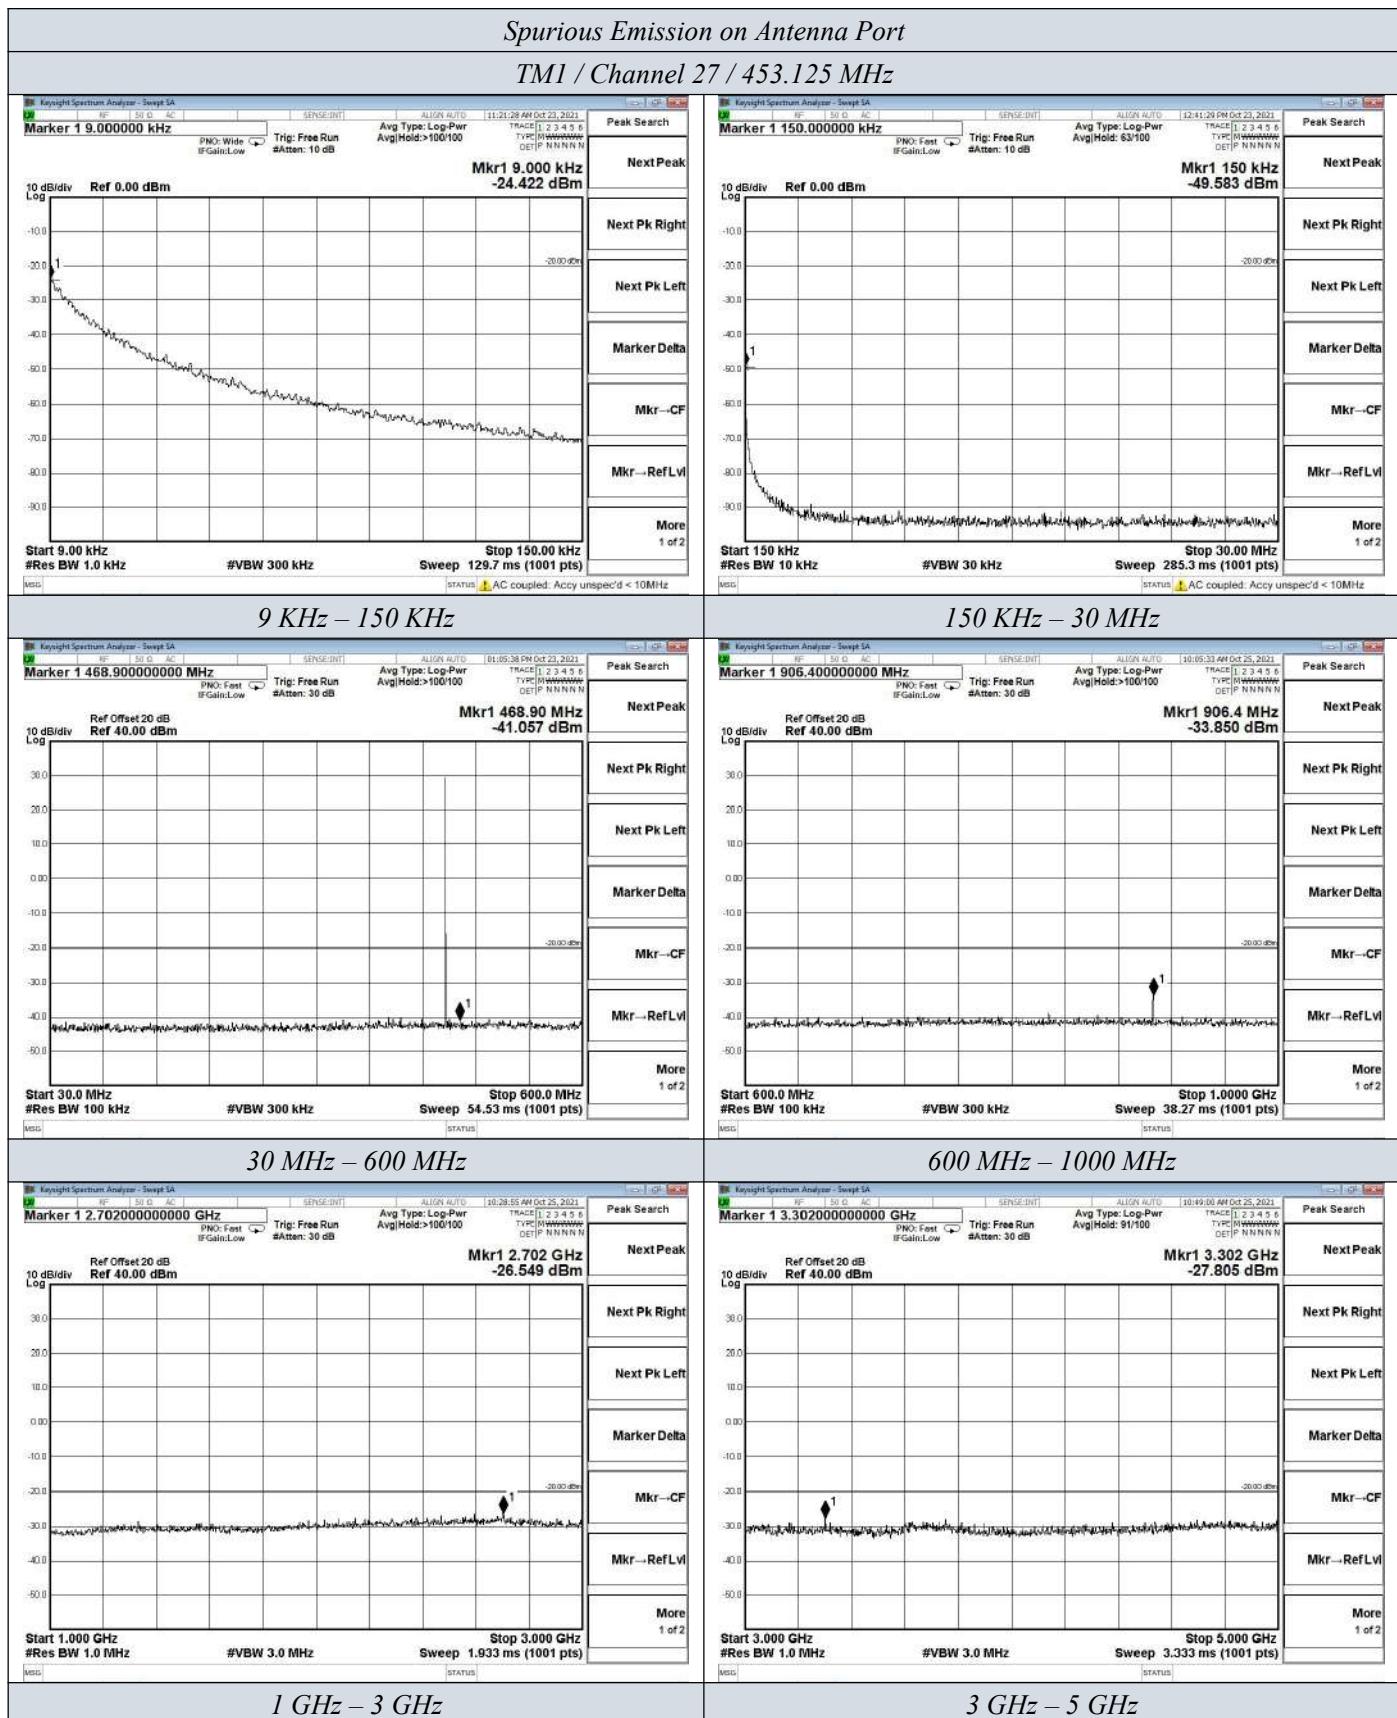

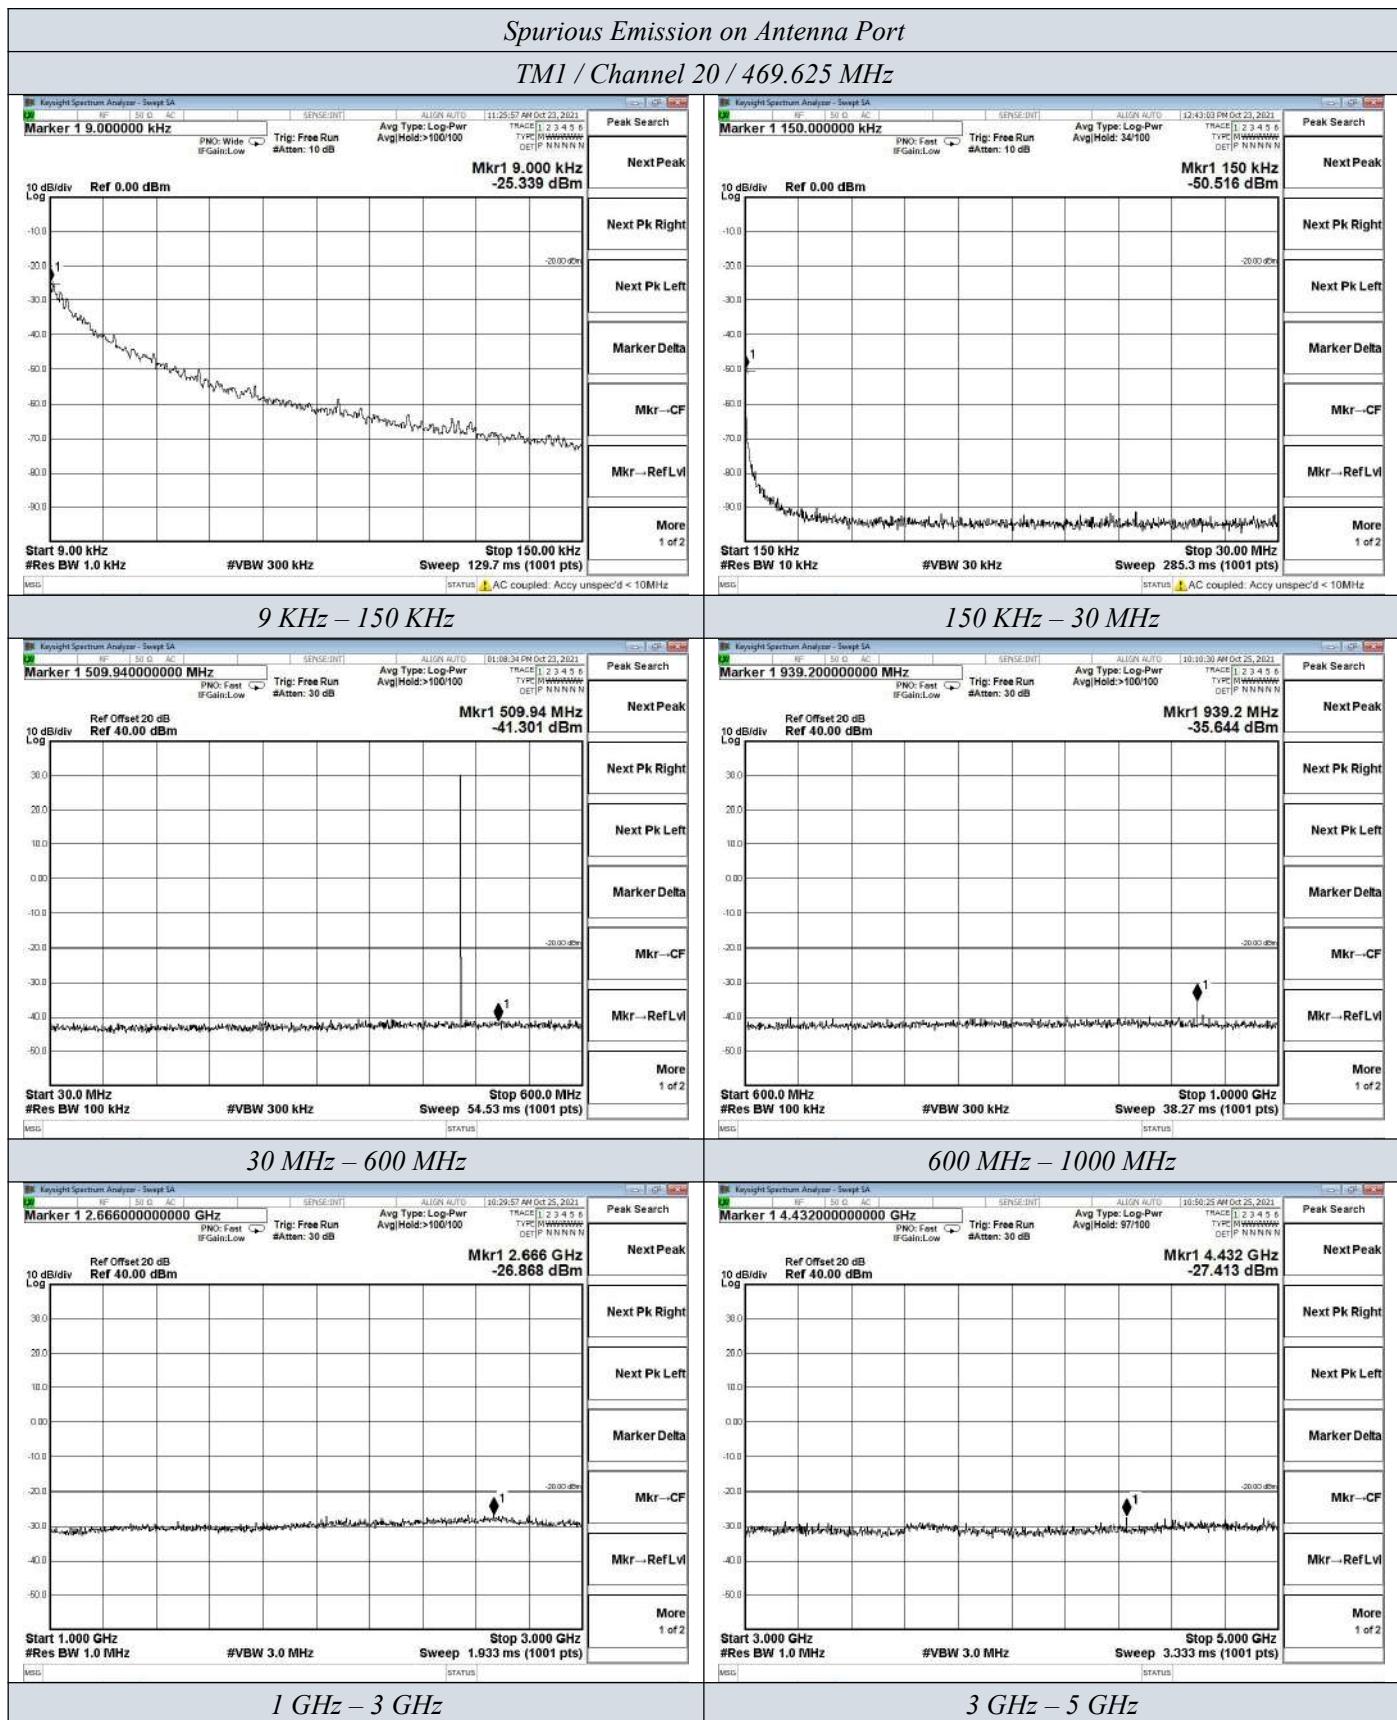

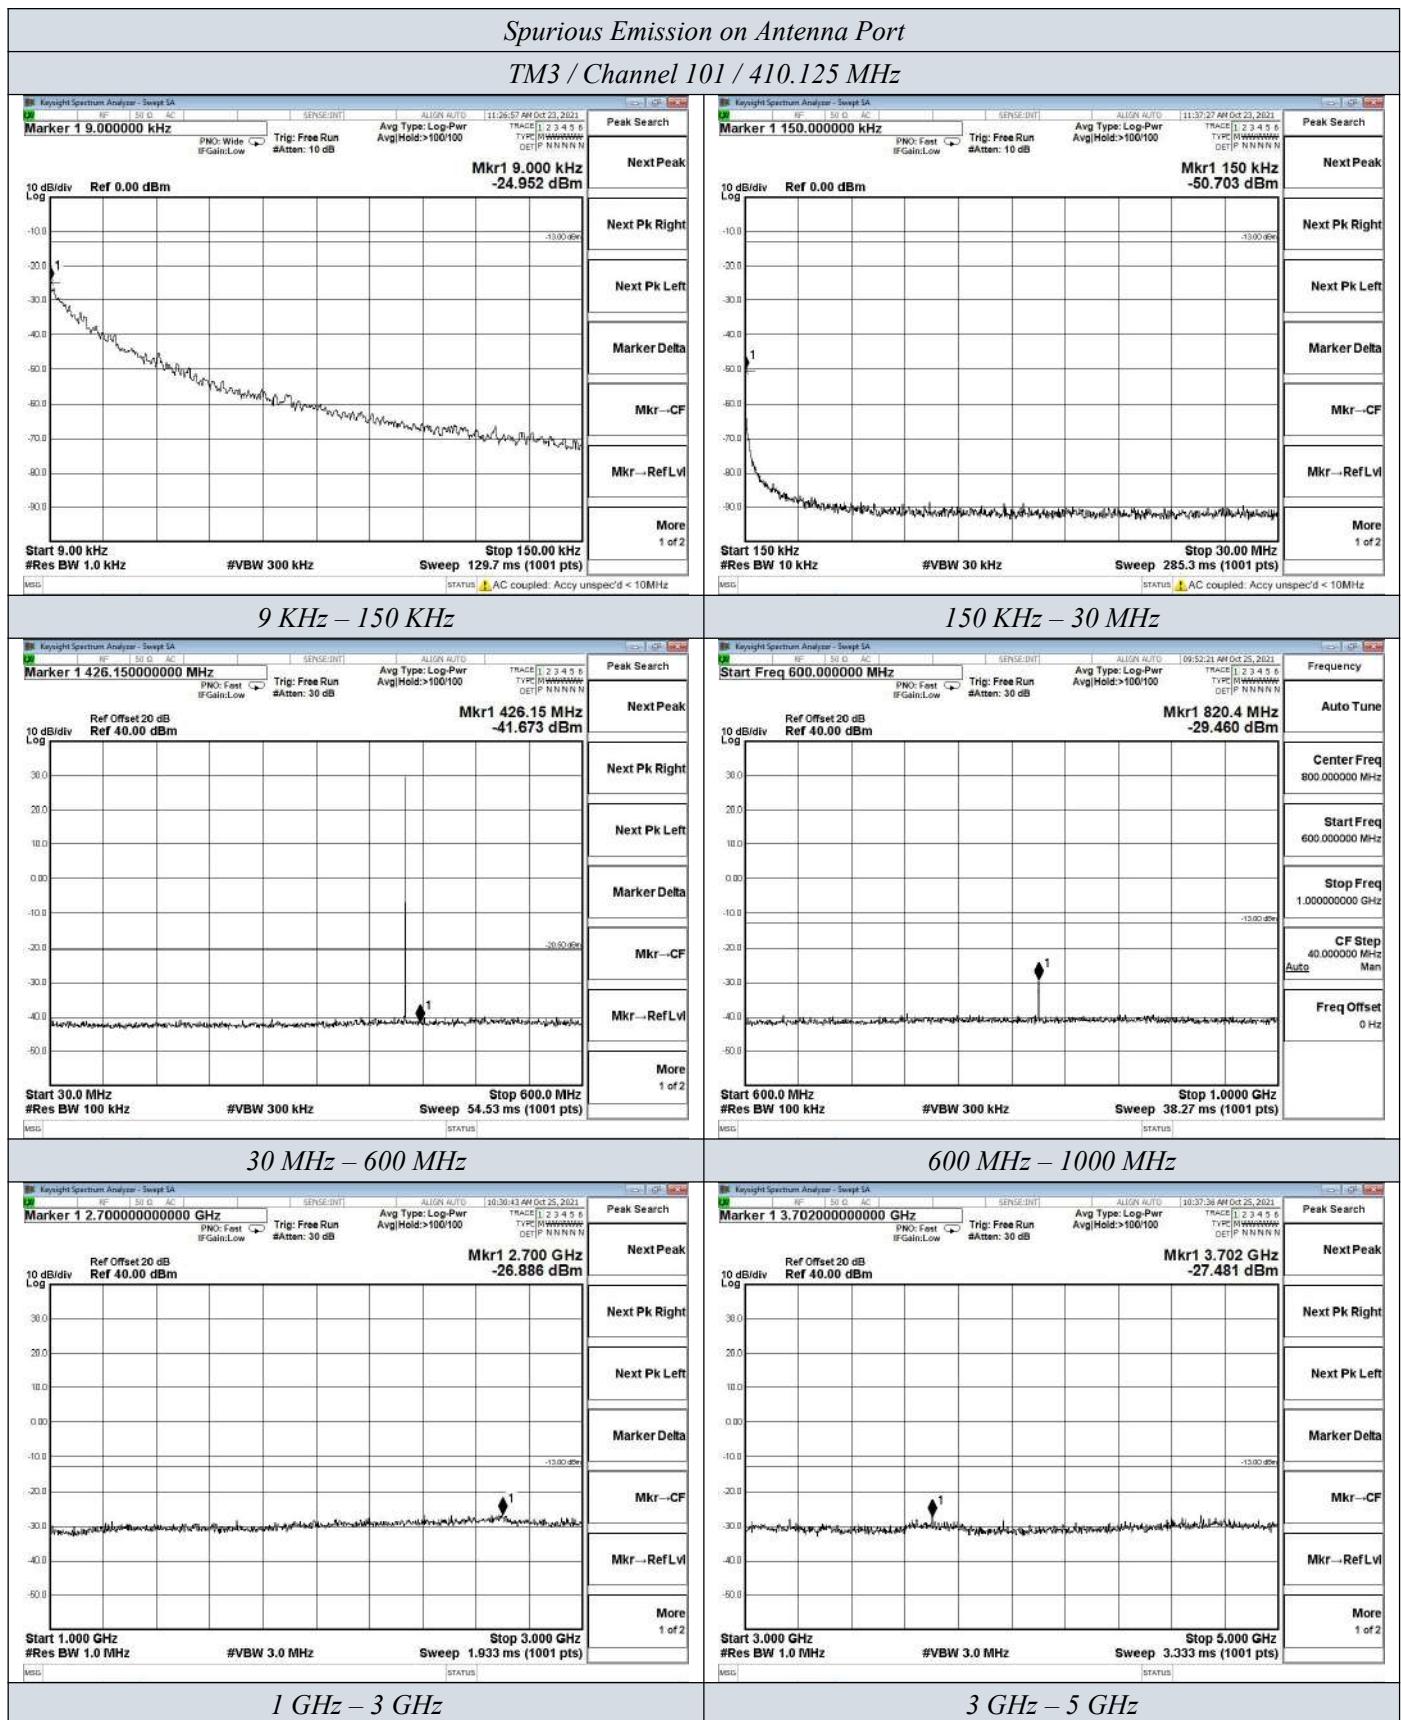

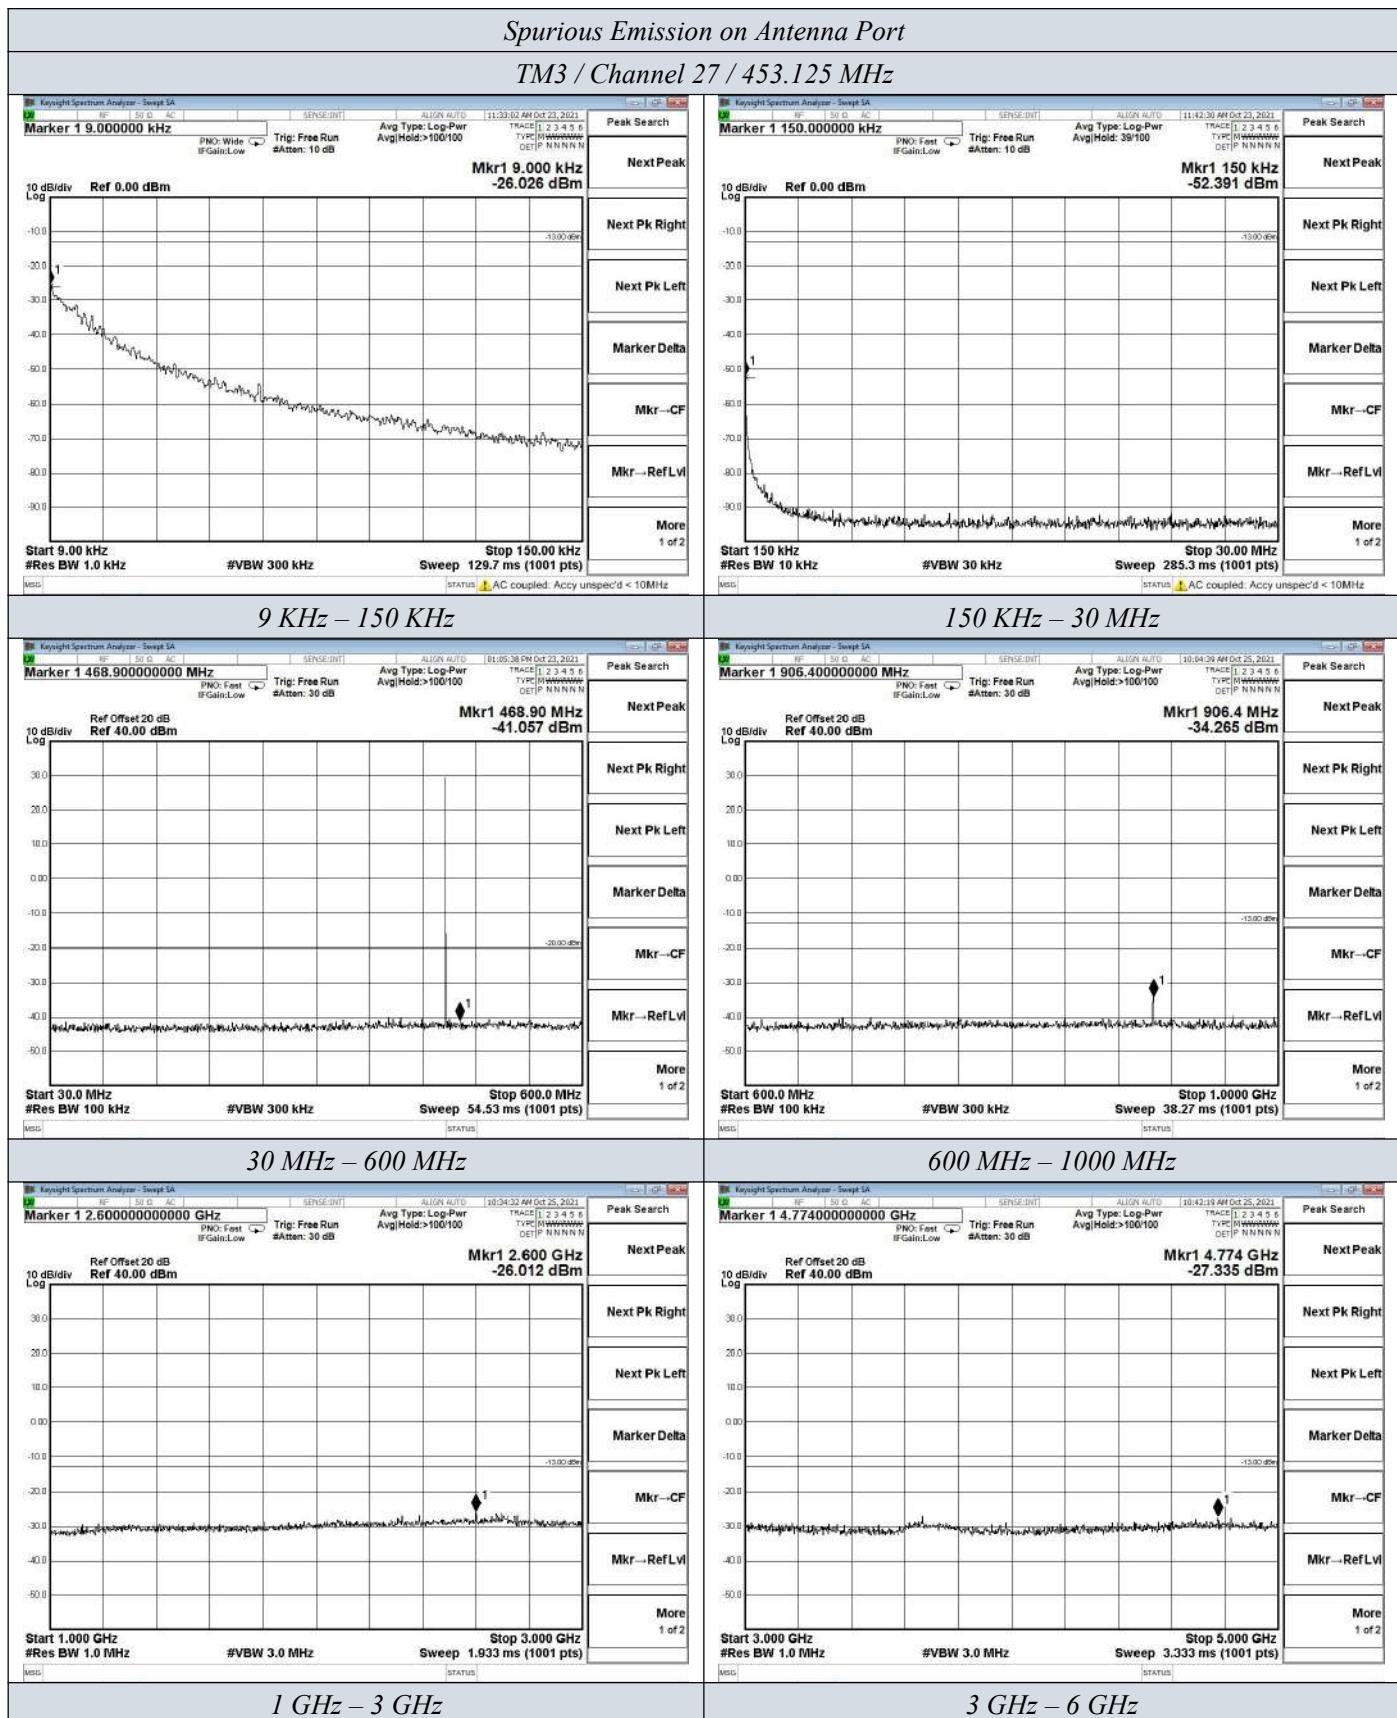



Spurious Emission on Antenna Port

TM3 / Channel 20/ 469,625 MHz





9 KHz – 150 KHz

150 KHz – 30 MHz

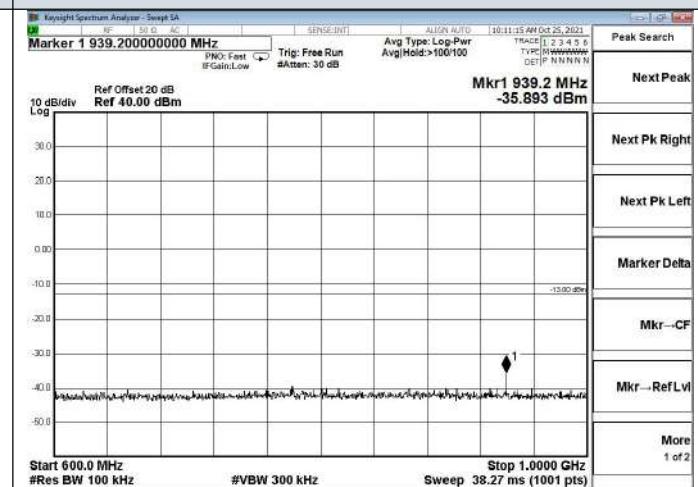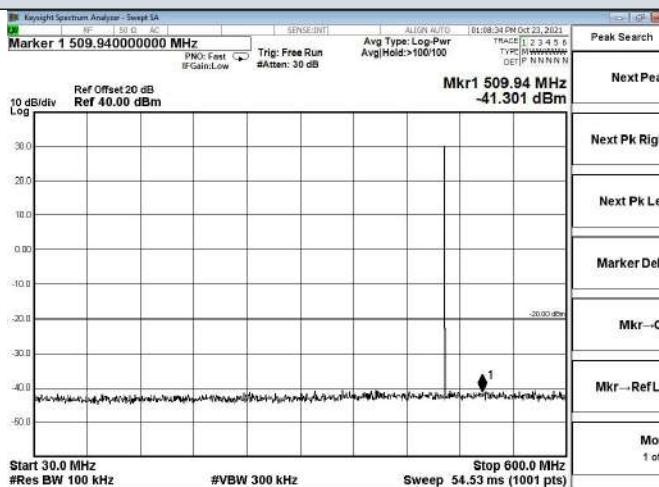

30 MHz - 600 MHz

600 MHz - 1000 MHz

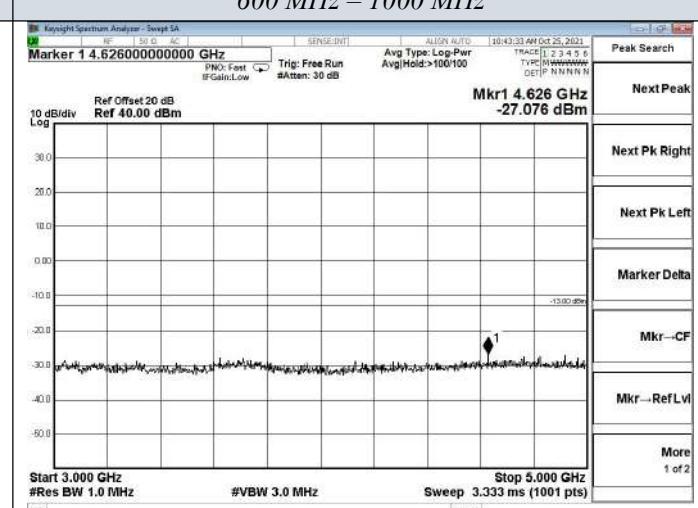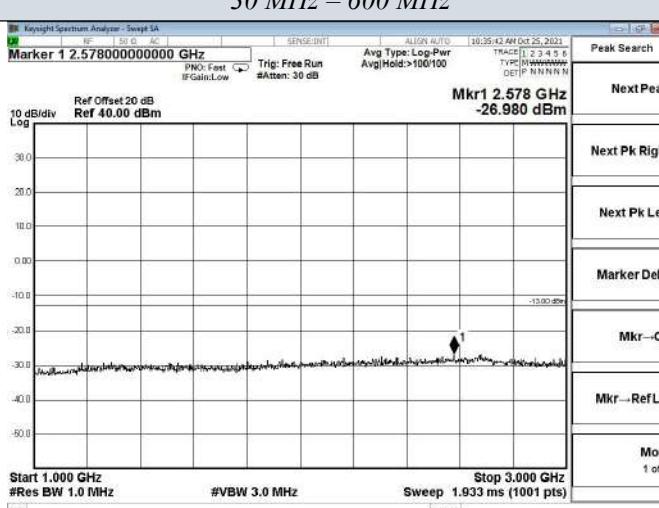

1 GHz – 3 GHz

3 GHz - 5 GHz

5.5. Modulation Characteristics - Modulation Limiting

5.5.1 Test Applicable

§ 2.1047(b): Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Recommended frequency deviation characteristics are given below:


- 1.25 kHz for 6.25 kHz Channel Spacing System
- 2.5 kHz for 12.5 kHz Channel Spacing System
- 5 kHz for 25 kHz Channel Spacing System

5.5.2 Test Procedure

For Audio Transmitter: The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory: The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

5.5.3 Test Configuration

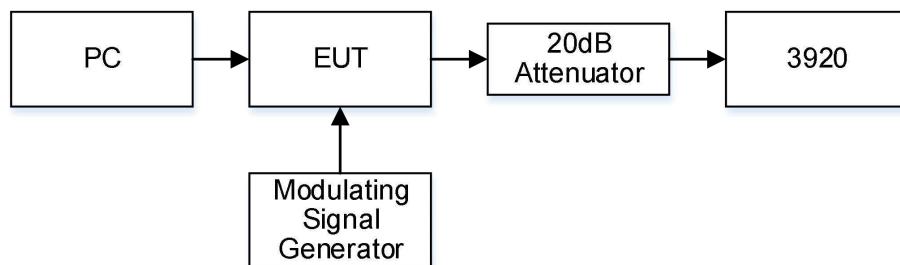

5.5.4 Test Results

Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Data Modulation Limiting for 12.5 kHz Channel Spacing Operation

Operating Mode	Data Rate	Peak Frequency Deviation (KHz)
GMSK	9.6 kbps random data	1.58

Data Modulation Limiting for 25 kHz Channel Spacing Operation

Operating Mode	Data Rate	Peak Frequency Deviation (KHz)
GMSK	19.2 kbps random data	2.26

5.6. Frequency Stability Test


5.6.1 Test Applicable

- 1 According to FCC Part 2 Section 2.1055 (a) (1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +60°C centigrade.
- 2 According to FCC Part 2 Section 2.1055 (e) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- 3 Vary primary supply voltage from 85 to 115 percent of the nominal value.
- 4 According to §90.213, the frequency stability limit is 2.5 ppm for 12.5KHz and 5.0ppm for 25KHz channel separation

5.6.2 Test Procedure

The EUT was set in the climate chamber and connected to an external DC power supply and AC power supply. The RF output was directly connected to Spectrum Analyzer ESCI3. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply or AC power supply and the voltage was adjusted in the required ranges. The result was recorded.

5.6.3 Test Configuration

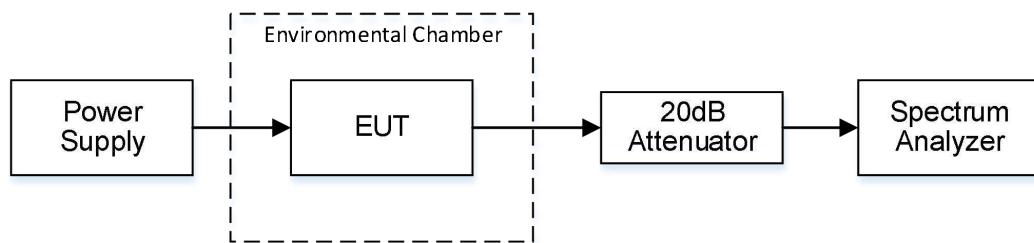

5.6.4 Test Limits

According to 90.213, Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range	Channel Bandwidth	Frequency Tolerance (ppm)		
		Fixed and Base Station	Mobile Stations	
			> 2W	≤ 2W
150-174MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

* Stations operating in the 154.45 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.

* Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

5.6.5 Test Results

Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Operation Mode	Channel Separation	Test conditions		Frequency error (ppm)			
		Voltage(V)	Temp(°C)	460.125	453.125	469.625	
TM1	12.5KHz	7.4 V	-30	0.63	0.69	0.38	
			-20	0.92	1.60	1.01	
			-10	0.25	0.01	0.91	
			0	0.76	1.14	1.26	
			10	0.87	0.61	1.09	
			20	1.79	1.48	1.22	
			30	0.06	0.01	0.33	
			40	1.00	0.94	0.31	
			50	0.36	0.50	0.81	
			6.29 (85% Rated)	20	0.94	0.77	
			8.51(115% Rated)	20	1.14	1.07	
Limit		2.5 ppm					
Test Results		PASS					

Operation Mode	Channel Separation	Test conditions		Frequency error (ppm)			
		Voltage(V)	Temp(°C)	460.125	453.125	469.625	
TM3	25KHz	7.4 V	-30	1.24	1.13	0.44	
			-20	1.12	1.77	1.30	
			-10	0.03	0.18	0.76	
			0	1.41	1.61	1.67	
			10	0.68	0.69	0.57	
			20	1.36	1.39	1.76	
			30	0.42	0.86	0.45	
			40	0.67	0.71	0.46	
			50	0.81	0.93	0.72	
			6.29 (85% Rated)	20	0.49	0.91	
			8.51(115% Rated)	20	0.70	1.24	
Limit		5.0 ppm					
Test Results		PASS					

Remark:

1. Measured at TM1 to TM4, recorded worst case at TM1 and TM3.

5.7. Transmitter Frequency Behavior


5.7.1 Test Applicable

Section 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1,2}	Maximum frequency difference ³	All equipment	
		1500 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25KHz Channels			
t_1 ⁴	$\pm 25.0\text{KHz}$	5.0ms	10.0ms
t_1	$\pm 12.5\text{KHz}$	20.0ms	25.0ms
t_3 ⁴	$\pm 25.0\text{KHz}$	5.0ms	10.0ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5KHz Channels			
t_1 ⁴	$\pm 12.5\text{KHz}$	5.0ms	10.0ms
t_1	$\pm 6.25\text{KHz}$	20.0ms	25.0ms
t_3 ⁴	$\pm 12.5\text{KHz}$	5.0ms	10.0ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25KHz Channels			
t_1 ⁴	$\pm 6.25\text{KHz}$	5.0ms	10.0ms
t_1	$\pm 3.125\text{KHz}$	20.0ms	25.0ms
t_3 ⁴	$\pm 6.25\text{KHz}$	5.0ms	10.0ms
1. t_{on} is the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing. t_1 is the time period immediately following t_{on} . t_2 is the time period immediately following t_1 . t_3 is the time period from the instant when the transmitter is turned off until t_{off} . t_{off} is the instant when 1 KHz test signal starts to rise. 2. During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in 90.213. 3. Difference between the actual transmitter frequency and the assigned transmitter frequency. 4. If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency for this time period.			

5.7.2 Test Configuration

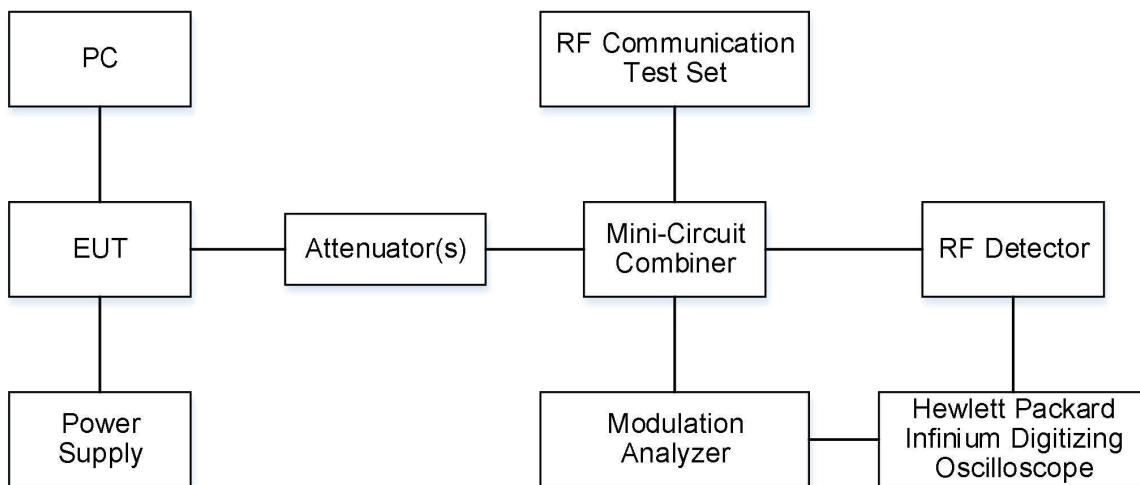

5.7.3 Test Procedure


According to TIA/EIA-603 2.2.19 requirement.

5.7.4 Test Results

Temperature	22.6°C	Humidity	53.7%
Test Engineer	Monkey.Li	Test Voltage	Normal Voltage

Measured at TM1 to TM4, recorded worst case at TM1 and TM3.

Modulation Type: GMSK

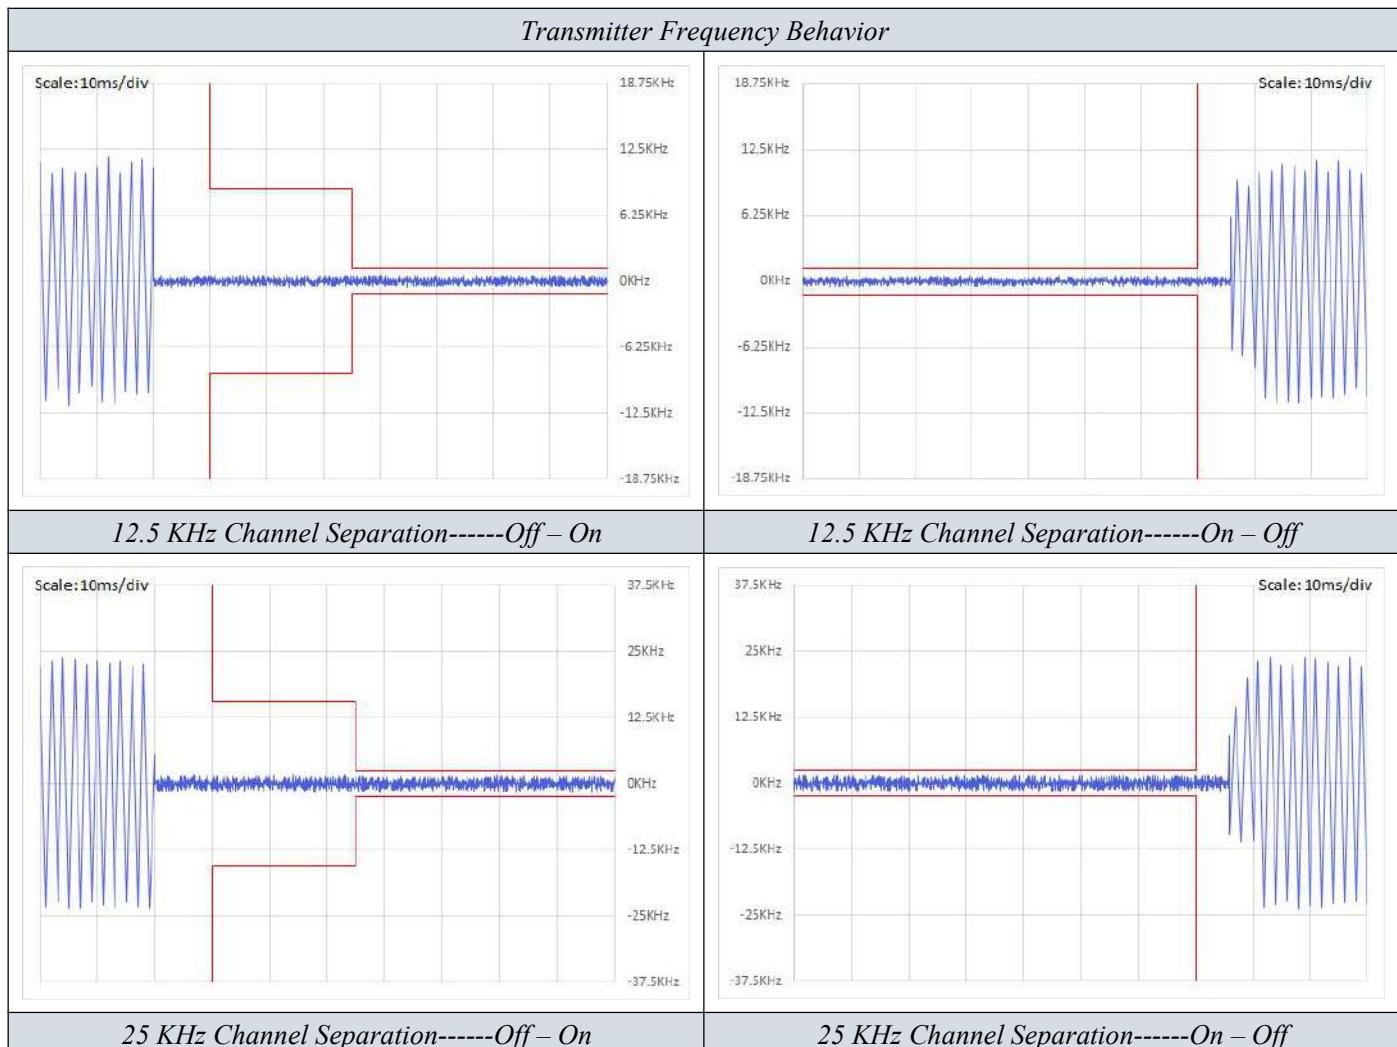

6. LIST OF MEASURING EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2021-06-22	2022-06-21
2	Power Sensor	R&S	NRV-Z81	100458	2021-06-22	2022-06-21
3	Power Sensor	R&S	NRV-Z32	10057	2021-06-22	2022-06-21
4	ESG Vector Signal Generator	Agilent	E4438C	MY49072627	2021-06-22	2022-06-21
5	MXA Signal Analyzer	Agilent	N9020A	MY49061051	2021-06-22	2022-06-21
6	DC Power Supply	Agilent	E3642A	N/A	2020-11-26	2021-11-25
7	EMI Test Software	Farad	EZ	/	N/A	N/A
8	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2020-09-26	2021-09-25
9	Positioning Controller	MF	MF7082	MF78020803	2021-06-21	2022-06-20
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-07-25	2024-07-24
11	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-07-25	2024-07-24
12	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-07-01	2024-06-30
13	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2020-09-20	2023-09-19
14	Broadband Preamplifier	SCHWARZBECK	BBV9745	9719-025	2021-06-21	2022-06-20
15	EMI Test Receiver	R&S	ESR 7	101181	2021-06-21	2022-06-20
16	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2020-11-17	2021-11-16
17	6dB Attenuator	/	100W/6dB	1172040	2021-06-21	2022-06-20
18	3dB Attenuator	/	2N-3dB	/	2020-11-17	2021-11-16
19	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2021-06-21	2022-06-20
20	Combiner	N/A	N/A	SHWLCB2-52500S	2020-11-17	2021-11-16
21	Audio Analyzer	R&S	UPV	1146.2003K02-101 721-UW	2020-11-25	2021-11-24
22	MXG Vector Signal Generator	Agilent	N5182A	MY47071151	2021-06-21	2022-06-20
23	RF Filter	Micro-Tronics	BRC50721	S/N-013	2020-11-17	2021-11-16
24	RF Filter	Micro-Tronics	BRM50702	S/N-195	2021-06-21	2022-06-20

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

7. TEST SETUP PHOTOGRAPHS OF EUT



Fig.1 (below 1GHz)

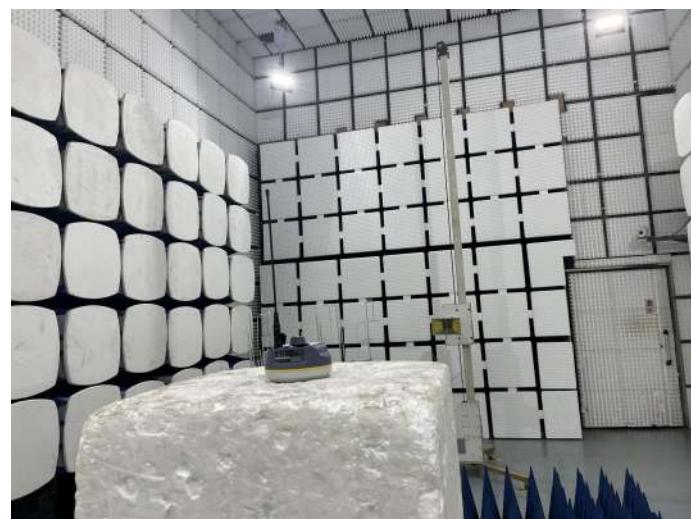


Fig.1 (Above 1GHz)

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----