

2.4GWIFI

DUT: DN72LM


Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:2.1436
Medium: H2450 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.76 \text{ S/m}$; $\epsilon_r = 39.72$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2024/6/25;
- Electronics: DAE4 Sn1418; Calibrated: 2024/5/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Front/Area Scan (8x11x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 0.436 W/kg

Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.396 V/m ; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.720 W/kg
SAR(1 g) = 0.390 W/kg ; SAR(10 g) = 0.160 W/kg
Maximum value of SAR (measured) = 0.520 W/kg

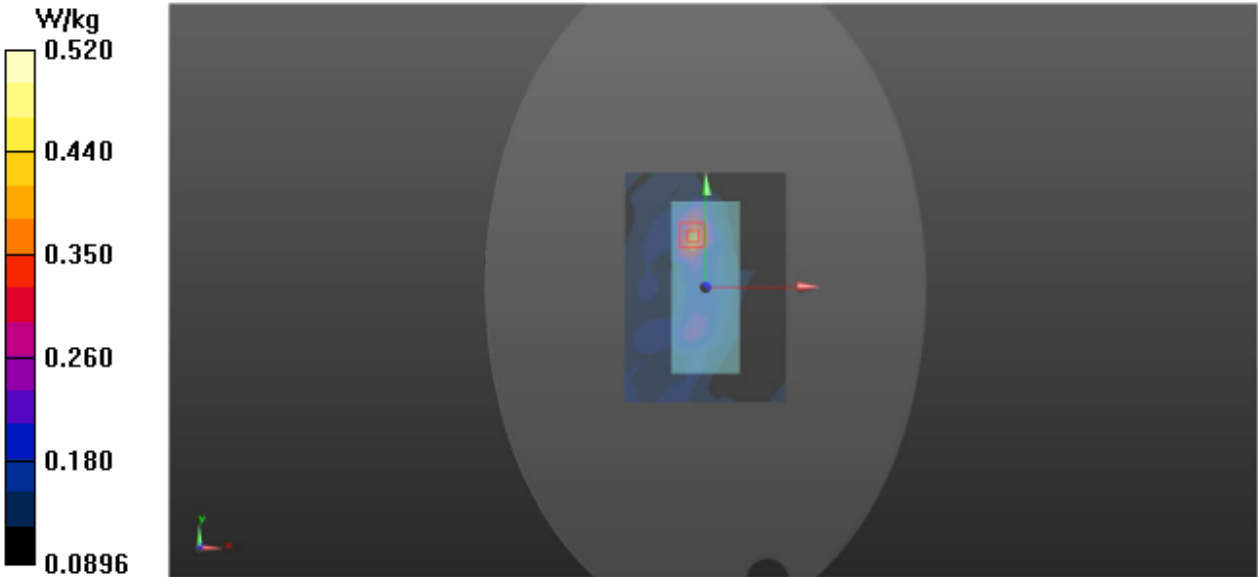

5.2GWIFI

DUT: DN72LM

Communication System: 802.11a ; Frequency: 5200 MHz;Duty Cycle: 1:2.2548
Medium: HSL 5GHz Medium parameters used: $f = 5200\text{ MHz}$; $\sigma = 4.72\text{ S/m}$; $\epsilon_r = 36.83$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.7\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.5\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2024/6/25;
- Electronics: DAE4 Sn1418; Calibrated: 2024/5/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Front/Area Scan (8x11x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 5.06 W/kg

Front/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.733 V/m ; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 5.20 W/kg
SAR(1 g) = 0.580 W/kg ; SAR(10 g) = 0.251 W/kg
Maximum value of SAR (measured) = 0.830 W/kg

