

FCC

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
BrailleSense 6

ISSUED TO
SELVAS Healthcare, Inc.

155, Sinseong-ro, Yuseong-gu, Daejeon, Rep. of KOREA



Tested by: *Ye Hongji*
Ye Hongji

Date: *May 11, 2021*

Approved by: *Wei Yanquan*
Wei Yanquan
(Chief Engineer)

Date: *May 11, 2021*



Report No.: BL-SZ2120401-603

EUT Name: BrailleSense 6

Model Name: H632B

Brand Name: HIMS

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AL4DH632B

Test Conclusion: Pass

Test Date: Feb. 24, 2021 ~ Mar. 18, 2021

Date of Issue: May 11, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>May 07, 2021</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>May 11, 2021</u>	<u>Updated test setup photo for section 4.4.3 and 4.4.4.</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	16

4.5	Measurement Results Explanation Example.....	17
4.5.1	For conducted test items:	17
4.5.2	For radiated band edges and spurious emission test:.....	17
5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards.....	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	18
5.2	Output Power	19
5.2.1	Test Limit.....	19
5.2.2	Test Setup.....	19
5.2.3	Test Procedure.....	19
5.2.4	Test Result	20
5.3	6dB Bandwidth	21
5.3.1	Limit.....	21
5.3.2	Test Setup.....	21
5.3.3	Test Procedure.....	21
5.3.4	Test Result	21
5.4	Conducted Spurious Emission	22
5.4.1	Limit.....	22
5.4.2	Test Setup.....	22
5.4.3	Test Procedure.....	22
5.4.4	Test Result	23
5.5	Band Edge (Authorized-band band-edge).....	24
5.5.1	Limit.....	24
5.5.2	Test Setup.....	24
5.5.3	Test Procedure.....	24
5.5.4	Test Result	25
5.6	Conducted Emission	26
5.6.1	Limit.....	26
5.6.2	Test Setup.....	26
5.6.3	Test Procedure.....	26

5.6.4	Test Result	26
5.7	Radiated Spurious Emission	27
5.7.1	Limit.....	27
5.7.2	Test Setup	27
5.7.3	Test Procedure	27
5.7.4	Test Result	30
5.8	Band Edge (Restricted-band band-edge).....	31
5.8.1	Limit.....	31
5.8.2	Test Setup	31
5.8.3	Test Procedure	31
5.8.4	Test Result	31
5.9	Power Spectral density (PSD).....	32
5.9.1	Limit.....	32
5.9.2	Test Setup	32
5.9.3	Test Procedure	32
5.9.4	Test Result	32
ANNEX A	TEST RESULT	33
A.1	Output Power	33
A.2	Bandwidth.....	43
A.3	Conducted Spurious Emissions	54
A.4	Band Edge (Authorized-band band-edge).....	86
A.5	Conducted Emissions.....	99
A.6	Radiated Emission	101
A.7	Band Edge (Restricted-band band-edge).....	136
A.8	Power Spectral Density (PSD)	150
ANNEX B	TEST SETUP PHOTOS	163
ANNEX C	EUT EXTERNAL PHOTOS	163
ANNEX D	EUT INTERNAL PHOTOS	163

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SELVAS Healthcare, Inc.
Address	155, Sinseong-ro, Yuseong-gu, Daejeon, Rep. of KOREA

2.2 Manufacturer Information

Manufacturer	SELVAS Healthcare, Inc.
Address	155, Sinseong-ro, Yuseong-gu, Daejeon, Rep. of KOREA

2.3 Factory Information

Factory	SELVAS Healthcare, Inc.
Address	155, Sinseong-ro, Yuseong-gu, Daejeon, Rep. of KOREA

2.4 General Description for Equipment under Test (EUT)

EUT Type	BrailleSense 6
Model Name Under Test	H632B
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	HCT-ZN632MB-A4
Software Version	H632B_system_44286
Dimensions (Approx.)	245*144*22mm
Weight (Approx.)	0.704kg (with battery)

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11b, 802.11g, 802.11n(HT20/40)
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.	
Modulation Type	DSSS, OFDM	
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11n Basic methodology with $NANT$ transmit antennas, each with the same directional gain $GANT$ dBi for 802.11b/g	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated	
Antenna Type	Main Antenna Aux. Antenna	FPC Antenna
Antenna Gain	Main Antenna	1.91 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
	Aux. Antenna	1.32 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Total directional gain	For power spectral density(PSD) measurements	1.91 dBi Formulas: Directional gain = $GANT + \text{Array Gain}$, $\text{Array Gain} = 10 \log(NANT/NSS) \text{ dB}$. $NSS = 2$, $GANT$ set equal to the gain of the antenna having the highest gain.
	For power measurements	1.91 dBi Formulas: Directional gain = $GANT + \text{Array Gain}$, $\text{Array Gain} = 0$, $GANT$ set equal to the gain of the antenna having the highest gain.
	For Conducted Out-of-Band and Spurious Measurements	1.91 dBi Formulas: Directional gain = $GANT + \text{Array Gain}$, $\text{Array Gain} = 10 \log(NANT/NSS) \text{ dB}$. $NSS = 2$, $GANT$ set equal to the gain of the antenna having the highest gain.
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.	

Mode	Antenna		
	Main Antenna	Aux. Antenna	MIMO
802.11b	√	√	--
802.11g	√	√	√
802.11n20	√	√	√
802.11n40	√	√	√

Note: All the configurations were tested, but only the worst data was shown in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software					
Test Software Version	***#8613#**				
Mode	Channel	Soft Set			
		Main Antenna	Aux. Antenna	MIMO-Main Antenna	MIMO-Aux. Antenna
802.11 b	1	14.0	14.0	--	--
	6	14.0	14.0	--	--
	11	14.5	14.0	--	--
802.11 g	1	13.5	13.5	11.0	11.0
	6	13.0	13.5	11.0	11.0
	11	14.0	13.5	11.5	11.5
802.11 n20	1	14.0	13.5	11.0	11.0
	6	13.5	13.5	11.0	11.0
	11	14.0	13.5	11.5	11.5
802.11 n40	3	13.5	13.5	11.5	11.5
	6	13.5	13.5	11.0	11.0
	9	13.5	13.5	11.0	11.0

Run software:

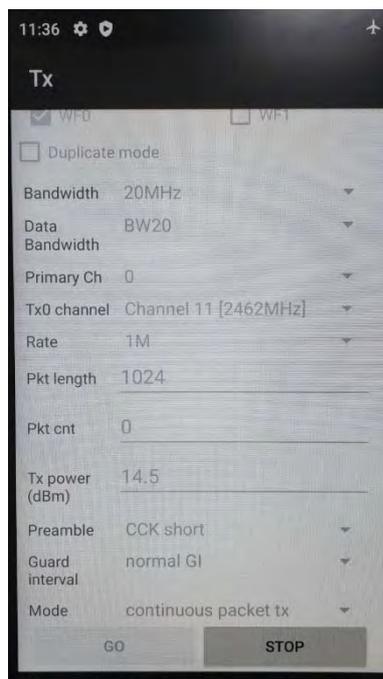

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
4	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	N/A	Pass ^{Note 1}
2	Output Power	15.247(b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A ^{Note 2}

Note 1: Please refer to section 5.1.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.85 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2021.02.18	2022.02.17
Power Amplifier	OPHIR RF	5273F	1016	2021.02.18	2022.02.17
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2020.02.19	2021.02.18

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Audio analyzer	B&K	UPL 16	100129	2020.02.28	2021.02.27

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2021.02.18	2022.02.17
Power Amplifier	OPHIR RF	5273F	1016	2021.02.18	2022.02.17
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2021.02.18	2022.02.17
Audio analyzer	B&K	UPL 16	100129	2021.02.27	2022.02.26

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

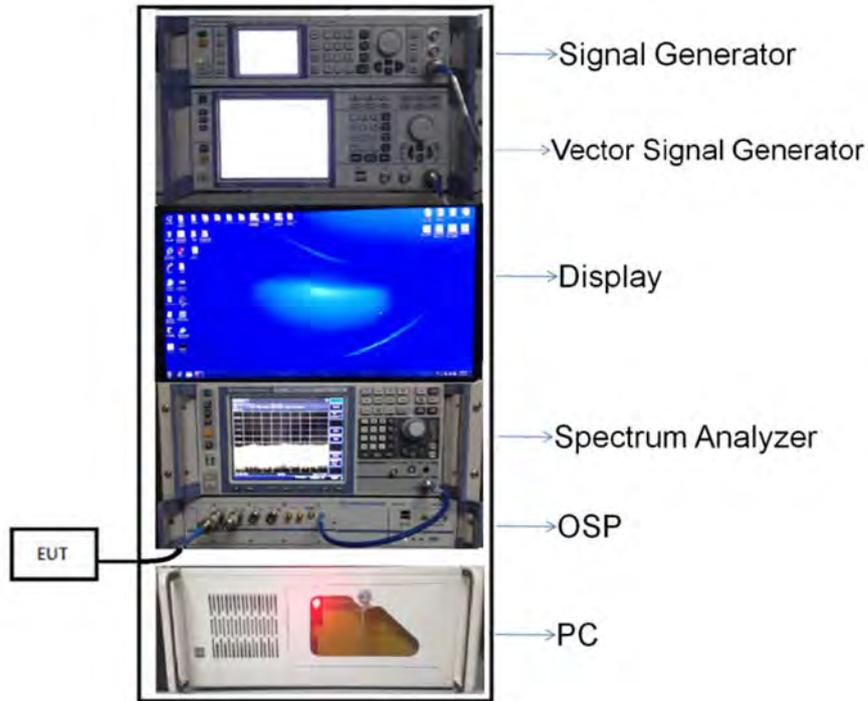


(Diagram 1)

4.4.2 For AC Power Supply Port Test

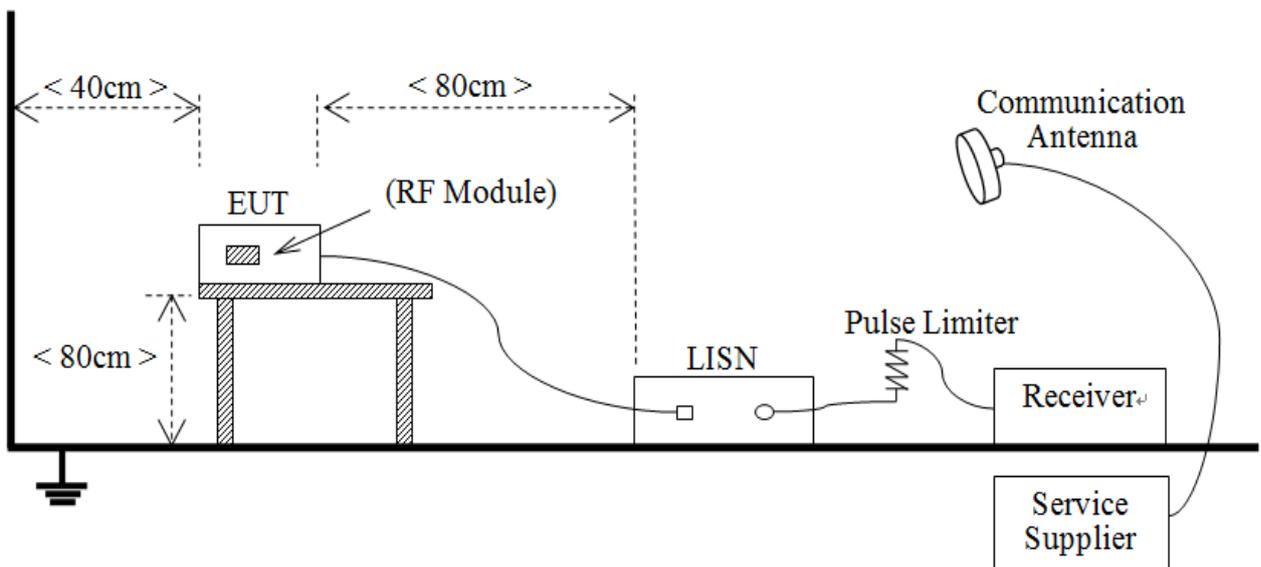


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

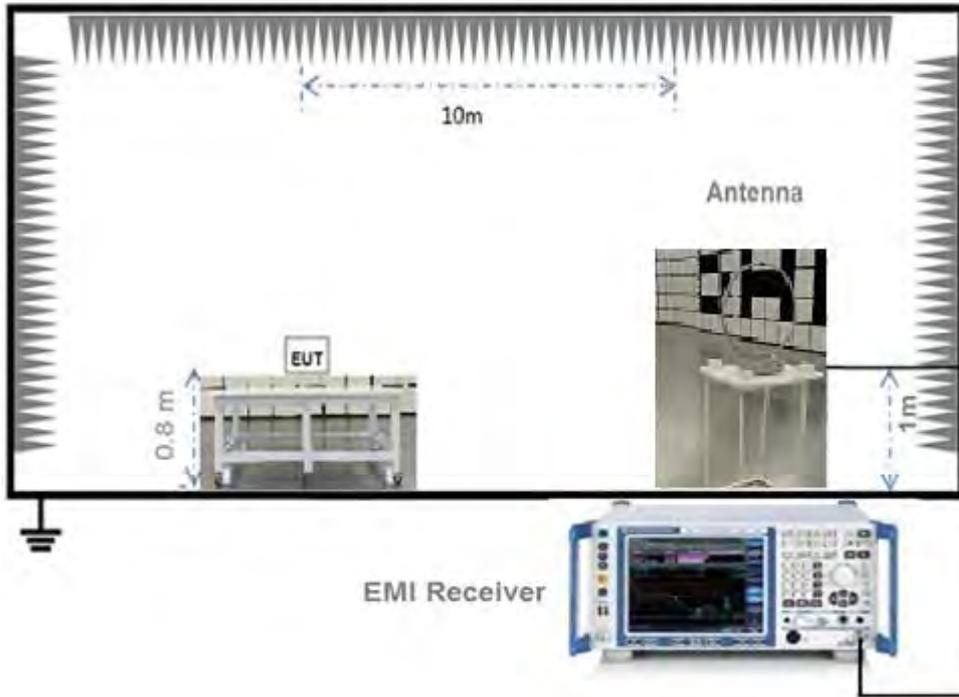


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

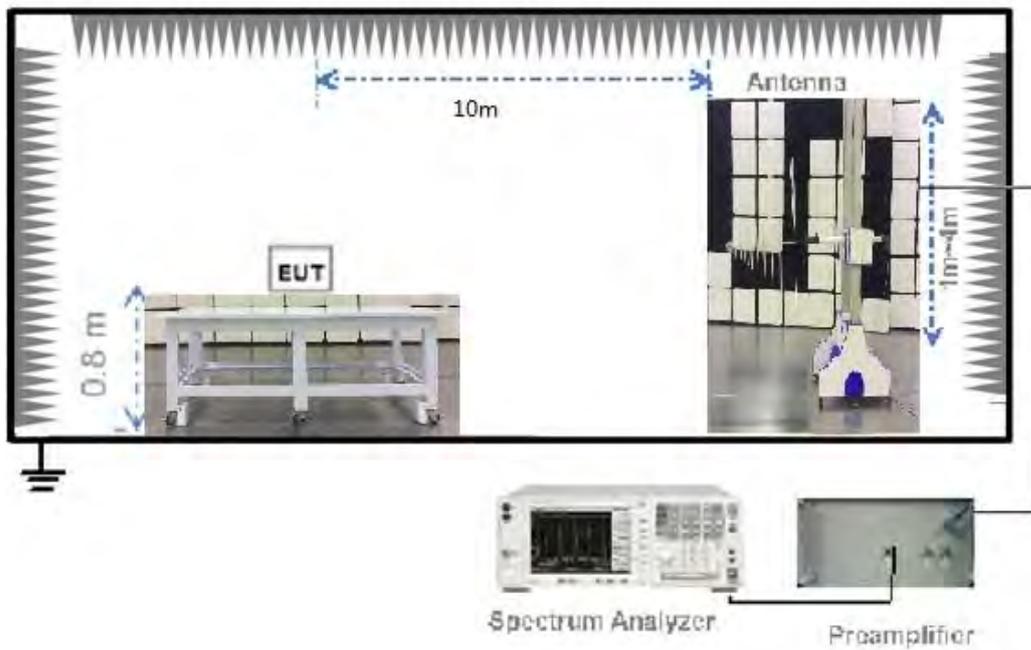

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

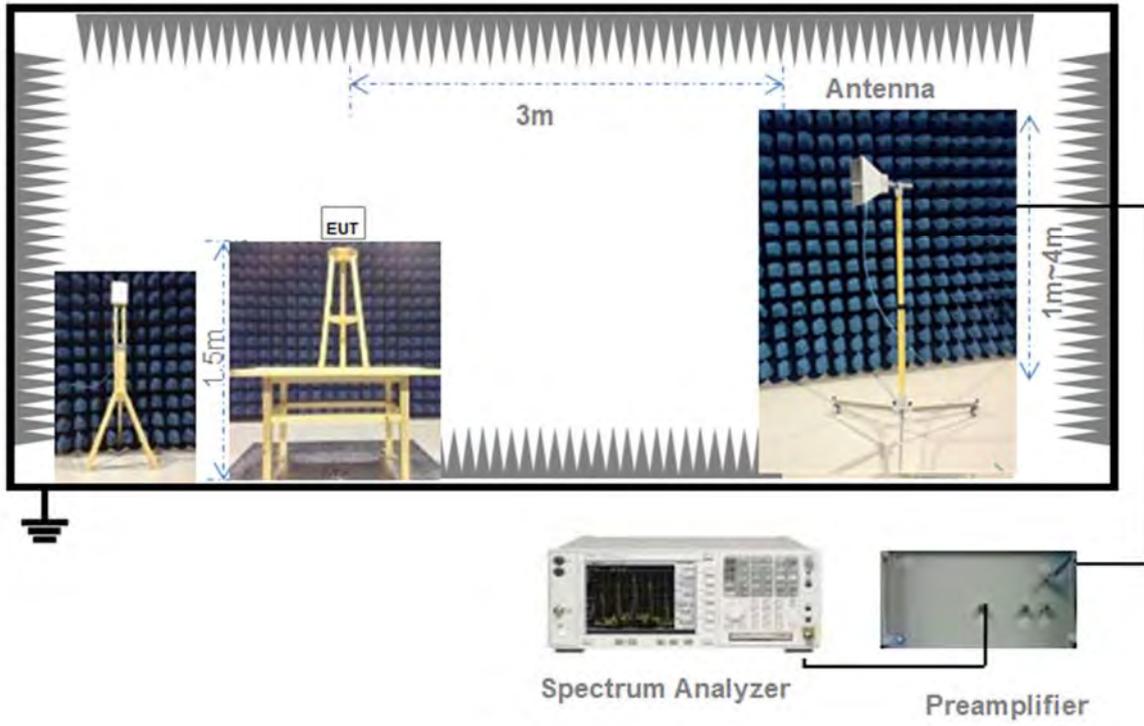

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 6dB Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dBμV/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW ≥ 3 x RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Duty Cycle

Test Mode	Duty Cycle	T (ms)	1/T(kHz)
802.11b	99.23%	8.36960	0.12
802.11g	96.68%	1.39130	0.72
802.11n-20 MHz	96.13%	1.29566	0.77
802.11n-40 MHz	93.40%	0.64565	1.55

Peak Power Test Data

Main Antenna

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.01	25.18	30	1000	Pass
Middle	14.06	25.47			Pass
High	14.12	25.82			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.19	82.99	30	1000	Pass
Middle	19.47	88.51			Pass
High	19.61	91.41			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.49	88.92	30	1000	Pass
Middle	19.76	94.62			Pass
High	19.51	89.33			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.13	81.85	30	1000	Pass
Middle	19.75	94.41			Pass
High	19.65	92.26			Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.82	24.10	30	1000	Pass
Middle	14.04	25.35			Pass
High	13.81	24.04			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.20	83.18	30	1000	Pass
Middle	19.72	93.76			Pass
High	19.51	89.33			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.11	81.47	30	1000	Pass
Middle	19.56	90.36			Pass
High	19.40	87.10			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.56	90.36	30	1000	Pass
Middle	19.73	93.97			Pass
High	19.75	94.41			Pass

MIMO-Main Antenna
802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.58	45.50	30	1000	Pass
Middle	16.46	44.26			Pass
High	16.43	43.95			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.40	43.65	30	1000	Pass
Middle	16.30	42.66			Pass
High	16.44	44.06			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.74	47.21	30	1000	Pass
Middle	16.58	45.50			Pass
High	16.74	47.21			Pass

MIMO-Aux. Antenna
802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.34	54.20	30	1000	Pass
Middle	17.44	55.46			Pass
High	17.77	59.84			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.86	48.53	30	1000	Pass
Middle	16.98	49.89			Pass
High	17.30	53.70			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.64	58.08	30	1000	Pass
Middle	17.16	52.00			Pass
High	17.19	52.36			Pass

MIMO

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.99	99.70	30	1000	Pass
Middle	19.99	99.72			Pass
High	20.16	103.80			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	19.65	92.18	30	1000	Pass
Middle	19.66	92.55			Pass
High	19.90	97.76			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.22	105.28	30	1000	Pass
Middle	19.89	97.50			Pass
High	19.98	99.57			Pass

Average Power Test DataMain Antenna

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.76	11.91	30	1000	Pass
Middle	10.60	11.48			Pass
High	10.56	11.38			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.72	11.80	30	1000	Pass
Middle	10.86	12.19			Pass
High	10.83	12.11			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.91	12.33	30	1000	Pass
Middle	10.72	11.80			Pass
High	10.78	11.97			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.98	12.53	30	1000	Pass
Middle	10.97	12.50			Pass
High	10.67	11.67			Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.49	11.19	30	1000	Pass
Middle	10.80	12.02			Pass
High	10.59	11.46			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.80	12.02	30	1000	Pass
Middle	10.83	12.11			Pass
High	10.60	11.48			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.85	12.16	30	1000	Pass
Middle	10.66	11.64			Pass
High	10.73	11.83			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.95	12.45	30	1000	Pass
Middle	10.88	12.25			Pass
High	11.09	12.85			Pass

MIMO-Main Antenna
802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	W	
Low	7.89	6.15	30	1000	Pass
Middle	7.86	6.11			Pass
High	7.71	5.90			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	7.72	5.92	30	1000	Pass
Middle	7.75	5.96			Pass
High	7.67	5.85			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.07	6.41	30	1000	Pass
Middle	7.91	6.18			Pass
High	7.69	5.87			Pass

MIMO-Aux. Antenna
802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	W	
Low	7.86	6.11	30	1000	Pass
Middle	7.82	6.05			Pass
High	7.77	5.98			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	7.70	5.89	30	1000	Pass
Middle	7.92	6.19			Pass
High	7.87	6.12			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	7.86	6.11	30	1000	Pass
Middle	7.92	6.19			Pass
High	7.98	6.28			Pass

MIMO

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	W	
Low	10.89	12.26	30	1000	Pass
Middle	10.85	12.16			Pass
High	10.75	11.89			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.72	11.80	30	1000	Pass
Middle	10.85	12.15			Pass
High	10.78	11.97			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.98	12.52	30	1000	Pass
Middle	10.93	12.37			Pass
High	10.85	12.16			Pass

A.2 Bandwidth

Test Data

Main Antenna

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	8.610840	13.314038	≥500
Middle	8.610840	13.024602	≥500
High	9.161621	13.603473	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.168945	16.903039	≥500
Middle	15.269043	17.308249	≥500
High	15.719482	17.424023	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.218994	17.713459	≥500
Middle	15.168945	18.002894	≥500
High	16.020020	18.234443	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	36.122559	36.700000	≥500
Middle	32.620361	35.800000	≥500
High	33.921143	36.200000	≥500

Aux. Antenna

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	9.161621	13.314038	≥ 500
Middle	8.660889	13.082489	≥ 500
High	8.660889	13.140376	≥ 500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.369141	17.539797	≥ 500
Middle	15.218994	17.192475	≥ 500
High	15.569336	17.192475	≥ 500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.220215	18.408104	≥ 500
Middle	15.269043	18.060781	≥ 500
High	15.218994	18.002894	≥ 500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	35.221924	36.200000	≥ 500
Middle	35.171875	36.100000	≥ 500
High	35.171875	36.100000	≥ 500

Test plots

Main Antenna


6 dB Bandwidth

802.11b LOW CHANNEL




Date: 13.MAR.2021 12:21:48

802.11b MIDDLE CHANNEL

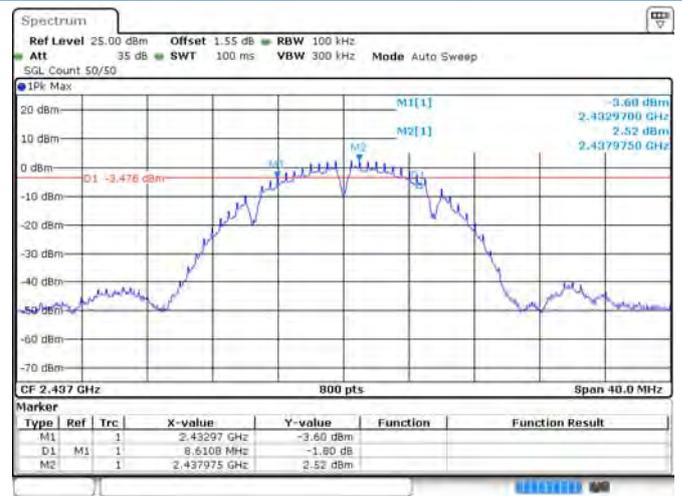


Date: 13.MAR.2021 12:30:46

802.11b HIGH CHANNEL

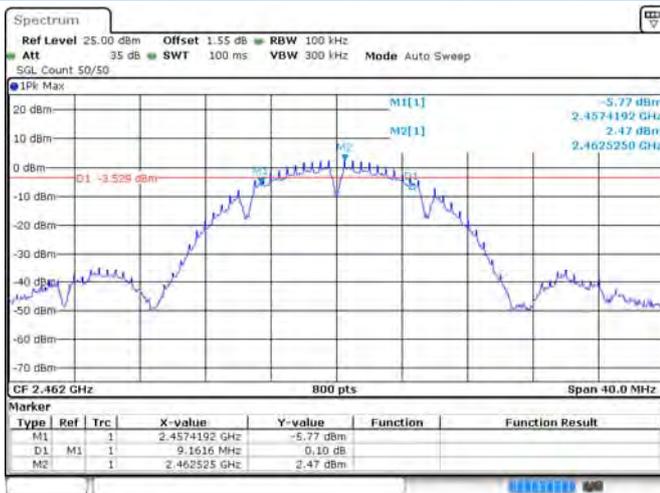


Date: 13.MAR.2021 12:36:27

802.11g LOW CHANNEL

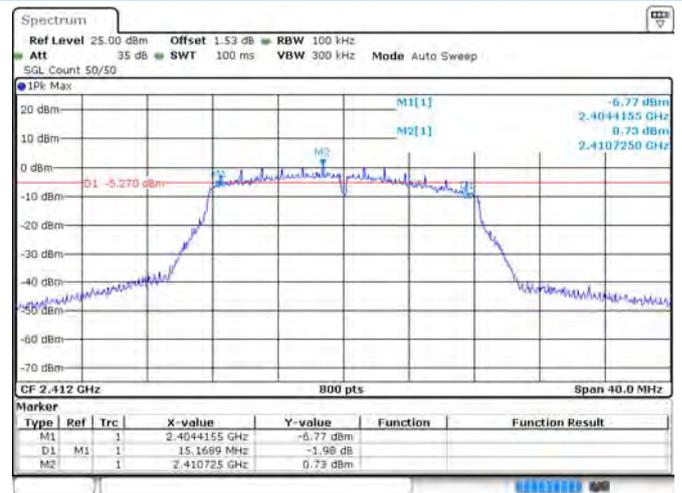


Date: 13.MAR.2021 12:39:52


802.11g MIDDLE CHANNEL

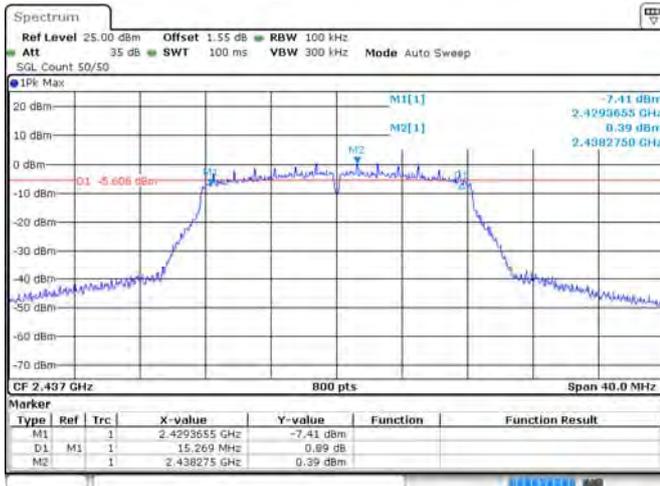


802.11g HIGH CHANNEL

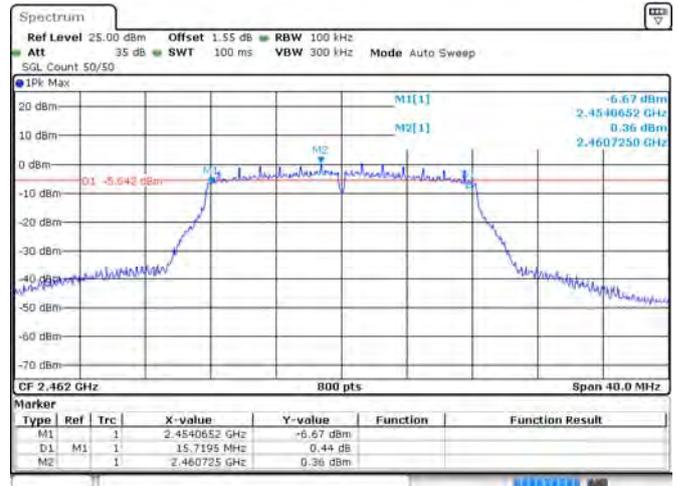


802.11n-20 MHz LOW CHANNEL

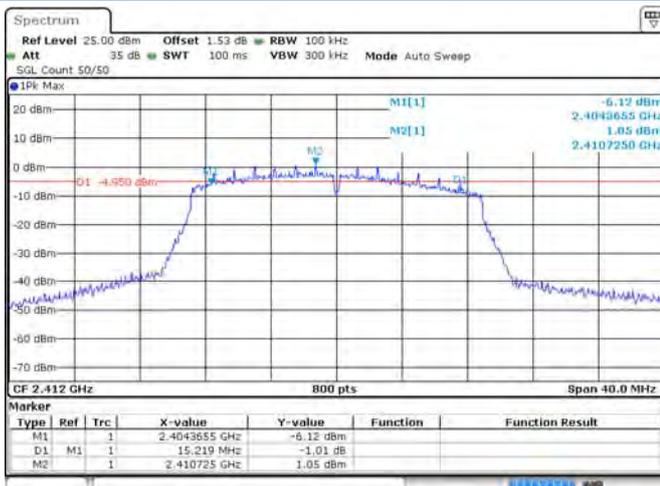


802.11 n-20 MHz MIDDLE CHANNEL

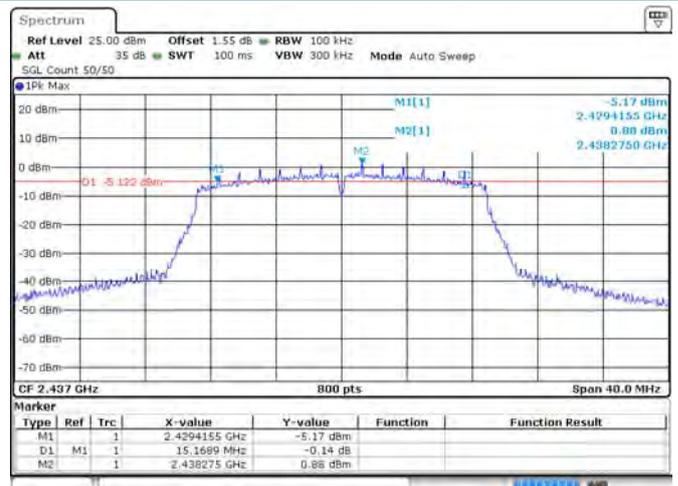


802.11n-20 MHz HIGH CHANNEL

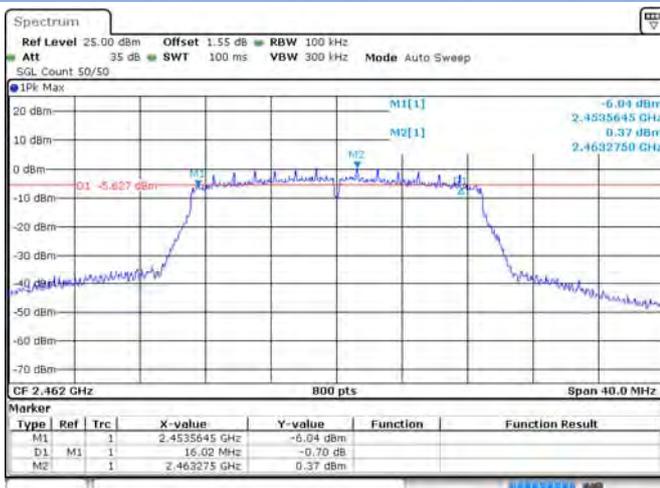

802.11n-40 MHz LOW CHANNEL

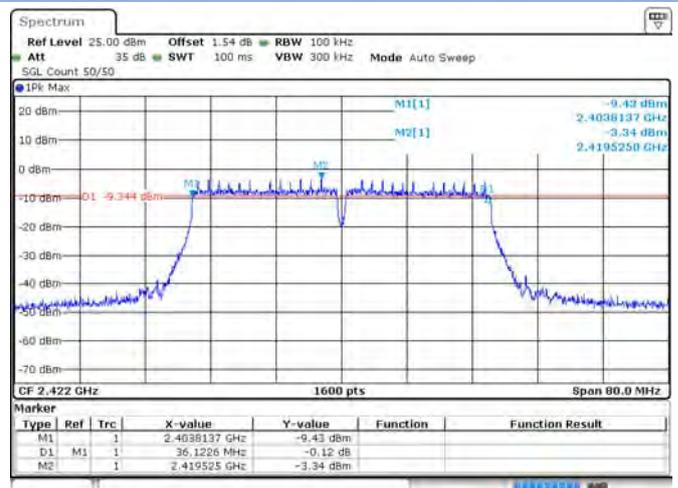


802.11n-40 MHz MIDDLE CHANNEL

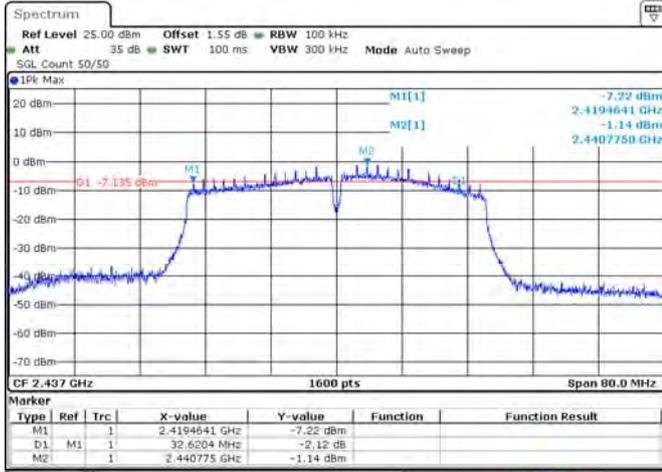

Date: 13 MAR 2021 13:04:33


802.11n-40 MHz HIGH CHANNEL

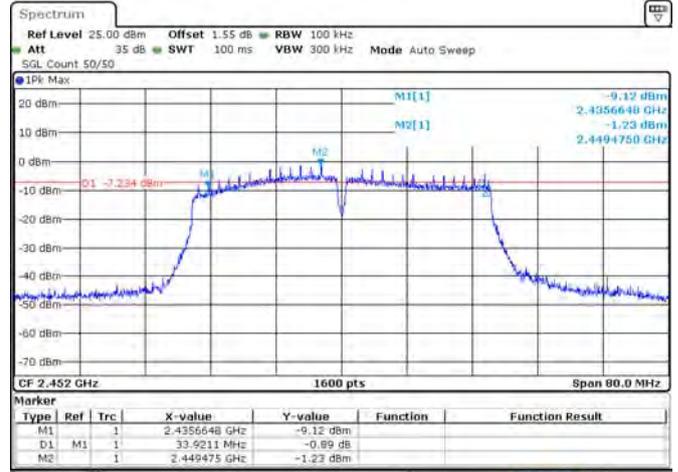

Date: 13 MAR 2021 13:07:49


99% Bandwidth

802.11b LOW CHANNEL

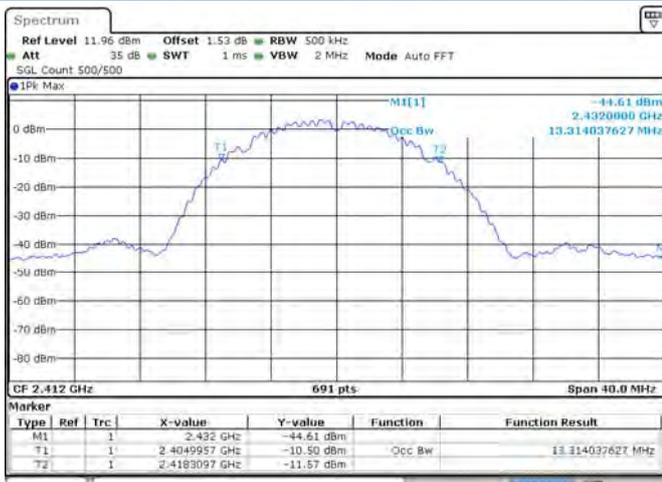


Date: 13 MAR 2021 12:22:00

802.11b MIDDLE CHANNEL

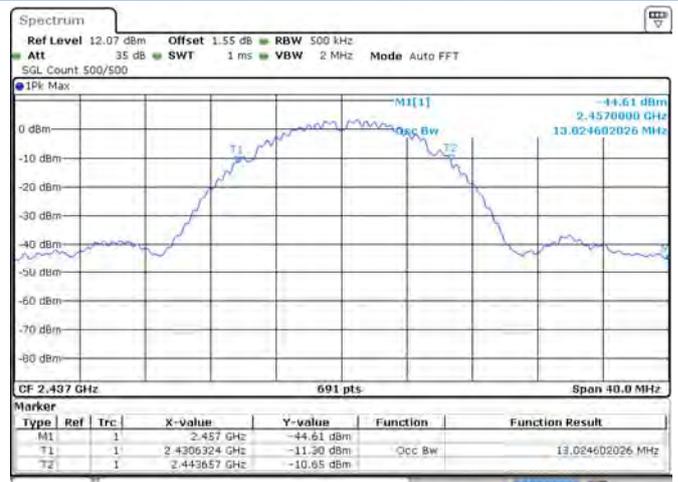


Date: 13 MAR 2021 12:30:56

802.11b HIGH CHANNEL

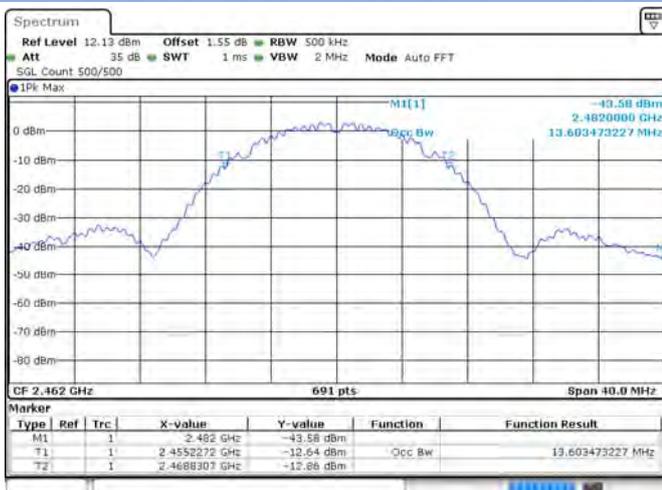

Date: 13 MAR 2021 12:36:38

802.11g LOW CHANNEL

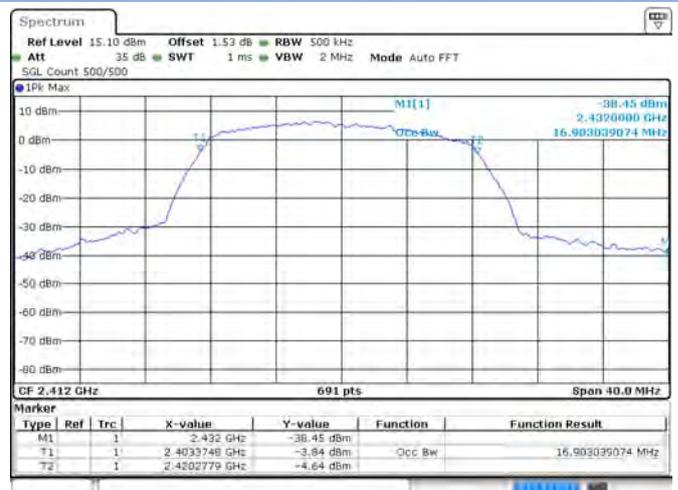

Date: 13 MAR 2021 12:40:03

802.11g MIDDLE CHANNEL



Date: 13 MAR 2021 12:44:15

802.11g HIGH CHANNEL




Date: 13 MAR 2021 12:48:33

802.11n-20 MHz LOW CHANNEL




Date: 13 MAR 2021 12:52:17

802.11 n-20 MHz MIDDLE CHANNEL

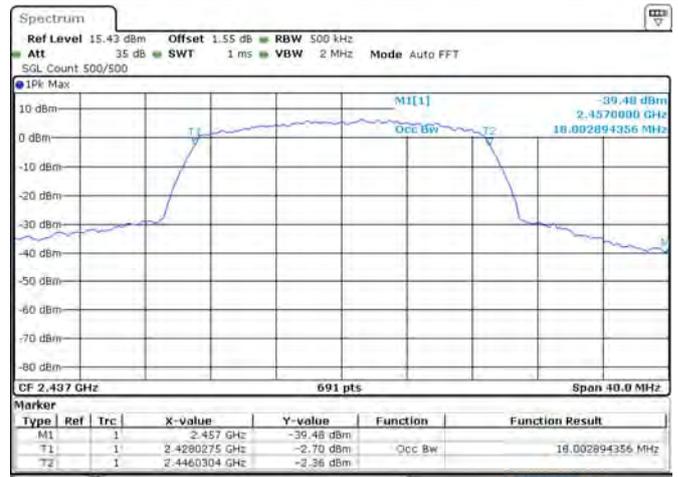


Date: 13 MAR 2021 12:54:41

802.11n-20 MHz HIGH CHANNEL

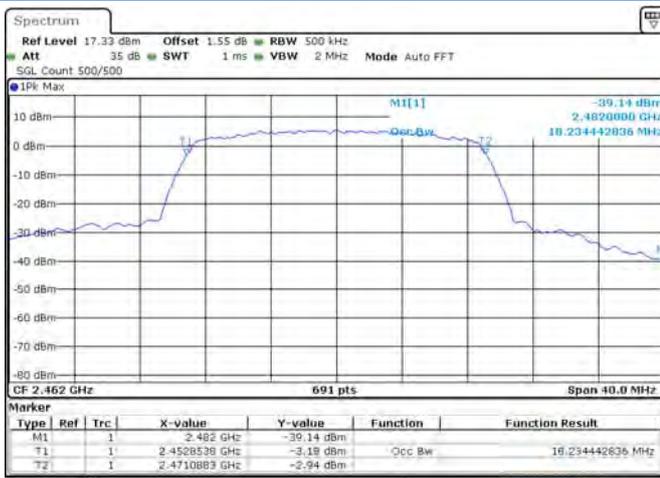

Date: 13 MAR 2021 12:57:33


802.11n-40 MHz LOW CHANNEL

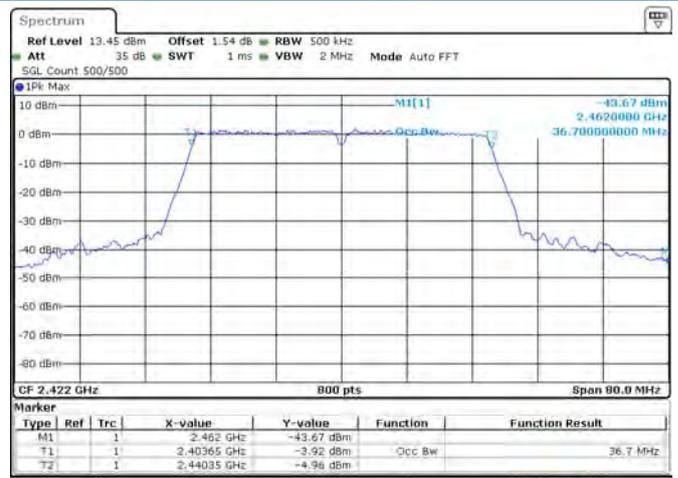

Date: 13 MAR 2021 13:01:49

802.11n-40 MHz MIDDLE CHANNEL

802.11n-40 MHz HIGH CHANNEL

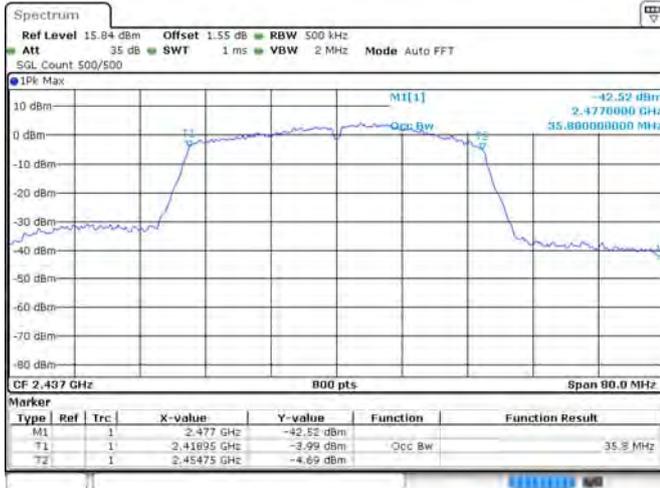


Date: 13 MAR 2021 13:04:46



Date: 13 MAR 2021 13:08:01


Aux. Antenna
6 dB Bandwidth

802.11b LOW CHANNEL

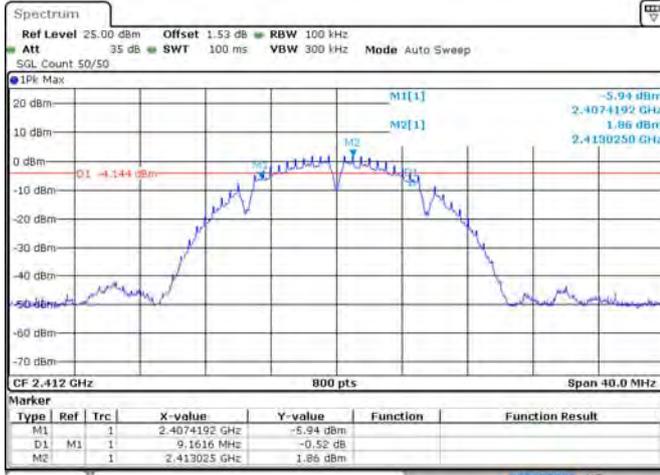


Date: 13 MAR 2021 13:50:13

802.11b MIDDLE CHANNEL

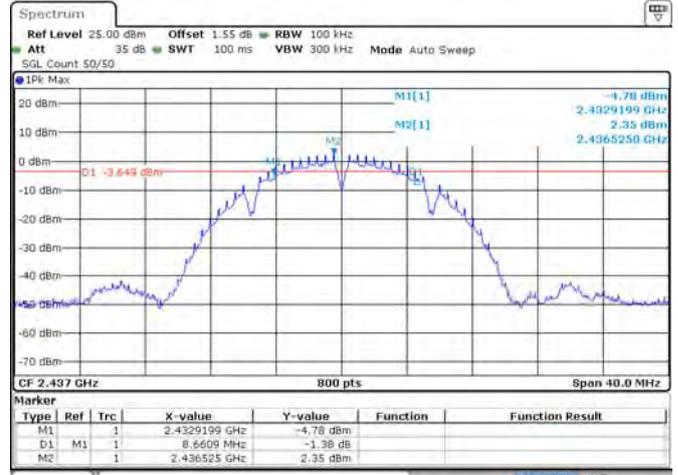


Date: 13 MAR 2021 13:57:09

802.11b HIGH CHANNEL

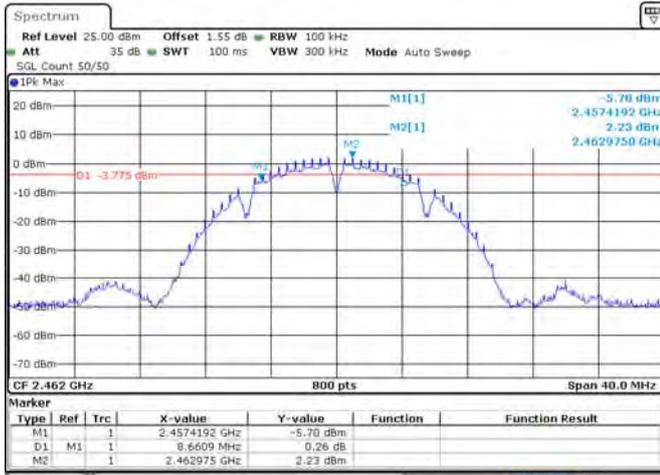


Date: 13 MAR 2021 13:59:45

802.11g LOW CHANNEL

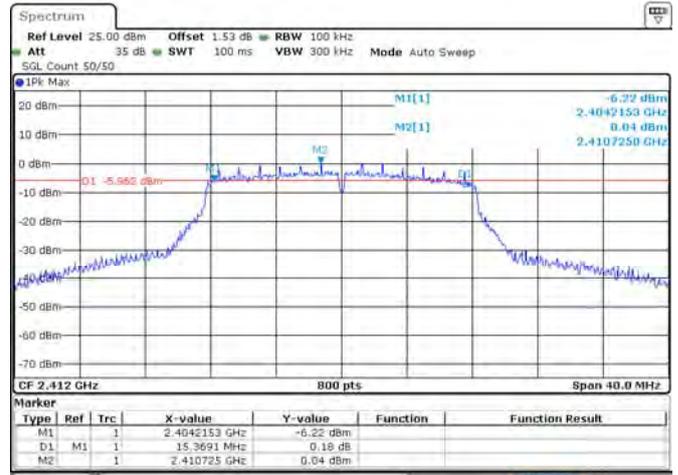


Date: 13 MAR 2021 14:02:43

802.11g MIDDLE CHANNEL

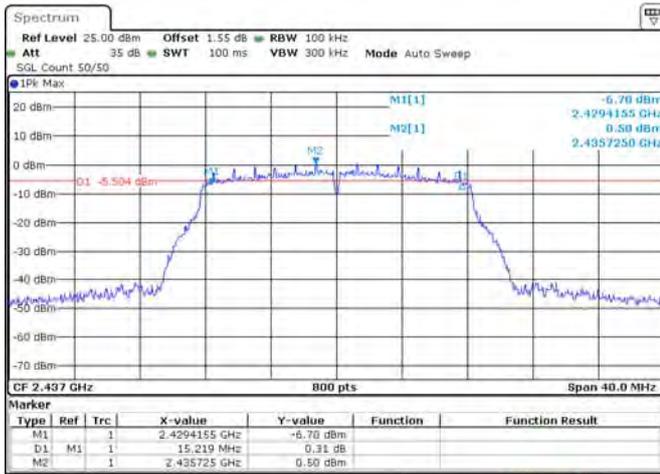


Date: 13 MAR 2021 14:08:03

802.11g HIGH CHANNEL

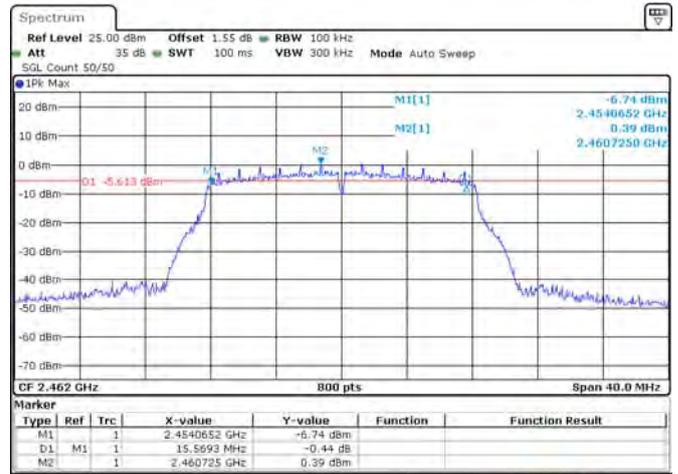


Date: 13 MAR 2021 14:11:36

802.11n-20 MHz LOW CHANNEL

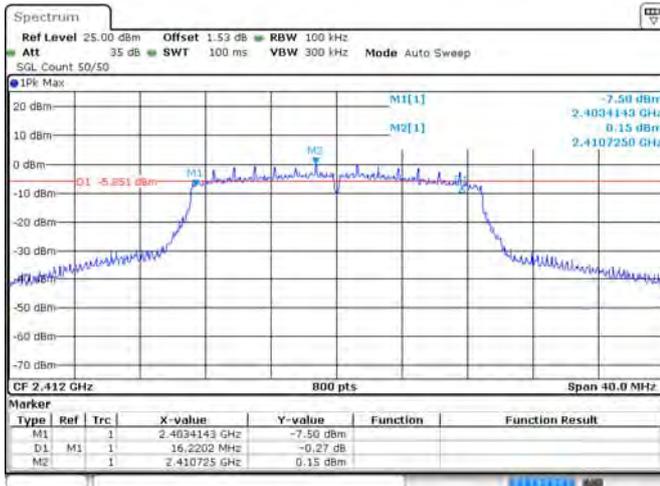


Date: 13 MAR 2021 14:14:13

802.11 n-20 MHz MIDDLE CHANNEL

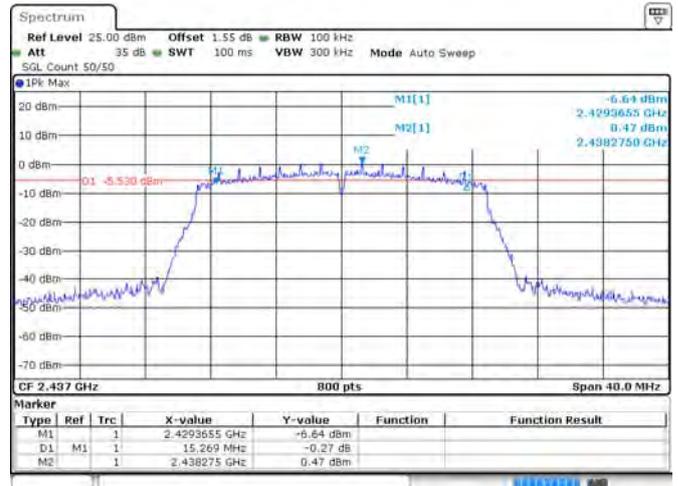


Date: 13 MAR 2021 14:16:34

802.11n-20 MHz HIGH CHANNEL

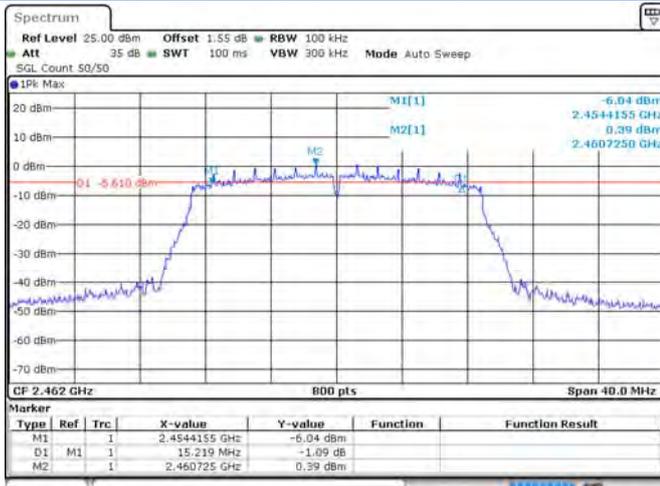


Date: 13 MAR 2021 14:20:12

802.11n-40 MHz LOW CHANNEL

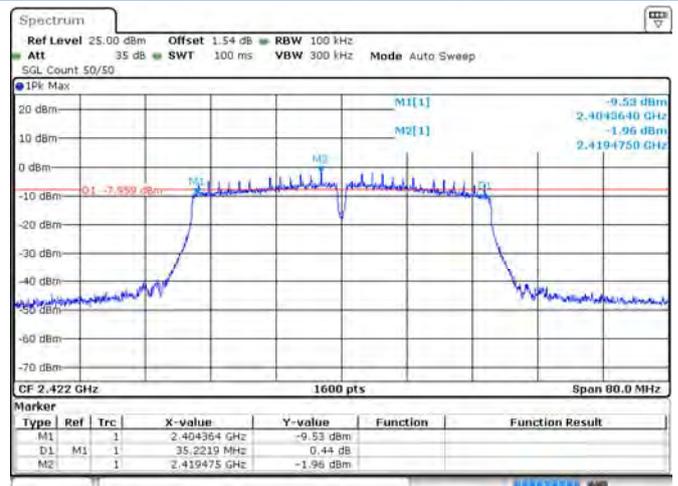


Date: 13 MAR 2021 14:23:16

802.11n-40 MHz MIDDLE CHANNEL

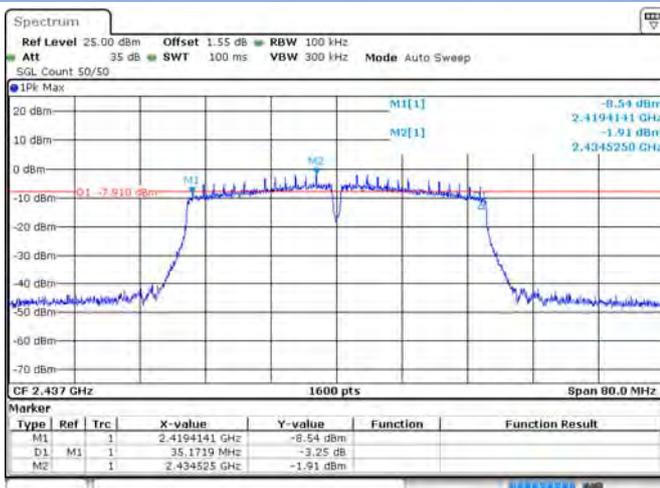

Date: 13 MAR 2021 14:30:01

802.11n-40 MHz HIGH CHANNEL

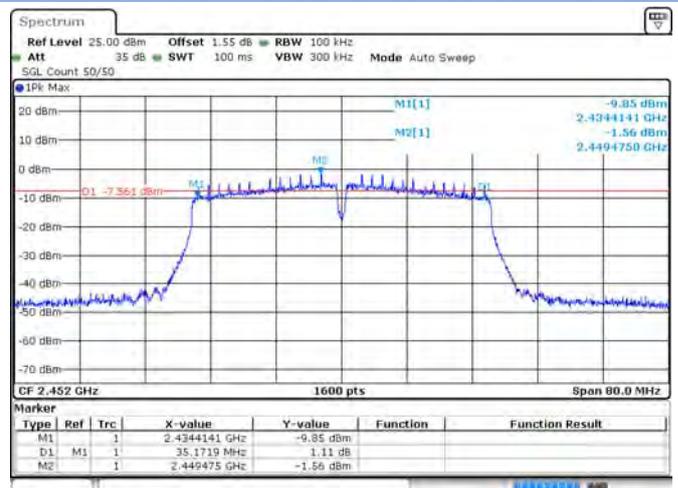

Date: 13 MAR 2021 14:33:19


99% Bandwidth

802.11b LOW CHANNEL




Date: 13 MAR 2021 13:50:25

802.11b MIDDLE CHANNEL

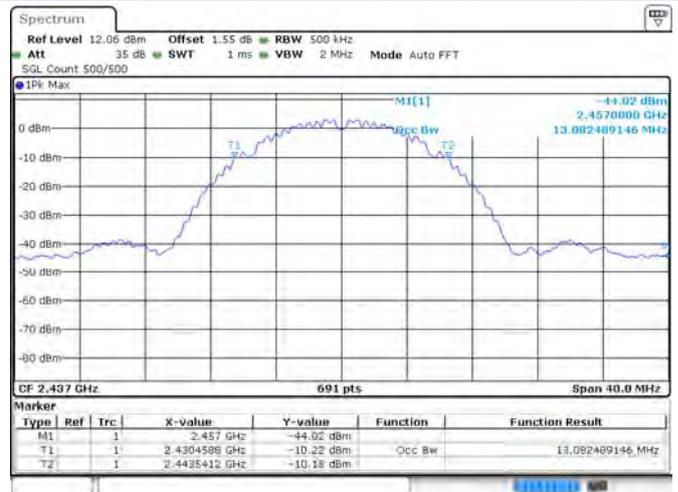

Date: 13 MAR 2021 13:57:20

802.11b HIGH CHANNEL

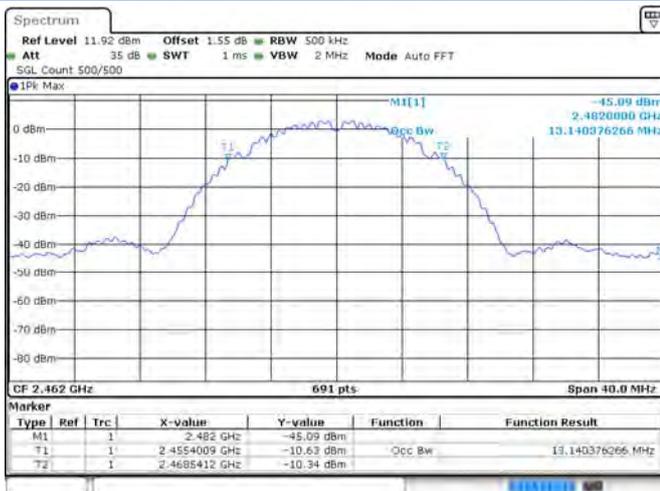

Date: 13 MAR 2021 13:59:55

802.11g LOW CHANNEL



Date: 13 MAR 2021 14:02:53

802.11g MIDDLE CHANNEL



Date: 13 MAR 2021 14:06:13

802.11g HIGH CHANNEL




Date: 13 MAR 2021 14:11:47

802.11n-20 MHz LOW CHANNEL



Date: 13 MAR 2021 14:14:24

802.11 n-20 MHz MIDDLE CHANNEL

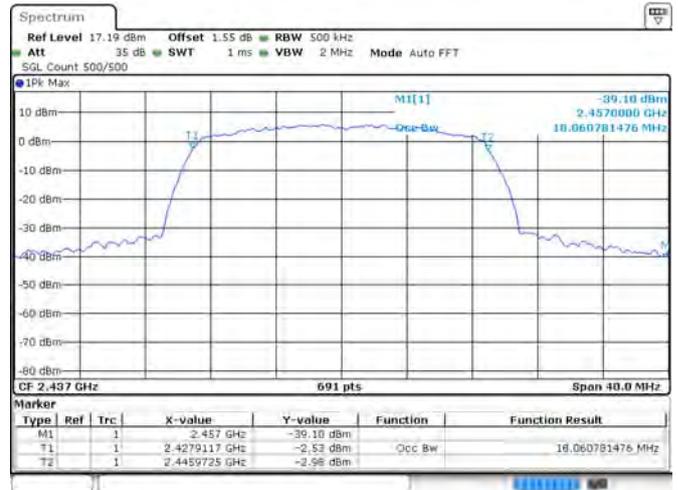

Date: 13 MAR 2021 14:16:44

802.11n-20 MHz HIGH CHANNEL




Date: 13 MAR 2021 14:20:23

802.11n-40 MHz LOW CHANNEL




Date: 13 MAR 2021 14:23:28

802.11n-40 MHz MIDDLE CHANNEL

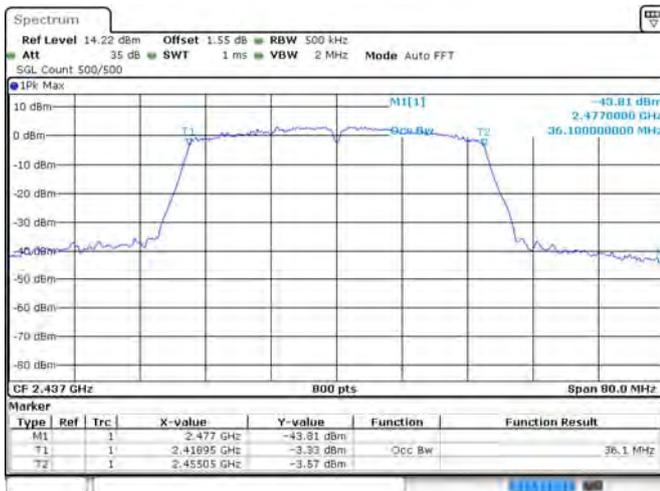

Date: 13 MAR 2021 14:31:58

802.11n-40 MHz HIGH CHANNEL

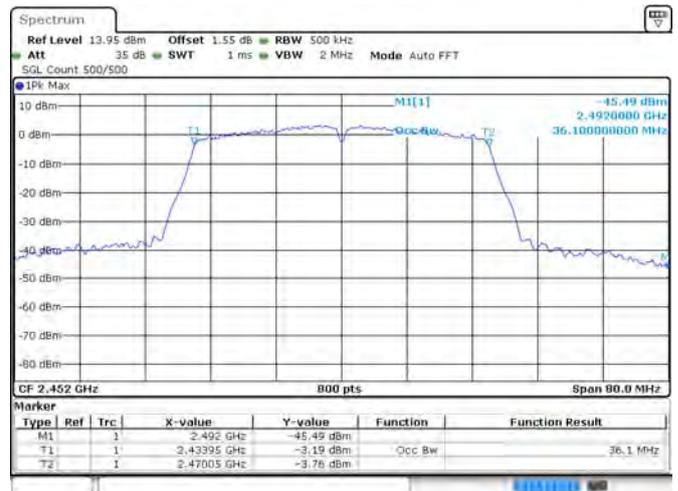

Date: 13 MAR 2021 14:33:32

A.3 Conducted Spurious Emissions

Test Data

Main Antenna

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-49.93	2.58	-17.42	Pass
Middle	-49.44	2.45	-17.55	Pass
High	-49.47	2.22	-17.78	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.46	0.73	-19.27	Pass
Middle	-51.07	0.38	-19.62	Pass
High	-50.09	0.49	-19.51	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-51.01	1.40	-18.60	Pass
Middle	-50.90	0.90	-19.10	Pass
High	-49.42	0.49	-19.51	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-49.89	-3.22	-23.22	Pass
Middle	-50.19	-0.90	-20.90	Pass
High	-50.92	-1.26	-21.26	Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-48.76	2.35	-17.65	Pass
Middle	-47.78	2.70	-17.30	Pass
High	-51.35	2.35	-17.65	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.71	0.38	-19.62	Pass
Middle	-49.83	0.85	-19.15	Pass
High	-49.65	0.50	-19.50	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-49.90	0.26	-19.74	Pass
Middle	-50.28	0.64	-19.36	Pass
High	-49.68	0.53	-19.47	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.57	-1.89	-21.89	Pass
Middle	-50.88	-1.54	-21.54	Pass
High	-50.78	-1.45	-21.45	Pass

MIMO-Main Antenna
802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-51.41	-2.67	-22.67	Pass
Middle	-50.62	-2.50	-22.50	Pass
High	-49.47	-2.76	-22.76	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.73	-2.69	-22.69	Pass
Middle	-49.79	-2.51	-22.51	Pass
High	-49.77	-2.72	-22.72	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.35	-5.79	-25.79	Pass
Middle	-49.60	-3.90	-23.90	Pass
High	-50.43	-4.17	-24.17	Pass

MIMO-Aux. Antenna

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.31	-2.87	-22.87	Pass
Middle	-50.38	-2.56	-22.56	Pass
High	-50.05	-2.33	-22.33	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.58	-2.77	-22.77	Pass
Middle	-50.86	-2.54	-22.54	Pass
High	-50.61	-2.47	-22.47	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-51.05	-4.37	-24.37	-51.05
Middle	-50.59	-4.60	-24.60	-50.59
High	-49.93	-4.64	-24.64	-49.93


Test Plots

Main Antenna


802.11b LOW CHANNEL CARRIER LEVEL




802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

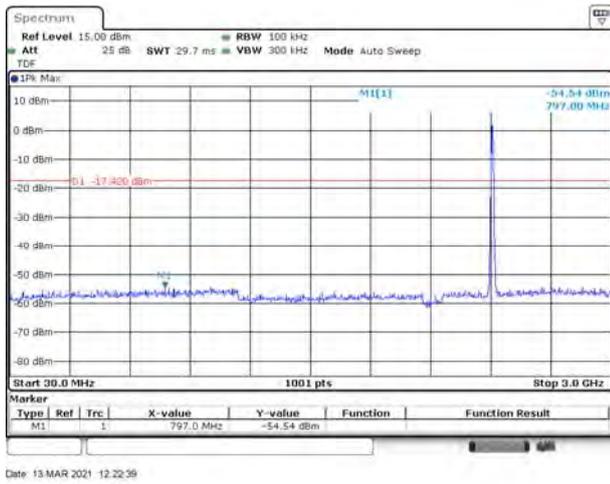


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

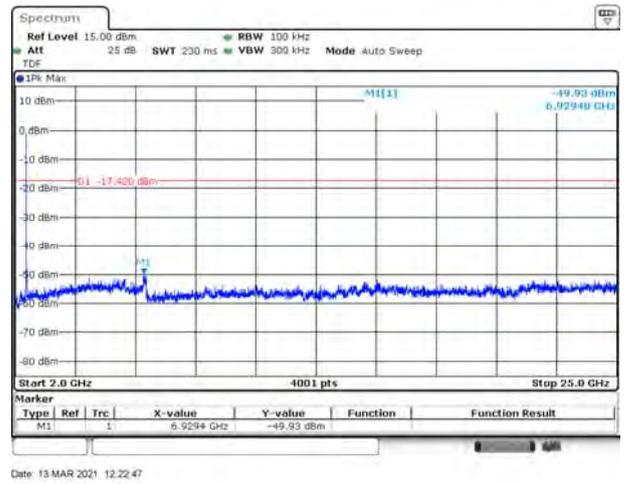


802.11b MIDDLE CHANNEL CARRIER LEVEL

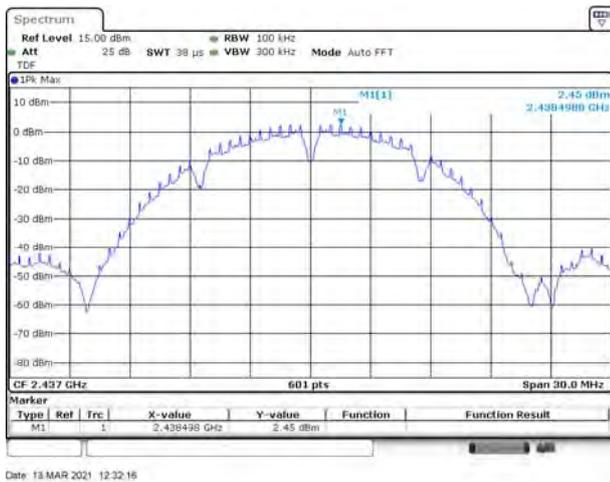

802.11b MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

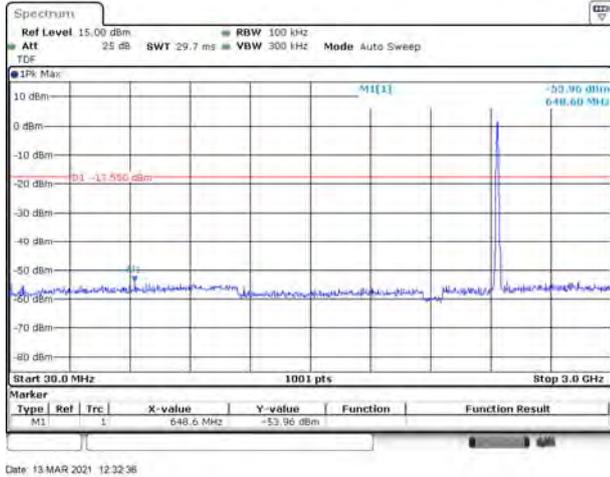


802.11b MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

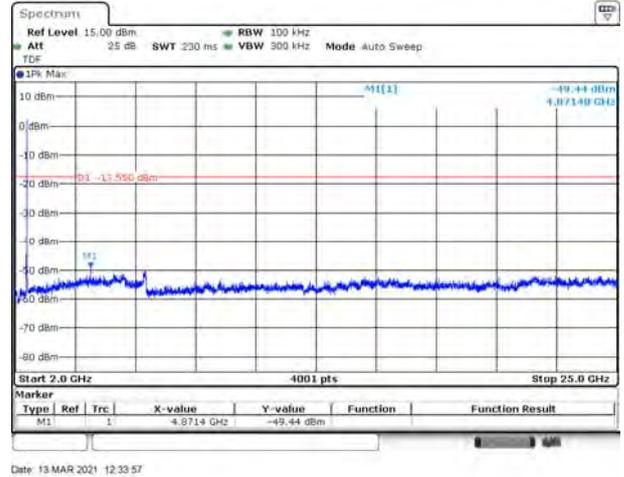


802.11b HIGH CHANNEL CARRIER LEVEL



802.11b HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

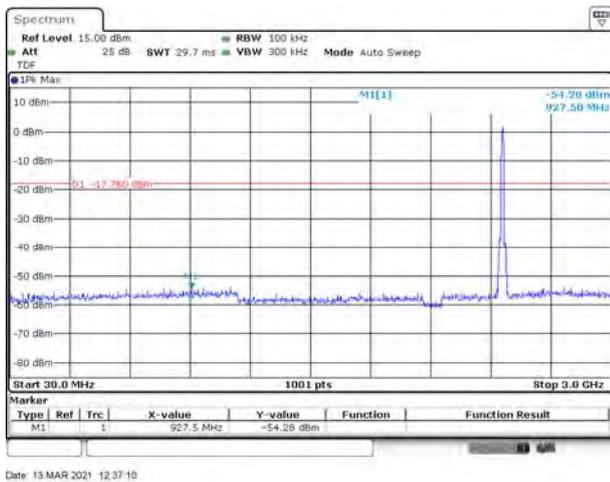


802.11b HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

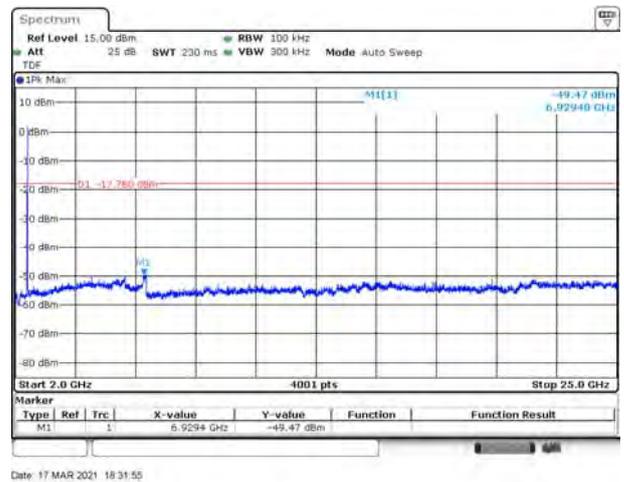


802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

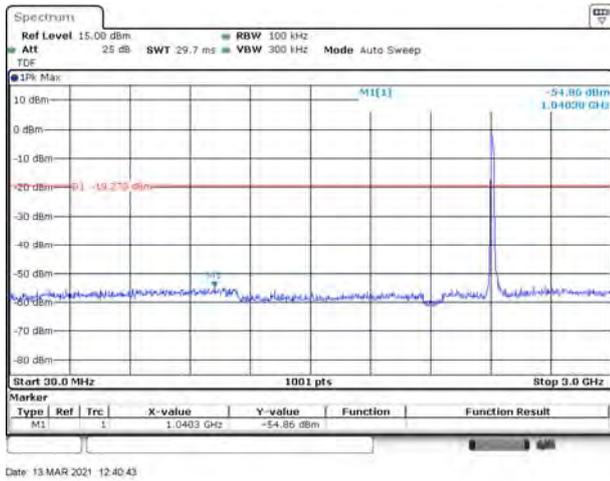


802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

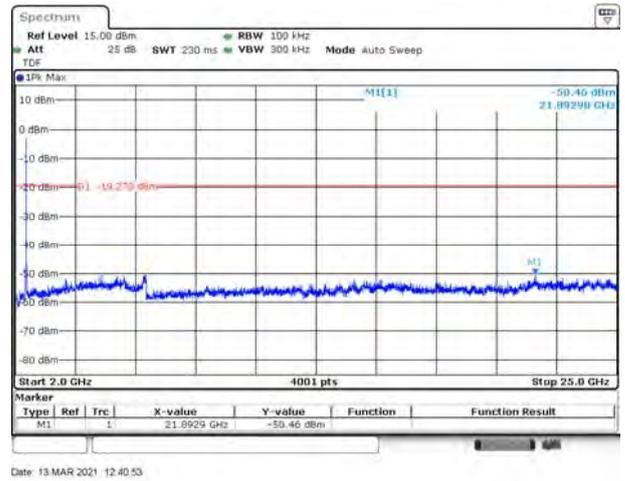


802.11g MIDDLE CHANNEL CARRIER LEVEL

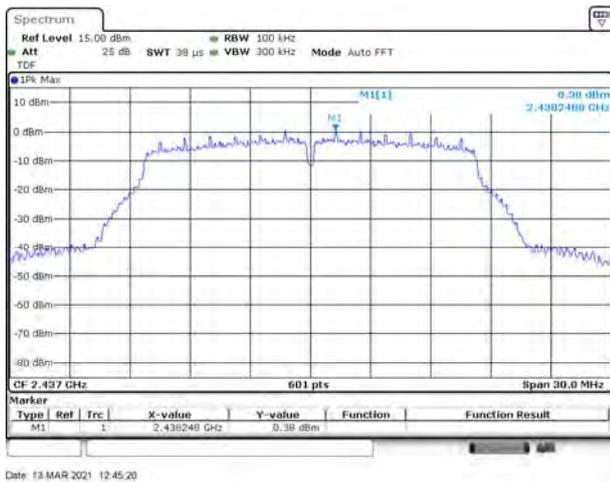

802.11g MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

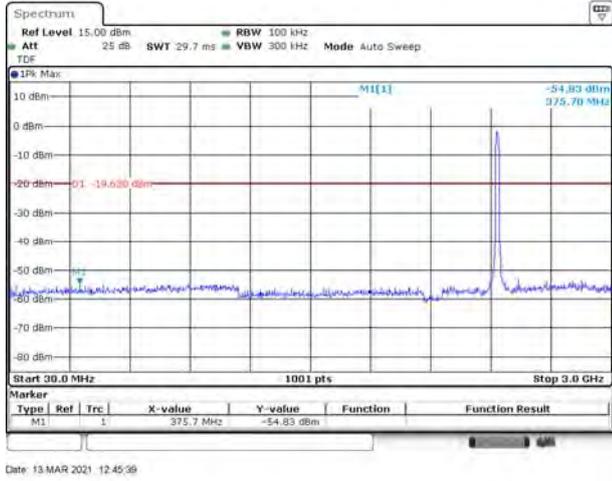


802.11g MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

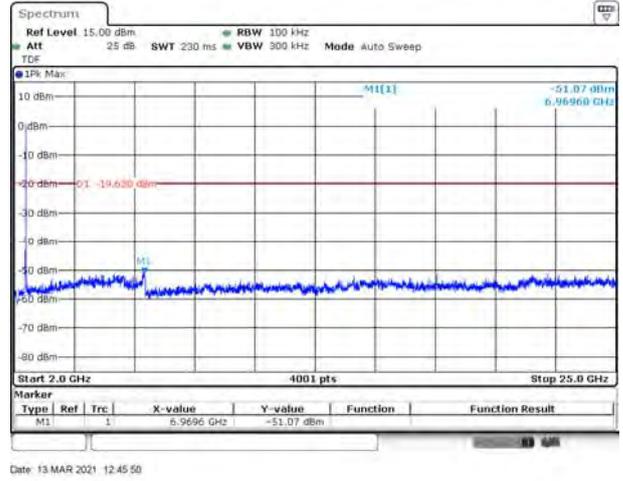


802.11g HIGH CHANNEL CARRIER LEVEL



802.11g HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

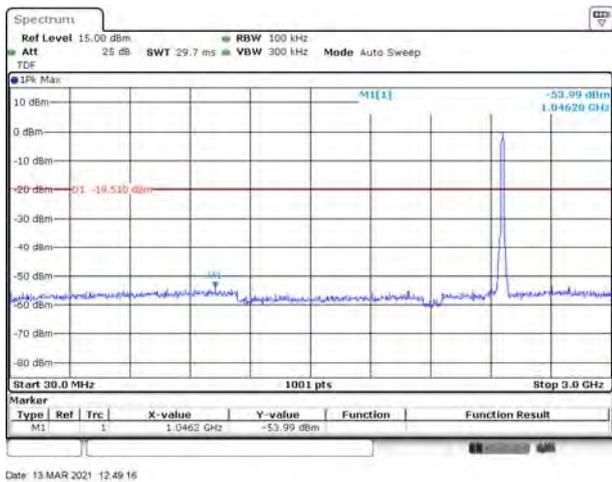


802.11g HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

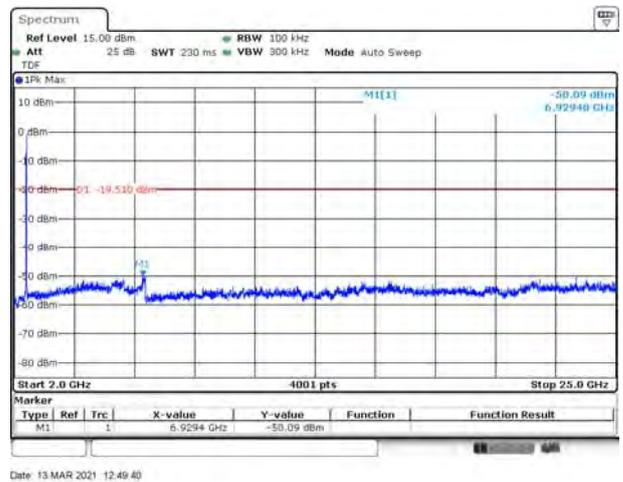


802.11n-20 LOW CHANNEL CARRIER LEVEL



802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

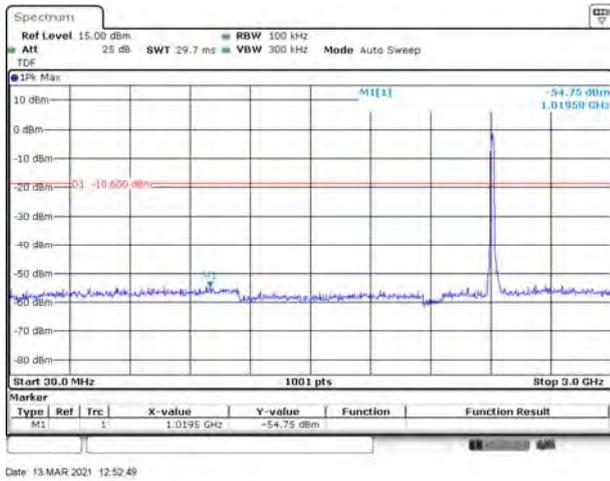


802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

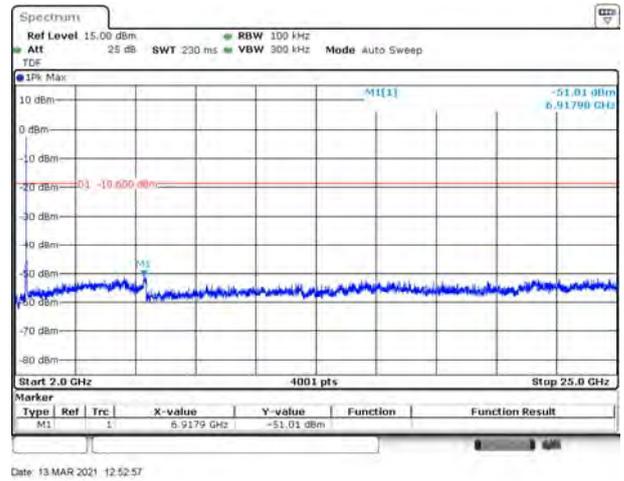

802.11n-20 MIDDLE CHANNEL CARRIER LEVEL




802.11n-20 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

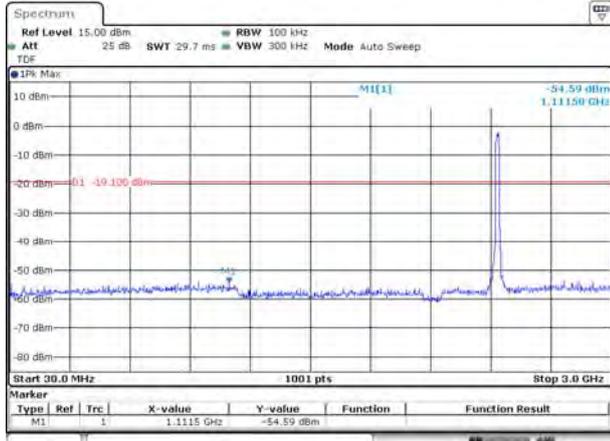


Date: 13.MAR 2021 12:55:09

802.11n-20 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

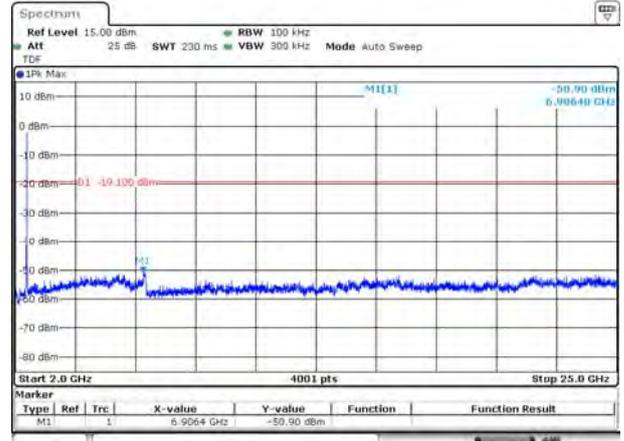


Date: 13.MAR 2021 12:55:18

802.11n-20 HIGH CHANNEL CARRIER LEVEL

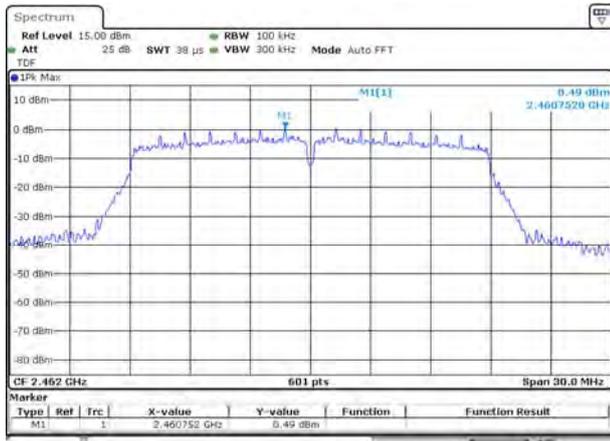


Date: 13.MAR 2021 12:56:26

802.11n-20 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

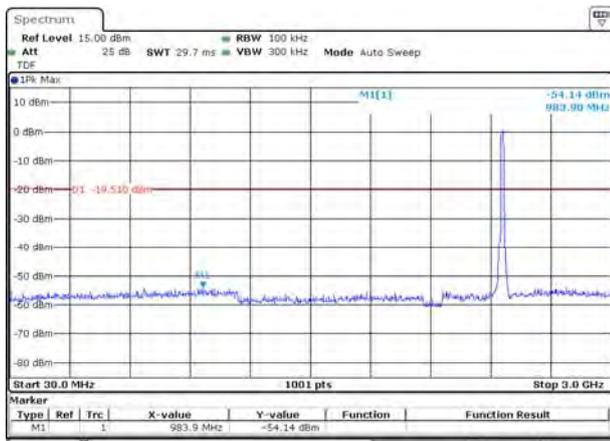


Date: 13.MAR 2021 12:56:45

802.11n-20 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

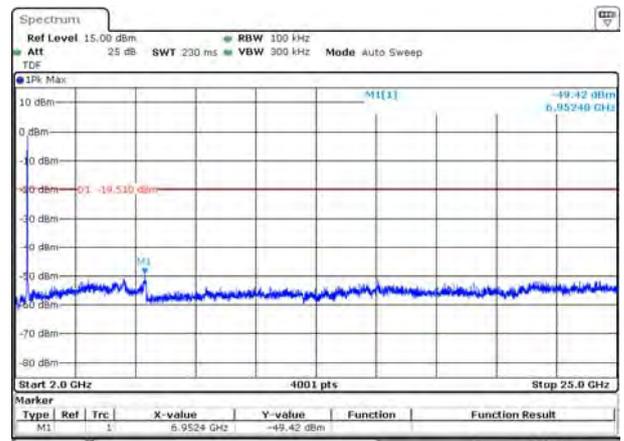


Date: 13.MAR 2021 12:56:56


802.11n-40 LOW CHANNEL CARRIER LEVEL

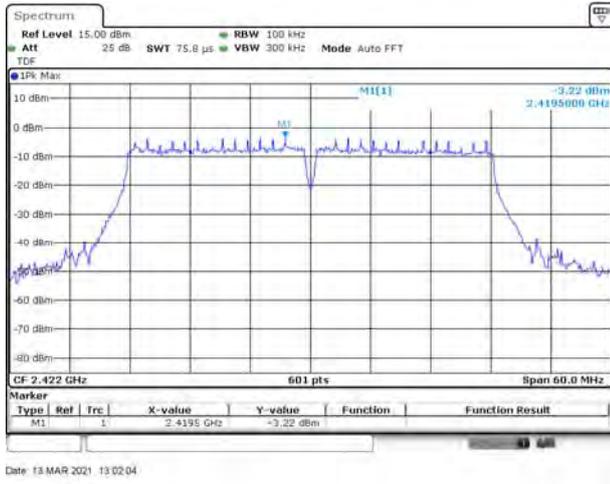


802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

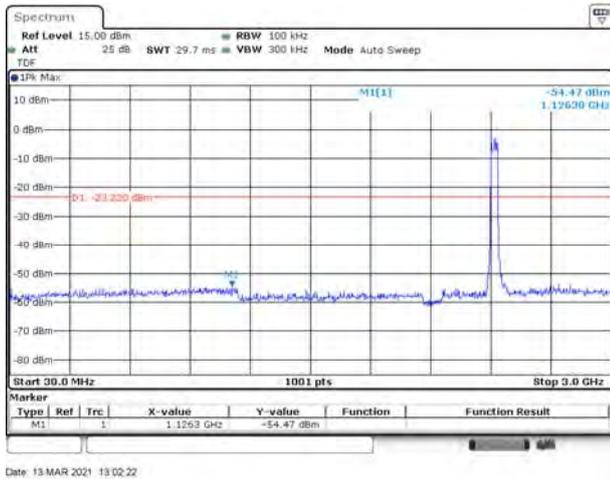


802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

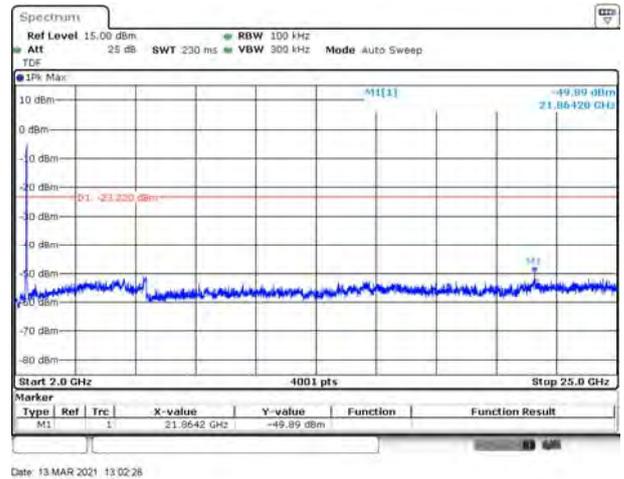


802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

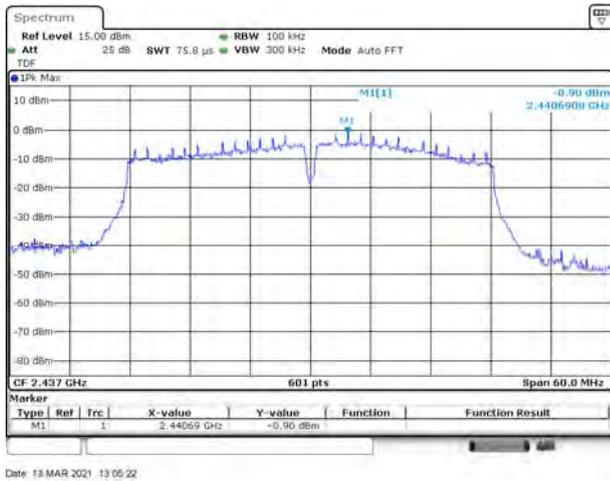


802.11n-40 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

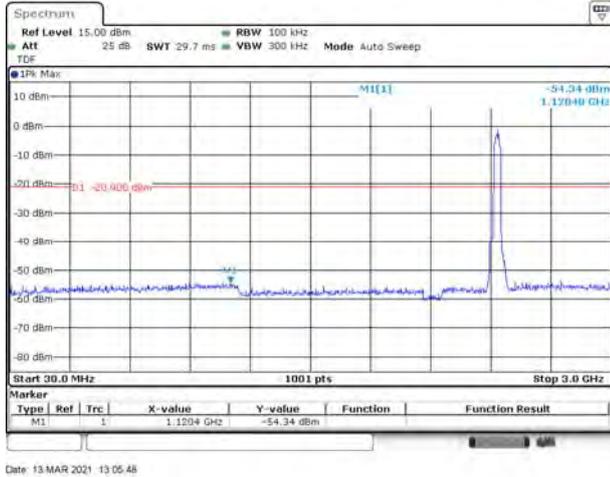


802.11n-40 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

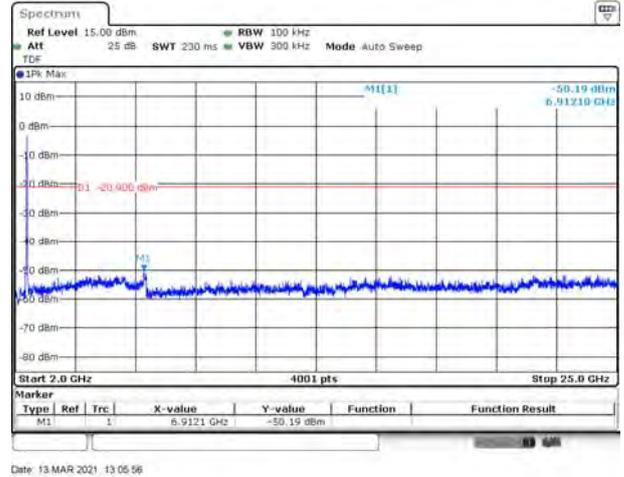


802.11n-40 HIGH CHANNEL CARRIER LEVEL

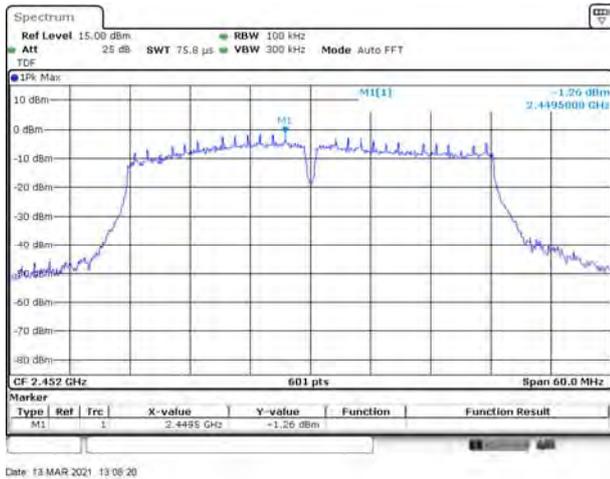

802.11n-40 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

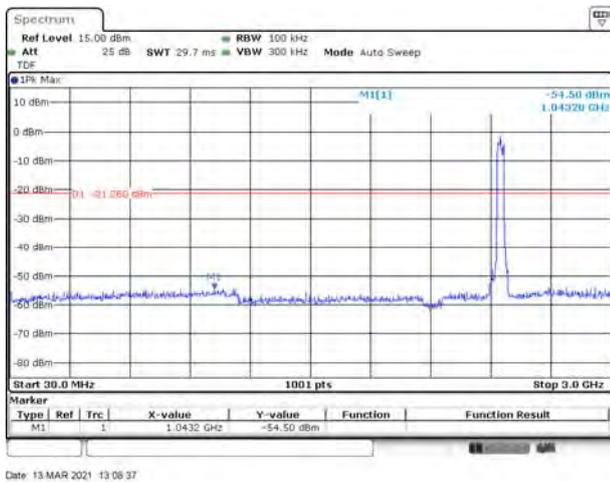

802.11n-40 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

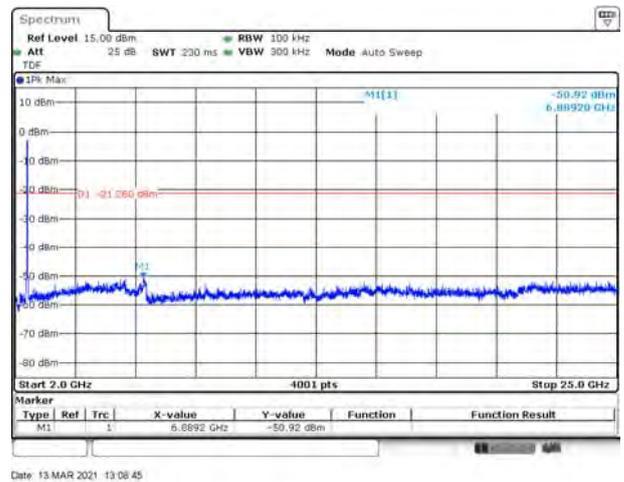


Aux. Antenna


802.11b LOW CHANNEL CARRIER LEVEL




802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

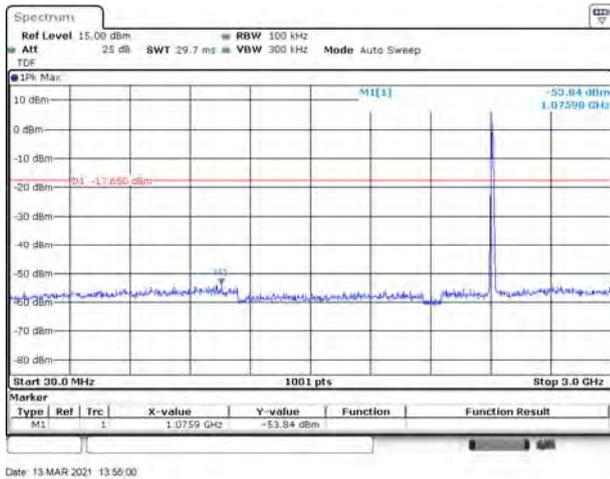


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

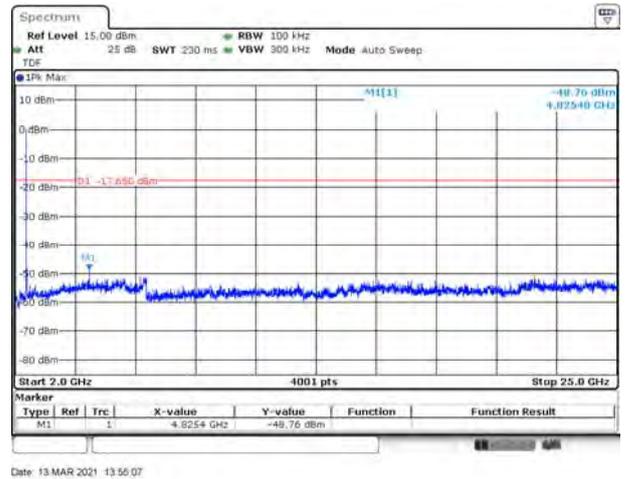


802.11b MIDDLE CHANNEL CARRIER LEVEL

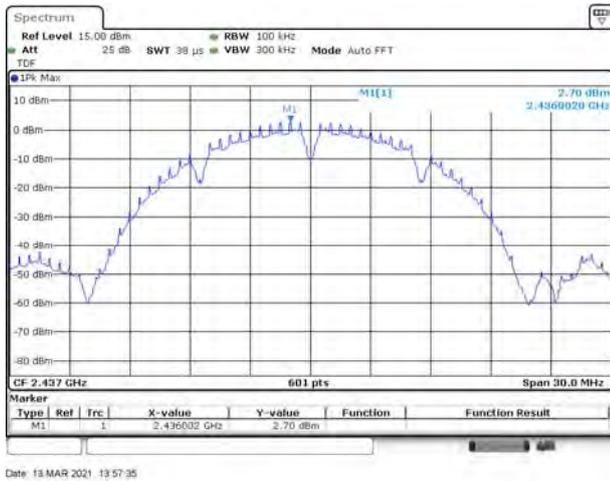


802.11b MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

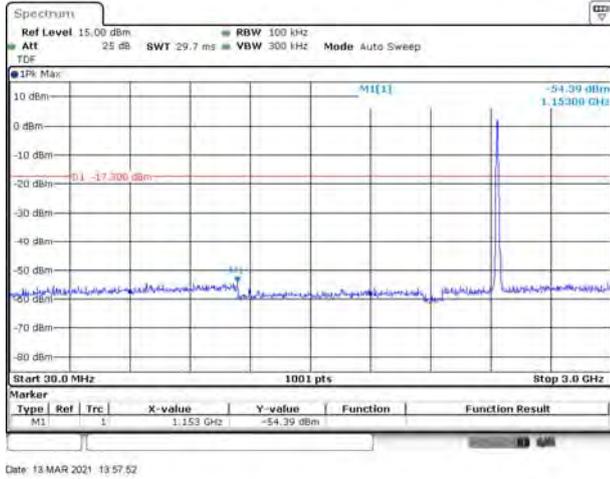


802.11b MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

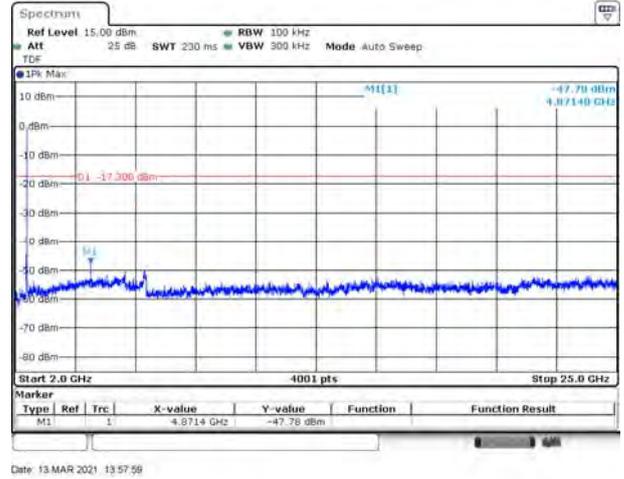


802.11b HIGH CHANNEL CARRIER LEVEL

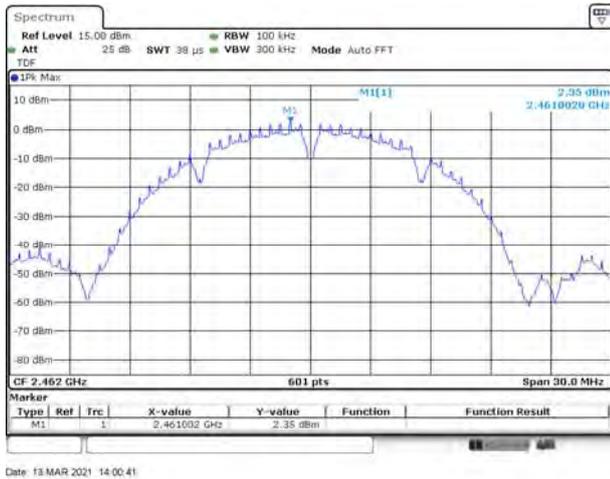


802.11b HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

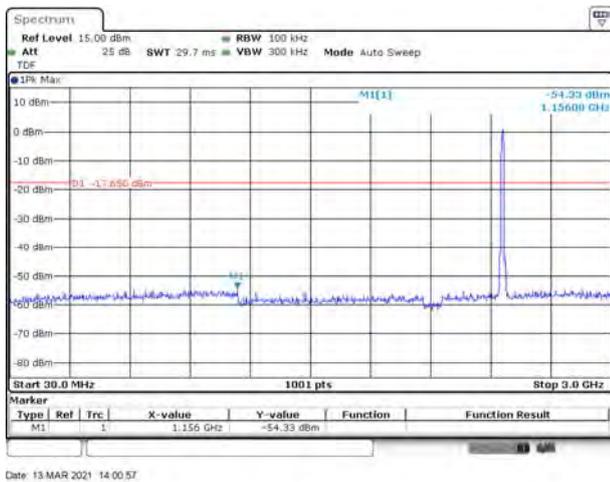

802.11b HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

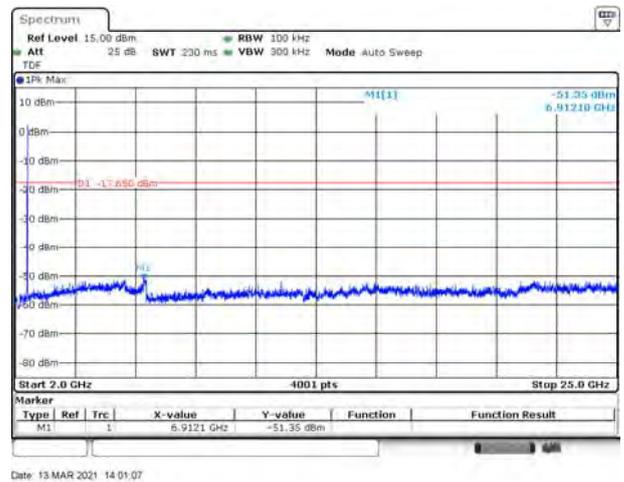


802.11g LOW CHANNEL CARRIER LEVEL

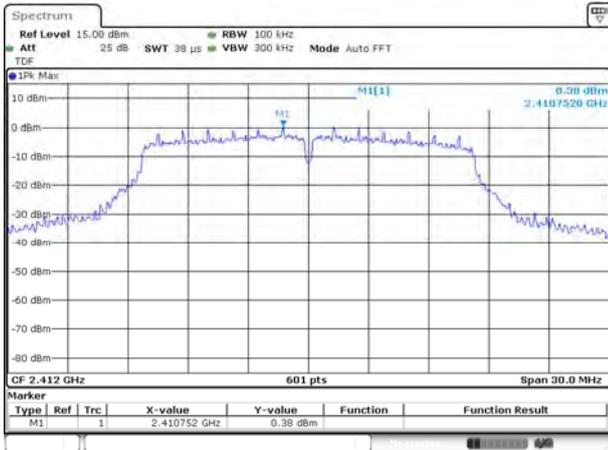


Date: 13.MAR.2021 14:03:43

802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

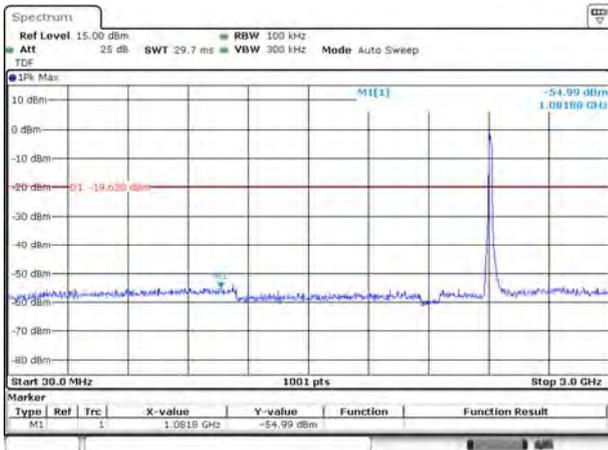


Date: 13.MAR.2021 14:04:00

802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

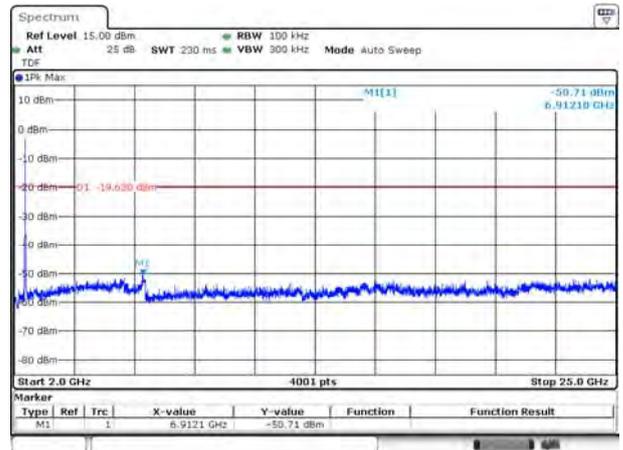


Date: 13.MAR.2021 14:04:06

802.11g MIDDLE CHANNEL CARRIER LEVEL

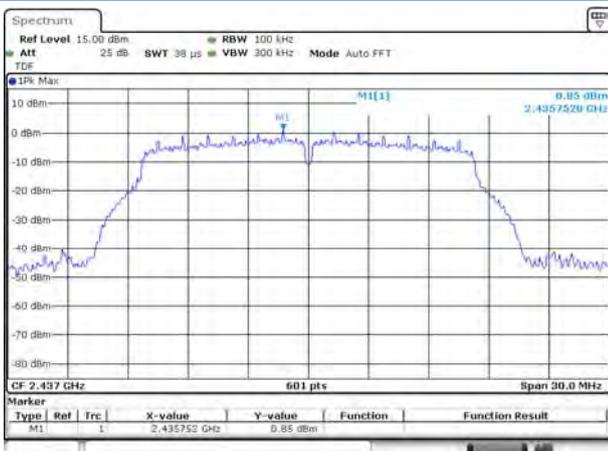


Date: 13.MAR.2021 14:09:30

802.11g MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

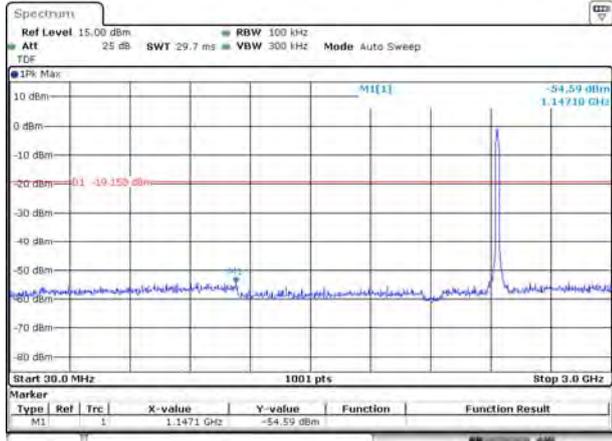


Date: 13.MAR 2021 14:09:50

802.11g MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

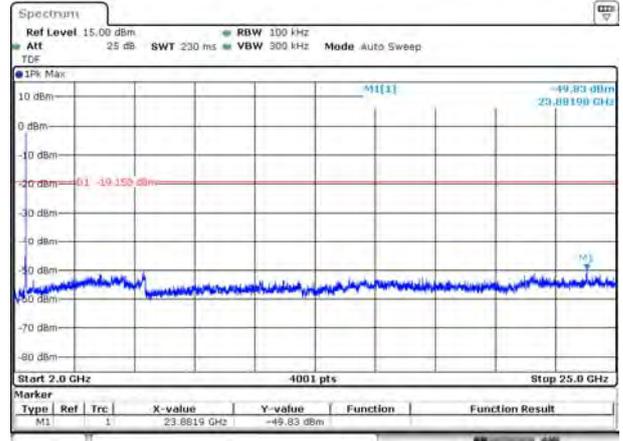


Date: 13.MAR 2021 14:09:58

802.11g HIGH CHANNEL CARRIER LEVEL

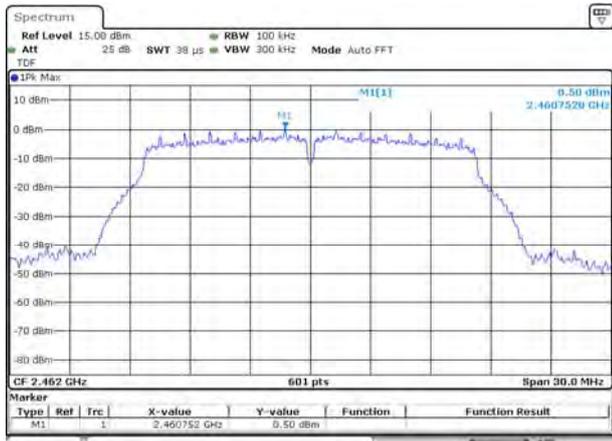


Date: 13.MAR 2021 14:12:03

802.11g HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

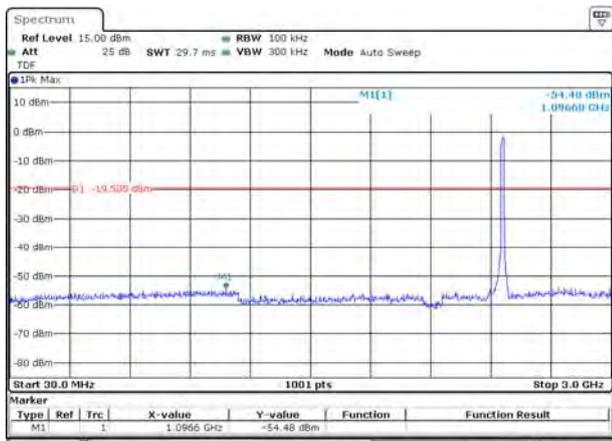


Date: 13.MAR 2021 14:12:20

802.11g HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

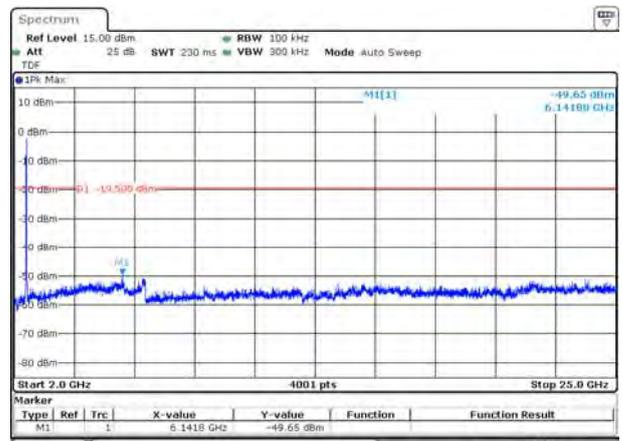


Date: 13.MAR 2021 14:12:28

802.11n-20 LOW CHANNEL CARRIER LEVEL

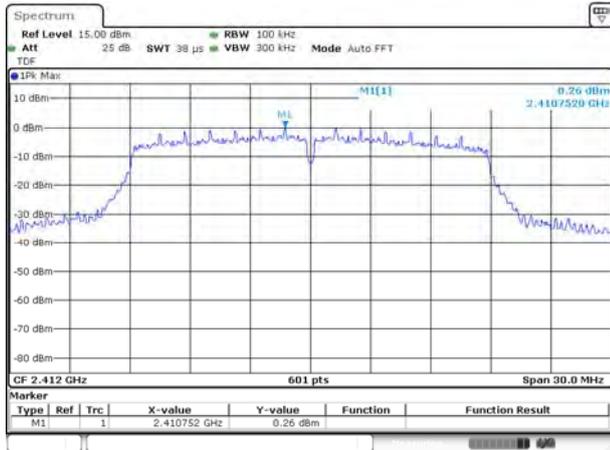


Date: 13.MAR.2021 14:14:39

802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

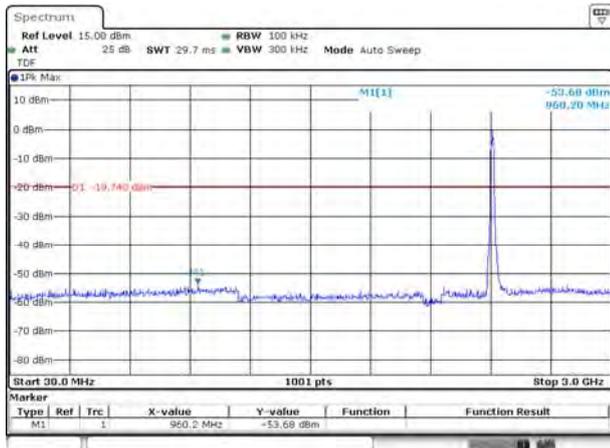


Date: 13.MAR.2021 14:14:56

802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

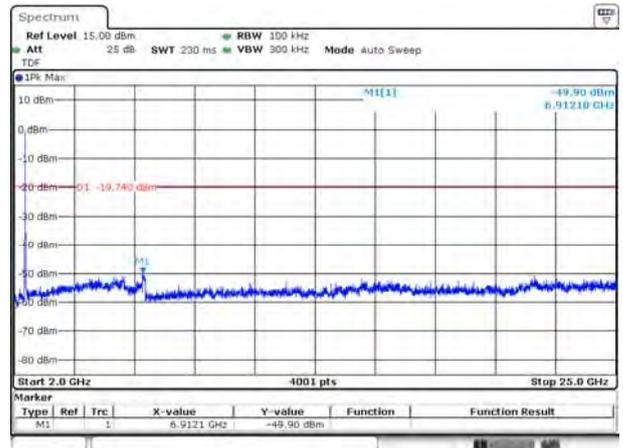


Date: 13.MAR.2021 14:15:06

802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

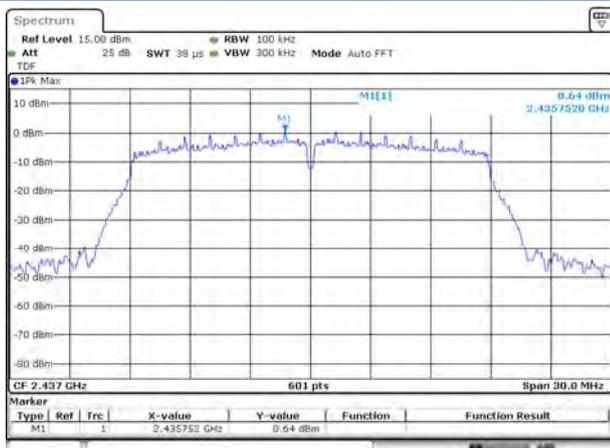


Date: 13.MAR.2021 14:16:56

802.11n-20 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

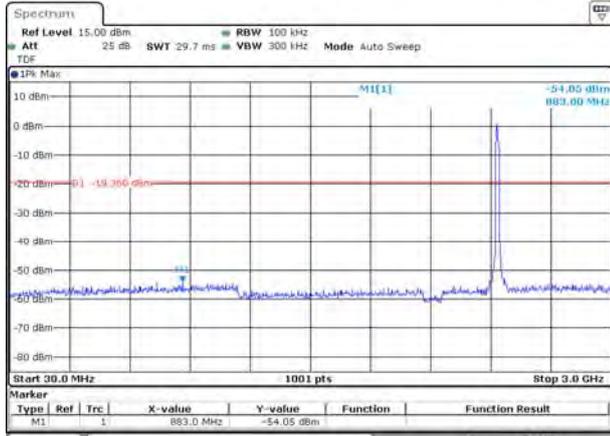


Date: 13.MAR 2021 14:17:18

802.11n-20 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

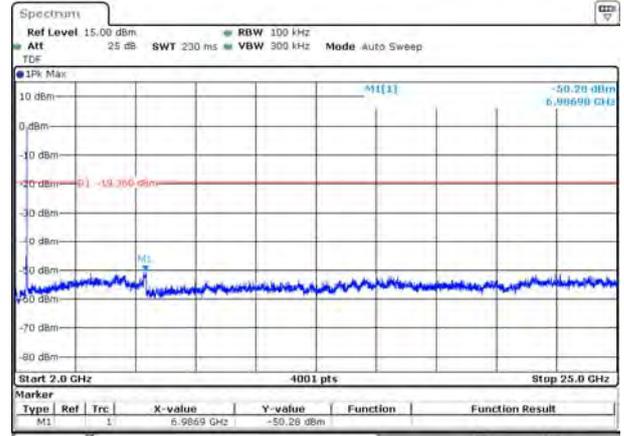


Date: 13.MAR 2021 14:17:27

802.11n-20 HIGH CHANNEL CARRIER LEVEL

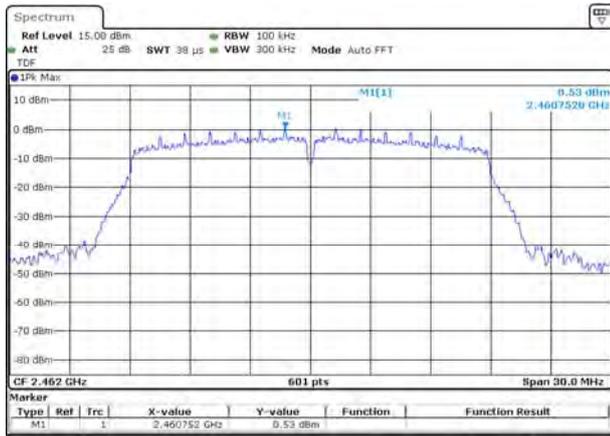


Date: 13.MAR 2021 14:20:38

802.11n-20 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

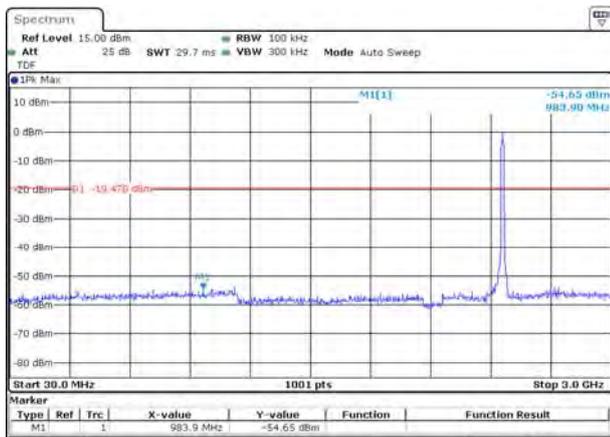


Date: 13.MAR 2021 14:20:55

802.11n-20 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

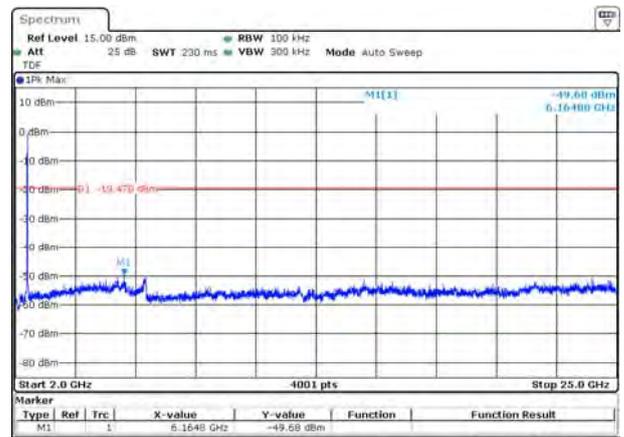


Date: 13.MAR 2021 14:21:08


802.11n-40 LOW CHANNEL CARRIER LEVEL

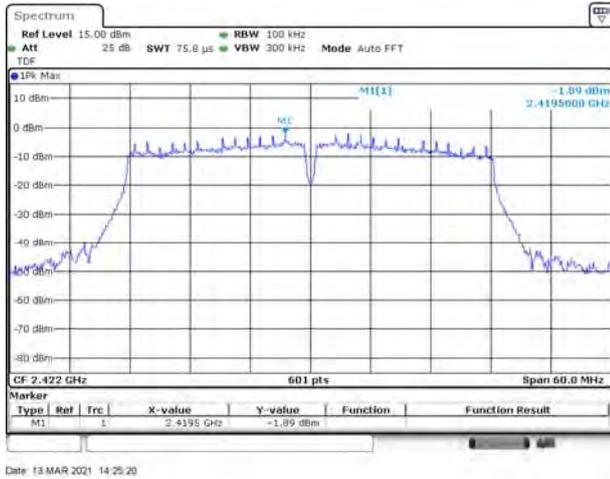


802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

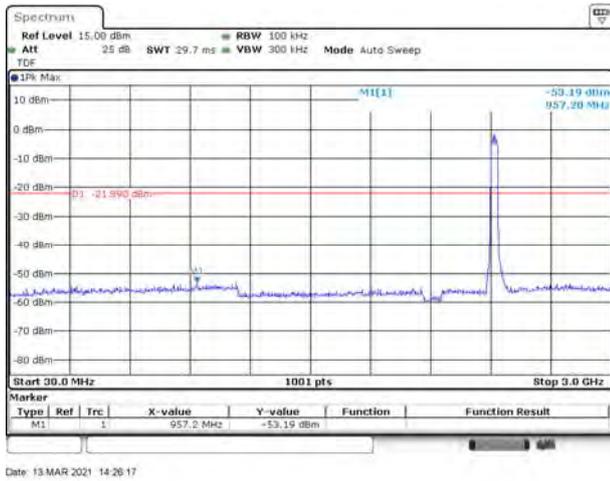


802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

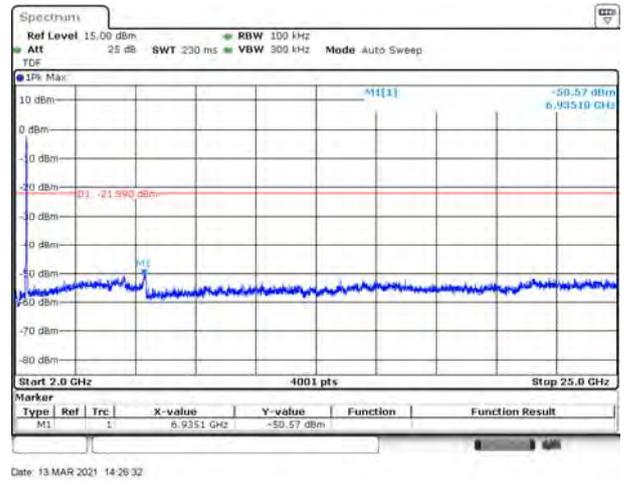

802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

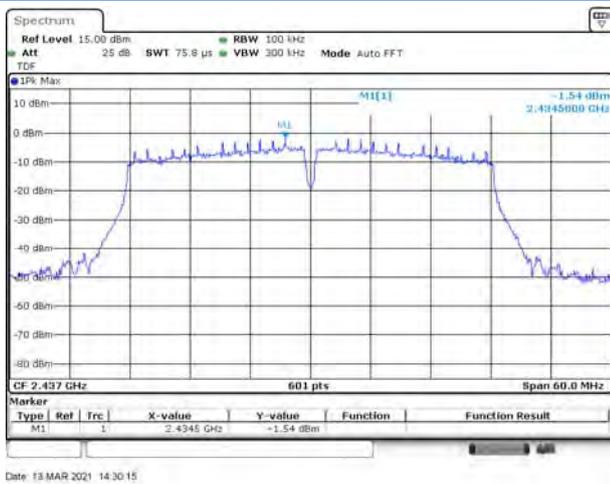


802.11n-40 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

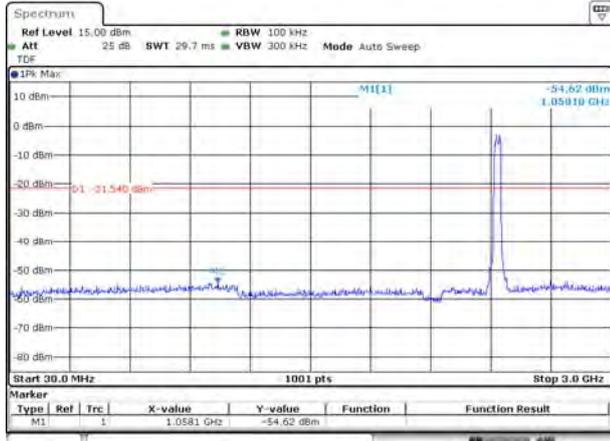


Date: 13.MAR 2021 14:30:35

802.11n-40 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

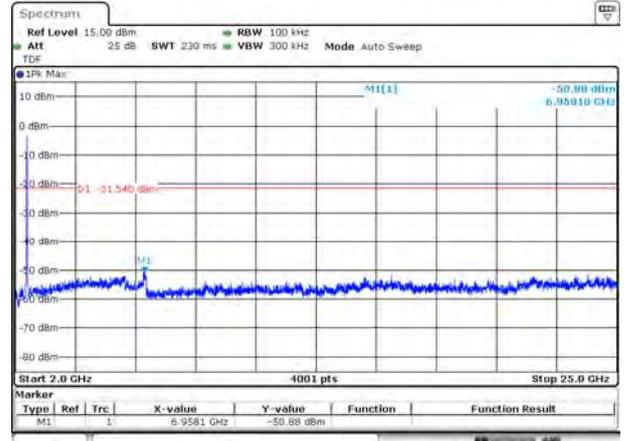


Date: 13.MAR 2021 14:30:43

802.11n-40 HIGH CHANNEL CARRIER LEVEL

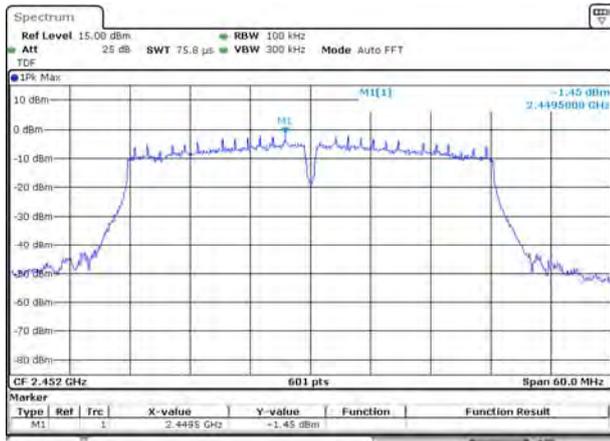


Date: 13.MAR 2021 14:34:43

802.11n-40 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

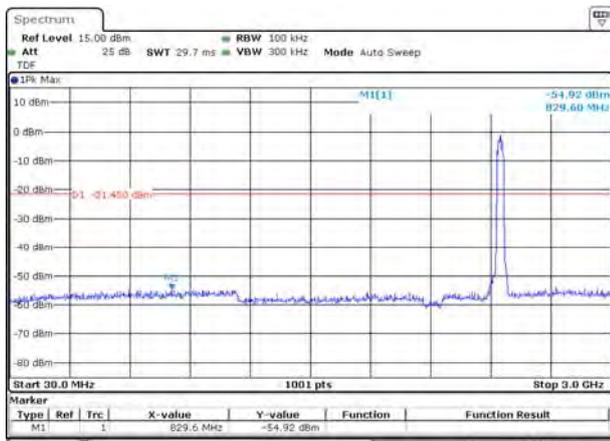

Date: 13.MAR 2021 14:34:57


802.11n-40 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

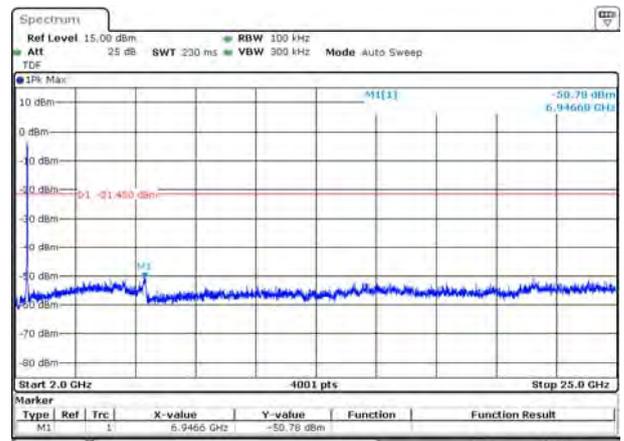

Date: 13.MAR 2021 14:35:05


MIMO-Main Antenna

802.11g LOW CHANNEL CARRIER LEVEL

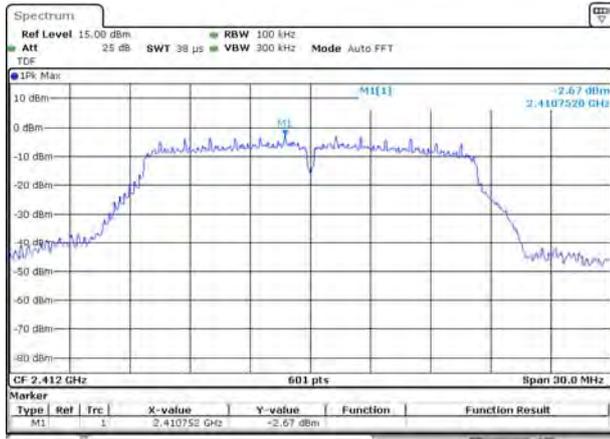


Date: 13.MAR.2021 13:26:12

802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

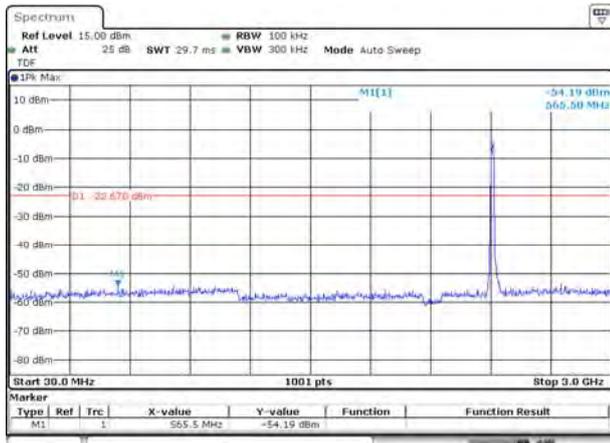


Date: 13.MAR.2021 13:26:26

802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

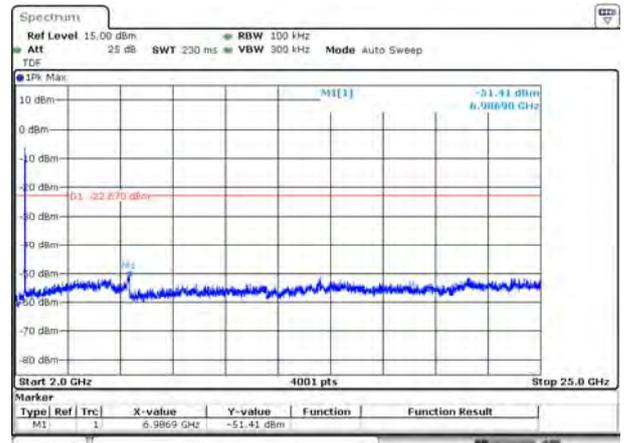


Date: 13.MAR.2021 13:26:38

802.11g MIDDLE CHANNEL CARRIER LEVEL

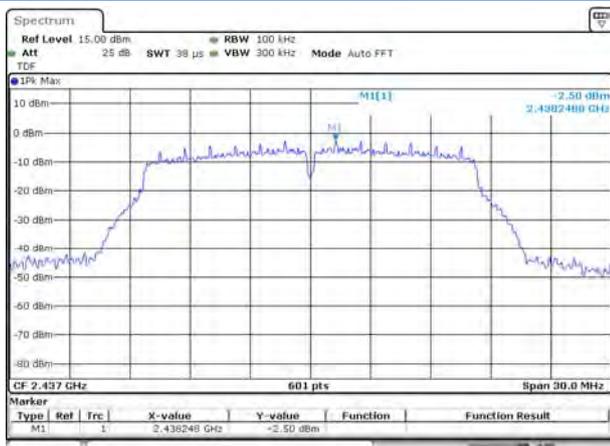


Date: 13.MAR.2021 13:30:26

802.11g MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

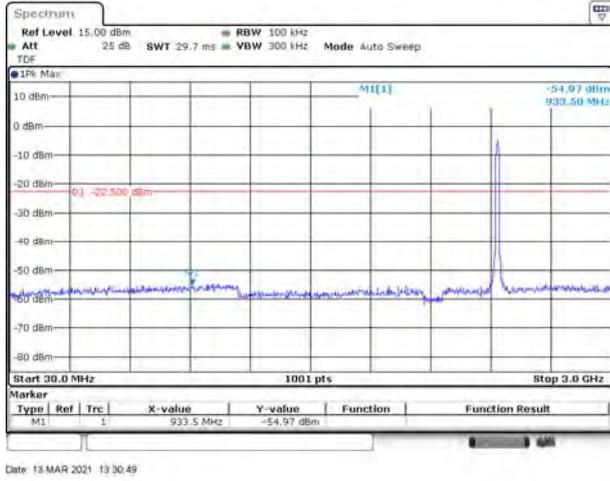


802.11g MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

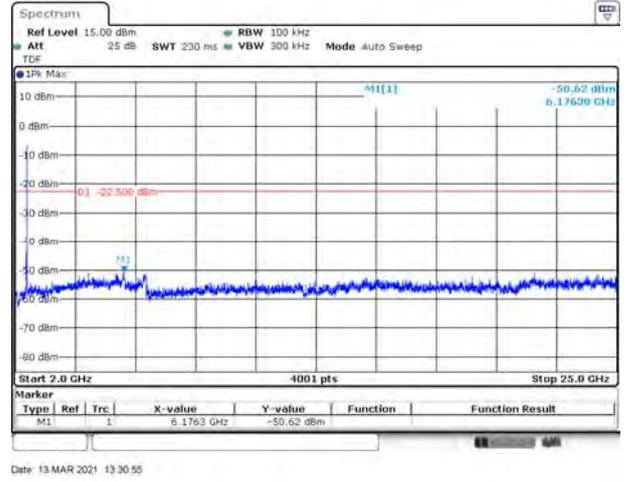


802.11g HIGH CHANNEL CARRIER LEVEL




802.11g HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

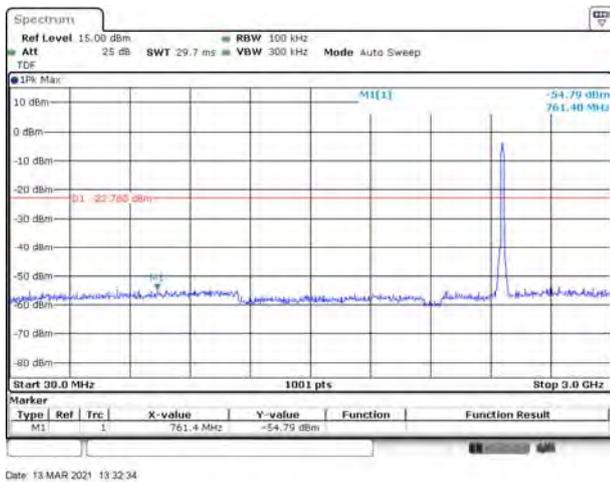

802.11g HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

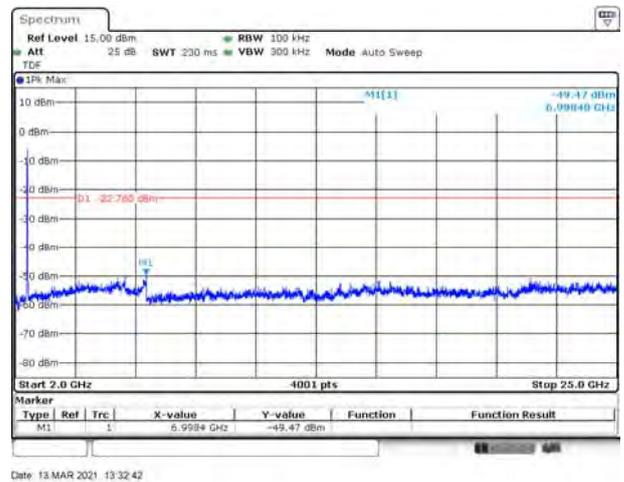


802.11n-20 LOW CHANNEL CARRIER LEVEL

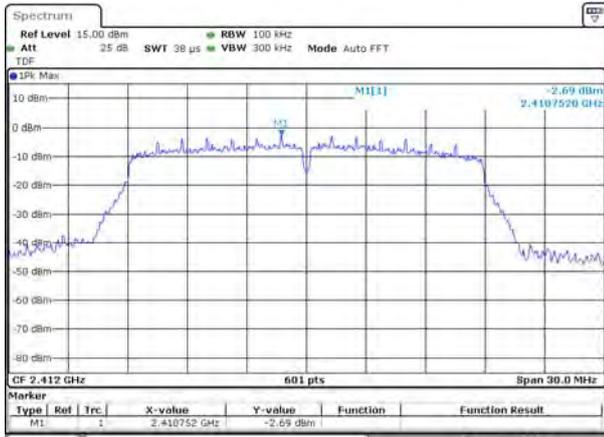


Date: 13 MAR 2021 13:34:41

802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

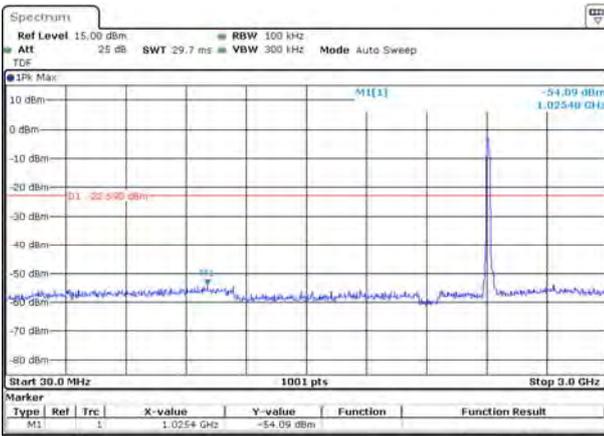


Date: 13 MAR 2021 13:34:59

802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

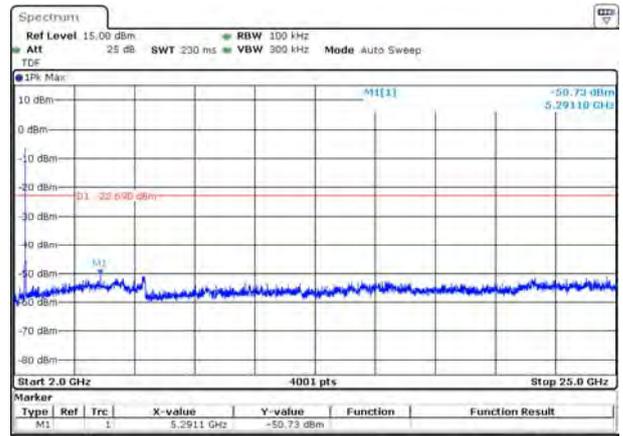


Date: 13 MAR 2021 13:35:07

802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

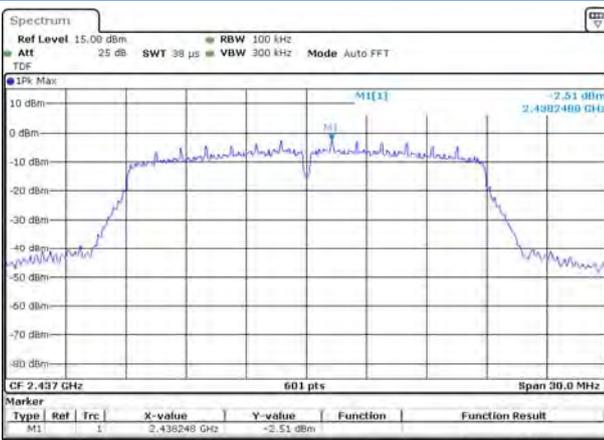


Date: 13 MAR 2021 13:36:43

802.11n-20 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

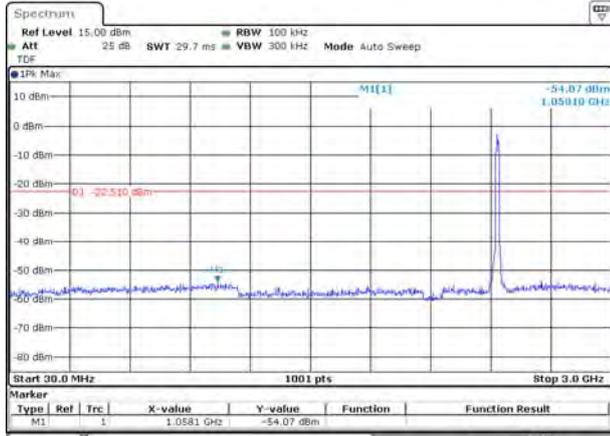


Date: 13.MAR.2021 13:37:01

802.11n-20 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

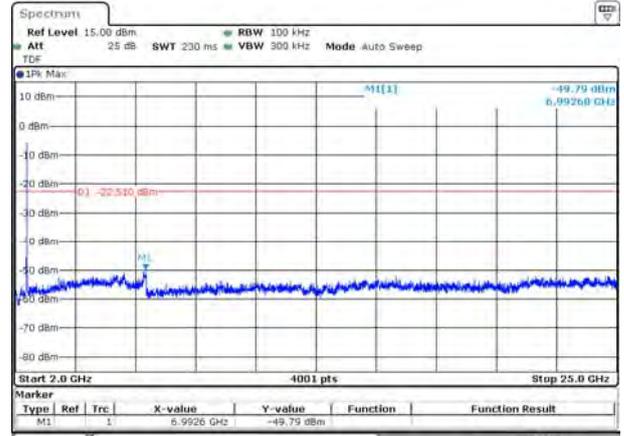


Date: 13.MAR.2021 13:37:12

802.11n-20 HIGH CHANNEL CARRIER LEVEL

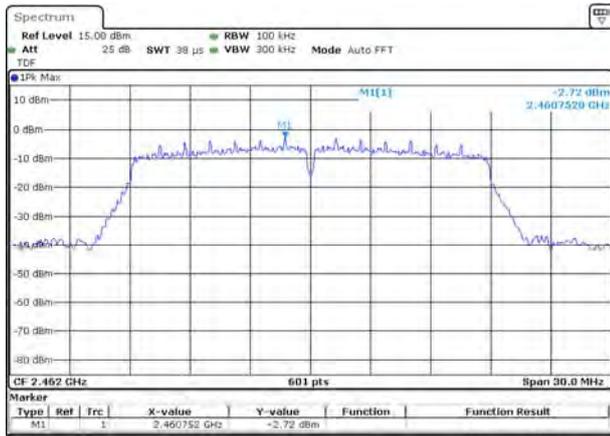


Date: 13.MAR.2021 13:38:41

802.11n-20 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

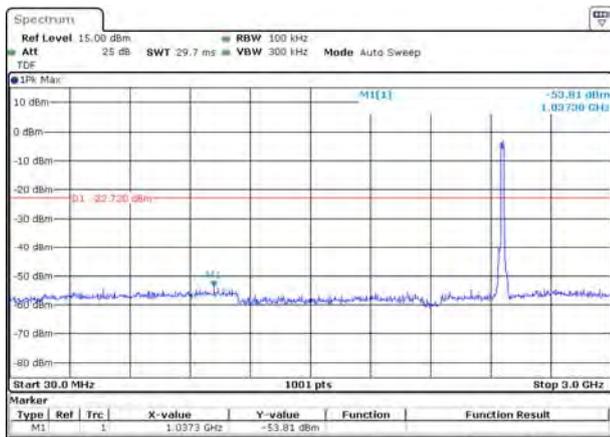


Date: 13.MAR.2021 13:38:58

802.11n-20 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

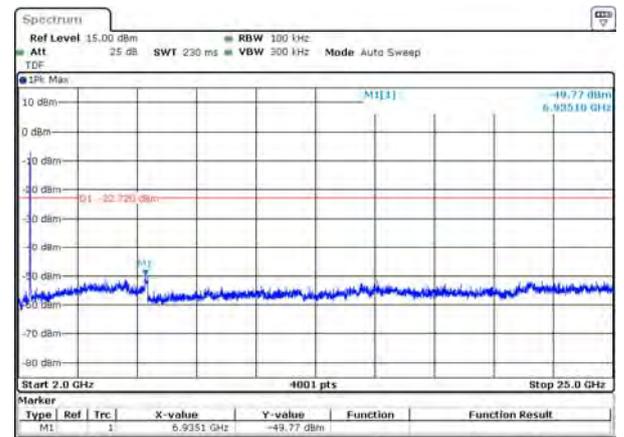


Date: 13.MAR.2021 13:39:05


802.11n-40 LOW CHANNEL CARRIER LEVEL

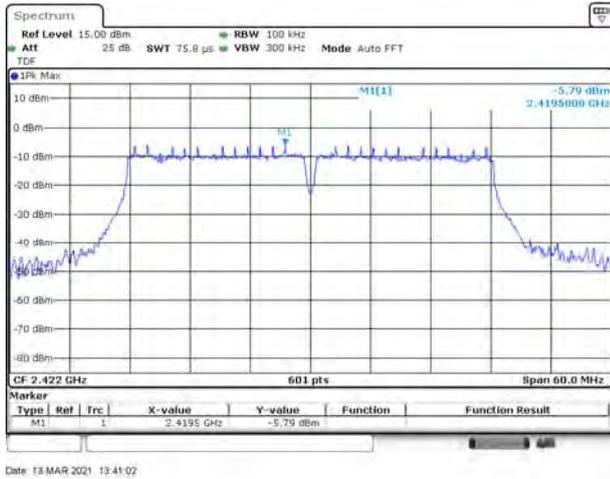


802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

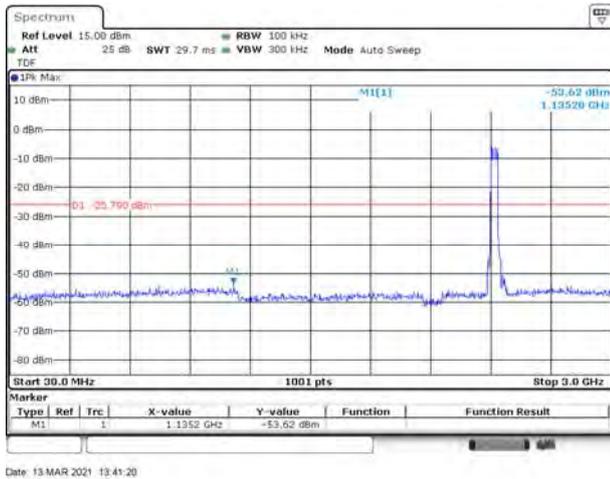


802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

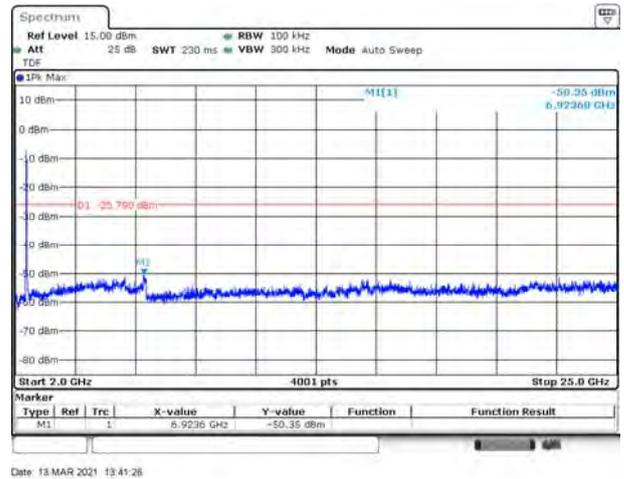

802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

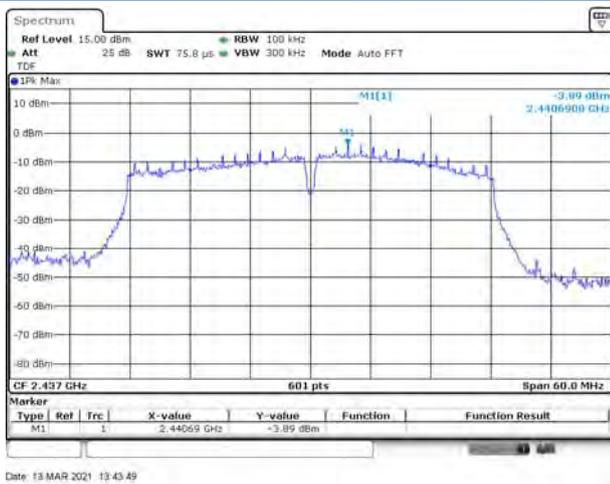


802.11n-40 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

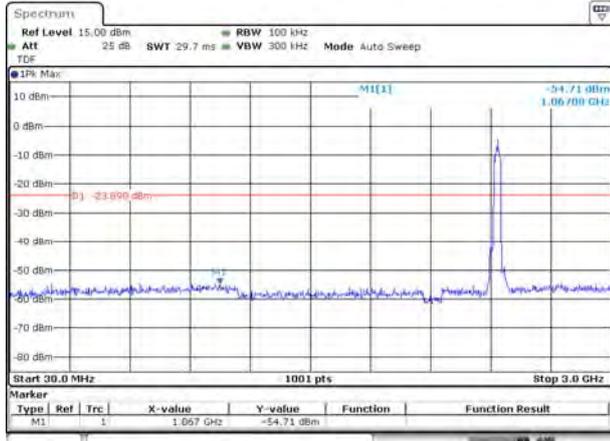


Date: 13.MAR 2021 13:44:07

802.11n-40 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

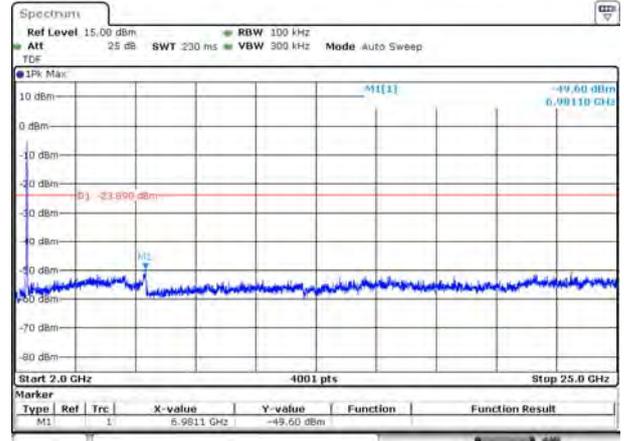


Date: 13.MAR 2021 13:44:15

802.11n-40 HIGH CHANNEL CARRIER LEVEL

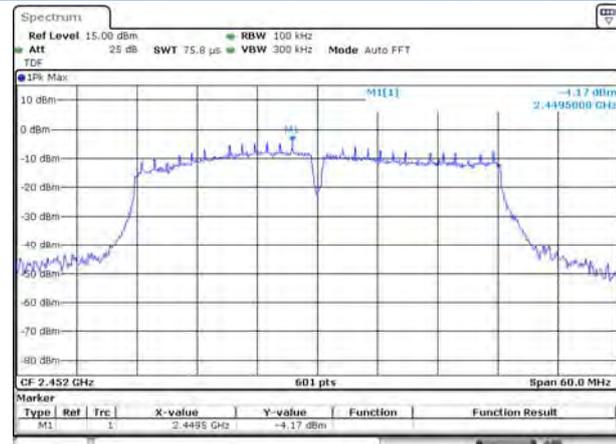


Date: 13.MAR 2021 13:45:13

802.11n-40 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

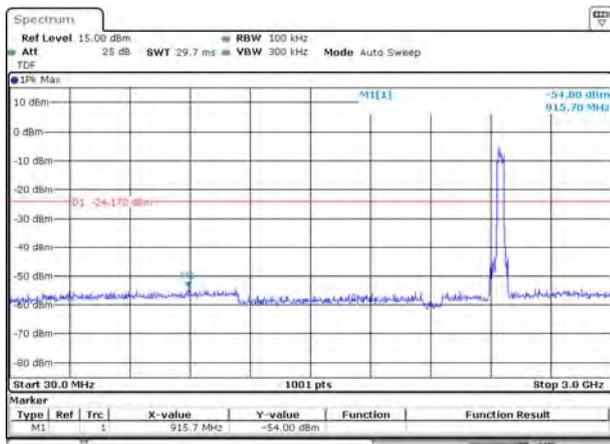

Date: 13.MAR 2021 13:46:29

802.11n-40 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

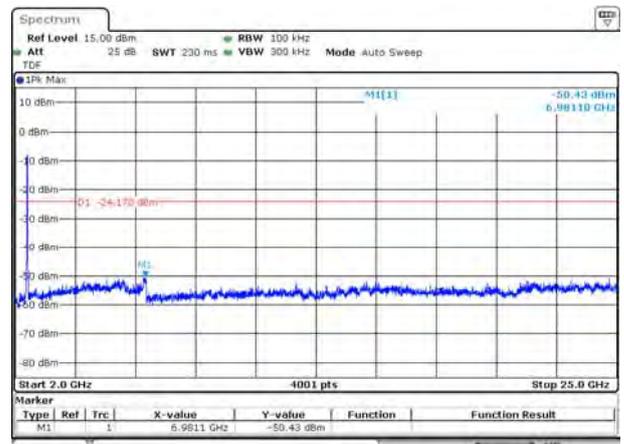


Date: 13.MAR 2021 13:46:40

MIMO-Aux. Antenna


802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

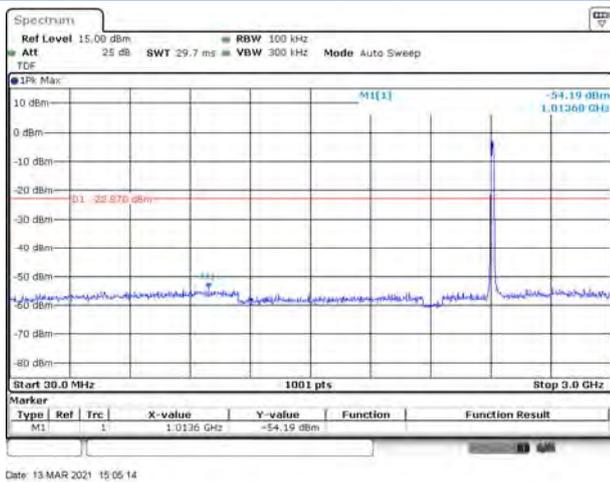


802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

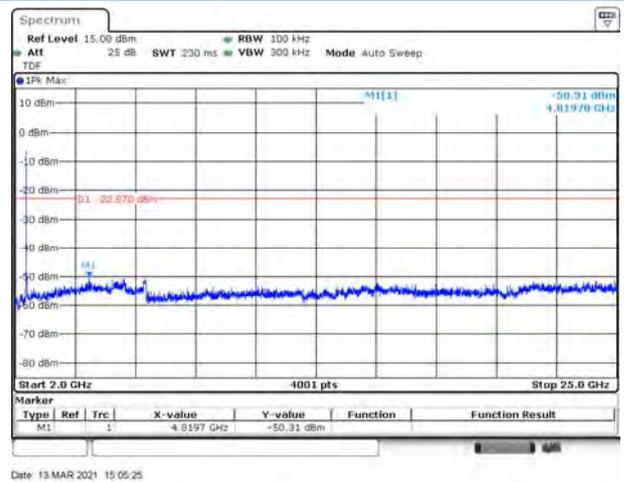

802.11g MIDDLE CHANNEL CARRIER LEVEL

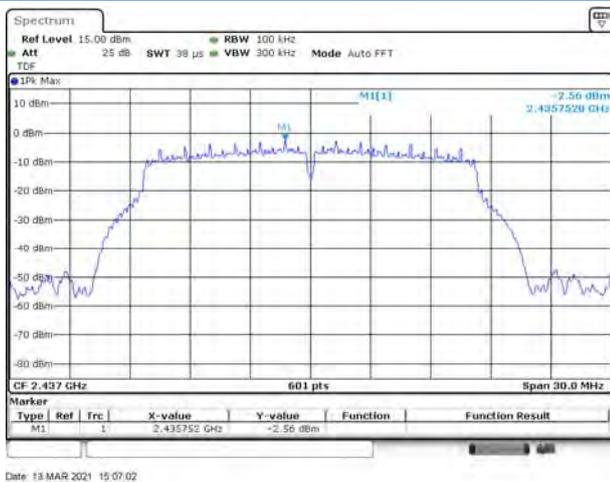


802.11g MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

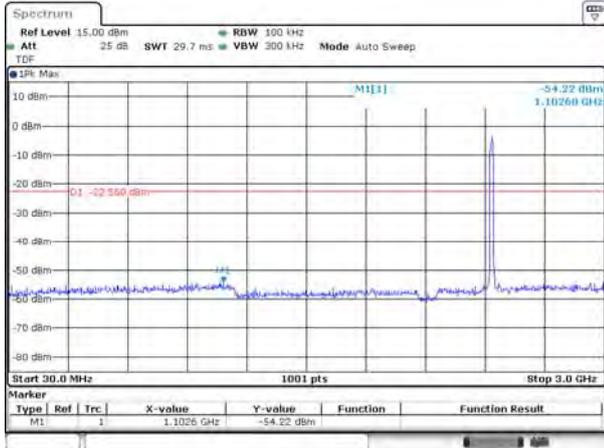


Date: 13.MAR.2021 15:07:18

802.11g MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

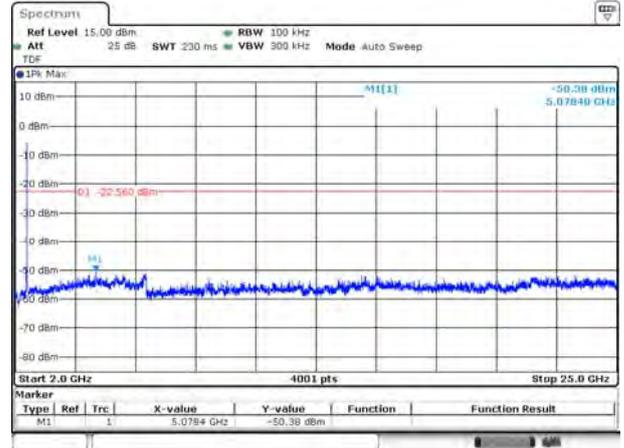


Date: 13.MAR.2021 15:07:25

802.11g HIGH CHANNEL CARRIER LEVEL

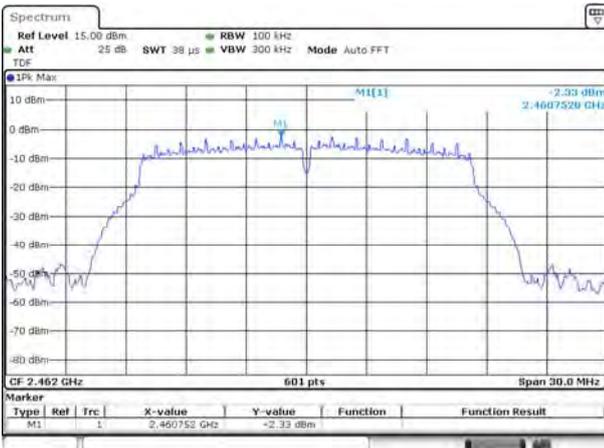


Date: 13.MAR.2021 15:08:42

802.11g HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

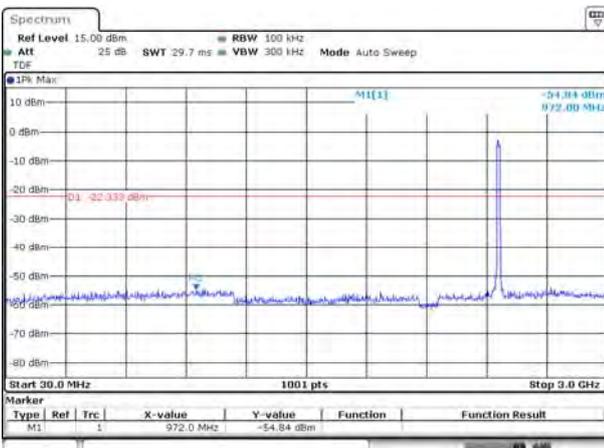


Date: 13.MAR.2021 15:09:00

802.11g HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

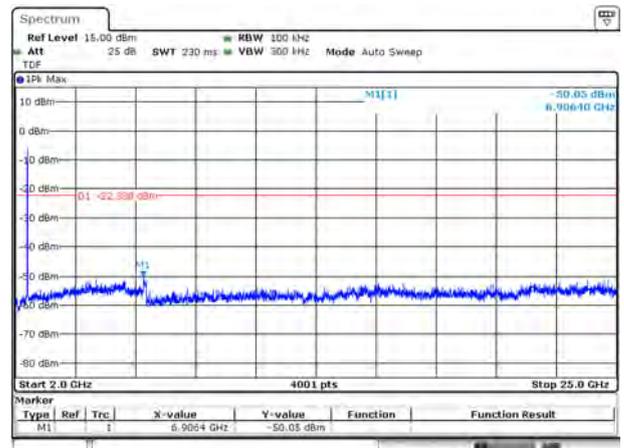


Date: 13.MAR.2021 15:09:07


802.11n-20 LOW CHANNEL CARRIER LEVEL

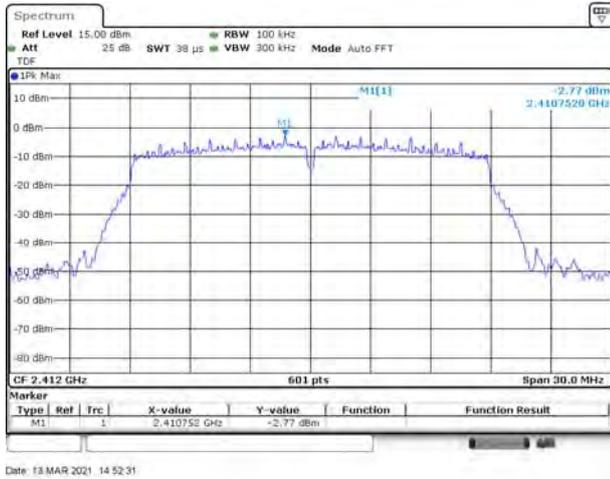

802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

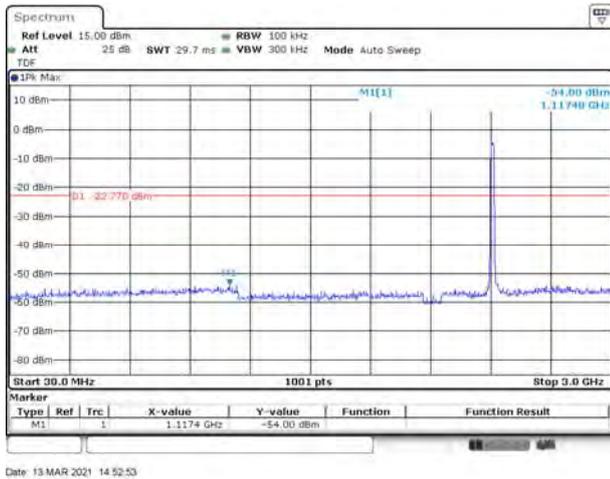


802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

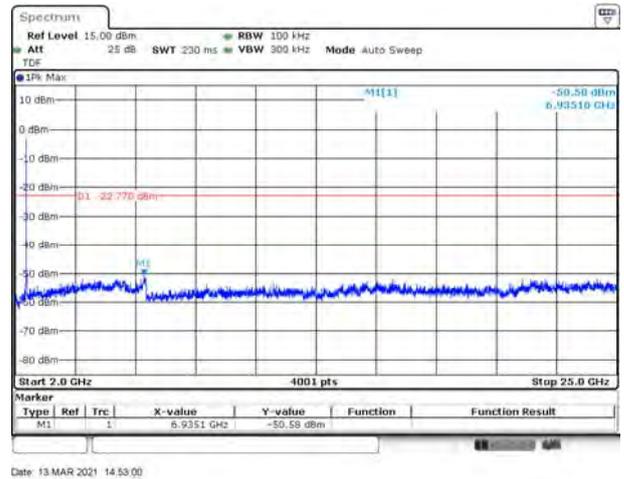


802.11n-20 MIDDLE CHANNEL CARRIER LEVEL




802.11n-20 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

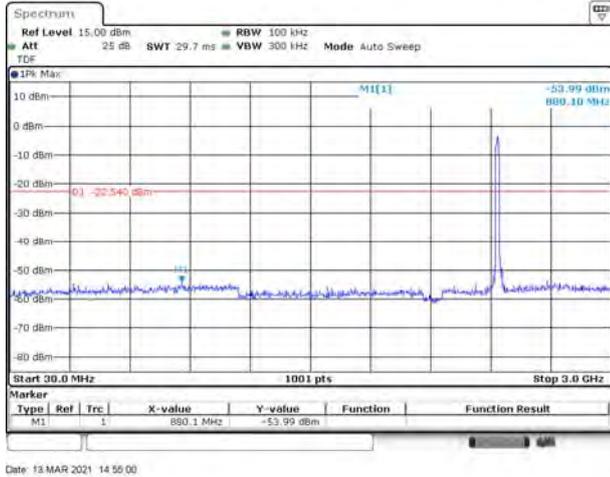


802.11n-20 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

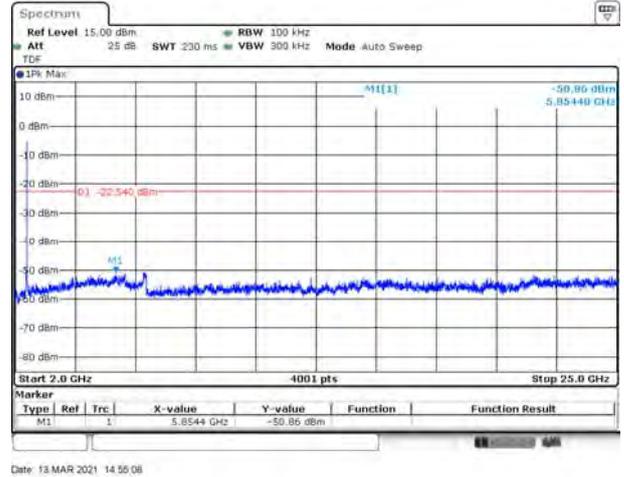


802.11n-20 HIGH CHANNEL CARRIER LEVEL

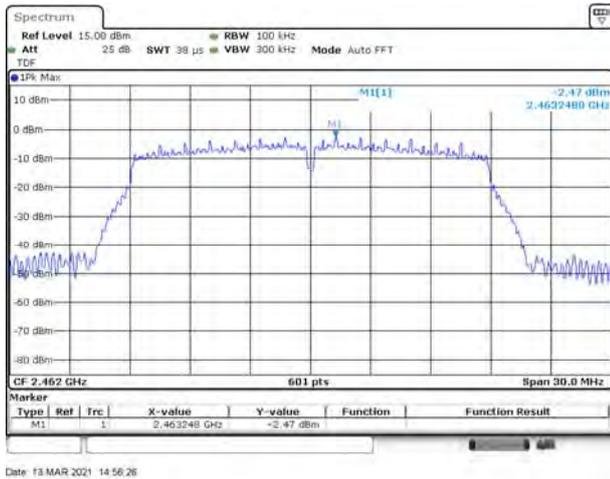


802.11n-20 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

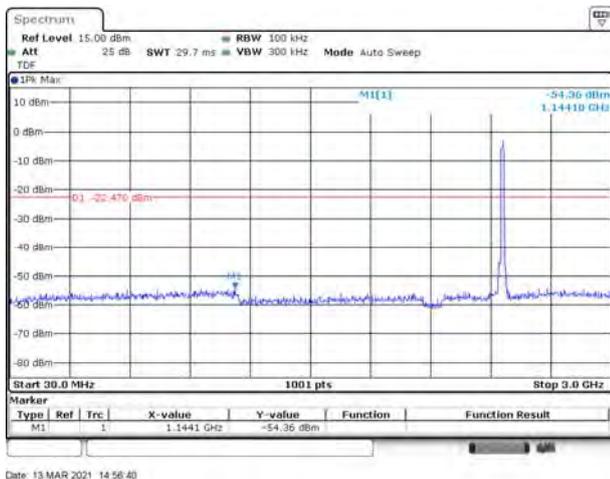

802.11n-20 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

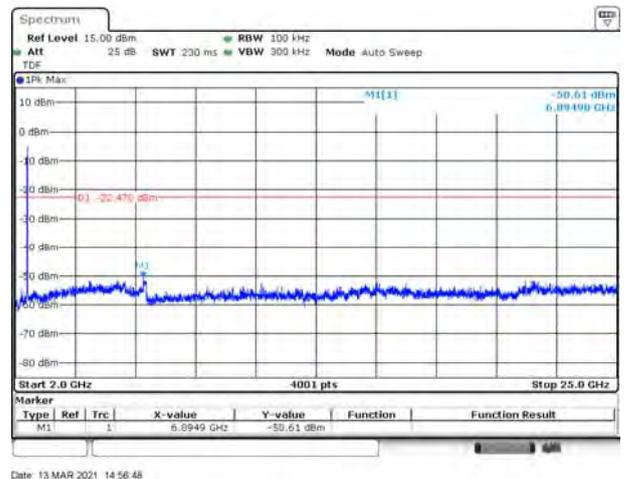


802.11n-40 LOW CHANNEL CARRIER LEVEL

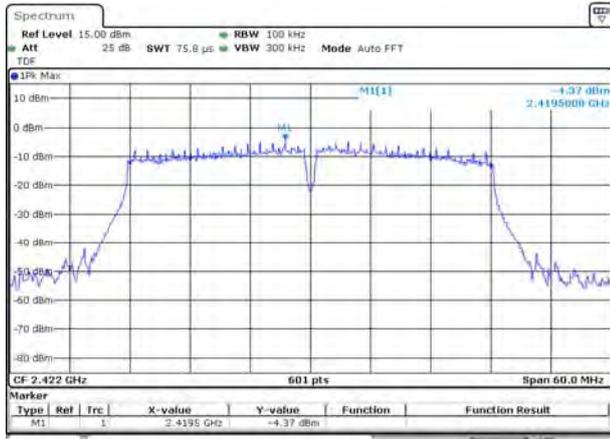


Date: 13 MAR 2021 14:58:49

802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

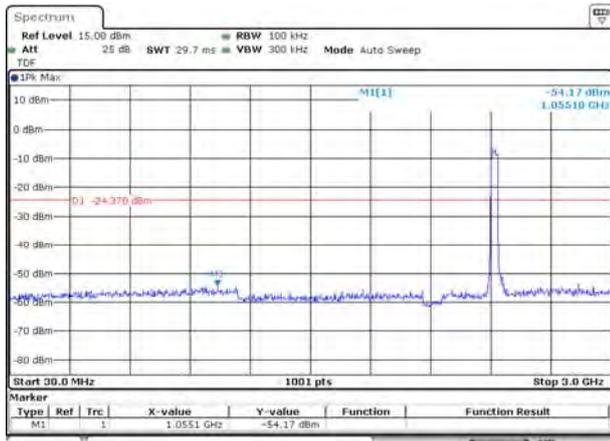


Date: 13 MAR 2021 14:59:04

802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

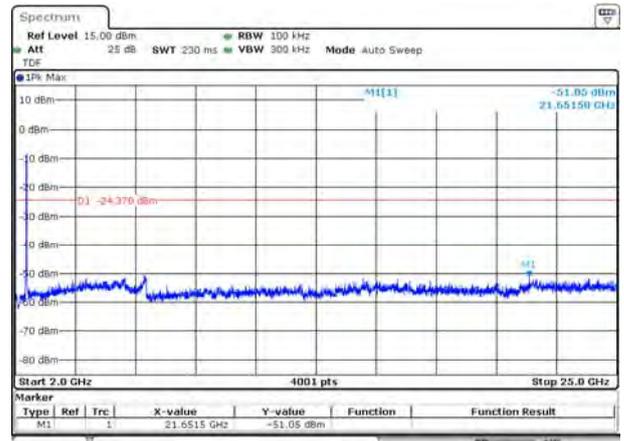


Date: 13 MAR 2021 14:59:12

802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

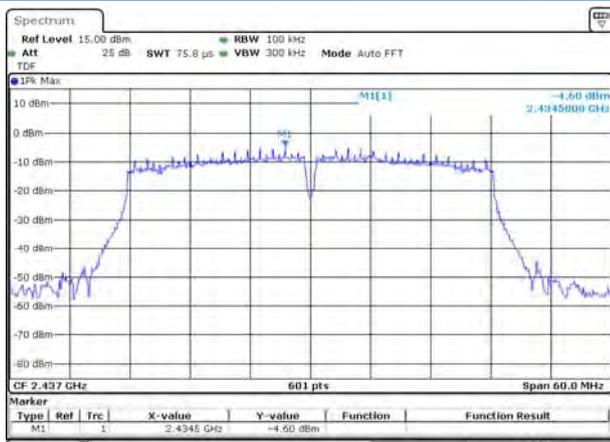


Date: 13 MAR 2021 15:00:47

802.11n-40 MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

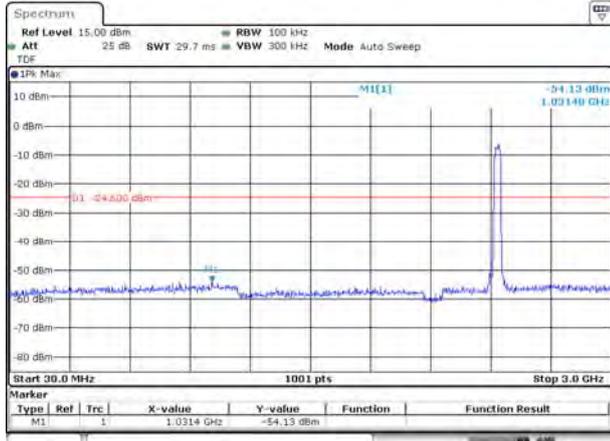


Date: 13.MAR 2021 15:01:03

802.11n-40 MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

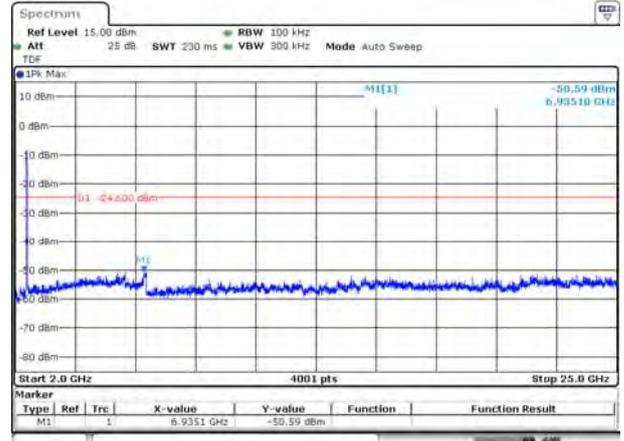


Date: 13.MAR 2021 15:01:14

802.11n-40 HIGH CHANNEL CARRIER LEVEL

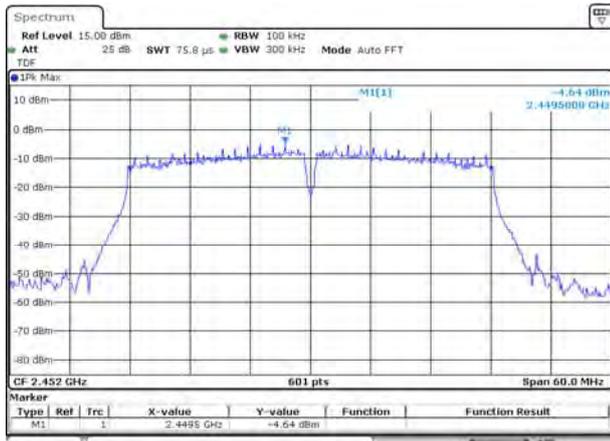


Date: 13.MAR 2021 15:02:35

802.11n-40 HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

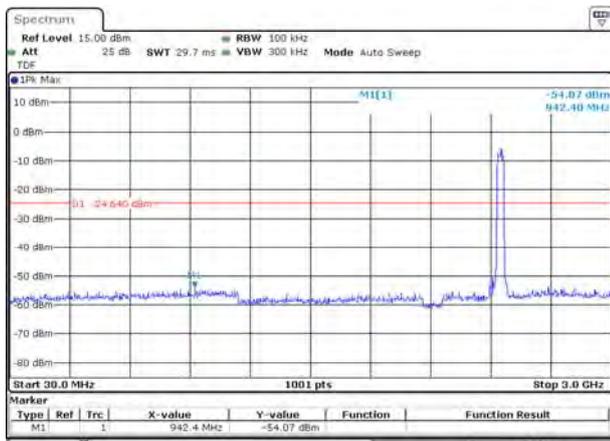

Date: 13.MAR 2021 15:02:51

802.11n-40 HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

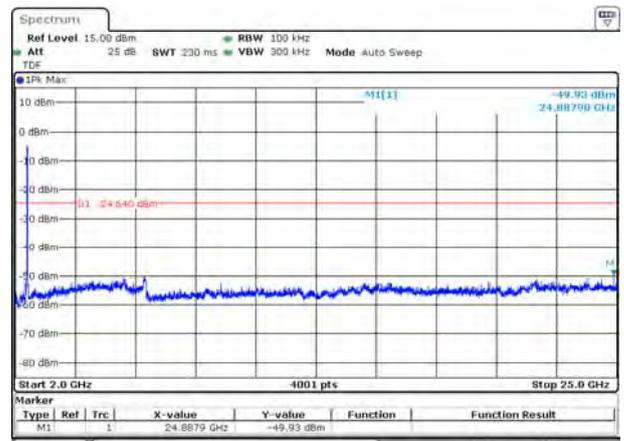

Date: 13.MAR 2021 15:03:05

A.4 Band Edge (Authorized-band band-edge)

Test Data

Main Antenna

Note: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-44.57	2.58	-17.42	Pass
High Channel	-48.96	2.22	-17.78	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-39.91	0.73	-19.27	Pass
High Channel	-47.87	0.49	-19.51	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-39.73	1.40	-18.60	Pass
High Channel	-47.53	0.49	-19.51	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-41.63	-3.22	-23.22	Pass
High Channel	-46.25	-1.26	-21.26	Pass

Aux. Antenna

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-44.85	2.35	-17.65	Pass
High Channel	-49.09	2.35	-17.65	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-32.88	0.38	-19.62	Pass
High Channel	-47.63	0.50	-19.50	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.15	0.26	-19.74	Pass
High Channel	-47.66	0.53	-19.47	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-41.31	-1.89	-21.89	Pass
High Channel	-47.12	-1.45	-21.45	Pass

MIMO-Main Antenna
802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-41.08	-2.67	-22.67	Pass
High Channel	-48.20	-2.76	-22.76	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-40.78	-2.69	-22.69	Pass
High Channel	-48.32	-2.72	-22.72	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-42.99	-5.79	-25.79	Pass
High Channel	-47.45	-4.17	-24.17	Pass

MIMO-Aux. Antenna
802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.73	-2.87	-22.87	Pass
High Channel	-48.93	-2.33	-22.33	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.65	-2.77	-22.77	Pass
High Channel	-48.78	-2.47	-22.47	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-43.64	-4.37	-24.37	Pass
High Channel	-48.63	-4.64	-24.64	Pass


Test Plots

Main Antenna


802.11b LOW CHANNEL, Carrier level




802.11b LOW CHANNEL, Reference level

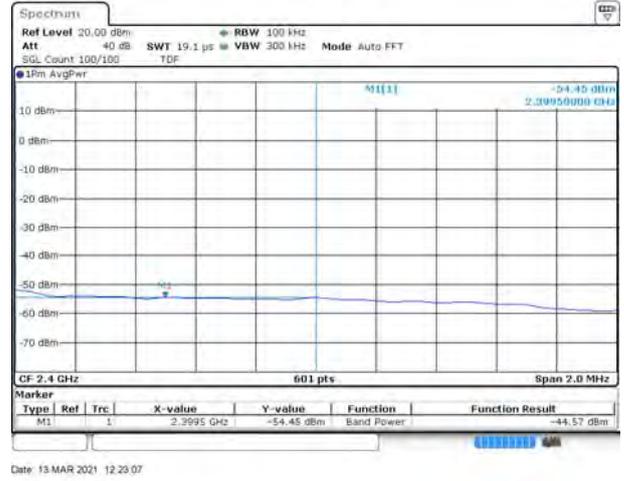


802.11b HIGH CHANNEL, Carrier level

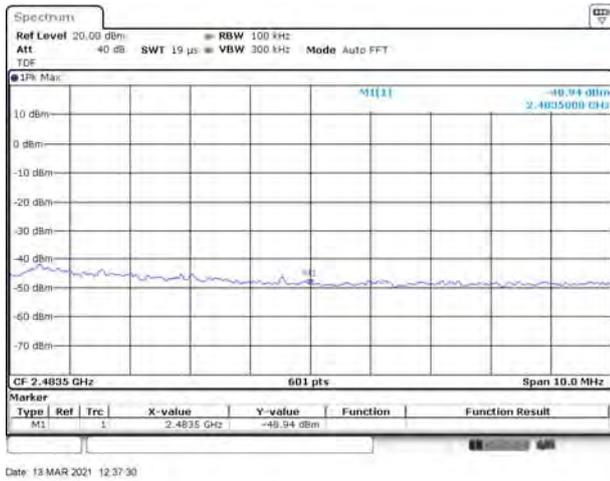


802.11b HIGH CHANNEL, Reference level

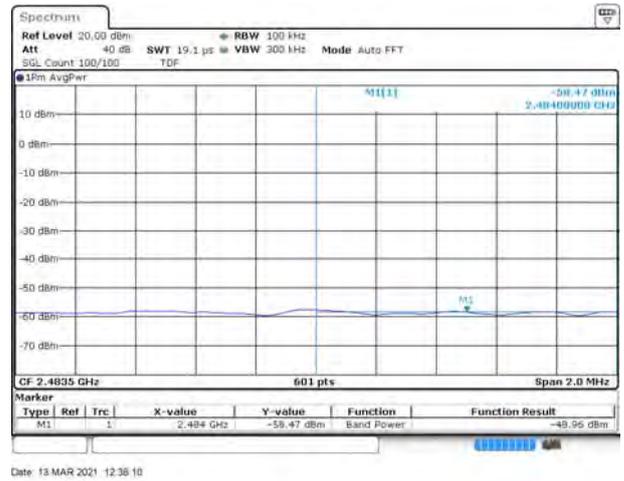


802.11g LOW CHANNEL, Carrier level

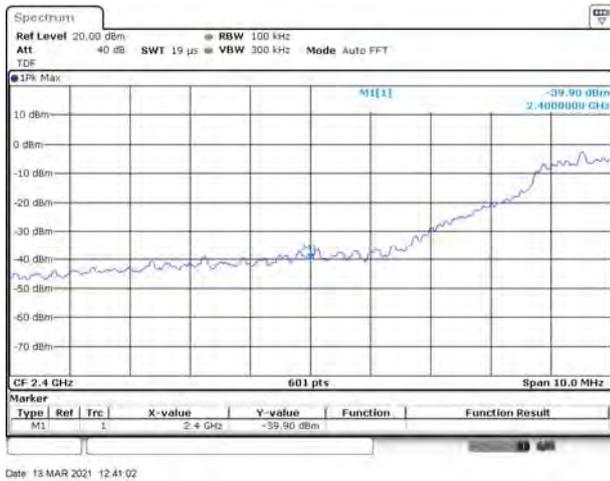

802.11g LOW CHANNEL, Reference level

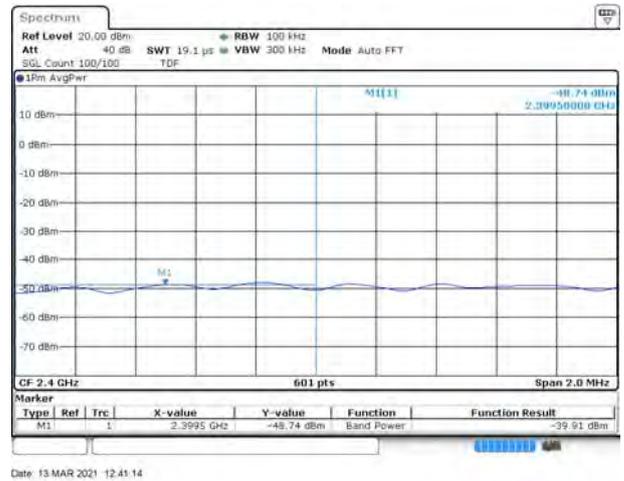


802.11g HIGH CHANNEL, Carrier level

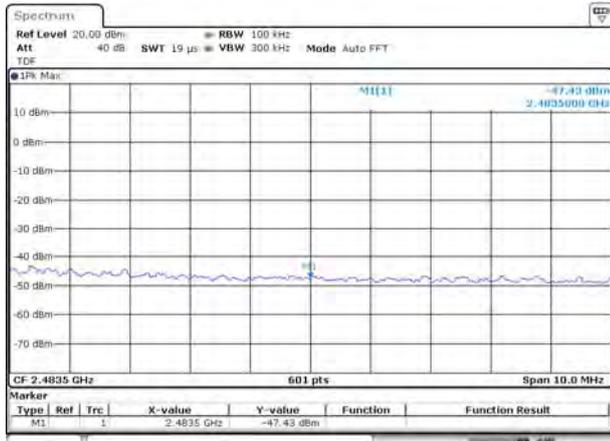


Date: 13 MAR 2021 12:49:49

802.11g HIGH CHANNEL, Reference level

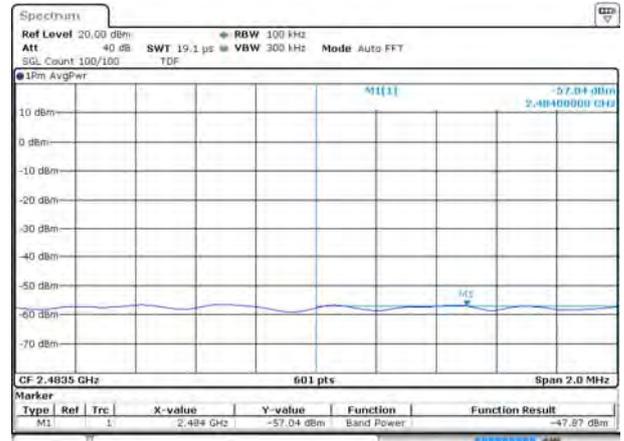


Date: 13 MAR 2021 12:49:59

802.11n-20 MHz LOW CHANNEL, Carrier level

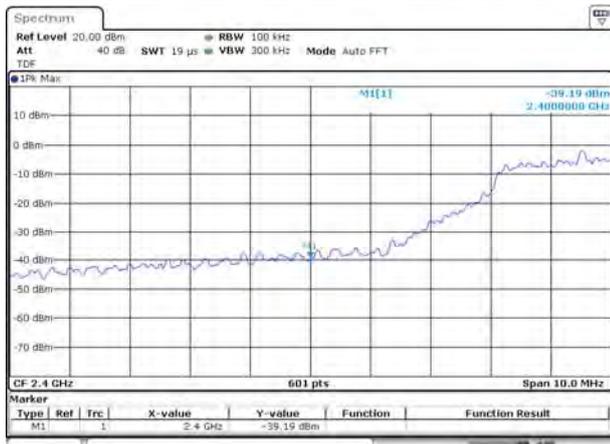


Date: 13 MAR 2021 12:53:05

802.11n-20 MHz LOW CHANNEL, Reference level

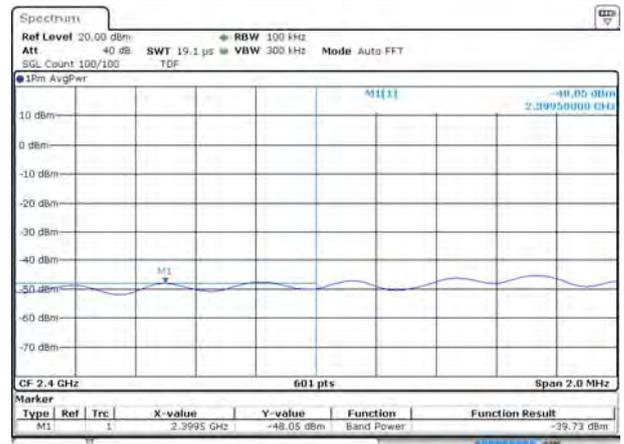


Date: 13 MAR 2021 12:53:15

802.11n-20 MHz HIGH CHANNEL, Carrier level

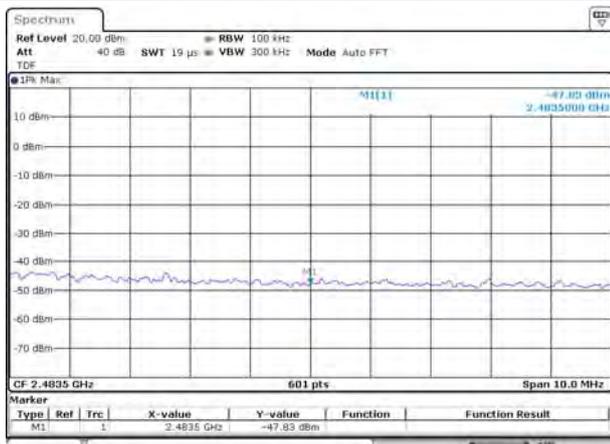

Date: 13 MAR 2021 12:59:05

802.11n-20 MHz HIGH CHANNEL, Reference level

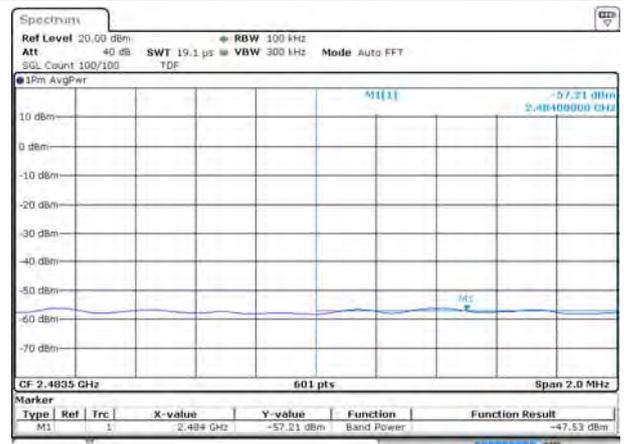


Date: 13 MAR 2021 12:59:15


802.11n-40 MHz LOW CHANNEL, Carrier level




802.11n-40 MHz LOW CHANNEL, Reference level

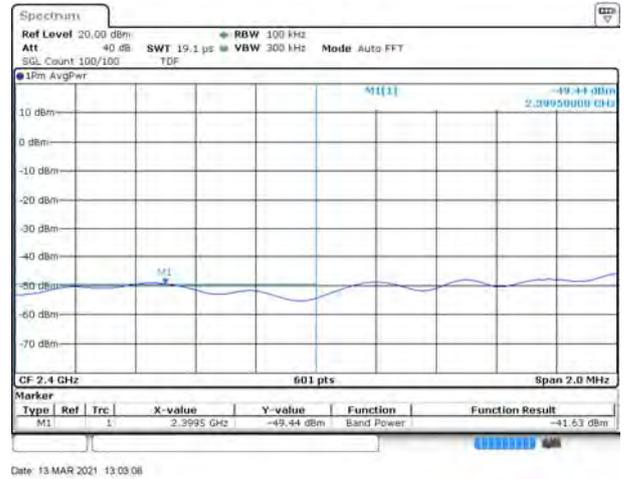

802.11n-40 MHz HIGH CHANNEL, Carrier level

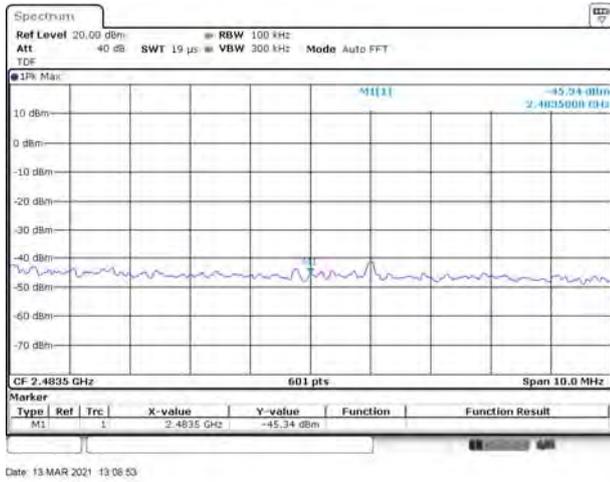


802.11n-40 MHz HIGH CHANNEL, Reference level

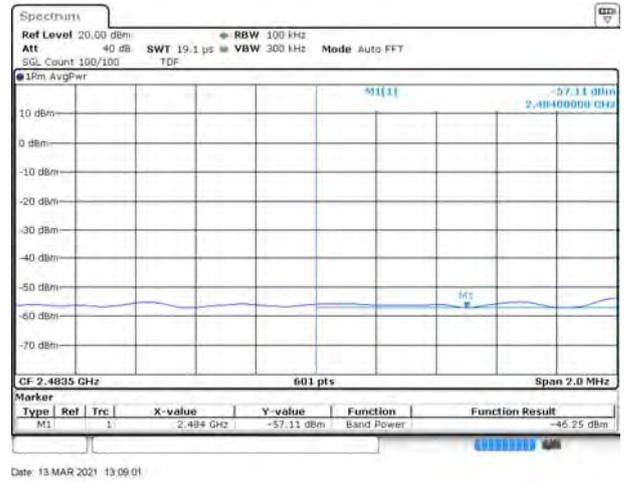


Aux. Antenna

802.11b LOW CHANNEL, Carrier level

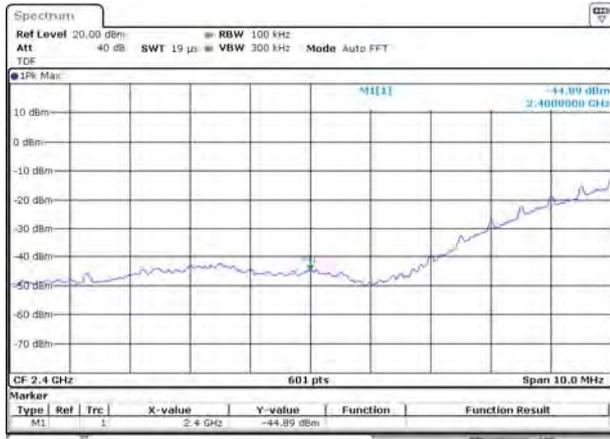


Date: 13 MAR 2021 13:56:14

802.11b LOW CHANNEL, Reference level

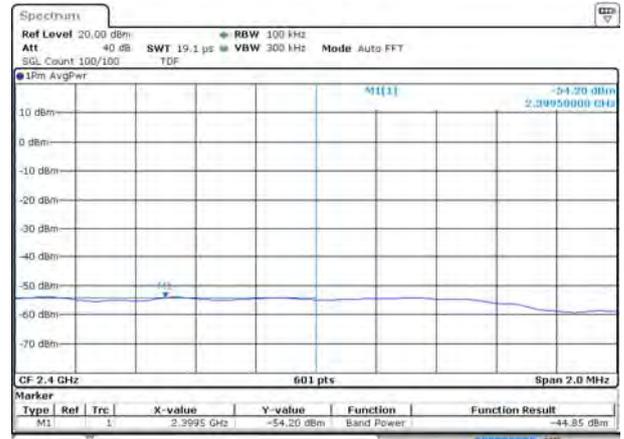


Date: 13 MAR 2021 13:56:27

802.11b HIGH CHANNEL, Carrier level

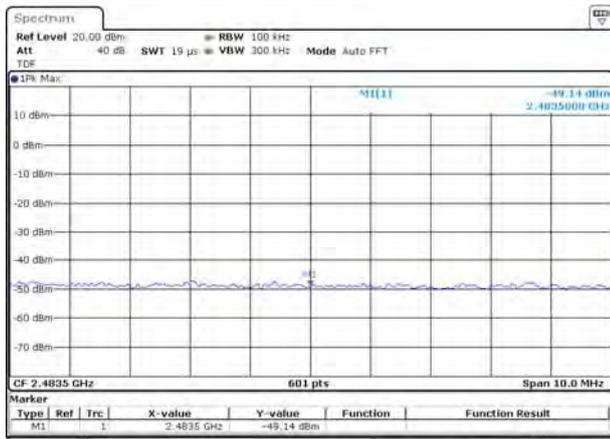


Date: 13 MAR 2021 14:01:15

802.11b HIGH CHANNEL, Reference level

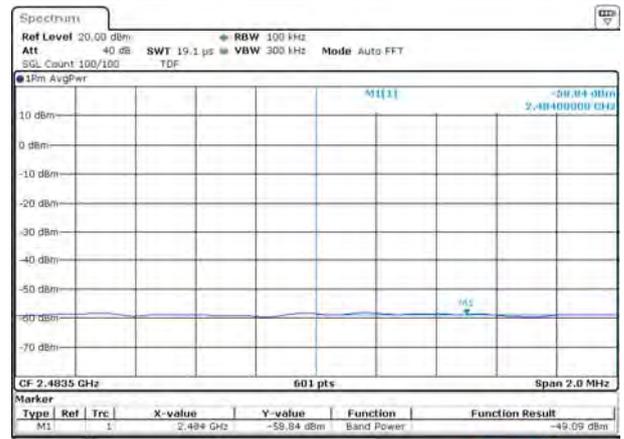


Date: 13 MAR 2021 14:01:24

802.11g LOW CHANNEL, Carrier level

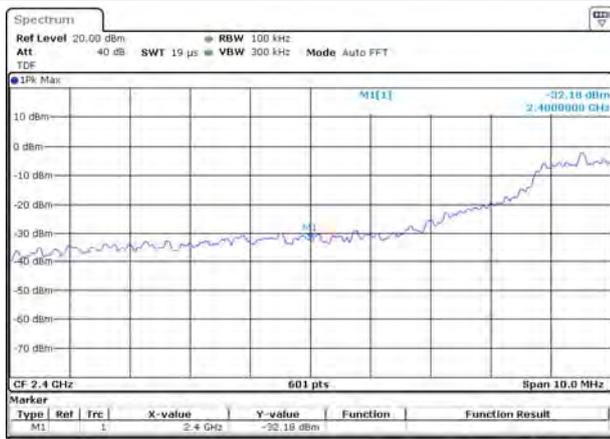


Date: 13 MAR 2021 14:04:14

802.11g LOW CHANNEL, Reference level

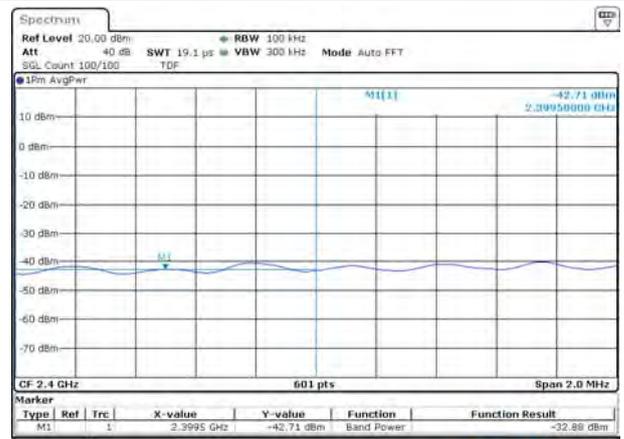


Date: 13 MAR 2021 14:04:27

802.11g HIGH CHANNEL, Carrier level

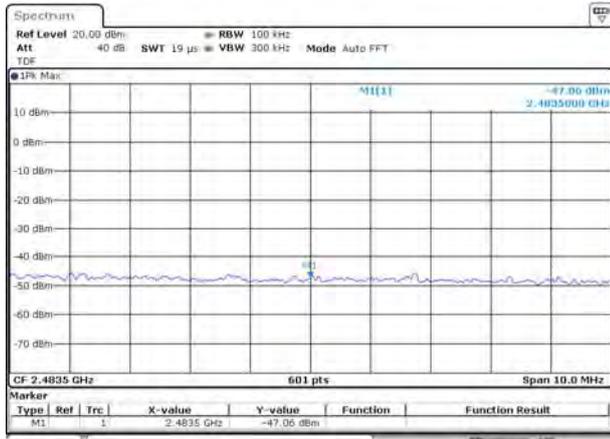


Date: 13 MAR 2021 14:12:37

802.11g HIGH CHANNEL, Reference level

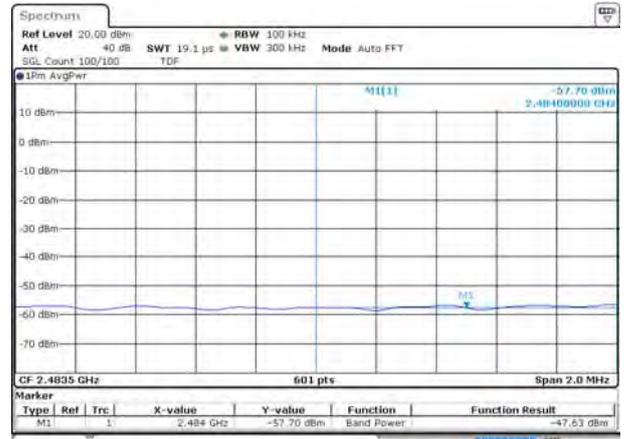


Date: 13 MAR 2021 14:12:46

802.11n-20 MHz LOW CHANNEL, Carrier level

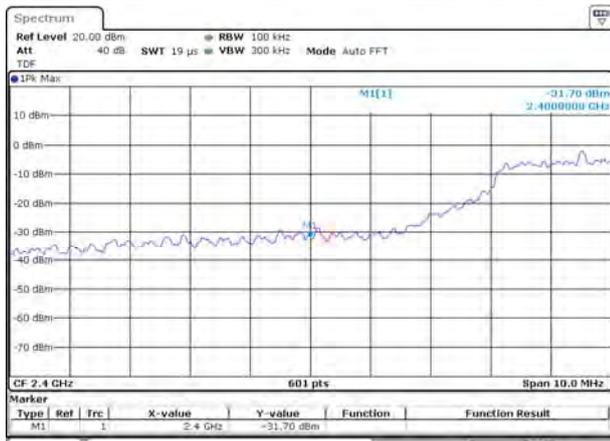


Date: 13 MAR 2021 14:15:14

802.11n-20 MHz LOW CHANNEL, Reference level

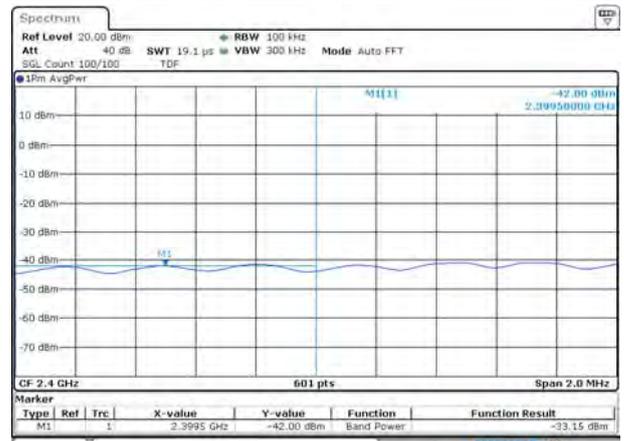


Date: 13 MAR 2021 14:15:24

802.11n-20 MHz HIGH CHANNEL, Carrier level

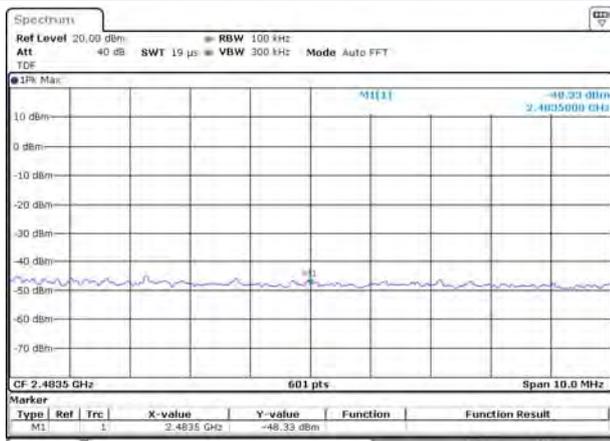


Date: 13 MAR 2021 14:21:16

802.11n-20 MHz HIGH CHANNEL, Reference level

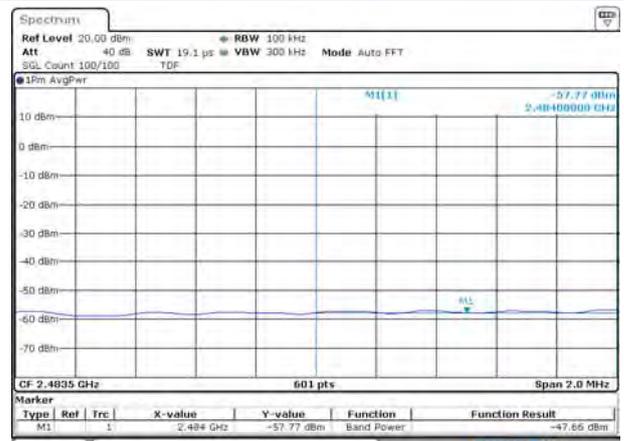


Date: 13 MAR 2021 14:21:26

802.11n-40 MHz LOW CHANNEL, Carrier level

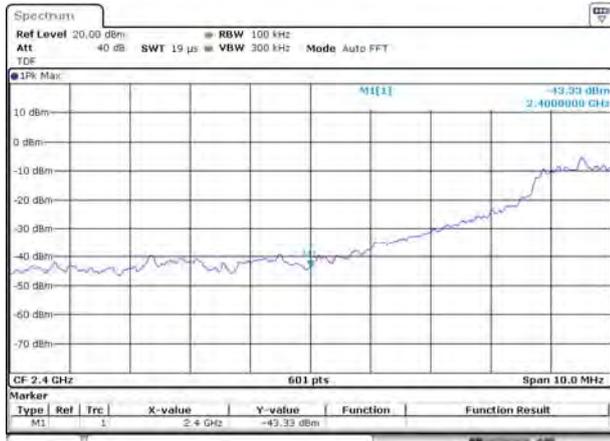


Date: 13 MAR 2021 14:26:47

802.11n-40 MHz LOW CHANNEL, Reference level

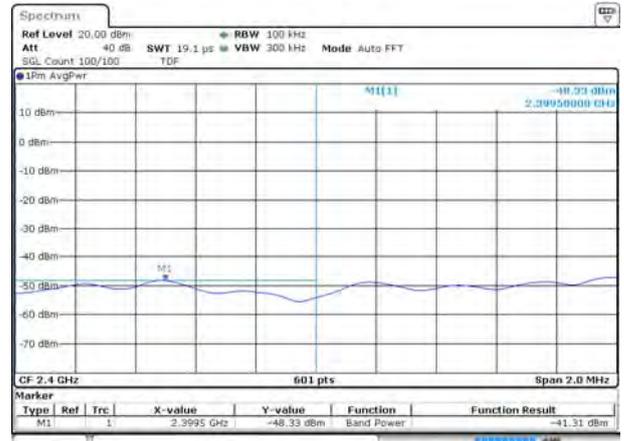


Date: 13 MAR 2021 14:27:01

802.11n-40 MHz HIGH CHANNEL, Carrier level

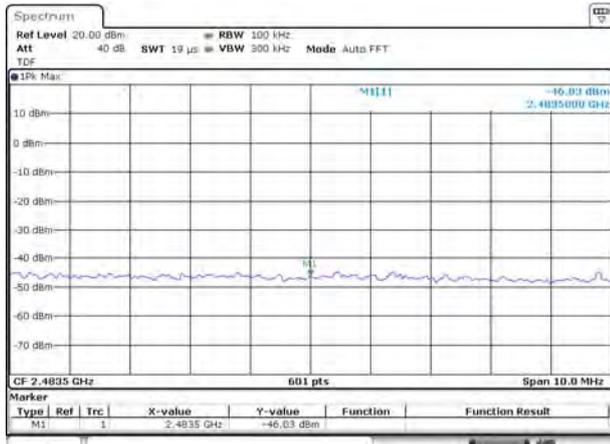

Date: 13 MAR 2021 14:35:28


802.11n-40 MHz HIGH CHANNEL, Reference level

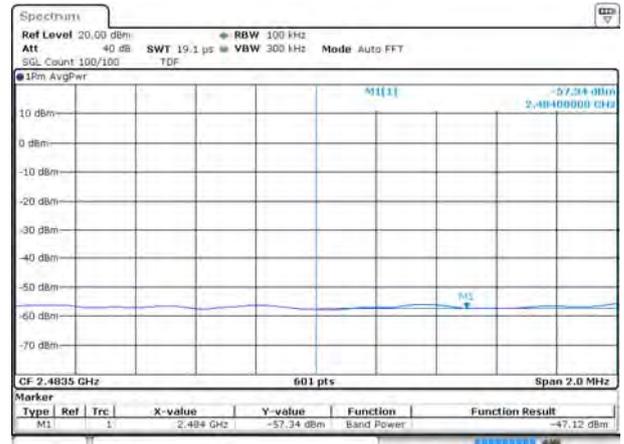

Date: 13 MAR 2021 14:35:40


MIMO-Main Antenna

802.11g LOW CHANNEL, Carrier level

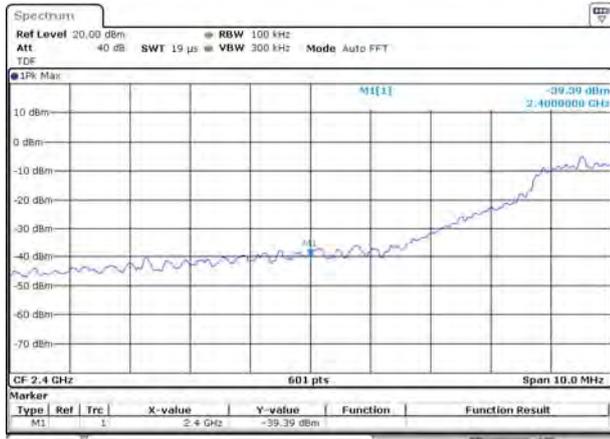


Date: 13 MAR 2021 13:28:45

802.11g LOW CHANNEL, Reference level

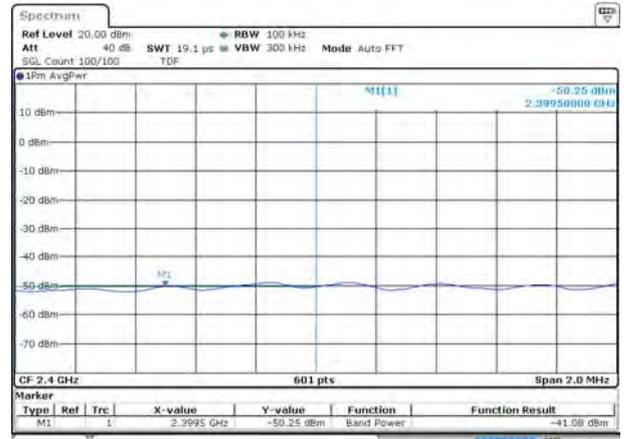


Date: 13 MAR 2021 13:28:54

802.11g HIGH CHANNEL, Carrier level

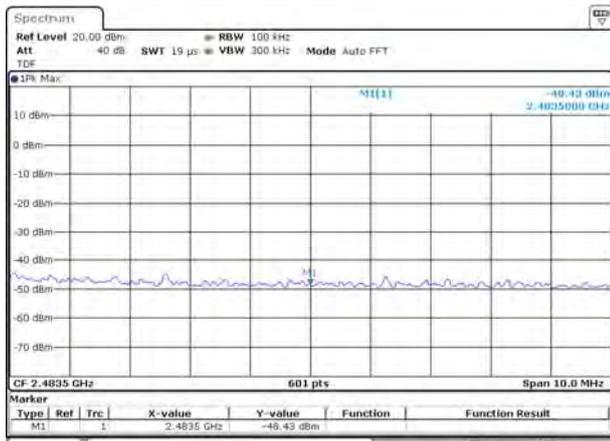


Date: 13 MAR 2021 13:32:50

802.11g HIGH CHANNEL, Reference level

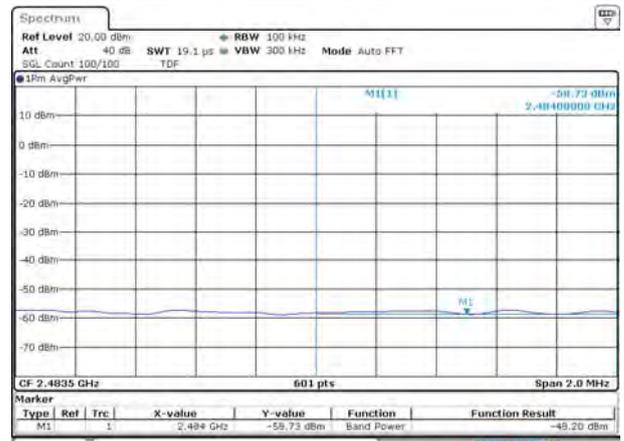


Date: 13 MAR 2021 13:33:04

802.11n-20 MHz LOW CHANNEL, Carrier level

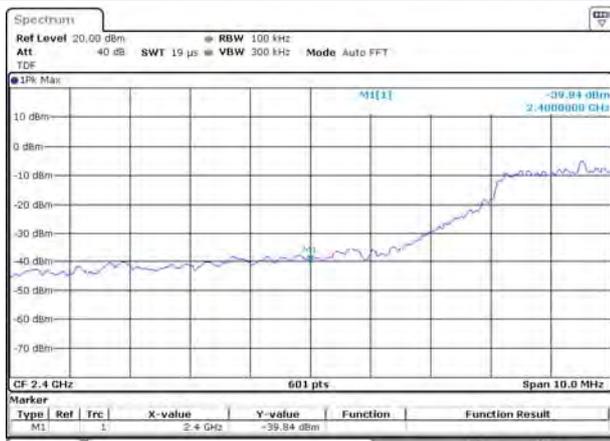


Date: 13 MAR 2021 13:35:17

802.11n-20 MHz LOW CHANNEL, Reference level

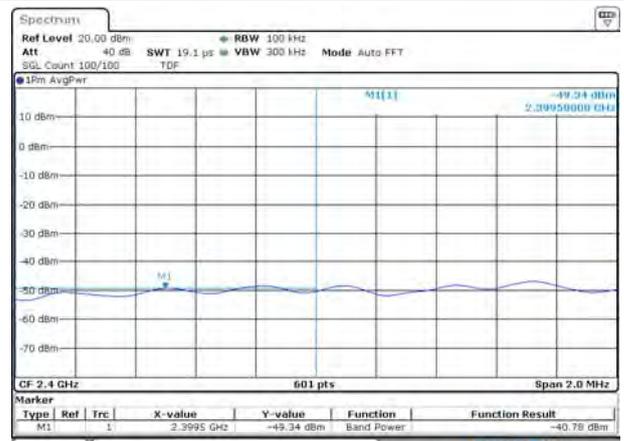


Date: 13 MAR 2021 13:35:25

802.11n-20 MHz HIGH CHANNEL, Carrier level

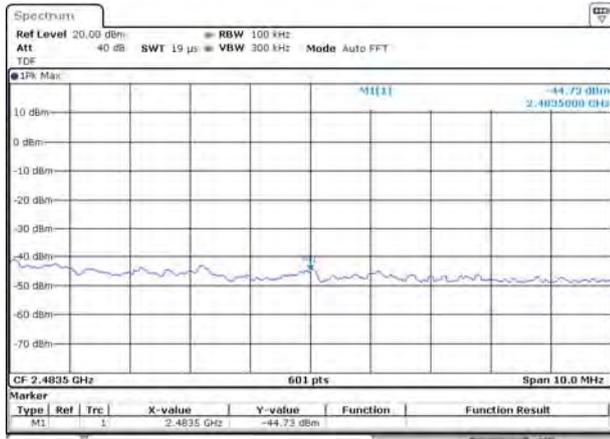


Date: 13 MAR 2021 13:39:16

802.11n-20 MHz HIGH CHANNEL, Reference level

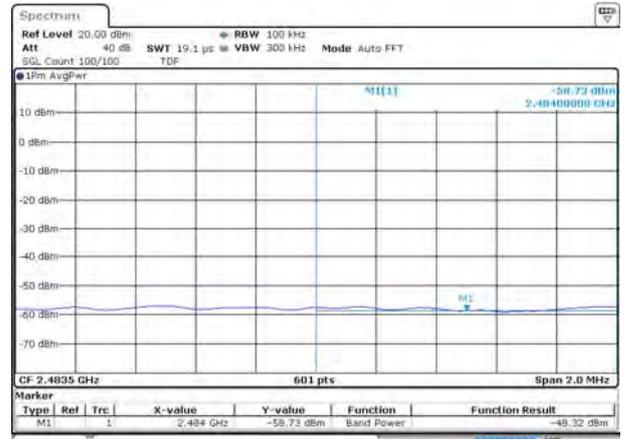


Date: 13 MAR 2021 13:39:26

802.11n-40 MHz LOW CHANNEL, Carrier level

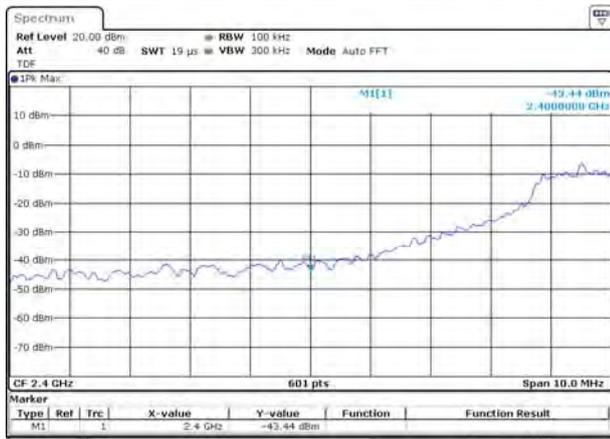


Date: 13 MAR 2021 13:41:38

802.11n-40 MHz LOW CHANNEL, Reference level

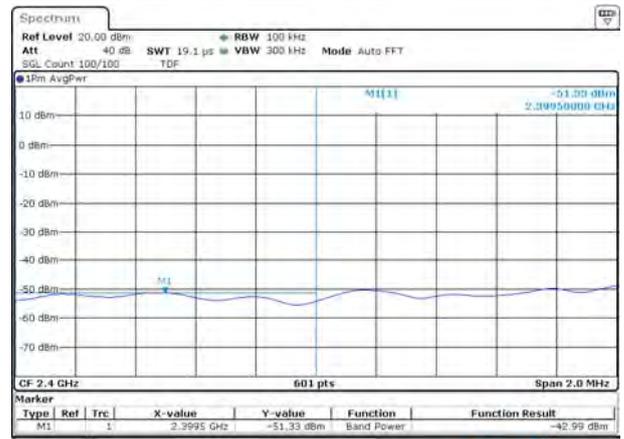


Date: 13 MAR 2021 13:41:50

802.11n-40 MHz HIGH CHANNEL, Carrier level

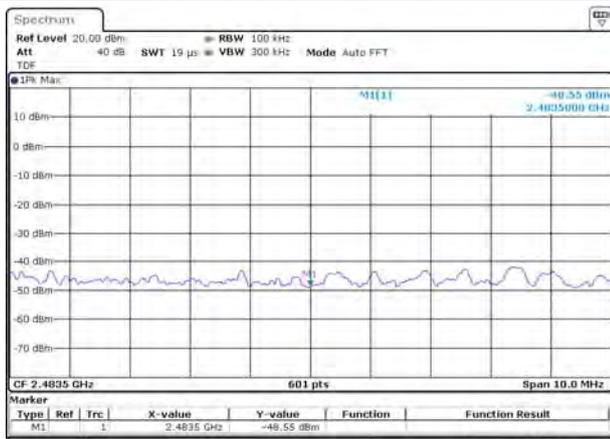

Date: 13 MAR 2021 13:46:47


802.11n-40 MHz HIGH CHANNEL, Reference level

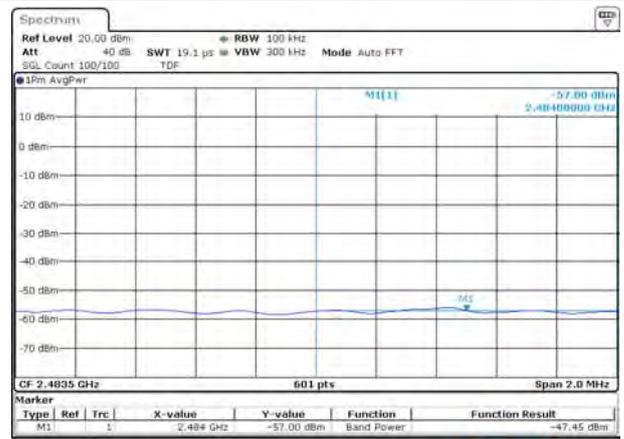

Date: 13 MAR 2021 13:46:55


MIMO-Aux. Antenna

802.11g LOW CHANNEL, Carrier level

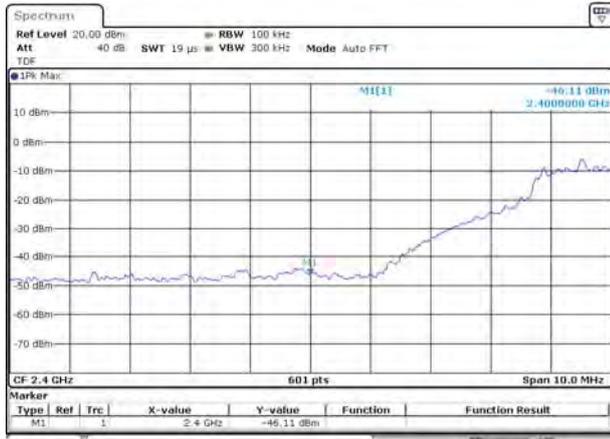


Date: 13 MAR 2021 15:05:37

802.11g LOW CHANNEL, Reference level

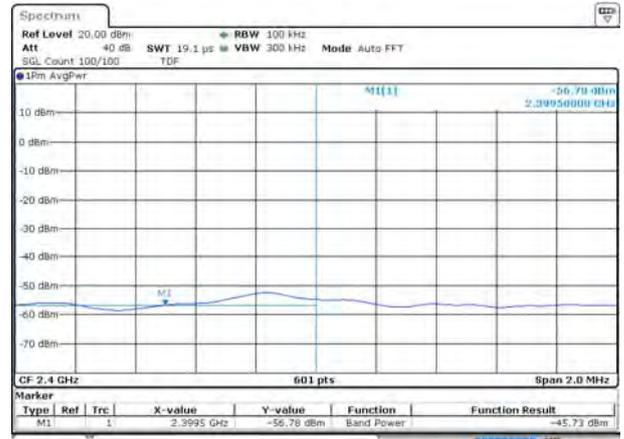


Date: 13 MAR 2021 15:05:46

802.11g HIGH CHANNEL, Carrier level

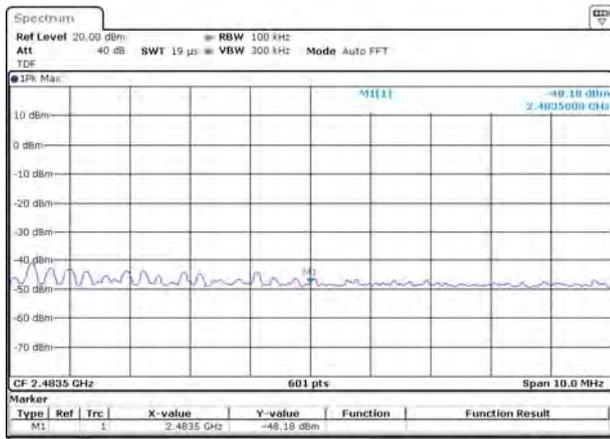


Date: 13 MAR 2021 15:09:22

802.11g HIGH CHANNEL, Reference level

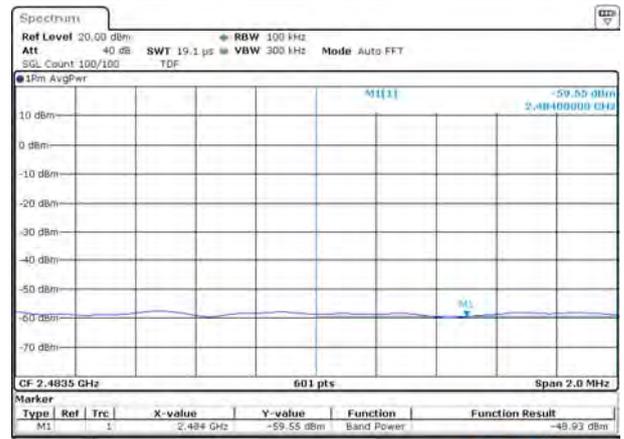


Date: 13 MAR 2021 15:09:26

802.11n-20 MHz LOW CHANNEL, Carrier level

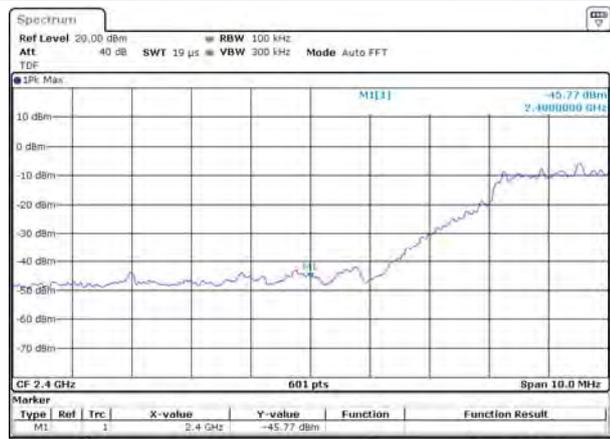


Date: 13 MAR 2021 14:53:09

802.11n-20 MHz LOW CHANNEL, Reference level

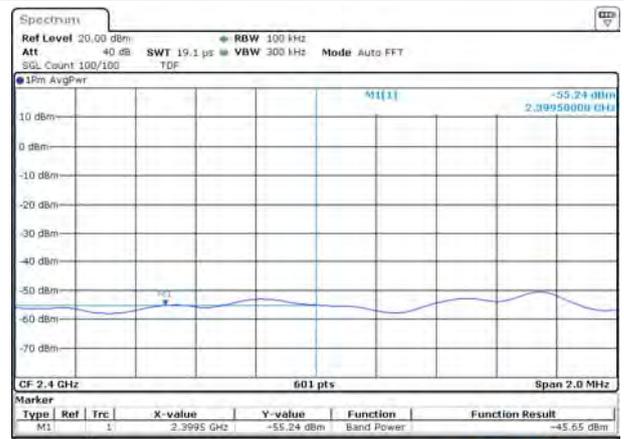


Date: 13 MAR 2021 14:53:16

802.11n-20 MHz HIGH CHANNEL, Carrier level

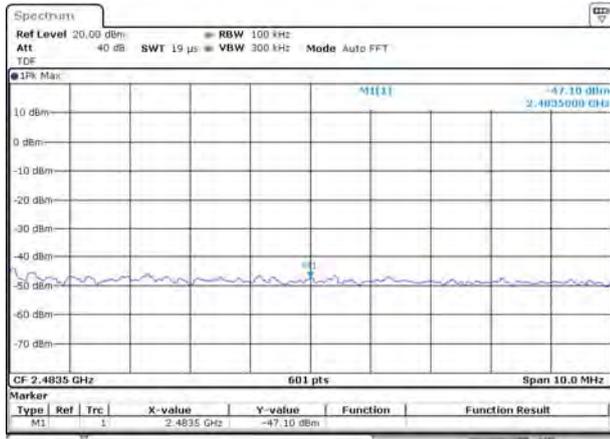


Date: 13 MAR 2021 14:56:57

802.11n-20 MHz HIGH CHANNEL, Reference level

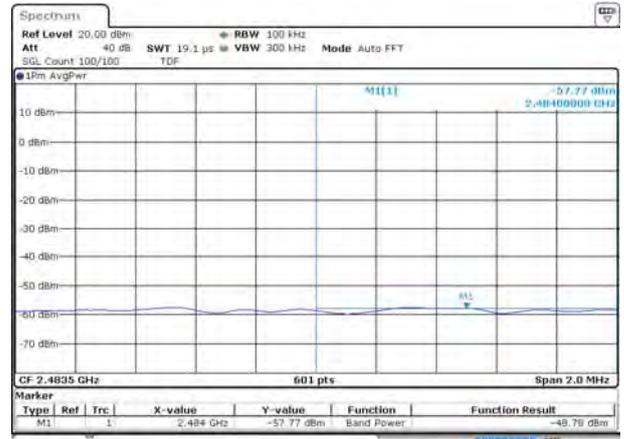


Date: 13 MAR 2021 14:57:06

802.11n-40 MHz LOW CHANNEL, Carrier level

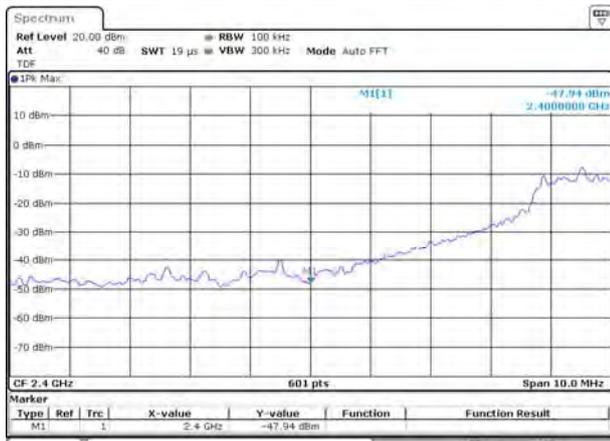


Date: 13 MAR 2021 14:59:20

802.11n-40 MHz LOW CHANNEL, Reference level

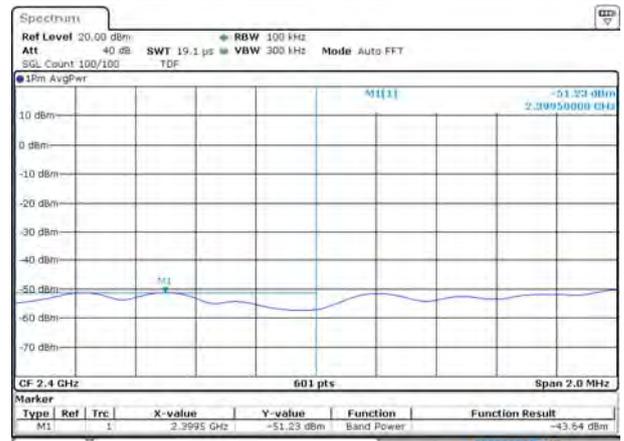


Date: 13 MAR 2021 14:59:30

802.11n-40 MHz HIGH CHANNEL, Carrier level

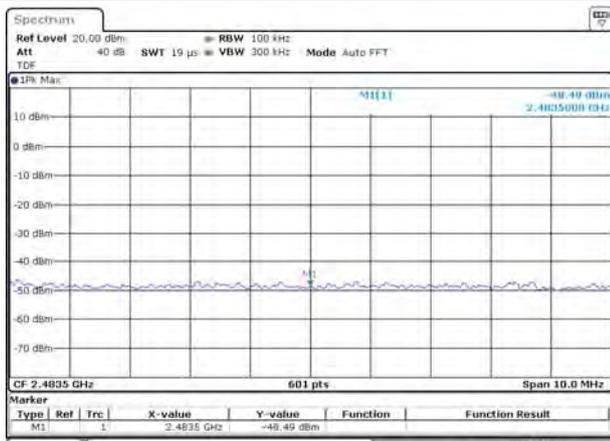

Date: 13 MAR 2021 15:03:14

802.11n-40 MHz HIGH CHANNEL, Reference level

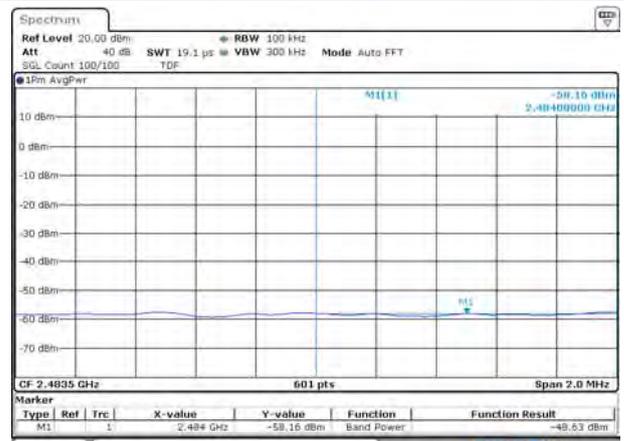


Date: 13 MAR 2021 15:03:22

A.5 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.
 Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (230 VAC, 50 Hz) shown here.


Test Data and Plots

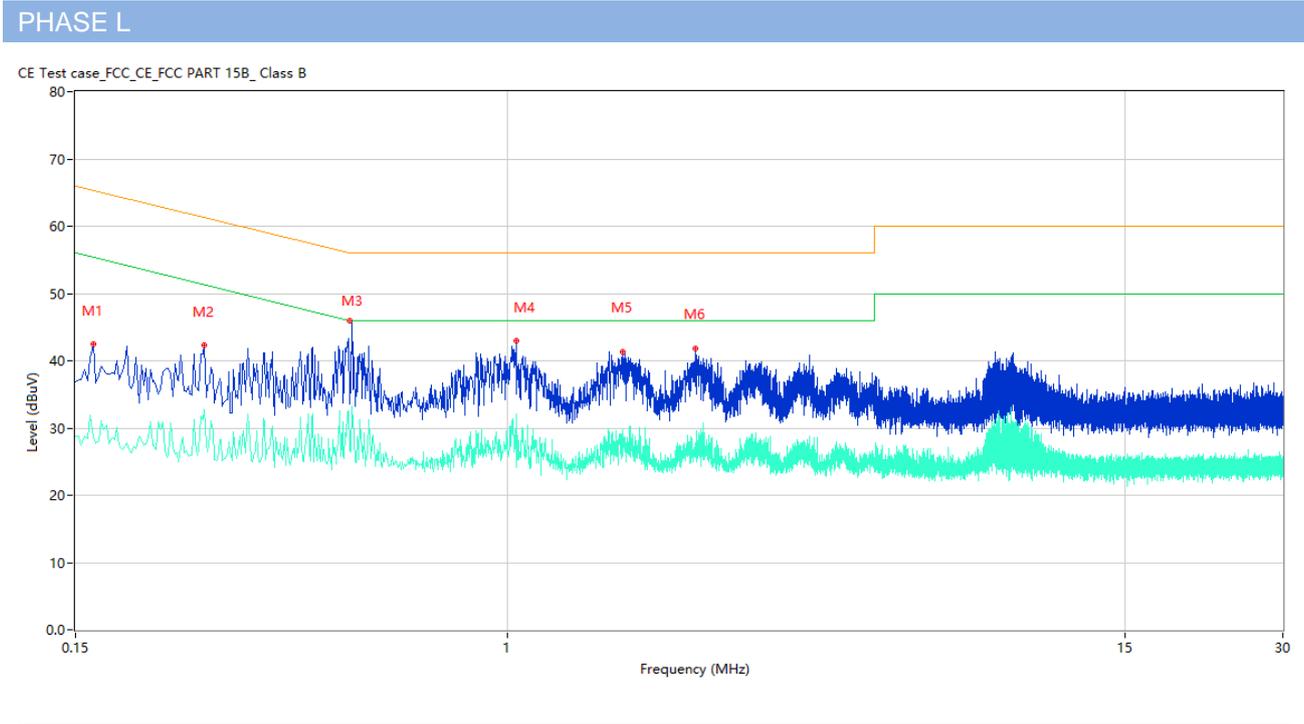

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	42.55	10.40	65.36	-22.81	Peak	L	Pass
1**	0.162	28.62	10.40	55.36	-26.74	AV	L	Pass
2	0.264	42.29	10.34	61.30	-19.01	Peak	L	Pass
2**	0.264	32.80	10.34	51.30	-18.50	AV	L	Pass
3	0.504	46.05	10.30	56.00	-9.95	Peak	L	Pass
3**	0.504	33.21	10.30	46.00	-12.79	AV	L	Pass
4	1.038	43.00	10.23	56.00	-13.00	Peak	L	Pass
4**	1.038	32.12	10.23	46.00	-13.88	AV	L	Pass
5	1.656	41.38	10.26	56.00	-14.62	Peak	L	Pass
5**	1.656	28.90	10.26	46.00	-17.10	AV	L	Pass
6	2.282	41.76	10.28	56.00	-14.24	Peak	L	Pass
6**	2.282	27.73	10.28	46.00	-18.27	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

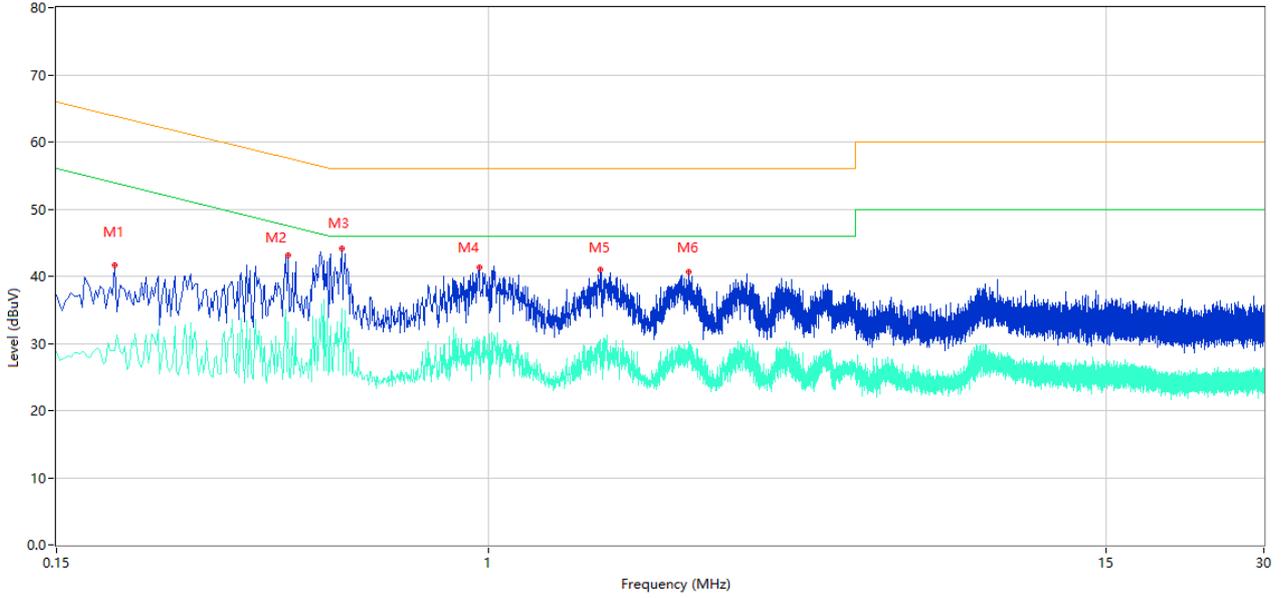

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.194	41.63	10.38	63.86	-22.23	Peak	N	Pass
1**	0.194	29.01	10.38	53.86	-24.85	AV	N	Pass
2	0.414	43.11	10.31	57.57	-14.46	Peak	N	Pass
2**	0.414	33.25	10.31	47.57	-14.32	AV	N	Pass
3	0.524	44.13	10.30	56.00	-11.87	Peak	N	Pass
3**	0.524	35.17	10.30	46.00	-10.83	AV	N	Pass
4	0.958	41.28	10.24	56.00	-14.72	Peak	N	Pass
4**	0.958	29.51	10.24	46.00	-16.49	AV	N	Pass
5	1.632	40.97	10.26	56.00	-15.03	Peak	N	Pass
5**	1.632	30.65	10.26	46.00	-15.35	AV	N	Pass
6	2.406	40.63	10.27	56.00	-15.37	Peak	N	Pass
6**	2.406	30.27	10.27	46.00	-15.73	AV	N	Pass

A.6 Radiated Emission

Note¹: The symbol of “--” in the table which means not application.


Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


Test Data and Plots

30 MHz to 1 GHz, ANT H

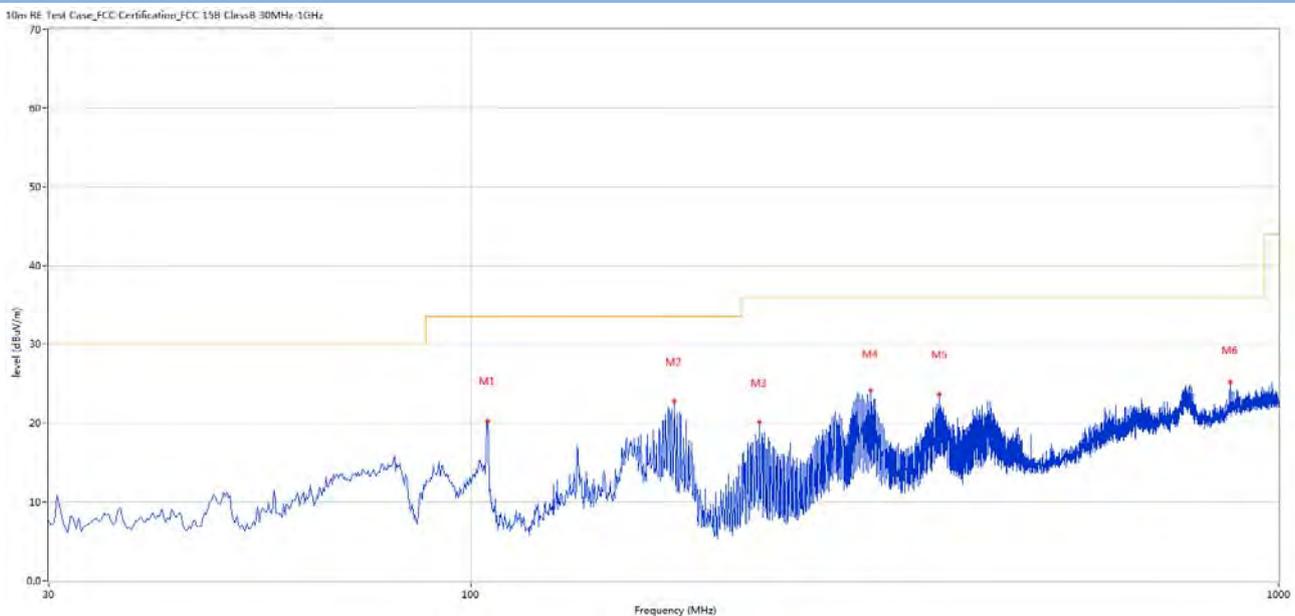

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	104.914	20.25	-29.67	33.5	-13.25	Peak	337.00	300	Horizontal	Pass
2	178.615	22.71	-27.86	33.5	-10.79	Peak	28.00	400	Horizontal	Pass
3	227.831	20.10	-28.26	36.0	-15.90	Peak	58.00	400	Horizontal	Pass
4	312.684	24.14	-25.46	36.0	-11.86	Peak	261.00	300	Horizontal	Pass
5	379.598	23.60	-23.53	36.0	-12.40	Peak	347.00	300	Horizontal	Pass
6	870.052	25.12	-13.12	36.0	-10.88	Peak	9.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

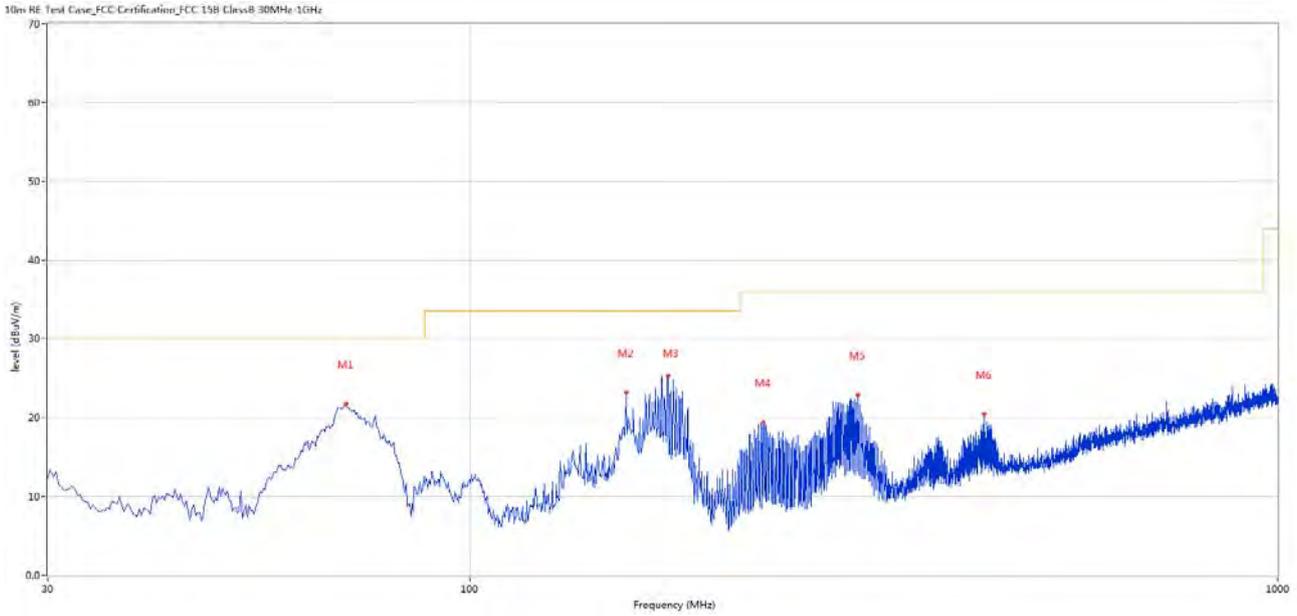

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	70.245	21.65	-29.80	30.0	-8.35	Peak	360.00	200	Vertical	Pass
2	156.068	23.11	-25.70	33.5	-10.39	Peak	211.00	100	Vertical	Pass
3	175.706	25.28	-27.52	33.5	-8.22	Peak	19.00	100	Vertical	Pass
4	230.740	19.34	-27.99	36.0	-16.66	Peak	206.00	100	Vertical	Pass
5	302.017	22.83	-25.59	36.0	-13.17	Peak	110.00	100	Vertical	Pass
6	433.177	20.38	-22.09	36.0	-15.62	Peak	221.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Main Antenna

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1620.000	39.13	-17.69	74.0	-34.87	Peak	12.00	150	Horizontal	Pass
1**	1620.000	28.60	-17.69	54.0	-25.40	AV	12.00	150	Horizontal	Pass
2	2410.400	101.86	-13.14	74.0	27.86	Peak	151.00	150	Horizontal	N/A
2**	2410.400	98.98	-13.14	54.0	44.98	AV	151.00	150	Horizontal	N/A
3	3390.800	44.63	-8.51	74.0	-29.37	Peak	115.00	150	Horizontal	Pass
3**	3390.800	35.20	-8.51	54.0	-18.80	AV	115.00	150	Horizontal	Pass
4	4824.200	48.58	-3.66	74.0	-25.42	Peak	163.00	150	Horizontal	Pass
4**	4824.200	45.23	-3.66	54.0	-8.77	AV	163.00	150	Horizontal	Pass
5	6709.800	52.38	-1.41	74.0	-21.62	Peak	59.00	150	Horizontal	Pass
5**	6709.800	42.65	-1.41	54.0	-11.35	AV	59.00	150	Horizontal	Pass
6	11677.338	51.35	2.45	74.0	-22.65	Peak	138.00	150	Horizontal	Pass
6**	11677.338	42.30	2.45	54.0	-11.70	AV	138.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.400	39.36	-17.78	74.0	-34.64	Peak	345.00	150	Vertical	Pass
1**	1494.400	29.21	-17.78	54.0	-24.79	AV	345.00	150	Vertical	Pass
2	2410.400	93.67	-13.14	74.0	19.67	Peak	115.00	150	Vertical	N/A
2**	2410.400	90.81	-13.14	54.0	36.81	AV	115.00	150	Vertical	N/A
3	2983.300	45.07	-10.23	74.0	-28.93	Peak	56.00	150	Vertical	Pass
3**	2983.300	35.49	-10.23	54.0	-18.51	AV	56.00	150	Vertical	Pass
4	4837.200	48.57	-3.59	74.0	-25.43	Peak	339.00	150	Vertical	Pass
4**	4837.200	38.14	-3.59	54.0	-15.86	AV	339.00	150	Vertical	Pass
5	6973.000	53.14	-0.39	74.0	-20.86	Peak	68.00	150	Vertical	Pass
5**	6973.000	43.48	-0.39	54.0	-10.52	AV	68.00	150	Vertical	Pass
6	11713.275	51.69	2.10	74.0	-22.31	Peak	179.00	150	Vertical	Pass
6**	11713.275	41.59	2.10	54.0	-12.41	AV	179.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1712.300	39.24	-17.46	74.0	-34.76	Peak	227.00	150	Horizontal	Pass
1**	1712.300	29.22	-17.46	54.0	-24.78	AV	227.00	150	Horizontal	Pass
2	2438.100	101.55	-12.38	74.0	27.55	Peak	150.00	150	Horizontal	N/A
2**	2438.100	98.59	-12.38	54.0	44.59	AV	150.00	150	Horizontal	N/A
3	3226.200	44.65	-8.72	74.0	-29.35	Peak	84.00	150	Horizontal	Pass
3**	3226.200	35.40	-8.72	54.0	-18.60	AV	84.00	150	Horizontal	Pass
4	4873.800	47.96	-3.61	74.0	-26.04	Peak	123.00	150	Horizontal	Pass
4**	4873.800	41.48	-3.61	54.0	-12.52	AV	123.00	150	Horizontal	Pass
5	6976.000	52.84	-0.42	74.0	-21.16	Peak	337.00	150	Horizontal	Pass
5**	6976.000	42.92	-0.42	54.0	-11.08	AV	337.00	150	Horizontal	Pass
6	11672.450	51.92	2.47	74.0	-22.08	Peak	360.00	150	Horizontal	Pass
6**	11672.450	42.21	2.47	54.0	-11.79	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1457.600	38.99	-17.67	74.0	-35.01	Peak	263.00	150	Vertical	Pass
1**	1457.600	29.88	-17.67	54.0	-24.12	AV	263.00	150	Vertical	Pass
2	2438.200	93.43	-12.38	74.0	19.43	Peak	26.00	150	Vertical	N/A
2**	2438.200	90.58	-12.38	54.0	36.58	AV	26.00	150	Vertical	N/A
3	2962.500	44.61	-10.38	74.0	-29.39	Peak	8.00	150	Vertical	Pass
3**	2962.500	35.54	-10.38	54.0	-18.46	AV	8.00	150	Vertical	Pass
4	4130.200	47.75	-5.65	74.0	-26.25	Peak	67.00	150	Vertical	Pass
4**	4130.200	37.71	-5.65	54.0	-16.29	AV	67.00	150	Vertical	Pass
5	6096.000	52.35	-1.46	74.0	-21.65	Peak	147.00	150	Vertical	Pass
5**	6096.000	43.15	-1.46	54.0	-10.85	AV	147.00	150	Vertical	Pass
6	11630.474	51.57	2.34	74.0	-22.43	Peak	117.00	150	Vertical	Pass
6**	11630.474	42.28	2.34	54.0	-11.72	AV	117.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.500	38.83	-17.62	74.0	-35.17	Peak	110.00	150	Horizontal	Pass
1**	1437.500	28.76	-17.62	54.0	-25.24	AV	110.00	150	Horizontal	Pass
2	2463.000	99.94	-13.03	74.0	25.94	Peak	150.00	150	Horizontal	N/A
2**	2463.000	97.09	-13.03	54.0	43.09	AV	150.00	150	Horizontal	N/A
3	3441.000	44.85	-8.17	74.0	-29.15	Peak	116.00	150	Horizontal	Pass
3**	3441.000	34.73	-8.17	54.0	-19.27	AV	116.00	150	Horizontal	Pass
4	4924.000	49.69	-3.83	74.0	-24.31	Peak	124.00	150	Horizontal	Pass
4**	4924.000	44.70	-3.83	54.0	-9.30	AV	124.00	150	Horizontal	Pass
5	6994.800	52.75	-0.44	74.0	-21.25	Peak	293.00	150	Horizontal	Pass
5**	6994.800	42.81	-0.44	54.0	-11.19	AV	293.00	150	Horizontal	Pass
6	14193.750	53.54	3.58	74.0	-20.46	Peak	212.00	150	Horizontal	Pass
6**	14193.750	43.50	3.58	54.0	-10.50	AV	212.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1322.200	39.19	-17.54	74.0	-34.81	Peak	0.00	150	Vertical	Pass
1**	1322.200	29.13	-17.54	54.0	-24.87	AV	0.00	150	Vertical	Pass
2	2463.200	92.60	-13.03	74.0	18.60	Peak	24.00	150	Vertical	N/A
2**	2463.200	89.77	-13.03	54.0	35.77	AV	24.00	150	Vertical	N/A
3	3289.000	44.24	-8.38	74.0	-29.76	Peak	269.00	150	Vertical	Pass
3**	3289.000	34.70	-8.38	54.0	-19.30	AV	269.00	150	Vertical	Pass
4	4923.600	48.37	-3.82	74.0	-25.63	Peak	245.00	150	Vertical	Pass
4**	4923.600	41.02	-3.82	54.0	-12.98	AV	245.00	150	Vertical	Pass
5	6930.600	53.00	-0.35	74.0	-21.00	Peak	360.00	150	Vertical	Pass
5**	6930.600	43.56	-0.35	54.0	-10.44	AV	360.00	150	Vertical	Pass
6	13002.000	51.80	2.92	74.0	-22.20	Peak	117.00	150	Vertical	Pass
6**	13002.000	41.51	2.92	54.0	-12.49	AV	117.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1510.300	41.75	-17.80	74.0	-32.25	Peak	338.00	150	Horizontal	Pass
1**	1510.300	31.60	-17.80	54.0	-22.40	AV	338.00	150	Horizontal	Pass
2	2405.800	103.26	-13.22	74.0	29.26	Peak	191.00	150	Horizontal	N/A
2**	2405.800	96.60	-13.22	54.0	42.60	AV	191.00	150	Horizontal	N/A
3	2981.600	50.32	-10.28	74.0	-23.68	Peak	75.00	150	Horizontal	Pass
3**	2981.600	41.53	-10.28	54.0	-12.47	AV	75.00	150	Horizontal	Pass
4	4796.600	48.79	-3.61	74.0	-25.21	Peak	356.00	150	Horizontal	Pass
4**	4796.600	39.08	-3.61	54.0	-14.92	AV	356.00	150	Horizontal	Pass
5	6880.600	52.78	-0.76	74.0	-21.22	Peak	245.00	150	Horizontal	Pass
5**	6880.600	42.98	-0.76	54.0	-11.02	AV	245.00	150	Horizontal	Pass
6	13267.651	51.42	2.54	74.0	-22.58	Peak	341.00	150	Horizontal	Pass
6**	13267.651	42.35	2.54	54.0	-11.65	AV	341.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1504.300	41.14	-17.84	74.0	-32.86	Peak	330.00	150	Vertical	Pass
1**	1504.300	31.90	-17.84	54.0	-22.10	AV	330.00	150	Vertical	Pass
2	2407.400	96.20	-13.25	74.0	22.20	Peak	268.00	150	Vertical	N/A
2**	2407.400	88.56	-13.25	54.0	34.56	AV	268.00	150	Vertical	N/A
3	2987.900	50.12	-10.14	74.0	-23.88	Peak	133.00	150	Vertical	Pass
3**	2987.900	43.75	-10.14	54.0	-10.25	AV	133.00	150	Vertical	Pass
4	4413.200	47.73	-4.82	74.0	-26.27	Peak	0.00	150	Vertical	Pass
4**	4413.200	38.00	-4.82	54.0	-16.00	AV	0.00	150	Vertical	Pass
5	6856.800	53.18	-1.11	74.0	-20.82	Peak	286.00	150	Vertical	Pass
5**	6856.800	42.66	-1.11	54.0	-11.34	AV	286.00	150	Vertical	Pass
6	11667.276	52.07	2.49	74.0	-21.93	Peak	0.00	150	Vertical	Pass
6**	11667.276	42.46	2.49	54.0	-11.54	AV	0.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1595.200	41.86	-17.83	74.0	-32.14	Peak	177.00	150	Horizontal	Pass
1**	1595.200	32.16	-17.83	54.0	-21.84	AV	177.00	150	Horizontal	Pass
2	2440.400	104.33	-12.45	74.0	30.33	Peak	167.00	150	Horizontal	N/A
2**	2440.400	96.99	-12.45	54.0	42.99	AV	167.00	150	Horizontal	N/A
3	2955.400	51.21	-10.24	74.0	-22.79	Peak	42.00	150	Horizontal	Pass
3**	2955.400	41.03	-10.24	54.0	-12.97	AV	42.00	150	Horizontal	Pass
4	4663.800	47.92	-4.41	74.0	-26.08	Peak	256.00	150	Horizontal	Pass
4**	4663.800	38.18	-4.41	54.0	-15.82	AV	256.00	150	Horizontal	Pass
5	6954.400	52.77	-0.56	74.0	-21.23	Peak	256.00	150	Horizontal	Pass
5**	6954.400	43.30	-0.56	54.0	-10.70	AV	256.00	150	Horizontal	Pass
6	11644.562	51.36	2.50	74.0	-22.64	Peak	92.00	150	Horizontal	Pass
6**	11644.562	41.64	2.50	54.0	-12.36	AV	92.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1458.800	41.64	-17.68	74.0	-32.36	Peak	263.00	150	Vertical	Pass
1**	1458.800	32.30	-17.68	54.0	-21.70	AV	263.00	150	Vertical	Pass
2	2440.100	96.31	-12.45	74.0	22.31	Peak	31.00	150	Vertical	N/A
2**	2440.100	88.41	-12.45	54.0	34.41	AV	31.00	150	Vertical	N/A
3	2997.500	50.55	-10.15	74.0	-23.45	Peak	306.00	150	Vertical	Pass
3**	2997.500	40.70	-10.15	54.0	-13.30	AV	306.00	150	Vertical	Pass
4	4667.600	47.90	-4.47	74.0	-26.10	Peak	176.00	150	Vertical	Pass
4**	4667.600	38.23	-4.47	54.0	-15.77	AV	176.00	150	Vertical	Pass
5	6897.400	53.02	-0.41	74.0	-20.98	Peak	239.00	150	Vertical	Pass
5**	6897.400	43.87	-0.41	54.0	-10.13	AV	239.00	150	Vertical	Pass
6	12338.875	51.68	2.10	74.0	-22.32	Peak	229.00	150	Vertical	Pass
6**	12338.875	41.97	2.10	54.0	-12.03	AV	229.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1435.800	41.26	-17.69	74.0	-32.74	Peak	49.00	150	Horizontal	Pass
1**	1435.800	33.11	-17.69	54.0	-20.89	AV	49.00	150	Horizontal	Pass
2	2460.800	102.06	-13.15	74.0	28.06	Peak	160.00	150	Horizontal	N/A
2**	2460.800	94.90	-13.15	54.0	40.90	AV	160.00	150	Horizontal	N/A
3	2971.700	51.23	-10.57	74.0	-22.77	Peak	28.00	150	Horizontal	Pass
3**	2971.700	41.39	-10.57	54.0	-12.61	AV	28.00	150	Horizontal	Pass
4	4301.400	47.79	-4.89	74.0	-26.21	Peak	346.00	150	Horizontal	Pass
4**	4301.400	38.20	-4.89	54.0	-15.80	AV	346.00	150	Horizontal	Pass
5	6938.400	52.67	-0.41	74.0	-21.33	Peak	91.00	150	Horizontal	Pass
5**	6938.400	42.98	-0.41	54.0	-11.02	AV	91.00	150	Horizontal	Pass
6	11661.525	51.25	2.51	74.0	-22.75	Peak	359.00	150	Horizontal	Pass
6**	11661.525	42.24	2.51	54.0	-11.76	AV	359.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1668.100	41.75	-17.39	74.0	-32.25	Peak	179.00	150	Vertical	Pass
1**	1668.100	32.07	-17.39	54.0	-21.93	AV	179.00	150	Vertical	Pass
2	2463.600	94.70	-13.03	74.0	20.70	Peak	38.00	150	Vertical	N/A
2**	2463.600	86.87	-13.03	54.0	32.87	AV	38.00	150	Vertical	N/A
3	2980.400	50.32	-10.28	74.0	-23.68	Peak	6.00	150	Vertical	Pass
3**	2980.400	41.71	-10.28	54.0	-12.29	AV	6.00	150	Vertical	Pass
4	4563.200	48.46	-4.39	74.0	-25.54	Peak	147.00	150	Vertical	Pass
4**	4563.200	37.78	-4.39	54.0	-16.22	AV	147.00	150	Vertical	Pass
5	6958.400	53.05	-0.54	74.0	-20.95	Peak	189.00	150	Vertical	Pass
5**	6958.400	43.31	-0.54	54.0	-10.69	AV	189.00	150	Vertical	Pass
6	11650.312	51.77	2.55	74.0	-22.23	Peak	107.00	150	Vertical	Pass
6**	11650.312	42.53	2.55	54.0	-11.47	AV	107.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1558.700	41.54	-17.67	74.0	-32.46	Peak	186.00	150	Horizontal	Pass
1**	1558.700	31.79	-17.67	54.0	-22.21	AV	186.00	150	Horizontal	Pass
2	2404.600	104.59	-13.26	74.0	30.59	Peak	153.00	150	Horizontal	N/A
2**	2404.600	96.71	-13.26	54.0	42.71	AV	153.00	150	Horizontal	N/A
3	2985.100	50.33	-10.16	74.0	-23.67	Peak	86.00	150	Horizontal	Pass
3**	2985.100	41.63	-10.16	54.0	-12.37	AV	86.00	150	Horizontal	Pass
4	4811.000	47.97	-3.53	74.0	-26.03	Peak	7.00	150	Horizontal	Pass
4**	4811.000	39.66	-3.53	54.0	-14.34	AV	7.00	150	Horizontal	Pass
5	6976.600	53.19	-0.42	74.0	-20.81	Peak	78.00	150	Horizontal	Pass
5**	6976.600	44.49	-0.42	54.0	-9.51	AV	78.00	150	Horizontal	Pass
6	12268.438	51.48	2.51	74.0	-22.52	Peak	67.00	150	Horizontal	Pass
6**	12268.438	41.97	2.51	54.0	-12.03	AV	67.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1567.200	41.37	-17.60	74.0	-32.63	Peak	275.00	150	Vertical	Pass
1**	1567.200	32.34	-17.60	54.0	-21.66	AV	275.00	150	Vertical	Pass
2	2407.500	96.92	-13.25	74.0	22.92	Peak	122.00	150	Vertical	N/A
2**	2407.500	89.48	-13.25	54.0	35.48	AV	122.00	150	Vertical	N/A
3	2890.300	50.24	-9.86	74.0	-23.76	Peak	307.00	150	Vertical	Pass
3**	2890.300	40.70	-9.86	54.0	-13.30	AV	307.00	150	Vertical	Pass
4	4240.400	47.82	-5.08	74.0	-26.18	Peak	148.00	150	Vertical	Pass
4**	4240.400	38.71	-5.08	54.0	-15.29	AV	148.00	150	Vertical	Pass
5	6981.000	53.14	-0.46	74.0	-20.86	Peak	235.00	150	Vertical	Pass
5**	6981.000	43.44	-0.46	54.0	-10.56	AV	235.00	150	Vertical	Pass
6	11674.750	52.08	2.46	74.0	-21.92	Peak	0.00	150	Vertical	Pass
6**	11674.750	42.19	2.46	54.0	-11.81	AV	0.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1451.800	42.01	-17.66	74.0	-31.99	Peak	33.00	150	Horizontal	Pass
1**	1451.800	31.49	-17.66	54.0	-22.51	AV	33.00	150	Horizontal	Pass
2	2442.000	104.89	-12.51	74.0	30.89	Peak	153.00	150	Horizontal	N/A
2**	2442.000	97.69	-12.51	54.0	43.69	AV	153.00	150	Horizontal	N/A
3	2737.900	50.46	-10.72	74.0	-23.54	Peak	0.00	150	Horizontal	Pass
3**	2737.900	40.72	-10.72	54.0	-13.28	AV	0.00	150	Horizontal	Pass
4	4514.200	47.54	-4.23	74.0	-26.46	Peak	360.00	150	Horizontal	Pass
4**	4514.200	38.36	-4.23	54.0	-15.64	AV	360.00	150	Horizontal	Pass
5	6905.600	52.35	-0.38	74.0	-21.65	Peak	139.00	150	Horizontal	Pass
5**	6905.600	43.16	-0.38	54.0	-10.84	AV	139.00	150	Horizontal	Pass
6	11674.174	51.29	2.46	74.0	-22.71	Peak	299.00	150	Horizontal	Pass
6**	11674.174	42.29	2.46	54.0	-11.71	AV	299.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1759.000	42.32	-17.25	74.0	-31.68	Peak	45.00	150	Vertical	Pass
1**	1759.000	32.65	-17.25	54.0	-21.35	AV	45.00	150	Vertical	Pass
2	2435.800	94.16	-12.44	74.0	20.16	Peak	266.00	150	Vertical	N/A
2**	2435.800	87.34	-12.44	54.0	33.34	AV	266.00	150	Vertical	N/A
3	2996.000	50.38	-10.12	74.0	-23.62	Peak	241.00	150	Vertical	Pass
3**	2996.000	40.81	-10.12	54.0	-13.19	AV	241.00	150	Vertical	Pass
4	4694.600	48.54	-4.49	74.0	-25.46	Peak	84.00	150	Vertical	Pass
4**	4694.600	38.60	-4.49	54.0	-15.40	AV	84.00	150	Vertical	Pass
5	6970.000	52.89	-0.43	74.0	-21.11	Peak	161.00	150	Vertical	Pass
5**	6970.000	43.25	-0.43	54.0	-10.75	AV	161.00	150	Vertical	Pass
6	12119.513	51.92	1.63	74.0	-22.08	Peak	80.00	150	Vertical	Pass
6**	12119.513	40.73	1.63	54.0	-13.27	AV	80.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1469.500	41.93	-17.67	74.0	-32.07	Peak	178.00	150	Horizontal	Pass
1**	1469.500	32.21	-17.67	54.0	-21.79	AV	178.00	150	Horizontal	Pass
2	2463.500	102.33	-13.03	74.0	28.33	Peak	153.00	150	Horizontal	N/A
2**	2463.500	95.11	-13.03	54.0	41.11	AV	153.00	150	Horizontal	N/A
3	2974.400	50.34	-10.44	74.0	-23.66	Peak	34.00	150	Horizontal	Pass
3**	2974.400	40.69	-10.44	54.0	-13.31	AV	34.00	150	Horizontal	Pass
4	4320.600	47.76	-4.91	74.0	-26.24	Peak	358.00	150	Horizontal	Pass
4**	4320.600	37.73	-4.91	54.0	-16.27	AV	358.00	150	Horizontal	Pass
5	6993.400	53.03	-0.41	74.0	-20.97	Peak	358.00	150	Horizontal	Pass
5**	6993.400	43.89	-0.41	54.0	-10.11	AV	358.00	150	Horizontal	Pass
6	11813.325	51.51	0.98	74.0	-22.49	Peak	229.00	150	Horizontal	Pass
6**	11813.325	41.15	0.98	54.0	-12.85	AV	229.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1637.400	42.08	-17.77	74.0	-31.92	Peak	141.00	150	Vertical	Pass
1**	1637.400	32.15	-17.77	54.0	-21.85	AV	141.00	150	Vertical	Pass
2	2460.100	94.11	-13.16	74.0	20.11	Peak	244.00	150	Vertical	N/A
2**	2460.100	86.36	-13.16	54.0	32.36	AV	244.00	150	Vertical	N/A
3	2985.400	51.02	-10.15	74.0	-22.98	Peak	99.00	150	Vertical	Pass
3**	2985.400	41.86	-10.15	54.0	-12.14	AV	99.00	150	Vertical	Pass
4	4531.400	48.03	-4.24	74.0	-25.97	Peak	260.00	150	Vertical	Pass
4**	4531.400	38.88	-4.24	54.0	-15.12	AV	260.00	150	Vertical	Pass
5	6978.200	52.92	-0.43	74.0	-21.08	Peak	0.00	150	Vertical	Pass
5**	6978.200	43.95	-0.43	54.0	-10.05	AV	0.00	150	Vertical	Pass
6	11707.525	51.22	2.19	74.0	-22.78	Peak	112.00	150	Vertical	Pass
6**	11707.525	41.95	2.19	54.0	-12.05	AV	112.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1515.500	41.97	-17.76	74.0	-32.03	Peak	360.00	150	Horizontal	Pass
1**	1515.500	31.72	-17.76	54.0	-22.28	AV	360.00	150	Horizontal	Pass
2	2404.700	101.35	-13.26	74.0	27.35	Peak	153.00	150	Horizontal	N/A
2**	2404.700	93.84	-13.26	54.0	39.84	AV	153.00	150	Horizontal	N/A
3	2891.400	50.50	-9.88	74.0	-23.50	Peak	276.00	150	Horizontal	Pass
3**	2891.400	40.61	-9.88	54.0	-13.39	AV	276.00	150	Horizontal	Pass
4	4510.000	48.23	-4.29	74.0	-25.77	Peak	0.00	150	Horizontal	Pass
4**	4510.000	38.35	-4.29	54.0	-15.65	AV	0.00	150	Horizontal	Pass
5	6982.400	52.95	-0.51	74.0	-21.05	Peak	35.00	150	Horizontal	Pass
5**	6982.400	43.66	-0.51	54.0	-10.34	AV	35.00	150	Horizontal	Pass
6	12226.463	51.98	2.61	74.0	-22.02	Peak	1.00	150	Horizontal	Pass
6**	12226.463	42.11	2.61	54.0	-11.89	AV	1.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1291.100	42.00	-17.53	74.0	-32.00	Peak	168.00	150	Vertical	Pass
1**	1291.100	31.77	-17.53	54.0	-22.23	AV	168.00	150	Vertical	Pass
2	2404.800	91.86	-13.25	74.0	17.86	Peak	113.00	150	Vertical	N/A
2**	2404.800	84.73	-13.25	54.0	30.73	AV	113.00	150	Vertical	N/A
3	2976.700	50.38	-10.41	74.0	-23.62	Peak	0.00	150	Vertical	Pass
3**	2976.700	41.06	-10.41	54.0	-12.94	AV	0.00	150	Vertical	Pass
4	4692.800	48.27	-4.51	74.0	-25.73	Peak	175.00	150	Vertical	Pass
4**	4692.800	38.80	-4.51	54.0	-15.20	AV	175.00	150	Vertical	Pass
5	6995.200	52.62	-0.44	74.0	-21.38	Peak	275.00	150	Vertical	Pass
5**	6995.200	43.51	-0.44	54.0	-10.49	AV	275.00	150	Vertical	Pass
6	12255.787	51.33	2.61	74.0	-22.67	Peak	185.00	150	Vertical	Pass
6**	12255.787	41.84	2.61	54.0	-12.16	AV	185.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1666.000	41.96	-17.39	74.0	-32.04	Peak	321.00	150	Horizontal	Pass
1**	1666.000	32.77	-17.39	54.0	-21.23	AV	321.00	150	Horizontal	Pass
2	2440.200	102.81	-12.45	74.0	28.81	Peak	151.00	150	Horizontal	N/A
2**	2440.200	95.22	-12.45	54.0	41.22	AV	151.00	150	Horizontal	N/A
3	2951.700	50.72	-10.26	74.0	-23.28	Peak	357.00	150	Horizontal	Pass
3**	2951.700	41.02	-10.26	54.0	-12.98	AV	357.00	150	Horizontal	Pass
4	4430.800	47.74	-4.46	74.0	-26.26	Peak	0.00	150	Horizontal	Pass
4**	4430.800	37.46	-4.46	54.0	-16.54	AV	0.00	150	Horizontal	Pass
5	6953.200	52.81	-0.54	74.0	-21.19	Peak	201.00	150	Horizontal	Pass
5**	6953.200	43.68	-0.54	54.0	-10.32	AV	201.00	150	Horizontal	Pass
6	11671.300	50.97	2.47	74.0	-23.03	Peak	334.00	150	Horizontal	Pass
6**	11671.300	42.47	2.47	54.0	-11.53	AV	334.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1672.300	42.04	-17.46	74.0	-31.96	Peak	11.00	150	Vertical	Pass
1**	1672.300	32.22	-17.46	54.0	-21.78	AV	11.00	150	Vertical	Pass
2	2439.800	91.75	-12.44	74.0	17.75	Peak	111.00	150	Vertical	N/A
2**	2439.800	83.88	-12.44	54.0	29.88	AV	111.00	150	Vertical	N/A
3	2988.000	50.18	-10.14	74.0	-23.82	Peak	35.00	150	Vertical	Pass
3**	2988.000	40.61	-10.14	54.0	-13.39	AV	35.00	150	Vertical	Pass
4	4635.600	48.07	-4.26	74.0	-25.93	Peak	272.00	150	Vertical	Pass
4**	4635.600	38.47	-4.26	54.0	-15.53	AV	272.00	150	Vertical	Pass
5	6993.600	53.23	-0.41	74.0	-20.77	Peak	146.00	150	Vertical	Pass
5**	6993.600	43.34	-0.41	54.0	-10.66	AV	146.00	150	Vertical	Pass
6	11722.188	51.01	1.97	74.0	-22.99	Peak	200.00	150	Vertical	Pass
6**	11722.188	42.39	1.97	54.0	-11.61	AV	200.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1455.200	42.10	-17.62	74.0	-31.90	Peak	0.00	150	Horizontal	Pass
1**	1455.200	32.10	-17.62	54.0	-21.90	AV	0.00	150	Horizontal	Pass
2	2443.000	103.05	-12.57	74.0	29.05	Peak	145.00	150	Horizontal	N/A
2**	2443.000	95.92	-12.57	54.0	41.92	AV	145.00	150	Horizontal	N/A
3	2963.600	50.24	-10.44	74.0	-23.76	Peak	209.00	150	Horizontal	Pass
3**	2963.600	41.59	-10.44	54.0	-12.41	AV	209.00	150	Horizontal	Pass
4	4613.400	47.52	-4.33	74.0	-26.48	Peak	20.00	150	Horizontal	Pass
4**	4613.400	37.95	-4.33	54.0	-16.05	AV	20.00	150	Horizontal	Pass
5	6926.600	52.59	-0.37	74.0	-21.41	Peak	143.00	150	Horizontal	Pass
5**	6926.600	43.34	-0.37	54.0	-10.66	AV	143.00	150	Horizontal	Pass
6	11757.263	51.63	1.47	74.0	-22.37	Peak	199.00	150	Horizontal	Pass
6**	11757.263	41.72	1.47	54.0	-12.28	AV	199.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1363.600	41.84	-17.53	74.0	-32.16	Peak	264.00	150	Vertical	Pass
1**	1363.600	31.33	-17.53	54.0	-22.67	AV	264.00	150	Vertical	Pass
2	2442.400	93.56	-12.53	74.0	19.56	Peak	118.00	150	Vertical	N/A
2**	2442.400	85.39	-12.53	54.0	31.39	AV	118.00	150	Vertical	N/A
3	2966.500	50.61	-10.52	74.0	-23.39	Peak	106.00	150	Vertical	Pass
3**	2966.500	41.89	-10.52	54.0	-12.11	AV	106.00	150	Vertical	Pass
4	4650.400	48.03	-4.19	74.0	-25.97	Peak	348.00	150	Vertical	Pass
4**	4650.400	38.73	-4.19	54.0	-15.27	AV	348.00	150	Vertical	Pass
5	6898.000	54.38	-0.39	74.0	-19.62	Peak	45.00	150	Vertical	Pass
5**	6898.000	44.79	-0.39	54.0	-9.21	AV	45.00	150	Vertical	Pass
6	12180.175	51.38	2.29	74.0	-22.62	Peak	35.00	150	Vertical	Pass
6**	12180.175	41.15	2.29	54.0	-12.85	AV	35.00	150	Vertical	Pass

Aux. Antenna
1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1855.900	43.50	-16.48	74.0	-30.50	Peak	97.00	150	Horizontal	Pass
1**	1855.900	33.76	-16.48	54.0	-20.24	AV	97.00	150	Horizontal	Pass
2	2410.100	90.76	-13.14	74.0	16.76	Peak	183.00	150	Horizontal	N/A
2**	2410.100	88.05	-13.14	54.0	34.05	AV	183.00	150	Horizontal	N/A
3	2728.200	50.16	-10.70	74.0	-23.84	Peak	231.00	150	Horizontal	Pass
3**	2728.200	40.35	-10.70	54.0	-13.65	AV	231.00	150	Horizontal	Pass
4	4823.800	49.59	-3.67	74.0	-24.41	Peak	140.00	150	Horizontal	Pass
4**	4823.800	43.16	-3.67	54.0	-10.84	AV	140.00	150	Horizontal	Pass
5	6335.400	52.85	-1.41	74.0	-21.15	Peak	132.00	150	Horizontal	Pass
5**	6335.400	43.14	-1.41	54.0	-10.86	AV	132.00	150	Horizontal	Pass
6	11695.450	51.15	2.34	74.0	-22.85	Peak	14.00	150	Horizontal	Pass
6**	11695.450	41.82	2.34	54.0	-12.18	AV	14.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1506.600	41.92	-17.79	74.0	-32.08	Peak	339.00	150	Vertical	Pass
1**	1506.600	31.91	-17.79	54.0	-22.09	AV	339.00	150	Vertical	Pass
2	2410.300	85.07	-13.14	74.0	11.07	Peak	118.00	150	Vertical	N/A
2**	2410.300	82.23	-13.14	54.0	28.23	AV	118.00	150	Vertical	N/A
3	2961.700	50.14	-10.38	74.0	-23.86	Peak	153.00	150	Vertical	Pass
3**	2961.700	41.11	-10.38	54.0	-12.89	AV	153.00	150	Vertical	Pass
4	4520.400	47.57	-4.15	74.0	-26.43	Peak	125.00	150	Vertical	Pass
4**	4520.400	38.69	-4.15	54.0	-15.31	AV	125.00	150	Vertical	Pass
5	6964.200	53.23	-0.52	74.0	-20.77	Peak	125.00	150	Vertical	Pass
5**	6964.200	44.11	-0.52	54.0	-9.89	AV	125.00	150	Vertical	Pass
6	11681.651	50.99	2.43	74.0	-23.01	Peak	25.00	150	Vertical	Pass
6**	11681.651	41.87	2.43	54.0	-12.13	AV	25.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1591.600	42.23	-17.79	74.0	-31.77	Peak	360.00	150	Horizontal	Pass
1**	1591.600	32.21	-17.79	54.0	-21.79	AV	360.00	150	Horizontal	Pass
2	2438.500	91.22	-12.39	74.0	17.22	Peak	182.00	150	Horizontal	N/A
2**	2438.500	88.30	-12.39	54.0	34.30	AV	182.00	150	Horizontal	N/A
3	2994.000	49.95	-10.06	74.0	-24.05	Peak	195.00	150	Horizontal	Pass
3**	2994.000	41.22	-10.06	54.0	-12.78	AV	195.00	150	Horizontal	Pass
4	4874.200	48.22	-3.63	74.0	-25.78	Peak	130.00	150	Horizontal	Pass
4**	4874.200	44.47	-3.63	54.0	-9.53	AV	130.00	150	Horizontal	Pass
5	6882.200	52.89	-0.66	74.0	-21.11	Peak	273.00	150	Horizontal	Pass
5**	6882.200	43.02	-0.66	54.0	-10.98	AV	273.00	150	Horizontal	Pass
6	12353.250	51.36	2.02	74.0	-22.64	Peak	98.00	150	Horizontal	Pass
6**	12353.250	41.98	2.02	54.0	-12.02	AV	98.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1634.500	41.59	-17.75	74.0	-32.41	Peak	170.00	150	Vertical	Pass
1**	1634.500	31.73	-17.75	54.0	-22.27	AV	170.00	150	Vertical	Pass
2	2438.400	85.41	-12.39	74.0	11.41	Peak	135.00	150	Vertical	N/A
2**	2438.400	82.48	-12.39	54.0	28.48	AV	135.00	150	Vertical	N/A
3	2979.100	50.35	-10.29	74.0	-23.65	Peak	220.00	150	Vertical	Pass
3**	2979.100	41.44	-10.29	54.0	-12.56	AV	220.00	150	Vertical	Pass
4	4525.600	47.52	-4.15	74.0	-26.48	Peak	60.00	150	Vertical	Pass
4**	4525.600	37.75	-4.15	54.0	-16.25	AV	60.00	150	Vertical	Pass
5	6945.400	53.02	-0.41	74.0	-20.98	Peak	285.00	150	Vertical	Pass
5**	6945.400	43.64	-0.41	54.0	-10.36	AV	285.00	150	Vertical	Pass
6	12795.412	52.01	2.43	74.0	-21.99	Peak	356.00	150	Vertical	Pass
6**	12795.412	42.25	2.43	54.0	-11.75	AV	356.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1748.000	41.84	-17.30	74.0	-32.16	Peak	26.00	150	Horizontal	Pass
1**	1748.000	32.66	-17.30	54.0	-21.34	AV	26.00	150	Horizontal	Pass
2	2463.100	90.80	-13.03	74.0	16.80	Peak	179.00	150	Horizontal	N/A
2**	2463.100	87.98	-13.03	54.0	33.98	AV	179.00	150	Horizontal	N/A
3	2952.700	50.53	-10.28	74.0	-23.47	Peak	26.00	150	Horizontal	Pass
3**	2952.700	40.99	-10.28	54.0	-13.01	AV	26.00	150	Horizontal	Pass
4	4924.000	50.32	-3.83	74.0	-23.68	Peak	137.00	150	Horizontal	Pass
4**	4924.000	47.31	-3.83	54.0	-6.69	AV	137.00	150	Horizontal	Pass
5	6959.800	52.52	-0.53	74.0	-21.48	Peak	96.00	150	Horizontal	Pass
5**	6959.800	43.00	-0.53	54.0	-11.00	AV	96.00	150	Horizontal	Pass
6	11681.651	51.21	2.43	74.0	-22.79	Peak	232.00	150	Horizontal	Pass
6**	11681.651	42.83	2.43	54.0	-11.17	AV	232.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1533.700	41.80	-17.80	74.0	-32.20	Peak	198.00	150	Vertical	Pass
1**	1533.700	31.57	-17.80	54.0	-22.43	AV	198.00	150	Vertical	Pass
2	2463.100	83.43	-13.03	74.0	9.43	Peak	323.00	150	Vertical	N/A
2**	2463.100	80.62	-13.03	54.0	26.62	AV	323.00	150	Vertical	N/A
3	2955.600	50.28	-10.23	74.0	-23.72	Peak	3.00	150	Vertical	Pass
3**	2955.600	41.42	-10.23	54.0	-12.58	AV	3.00	150	Vertical	Pass
4	4499.800	48.67	-4.37	74.0	-25.33	Peak	154.00	150	Vertical	Pass
4**	4499.800	38.95	-4.37	54.0	-15.05	AV	154.00	150	Vertical	Pass
5	6887.000	52.87	-0.55	74.0	-21.13	Peak	185.00	150	Vertical	Pass
5**	6887.000	43.46	-0.55	54.0	-10.54	AV	185.00	150	Vertical	Pass
6	11820.225	51.67	0.94	74.0	-22.33	Peak	261.00	150	Vertical	Pass
6**	11820.225	42.14	0.94	54.0	-11.86	AV	261.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1573.500	42.09	-17.57	74.0	-31.91	Peak	116.00	150	Horizontal	Pass
1**	1573.500	32.82	-17.57	54.0	-21.18	AV	116.00	150	Horizontal	Pass
2	2406.800	97.67	-13.24	74.0	23.67	Peak	116.00	150	Horizontal	N/A
2**	2406.800	90.49	-13.24	54.0	36.49	AV	116.00	150	Horizontal	N/A
3	2959.700	50.11	-10.39	74.0	-23.89	Peak	237.00	150	Horizontal	Pass
3**	2959.700	41.13	-10.39	54.0	-12.87	AV	237.00	150	Horizontal	Pass
4	4476.400	47.51	-3.94	74.0	-26.49	Peak	25.00	150	Horizontal	Pass
4**	4476.400	38.65	-3.94	54.0	-15.35	AV	25.00	150	Horizontal	Pass
5	6931.000	52.81	-0.35	74.0	-21.19	Peak	196.00	150	Horizontal	Pass
5**	6931.000	44.31	-0.35	54.0	-9.69	AV	196.00	150	Horizontal	Pass
6	11263.912	50.92	0.18	74.0	-23.08	Peak	186.00	150	Horizontal	Pass
6**	11263.912	40.55	0.18	54.0	-13.45	AV	186.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.300	41.38	-17.77	74.0	-32.62	Peak	263.00	150	Vertical	Pass
1**	1531.300	32.10	-17.77	54.0	-21.90	AV	263.00	150	Vertical	Pass
2	2405.800	93.33	-13.22	74.0	19.33	Peak	52.00	150	Vertical	N/A
2**	2405.800	85.77	-13.22	54.0	31.77	AV	52.00	150	Vertical	N/A
3	2979.200	50.27	-10.29	74.0	-23.73	Peak	225.00	150	Vertical	Pass
3**	2979.200	41.13	-10.29	54.0	-12.87	AV	225.00	150	Vertical	Pass
4	4694.400	47.49	-4.49	74.0	-26.51	Peak	344.00	150	Vertical	Pass
4**	4694.400	37.96	-4.49	54.0	-16.04	AV	344.00	150	Vertical	Pass
5	6239.200	52.43	-1.81	74.0	-21.57	Peak	5.00	150	Vertical	Pass
5**	6239.200	42.15	-1.81	54.0	-11.85	AV	5.00	150	Vertical	Pass
6	11650.888	51.18	2.55	74.0	-22.82	Peak	149.00	150	Vertical	Pass
6**	11650.888	42.16	2.55	54.0	-11.84	AV	149.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1665.700	42.28	-17.38	74.0	-31.72	Peak	333.00	150	Horizontal	Pass
1**	1665.700	32.69	-17.38	54.0	-21.31	AV	333.00	150	Horizontal	Pass
2	2439.300	94.05	-12.42	74.0	20.05	Peak	179.00	150	Horizontal	N/A
2**	2439.300	86.12	-12.42	54.0	32.12	AV	179.00	150	Horizontal	N/A
3	2982.700	50.51	-10.25	74.0	-23.49	Peak	47.00	150	Horizontal	Pass
3**	2982.700	42.03	-10.25	54.0	-11.97	AV	47.00	150	Horizontal	Pass
4	4453.000	48.39	-4.25	74.0	-25.61	Peak	195.00	150	Horizontal	Pass
4**	4453.000	38.20	-4.25	54.0	-15.80	AV	195.00	150	Horizontal	Pass
5	6937.800	52.62	-0.41	74.0	-21.38	Peak	360.00	150	Horizontal	Pass
5**	6937.800	43.38	-0.41	54.0	-10.62	AV	360.00	150	Horizontal	Pass
6	12331.112	51.89	2.14	74.0	-22.11	Peak	63.00	150	Horizontal	Pass
6**	12331.112	42.04	2.14	54.0	-11.96	AV	63.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1641.800	41.59	-17.76	74.0	-32.41	Peak	312.00	150	Vertical	Pass
1**	1641.800	32.08	-17.76	54.0	-21.92	AV	312.00	150	Vertical	Pass
2	2442.200	87.98	-12.52	74.0	13.98	Peak	128.00	150	Vertical	N/A
2**	2442.200	79.68	-12.52	54.0	25.68	AV	128.00	150	Vertical	N/A
3	2991.600	51.18	-10.21	74.0	-22.82	Peak	187.00	150	Vertical	Pass
3**	2991.600	41.20	-10.21	54.0	-12.80	AV	187.00	150	Vertical	Pass
4	4852.800	48.42	-3.51	74.0	-25.58	Peak	357.00	150	Vertical	Pass
4**	4852.800	38.02	-3.51	54.0	-15.98	AV	357.00	150	Vertical	Pass
5	6929.200	53.13	-0.36	74.0	-20.87	Peak	85.00	150	Vertical	Pass
5**	6929.200	43.92	-0.36	54.0	-10.08	AV	85.00	150	Vertical	Pass
6	13004.888	51.85	2.93	74.0	-22.15	Peak	360.00	150	Vertical	Pass
6**	13004.888	42.53	2.93	54.0	-11.47	AV	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1533.600	41.86	-17.79	74.0	-32.14	Peak	83.00	150	Horizontal	Pass
1**	1533.600	31.60	-17.79	54.0	-22.40	AV	83.00	150	Horizontal	Pass
2	2469.200	92.91	-12.82	74.0	18.91	Peak	178.00	150	Horizontal	N/A
2**	2469.200	85.22	-12.82	54.0	31.22	AV	178.00	150	Horizontal	N/A
3	2701.800	50.22	-11.57	74.0	-23.78	Peak	104.00	150	Horizontal	Pass
3**	2701.800	39.71	-11.57	54.0	-14.29	AV	104.00	150	Horizontal	Pass
4	4513.400	47.26	-4.25	74.0	-26.74	Peak	360.00	150	Horizontal	Pass
4**	4513.400	39.25	-4.25	54.0	-14.75	AV	360.00	150	Horizontal	Pass
5	6915.000	52.36	-0.15	74.0	-21.64	Peak	17.00	150	Horizontal	Pass
5**	6915.000	43.63	-0.15	54.0	-10.37	AV	17.00	150	Horizontal	Pass
6	11652.037	51.38	2.55	74.0	-22.62	Peak	230.00	150	Horizontal	Pass
6**	11652.037	42.21	2.55	54.0	-11.79	AV	230.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1619.500	41.49	-17.69	74.0	-32.51	Peak	129.00	150	Vertical	Pass
1**	1619.500	32.55	-17.69	54.0	-21.45	AV	129.00	150	Vertical	Pass
2	2469.400	87.88	-12.81	74.0	13.88	Peak	129.00	150	Vertical	N/A
2**	2469.400	80.68	-12.81	54.0	26.68	AV	129.00	150	Vertical	N/A
3	2968.500	50.71	-10.49	74.0	-23.29	Peak	218.00	150	Vertical	Pass
3**	2968.500	41.28	-10.49	54.0	-12.72	AV	218.00	150	Vertical	Pass
4	4291.400	47.58	-4.76	74.0	-26.42	Peak	360.00	150	Vertical	Pass
4**	4291.400	38.06	-4.76	54.0	-15.94	AV	360.00	150	Vertical	Pass
5	6931.000	53.00	-0.35	74.0	-21.00	Peak	144.00	150	Vertical	Pass
5**	6931.000	43.03	-0.35	54.0	-10.97	AV	144.00	150	Vertical	Pass
6	11632.775	51.18	2.37	74.0	-22.82	Peak	317.00	150	Vertical	Pass
6**	11632.775	42.16	2.37	54.0	-11.84	AV	317.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1561.600	42.13	-17.66	74.0	-31.87	Peak	279.00	150	Horizontal	Pass
1**	1561.600	33.82	-17.66	54.0	-20.18	AV	279.00	150	Horizontal	Pass
2	2406.200	95.87	-13.23	74.0	21.87	Peak	98.00	150	Horizontal	N/A
2**	2406.200	88.18	-13.23	54.0	34.18	AV	98.00	150	Horizontal	N/A
3	2728.800	50.79	-10.69	74.0	-23.21	Peak	184.00	150	Horizontal	Pass
3**	2728.800	40.11	-10.69	54.0	-13.89	AV	184.00	150	Horizontal	Pass
4	4253.200	47.42	-4.72	74.0	-26.58	Peak	330.00	150	Horizontal	Pass
4**	4253.200	38.46	-4.72	54.0	-15.54	AV	330.00	150	Horizontal	Pass
5	6910.000	53.32	-0.31	74.0	-20.68	Peak	119.00	150	Horizontal	Pass
5**	6910.000	43.00	-0.31	54.0	-11.00	AV	119.00	150	Horizontal	Pass
6	11683.088	51.26	2.42	74.0	-22.74	Peak	61.00	150	Horizontal	Pass
6**	11683.088	41.72	2.42	54.0	-12.28	AV	61.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1662.400	41.66	-17.37	74.0	-32.34	Peak	11.00	150	Vertical	Pass
1**	1662.400	32.71	-17.37	54.0	-21.29	AV	11.00	150	Vertical	Pass
2	2406.500	91.61	-13.23	74.0	17.61	Peak	70.00	150	Vertical	N/A
2**	2406.500	84.68	-13.23	54.0	30.68	AV	70.00	150	Vertical	N/A
3	2976.100	50.71	-10.41	74.0	-23.29	Peak	220.00	150	Vertical	Pass
3**	2976.100	41.30	-10.41	54.0	-12.70	AV	220.00	150	Vertical	Pass
4	4304.200	47.97	-4.91	74.0	-26.03	Peak	0.00	150	Vertical	Pass
4**	4304.200	38.37	-4.91	54.0	-15.63	AV	0.00	150	Vertical	Pass
5	6691.000	52.23	-1.25	74.0	-21.77	Peak	90.00	150	Vertical	Pass
5**	6691.000	43.48	-1.25	54.0	-10.52	AV	90.00	150	Vertical	Pass
6	11652.325	51.28	2.55	74.0	-22.72	Peak	218.00	150	Vertical	Pass
6**	11652.325	43.08	2.55	54.0	-10.92	AV	218.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1616.400	41.67	-17.73	74.0	-32.33	Peak	234.00	150	Horizontal	Pass
1**	1616.400	31.65	-17.73	54.0	-22.35	AV	234.00	150	Horizontal	Pass
2	2434.100	94.40	-12.47	74.0	20.40	Peak	96.00	150	Horizontal	N/A
2**	2434.100	86.71	-12.47	54.0	32.71	AV	96.00	150	Horizontal	N/A
3	2986.400	50.18	-10.14	74.0	-23.82	Peak	84.00	150	Horizontal	Pass
3**	2986.400	41.09	-10.14	54.0	-12.91	AV	84.00	150	Horizontal	Pass
4	4847.400	48.23	-3.43	74.0	-25.77	Peak	263.00	150	Horizontal	Pass
4**	4847.400	38.98	-3.43	54.0	-15.02	AV	263.00	150	Horizontal	Pass
5	6969.800	53.59	-0.43	74.0	-20.41	Peak	238.00	150	Horizontal	Pass
5**	6969.800	44.06	-0.43	54.0	-9.94	AV	238.00	150	Horizontal	Pass
6	12237.388	51.31	2.64	74.0	-22.69	Peak	0.00	150	Horizontal	Pass
6**	12237.388	42.09	2.64	54.0	-11.91	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1545.900	41.56	-17.78	74.0	-32.44	Peak	40.00	150	Vertical	Pass
1**	1545.900	31.84	-17.78	54.0	-22.16	AV	40.00	150	Vertical	Pass
2	2440.300	89.34	-12.45	74.0	15.34	Peak	259.00	150	Vertical	N/A
2**	2440.300	82.03	-12.45	54.0	28.03	AV	259.00	150	Vertical	N/A
3	2996.200	50.23	-10.12	74.0	-23.77	Peak	324.00	150	Vertical	Pass
3**	2996.200	41.06	-10.12	54.0	-12.94	AV	324.00	150	Vertical	Pass
4	4768.200	48.70	-3.97	74.0	-25.30	Peak	88.00	150	Vertical	Pass
4**	4768.200	38.11	-3.97	54.0	-15.89	AV	88.00	150	Vertical	Pass
5	6959.600	53.48	-0.52	74.0	-20.52	Peak	154.00	150	Vertical	Pass
5**	6959.600	44.36	-0.52	54.0	-9.64	AV	154.00	150	Vertical	Pass
6	11668.425	51.62	2.48	74.0	-22.38	Peak	136.00	150	Vertical	Pass
6**	11668.425	42.07	2.48	54.0	-11.93	AV	136.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1588.300	41.44	-17.65	74.0	-32.56	Peak	131.00	150	Horizontal	Pass
1**	1588.300	33.27	-17.65	54.0	-20.73	AV	131.00	150	Horizontal	Pass
2	2469.900	92.03	-12.78	74.0	18.03	Peak	172.00	150	Horizontal	N/A
2**	2469.900	85.14	-12.78	54.0	31.14	AV	172.00	150	Horizontal	N/A
3	2981.800	50.53	-10.27	74.0	-23.47	Peak	268.00	150	Horizontal	Pass
3**	2981.800	41.00	-10.27	54.0	-13.00	AV	268.00	150	Horizontal	Pass
4	4621.600	47.70	-4.31	74.0	-26.30	Peak	219.00	150	Horizontal	Pass
4**	4621.600	37.81	-4.31	54.0	-16.19	AV	219.00	150	Horizontal	Pass
5	6977.200	52.52	-0.43	74.0	-21.48	Peak	360.00	150	Horizontal	Pass
5**	6977.200	43.49	-0.43	54.0	-10.51	AV	360.00	150	Horizontal	Pass
6	12244.862	52.43	2.65	74.0	-21.57	Peak	108.00	150	Horizontal	Pass
6**	12244.862	42.01	2.65	54.0	-11.99	AV	108.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1557.500	41.84	-17.73	74.0	-32.16	Peak	279.00	150	Vertical	Pass
1**	1557.500	32.01	-17.73	54.0	-21.99	AV	279.00	150	Vertical	Pass
2	2469.700	87.71	-12.79	74.0	13.71	Peak	120.00	150	Vertical	N/A
2**	2469.700	80.98	-12.79	54.0	26.98	AV	120.00	150	Vertical	N/A
3	2996.600	51.19	-10.13	74.0	-22.81	Peak	279.00	150	Vertical	Pass
3**	2996.600	41.32	-10.13	54.0	-12.68	AV	279.00	150	Vertical	Pass
4	4604.200	47.99	-4.20	74.0	-26.01	Peak	240.00	150	Vertical	Pass
4**	4604.200	37.20	-4.20	54.0	-16.80	AV	240.00	150	Vertical	Pass
5	6994.800	52.40	-0.44	74.0	-21.60	Peak	253.00	150	Vertical	Pass
5**	6994.800	44.19	-0.44	54.0	-9.81	AV	253.00	150	Vertical	Pass
6	11664.975	51.26	2.50	74.0	-22.74	Peak	267.00	150	Vertical	Pass
6**	11664.975	41.82	2.50	54.0	-12.18	AV	267.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1546.700	42.19	-17.76	74.0	-31.81	Peak	316.00	150	Horizontal	Pass
1**	1546.700	32.00	-17.76	54.0	-22.00	AV	316.00	150	Horizontal	Pass
2	2405.300	91.48	-13.23	74.0	17.48	Peak	176.00	150	Horizontal	N/A
2**	2405.300	83.99	-13.23	54.0	29.99	AV	176.00	150	Horizontal	N/A
3	2982.300	50.49	-10.26	74.0	-23.51	Peak	30.00	150	Horizontal	Pass
3**	2982.300	41.02	-10.26	54.0	-12.98	AV	30.00	150	Horizontal	Pass
4	4432.000	47.77	-4.44	74.0	-26.23	Peak	0.00	150	Horizontal	Pass
4**	4432.000	38.16	-4.44	54.0	-15.84	AV	0.00	150	Horizontal	Pass
5	6907.000	52.84	-0.34	74.0	-21.16	Peak	30.00	150	Horizontal	Pass
5**	6907.000	43.23	-0.34	54.0	-10.77	AV	30.00	150	Horizontal	Pass
6	12342.038	51.55	2.08	74.0	-22.45	Peak	360.00	150	Horizontal	Pass
6**	12342.038	41.93	2.08	54.0	-12.07	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1516.500	41.59	-17.75	74.0	-32.41	Peak	306.00	150	Vertical	Pass
1**	1516.500	32.05	-17.75	54.0	-21.95	AV	306.00	150	Vertical	Pass
2	2405.300	86.67	-13.23	74.0	12.67	Peak	277.00	150	Vertical	N/A
2**	2405.300	79.17	-13.23	54.0	25.17	AV	277.00	150	Vertical	N/A
3	2986.300	50.16	-10.14	74.0	-23.84	Peak	1.00	150	Vertical	Pass
3**	2986.300	41.49	-10.14	54.0	-12.51	AV	1.00	150	Vertical	Pass
4	4504.600	47.46	-4.30	74.0	-26.54	Peak	234.00	150	Vertical	Pass
4**	4504.600	38.47	-4.30	54.0	-15.53	AV	234.00	150	Vertical	Pass
5	6974.000	53.21	-0.40	74.0	-20.79	Peak	109.00	150	Vertical	Pass
5**	6974.000	43.61	-0.40	54.0	-10.39	AV	109.00	150	Vertical	Pass
6	12240.838	51.78	2.64	74.0	-22.22	Peak	272.00	150	Vertical	Pass
6**	12240.838	42.88	2.64	54.0	-11.12	AV	272.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1664.600	42.46	-17.38	74.0	-31.54	Peak	345.00	150	Horizontal	Pass
1**	1664.600	33.70	-17.38	54.0	-20.30	AV	345.00	150	Horizontal	Pass
2	2441.000	92.47	-12.47	74.0	18.47	Peak	186.00	150	Horizontal	N/A
2**	2441.000	85.05	-12.47	54.0	31.05	AV	186.00	150	Horizontal	N/A
3	2954.100	50.27	-10.29	74.0	-23.73	Peak	345.00	150	Horizontal	Pass
3**	2954.100	41.20	-10.29	54.0	-12.80	AV	345.00	150	Horizontal	Pass
4	4546.600	47.88	-4.21	74.0	-26.12	Peak	147.00	150	Horizontal	Pass
4**	4546.600	38.36	-4.21	54.0	-15.64	AV	147.00	150	Horizontal	Pass
5	6996.800	53.09	-0.46	74.0	-20.91	Peak	124.00	150	Horizontal	Pass
5**	6996.800	44.24	-0.46	54.0	-9.76	AV	124.00	150	Horizontal	Pass
6	11620.412	50.94	2.23	74.0	-23.06	Peak	69.00	150	Horizontal	Pass
6**	11620.412	41.65	2.23	54.0	-12.35	AV	69.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1639.200	42.33	-17.80	74.0	-31.67	Peak	159.00	150	Vertical	Pass
1**	1639.200	32.28	-17.80	54.0	-21.72	AV	159.00	150	Vertical	Pass
2	2440.800	87.42	-12.46	74.0	13.42	Peak	264.00	150	Vertical	N/A
2**	2440.800	79.74	-12.46	54.0	25.74	AV	264.00	150	Vertical	N/A
3	2962.200	50.59	-10.37	74.0	-23.41	Peak	94.00	150	Vertical	Pass
3**	2962.200	42.12	-10.37	54.0	-11.88	AV	94.00	150	Vertical	Pass
4	4623.000	48.18	-4.28	74.0	-25.82	Peak	131.00	150	Vertical	Pass
4**	4623.000	37.41	-4.28	54.0	-16.59	AV	131.00	150	Vertical	Pass
5	6896.600	52.70	-0.45	74.0	-21.30	Peak	353.00	150	Vertical	Pass
5**	6896.600	43.32	-0.45	54.0	-10.68	AV	353.00	150	Vertical	Pass
6	11643.700	51.52	2.49	74.0	-22.48	Peak	344.00	150	Vertical	Pass
6**	11643.700	42.30	2.49	54.0	-11.70	AV	344.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1672.800	41.74	-17.48	74.0	-32.26	Peak	91.00	150	Horizontal	Pass
1**	1672.800	31.88	-17.48	54.0	-22.12	AV	91.00	150	Horizontal	Pass
2	2442.600	93.23	-12.55	74.0	19.23	Peak	185.00	150	Horizontal	N/A
2**	2442.600	86.08	-12.55	54.0	32.08	AV	185.00	150	Horizontal	N/A
3	2970.200	50.14	-10.58	74.0	-23.86	Peak	114.00	150	Horizontal	Pass
3**	2970.200	41.28	-10.58	54.0	-12.72	AV	114.00	150	Horizontal	Pass
4	4687.000	47.83	-4.47	74.0	-26.17	Peak	43.00	150	Horizontal	Pass
4**	4687.000	38.16	-4.47	54.0	-15.84	AV	43.00	150	Horizontal	Pass
5	6904.400	52.55	-0.41	74.0	-21.45	Peak	179.00	150	Horizontal	Pass
5**	6904.400	42.92	-0.41	54.0	-11.08	AV	179.00	150	Horizontal	Pass
6	11681.362	52.17	2.43	74.0	-21.83	Peak	360.00	150	Horizontal	Pass
6**	11681.362	42.70	2.43	54.0	-11.30	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1709.000	41.89	-17.52	74.0	-32.11	Peak	322.00	150	Vertical	Pass
1**	1709.000	32.54	-17.52	54.0	-21.46	AV	322.00	150	Vertical	Pass
2	2443.500	88.69	-12.61	74.0	14.69	Peak	267.00	150	Vertical	N/A
2**	2443.500	80.95	-12.61	54.0	26.95	AV	267.00	150	Vertical	N/A
3	2950.300	50.26	-10.30	74.0	-23.74	Peak	7.00	150	Vertical	Pass
3**	2950.300	41.03	-10.30	54.0	-12.97	AV	7.00	150	Vertical	Pass
4	4290.800	47.39	-4.77	74.0	-26.61	Peak	154.00	150	Vertical	Pass
4**	4290.800	38.27	-4.77	54.0	-15.73	AV	154.00	150	Vertical	Pass
5	6936.400	52.68	-0.41	74.0	-21.32	Peak	0.00	150	Vertical	Pass
5**	6936.400	43.77	-0.41	54.0	-10.23	AV	0.00	150	Vertical	Pass
6	11632.775	52.32	2.37	74.0	-21.68	Peak	88.00	150	Vertical	Pass
6**	11632.775	41.99	2.37	54.0	-12.01	AV	88.00	150	Vertical	Pass

MIMO
1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1474.200	41.32	-17.76	74.0	-32.68	Peak	97.00	150	Horizontal	Pass
1**	1474.200	32.22	-17.76	54.0	-21.78	AV	97.00	150	Horizontal	Pass
2	2404.800	103.93	-13.25	74.0	29.93	Peak	188.00	150	Horizontal	N/A
2**	2404.800	95.80	-13.25	54.0	41.80	AV	188.00	150	Horizontal	N/A
3	2967.000	50.56	-10.52	74.0	-23.44	Peak	218.00	150	Horizontal	Pass
3**	2967.000	41.35	-10.52	54.0	-12.65	AV	218.00	150	Horizontal	Pass
4	4471.400	47.64	-4.04	74.0	-26.36	Peak	115.00	150	Horizontal	Pass
4**	4471.400	37.40	-4.04	54.0	-16.60	AV	115.00	150	Horizontal	Pass
5	6907.400	52.37	-0.33	74.0	-21.63	Peak	307.00	150	Horizontal	Pass
5**	6907.400	44.45	-0.33	54.0	-9.55	AV	307.00	150	Horizontal	Pass
6	11652.325	51.29	2.55	74.0	-22.71	Peak	101.00	150	Horizontal	Pass
6**	11652.325	42.83	2.55	54.0	-11.17	AV	101.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1622.900	42.02	-17.74	74.0	-31.98	Peak	9.00	150	Vertical	Pass
1**	1622.900	32.83	-17.74	54.0	-21.17	AV	9.00	150	Vertical	Pass
2	2408.000	95.01	-13.24	74.0	21.01	Peak	114.00	150	Vertical	N/A
2**	2408.000	88.17	-13.24	54.0	34.17	AV	114.00	150	Vertical	N/A
3	2990.700	50.84	-10.23	74.0	-23.16	Peak	234.00	150	Vertical	Pass
3**	2990.700	41.41	-10.23	54.0	-12.59	AV	234.00	150	Vertical	Pass
4	4535.200	47.78	-4.29	74.0	-26.22	Peak	0.00	150	Vertical	Pass
4**	4535.200	37.31	-4.29	54.0	-16.69	AV	0.00	150	Vertical	Pass
5	6658.600	52.77	-0.98	74.0	-21.23	Peak	276.00	150	Vertical	Pass
5**	6658.600	43.83	-0.98	54.0	-10.17	AV	276.00	150	Vertical	Pass
6	12228.187	51.63	2.62	74.0	-22.37	Peak	7.00	150	Vertical	Pass
6**	12228.187	42.77	2.62	54.0	-11.23	AV	7.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1573.000	41.83	-17.57	74.0	-32.17	Peak	186.00	150	Horizontal	Pass
1**	1573.000	32.73	-17.57	54.0	-21.27	AV	186.00	150	Horizontal	Pass
2	2438.100	101.19	-12.38	74.0	27.19	Peak	156.00	150	Horizontal	N/A
2**	2438.100	94.06	-12.38	54.0	40.06	AV	156.00	150	Horizontal	N/A
3	2895.900	50.11	-9.95	74.0	-23.89	Peak	21.00	150	Horizontal	Pass
3**	2895.900	40.29	-9.95	54.0	-13.71	AV	21.00	150	Horizontal	Pass
4	4525.200	47.74	-4.15	74.0	-26.26	Peak	86.00	150	Horizontal	Pass
4**	4525.200	38.50	-4.15	54.0	-15.50	AV	86.00	150	Horizontal	Pass
5	6818.000	52.61	-1.32	74.0	-21.39	Peak	133.00	150	Horizontal	Pass
5**	6818.000	42.63	-1.32	54.0	-11.37	AV	133.00	150	Horizontal	Pass
6	12258.662	51.57	2.59	74.0	-22.43	Peak	99.00	150	Horizontal	Pass
6**	12258.662	41.78	2.59	54.0	-12.22	AV	99.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1648.500	42.20	-17.73	74.0	-31.80	Peak	109.00	150	Vertical	Pass
1**	1648.500	32.39	-17.73	54.0	-21.61	AV	109.00	150	Vertical	Pass
2	2442.800	92.97	-12.56	74.0	18.97	Peak	121.00	150	Vertical	N/A
2**	2442.800	85.87	-12.56	54.0	31.87	AV	121.00	150	Vertical	N/A
3	2951.400	50.20	-10.27	74.0	-23.80	Peak	357.00	150	Vertical	Pass
3**	2951.400	41.02	-10.27	54.0	-12.98	AV	357.00	150	Vertical	Pass
4	4905.000	47.87	-3.50	74.0	-26.13	Peak	1.00	150	Vertical	Pass
4**	4905.000	38.76	-3.50	54.0	-15.24	AV	1.00	150	Vertical	Pass
5	6897.200	53.60	-0.42	74.0	-20.40	Peak	73.00	150	Vertical	Pass
5**	6897.200	43.99	-0.42	54.0	-10.01	AV	73.00	150	Vertical	Pass
6	11685.675	51.01	2.41	74.0	-22.99	Peak	171.00	150	Vertical	Pass
6**	11685.675	42.47	2.41	54.0	-11.53	AV	171.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1506.400	41.34	-17.80	74.0	-32.66	Peak	19.00	150	Horizontal	Pass
1**	1506.400	32.31	-17.80	54.0	-21.69	AV	19.00	150	Horizontal	Pass
2	2463.900	100.09	-13.03	74.0	26.09	Peak	97.00	150	Horizontal	N/A
2**	2463.900	92.58	-13.03	54.0	38.58	AV	97.00	150	Horizontal	N/A
3	2733.100	50.54	-10.76	74.0	-23.46	Peak	0.00	150	Horizontal	Pass
3**	2733.100	40.50	-10.76	54.0	-13.50	AV	0.00	150	Horizontal	Pass
4	4924.800	48.49	-3.84	74.0	-25.51	Peak	147.00	150	Horizontal	Pass
4**	4924.800	39.96	-3.84	54.0	-14.04	AV	147.00	150	Horizontal	Pass
5	6892.800	52.73	-0.52	74.0	-21.27	Peak	307.00	150	Horizontal	Pass
5**	6892.800	43.47	-0.52	54.0	-10.53	AV	307.00	150	Horizontal	Pass
6	11719.599	50.75	2.01	74.0	-23.25	Peak	344.00	150	Horizontal	Pass
6**	11719.599	42.00	2.01	54.0	-12.00	AV	344.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1559.500	42.01	-17.62	74.0	-31.99	Peak	87.00	150	Vertical	Pass
1**	1559.500	32.35	-17.62	54.0	-21.65	AV	87.00	150	Vertical	Pass
2	2463.200	92.85	-13.03	74.0	18.85	Peak	29.00	150	Vertical	N/A
2**	2463.200	84.99	-13.03	54.0	30.99	AV	29.00	150	Vertical	N/A
3	2988.300	50.85	-10.16	74.0	-23.15	Peak	1.00	150	Vertical	Pass
3**	2988.300	42.17	-10.16	54.0	-11.83	AV	1.00	150	Vertical	Pass
4	4544.800	47.25	-4.26	74.0	-26.75	Peak	172.00	150	Vertical	Pass
4**	4544.800	37.81	-4.26	54.0	-16.19	AV	172.00	150	Vertical	Pass
5	6853.000	52.18	-1.12	74.0	-21.82	Peak	150.00	150	Vertical	Pass
5**	6853.000	42.40	-1.12	54.0	-11.60	AV	150.00	150	Vertical	Pass
6	11692.575	52.25	2.36	74.0	-21.75	Peak	88.00	150	Vertical	Pass
6**	11692.575	41.39	2.36	54.0	-12.61	AV	88.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.800	41.57	-17.79	74.0	-32.43	Peak	232.00	150	Horizontal	Pass
1**	1498.800	32.12	-17.79	54.0	-21.88	AV	232.00	150	Horizontal	Pass
2	2405.200	102.60	-13.23	74.0	28.60	Peak	145.00	150	Horizontal	N/A
2**	2405.200	96.16	-13.23	54.0	42.16	AV	145.00	150	Horizontal	N/A
3	2975.900	50.29	-10.41	74.0	-23.71	Peak	181.00	150	Horizontal	Pass
3**	2975.900	40.85	-10.41	54.0	-13.15	AV	181.00	150	Horizontal	Pass
4	4825.200	47.92	-3.63	74.0	-26.08	Peak	197.00	150	Horizontal	Pass
4**	4825.200	38.90	-3.63	54.0	-15.10	AV	197.00	150	Horizontal	Pass
5	6976.000	52.96	-0.42	74.0	-21.04	Peak	309.00	150	Horizontal	Pass
5**	6976.000	43.93	-0.42	54.0	-10.07	AV	309.00	150	Horizontal	Pass
6	12210.362	52.33	2.58	74.0	-21.67	Peak	189.00	150	Horizontal	Pass
6**	12210.362	42.18	2.58	54.0	-11.82	AV	189.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1643.500	41.39	-17.72	74.0	-32.61	Peak	160.00	150	Vertical	Pass
1**	1643.500	32.70	-17.72	54.0	-21.30	AV	160.00	150	Vertical	Pass
2	2404.900	94.71	-13.25	74.0	20.71	Peak	109.00	150	Vertical	N/A
2**	2404.900	87.37	-13.25	54.0	33.37	AV	109.00	150	Vertical	N/A
3	2897.900	50.37	-10.00	74.0	-23.63	Peak	59.00	150	Vertical	Pass
3**	2897.900	40.13	-10.00	54.0	-13.87	AV	59.00	150	Vertical	Pass
4	4865.200	47.94	-3.55	74.0	-26.06	Peak	284.00	150	Vertical	Pass
4**	4865.200	38.35	-3.55	54.0	-15.65	AV	284.00	150	Vertical	Pass
5	6913.000	52.54	-0.26	74.0	-21.46	Peak	0.00	150	Vertical	Pass
5**	6913.000	43.29	-0.26	54.0	-10.71	AV	0.00	150	Vertical	Pass
6	11666.987	52.23	2.49	74.0	-21.77	Peak	331.00	150	Vertical	Pass
6**	11666.987	42.04	2.49	54.0	-11.96	AV	331.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1665.800	42.14	-17.39	74.0	-31.86	Peak	10.00	150	Horizontal	Pass
1**	1665.800	32.17	-17.39	54.0	-21.83	AV	10.00	150	Horizontal	Pass
2	2439.900	100.73	-12.44	74.0	26.73	Peak	146.00	150	Horizontal	N/A
2**	2439.900	93.43	-12.44	54.0	39.43	AV	146.00	150	Horizontal	N/A
3	2980.200	50.87	-10.28	74.0	-23.13	Peak	206.00	150	Horizontal	Pass
3**	2980.200	40.86	-10.28	54.0	-13.14	AV	206.00	150	Horizontal	Pass
4	4716.000	48.35	-4.55	74.0	-25.65	Peak	22.00	150	Horizontal	Pass
4**	4716.000	37.78	-4.55	54.0	-16.22	AV	22.00	150	Horizontal	Pass
5	6606.000	52.36	-1.41	74.0	-21.64	Peak	149.00	150	Horizontal	Pass
5**	6606.000	42.43	-1.41	54.0	-11.57	AV	149.00	150	Horizontal	Pass
6	11652.037	51.56	2.55	74.0	-22.44	Peak	241.00	150	Horizontal	Pass
6**	11652.037	42.05	2.55	54.0	-11.95	AV	241.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1577.200	41.64	-17.51	74.0	-32.36	Peak	172.00	150	Vertical	Pass
1**	1577.200	32.02	-17.51	54.0	-21.98	AV	172.00	150	Vertical	Pass
2	2439.800	90.79	-12.44	74.0	16.79	Peak	107.00	150	Vertical	N/A
2**	2439.800	83.43	-12.44	54.0	29.43	AV	107.00	150	Vertical	N/A
3	2949.500	50.35	-10.33	74.0	-23.65	Peak	298.00	150	Vertical	Pass
3**	2949.500	40.50	-10.33	54.0	-13.50	AV	298.00	150	Vertical	Pass
4	4470.600	47.70	-4.04	74.0	-26.30	Peak	85.00	150	Vertical	Pass
4**	4470.600	37.96	-4.04	54.0	-16.04	AV	85.00	150	Vertical	Pass
5	6957.400	52.78	-0.57	74.0	-21.22	Peak	37.00	150	Vertical	Pass
5**	6957.400	43.36	-0.57	54.0	-10.64	AV	37.00	150	Vertical	Pass
6	11696.600	51.40	2.33	74.0	-22.60	Peak	99.00	150	Vertical	Pass
6**	11696.600	41.93	2.33	54.0	-12.07	AV	99.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1595.100	41.83	-17.82	74.0	-32.17	Peak	229.00	150	Horizontal	Pass
1**	1595.100	31.88	-17.82	54.0	-22.12	AV	229.00	150	Horizontal	Pass
2	2463.100	100.09	-13.03	74.0	26.09	Peak	92.00	150	Horizontal	N/A
2**	2463.100	93.16	-13.03	54.0	39.16	AV	92.00	150	Horizontal	N/A
3	2986.900	50.59	-10.14	74.0	-23.41	Peak	101.00	150	Horizontal	Pass
3**	2986.900	40.85	-10.14	54.0	-13.15	AV	101.00	150	Horizontal	Pass
4	4474.400	47.36	-3.96	74.0	-26.64	Peak	189.00	150	Horizontal	Pass
4**	4474.400	38.09	-3.96	54.0	-15.91	AV	189.00	150	Horizontal	Pass
5	6943.800	52.45	-0.40	74.0	-21.55	Peak	222.00	150	Horizontal	Pass
5**	6943.800	43.29	-0.40	54.0	-10.71	AV	222.00	150	Horizontal	Pass
6	12179.599	51.58	2.28	74.0	-22.42	Peak	354.00	150	Horizontal	Pass
6**	12179.599	41.18	2.28	54.0	-12.82	AV	354.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1595.100	41.83	-17.82	74.0	-32.17	Peak	229.00	150	Horizontal	Pass
1**	1595.100	31.88	-17.82	54.0	-22.12	AV	229.00	150	Horizontal	Pass
2	2463.100	100.09	-13.03	74.0	26.09	Peak	92.00	150	Horizontal	N/A
2**	2463.100	93.16	-13.03	54.0	39.16	AV	92.00	150	Horizontal	N/A
3	2986.900	50.59	-10.14	74.0	-23.41	Peak	101.00	150	Horizontal	Pass
3**	2986.900	40.85	-10.14	54.0	-13.15	AV	101.00	150	Horizontal	Pass
4	4474.400	47.36	-3.96	74.0	-26.64	Peak	189.00	150	Horizontal	Pass
4**	4474.400	38.09	-3.96	54.0	-15.91	AV	189.00	150	Horizontal	Pass
5	6943.800	52.45	-0.40	74.0	-21.55	Peak	222.00	150	Horizontal	Pass
5**	6943.800	43.29	-0.40	54.0	-10.71	AV	222.00	150	Horizontal	Pass
6	12179.599	51.58	2.28	74.0	-22.42	Peak	354.00	150	Horizontal	Pass
6**	12179.599	41.18	2.28	54.0	-12.82	AV	354.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1601.500	41.54	-17.75	74.0	-32.46	Peak	53.00	150	Horizontal	Pass
1**	1601.500	31.88	-17.75	54.0	-22.12	AV	53.00	150	Horizontal	Pass
2	2405.300	99.66	-13.23	74.0	25.66	Peak	150.00	150	Horizontal	N/A
2**	2405.300	92.83	-13.23	54.0	38.83	AV	150.00	150	Horizontal	N/A
3	2983.600	50.86	-10.22	74.0	-23.14	Peak	32.00	150	Horizontal	Pass
3**	2983.600	41.07	-10.22	54.0	-12.93	AV	32.00	150	Horizontal	Pass
4	4451.600	47.88	-4.27	74.0	-26.12	Peak	5.00	150	Horizontal	Pass
4**	4451.600	38.02	-4.27	54.0	-15.98	AV	5.00	150	Horizontal	Pass
5	6898.000	52.50	-0.39	74.0	-21.50	Peak	0.00	150	Horizontal	Pass
5**	6898.000	42.91	-0.39	54.0	-11.09	AV	0.00	150	Horizontal	Pass
6	12218.988	51.20	2.60	74.0	-22.80	Peak	159.00	150	Horizontal	Pass
6**	12218.988	41.59	2.60	54.0	-12.41	AV	159.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1625.900	41.86	-17.78	74.0	-32.14	Peak	228.00	150	Vertical	Pass
1**	1625.900	31.39	-17.78	54.0	-22.61	AV	228.00	150	Vertical	Pass
2	2404.600	91.32	-13.26	74.0	17.32	Peak	110.00	150	Vertical	N/A
2**	2404.600	84.47	-13.26	54.0	30.47	AV	110.00	150	Vertical	N/A
3	2968.800	50.40	-10.49	74.0	-23.60	Peak	201.00	150	Vertical	Pass
3**	2968.800	41.26	-10.49	54.0	-12.74	AV	201.00	150	Vertical	Pass
4	4611.800	47.12	-4.31	74.0	-26.88	Peak	348.00	150	Vertical	Pass
4**	4611.800	37.51	-4.31	54.0	-16.49	AV	348.00	150	Vertical	Pass
5	6686.800	52.48	-1.19	74.0	-21.52	Peak	5.00	150	Vertical	Pass
5**	6686.800	42.47	-1.19	54.0	-11.53	AV	5.00	150	Vertical	Pass
6	11683.662	51.16	2.42	74.0	-22.84	Peak	23.00	150	Vertical	Pass
6**	11683.662	42.03	2.42	54.0	-11.97	AV	23.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1650.600	41.87	-17.70	74.0	-32.13	Peak	134.00	150	Horizontal	Pass
1**	1650.600	32.03	-17.70	54.0	-21.97	AV	134.00	150	Horizontal	Pass
2	2442.000	101.09	-12.51	74.0	27.09	Peak	145.00	150	Horizontal	N/A
2**	2442.000	93.73	-12.51	54.0	39.73	AV	145.00	150	Horizontal	N/A
3	2956.500	50.60	-10.25	74.0	-23.40	Peak	12.00	150	Horizontal	Pass
3**	2956.500	41.32	-10.25	54.0	-12.68	AV	12.00	150	Horizontal	Pass
4	4546.400	48.47	-4.22	74.0	-25.53	Peak	69.00	150	Horizontal	Pass
4**	4546.400	38.74	-4.22	54.0	-15.26	AV	69.00	150	Horizontal	Pass
5	6907.800	52.83	-0.33	74.0	-21.17	Peak	184.00	150	Horizontal	Pass
5**	6907.800	43.77	-0.33	54.0	-10.23	AV	184.00	150	Horizontal	Pass
6	12278.787	51.69	2.42	74.0	-22.31	Peak	331.00	150	Horizontal	Pass
6**	12278.787	42.07	2.42	54.0	-11.93	AV	331.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1459.000	41.72	-17.68	74.0	-32.28	Peak	55.00	150	Vertical	Pass
1**	1459.000	31.94	-17.68	54.0	-22.06	AV	55.00	150	Vertical	Pass
2	2442.500	91.34	-12.54	74.0	17.34	Peak	247.00	150	Vertical	N/A
2**	2442.500	84.54	-12.54	54.0	30.54	AV	247.00	150	Vertical	N/A
3	2895.400	50.38	-9.92	74.0	-23.62	Peak	300.00	150	Vertical	Pass
3**	2895.400	40.30	-9.92	54.0	-13.70	AV	300.00	150	Vertical	Pass
4	4648.600	48.16	-4.25	74.0	-25.84	Peak	193.00	150	Vertical	Pass
4**	4648.600	38.71	-4.25	54.0	-15.29	AV	193.00	150	Vertical	Pass
5	6881.600	52.97	-0.70	74.0	-21.03	Peak	270.00	150	Vertical	Pass
5**	6881.600	43.04	-0.70	54.0	-10.96	AV	270.00	150	Vertical	Pass
6	11661.813	51.72	2.51	74.0	-22.28	Peak	2.00	150	Vertical	Pass
6**	11661.813	42.86	2.51	54.0	-11.14	AV	2.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1435.500	42.30	-17.70	74.0	-31.70	Peak	21.00	150	Horizontal	Pass
1**	1435.500	32.86	-17.70	54.0	-21.14	AV	21.00	150	Horizontal	Pass
2	2444.100	100.56	-12.64	74.0	26.56	Peak	190.00	150	Horizontal	N/A
2**	2444.100	92.56	-12.64	54.0	38.56	AV	190.00	150	Horizontal	N/A
3	2882.200	50.94	-10.12	74.0	-23.06	Peak	356.00	150	Horizontal	Pass
3**	2882.200	40.35	-10.12	54.0	-13.65	AV	356.00	150	Horizontal	Pass
4	4638.000	47.09	-4.28	74.0	-26.91	Peak	171.00	150	Horizontal	Pass
4**	4638.000	38.05	-4.28	54.0	-15.95	AV	171.00	150	Horizontal	Pass
5	6972.800	53.37	-0.39	74.0	-20.63	Peak	219.00	150	Horizontal	Pass
5**	6972.800	44.71	-0.39	54.0	-9.29	AV	219.00	150	Horizontal	Pass
6	11619.550	51.37	2.22	74.0	-22.63	Peak	176.00	150	Horizontal	Pass
6**	11619.550	41.22	2.22	54.0	-12.78	AV	176.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1565.000	41.55	-17.63	74.0	-32.45	Peak	184.00	150	Vertical	Pass
1**	1565.000	31.95	-17.63	54.0	-22.05	AV	184.00	150	Vertical	Pass
2	2444.900	91.06	-12.66	74.0	17.06	Peak	252.00	150	Vertical	N/A
2**	2444.900	83.95	-12.66	54.0	29.95	AV	252.00	150	Vertical	N/A
3	2975.300	50.82	-10.42	74.0	-23.18	Peak	173.00	150	Vertical	Pass
3**	2975.300	41.06	-10.42	54.0	-12.94	AV	173.00	150	Vertical	Pass
4	4761.600	47.29	-4.07	74.0	-26.71	Peak	11.00	150	Vertical	Pass
4**	4761.600	37.68	-4.07	54.0	-16.32	AV	11.00	150	Vertical	Pass
5	6941.800	52.78	-0.39	74.0	-21.22	Peak	1.00	150	Vertical	Pass
5**	6941.800	43.12	-0.39	54.0	-10.88	AV	1.00	150	Vertical	Pass
6	12173.850	51.57	2.20	74.0	-22.43	Peak	119.00	150	Vertical	Pass
6**	12173.850	41.02	2.20	54.0	-12.98	AV	119.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Test Data

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data

Main Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	54.544	32.61	74	19.456	PEAK	Pass
		2390	42.695	32.61	54	11.305	AVERAGE	Pass
	HIGH	2483.5	55.036	32.54	74	18.964	PEAK	Pass
		2483.5	44.351	32.54	54	9.649	AVERAGE	Pass
802.11g	Low	2390	54.865	32.61	74	19.135	PEAK	Pass
		2390	44.509	32.61	54	9.491	AVERAGE	Pass
	HIGH	2483.5	62.686	32.54	74	11.314	PEAK	Pass
		2483.5	46.553	32.54	54	7.447	AVERAGE	Pass
802.11n20	Low	2390	58.892	32.61	74	15.108	PEAK	Pass
		2390	45.223	32.61	54	8.777	AVERAGE	Pass
	HIGH	2483.5	64.114	32.54	74	9.886	PEAK	Pass
		2483.5	47.296	32.54	54	6.704	AVERAGE	Pass
802.11n40	Low	2390	61.885	32.61	74	12.115	PEAK	Pass
		2390	45.999	32.61	54	8.001	AVERAGE	Pass
	HIGH	2483.5	62.338	32.54	74	11.662	PEAK	Pass
		2483.5	47.287	32.54	54	6.713	AVERAGE	Pass

Aux. Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	53.385	32.61	74	20.615	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	53.283	32.54	74	20.717	PEAK	Pass
		2483.5	N/A	N/A	54	N/A	AVERAGE	Pass
802.11g	Low	2390	54.060	32.61	74	19.94	PEAK	Pass
		2390	43.281	32.61	54	10.719	AVERAGE	Pass
	HIGH	2483.5	56.521	32.54	74	17.479	PEAK	Pass
		2483.5	44.124	32.54	54	9.876	AVERAGE	Pass
802.11n20	Low	2390	53.632	32.61	74	20.368	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	55.791	32.54	74	18.209	PEAK	Pass
		2483.5	43.832	32.54	54	10.168	AVERAGE	Pass
802.11n40	Low	2390	57.525	32.61	74	16.475	PEAK	Pass
		2390	43.524	32.61	54	10.476	AVERAGE	Pass
	HIGH	2483.5	55.635	32.54	74	18.365	PEAK	Pass
		2483.5	43.616	32.54	54	10.384	AVERAGE	Pass

MIMO


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11g	Low	2390	59.394	32.61	74	14.606	PEAK	Pass
		2390	45.058	32.61	54	8.942	AVERAGE	Pass
	HIGH	2483.5	63.354	32.54	74	10.646	PEAK	Pass
		2483.5	48.114	32.54	54	5.886	AVERAGE	Pass
802.11n20	Low	2390	65.239	32.61	74	8.761	PEAK	Pass
		2390	46.856	32.61	54	7.144	AVERAGE	Pass
	HIGH	2483.5	62.659	32.54	74	11.341	PEAK	Pass
		2483.5	47.306	32.54	54	6.694	AVERAGE	Pass
802.11n40	Low	2390	67.568	32.61	74	6.432	PEAK	Pass
		2390	46.529	32.61	54	7.471	AVERAGE	Pass
	HIGH	2483.5	61.493	32.54	74	12.507	PEAK	Pass
		2483.5	44.490	32.54	54	9.510	AVERAGE	Pass

Test plots

Main Antenna

802.11b Mode:

LOW CHANNEL, PEAK

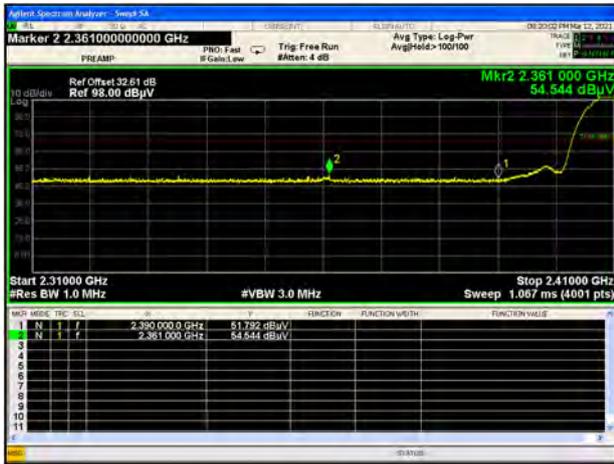

LOW CHANNEL, AV



HIGH CHANNEL, PEAK




HIGH CHANNEL, AV



802.11g Mode:

LOW CHANNEL, PEAK

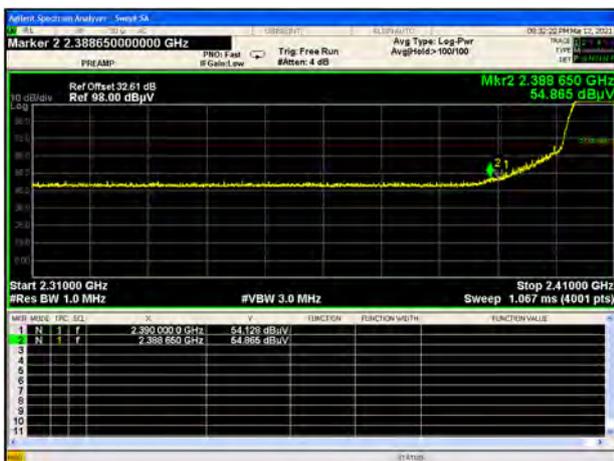

LOW CHANNEL, AV



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV1




HIGH CHANNEL, AV2



802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

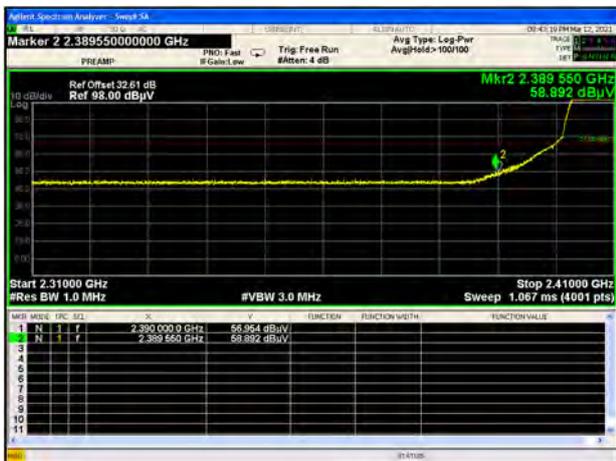

LOW CHANNEL, AV1



LOW CHANNEL, AV2



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV1




HIGH CHANNEL, AV2



802.11n-40 MHz Mode:

LOW CHANNEL, PEAK

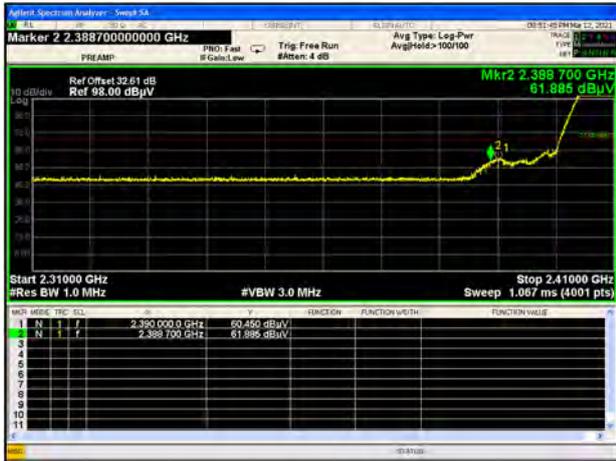

LOW CHANNEL, AV1



LOW CHANNEL, AV2



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV1


HIGH CHANNEL, AV2



Aux. Antenna

802.11b Mode:

LOW CHANNEL, PEAK

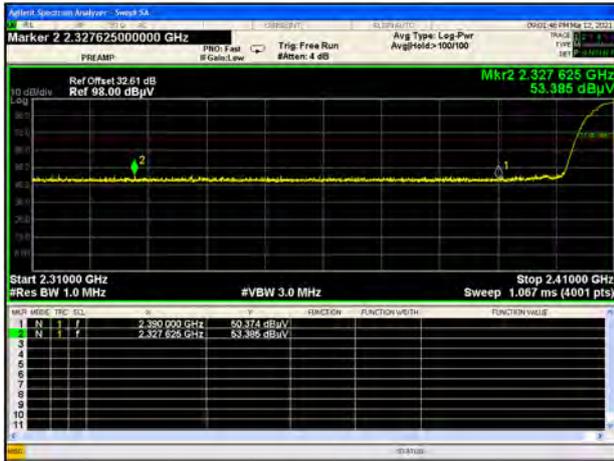


HIGH CHANNEL, PEAK



802.11g Mode:

LOW CHANNEL, PEAK

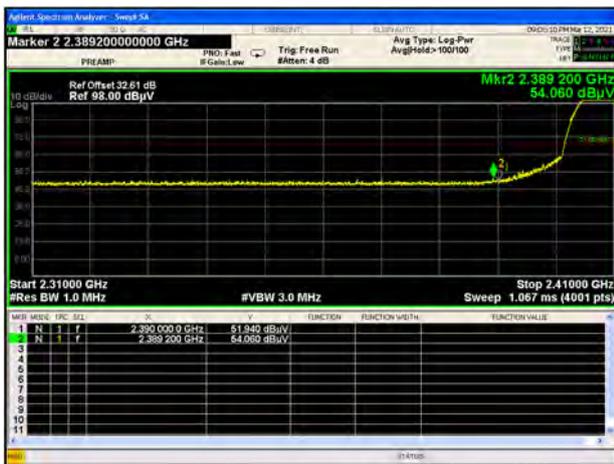

LOW CHANNEL, AV



HIGH CHANNEL, PEAK




HIGH CHANNEL, AV



802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

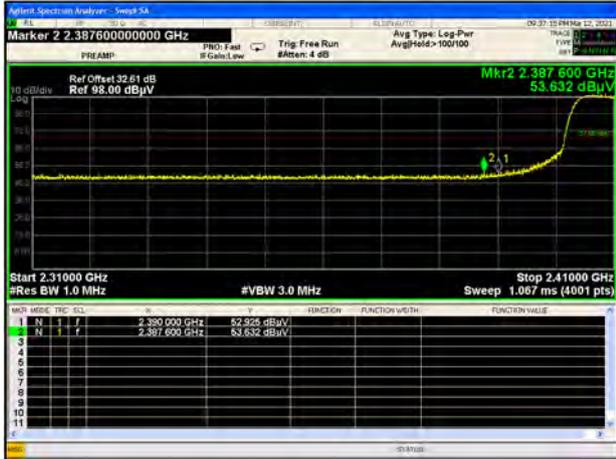

HIGH CHANNEL, PEAK




HIGH CHANNEL, AV



802.11n-40 MHz Mode:

LOW CHANNEL, PEAK

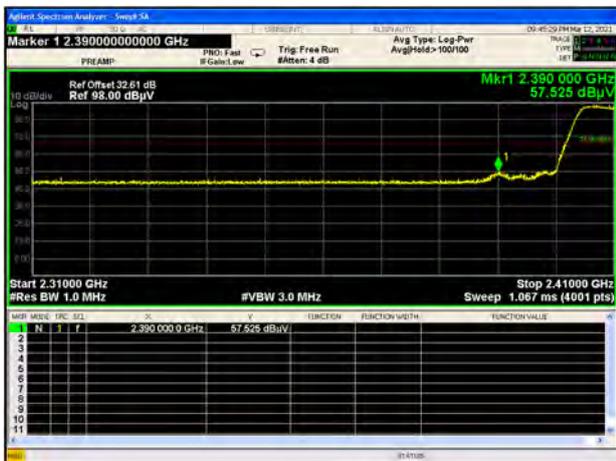

LOW CHANNEL, AV



HIGH CHANNEL, PEAK




HIGH CHANNEL, AV



MIMO

802.11g Mode:

LOW CHANNEL, PEAK

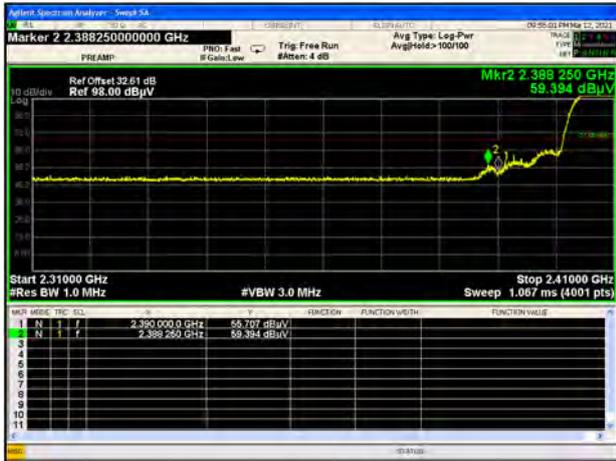

LOW CHANNEL, AV1



LOW CHANNEL, AV2



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV1



HIGH CHANNEL, AV2



802.11n-20 MHz Mode:

LOW CHANNEL, PEAK



LOW CHANNEL, AV1



LOW CHANNEL, AV2



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV1




HIGH CHANNEL, AV2



802.11n-40 MHz Mode:

LOW CHANNEL, PEAK

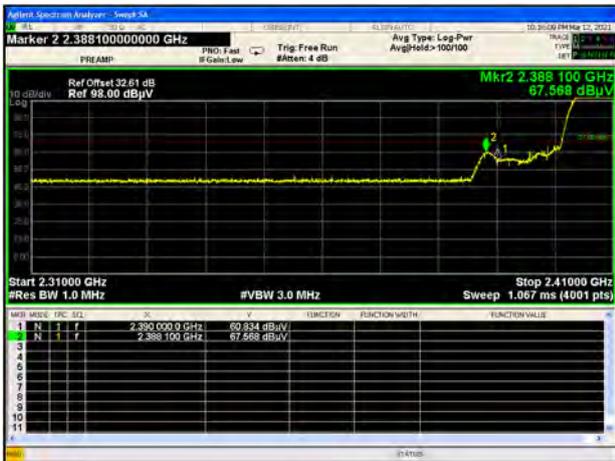

LOW CHANNEL, AV1



LOW CHANNEL, AV2



HIGH CHANNEL, PEAK



HIGH CHANNEL, AV1



HIGH CHANNEL, AV2



A.8 Power Spectral Density (PSD)

Test Data

Main Antenna

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-21.27	8
Middle	-21.28	8
High	-21.56	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.14	8
Middle	-23.44	8
High	-23.37	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-22.91	8
Middle	-23.19	8
High	-23.64	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-27.86	8
Middle	-25.56	8
High	-25.83	8

Aux. Antenna

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-21.73	8
Middle	-21.36	8
High	-21.50	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.68	8
Middle	-22.97	8
High	-23.42	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.82	8
Middle	-23.29	8
High	-23.32	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.32	8
Middle	-26.21	8
High	-25.92	8

MIMO-Main Antenna

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.53	8
Middle	-26.42	8
High	-26.41	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.72	8
Middle	-26.66	8
High	-26.86	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-30.44	8
Middle	-28.35	8
High	-28.77	8

MIMO-Aux. Antenna

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.64	8
Middle	-26.11	8
High	-25.93	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.88	8
Middle	-26.40	8
High	-26.20	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-28.93	8
Middle	-29.41	8
High	-29.40	8

MIMO

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.57	8
Middle	-23.25	8
High	-23.15	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-23.79	8
Middle	-23.52	8
High	-23.51	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-26.61	8
Middle	-25.84	8
High	-26.06	8

Test plots

Main Antenna

802.11b LOW CHANNEL



Date: 13 MAR 2021 12:23:16

802.11b MIDDLE CHANNEL



Date: 13 MAR 2021 12:34:39

802.11b HIGH CHANNEL




Date: 13 MAR 2021 12:38:19

802.11g LOW CHANNEL




Date: 13 MAR 2021 12:41:23

802.11g MIDDLE CHANNEL

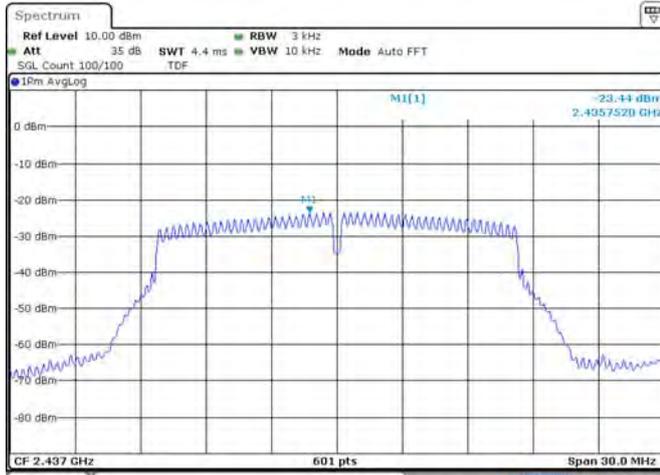

Date: 13 MAR 2021 12:45:59

802.11g HIGH CHANNEL

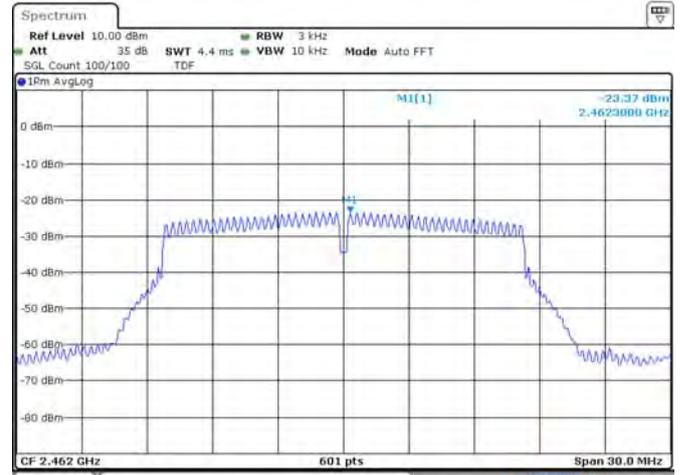


Date: 13 MAR 2021 12:50:08

802.11n-20 MHz LOW CHANNEL




Date: 13 MAR 2021 12:53:25

802.11 n-20 MHz MIDDLE CHANNEL

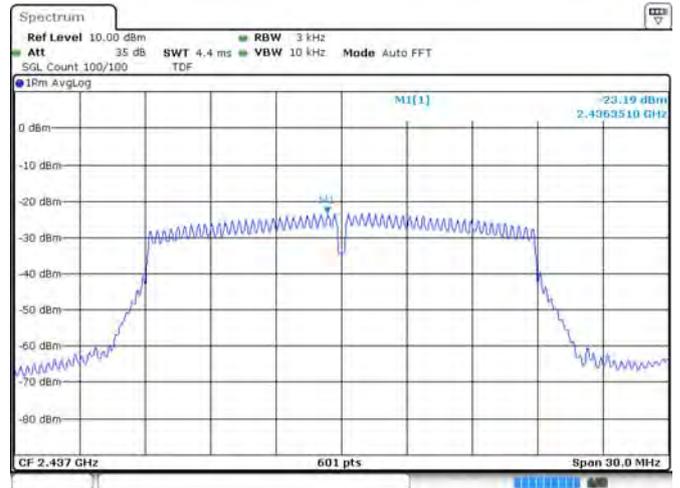


Date: 13 MAR 2021 12:55:50

802.11n-20 MHz HIGH CHANNEL

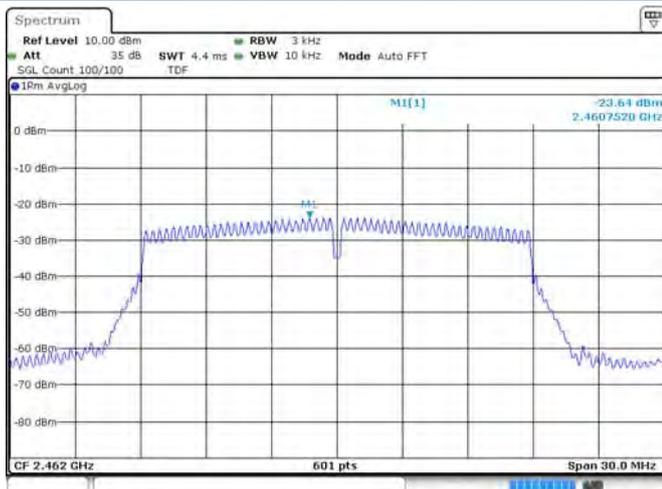


Date: 13 MAR 2021 12:59:24

802.11n-40 MHz LOW CHANNEL

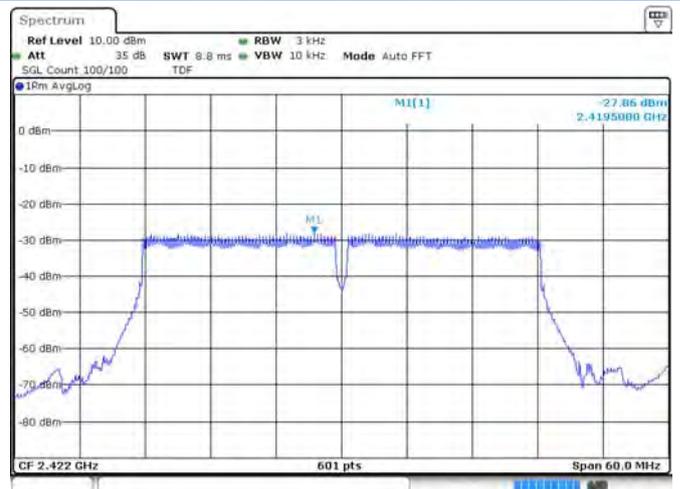


Date: 13 MAR 2021 13:03:19

802.11n-40 MHz MIDDLE CHANNEL

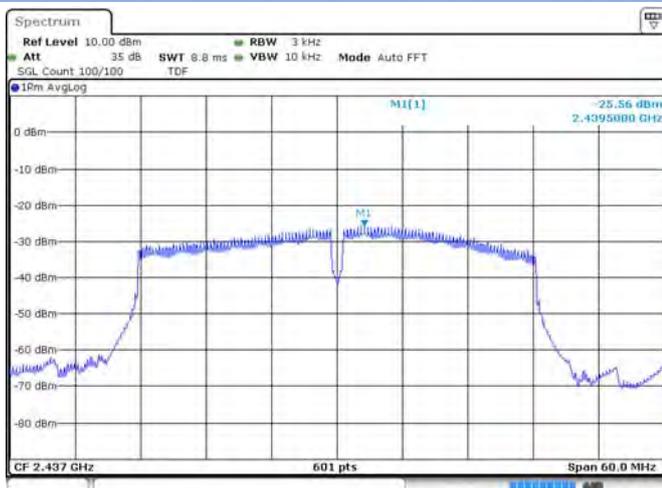

Date: 13 MAR 2021 13:06:07

802.11n-40 MHz HIGH CHANNEL

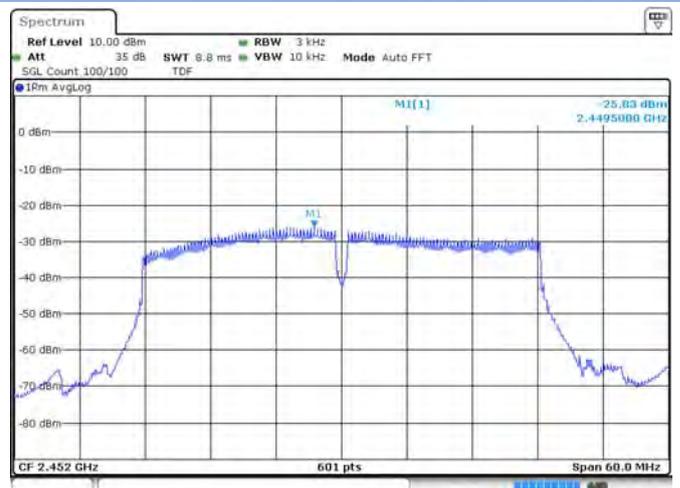

Date: 13 MAR 2021 13:09:13

Aux. Antenna

802.11b LOW CHANNEL



Date: 13 MAR 2021 13:55:37

802.11b MIDDLE CHANNEL




Date: 13 MAR 2021 13:58:08

802.11b HIGH CHANNEL



Date: 13 MAR 2021 14:01:33

802.11g LOW CHANNEL

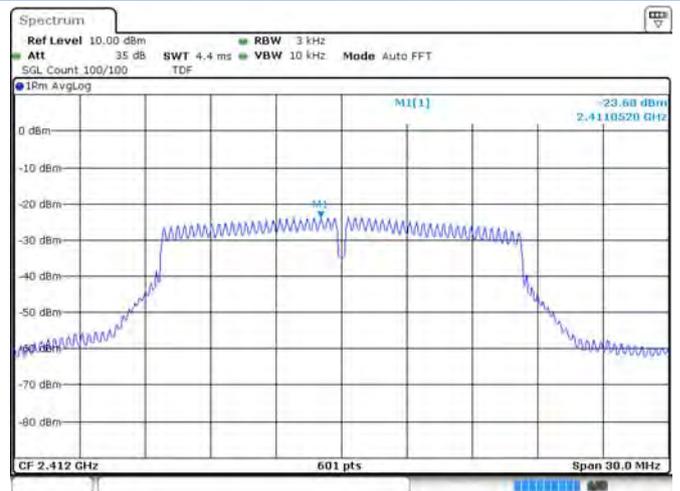


Date: 13 MAR 2021 14:04:37

802.11g MIDDLE CHANNEL




Date: 13 MAR 2021 14:10:07

802.11g HIGH CHANNEL

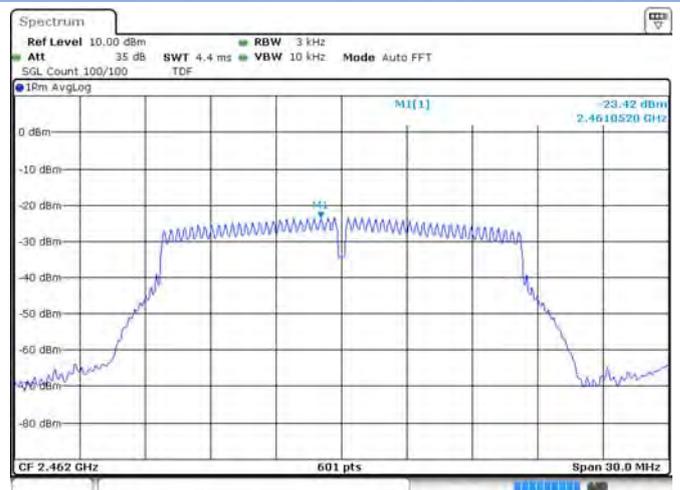


Date: 13 MAR 2021 14:12:56

802.11n-20 MHz LOW CHANNEL

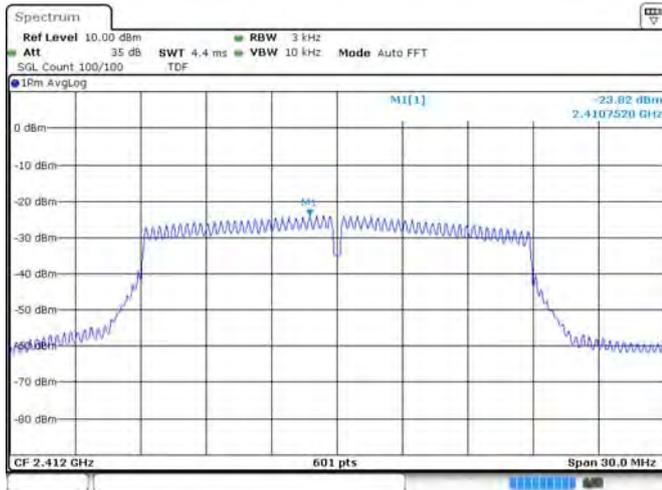

Date: 13 MAR 2021 14:15:33

802.11 n-20 MHz MIDDLE CHANNEL

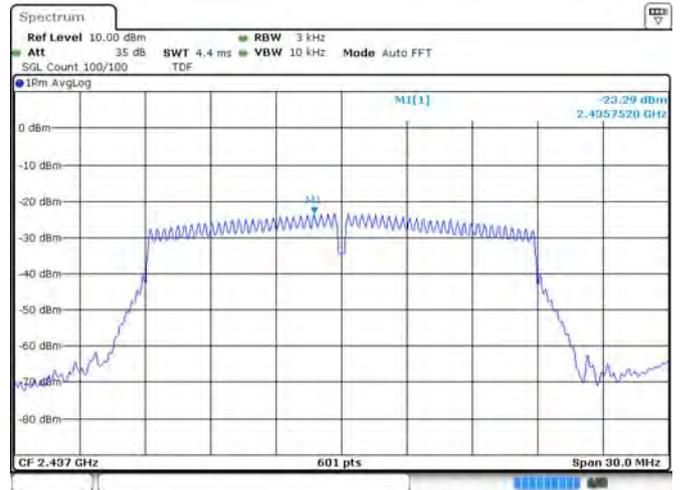

Date: 13 MAR 2021 14:17:51

802.11n-20 MHz HIGH CHANNEL




Date: 13 MAR 2021 14:21:36

802.11n-40 MHz LOW CHANNEL




Date: 13 MAR 2021 14:27:12

802.11n-40 MHz MIDDLE CHANNEL

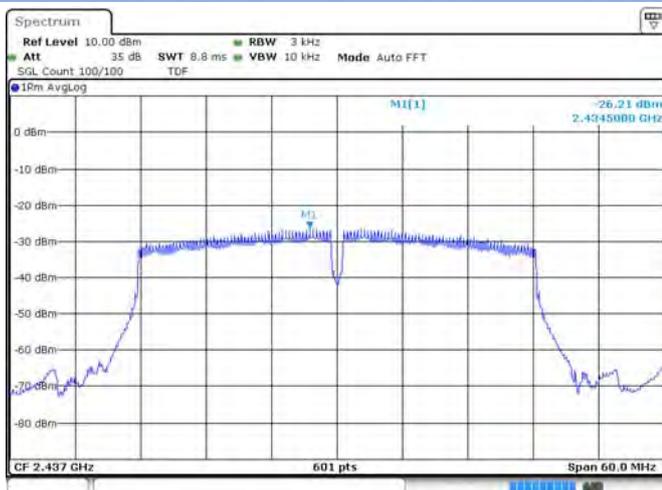

Date: 13 MAR 2021 14:30:54


802.11n-40 MHz HIGH CHANNEL

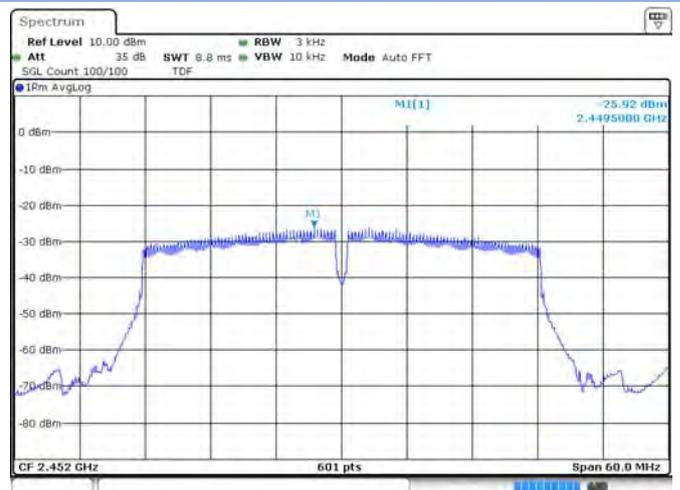

Date: 13 MAR 2021 14:35:53

MIMO-Main Antenna

802.11g LOW CHANNEL

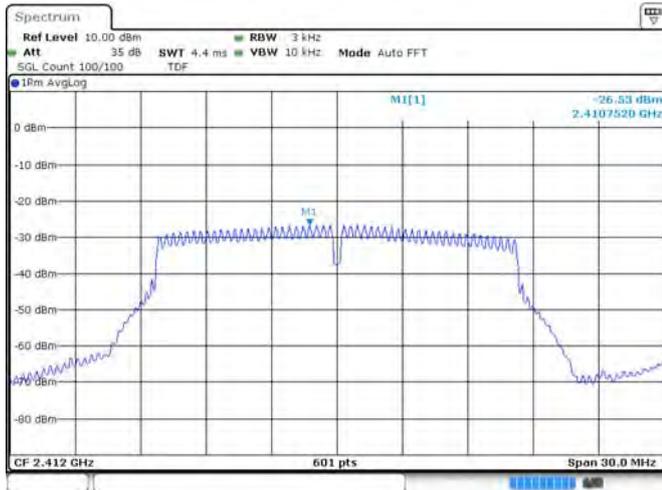

Date: 13 MAR 2021 13:29:03

802.11g MIDDLE CHANNEL



Date: 13 MAR 2021 13:31:05

802.11g HIGH CHANNEL




Date: 13 MAR 2021 13:33:13

802.11n-20 MHz LOW CHANNEL



Date: 13 MAR 2021 13:35:34

802.11 n-20 MHz MIDDLE CHANNEL

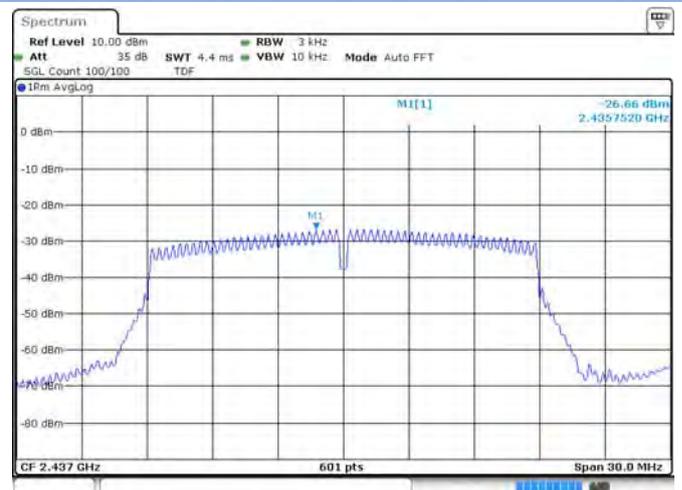


Date: 13 MAR 2021 13:37:21

802.11n-20 MHz HIGH CHANNEL



Date: 13 MAR 2021 13:39:37

802.11n-40 MHz LOW CHANNEL

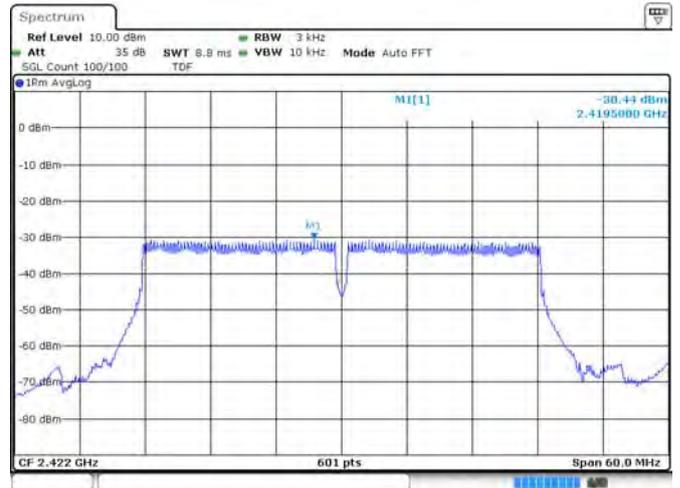

Date: 13 MAR 2021 13:42:01

802.11n-40 MHz MIDDLE CHANNEL



Date: 13 MAR 2021 13:44:27

802.11n-40 MHz HIGH CHANNEL



Date: 13 MAR 2021 13:47:07

MIMO-Aux. Antenna

802.11g LOW CHANNEL



Date: 13 MAR 2021 15:05:55

802.11g MIDDLE CHANNEL



Date: 13 MAR 2021 15:07:35

802.11g HIGH CHANNEL




Date: 13 MAR 2021 15:09:45

802.11n-20 MHz LOW CHANNEL



Date: 13 MAR 2021 14:53:27

802.11 n-20 MHz MIDDLE CHANNEL

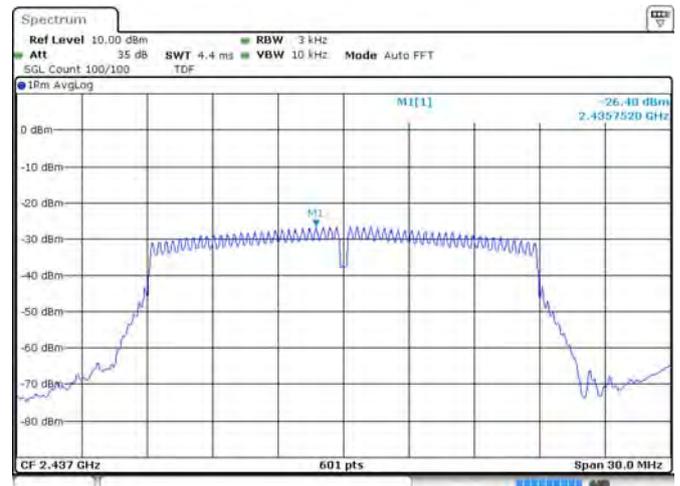


Date: 13 MAR 2021 14:55:18

802.11n-20 MHz HIGH CHANNEL




Date: 13 MAR 2021 14:57:15

802.11n-40 MHz LOW CHANNEL

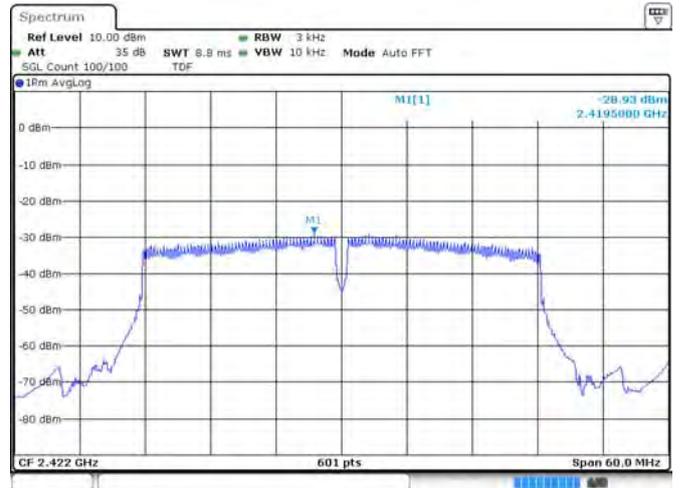


Date: 13 MAR 2021 14:58:42

802.11n-40 MHz MIDDLE CHANNEL

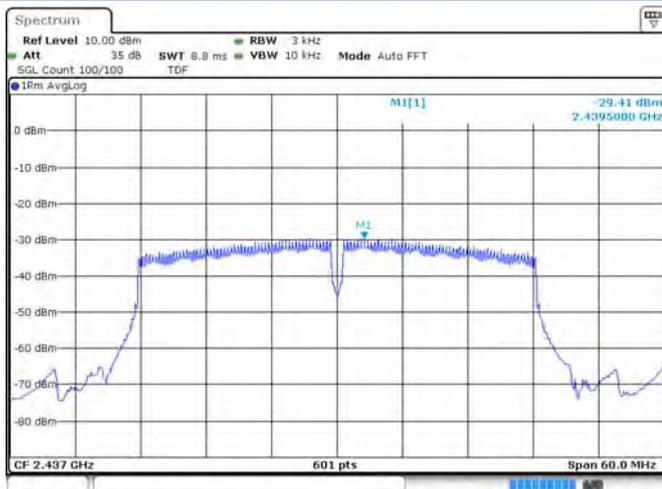

Date: 13 MAR 2021 15:01:25

802.11n-40 MHz HIGH CHANNEL

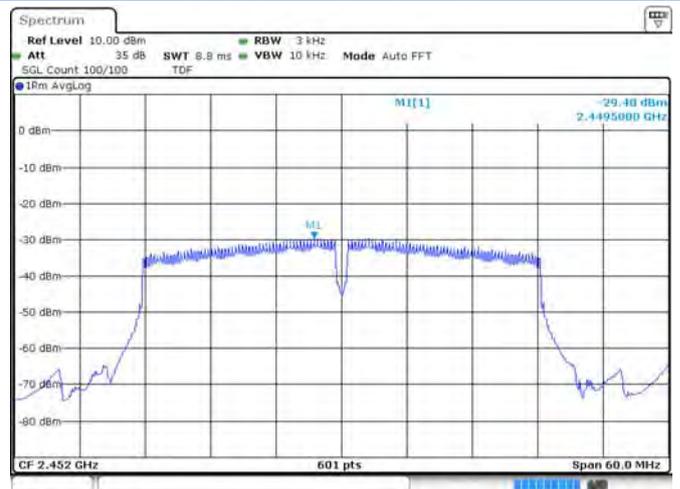

Date: 13 MAR 2021 15:03:33

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2120401-AR.pdf".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2120401-AW.pdf".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2120401-AI.pdf".

--END OF REPORT--