


版本 REV.	设计 DESIGN	日期 DATE	变更内容 CONTENTS	标记 MARK	处数 QTY.
01	王巧珠	20231010	新建		



机型编号 TYPE
TS026-3

- 技术要求
1. 印刷字体需清晰、均匀、平整、无重影；
 2. 尺寸为 292×210mm，公差 ±1mm；
 3. 装订方式：骑马钉；
 4. 黑白印刷；
 5. 所有材料满足欧盟包材指令和 RoHS 要求。

设计 DESIGN	王巧珠	20231010	材料 MATERIAL	120g 双胶纸			名称 TITLE	安装说明书
审核 CHECK							编号 PART NO.	224000167900
工艺 PROCESS			图幅 SIZE	A4	比例 SCALE	1:2	AXENT XIAMEN AXENT CORPORATION LIMITED 厦门优胜卫厨科技有限公司	
标准化 STANDARDIZE				单位 UNIT	mm			
批准 APPROVE			第 SHEET	1 张	共 OF	1 张		

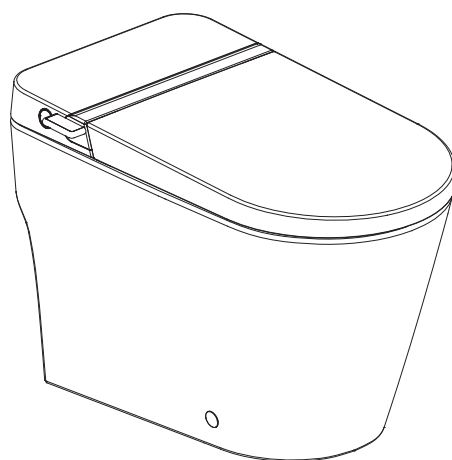

MINT ONE
TS026-3

INSTALLATION INSTRUCTIONS



SAFETY SYMBOLS

The following warning signs warn you of dangerous situations and their severity:



DANGER!

High Risk, Lethal Hazards, Severe Injuries



WARNING!

Medium Risk, Severe Injuries



CAUTION!

Low Risk, Minor Injuries



NOTE!

Damage to Property

TARGET READERSHIP AND INSTALLER QUALIFICATIONS

Installation must be carried out by qualified professionals.
Repairs should only be performed by trained and qualified persons.



NOTE!

Follow all local installation regulations and country specific voltage and plumbing standards. DO NOT install the intelligent toilet in rooms where there is a danger of frost. The room temperature and water temperature must not be less than 4°C (39 °F).

Condensation may form when the intelligent toilet is brought from a cold location to a warm one. Leave the unit switched off for a few hours before operating.



DANGER!

Risk of fatal electric shock

The appliance must be grounded and plugged into a GFCI outlet.
DO NOT remove individual components from (inside of) the intelligent toilet.
If the unit has a damaged cord or plug, return the product to a service center for repair. The cord or plug may only be changed by qualified personnel.



CAUTION!


DO NOT reuse old hoses. Please use new hoses and included components.
Axent Corp is not liable or responsible for damaged caused by 3rd party components

TECHNICAL SUPPORT


For any questions or any assistance with this product, please contact your dealer or call us at
1-800-769-4857
support@axentproducts.com
www.axentbath.us

SCOPE OF DELIVERY


Standard delivery contents

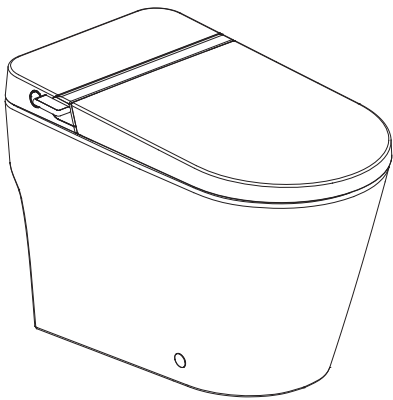


Main body




Filter

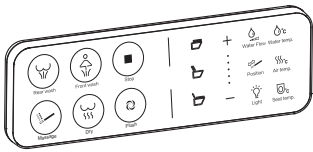


Remote Control




Battery



Remote Control Holder

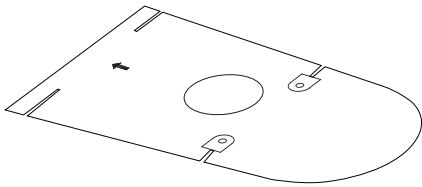


Installation template




Bowl Mounting Hardware



Holder and Anchor Bolt




Installation Manual



User Manual



Bowl Plug



Remote Control Mounting Hardware




The below parts are not included with the toilet.




Wax Ring

1

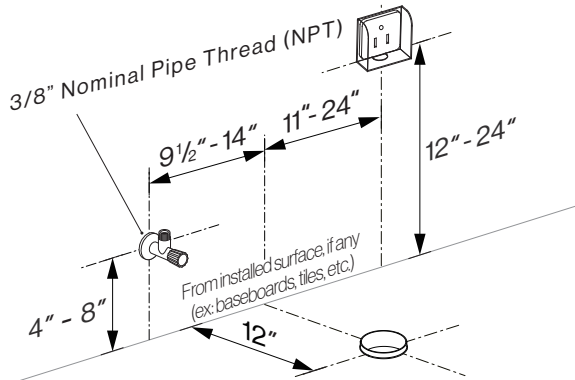


! Please verify these dimensions before beginning installation.
These dimensions may vary in some locations.
Recommended operating pressure 20 - 108 psi.

2




5~15sec

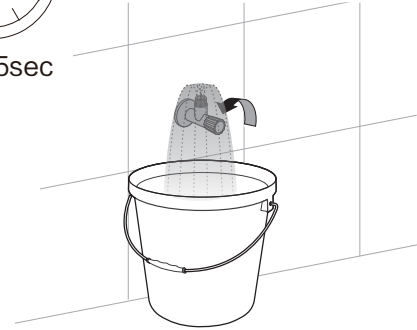


! Please run water until clear.



3

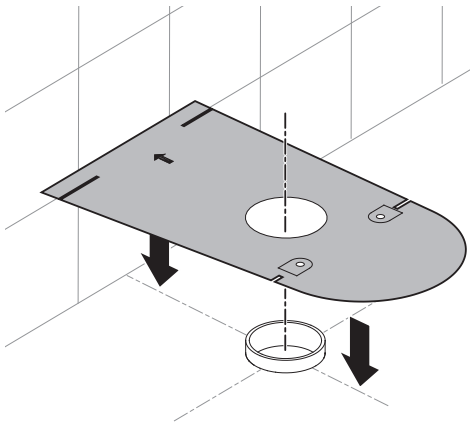


4

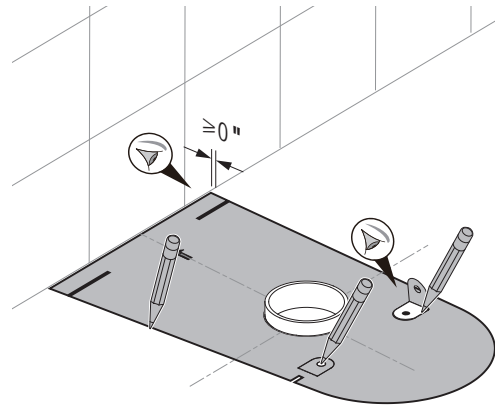

5

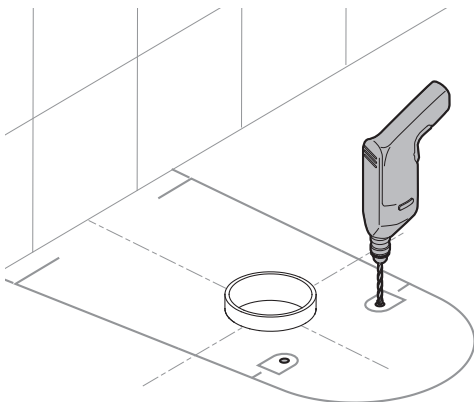


6

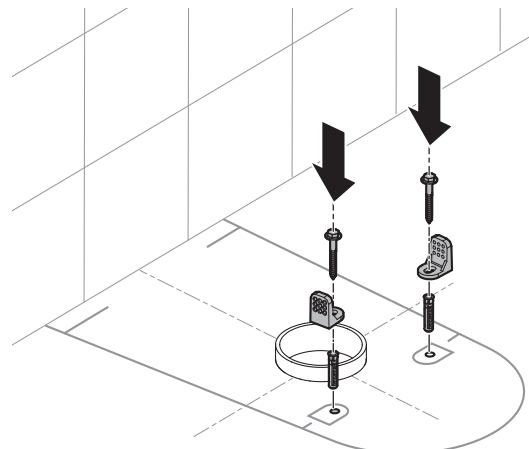


INSTALLATION

7

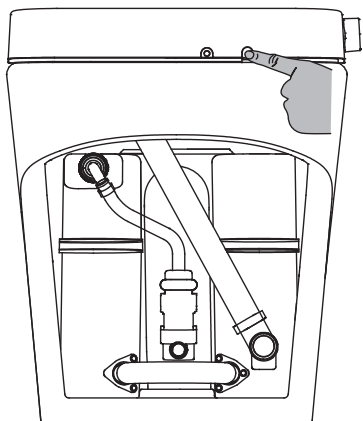


! Please press the reset button before installing.


8

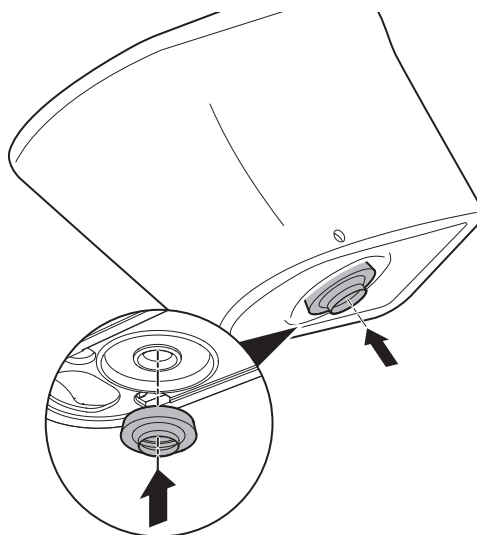


9

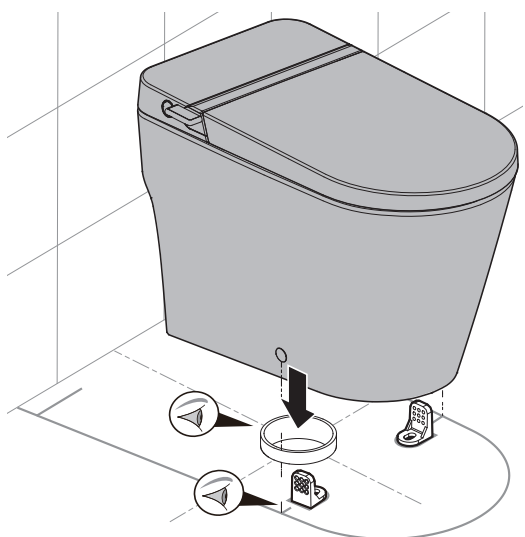


10

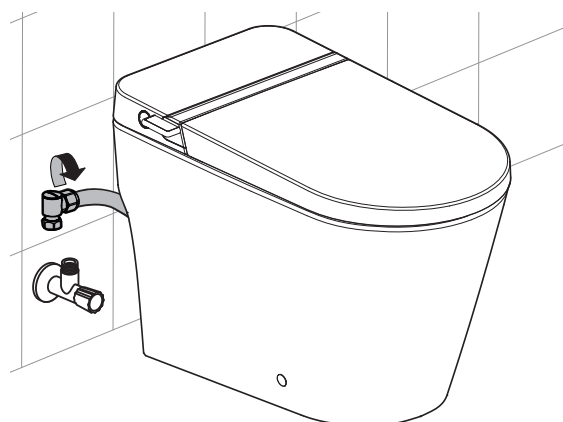

11

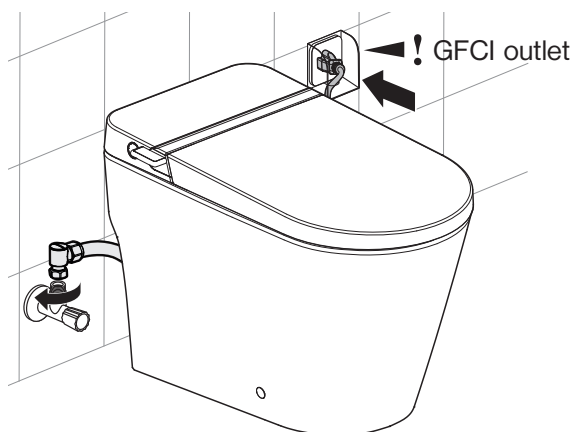


12

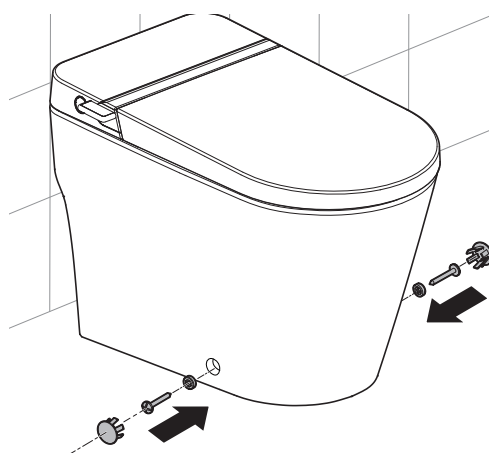


INSTALLATION


2¹

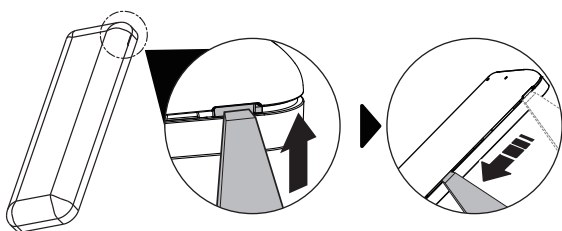


2

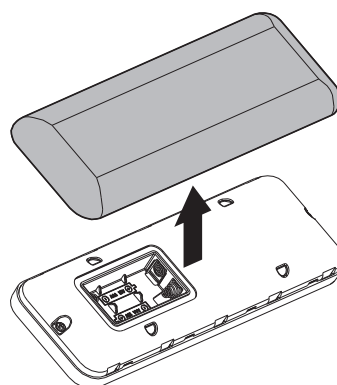


3

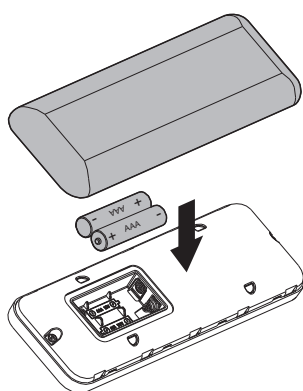


4

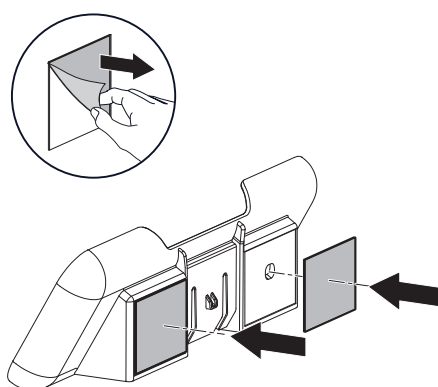


5

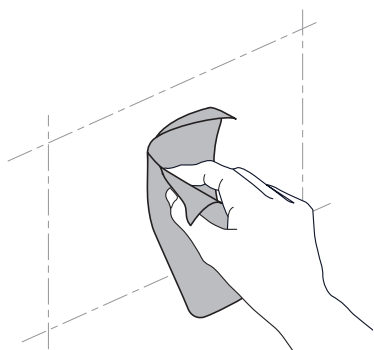

6

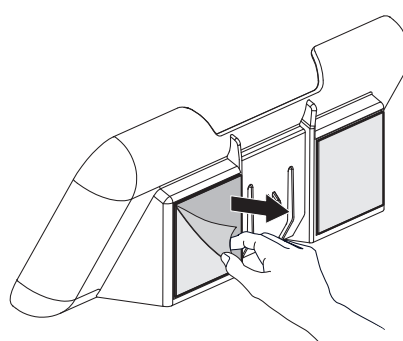


7

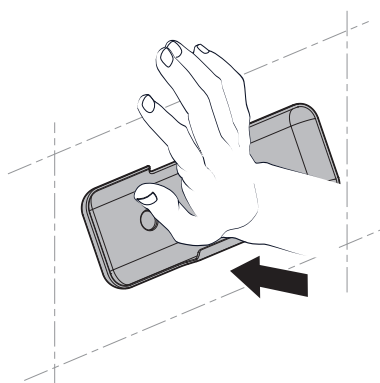

8







≥55分钟

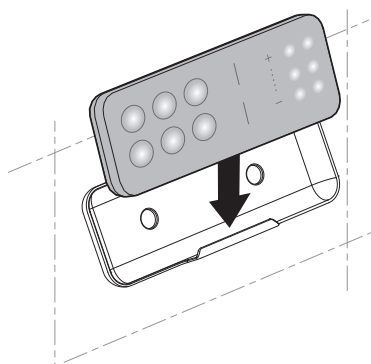


INSTALLATION


19 OPTIONAL




3




4




5



6



7



3

1




ON

2




ON

3

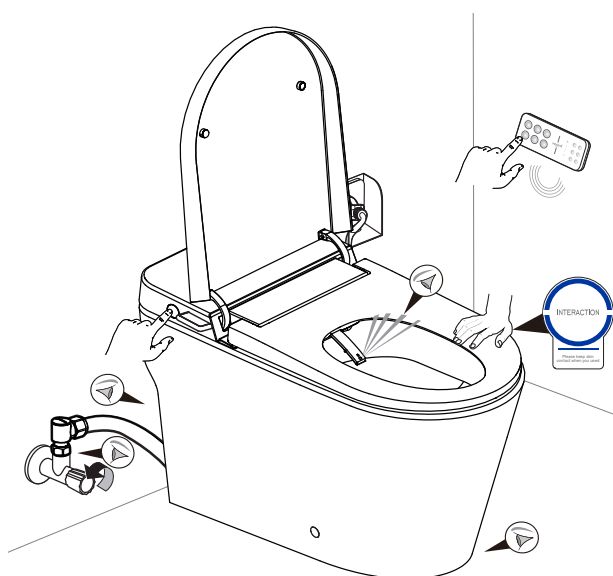

4

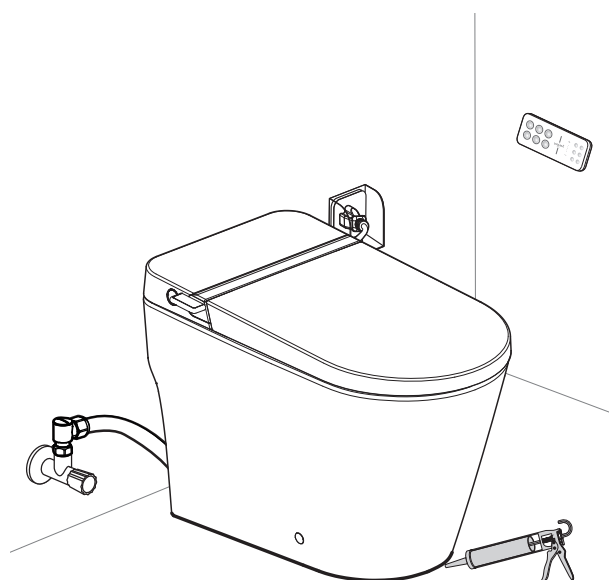

Please check for leaks before caulking.

Place serial number sticker here
for reference



AXENT Intelligence Inc.

www.axentbath.us
support@axentproducts.com
1-800-769-4857