



KSIGN(Guangdong) Testing Co, Ltd.

First Floor West Side, Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu Village, Shatou Community, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, P. R. China
Tel.: +(86) 0755-2985 2678 Fax: +(86)0755-29852397 E-mail: info@gdksign.cn Website: www.gdksign.com

TEST REPORT

Report No..... : KS1910S00173E

FCC ID..... : 2ALCD-H7A

Applicant..... : Shenzhen HeYiJia Technology Co.,Ltd.

Address..... : Room 812, Shonghua Building, Minzhi Avenue, Minzhi Street, Longhua New District, Shenzhen City, China

Manufacturer..... : Shenzhen HeYiJia Technology Co.,Ltd.

Address..... : Room 812, Shonghua Building, Minzhi Avenue, Minzhi Street, Longhua New District, Shenzhen City, China

Product Name..... : **Wireless Voice Intercom Doorbell**

Trade Mark..... : Napok

Model/Type reference..... : H7A

Listed Model(s)..... : H7B, H7C

Standard..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.231**

Date of Receipt..... : Oct.31, 2019

Date of Test Date..... : Nov.01, 2019-Mar.11, 2020


Date of issue..... : Mar.11, 2020

Test result..... : **Pass**

Compiled by:
(Printed name+signature) Emiya Lin

Supervised by:
(Printed name+signature) Kelly Cheng

Approved by:
(Printed name+signature) Cary Luo

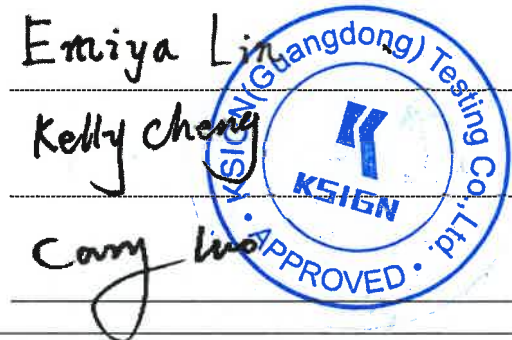

Testing Laboratory Name..... : **KSIGN(Guangdong) Testing Co., Ltd.**

Address..... : First Floor West Side, Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu Village, Shatou Community, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, P. R. China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

TABLE OF CONTENTS

Page

1. TEST SUMMARY.....	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. TEST MODE.....	7
2.4. MEASUREMENT INSTRUMENTS LIST.....	8
2.3. TEST SOFTWARE.....	8
3. TEST ITEM AND RESULTS.....	9
3.1. ANTENNA REQUIREMENT.....	9
3.2. CONDUCTED EMISSION.....	10
3.3. 20dB OCCUPIED BANDWIDTH.....	11
3.4. DEACTIVATION TIME.....	13
3.5. SPURIOUS EMISSION (RADIATED).....	15
4. EUT TEST PHOTOS.....	20
5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....	21

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66–40.70 MHz and above 70 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Mar.11, 2020	Original

1.3. Test Description

FCC Rules Part 15.231			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna requirement	15.203	Pass	Emiya Lin
Conducted Emissions	15.207	N/A	N/A
Radiated Spurious Emissions	15.205/15.209(a)/15.231(b)/15.35(c)	Pass	Emiya Lin
Deactivation Time	15.231(a)(1)	Pass	Emiya Lin
Duty Cycle	15.231	Pass	Emiya Lin
Occupied Bandwidth	15.231(c)	Pass	Emiya Lin

Note: 1. The measurement uncertainty is not included in the test result.

2.N/A: means this test item is not applicable.

1.4. Test Facility

Address of the report laboratory

KSIGN(Guangdong) Testing Co., Ltd.

First Floor West Side, Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu Village, Shatou Community, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, P. R. China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: CN0096

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

FCC-Registration No.: CN1272

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01” Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the KSIGN(Guangdong) Testing Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd..

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.23 dB	(1)
Radiated Emissions 30~1000MHz	3.35 dB	(1)
Radiated Emissions 1~18GHz	4.73 dB	(1)
Radiated Emissions 18~40GHz	5.19 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen HeYiJia Technology Co.,Ltd.
Address:	Room 812,Shonghua Building, Minzhi Avenue,Minzhi Street,Longhua New District,Shenzhen City,China
Manufacturer:	Shenzhen HeYiJia Technology Co.,Ltd.
Address:	Room 812,Shonghua Building, Minzhi Avenue,Minzhi Street,Longhua New District,Shenzhen City,China

2.2. General Description of EUT

Product Name:	Wireless Voice Intercom Doorbell
Model/Type reference:	H7A
Trademark:	Napok
Listed models:	H7B,H7C
Model Difference:	Different appearance
Power supply:	N/A
Power supply(Battery):	DC 4.5V(3*alkaline battery)
Hardware version:	V02
Software version:	V3.0
RF Specification	
Operation frequency:	467.63792MHz
Modulation Type:	FSK
Modulation connector:	<input checked="" type="checkbox"/> Without external <input type="checkbox"/> External
Occupied bandwidth	<25KHz
Product type:	<input type="checkbox"/> Wideband deceive <input checked="" type="checkbox"/> Narrowband deceive
Channel number:	1
Antenna type:	Spring antenna
Antenna gain:	0dBi

2.3. Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode	Description	Remark
1	TX	DC 4.5V

2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	Apr.25, 2020
2	Vector Signal Generator	Agilent	N5182A	MY50142520	Apr.10, 2020
3	Analog Signal Generator	HP	83752A	3344A00337	Apr.10, 2020
4	Power Sensor	Agilent	E9304A	MY50390009	Apr.10, 2020
5	Power Sensor	Agilent	E9300A	MY41498315	Apr.10, 2020
6	Wideband Radio Communication Tester	R&S	CMU200	115297	Apr.10, 2020
7	Climate Chamber	Angul	AGNH80L	1903042120	Apr.10, 2020
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	Apr.10, 2020
9	RF Control Unit	Tonscend	JS0806-2	/	Apr.10, 2020

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	EMI Test Receiver	R&S	ESR	102525	Apr.10, 2020
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	Apr.15, 2020
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	Apr.15, 2020
4	Spectrum Analyzer	HP	8593E	3831U02087	Apr.10, 2020
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	Apr.17, 2020
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	Apr.17, 2020
7	Horn Antenna	R&S	Sep-60	69483	Apr.10, 2020
8	Spectrum Analyzer	R&S	FSV40-N	101798	Apr.25, 2020
9	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	Apr.10, 2020
10	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	Apr.10, 2020
11	Pre-Amplifier	EMCI	EMC051835SE	980662	Apr.17, 2020
12	Power Meter	Agilent	E4419B	GB41293710	Apr.10, 2020

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

2.3. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

3. TEST ITEM AND RESULTS

3.1. Antenna requirement


Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

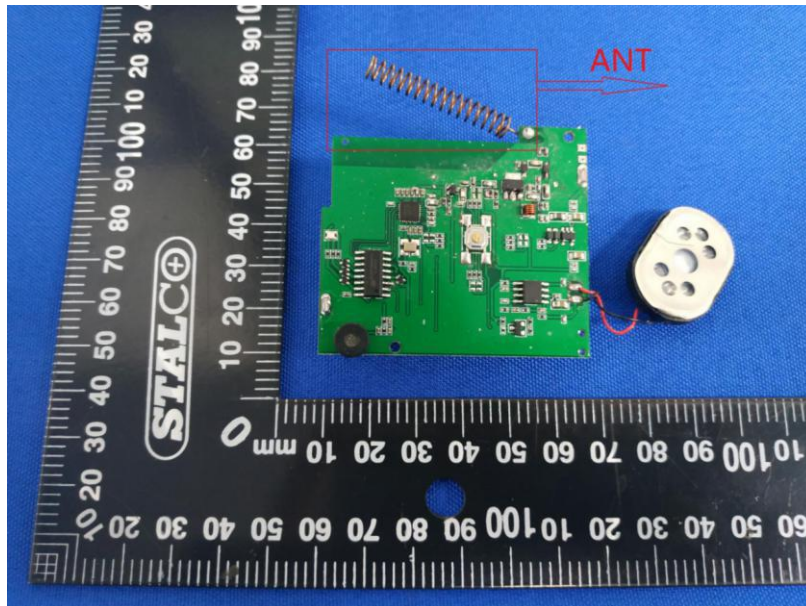

3.2. Conducted Emission

Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

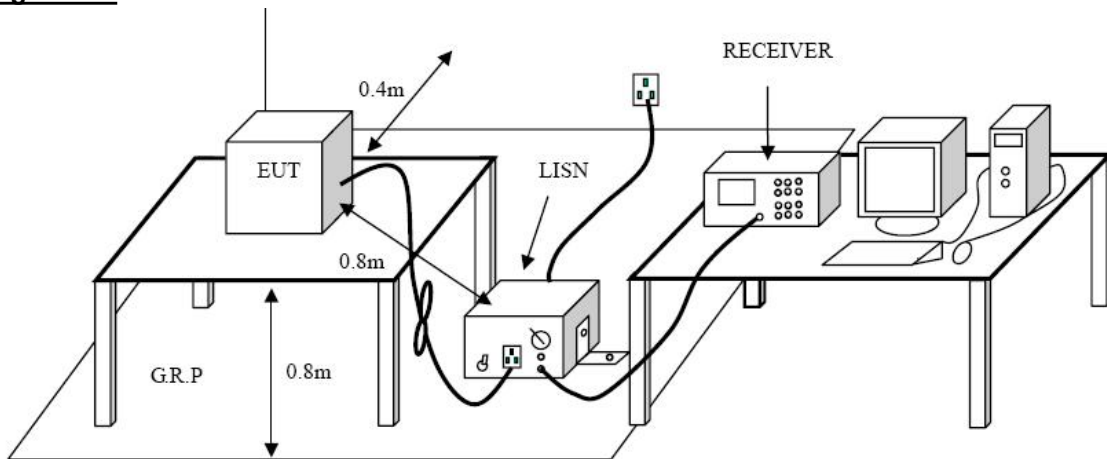

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode:

Please refer to the clause 2.3.

Test Results


- Passed Not Applicable

3.3. 20dB Occupied Bandwidth

Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency

Test Configuration

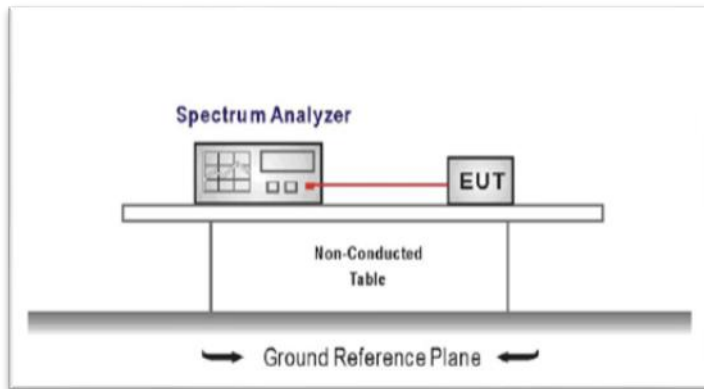


Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a operation channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.3.

Test Results

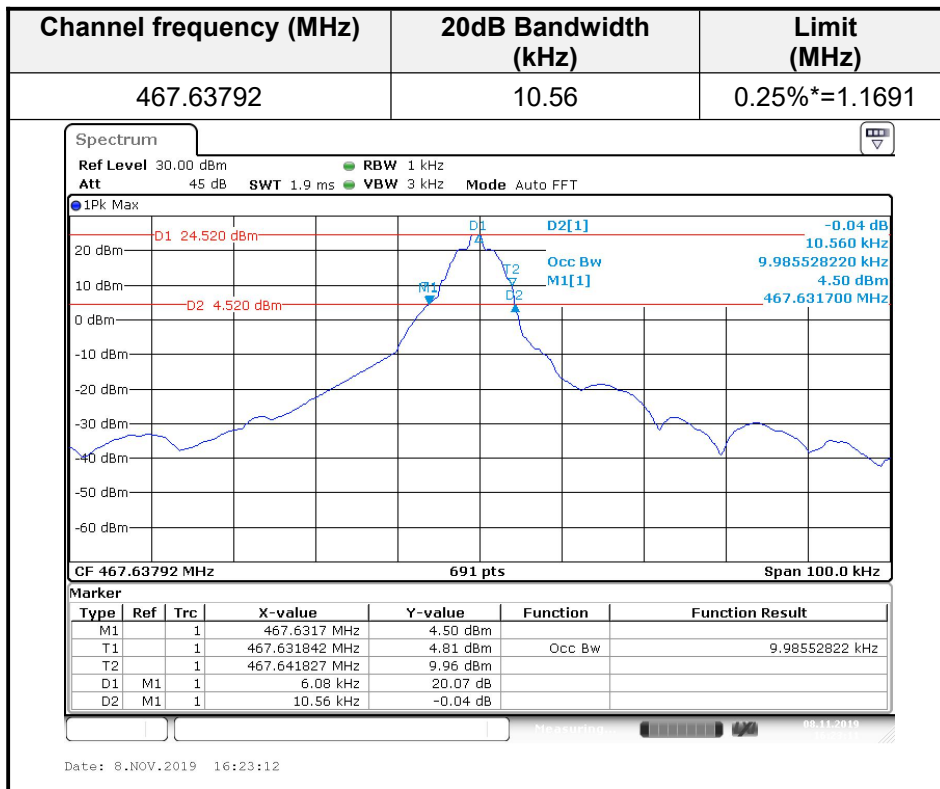


3.4. Deactivation Time

Limit

A manually operated transmitter shall employ a switch that will auto-matically deactivate the transmitter within not more than 5 seconds of being released.

Test Configuration

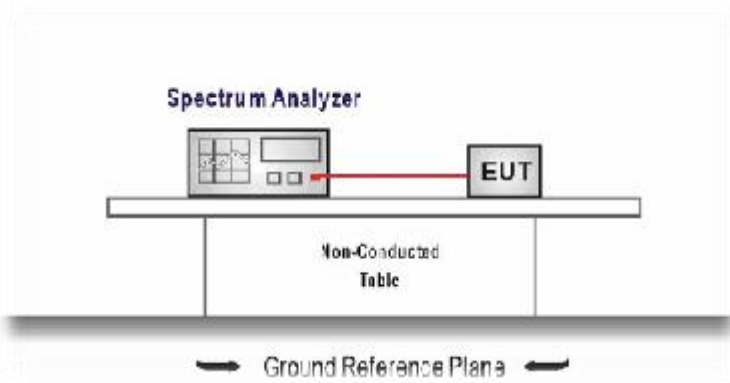


Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Frequency=Center carrier frequency
RBW=100KHz, VBW=300KHz, Span= 0,
Sweep time= 10 second, Detector function = peak, Trace = single
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.3.

Test Results

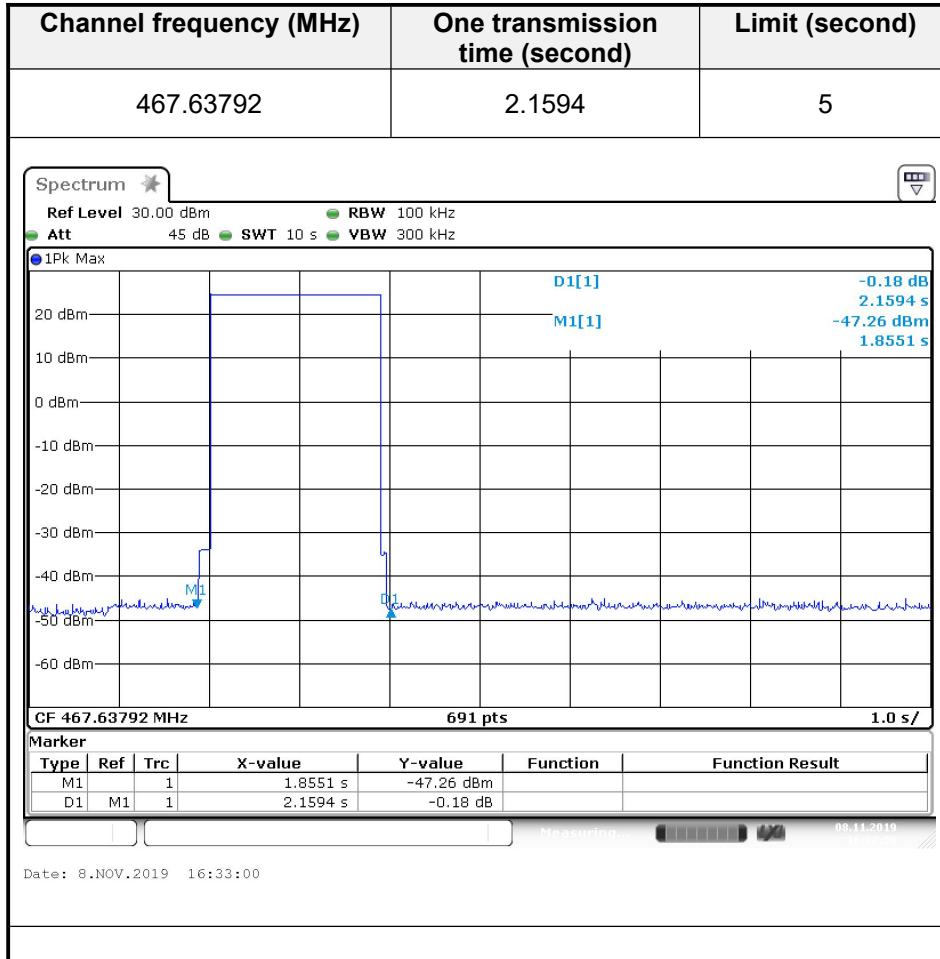

3.5. Spurious Emission (radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated **average value** under this section shall not exceed the following

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
260 - 470 MHz	3,750 to 12,500 **	375 to 1,250 **


** linear interpolations

F is 467.63792MHz


Field strength of fundamental: μ V/m at 3 meters = 41.6667(F) - 7083.3420

Field strength of harmonics: μ V/m at 3 meters = 4.16667(F) - 708.3342


Test Configuration

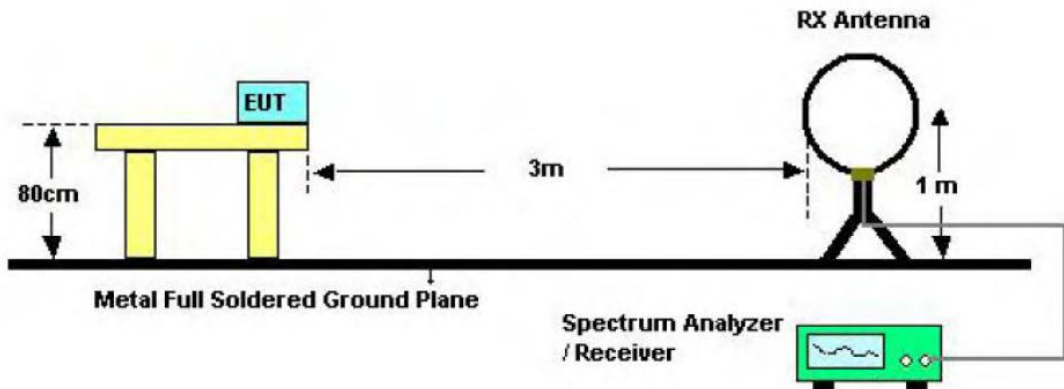

Below 30MHz Test Setup

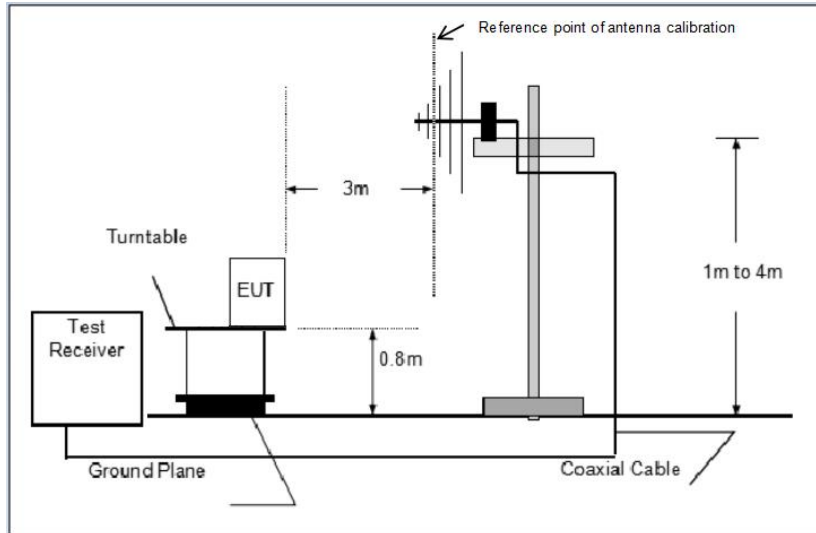

Below 1000MHz Test Setup

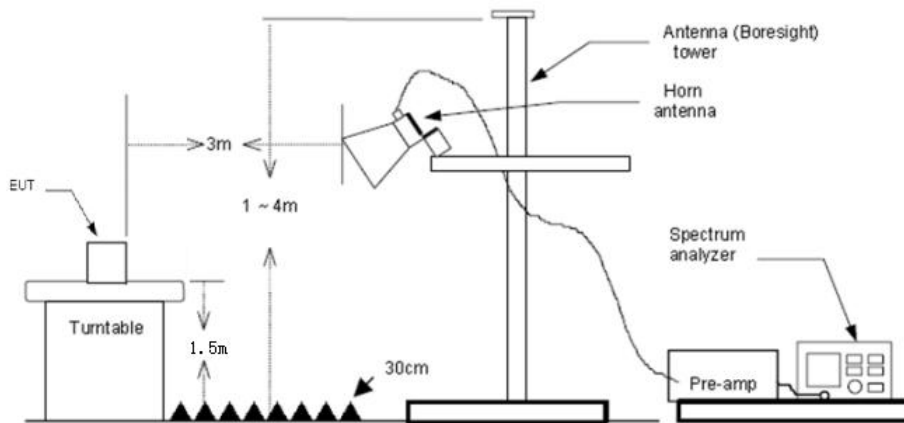

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
 RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW=10Hz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3.

Test Result**9 KHz~30 MHz , 30MHz-1GHz and 1GHz~6GHz**

From 9 KHz~30 MHz, 30MHz-1GHz and 1GHz~6GHz: Conclusion: PASS

Note:

- 1) Final level = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

■ 30MHz~ 1000MHz

Test Channel				467.63792MHz			
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Final level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
66.5456	26.75	-17.37	9.38	40.00	-30.62	Vertical	QP
207.6316	31.27	-16.54	14.73	43.50	-28.77	Vertical	QP
337.5705	28.53	-13.33	15.20	46.00	-30.80	Vertical	QP
494.0252	32.77	-10.04	22.73	46.00	-23.27	Vertical	QP
467.6379	91.16	-10.10	81.06	101.87	-20.81	Vertical	Peak
935.5463	47.11	-4.44	42.67	81.87	-39.20	Vertical	Peak
467.6379	64.33	-10.10	54.23	81.87	-27.64	Vertical	AVG
935.5463	17.16	-4.44	12.72	61.87	-49.15	Vertical	AVG
55.2594	24.15	-15.02	9.13	40.00	-30.87	Horizontal	QP
207.6316	34.15	-16.54	17.61	43.50	-25.89	Horizontal	QP
337.6888	36.95	-13.33	23.62	46.00	-22.38	Horizontal	QP
493.3327	40.43	-10.04	30.39	46.00	-15.61	Horizontal	QP
467.6379	100.66	-10.10	90.56	101.87	-11.31	Horizontal	Peak
935.5463	50.18	-4.44	45.74	81.87	-36.13	Horizontal	Peak
467.6379	81.17	-10.09	71.08	81.87	-10.79	Horizontal	AVG
935.5463	17.76	-4.44	13.32	61.87	-48.55	Horizontal	AVG

Note:Duty cycle factor = $20\log(\text{Duty cycle})=0$, Duty cycle = $T_{on} / (T_{on} + T_{off})=100\%$

■ 1GHz~ 6GHz

Test Channel				467.63792MHz			
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Final level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1403.000	78.54	-16.04	62.50	74.00	-11.50	Vertical	Peak
1403.000	66.12	-16.04	50.08	54.00	-3.92	Vertical	AVG
2338.000	72.72	-13.57	59.15	74.00	-14.85	Vertical	Peak
2338.000	63.89	-13.57	50.32	54.00	-3.68	Vertical	AVG
2806.000	77.50	-12.88	64.62	74.00	-9.38	Vertical	Peak
2806.000	63.00	-12.88	50.12	54.00	-3.88	Vertical	AVG
3273.500	73.04	-11.74	61.30	74.00	-12.70	Vertical	Peak
3273.500	62.00	-11.74	50.26	54.00	-3.74	Vertical	AVG
5144.500	63.55	-7.11	56.44	74.00	-17.56	Vertical	Peak
5144.500	57.37	-7.11	50.26	54.00	-3.74	Vertical	AVG
5612.000	62.75	-6.23	56.52	74.00	-17.48	Vertical	Peak
5612.000	54.44	-6.23	48.21	54.00	-5.79	Vertical	AVG
1403.000	80.71	-16.04	64.67	74.00	-9.33	Horizontal	Peak
1403.000	56.39	-16.04	40.35	54.00	-13.65	Horizontal	AVG
1870.500	77.20	-14.48	62.72	74.00	-11.28	Horizontal	Peak
1870.500	60.39	-14.48	45.91	54.00	-8.09	Horizontal	AVG
2338.500	80.15	-13.57	66.58	74.00	-7.42	Horizontal	Peak
2338.500	52.93	-13.57	39.36	54.00	-14.64	Horizontal	AVG
2805.500	79.23	-12.88	66.35	74.00	-7.65	Horizontal	Peak
2805.500	53.99	-12.88	41.11	54.00	-12.89	Horizontal	AVG
3273.000	72.94	-11.74	61.20	74.00	-12.80	Horizontal	Peak
3273.000	55.41	-11.74	43.67	54.00	-10.33	Horizontal	AVG
3741.000	66.56	-10.26	56.30	74.00	-17.70	Horizontal	Peak
3741.000	60.37	-10.26	50.11	54.00	-3.89	Horizontal	AVG

Note:Duty cycle factor = 20log (Duty cycle)=0, Duty cycle = T_{on} / (T_{on} + T_{off})=100%

4.EUT TEST PHOTOS

Reference to the document No.: Test Photos.

5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Reference to the document No.: External Photos and Internal Photos.

*****THE END*****