



Date: 23.JUL.2018 11:37:09

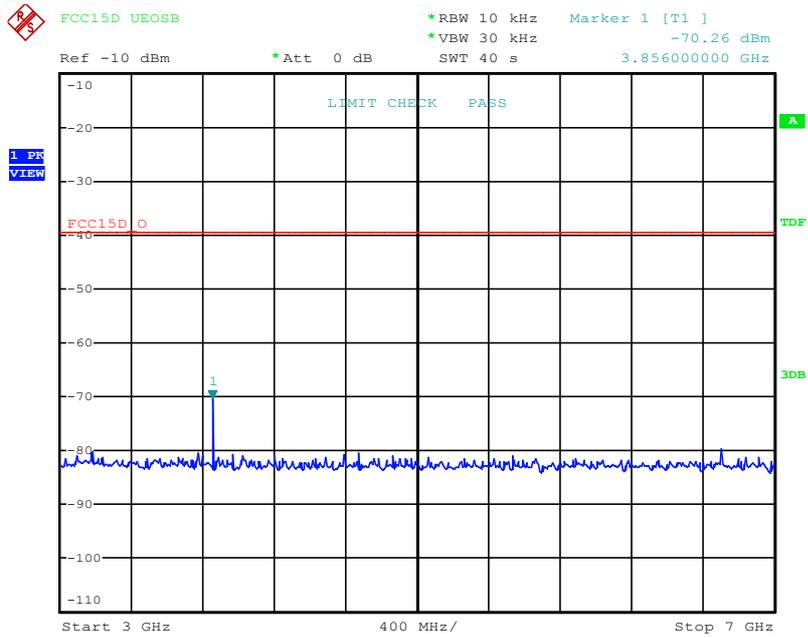

Date: 23.JUL.2018 11:39:04

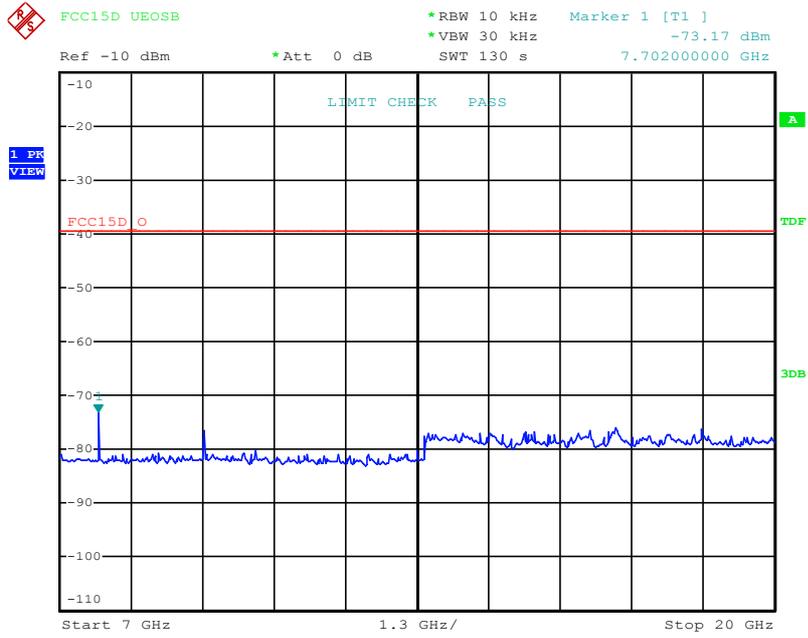

Date: 23.JUL.2018 11:44:17

3. 6 Radiated Spurious Emission

3.6.1 Test Equipment

Please refer to section 6 this report.

3.6.2 Test Procedure


The transmitter was placed on a wooden turntable and was transmitting in a non radiating dummy load which was directly connected to the antenna connector. The battery was replaced by monitored voltage source. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna was height and polarization as well as the EUT azimuth where varied in orders to identify the maximum level of emission from the EUT. The test was performed by placing the EUT on 3 orthogonal axis. The frequency range up to tenth harmonic of the fundamental frequency was investigated. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. All tests was performed for the lower, the middle and the highest frequency.



The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.17. The specification used was the FCC 15§ 15.319(g).

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RWB	Video B/W	IF B/W	Detector
30~1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	1MHz	/	PK
	1MHz	30Hz	/	AV

3.6.3 Test Setup

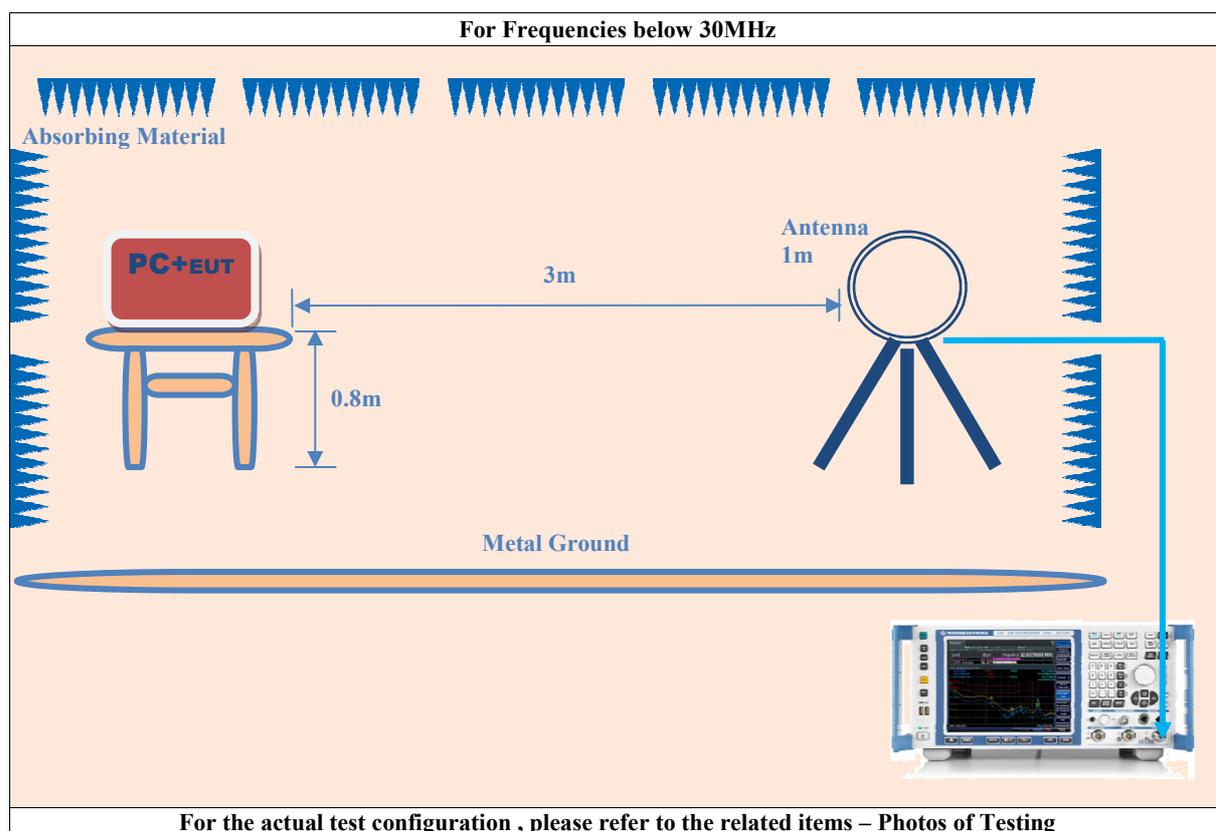

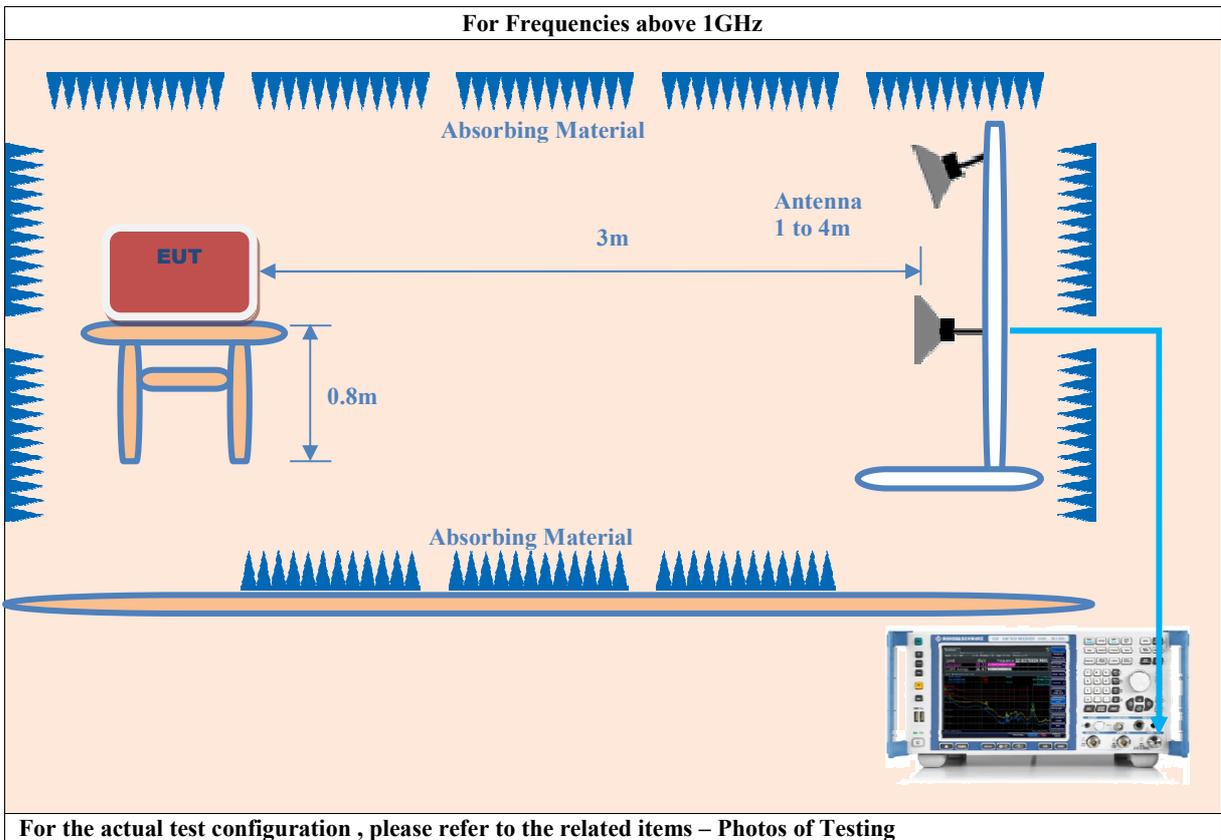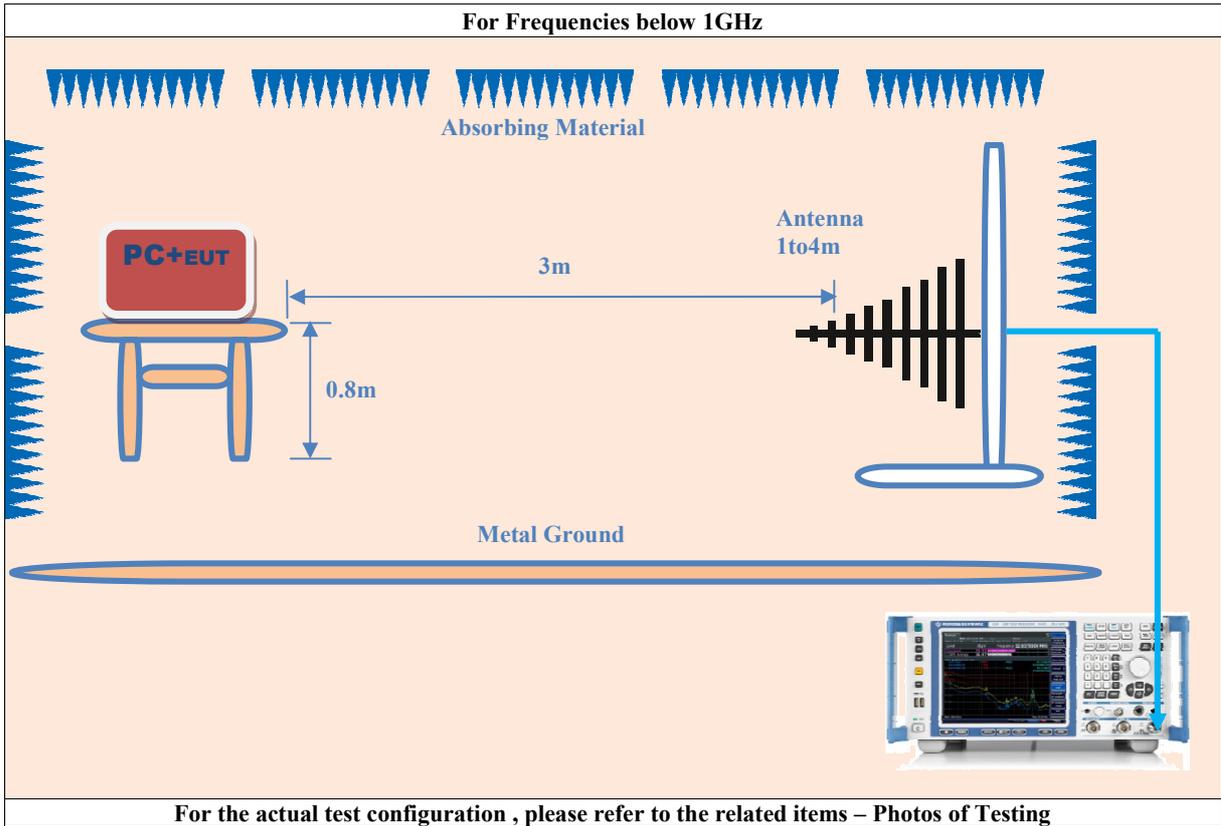

3.6.4 Configuration of The EUT

Same as section 3.1.4 of this report

3.6.5 EUT Operating Condition

Same as section 3.1.5 of this report

3.6.6 Limit

According to FCC§15.319(g), notwithstanding other technical requirements specified in this subpart, attenuation of emissions below the general emission limits in §15.209 is not required.

3.6.7 Radiated Spurious Emission Test Result

FP

Ant0

Channel: Low (1921.536 MHz)

Freq. (MHz)	Read Level(dBuV)		Corr. Factor (dB)		Emission (dBuV/m)		Horiz./Vert.	Limit (dBuV/m)		Margin(dB)	
	PK	AV			PK	AV		PK	AV	PK	AV
1921.40	108.44	-	-0.18	-	108.26	-	Horiz./	-	-	-	-
1921.40	107.31	-	-0.18	-	107.13	-	Vert.	-	-	-	-
3843.10	67.92	-	3.31	-25.24	71.23	45.99	Horiz./	74.00	54.00	-2.77	-8.01
3843.10	64.94	-	3.31	-25.24	68.25	43.01	Vert.	74.00	54.00	-5.75	-10.99
5764.60	44.55	-	13.10	-25.24	57.65	32.41	Horiz./	74.00	54.00	-16.35	-21.59
5764.60	41.59	-	13.10	-25.24	54.69	29.45	Vert.	74.00	54.00	-19.31	-24.55
7686.30	37.09	-	19.20	-25.24	56.29	31.05	Horiz./	74.00	54.00	-17.71	-22.95
7686.30	34.67	-	19.20	-25.24	53.87	-	Vert.	74.00	54.00	-20.13	-

Channel: Mid (1924.992 MHz)


Freq. (MHz)	Read Level(dBuV)		Corr. Factor (dB)		Emission (dBuV/m)		Horiz./Vert.	Limit (dBuV/m)		Margin(dB)	
	PK	AV			PK	AV		PK	AV	PK	AV
1924.90	108.19	-	-0.18	-	108.01	-	Horiz./	-	-	-	-
1924.90	106.87	-	-0.18	-	106.69	-	Vert.	-	-	-	-
3849.80	66.95	-	3.31	-25.24	70.26	45.02	Horiz./	74.00	54.00	-3.74	-8.98
3849.80	64.22	-	3.31	-25.24	67.53	42.29	Vert.	74.00	54.00	-6.47	-11.71
5774.90	50.65	-	13.10	-25.24	63.75	38.51	Horiz./	74.00	54.00	-10.25	-15.49
5774.90	47.53	-	13.10	-25.24	60.63	35.39	Vert.	74.00	54.00	-13.37	-18.61
7699.60	37.17	-	19.20	-25.24	56.37	31.13	Horiz./	74.00	54.00	-17.63	-22.87
7699.60	34.34	-	19.20	-25.24	53.54	-	Vert.	74.00	54.00	-20.46	-

Channel: High (1928.448 MHz)

Freq. (MHz)	Read Level(dBuV)		Corr. Factor (dB)		Emission (dBuV/m)		Horiz./Vert.	Limit (dBuV/m)		Margin(dB)	
	PK	AV			PK	AV		PK	AV	PK	AV
1928.40	108.03	-	-0.18	-	107.85	-	Horiz./	-	-	-	-
1928.40	105.86	-	-0.18	-	105.68	-	Vert.	-	-	-	-
3856.80	67.33	-	3.31	-25.24	70.64	45.40	Horiz./	74.00	54.00	-3.36	-8.60
3856.80	64.98	-	3.31	-25.24	68.29	43.05	Vert.	74.00	54.00	-5.71	-10.95
5785.20	45.44	-	13.10	-25.24	58.54	33.30	Horiz./	74.00	54.00	-15.46	-20.70
5785.20	40.23	-	13.10	-25.24	53.33	-	Vert.	74.00	54.00	-20.67	-
7713.60	35.15	-	19.20	-25.24	54.35	29.11	Horiz./	74.00	54.00	-19.65	-24.89
7713.60	33.68	-	19.20	-25.24	52.88	-	Vert.	74.00	54.00	-21.12	-

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
 - (2) Emission Level = Reading Level + Probe Factor + Cable Loss – Amplifier Factor
 - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
 - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
 - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
 - (6) $AV=PK+20 \cdot \lg(\text{Duty Cycle})$
 Duty Cycle=Ton/Tp*100%,
 Ton = 550μs,
 Tp= 10.050ms
 Duty Cycle = Duty cycle factor = $20 \lg(\text{Duty Cycle}) = -25.24$

Duty Cycle

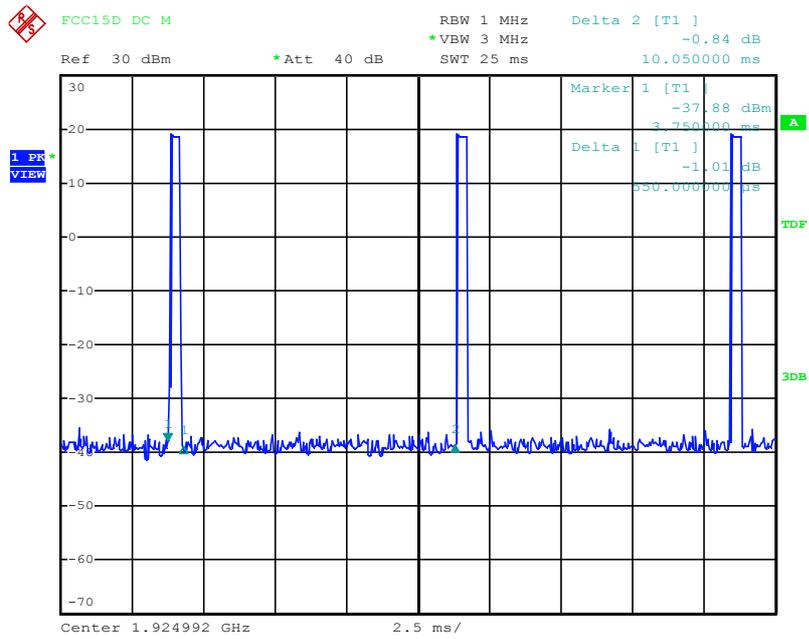

Date: 23.JUL.2018 16:49:41

Ant1

Channel: Low (1921.536 MHz)

Freq. (MHz)	Read Level(dBuV)		Corr. Factor (dB)		Emission (dBUV/m)		Horiz./ Vert.	Limit (dBUV/m)		Margin(dB)	
	PK	AV			PK	AV		PK	AV	PK	AV
1921.40	106.75	-	-0.18	-	106.57	-	Horiz./	-	-	-	-
1921.40	104.56	-	-0.18	-	104.38	-	Vert.	-	-	-	-
3843.10	66.34	-	3.31	-26.02	69.65	43.63	Horiz./	74.00	54.00	-4.35	-10.37
3843.10	63.97	-	3.31	-26.02	67.28	41.26	Vert.	74.00	54.00	-6.72	-12.74
5764.60	43.59	-	13.10	-26.02	56.69	30.67	Horiz./	74.00	54.00	-17.31	-23.33
5764.60	40.37	-	13.10	-26.02	53.47	-	Vert.	74.00	54.00	-20.53	-
7686.30	35.16	-	19.20	-26.02	54.36	28.34	Horiz./	74.00	54.00	-19.64	-25.66
7686.30	32.14	-	19.20	-26.02	51.34	-	Vert.	74.00	54.00	-22.66	-

Channel: Mid (1924.992 MHz)


Freq. (MHz)	Read Level(dBuV)		Corr. Factor (dB)		Emission (dBUV/m)		Horiz./ Vert.	Limit (dBUV/m)		Margin(dB)	
	PK	AV			PK	AV		PK	AV	PK	AV
1924.90	105.82	-	-0.18	-	105.64	-	Horiz./	-	-	-	-
1924.90	104.80	-	-0.18	-	104.62	-	Vert.	-	-	-	-
3849.80	65.32	-	3.31	-26.02	68.63	42.61	Horiz./	74.00	54.00	-5.37	-11.39
3849.80	63.17	-	3.31	-26.02	66.48	40.46	Vert.	74.00	54.00	-7.52	-13.54
5774.90	51.52	-	13.10	-26.02	64.62	38.60	Horiz./	74.00	54.00	-9.38	-15.40
5774.90	49.26	-	13.10	-26.02	62.36	36.34	Vert.	74.00	54.00	-11.64	-17.66
7699.60	36.08	-	19.20	-26.02	55.28	29.26	Horiz./	74.00	54.00	-18.72	-24.74
7699.60	33.44	-	19.20	-26.02	52.64	-	Vert.	74.00	54.00	-21.36	-

Channel: High (1928.448 MHz)

Freq. (MHz)	Read Level(dBuV)		Corr. Factor (dB)		Emission (dBUV/m)		Horiz./ Vert.	Limit (dBUV/m)		Margin(dB)	
	PK	AV			PK	AV		PK	AV	PK	AV
1928.40	106.55	-	-0.18	-	106.37	-	Horiz./	-	-	-	-
1928.40	105.01	-	-0.18	-	104.83	-	Vert.	-	-	-	-
3856.80	65.08	-	3.31	-26.02	68.39	42.37	Horiz./	74.00	54.00	-5.61	-11.63
3856.80	62.51	-	3.31	-26.02	65.82	39.80	Vert.	74.00	54.00	-8.18	-14.20
5785.20	44.19	-	13.10	-26.02	57.29	31.27	Horiz./	74.00	54.00	-16.71	-22.73
5785.20	42.24	-	13.10	-26.02	55.34	29.32	Vert.	74.00	54.00	-18.66	-24.68
7713.60	35.42	-	19.20	-26.02	54.62	28.60	Horiz./	74.00	54.00	-19.38	-25.40
7713.60	32.69	-	19.20	-26.02	51.89	-	Vert.	74.00	54.00	-22.11	-

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
 - (2) Emission Level = Reading Level + Probe Factor + Cable Loss – Amplifier Factor
 - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
 - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
 - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
 - (6) $AV = PK + 20 \cdot \lg(\text{Duty Cycle})$
Duty Cycle = $Ton / Tp \cdot 100\%$,
 $Ton = 500\mu s$,
 $Tp = 10ms$
Duty Cycle = Duty cycle factor = $20 \lg(\text{Duty Cycle}) = -26.02$

Duty Cycle

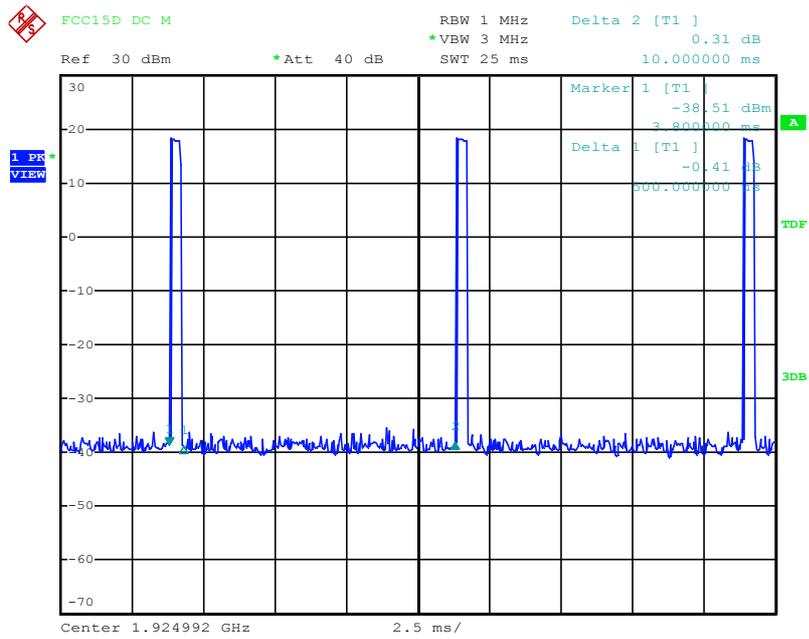

Date: 23.JUL.2018 17:28:09

3.7 Carrier Frequency Stability

3.7.1 Test Equipment

Please refer to section 6 this report.

3.7.2 Test Procedure


ANSI C63.17, clause 6.2.1. The Frequency Stability is measured with the CMD60. The CMD60 was logged by a computer programmed to get new readings as fast as possible (about 3 readings per second) over the noted time period or number of readings. The peak-to-peak difference was recorded and the mean value and deviation in ppm was calculated.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

Temperature	Supply Voltage
20°C	85-115% or new batteries
-20°C	Normal
+50°C	Normal

Note: Use the lowest temperature at which the EUT is specified to operate if it is above -20 °C.

3.7.3 Test Setup

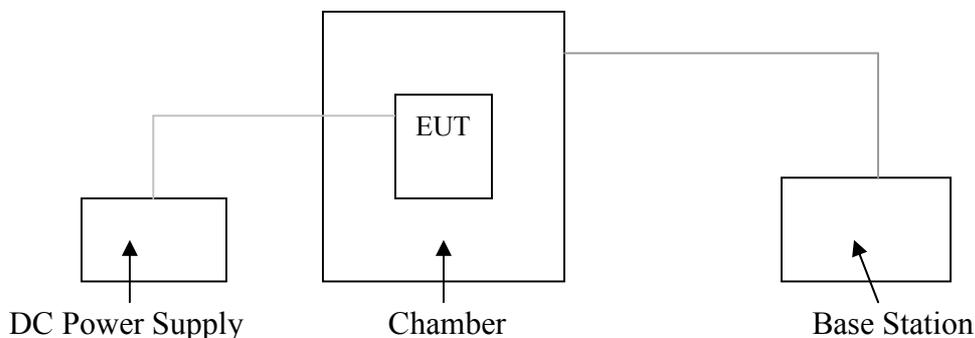

3.7.4 Configuration of The EUT

Same as section 3.1.4 of this report

3.7.5 EUT Operating Condition

Same as section 3.1.5 of this report

3.7.6 Limit

Ref. FCC 15.323(e), RSS-213 Issue 3, clause 5.3

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20°C . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage

3.7.7 Frequency Stability Test Result

FP-Ant0

Frequency Stability over Power Supply Voltage at Nominal Temperature

Voltage	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
V_{nom}	1924.992	0.00	0.00	±10
85% of V_{nom}	1924.992	2.00	1.04	±10
115% of V_{nom}	1924.992	1.00	0.52	±10

Frequency Stability over Temperature

Temperature (°C)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
20	1924.992	0.00	0.00	±10
-20	1924.992	-3.60	-1.87	±10
50	1924.992	-3.00	-1.56	±10

FP_Ant1

Frequency Stability over Power Supply Voltage at Nominal Temperature

Voltage	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
V_{nom}	1924.992	0.00	0.00	±10
85% of V_{nom}	1924.992	1.20	0.62	±10
115% of V_{nom}	1924.992	3.00	1.56	±10

Frequency Stability over Temperature

Temperature (°C)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
20	1924.992	0.00	0.00	±10
-20	1924.992	-1.35	-0.70	±10
50	1924.992	-2.10	-1.09	±10

3.8 FCC§15.323 (c) (e) & §15.319(f) / RSS-213 Issue 3, clause 5.2– Specific Requirements for UPCS Device

3.8.1 Frame Repetition Stability Part15 .323 (e) / RSS-213 Issue 3, clause 5.2

Test Procedure

According to ANSI C63.17, clause 6.2.2., The envelope of the RF signal from the EUT is detected with a Crystal Detector and the mean and standard deviation of the frame repetition frequency is then gated over 100 frames and measured with a Frequency Domain Analyzer. The frame repetition stability is 3 times the standard deviation.

Limit

Frame Repetition Stability	±10 ppm (TDMA)
-----------------------------------	-----------------------

Ref. FCC 15.323(e), ANSI C63.17, clause 6.2.2

Test Result

FP

Ant0

Frame Repetition Stability (ppm)	Limit (ppm)	Result (Pass/Fail)
3.74	±10	Pass

Ant1

Frame Repetition Stability (ppm)	Limit (ppm)	Result (Pass/Fail)
3.58	±10	Pass

3.8.2 Frame Period and Jitter Part15 .323 (e) / RSS-213 Issue 3, clause 5.2

Test Procedure

According to ANSI C63.17, clause 6.2.3.

Limit

Ref. FCC 15.323(e), RSS-213 Issue 3, clause 5.2

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number.

Frame Period	20 or 10 ms
Max Jitter	25 μs
3 times St.Dev of Jitter	12.5 μs

Test Result

FP

Ant0

Max.pos. Jitter (us)	Max. neg. Jitter (us)	Frame period (us)	Limit	
			Frame Period (ms)	Jitter (μs)
0.12	-0.04	10.00000	20 or10/X	25

Ant1

Max.pos. Jitter (us)	Max. neg. Jitter (us)	Frame period (us)	Limit	
			Frame Period (ms)	Jitter (μs)
0.12	-0.04	10.00000	20 or10/X	25

Note: X is a positive whole number.

3.8.3 Lower Monitoring Threshold Part15.323 (c) (2) / RSS-213 Issue 3, clause 5.2**Test Procedure**

Measurement method according to ANSI C63.17 clause 7.3.1

Limit

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

The Lower Threshold is applicable for systems which have defined less than 40 duplex system access channels. The Upper Threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

Test Result

Not Applicable. For the EUT which support LIC there is no need to measure lower threshold because it is automatically met by LIC procedure.

3.8.4 Least Interfered Channel (LIC) Selection, FCC Part15.323 (c) (5) / RSS-213 Issue 3, clause 5.2**Test Procedure**

Measurement method according to ANSI C63.17 clause 7.3.2, 7.3.3, 7.3.4

If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold: $T_L = -174 + 10 \log_{10} B + M_u + P_{MAX} - P_{EUT}$ (dBm)

Upper threshold: $T_U = -174 + 10 \log_{10} B + M_u + P_{MAX} - P_{EUT}$ (dBm)

Where: B=Emission bandwidth (Hz)

M_u =dB the threshold may exceed thermal noise (30 for T_L & 50 for T_U)

$P_{MAX} = 5 \log_{10} B - 10$ (dBm)

P_{EUT} =Transmitted power (dBm)

Limit

FCC 15.323, RSS-213 Issue 3, clause 5.2

FP**Ant0**

Monitor Threshold	B (MHz)	MU (dB)	P MAX (dBm)	PEUT (dBm)	Threshold (dBm)
T_L	1.470	30.00	20.83	19.42	-80.92
T_U	1.470	50.00	20.83	19.42	-60.92

Ant1

Monitor Threshold	B (MHz)	MU (dB)	P MAX (dBm)	PEUT (dBm)	Threshold (dBm)
T_L	1.470	30.00	20.83	18.63	-80.13
T_U	1.470	50.00	20.83	18.63	-60.13

The EUT must not transmit until the interference level is less than or equal to:

Measured Threshold Level $\leq T_U$

Where: T_U =Upper threshold level

Test Result**FP****Ant0**

Monitor threshold	Measured Threshold Level	Limit (dBm)
Lower Threshold (dBm)	N/A	-80.92
Upper Threshold (dBm)	N/A	-60.92

Ant1

Monitor threshold	Measured Threshold Level	Limit (dBm)
Lower Threshold (dBm)	N/A	-80.13
Upper Threshold (dBm)	N/A	-60.13

Note: N/A Not applicable- EUT which supports at least of 40 duplex system access channels and implements Least Interfered Channel (LIC) algorithm is permitted to use an upper monitoring threshold. Please refer to the section 4.16.2 for more details.

3.8.5 Monitoring Bandwidth, FCC Part 15.323 (c) (7) / RSS-213 Issue 3, clause 5.2**Test Procedure**

Simple Compliance Test, ANSI C63.17, clause 7.4.1

More Detailed Test, ANSI C63.17, clause 7.4.2

The test is passed if either the Simple Compliance Test or the More Detailed test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

Limit FCC 15.323(c)(7), RSS-213 Issue 3, clause 5.2:

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

Test Result**FP****Ant0 & Ant1**

Test Performed	Observation	Verdict
Simple Compliance test, at $\pm 30\%$ of B	No transmissions	Pass
More Detailed Test, at -6 dB points	N/A	N/A
More Detailed Test, at -12 dB points	N/A	N/A

3.8.6 Reaction Time and Monitoring Interval / RSS-213 Issue 3, clause 5.2**Test Procedure**

ANSI C63.17, clause 7.5

Limit FCC 15.323(c)(1), (5) and (7), RSS-213 Issue 3, clause 5.2:

The maximum reaction time must be less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

Test Result

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels TU + UM to check that the EUT does not transmit at all. The level was raised 6 dB for part d) with 35 μ s pulses.

The pulses are synchronized with the EUT timeslots and applied centered within all timeslots

FP**Ant0 & Ant1**

Pulse Width, ref. to ANSI C63.17 clause 7.5	Observation	Verdict
c) > largest of 50 μ s and $50 \times \text{SQRT}(1.25/B)$	No transmissions	Pass
d) > largest of 35 μ s and $35 \times \text{SQRT}(1.25/B)$, and with interference level raised 6 dB	No transmissions	Pass

Note:: Since B is larger than 1.25 MHz the test was performed with pulse lengths of 50 μ s and 35 μ s

3.8.7 Time and Spectrum Window Access Procedure / RSS-213 Issue 3, clause 5.2**Test Procedure**

This requirement is only for EUTs which transmit unacknowledged control and signaling information.
Timing for EUTs using control and signaling channel type transmissions: ANSI C63.17, clause 8.1

Limit

FCC 15.323(c)(4):

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

FCC 15.323(c)(6):

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available

Test Result

Access Criteria, ref. to ANSI C63.17 clause 8.1.1	Observation	Verdict
b) Check that the EUT transmits on the interference free time-slot	N/A	N/A
b) The EUT must terminate or pause in its repetitive transmission of the control and signalling channel on the open channel to repeat the access criteria not less frequently than every 30 s	N/A	N/A

If FCC 15.323(c)(6) option, If Random Waiting Interval is NOT implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.2	Observation	Verdict
b) Check that the EUT changes to an interference-free slot when interference is introduced on the time slot in use	N/A	N/A

If FCC 15.323(c)(6) option, Only if Random Waiting Interval is implemented

Access Criteria, ref. to ANSI C63.17 clause 8.1.3	Observation	Verdict
b-d) Check that the EUT uses random waiting interval before continuing transmission on an interfered time slot	N/A	N/A

Note: The tested EUT does not transmit unacknowledged control and signaling information.

3.8.8 Acknowledgements and Transmission Duration FCC Part15.323 (c) (3) & (c) (4) / RSS-213 Issue 3, clause 5.2**Test Procedure**

Acknowledgements: ANSI C63.17, clause 8.2.1

Transmission Duration: ANSI C63.17, clause 8.2.2

During the test Initial transmission without acknowledgements the signal from the EUT to the companion device is blocked by circulators in addition to the tunable attenuator.

The test Transmission time after loss of acknowledgements is performed by cutting-off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting..

The Transmission Duration test is performed by monitoring the slot in use and measuring the time until the EUT changes to a different slot.

Limits:**FCC 15.323(c)(4), RSS-213 Issue 3, clause 5.2:**

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

FCC 15.323(c)(6), RSS-213 Issue 3, clause 5.2:

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available

Test Result

FP

Ant0 & Ant1

Acknowledgements

Test ref. to ANSI C63.17 clause 8.2.1	Observation	Verdict
a) Initial transmission without acknowledgements	Not applicable for EUT that transmits control and signaling information	NA
c) Transmission time after loss of acknowledgements	5.0 sec	Pass

Transmission Duration

Test ref. to ANSI C63.17 clause 8.2.2	Observation	Verdict
b) Transmission duration on same time and frequency window	Only for initiating device that controls which time slot is used	N/A

3.8.9 Dual Access Criteria Check, FCC Part 15.323 (c) (10) / RSS-213 Issue 3, clause 5.2**Test Procedure**

EUTs that does not implement the Upper Threshold: ANSI C63.17, clause 8.3.1

EUTs that implement the Upper Threshold: ANSI C63.17, clause 8.3.2

This test is required for equipment that uses the access criteria in FCC 15.323(c)(10).

Limits, FCC 15.323(c)(10), RSS-213 Issue 3, clause 5.2:

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

Test Result**EUTs that implements the Upper Threshold:**

Test ref. to ANSI C63.17 clause 8.3.2	Observation	Verdict
b) EUT is restricted to a single carrier fl for TDMA systems. The Test is Pass if EUT can transmit	N/A	N/A
c) d) Transmission on interference-free receive time/spectrum window	N/A	N/A
e) f) Transmission on interference-free transmit time/spectrum window	N/A	N/A
g) Transmission not possible on any time/spectrum window	N/A	N/A

3.8.10 Alternative monitoring interval for co-located devices, FCC Part 15.323 (c) (11) / RSS-213 Issue 3, clause 5.2

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

Test Procedure

Measurement method according to ANSI C63.17 clause 8.4

Test Result

The manufacturer declares that this provision is not utilized by the EUT.

3.8.11 Automatic Discontinuation of Transmission, FCC Part 15.319(f) / RSS-213 Issue 3, clause 5.2

Test Procedure

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Requirements, FCC 15.319(f), RSS-213 Issue 3, Clause 5.2:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Test Result

Meet the requirement; please refer to the declaration provided by manufacturer.

3.8.12 Monitoring Time FCC 15.323 (c) (1) / RSS-213 Issue 3, clause 5.2

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

Test Procedure

Measurement method according to ANSI C63.17 clause 7.3.4

Test Result

FP

Ant0 & Ant1

EUT monitors the combined time and spectrum window prior to initiation of transmission. Test result is following

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction of EUT	Results
1) Apply the interference on f1 at level TU+UM, and no interference on f2. Initiate transmission and verify the transmission on f2.	EUT transmits on f2	Pass
2) Apply the interference on f2 at level TU+UM, at the same time, no interference on f1. After about 20ms, initiate transmission and verify the transmission on f1.	EUT transmits on f1	Pass

3.8.13 Monitoring Antenna, FCC Part15.323 (c) (8) / RSS-213 Issue 3, clause 5.2

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

Test Procedure

Measurement method according to ANSI C63.17 paragraph 4

Test Result

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

3.8.14 Monitoring threshold relation FCC 15.323(c) (9) / RSS-213 Issue 3, clause 5.2

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

Test Procedure

Measurement method according to ANSI C63.17 paragraph 4

Test Result

Not apply based on 15.323 (c) (5)

3.8.15 Fair Access, FCC Part 15.323 (c) (12) / RSS-213 Issue 3, clause 5.2

The provisions of FCC Part 15.323(c)(10) or (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

Test Result

The manufacturer declares that this device does not use any mechanisms as provided by Part 15.323 (c) (10) or (c) (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

4. Photos of Testing

4.1 Emission Test View

Please refer to Exhibits_ Test Setup Photos

4.2 EUT Detailed Photographs

Please refer to Exhibits_External Photos & Internal Photos

5. FCC ID Label

Please refer to Exhibits_ ID Label & Location Info

6. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Cal/Char Date	Due Date
Turntable	Innco systems GmbH	CT-0801	N/A	NCR	NCR
Antenna Tower	Innco systems GmbH	MA-4640-XP-ET	N/A	NCR	NCR
Controller	Innco systems GmbH	CO3000	955/38850716L	NCR	NCR
Pre-Amplifier	Agilent	87405C	MY47010722	Dec.6, 2017	Dec.6, 2019
Pre-Amplifier	Com-Power	PAM-840	N/A	Dec.6, 2017	Dec.6, 2019
Horn Antenna	SCHWARZBECK	BBHA 9170	N/A	Dec.6, 2017	Dec.6, 2019
EMI Test Receiver	Rohde & Schwarz	ESR7	101091	Dec.6, 2016	Dec.6, 2018
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	Dec.14, 2017	Dec.14, 2019
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100022	Feb.21, 2018	Feb.21, 2020
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	August 27, 2016	August 27, 2018
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-565	August 19, 2016	August 19, 2018
AMN	Rohde & Schwarz	ESH3-Z5	100197	Dec.25, 2017	Dec.25, 2019
AMN	CYBERTEK	EM5040A	E115040054	Sep.6, 2016	Sep.6, 2018
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9604	Dec.25, 2017	Dec.25, 2019
ISN	SCHWARZBECK	NTFM 8158 CAT3	CAT3-8158-001 0	Dec.25, 2017	Dec.25, 2019
ISN	SCHWARZBECK	NTFM 8158 CAT5	CAT5-8158-000 9	Dec.25, 2017	Dec.25, 2019
ISN	SCHWARZBECK	NTFM 8158 CAT6	CAT6-8158-001 2	Dec.25, 2017	Dec.25, 2019
KMO Shielded Room	KMO	KMO-001	N/A	NCR	NCR
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	95549	Sep.18, 2017	Sep.18, 2019
Digital Radio Communication Tester	Rohde & Schwarz	CMD60	1050.9008.60	Dec.14, 2017	Dec.14, 2019
3m Anechoic Chamber	KMO	KMO-3AC	N/A	Dec.23, 2017	Dec.23, 2019
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2017	Feb.10, 2019