



ANT Specification

Part Number	AX-RFID09C09-270-NA
Polarization	Circular Polarization
Operating Frequency	902 MHz - 928 MHz
Gain	6 dBi
E side HPBW	63°
H side HPBW	63°
VSWR	≤1.3
Input Impedance	50Ω
Size	50*10*8(mm)

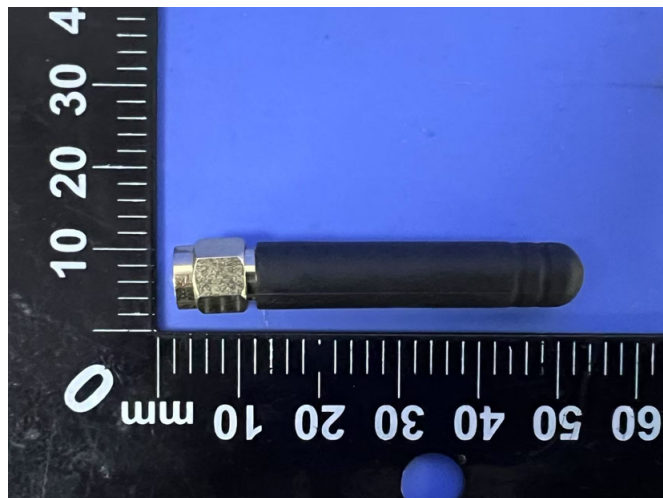



2 UHF test result

2.1 Gain

Frequency 频率(MHz)	Gain 增益(dBi)	Frequency 频率(MHz)	Gain 增益(dBi)
902.75	5.5	915.25	5.0
903.25	5.5	915.75	5.0
903.75	5.5	916.25	5.0
904.25	5.6	916.75	5.9
904.75	5.6	917.75	5.9
905.25	5.6	918.25	5.9
905.75	5.6	918.75	5.9
906.25	5.6	919.25	5.9
906.75	5.7	919.75	5.8
907.25	5.7	920.25	5.8
907.75	5.7	920.75	5.8
908.25	5.7	921.25	5.8
908.75	5.7	921.75	5.8
909.25	5.8	922.25	5.7
909.75	5.8	922.75	5.7
910.25	5.8	923.25	5.7
910.75	5.8	923.75	5.7
911.25	5.8	924.25	5.7
911.75	5.9	924.75	5.6
912.25	5.9	925.25	5.6
912.75	5.9	925.75	5.6
913.25	6.0	926.25	5.6
913.75	6.0	926.75	5.6
914.25	6.0	927.25	5.5
914.75	6.0		

2.2 Radiation

