



Shenzhen DEWEIMA Communication Equipment Co.Ltd

SPECIFICATION SHEET FOR APPROVAL

CUSTOMER NAME	Gaoju Innovation
CUSTOMER P/N	<u>B03-5.8G-L</u>
PART NAME	WIFI Antenna
Material code	<u>111601-00038</u>
APPROVAL REV.	DWM-V2.0

CONTRACTOR			DATE: 2024-06-12
QA CHECKED	MR CHECKED	RF CHECKED	MANAGER CHECKED
高春彦	陈裕松	覃球铭	余奇学

CUSTOMER		DATE:
Approved By	Checked By	Prepared By

TEL: 13603094246

Content


SPECIFICATION	1
SHEET FOR APPROVAL	1
1. Product Application	3
2. The test environment, equipment	3
3. Technology Parameters	6
4. Product photo	8
5. Environmental Performance	9
6. Usage Precaution	9
7. Packing metho	9


				Product Specification		
				P/N:	Rev.: A	Page:



1. Product Application

Terminal of the antenna products can only be used for WIFI antenna.

2. The test environment, equipment

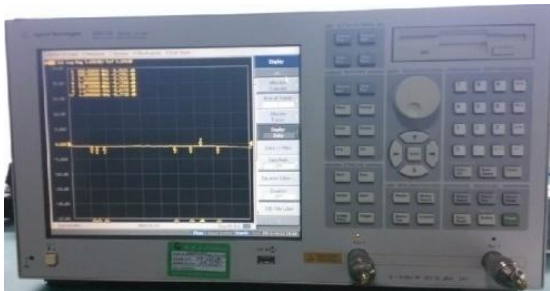Item	Description	Test Condition	Requirement
2.1	Passive testing	The VSWR measurement devices are connected in sequence: Agilent5071B Network Analyzer →measurement Cable → Customer-providing Devices.	VSWR: 5750-5850MHz≤3
		Test equipment	
			
Item	Description	Test Condition	Requirement

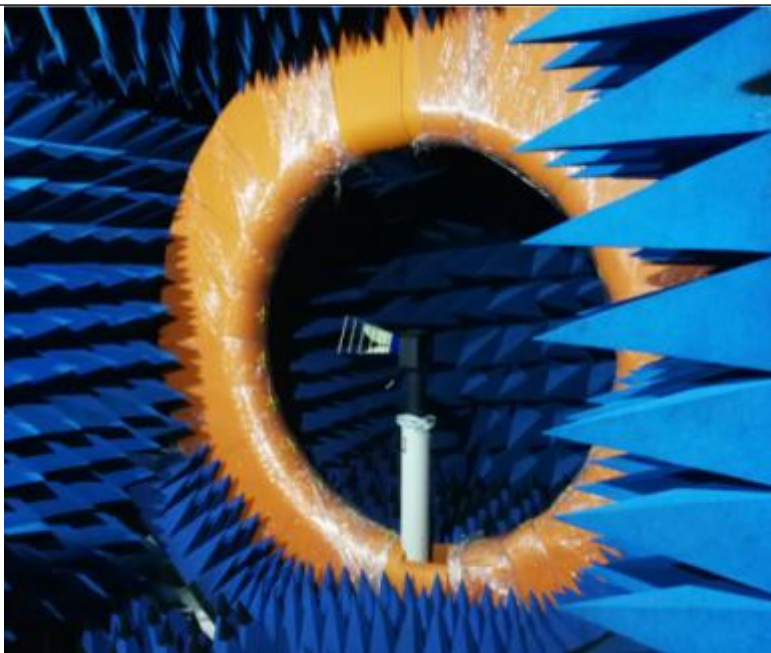		Product Specification		
		P/N:	Rev.: A	Page:
2.2	Active test	Follow picture shows the measurement condition of the antenna been put on the measurement device, which is used for all measurement of electric performances.	Antenna gain: 5750~5850MHz:2dBi±1dBi Antenna efficiency: 5750~5850MHz>35%	
2.3	Microwave Anechoic (Satimo&ETS)	Test equipment/测试设备		
				

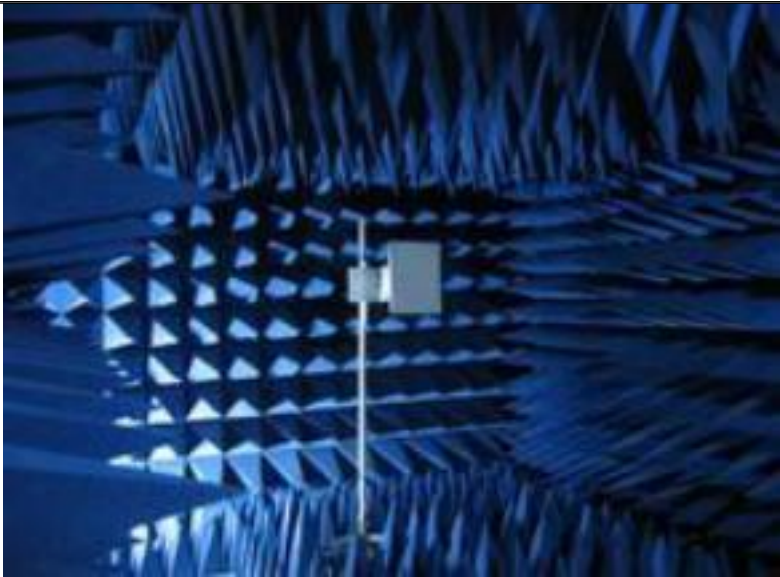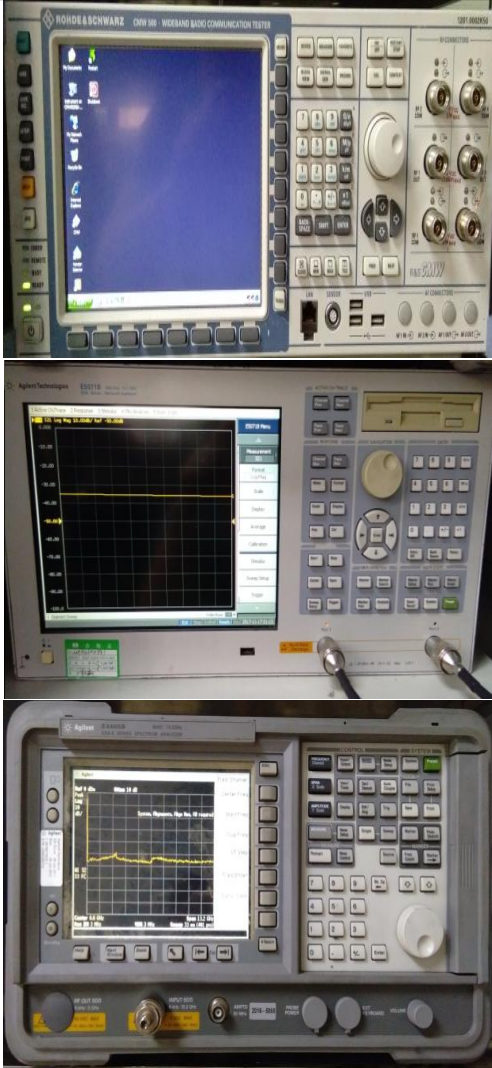
				Product Specification		
				P/N:	Rev.: A	Page:
						
2.4	CMW500 Agilent5071B AgilentE4405B Agilent8960					

Product Specification

P/N:

Rev.:
A

Page:

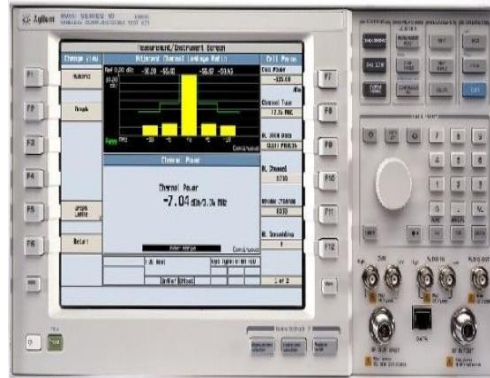


3. Technology Parameters

Frequency Range
Operating Humidity
Temperature Rating

5750~5850MHz
85% R.H.MAX
-40℃~+85℃

3.1 The matching test value

Element	Value
E1(0402)	
E2(0402)	
E3(0402)	
E4(0402)	

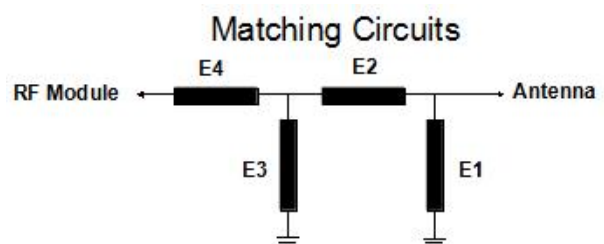

Product Specification


P/N:

Rev.:


Page:

A

3.2 VSWR

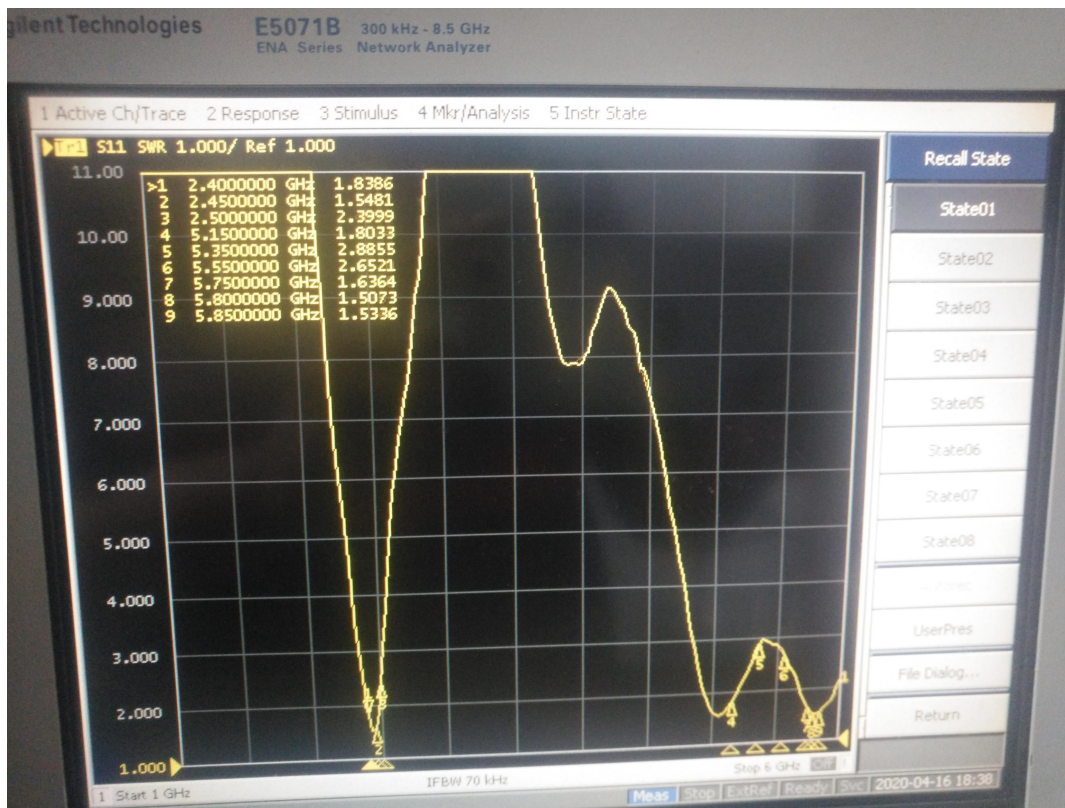

3.3 Smith

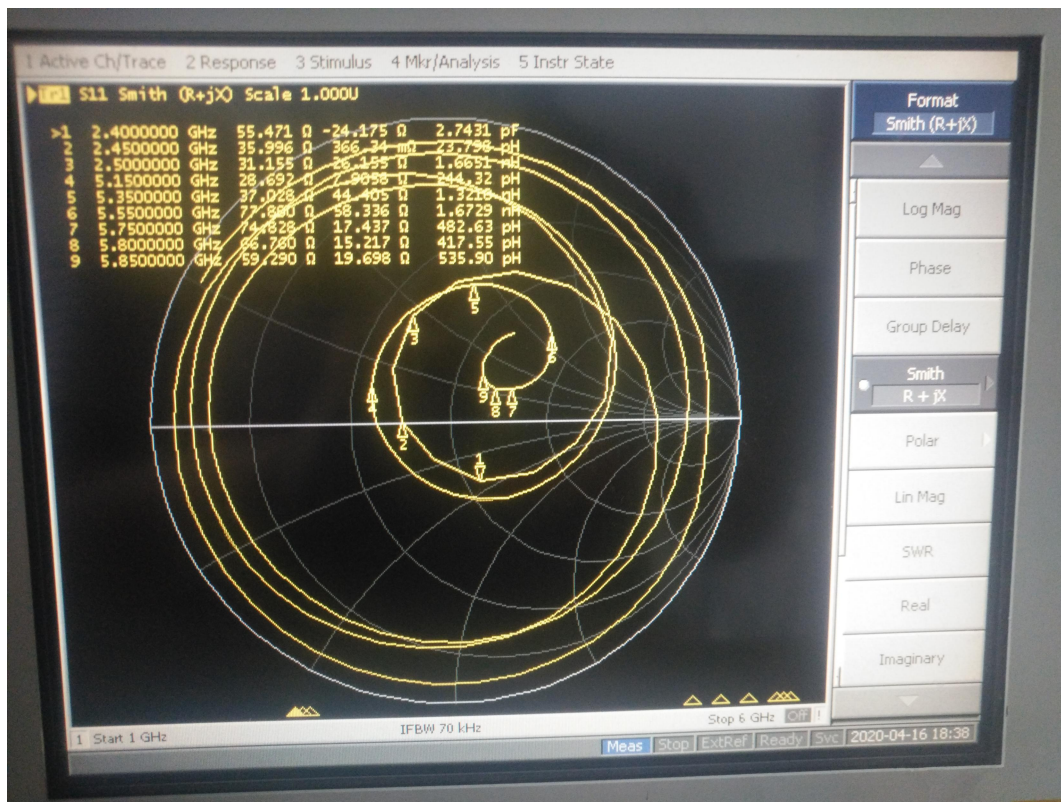

		Product Specification		
		P/N:	Rev.: A	Page:

5.Environmental Performance

Item	Description	Test Condition	Requirement
5.1	High and low temperature test	Temp.: -40 °C Time: 48 hours Temp.: 85°C Time: 48 hours	1. No visible damage. 2. The electric performances reach the standard.
Item	Description	Test Condition	Requirement
5.2	Salt Spray	5±0.1% Nad salt fog PH Value: 6.5-7.2 Temp: 35±1 °C Time:24 hours	1. No color change. 2. the appearance of the antenna does not flake off.

6.Usage Precaution

No	Items	Matter
6.1	Precautions	a)Please avoid the cleaning of this producta)
No	Items	Matter
6.2	Stockpile condition	Use this product within 6 months after receipt Condition : Temp: 5~30℃ Humidity:≤70%

7. Packing metho

Bag shipment, 100pcs.