
Appendix A. System Check Data

Test Laboratory: DEKRA

Date: 2024/07/21

System Performance Check_750MHz-Head**DUT: D750V3; Type: D750V3**

Communication System: UID 0, CW; Frequency: 750 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.90 \text{ S/m}$; $\epsilon_r = 43.20$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(10.5, 10.5, 10.5) @ 750 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/750MHz/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.84 W/kg

Configuration/750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.06 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.46 W/kg

Smallest distance from peaks to all points 3 dB below = 21.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 2.95 W/kg

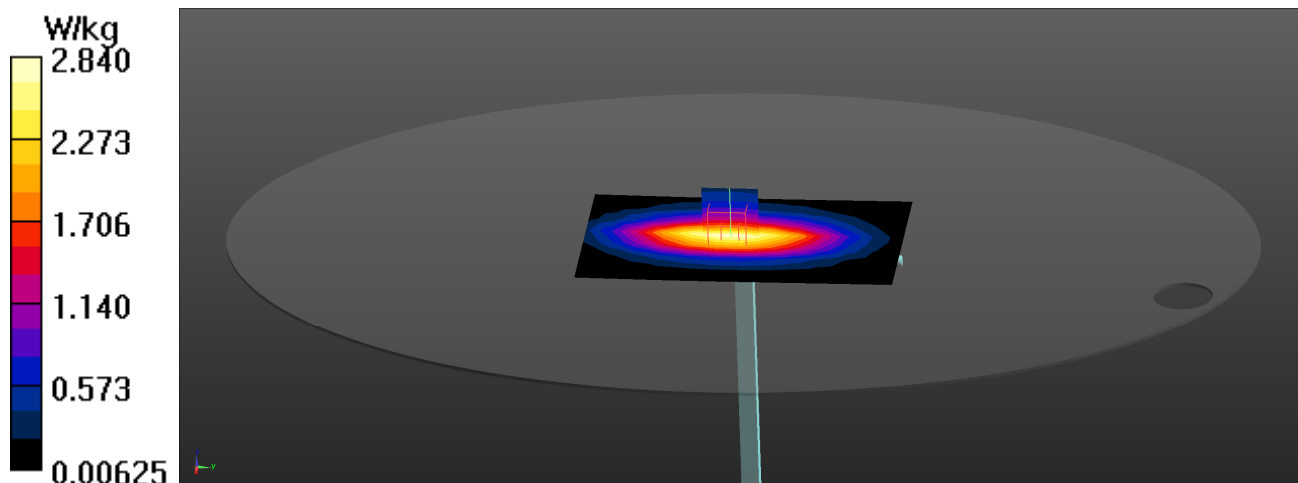

Test Laboratory: DEKRA

Date: 2024/07/16

System Performance Check_900MHz-Head**DUT: D900V2; Type: D900V2**

Communication System: UID 0, CW; Frequency: 900 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 40.01$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(9.86, 9.86, 9.86) @ 900 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/900MHz Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.12 W/kg

Configuration/900MHz Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 61.78 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 2.54 W/kg; SAR(10 g) = 1.64 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 3.42 W/kg

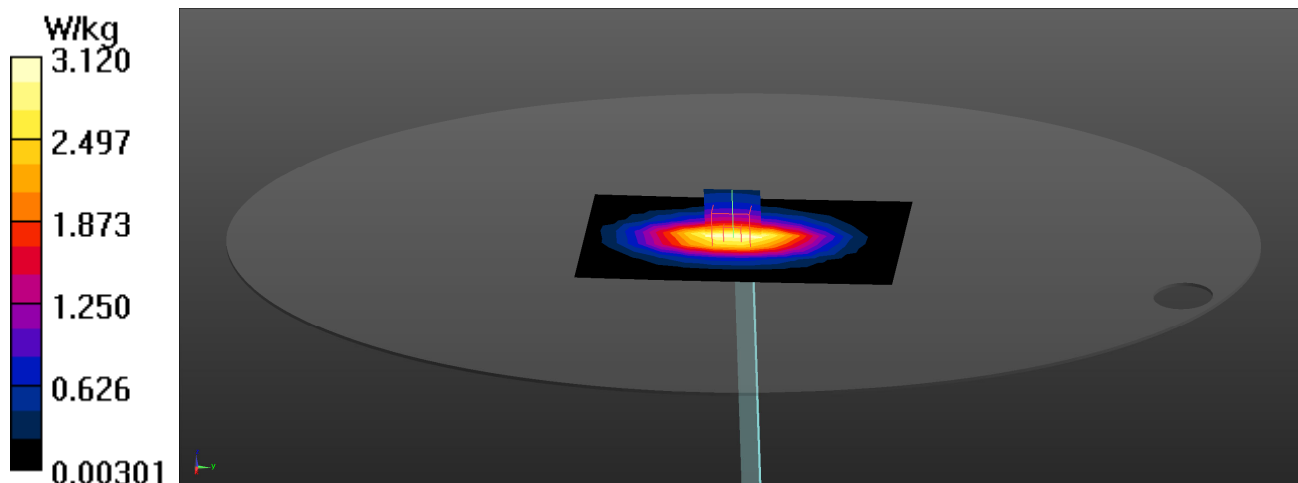

Test Laboratory: DEKRA

Date: 2024/07/17

System Performance Check_1750MHz-Head**DUT: D1750V2; Type: D1750V2**

Communication System: UID 0, CW; Frequency: 1750 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.71, 8.71, 8.71) @ 1750 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/1750MHz/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.6 W/kg

Configuration/1750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.77 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 8.71 W/kg; SAR(10 g) = 4.66 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 13.4 W/kg

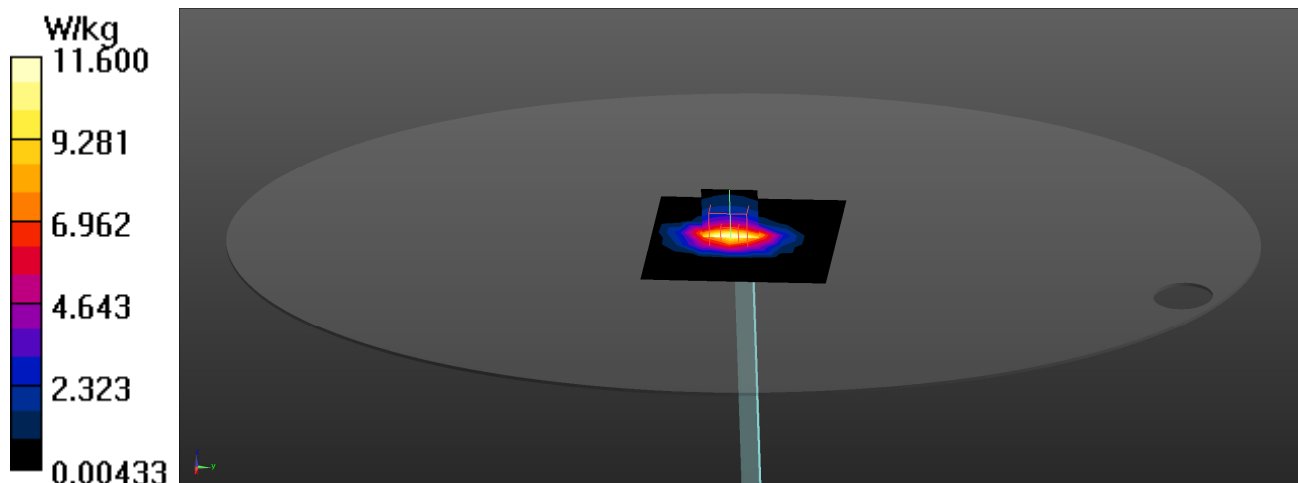

Test Laboratory: DEKRA

Date: 2024/07/19

System Performance Check_1950MHz-Head**DUT: D1950V3; Type: D1950V3**

Communication System: UID 0, CW; Frequency: 1950 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 1950 \text{ MHz}$; $\sigma = 1.44 \text{ S/m}$; $\epsilon_r = 40.31$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.46, 8.46, 8.46) @ 1950 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/1950MHz/Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 14.0 W/kg

Configuration/1950MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 95.91 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.13 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 15.8 W/kg

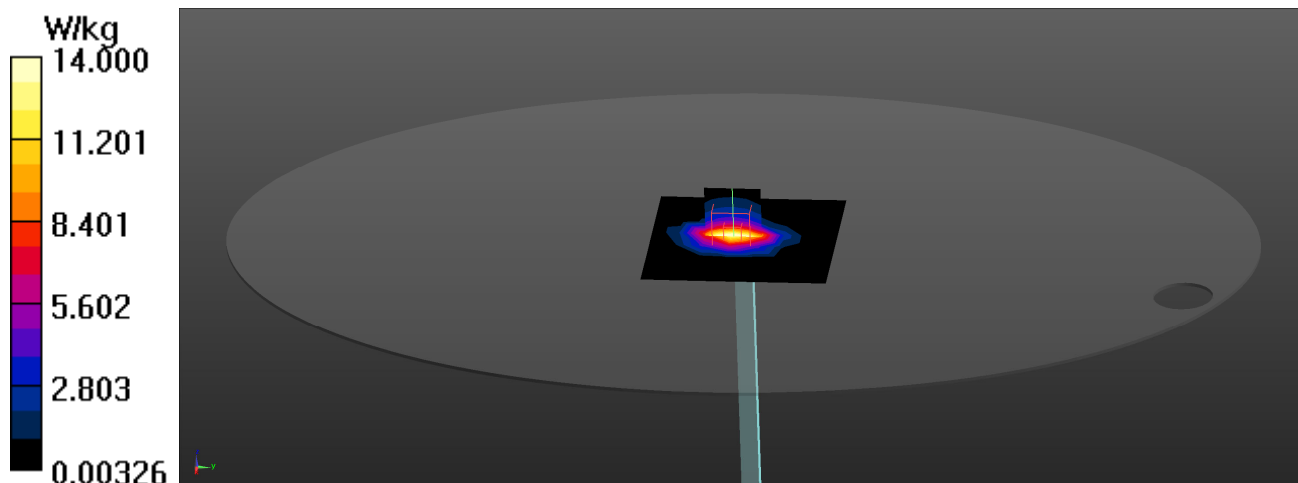

Test Laboratory: DEKRA

Date: 2024/08/14

System Performance Check_2450MHz-Head**DUT: D2450V2; Type: D2450V2**

Communication System: UID 0, CW; Frequency: 2450 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 37.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.22, 8.22, 8.22) @ 2437 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450MHz_Head/Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 20.1 W/kg

Configuration/2450MHz_Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.7 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 24.8 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.21 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 21.8 W/kg

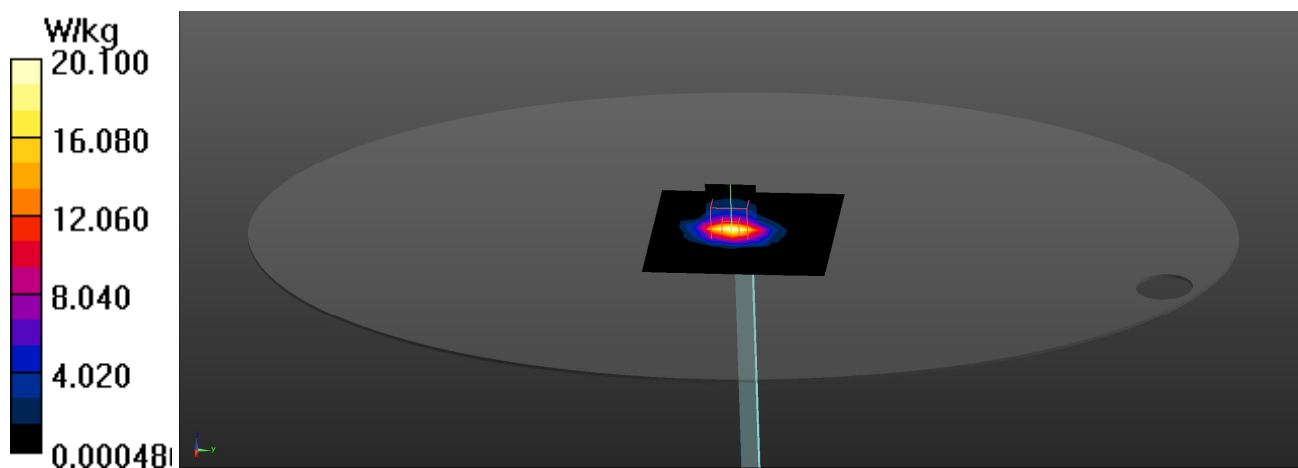

Test Laboratory: DEKRA

Date: 2024/07/20

System Performance Check_2600MHz-Head**DUT: D2600V2; Type: D2600V2**

Communication System: UID 0, CW; Frequency: 2600 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.74$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(7.97, 7.97, 7.97) @ 2600 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2600MHz_Head/Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 19.8 W/kg

Configuration/2600MHz_Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.5 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 23.9 W/kg

