



Test report No.: 2460573R-SAUSV01S-B

SAR Test Report

(Class II Permissive Change)

Product Name	Handheld Tablet
Trademark	Toast Inc.
Model and /or type reference	TG300
Applicant's name / address	Toast, Incorporated 333 Summer St, Boston, Massachusetts, United States 02210
Manufacturer's name	Toast, Incorporated
FCC ID	2AMNG-TG300
Applicable Standard	IEEE 1528-2013 KDB 447498 D01 v06 KDB 865664 D01 v01r04
Test Result	Refer to Section 1.1
Verdict Summary	IN COMPLIANCE
Documented By (Supervisor / Jinn Chen)	<i>Jinn Chen</i>
Tested By (Senior Engineer / Luke Cheng)	<i>Luke Cheng</i>
Approved By (Assistant Manager / San Lin)	<i>San Lin</i>
Date of Receipt	2024/06/19
Date of Issue	2025/04/08
Report Version	V1.0

INDEX

	Page
1. General Information	5
1.1 EUT Description	5
1.2 Antenna List	6
1.3 SAR Test Exclusion Calculation	7
1.4 Test Environment.....	8
1.5 Measurement procedures.....	9
2. SAR Measurement System	10
2.1 DASY System Description	10
2.2 Area Scans.....	12
2.3 DASY E-Field Probe.....	13
2.4 DATA Acquisition Electronics (DAE) and Measurement Server	14
2.5 Robot.....	15
2.6 Device Holder	15
2.7 Phantom	16
3. Tissue Simulating Liquid	17
3.1 The composition of the tissue simulating liquid	17
3.2 Tissue Calibration Result.....	17
3.3 Tissue Dielectric Parameters for Phantoms	19
4. Measurement Procedure.....	20
4.1 SAR System Check.....	20
4.2 SAR Measurement Procedure.....	23
4.3 Absorbed Power Density (APD)	24
4.4 Power Density Measurement Procedure	24
5. RF Exposure Limits.....	25
6. Test Equipment List	26
7. Measurement Uncertainty.....	28
8. Conducted Power Measurement (Including tolerance allowed for production unit)	33
9. Test Results	40
9.1 Test Results Summary	40
9.2 Simultaneous Transmission.....	46
10. SAR measurement variability	47
Appendix A. System Check Data	
Appendix B. Highest measurement Data	
Appendix C. Test Setup Photographs	
Appendix D. Probe Calibration Data	
Appendix E. Dipole & Source Calibration	
Appendix F. Product Photos-Please refer to the file: 2460573R-Product Photos	

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2460573R-SAUSV01S-B	V1.0	Initial issue of report.	2025/04/08

1. General Information

1.1 EUT Description

Product Name	Handheld Tablet			
Trademark	Toast Inc.			
Model and /or type reference	TG300			
FCC ID	2AMNG-TG300			
Frequency Range	WLAN 2.4GHz: 2412-2472 MHz WLAN 5GHz: 5180-5240 MHz, 5260-5320 MHz, 5500-5720MHz, 5745-5825 MHz, 5845-5885MHz WLAN 6GHz: 5955-7115 MHz BT: 2402-2480 MHz			
Type of Modulation	802.11b: DSSS 802.11a/g/n/ac/ax: OFDM, OFDMA GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)			
Device Category	Portable			
RF Exposure Environment	Uncontrolled			
Summary of test result – Reported 1g SAR (W/kg)				
Test configuration	DTS	NII	6XD	DSS(BT)
Standalone	1.149	1.159	0.701	0.300
Simultaneous	1.149	1.417	0.854	1.417
Summary of test result – Power Density				
Test configuration	6XD			
APD (W/m²)	5.470			
Reported PD (W/m²)	7.774			

1.2 Antenna List


No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Advanced Wireless & Antenna INC.	ALL6Y-100008B(WIFI 1)	PIFA	3.06 dBi for 2400MHz 2.57 dBi for 5150~5250MHz 2.99 dBi for 5250~5350MHz 2.69 dBi for 5470~5725MHz 3.26 dBi for 5725~5850MHz 3.38 dBi for 5850~5895MHz 3.43 dBi for 5925~6425MHz 3.32 dBi for 6425~6525MHz 2.43 dBi for 6525~6875MHz 2.77 dBi for 6875~7125MHz
2	Advanced Wireless & Antenna INC.	ALL6Y-100007B(WIFI 2)	PIFA	2.33 dBi for 2400MHz 3.42 dBi for 5150~5250MHz 2.45 dBi for 5250~5350MHz 1.19 dBi for 5470~5725MHz 2.69 dBi for 5725~5850MHz 3.09 dBi for 5850~5895MHz 3.92 dBi for 5925~6425MHz 2.90 dBi for 6425~6525MHz 2.51 dBi for 6525~6875MHz 3.82 dBi for 6875~7125MHz

Note: The above EUT information is provided by the manufacturer.

1.3 SAR Test Exclusion Calculation

According to KDB 941225 D07, when the distance from the antenna to the edge is > 25 mm, SAR testing is not required.

Antenna	Distance from the antenna to the edge					
	Front	Back	Left-side	Right-side	Top	Bottom
WIFI 1	< 25 mm	< 25 mm	< 25 mm	> 25 mm	< 25 mm	> 25 mm
	Yes	Yes	Yes	No	Yes	No
WIFI 2	< 25 mm	< 25 mm	> 25 mm	< 25 mm	< 25 mm	> 25 mm
	Yes	Yes	No	Yes	Yes	No

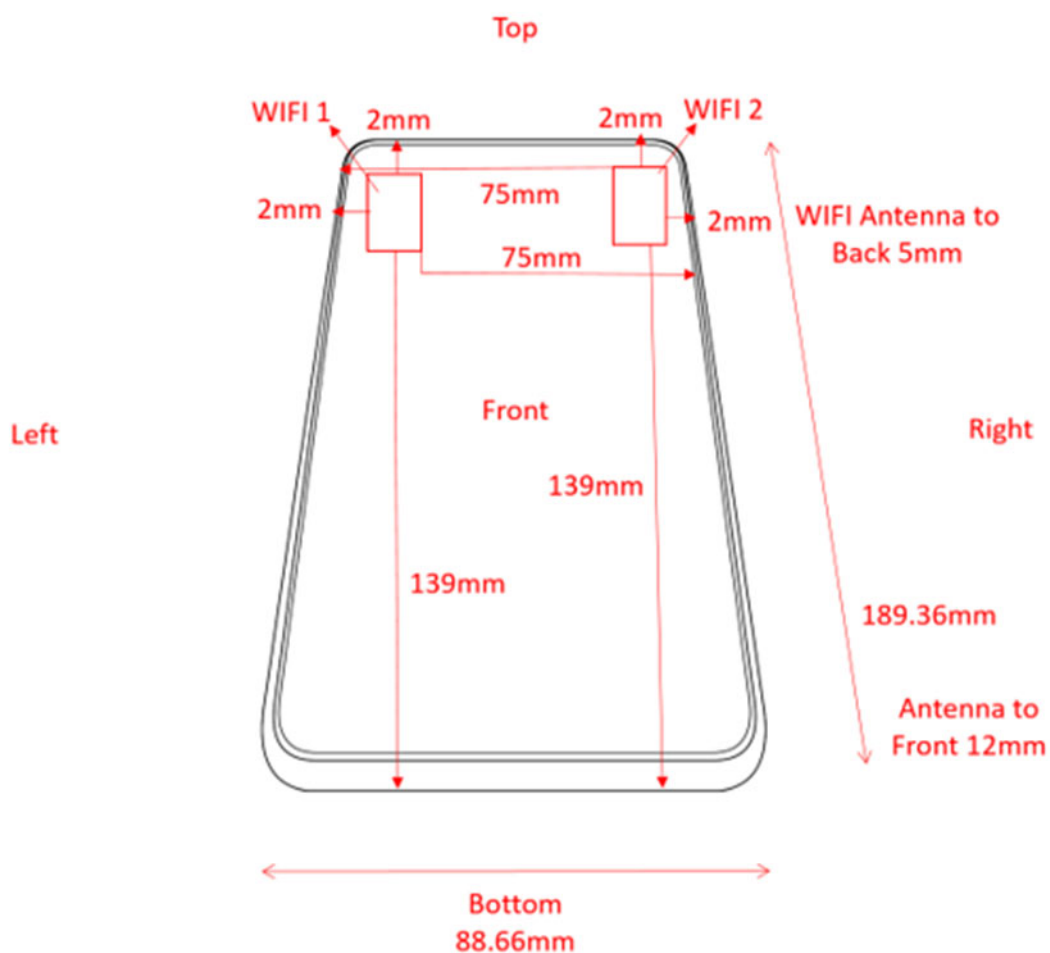

1.4 Test Environment

Ambient conditions in the laboratory:

Test Date: 2025/01/24 - 2025/02/18

Items	Required	Actual
Temperature (°C)	18-25	23 ± 2
Humidity (%RH)	30-70	50 ± 20

USA	FCC Designation Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.5 Measurement procedures

IEEE 1528-2013

47CFR § 2.1093

KDB 248227 D01 v02r02

KDB 447498 D01 v06

KDB 865664 D01 v01r04

KDB 941225 D07 v01r02


IEC TR 63170:2018

IEC/IEEE 62209-1528:2020


2. SAR Measurement System

2.1 DASY System Description

SAR Configurations is shown below:

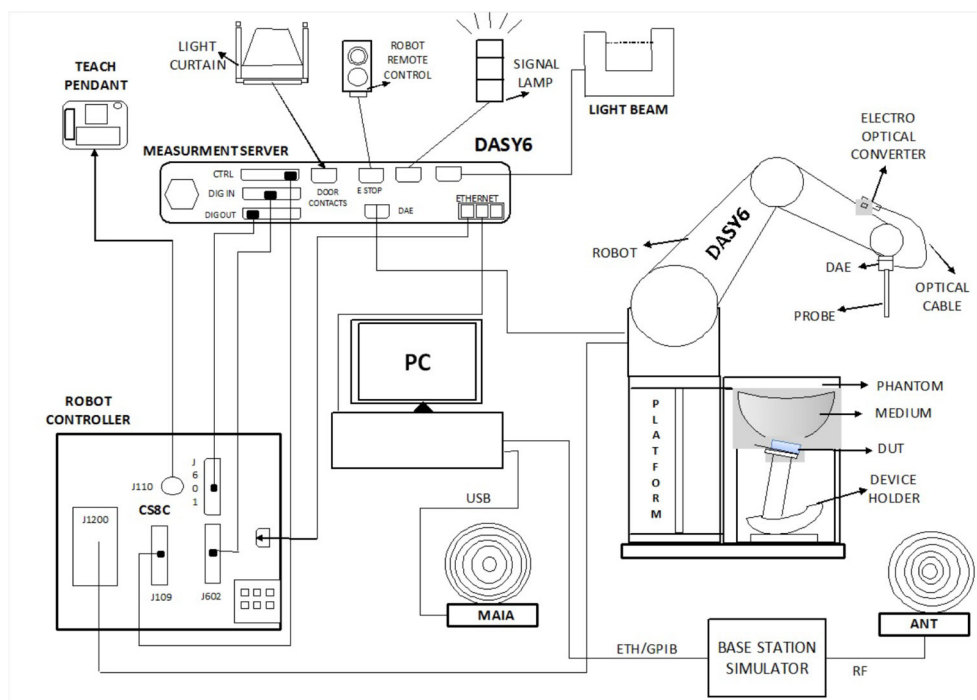

Power Density Configurations is shown below:

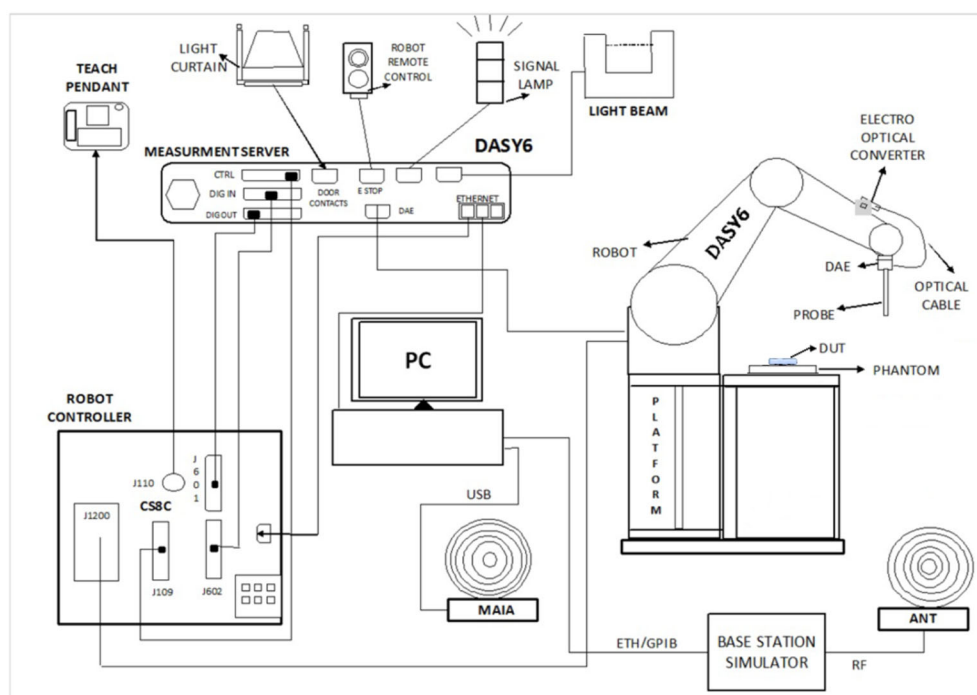

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7/8/10 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing.

2.2.1 Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

2.2.2 SAR measurement drifts

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations. If a device is known to drift randomly, additional single point drift reference measurements should be performed at regular intervals throughout the area and zoom scan test durations. The SAR drift shall be kept within $\pm 5\%$, whether there are substantial drifts or not. The field difference will be calculated in dB units in the DASY software.

2.2.3 Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions.

2.3 DASY E-Field Probe


The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards under ISO 17025. The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	Ex3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz)	
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

E-Field mm-Wave Probe Specification

Model	EUmmWVx	
Construction	Two dipoles optimally arranged to obtain pseudo-vector information Minimum three measurements/point, 120° rotated around probe axis Sensors (0.8 mm length) printed on glass substrate protected by high density foam	
Frequency	750 MHz to 110 GHz	
Dynamic Range	< 20 V/m to 10000 V/m with PRE-10 (min < 20 V/m to 2000 V/m)	
Position Precision	< 0.2 mm	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1mm) Distance from probe tip to dipole centers: < 2 mm Sensor displacement to probe's calibration point: < 0.3 mm	
Application	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field, and far-field analysis using total field reconstruction	

2.4 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



2.5 Robot

The DASY system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY system, the CS8C robot controller version from Stäubli is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller




2.6 Device Holder

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

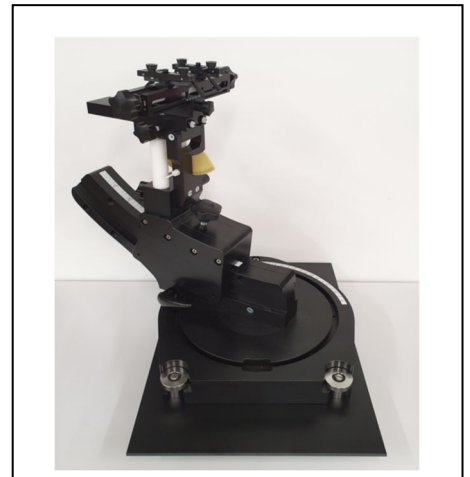


2.7 Phantom

2.7.1 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

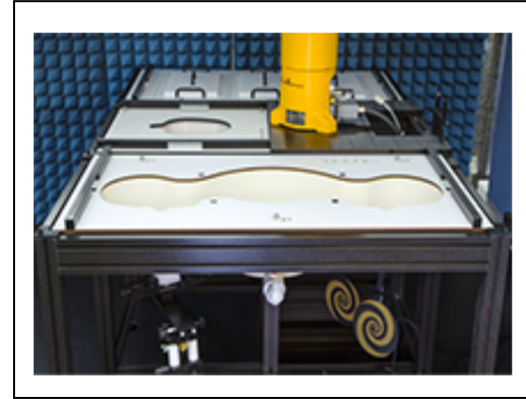

The device holder positions are adjusted to the standard measurement positions in the three sections. A cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

2.7.2 mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing to evaluate not only the antenna side of the device but also the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40 mm thick Rohacell plate used as a test bed, which has a loss tangent ($\tan \delta$) ≤ 0.05 and a relative permittivity (ϵ_r) ≤ 1.2 . High-performance RF absorbers are placed below the foam.



3. Tissue Simulating Liquid

3.1 The composition of the tissue simulating liquid

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethanediol STOT RE 2, H373; Acute Tox. 4, H302	< 5.2%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Dielectric Probe Kit and Vector Network Analyzer.

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ε _r)			Conductivity (σ)			Tissue Temp. (°C)
			Measured	Target	Delta (%)	Measured	Target	Delta (%)	
2025/1/24	Head	2450	40.27	39.20	2.73	1.83	1.80	1.67	22.1
	Head	2412	40.41	39.28	2.88	1.78	1.77	0.56	
	Head	2437	40.32	39.23	2.78	1.81	1.79	1.12	
	Head	2440	40.31	39.22	2.78	1.82	1.79	1.68	
	Head	2462	40.22	39.18	2.65	1.84	1.81	1.66	

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)			Tissue Temp. (°C)
			Measured	Target	Delta (%)	Measured	Target	Delta (%)	
2025/1/25	Head	5250	36.19	35.95	0.67	4.74	4.71	0.64	21.8
	Head	5290	36.08	35.91	0.47	4.80	4.75	1.05	
	Head	5600	35.22	35.50	-0.79	5.22	5.07	2.96	
	Head	5530	35.41	35.61	-0.56	5.12	5.00	2.40	
	Head	5610	35.19	35.49	-0.85	5.23	5.08	2.95	
	Head	5690	34.98	35.41	-1.21	5.33	5.16	3.29	
	Head	5800	34.67	35.30	-1.78	5.48	5.27	3.98	
	Head	5775	34.74	35.33	-1.67	5.44	5.25	3.62	
	Head	5855	34.52	35.25	-2.07	5.55	5.33	4.13	
2025/1/26	Head	6500	34.50	34.50	0.00	6.02	6.07	-0.82	22.1
	Head	6025	36.00	35.07	2.65	5.37	5.51	-2.54	
	Head	6185	35.50	34.88	1.78	5.59	5.70	-1.93	
	Head	6505	34.50	34.49	0.02	6.03	6.08	-0.82	
	Head	6985	33.00	33.92	-2.71	6.67	6.63	0.60	
2025/2/18	Head	6500	34.60	34.50	0.29	6.08	6.07	0.16	21.8
	Head	6665	34.10	34.30	-0.59	6.23	6.26	-0.48	

3.3 Tissue Dielectric Parameters for Phantoms

The head tissue dielectric parameters recommended by the IEC/IEEE 62209-1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head tissue parameters that have not been specified are interpolated according to the head parameters specified in IEC/IEEE 62209-1528.

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1640	40.2	1.31
1750	40.1	1.37
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48
6500	34.5	6.07
7000	33.9	6.65
7500	33.3	7.24

4. Measurement Procedure


4.1 SAR System Check

4.1.1 Dipoles



The SAR dipoles are optimized symmetrical dipole with $\lambda/4$ balun matched to a Flat phantom section filled with tissue simulating liquids. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. They are available for the variety of frequencies between 300MHz and 10 GHz. The provided tripod is used to hold the dipole below the phantom. As the distance between the dipole center and the TSL is critical, a spacer is placed between the dipole and the phantom. The spacing distance is frequency dependent.

4.1.2 Verification Source

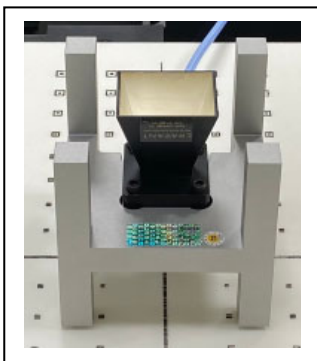

The verification sources apply to system check or verification at specific mmWave frequencies. The sources comprise horn-antennas and very stable signal generators.

4.1.3 SAR System Check Result

1. Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %.
2. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Delta 1g ±10 (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Delta 10g ±10 (%)	Tissue Temp. (°C)
2025/1/24	2450	250	13.10	51.80	52.4	1.16	6.16	24.20	24.64	1.82	22.1
2025/1/25	5250	100	8.03	78.10	80.3	2.82	2.29	22.40	22.9	2.23	21.8
2025/1/25	5600	100	8.55	82.30	85.5	3.89	2.44	23.50	24.4	3.83	21.8
2025/1/25	5800	100	7.65	80.20	76.5	-4.61	2.19	22.80	21.9	-3.95	21.8
2025/1/26	6500	100	29.70	294.00	297	1.02	5.44	53.90	54.4	0.93	22.1
2025/2/18	6500	100	28.80	294.00	288	-2.04	5.32	53.90	53.2	-1.30	21.8

4.1.4 Power Density System Check Result

The system performance check verifies that the system operates within its specifications.

The system check is successful if the difference between the normalized measured local power density and the numerically validated target value is within the reported expanded uncertainty of the measurement system.

The recommended settings for measurement of verification sources are listed in the following:

Frequency (GHz)	Grid step	Grid extent X/Y (mm)	Measurement points
10	0.125 ($\lambda/8$)	60 / 60	18 x 18

According to the DASY specification in the user's manual and SPEAG's recommendation, the deviation threshold of ± 0.66 dB represents the expanded standard uncertainty for system performance check. The system check is successful if the measured results are within ± 0.66 dB tolerances to the target value shown in the calibration certificate of the verification source.

Date	Frequency (GHz)	Distance (mm)	Input Power (mW)	Measured Avg PD 4 cm ² (W/m ²)	Targeted Avg PD 4 cm ² (W/m ²)	Deviation (dB)
2025/1/27	10	10	138	181.0	187.00	-0.14
2025/2/18	10	10	138	181.0	187.00	-0.14

Note: The Measured Avg PD was the average of psPDn+, psPDtot+ and psPDmod+, which refers to the demonstration from calibration certificate.

4.2 SAR Measurement Procedure

The Dasy calculates SAR using the following equation,

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where :

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

E :RMS electric field strength (V/m)

The SAR / APD measurements for the EUT should be performed on the channel that produces the highest rated output power of each transmitting antenna.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR / APD distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR / APD location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

4.3 Absorbed Power Density (APD)

Absorbed Power Density (APD) is defined as the energy flow per unit area directly under the body surface that based on Poynting vector. The equation description is as below:

$$S_{ab} = \iint_A \text{Re}[S] \cdot \frac{ds}{A} = \iint_A \text{Re}[E \times H^*] \cdot \frac{ds}{A}$$

Where:

E = electric field strength (V/m)

H = magnetic field strength (A/m)

S = power density (W/m² or mW/cm²)

APD is expressed in units of Watts per square meter or units of milliwatt per square centimeter.

4.4 Power Density Measurement Procedure

The power density for an electromagnetic field represents the rate of energy transfer per unit area. The local power density (i.e. Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$S = \frac{1}{2} \text{Re}[E \times H^*] \cdot \vec{n}$$

Where: E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor.

The spatial-average power density distribution on the evaluation surface is determined per the IEC TR 63170. The spatial area, A is specified by the applicable exposure limit or regulatory requirements. The circular shape was used.

$$S_{av} = \frac{1}{2A} \Re(\int E \times H \cdot \hat{n} dA)$$

5. RF Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, RSS-102 Issue 6, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg
Power density ¹	1 mW/cm²

Note: 1 mW/cm² = 10 W/m²

6. Test Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Last Calibration	Next Calibration
Reference Dipole 2450MHz	Speag	D2450V2	1054	2024/11/18	2027/11/17
Reference Dipole 5GHz	Speag	D5GHzV2	1321	2024/03/12	2027/03/11
Reference Dipole 6.5GHz	Speag	D6.5GHzV2	1021	2024/02/12	2027/02/11
Verification Source Antenna 10GHz	Speag	5G Verification Source 10GHz	2006	2024/04/18	2025/04/17
Device Holder	Speag	N/A	N/A	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1651	2024/02/15	2025/02/14
Data Acquisition Electronic	Speag	DAE4	916	2024/12/04	2025/12/03
E-Field Probe	Speag	EX3DV4	7631	2024/02/21	2025/02/20
E-Field Probe	Speag	EX3DV4	7350	2024/12/19	2025/12/18
mmWave E-field Probe	Speag	EUmmWV4	9546	2024/04/18	2025/04/17
Power Amplifier	Mini-Circuit	ZHL-42	D051404-20	N/A	N/A
Power Amplifier	Mini-Circuit	ZVE-8G+	447202211	N/A	N/A
Directional Coupler	Agilent	87300C	MY44300353	N/A	N/A ¹
Attenuator	Woken	WATT-218FS-10	N/A	N/A	N/A ¹
Attenuator	Mini-Circuit	BW-S20W2+	N/A	N/A	N/A ¹
Vector Network Analyzer	Agilent	E5071C	MY46108013	2024/03/19	2025/03/18
Signal Generator	Anritsu	MG3694A	041902	2024/08/20	2025/08/19
Power Meter	Anritsu	ML2487A	6K00001447	2024/10/19	2025/10/18
Power Sensor	Anritsu	MA2411B	1339194	2024/10/19	2025/10/18

Note: 1. System Check, the path loss measured by the network analyzer, includes the signal generator, amplifier, cable, attenuator and directional coupler.

Note:

Per KDB 865664 D01 requirements for dipole calibration, the following are recommended FCC procedures for SAR dipole calibration.

1. After a dipole is damaged and properly repaired to meet required specifications.
2. When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions.
3. When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification.

D6.5GHzV2-1021

	Frequency	Tissue	Return loss	Limit	Date
Calibration	6500 MHz	Head	-27.6	Within 20%	2024/2/12
Measurement	6500 MHz	Head	-27.70		2025/2/10

4. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement.

D6.5GHzV2-1021

	Frequency	Tissue	Impedance	Limit	Date
Calibration	6500 MHz	Head	53.5	Within 5 Ω	2024/2/12
Measurement	6500 MHz	Head	53.26		2025/2/10

7. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz							
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors							
Probe Calibration	±12.0%	N	2	1	1	±6.0%	±6.0%
Probe Calibration Drift	±1.7%	R	1.732	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	1.732	1	1	±2.7%	±2.7%
Broadband Signal	±2.8%	R	1.732	1	1	±1.6%	±1.6%
Probe Isotropy	±7.6%	R	1.732	1	1	±4.4%	±4.4%
Other Probe+Electronic	±0.8%	N	1	1	1	±0.8%	±0.8%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.006 mm	N	1	0.14	0.14	±0.1%	±0.1%
Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
Phantom and Device Errors							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±3.3%	R	1.732	0.78	0.71	±1.5%	±1.4%
Phantom Permittivity	±14.0%	R	1.732	0	0	±0.0%	±0.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	1.732	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	1.732	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0.0%	±0.0%
Unc. Input Power	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0.0%	R	1.732	1	1	±0.0%	±0.0%
Combined Uncertainty						±11.0%	±10.9%
Expanded Uncertainty						±21.9%	±21.7%

Measurement uncertainty for 3 GHz to 6 GHz

Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors							
Probe Calibration	±14.0%	N	2	1	1	±7.0%	±7.0%
Probe Calibration Drift	±1.7%	R	1.732	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	1.732	1	1	±2.7%	±2.7%
Broadband Signal	±2.6%	R	1.732	1	1	±1.5%	±1.5%
Probe Isotropy	±7.6%	R	1.732	1	1	±4.4%	±4.4%
Other Probe+Electronic	±1.2%	N	1	1	1	±1.2%	±1.2%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.005 mm	N	1	0.29	0.29	±0.2%	±0.2%
Data Processing	±2.3%	N	1	1	1	±2.3%	±2.3%
Phantom and Device Errors							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±3.4%	R	1.732	0.78	0.71	±1.5%	±1.4%
Phantom Permittivity	±14.0%	R	1.732	0.25	0.25	±2.0%	±2.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	1.732	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	1.732	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0.0%	±0.0%
Unc. Input Power	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0.0%	R	1.732	1	1	±0.0%	±0.0%
Combined Uncertainty						±11.9%	±11.8%
Expanded Uncertainty						±23.8%	±23.6%

Measurement uncertainty for 6 GHz to 10 GHz

Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors							
Probe Calibration	±18.6%	N	2	1	1	±9.3%	±9.3%
Probe Calibration Drift	±1.7%	R	1.732	1	1	±1.0%	±1.0%
Probe Linearity	±4.7%	R	1.732	1	1	±2.7%	±2.7%
Broadband Signal	±2.6%	R	1.732	1	1	±1.5%	±1.5%
Probe Isotropy	±7.6%	R	1.732	1	1	±4.4%	±4.4%
Other Probe+Electronic	±2.4%	N	1	1	1	±2.4%	±2.4%
RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Probe Positioning	±0.005 mm	N	1	0.5	0.5	±0.3%	±0.3%
Data Processing	±3.5%	N	1	1	1	±3.5%	±3.5%
Phantom and Device Errors							
Conductivity (meas.)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Conductivity (temp.)	±2.4%	R	1.732	0.78	0.71	±1.1%	±1.0%
Phantom Permittivity	±14.0%	R	1.732	0.5	0.5	±4.0%	±4.0%
Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
Device Positioning	±1.0%	N	1	1	1	±1.0%	±1.0%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
DUT Modulation	±2.4%	R	1.732	1	1	±1.4%	±1.4%
Time-average SAR	±1.7%	R	1.732	1	1	±1.0%	±1.0%
DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
Val Antenna Unc.	±0.0%	N	1	1	1	±0.0%	±0.0%
Unc. Input Power	±0.0%	N	1	1	1	±0.0%	±0.0%
Correction to the SAR results							
Deviation to Target	±1.9%	N	1	1	0.84	±1.9%	±1.6%
SAR scaling	±0.0%	R	1.732	1	1	±0.0%	±0.0%
Combined Uncertainty						±14.2%	±14.1%
Expanded Uncertainty						±28.4%	±28.3%

APD Measurement uncertainty for 6 GHz to 10 GHz

Error Description	Uncert. value	Prob. Dist.	Div.	(Ci) 1 cm ²	(Ci) 4 cm ²	Std. Unc. (1 cm ²)	Std. Unc. (4 cm ²)
SAR MU	±14.2/13.9%	N	1	1	1	±14.2%	±14.1%
Power Density Conversion	±13.5%	R	$\sqrt{3}$	1	1	±7.8%	±7.8%

Combined Uncertainty						±16.2%	±16.1%
Expanded Uncertainty in dB						±32.4% ±1.2 dB	±32.3% ±1.2 dB

Measurement uncertainty for Power Density						
Error Description	Uncert. Value ($\pm$ dB)	Prob. Dist.	Div.	(ci)	Std. Unc. ($\pm$ dB)	(vi) veff
Uncertainty terms dependent on the measurement system						
Calibration	0.49	N	1	1	0.49	∞
Probe correction	0	R	1.732	1	0	∞
Frequency response ($BW \leq 1$ GHz)	0.2	R	1.732	1	0.12	∞
Sensor cross coupling	0	R	1.732	1	0	∞
Isotropy	0.5	R	1.732	1	0.29	∞
Linearity	0.2	R	1.732	1	0.12	∞
Probe scattering	0	R	1.732	1	0	∞
Probe positioning offset	0.3	R	1.732	1	0.17	∞
Probe positioning repeatability	0.04	R	1.732	1	0.02	∞
Sensor mechanical offset	0	R	1.732	1	0	∞
Probe spatial resolution	0	R	1.732	1	0	∞
Field impedance dependance	0	R	1.732	1	0	∞
Amplitude and phase drift	0	R	1.732	1	0	∞
Amplitude and phase noise	0.04	R	1.732	1	0.02	∞
Measurement area truncation	0	R	1.732	1	0	∞
Data acquisition	0.03	N	1	1	0.03	∞
Sampling	0	R	1.732	1	0	∞
Field reconstruction	2	R	1.732	1	1.15	∞
FTE/MEO	0	R	1.732	1	0	∞
Power density scaling	0	R	1.732	1	0	∞
Spatial averaging	0.1	R	1.732	1	0.06	∞
System detection limit	0.04	R	1.732	1	0.02	∞
Uncertainty terms dependent on the DUT and environmental factors						
Probe coupling with DUT	0	R	1.732	1	0	∞
Modulation response	0.4	R	1.732	1	0.23	∞
Integration time	0	R	1.732	1	0	∞
Response time	0	R	1.732	1	0	∞
Device holder influence	0.1	R	1.732	1	0.06	∞
DUT alignment	0	R	1.732	1	0	∞
RF ambient conditions	0.04	R	1.732	1	0.02	∞
Ambient reflections	0.04	R	1.732	1	0.02	∞
Immunity / secondary reception	0	R	1.732	1	0	∞
Drift of the DUT	0.21	R	1.732	1	0.12	∞
Combined Standard Uncertainty					1.33	∞
Expanded Standard Uncertainty (95%)					2.67	

8. Conducted Power Measurement (Including tolerance allowed for production unit)

WLAN 2.4G 2TX SISO									
	Frequency	Mode	BW	SISO-Wifi 1			SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
DSSS/OFDM mode specified maximum output power at an antenna port	WLAN 2.4GHz	b	20	1	12.11	12.5	1	12.3	12.5
				6	12.15	12.5	6	12.32	12.5
				11	11.72	12.5	11	12.11	12.5
				12	11.71	12.5	12	12.08	12.5
				13	11.69	12.5	13	12.07	12.5
		g	20	1	11.7	12.5	1	11.69	12.5
				6	11.77	12.5	6	11.85	12.5
				11	11.64	12.5	11	11.83	12.5
				12	11.66	12.5	12	11.65	12.5
				13	11.62	12.5	13	11.66	12.5
		n (HT)	20	1	11.63	12.5	1	11.67	12.5
				6	11.68	12.5	6	11.65	12.5
				11	11.64	12.5	11	11.67	12.5
				12	11.61	12.5	12	11.57	12.5
				13	11.64	12.5	13	11.64	12.5
			40	3	11.64	12.5	3	11.64	12.5
				6	11.67	12.5	6	11.66	12.5
				9	11.68	12.5	9	11.63	12.5
				10	11.62	12.5	10	11.62	12.5
				11	11.68	12.5	11	11.6	12.5
		ax (HE)	20	1	11.66	12.5	1	11.68	12.5
				6	11.62	12.5	6	11.67	12.5
				11	11.54	12.5	11	11.62	12.5
				12	11.62	12.5	12	11.59	12.5
				13	11.63	12.5	13	11.64	12.5
			40	3	11.63	12.5	3	11.62	12.5
				6	11.66	12.5	6	11.69	12.5
				9	11.65	12.5	9	11.64	12.5
				10	11.63	12.5	10	11.57	12.5
				11	11.62	12.5	11	11.66	12.5

WLAN 5G 2TX SISO									
OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Wifi 1			SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	U-NII-1 (5150~5250MHz)	a	20	36	11.87	12.5	36	12.12	12.5
				40	11.77	12.5	40	12.11	12.5
				44	11.83	12.5	44	12.23	12.5
				48	11.94	12.5	48	12.22	12.5
		n (HT)	20	36	11.92	12.5	36	11.89	12.5
				40	11.87	12.5	40	11.79	12.5
				44	11.91	12.5	44	11.97	12.5
				48	11.96	12.5	48	11.86	12.5
		40	40	38	12.14	12.5	38	12.24	12.5
				46	12.13	12.5	46	12.19	12.5
		ac(VHT)	80	42	12.17	12.5	42	12.42	12.5
		ax (HE)	20	36	11.97	12.5	36	11.99	12.5
				40	11.82	12.5	40	11.78	12.5
				44	12.01	12.5	44	11.8	12.5
				48	11.79	12.5	48	12.08	12.5
			40	38	11.94	12.5	38	12.02	12.5
				46	11.99	12.5	46	12.13	12.5
			80	42	12.07	12.5	42	12.21	12.5
	U-NII-2A (5250~5350MHz)	a	20	52	11.86	12.5	52	12.29	12.5
				56	11.81	12.5	56	12.15	12.5
				60	11.91	12.5	60	12.11	12.5
				64	11.88	12.5	64	12.09	12.5
		n (HT)	20	52	11.79	12.5	52	11.72	12.5
				56	11.87	12.5	56	11.83	12.5
				60	12.01	12.5	60	11.98	12.5
				64	11.88	12.5	64	11.92	12.5
		40	40	54	12.01	12.5	54	12.1	12.5
				62	12.03	12.5	62	12.08	12.5
		ac (VHT)	80	58	12.18	12.5	58	12.45	12.5
			160	50	11.98	12.5	50	12.11	12.5
		ax (HE)	20	52	11.7	12.5	52	11.63	12.5
				56	11.78	12.5	56	11.96	12.5
				60	12.02	12.5	60	12.11	12.5
				64	11.88	12.5	64	11.89	12.5
			40	54	12.02	12.5	54	12.08	12.5
				62	11.94	12.5	62	11.94	12.5
			80	58	12.08	12.5	58	12.33	12.5
			160	50	11.97	12.5	50	12.09	12.5

	Frequency	Mode	BW	SISO-Wifi 1			SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
OFDM mode specified maximum output power at an antenna port	U-NII-2C (5470~5725MHz)	a	20	100	11.28	12	100	11.25	12
				116	11.34	12	116	11.34	12
				124	11.24	12	124	11.22	12
				132	11.22	12	132	11.12	12
				140	11.35	12	140	11.24	12
				144	11.31	12	144	11.26	12
		n (HT)	20	100	11.18	12	100	11.17	12
				116	11.29	12	116	11.35	12
				124	11.21	12	124	11.26	12
				132	11.31	12	132	11.32	12
				140	11.38	12	140	11.47	12
				144	11.25	12	144	11.32	12
			40	102	11.32	12	102	11.4	12
				110	11.17	12	110	11.21	12
				126	11.18	12	126	11.31	12
				134	11.14	12	134	11.24	12
		ac (VHT)	80	106	11.69	12	106	11.64	12
				122	11.41	12	122	11.35	12
				138	11.74	12	138	11.69	12
			160	114	11.09	12	114	11.15	12
		ax (HE)	20	100	11.18	12	100	11.26	12
				116	11.34	12	116	11.26	12
				124	11.23	12	124	11.16	12
				132	11.24	12	132	11.38	12
				140	11.44	12	140	11.43	12
				144	11.32	12	144	11.46	12
			40	102	11.35	12	102	11.35	12
				110	11.2	12	110	11.11	12
				126	11.23	12	126	11.25	12
				134	11.2	12	134	11.21	12
				142	11.24	12	142	11.26	12
			80	106	11.53	12	106	11.55	12
				122	11.34	12	122	11.33	12
				138	11.22	12	138	11.32	12
			160	114	11.22	12	114	11.16	12

	Frequency	Mode	BW	SISO-Wifi 1			SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
OFDM mode specified maximum output power at an antenna port	U-NII-3 (5725~5850MHz)	a	20	149	10.69	11	149	10.69	11
				157	10.66	11	157	10.72	11
				165	10.64	11	165	10.77	11
		n (HT)	20	149	10.74	11	149	10.71	11
				157	10.57	11	157	10.62	11
				165	10.65	11	165	10.58	11
			40	151	10.65	11	151	10.6	11
				159	10.58	11	159	10.77	11
				155	10.98	11	155	10.93	11
		ax (HE)	20	149	10.67	11	149	10.87	11
				157	10.69	11	157	10.43	11
				165	10.66	11	165	10.69	11
			40	151	10.68	11	151	10.75	11
				159	10.55	11	159	10.63	11
			80	155	10.76	11	155	10.72	11
	U-NII-4 (5850~5925MHz)	a	20	169	10.66	11	169	10.83	11
				173	10.58	11	173	10.74	11
				177	10.61	11	177	10.78	11
		n (HT)	20	169	10.72	11	169	10.81	11
				173	10.48	11	173	10.42	11
				177	10.63	11	177	10.72	11
			40	167	10.67	11	167	10.68	11
				175	10.59	11	175	10.88	11
				171	10.72	11	171	10.92	11
		ac(VHT)	80	171	10.72	11	171	10.92	11
			160	163	10.61	11	163	10.64	11
		ax (HE)	20	169	10.53	11	169	10.61	11
				173	10.35	11	173	10.47	11
				177	10.78	11	177	10.71	11
			40	167	10.55	11	167	10.59	11
				175	10.49	11	175	10.44	11
				171	10.67	11	171	10.85	11
			80	171	10.67	11	171	10.85	11
				163	10.68	11	163	10.66	11

WLAN 6G 2TX SISO									
OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Wifi 1			SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	U-NII-5 (5925~6425MHz)	a	20	1	6.44	7	1	6.37	7
				45	4.15	5	45	4.77	5
				93	5.06	5.5	93	4.18	5.5
		ax (HE)	20	1	6.28	6.5	1	6.22	6.5
				45	3.42	4.5	45	3.54	4.5
				93	5.19	5.5	93	4.22	5.5
			40	3	9.13	9.5	3	8.89	9.5
				43	8.15	9	43	8.2	9
				91	7.22	7.5	91	7.01	7.5
			80	7	9.31	10	7	9.15	10
				39	9.32	10	39	9.11	10
				87	9.28	10	87	9.04	10
			160	15	9.57	10	15	9.61	10
				47	9.47	10	47	9.92	10
				79	9.42	10	79	9.79	10
	U-NII-6 (6425~6525MHz)	a	20	97	4.22	4.5	97	3.38	4.5
				105	4.54	5	105	3.77	5
				113	4.88	5	113	3.98	5
		ax (HE)	20	97	5.23	5.5	97	4.51	5.5
				105	5.18	5.5	105	4.5	5.5
				113	4.52	5	113	3.85	5
			40	99	7.8	8	99	7.42	8
				107	7.01	7.5	107	6.92	7.5
			80	103	8.99	9.5	103	8.43	9.5
			160	111	9.01	9.5	111	9.46	9.5

OFDM mode specified maximum output power at an antenna port	Frequency	Mode	BW	SISO-Wifi 1			SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power	CH	Avg. Power	Tune-Up Power
	U-NII-7 (6525~6875MHz)	a	20	117	5.11	5.5	117	4.15	5.5
				149	6.01	6.5	149	5.11	6.5
				181	6.12	6.5	181	5.35	6.5
		ax (HE)	20	117	5.88	6	117	4.99	6
				149	5.73	6	149	5.11	6
				181	6.77	7	181	5.98	7
			40	115	6.88	7	115	6.44	7
				147	8.25	8.5	147	7.82	8.5
				179	8.61	9	179	7.88	9
			80	119	8.98	9.5	119	8.42	9.5
				135	10.98	11.5	135	10.55	11.5
				151	9.81	10.5	151	9.72	10.5
				167	9.74	10	167	9.24	10
				183	9.58	10	183	8.72	10
			160	143	11.96	12	143	11.73	12
				175	9.87	10	175	9.84	10
	U-NII-8 (6875~7125MHz)	a	20	185	6.05	6.5	185	5.33	6.5
				209	6.12	6.5	209	6.03	6.5
				233	3.33	4	233	3.75	4
		ax (HE)	20	185	7.01	7.5	185	6.13	7.5
				209	5.66	6	209	5.57	6
				233	3.1	4	233	3.62	4
			40	187	8.66	9	187	7.72	9
				227	7.88	8.5	227	8.03	8.5
			80	199	9.44	10	199	8.81	10
				215	9.43	10	215	8.91	10
			160	207	9.86	10	207	9.74	10

BT Only Support Wifi 2						
Bluetooth mode maximum output power	Frequency	Mode	Modulation	SISO-Wifi 2		
				CH	Avg. Power	Tune-Up Power
	BT 2.4GHz	BR	GFSK	0	6.86	7
				38	6.94	7
				78	6.82	7
		EDR	8DPSK	0	3.73	4.5
				38	4.08	4.5
				78	3.88	4.5
		BLE (1Mbps)	GFSK	0	6.69	7
				19	6.92	7
				39	6.81	7
		BLE (2Mbps)	GFSK	0	6.71	7
				19	6.93	7
				39	6.8	7

9. Test Results

9.1 Test Results Summary

SAR MEASUREMENT								
Ambient Temperature (°C): 23.1±2					Relative Humidity (%): 58%			
Liquid Temperature (°C): 22.1±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN2.4GHz_802.11b-1M_Wifi 1								
Front	5	6	2437	12.15	12.5	0.014	0.015	
Back	5	6	2437	12.15	12.5	0.172	0.190	
Left-side	5	1	2412	12.11	12.5	1.030	1.149	204
Left-side	5	6	2437	12.15	12.5	0.891	0.985	
Left-side	5	11	2462	11.72	12.5	0.727	0.887	
Top	5	6	2437	12.15	12.5	0.013	0.015	
Test Mode: WLAN2.4GHz_802.11b-1M_Wifi 1_WLAN SKU								
Left-side	5	1	2412	12.11	12.5	0.958	1.069	
Test Mode: WLAN2.4GHz_802.11b-1M_Wifi 2								
Front	5	6	2437	12.32	12.5	0.011	0.012	
Back	5	6	2437	12.32	12.5	0.193	0.205	
Right-side	5	1	2412	12.30	12.5	0.800	0.854	
Right-side	5	6	2437	12.32	12.5	1.030	1.095	
Right-side	5	11	2462	12.11	12.5	0.851	0.950	
Top	5	6	2437	12.32	12.5	0.008	0.009	
Test Mode: WLAN2.4GHz_802.11b-1M_Wifi 2_WLAN SKU								
Right-side	5	6	2437	12.32	12.5	0.866	0.921	
Test Mode: Bluetooth_BT-1M_Wifi 2								
Front	5	38	2440	6.94	7	0.00405	0.005	
Back	5	38	2440	6.94	7	0.051	0.067	
Right-side	5	38	2440	6.94	7	0.228	0.300	502
Top	5	38	2440	6.94	7	0.00196	0.003	

Note:

- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required.
- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.

SAR MEASUREMENT								
Ambient Temperature (°C): 22.8±2					Relative Humidity (%): 57%			
Liquid Temperature (°C): 21.8±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 1								
Front	5	58	5290	12.18	12.5	0.042	0.047	
Back	5	58	5290	12.18	12.5	0.288	0.316	
Left-side	5	58	5290	12.18	12.5	1.020	1.120	218
Top	5	58	5290	12.18	12.5	0.155	0.170	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 1_WLAN SKU								
Left-side	5	58	5290	12.18	12.5	0.971	1.066	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 2								
Front	5	58	5290	12.45	12.5	0.018	0.018	
Back	5	58	5290	12.45	12.5	0.125	0.129	
Right-side	5	58	5290	12.45	12.5	0.960	0.991	
Top	5	58	5290	12.45	12.5	0.076	0.078	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 2_WLAN SKU								
Right-side	5	58	5290	12.45	12.5	0.785	0.810	

Note:

1. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
2. When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.
3. When the reported SAR of the highest measured maximum U-NII-2A for the exposure configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.

SAR MEASUREMENT								
Ambient Temperature (°C): 22.8±2					Relative Humidity (%): 57%			
Liquid Temperature (°C): 21.8±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 1								
Front	5	138	5690	11.74	12	0.019	0.020	
Back	5	138	5690	11.74	12	0.223	0.241	
Left-side	5	106	5530	11.69	12	0.797	0.873	
Left-side	5	122	5610	11.41	12	0.719	0.840	
Left-side	5	138	5690	11.74	12	1.070	1.159	231
Top	5	138	5690	11.74	12	0.097	0.105	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 1_WLAN SKU								
Left-side	5	138	5690	11.74	12	0.828	0.897	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 2								
Front	5	138	5690	11.69	12	0.025	0.027	
Back	5	138	5690	11.69	12	0.153	0.168	
Right-side	5	106	5530	11.64	12	0.813	0.901	
Right-side	5	122	5610	11.35	12	0.871	1.032	
Right-side	5	138	5690	11.69	12	1.020	1.117	
Top	5	138	5690	11.69	12	0.087	0.095	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 2_WLAN SKU								
Right-side	5	138	5690	11.69	12	0.866	0.949	

Note:

- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

SAR MEASUREMENT								
Ambient Temperature (°C): 22.8±2					Relative Humidity (%): 57%			
Liquid Temperature (°C): 21.8±2					Depth of Liquid (cm): >15			
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 1								
Front	5	155	5775	10.98	11	0.014	0.014	
Back	5	155	5775	10.98	11	0.182	0.186	
Left-side	5	155	5775	10.98	11	0.708	0.725	
Top	5	155	5775	10.98	11	0.079	0.081	
Front	5	171	5855	10.72	11	0.011	0.012	
Back	5	171	5855	10.72	11	0.161	0.175	
Left-side	5	171	5855	10.72	11	0.814	0.886	221
Top	5	171	5855	10.72	11	0.105	0.114	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 1_WLAN SKU								
Left-side	5	171	5855	10.72	11	0.707	0.769	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 2								
Front	5	155	5775	10.93	11	0.013	0.014	
Back	5	155	5775	10.93	11	0.102	0.106	
Right-side	5	155	5775	10.93	11	0.693	0.718	
Top	5	155	5775	10.93	11	0.054	0.056	
Front	5	171	5855	10.92	11	0.019	0.020	
Back	5	171	5855	10.92	11	0.108	0.112	
Right-side	5	171	5855	10.92	11	0.611	0.635	
Top	5	171	5855	10.92	11	0.050	0.052	
Test Mode: WLAN5GHz_802.11ac80-VHT0_Wifi 2_WLAN SKU								
Right-side	5	155	5775	10.93	11	0.646	0.670	

Note:

- When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

SAR MEASUREMENT									
Ambient Temperature (°C): 22.8±2					Relative Humidity (%): 55%				
Liquid Temperature (°C): 21.8±2					Depth of Liquid (cm): >15				
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		APD (W/m²)	Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	Meas-4cm²	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 1									
Front	5	143	6665	11.96	12	0.021	0.021	0.180	
Back	5	143	6665	11.96	12	0.415	0.423	3.300	
Left-side	5	143	6665	11.96	12	0.688	0.701	5.470	276
Top	5	143	6665	11.96	12	0.106	0.108	0.947	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 2									
Front	5	143	6665	11.73	12	0.042	0.045	0.359	
Back	5	143	6665	11.73	12	0.226	0.243	1.850	
Right-side	5	143	6665	11.73	12	0.242	0.260	1.920	
Top	5	143	6665	11.73	12	0.071	0.076	0.640	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 1_WLAN SKU									
Left-side	5	143	6665	11.96	12	0.637	0.649	4.800	

SAR MEASUREMENT									
Ambient Temperature (°C): 23.1±2					Relative Humidity (%): 56%				
Liquid Temperature (°C): 22.1±2					Depth of Liquid (cm): >15				
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		SAR (W/kg)		APD (W/m²)	Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-1g	Scaled-1g	Meas-4cm²	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 1									
Left-side	5	15	6025	9.57	10	0.363	0.405	2.760	
Left-side	5	47	6185	9.47	10	0.613	0.699	4.630	
Left-side	5	111	6505	9.01	9.5	0.427	0.483	3.180	
Left-side	5	207	6985	9.86	10	0.136	0.142	1.180	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 2									
Right-side	5	15	6025	9.61	10	0.501	0.554	3.250	
Right-side	5	47	6185	9.92	10	0.325	0.334	2.600	
Right-side	5	111	6505	9.46	9.5	0.323	0.329	2.580	
Right-side	5	207	6985	9.74	10	0.312	0.335	2.500	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 2_WLAN SKU									
Right-side	5	15	6025	9.61	10	0.419	0.463	3.190	

Note:

- When multiple transmission modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

PD MEASUREMENT											
Ambient Temperature (°C): 23±2							Relative Humidity (%): 56%				
Test Position	Dist. (mm)	Frequency		Conducted Power (dBm)		psPDn+ (W/m²)		psPDtot+ (W/m²)		Uncertainty	Plot No.
		Ch.	MHz	Meas.	Tune-Up Limit	Meas-4cm²	Scaled-4cm²	Meas-4cm²	Scaled-4cm²	Uncertainty Scaling Factor	
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 1											
Left-side	5	47	6185	9.47	10	3.300	5.837	3.440	6.084	1.550	
Left-side	5	111	6505	9.01	9.5	3.340	5.853	3.500	6.134	1.550	
Left-side	5	143	6665	11.96	12	4.620	7.300	4.920	7.774	1.550	12
Test Mode: WLAN6GHz_802.11ax160-HE0_Wifi 2											
Right-side	5	15	6025	9.61	10	3.410	5.840	3.630	6.217	1.550	
Right-side	5	207	6985	9.74	10	3.970	6.598	4.100	6.815	1.550	

Note:

1. Per WLAN 6 GHz interim test procedure in Oct. 2020 TCBs Workshop notes. At least 5 channels for BW 160MHz should be tested.

9.2 Simultaneous Transmission

Simultaneous Transmission Configurations	
1	WLAN 2.4 GHz WIFI 1 + WLAN 2.4 GHz WIFI 2
2	WLAN 2.4 GHz WIFI 1 + Bluetooth WIFI 2
3	WLAN 5 GHz WIFI 1 + WLAN 5 GHz WIFI 2
4	WLAN 5 GHz WIFI 1 + WLAN 5 GHz WIFI 2 + Bluetooth WIFI 2
5	WLAN 6 GHz WIFI 1 + WLAN 6 GHz WIFI 2
6	WLAN 6 GHz WIFI 1 + WLAN 6 GHz WIFI 2 + Bluetooth WIFI 2

9.2.1 Simultaneous transmission test exclusion considerations

Test Position	2	3	4	5	6	7	8	2 + 3	2 + 8	4 + 5	4 + 5 + 8	6 + 7	6 + 7 + 8
	WLAN2.4GHz Wifi 1 (W/kg)	WLAN2.4GHz Wifi 2 (W/kg)	WLAN5GHz Wifi 1 (W/kg)	WLAN5GHz Wifi 2 (W/kg)	WLAN6GHz Wifi 1 (W/kg)	WLAN6GHz Wifi 2 (W/kg)	Bluetooth Wifi 2 (W/kg)	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR
Front at 5 mm	0.015	0.012	0.047	0.027	0.021	0.045	0.005	0.027	0.020	0.074	0.079	0.066	0.071
Back at 5 mm	0.190	0.205	0.316	0.168	0.423	0.243	0.067	0.395	0.257	0.484	0.551	0.666	0.733
Left-side at 5 mm	1.149	-	1.159	-	0.701	-	-	1.149	1.149	1.159	1.159	0.701	0.701
Right-side at 5 mm	-	1.095	-	1.117	-	0.554	0.300	1.095	0.300	1.117	1.417	0.554	0.854
Top at 5 mm	0.015	0.009	0.170	0.095	0.108	0.076	0.003	0.024	0.018	0.265	0.268	0.184	0.187

When the sum of SAR is larger than the limit, The ratio is determined by $(SAR1 + SAR2)^{1.5/R_i}$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

10. SAR measurement variability

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency		SAR 1g (W/kg)		
Channel	MHz	Original	First Repeated	
			Value	Ratio
1	2412	1.030	1.000	1.030
138	5690	1.070	0.960	1.115

Appendix

Appendix A. System Check Data

Appendix B. Highest measurement Data

Appendix C. Test Setup Photographs

Appendix D. Probe Calibration Data

Appendix E. Dipole Calibration Data

Appendix F. Product Photos-Please refer to the file: 2460573R-Product Photos