

13 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

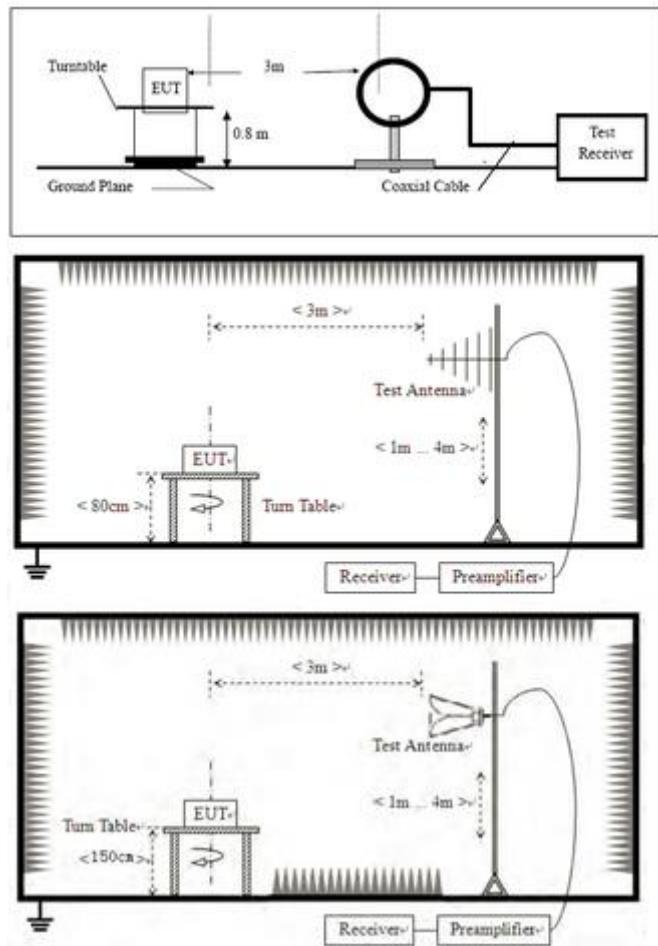

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

13.4 TEST DATA


Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

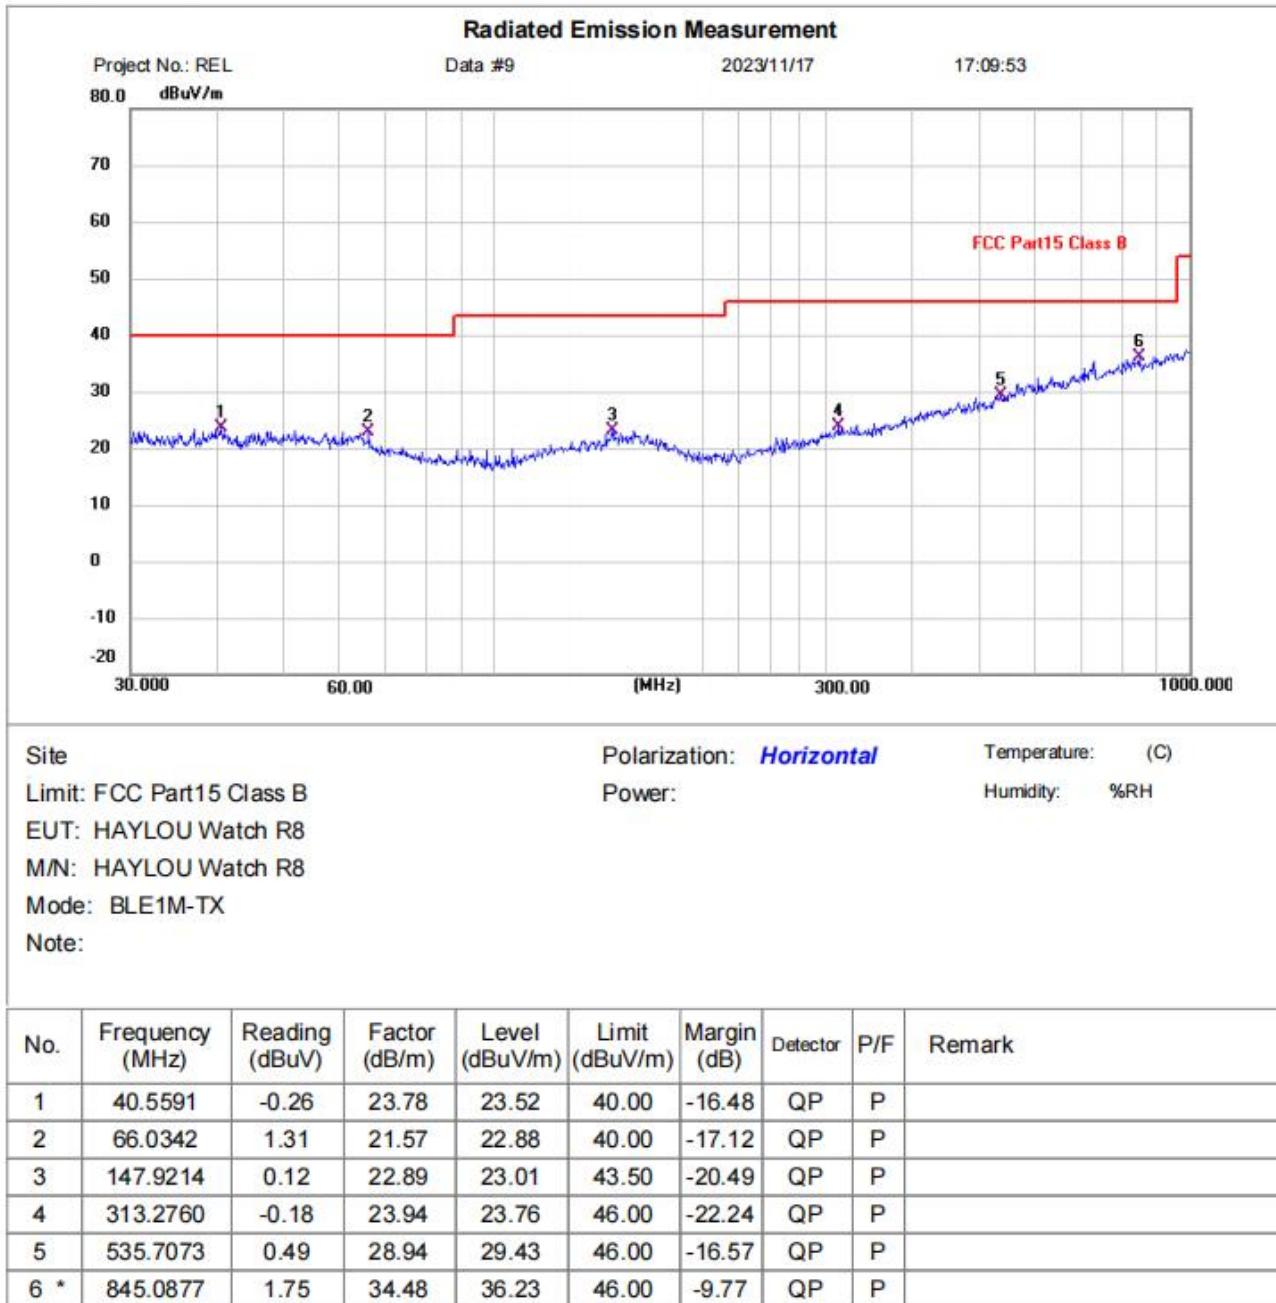


Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

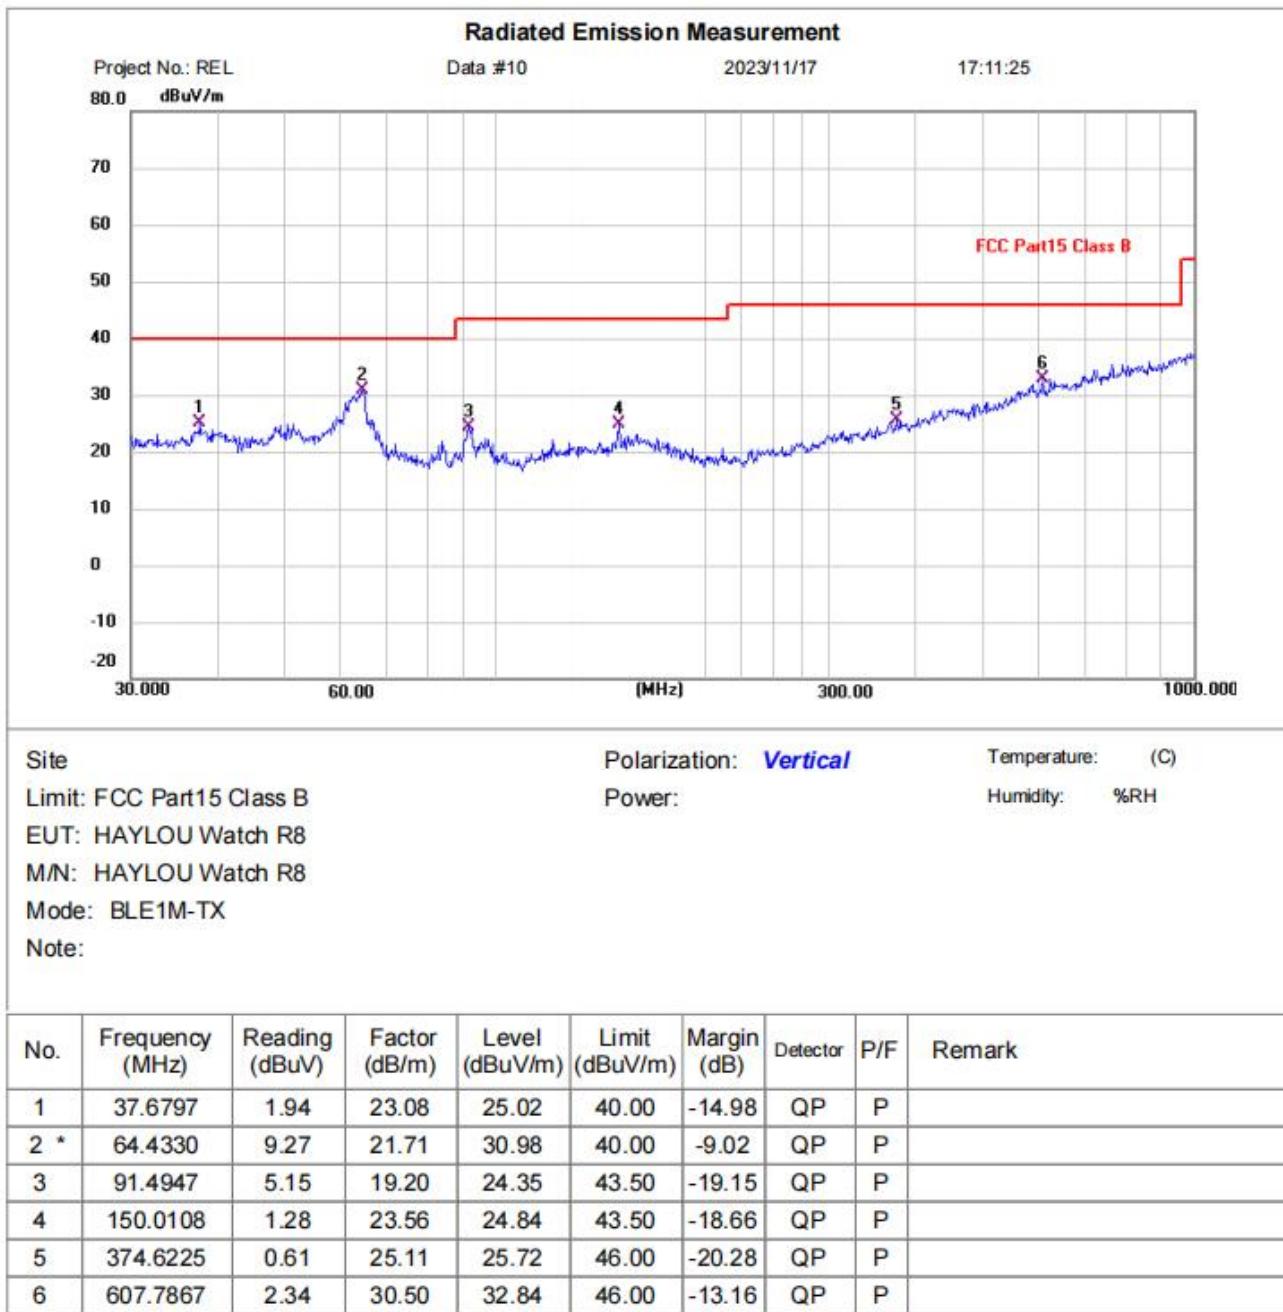
Test Result: Pass

Above 1GHz:

[TestMode: TX low channel]; [Polarity: Horizontal]

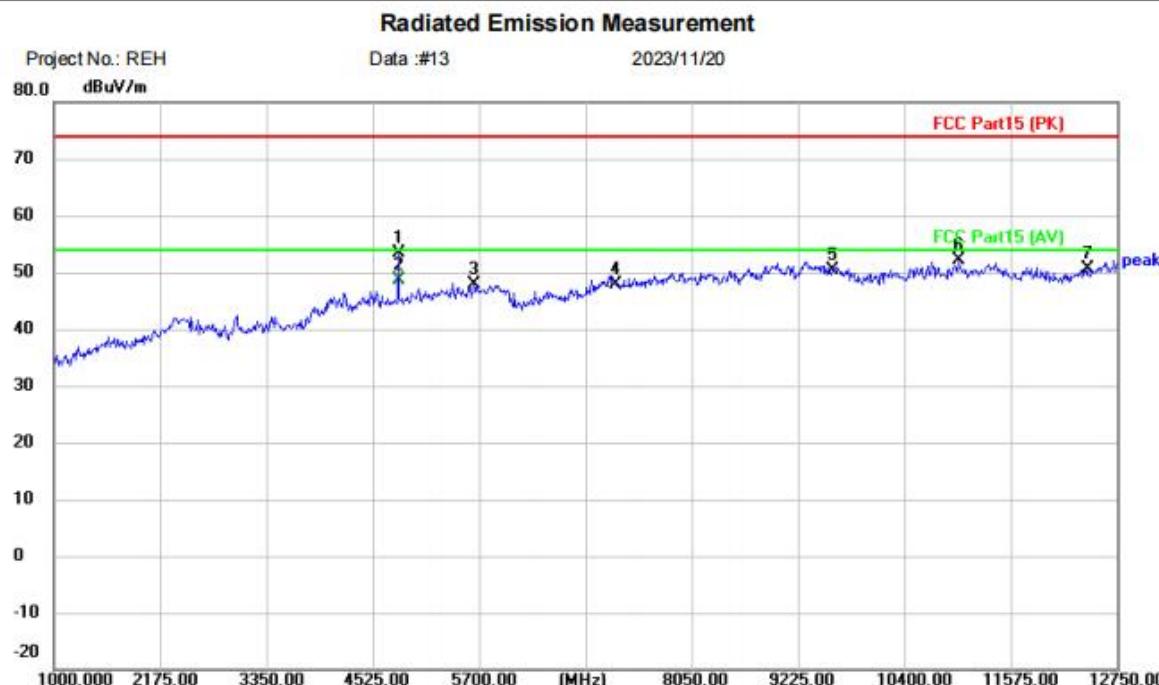

Site

Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: HAYLOU Watch R8

M/N: HAYLOU Watch R8


Mode: BLE1M-TX-2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV/m	dB		
1		4807.000	47.78	5.64	53.42	74.00	-20.58	peak	
2	*	4807.000	43.09	5.64	48.73	54.00	-5.27	AVG	
3		5641.250	40.22	7.65	47.87	74.00	-26.13	peak	
4		7206.000	38.66	9.24	47.90	74.00	-26.10	peak	
5		9608.000	38.14	12.31	50.45	74.00	-23.55	peak	
6		10999.25	38.70	13.48	52.18	74.00	-21.82	peak	
7		12421.00	38.33	12.29	50.62	74.00	-23.38	peak	

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

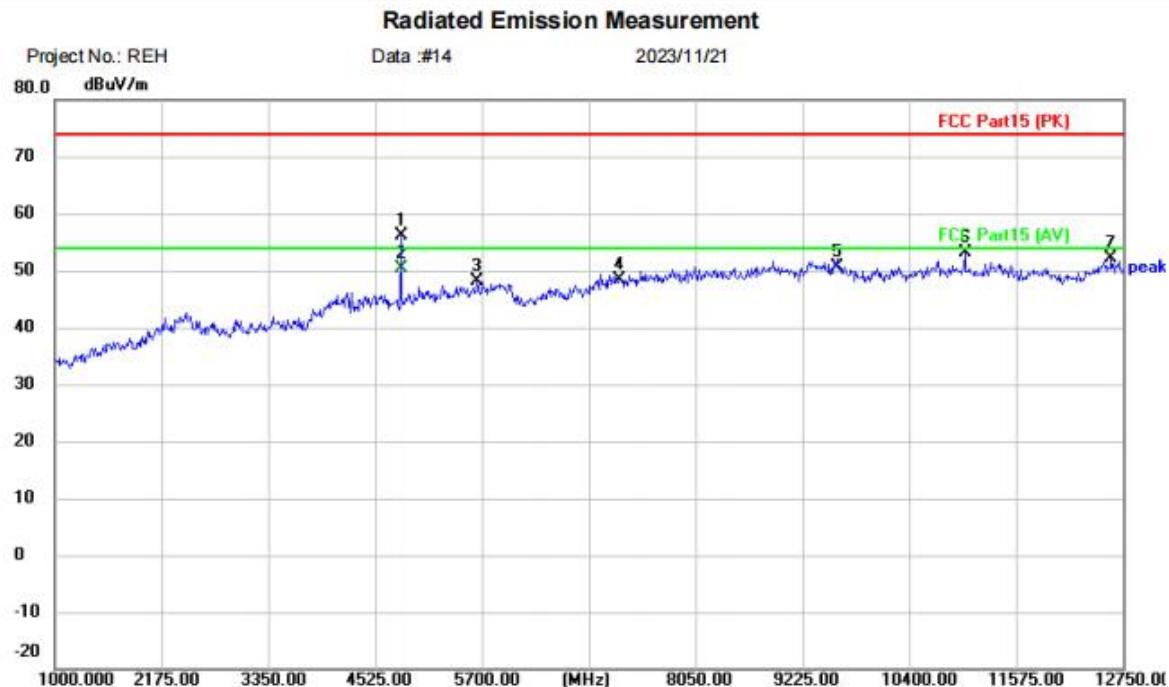


Site	Polarization: <i>Vertical</i>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2402		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over					
							MHz	dBuV	dB	dBuV/m	dB	Detector
1		4807.000	50.49	5.64	56.13	74.00	-17.87			peak		
2	*	4807.000	44.65	5.64	50.29	54.00	-3.71			AVG		
3		5641.250	40.51	7.65	48.16	74.00	-25.84			peak		
4		7206.000	39.07	9.24	48.31	74.00	-25.69			peak		
5		9608.000	38.32	12.31	50.63	74.00	-23.37			peak		
6		11011.00	39.75	13.40	53.15	74.00	-20.85			peak		
7		12620.75	39.07	13.04	52.11	74.00	-21.89			peak		

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

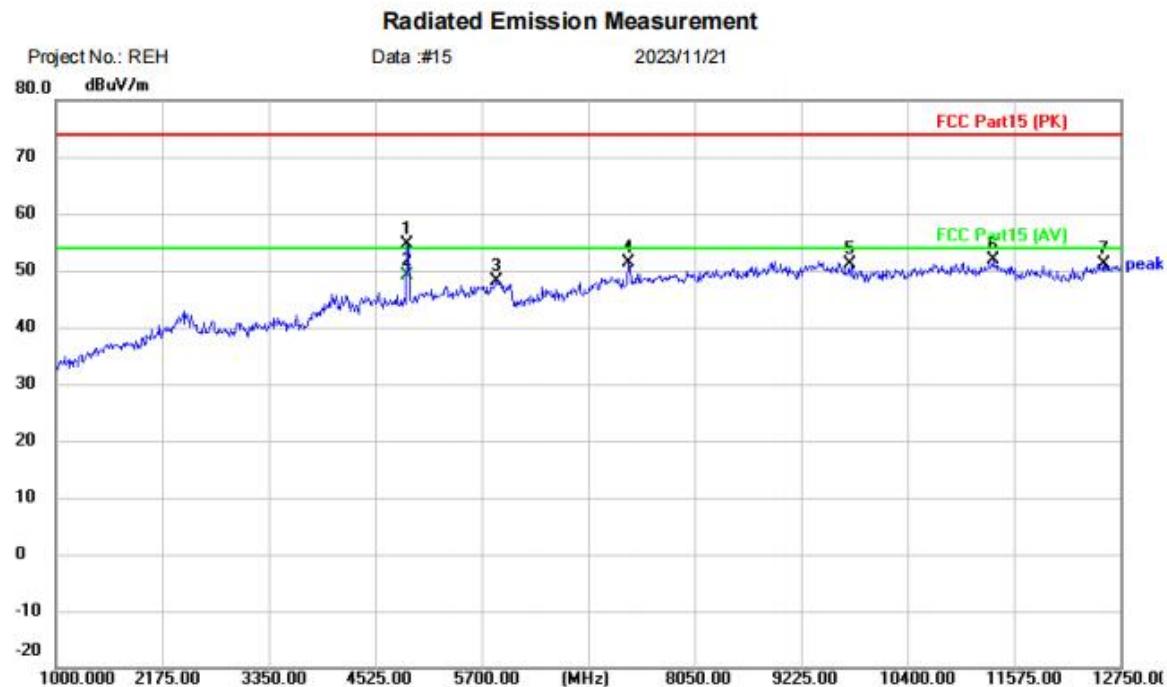


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2442		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over							
							MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4877.500	48.93	5.72	54.65	74.00	-19.35			peak				
2	*	4877.500	43.41	5.72	49.13	54.00	-4.87			AVG				
3		5864.500	39.55	8.48	48.03	74.00	-25.97			peak				
4		7321.500	41.93	9.43	51.36	74.00	-22.64			peak				
5		9768.000	38.95	12.22	51.17	74.00	-22.83			peak				
6		11351.75	39.25	12.65	51.90	74.00	-22.10			peak				
7		12562.00	38.40	12.85	51.25	74.00	-22.75			peak				

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

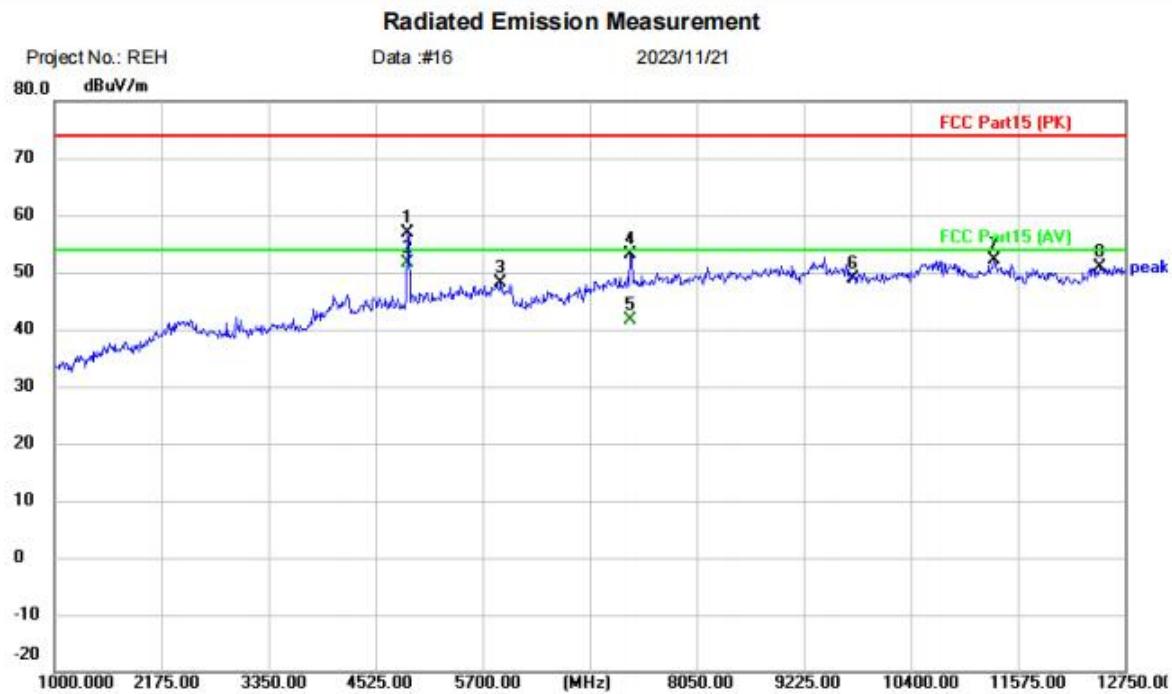


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2442		
Note:		

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over			
			Level	Factor	ment					
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4877.500	51.22	5.72	56.94	74.00	-17.06		peak	
2	*	4877.500	45.91	5.72	51.63	54.00	-2.37		AVG	
3		5899.750	39.50	8.66	48.16	74.00	-25.84		peak	
4		7321.500	43.64	9.43	53.07	74.00	-20.93		peak	
5		7321.500	32.19	9.43	41.62	54.00	-12.38		AVG	
6		9768.000	36.58	12.22	48.80	74.00	-25.20		peak	
7		11316.50	39.36	12.69	52.05	74.00	-21.95		peak	
8		12468.00	38.32	12.52	50.84	74.00	-23.16		peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

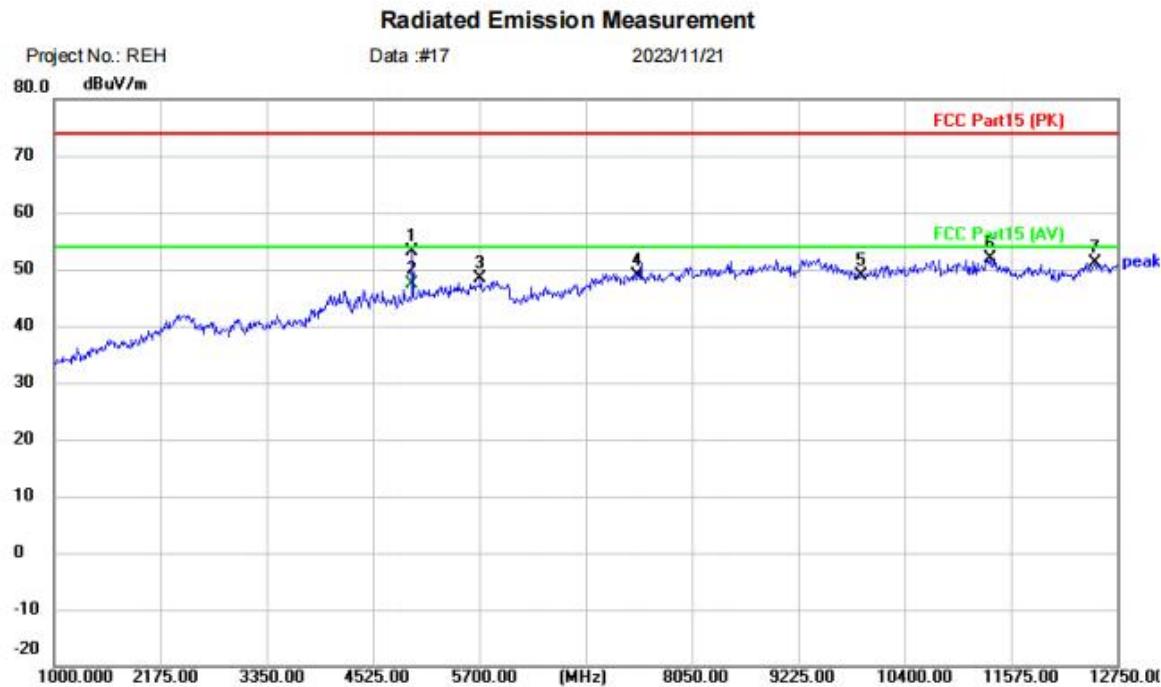


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2480		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit			Detector	Comment
						MHz	dBuV	dB	dBuV/m	dBuV/m
1		4959.750	46.42	6.60	53.02	74.00	-20.98	peak		
2	*	4959.750	40.85	6.60	47.45	54.00	-6.55	AVG		
3		5711.750	40.29	8.06	48.35	74.00	-25.65	peak		
4		7440.000	39.29	9.64	48.93	74.00	-25.07	peak		
5		9920.000	36.75	12.14	48.89	74.00	-25.11	peak		
6		11340.00	39.25	12.67	51.92	74.00	-22.08	peak		
7		12503.25	38.54	12.69	51.23	74.00	-22.77	peak		

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

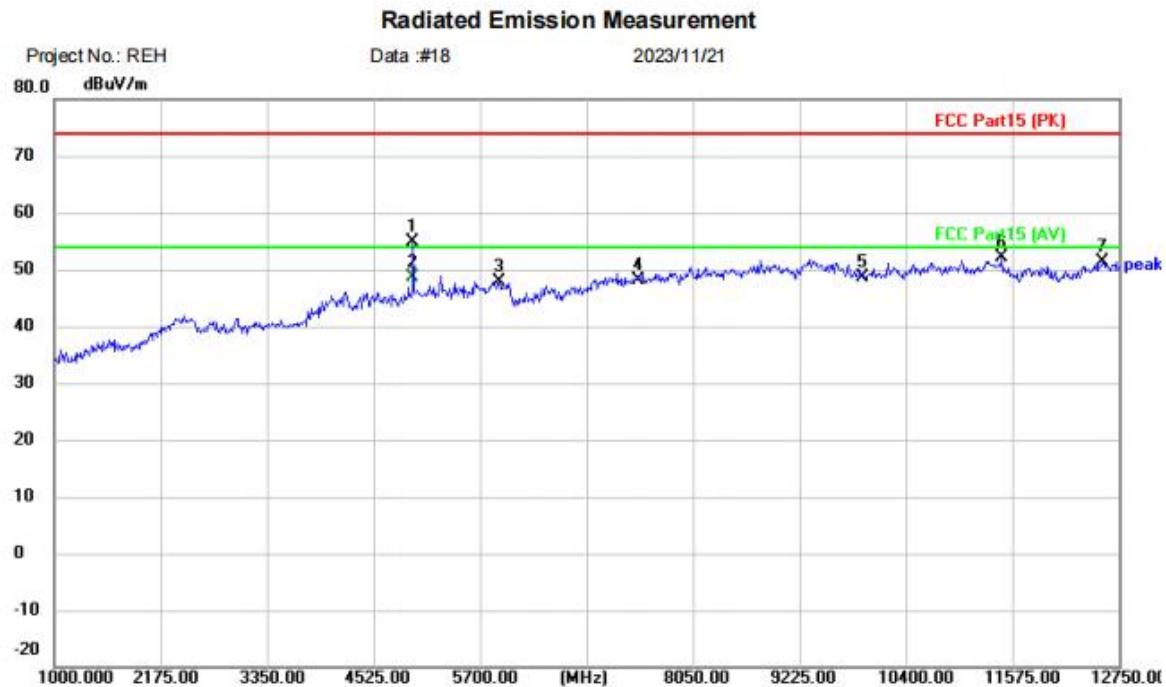

Site	Polarization: <i>Vertical</i>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2480		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over					
							MHz	dBuV	dB	dBuV/m	dB	Detector
1		4959.750	48.26	6.60	54.86	74.00	-19.14			peak		
2	*	4959.750	42.00	6.60	48.60	54.00	-5.40			AVG		
3		5911.500	39.27	8.68	47.95	74.00	-26.05			peak		
4		7440.000	38.51	9.64	48.15	74.00	-25.85			peak		
5		9920.000	36.61	12.14	48.75	74.00	-25.25			peak		
6		11457.50	39.42	12.62	52.04	74.00	-21.96			peak		
7		12562.00	38.47	12.85	51.32	74.00	-22.68			peak		

Test Result: Pass

14 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


14.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a ~~an~~ antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -2.1dBi.

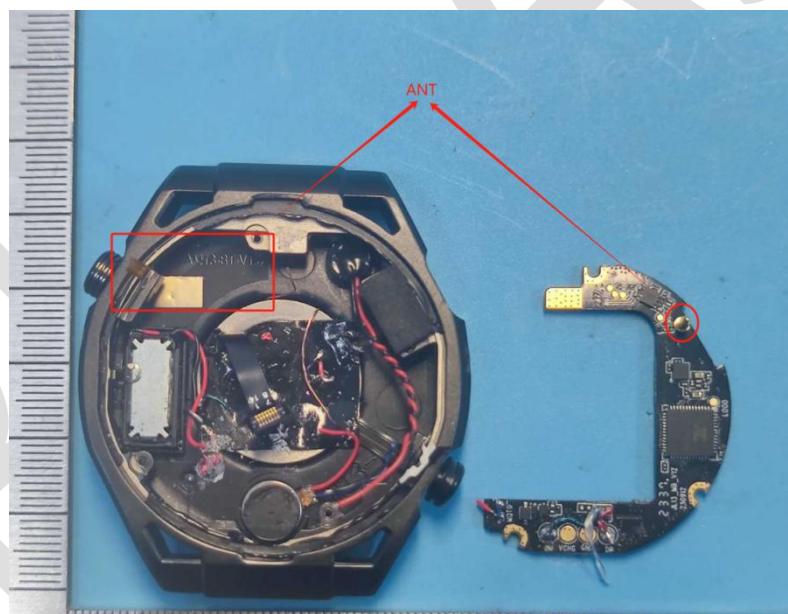

15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25 °C
Humidity	60%

15.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

15.2 BLOCK DIAGRAM OF TEST SETUP

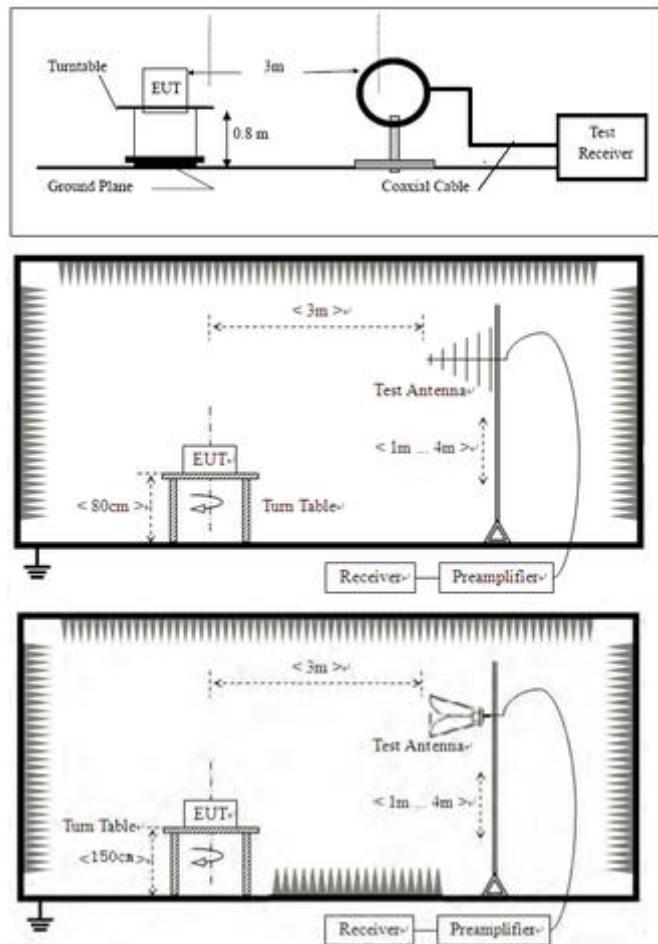

15.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


BlueAsia

16 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25 °C
Humidity	60%

16.1 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

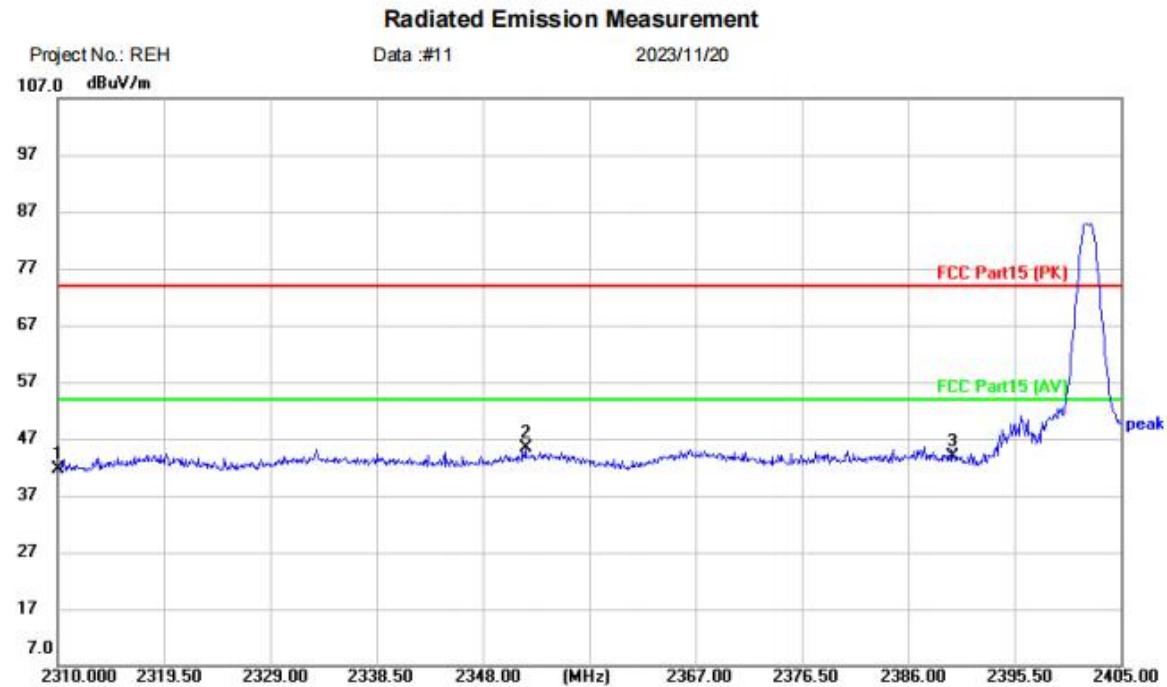


Site: Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature: (C)
EUT: HAYLOU Watch R8 Power: Humidity: %RH
M/N: HAYLOU Watch R8
Mode: BLE1M-TX-2402
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Over							
						MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	42.61	-1.05	41.56	74.00	-32.44	peak					
2	*	2351.800	45.62	-0.27	45.35	74.00	-28.65	peak					
3		2390.000	43.88	0.01	43.89	74.00	-30.11	peak					

Test Result: Pass

[TestMode:TX low channel]; [Polarity: Vertical]

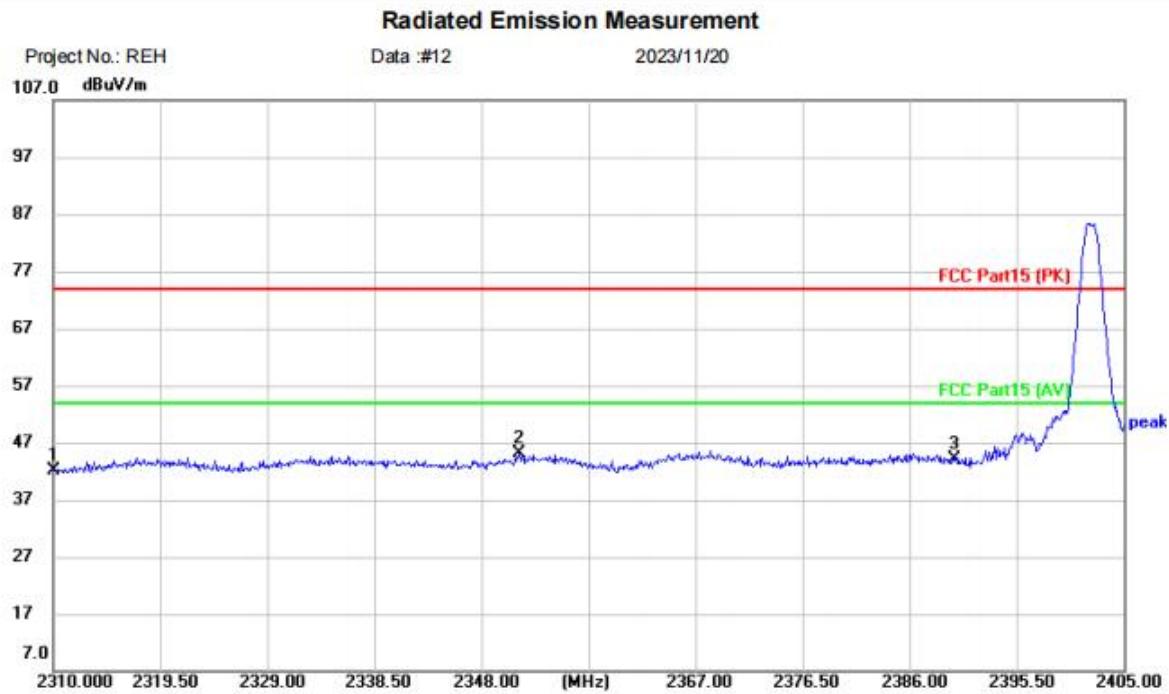


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2402		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over							
							MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	43.08	-1.05	42.03	74.00	-31.97			peak				
2	*	2351.325	45.34	-0.27	45.07	74.00	-28.93			peak				
3		2390.000	44.00	0.01	44.01	74.00	-29.99			peak				

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

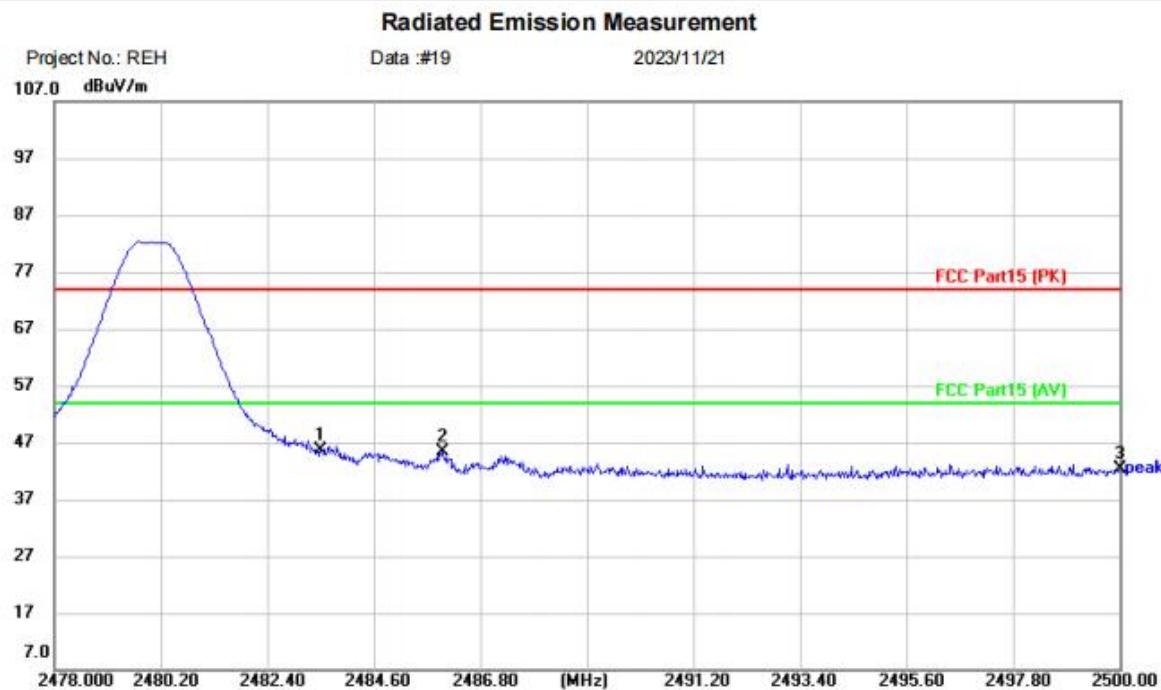


Site	Polarization: <i>Horizontal</i>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2480		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit			Detector	Comment
						MHz	dBuV	dB	dBuV/m	dBuV/m
1	*	2483.500	46.57	-1.03	45.54	74.00	-28.46	peak		
2		2486.008	46.39	-1.06	45.33	74.00	-28.67	peak		
3		2500.000	43.57	-1.26	42.31	74.00	-31.69	peak		

Test Result: Pass

[TestMode:TX High channel]; [Polarity: Vertical]

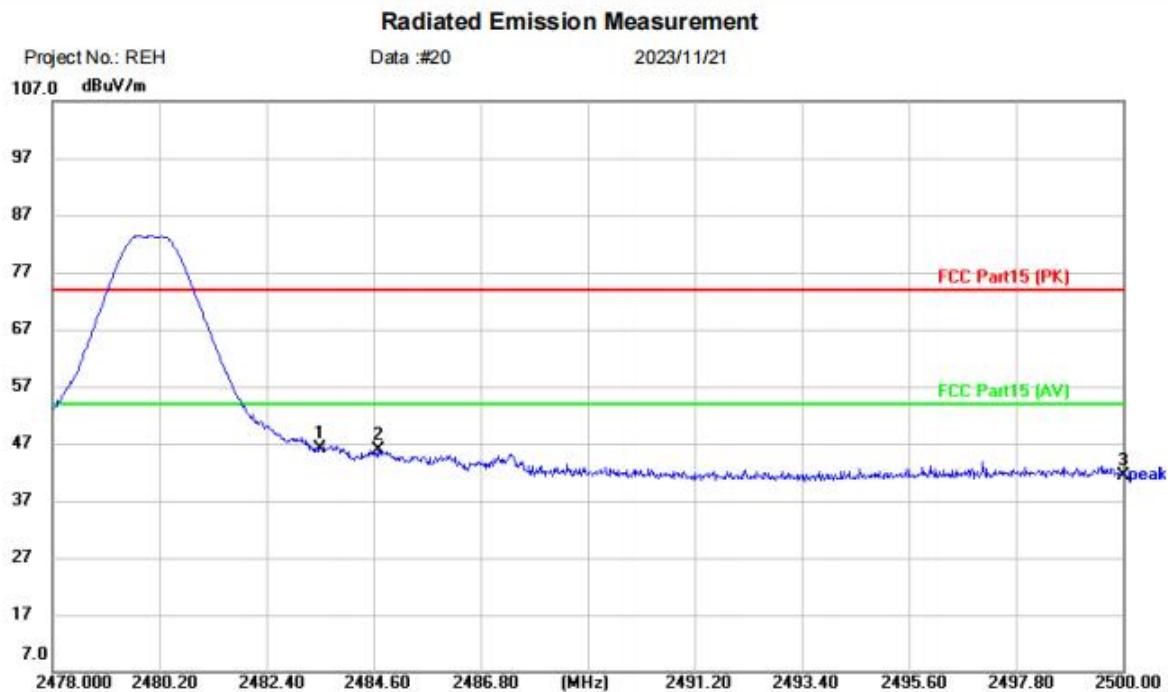

Site	Polarization: <i>Vertical</i>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: HAYLOU Watch R8		
M/N: HAYLOU Watch R8		
Mode: BLE1M-TX-2480		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit			Over	Comment	
						MHz	dBuV	dB	dBuV/m	dB	Detector
1	*	2483.500	47.25	-1.03	46.22	74.00	-27.78			peak	
2		2484.688	46.93	-1.05	45.88	74.00	-28.12			peak	
3		2500.000	42.67	-1.26	41.41	74.00	-32.59			peak	

Test Result: Pass