


MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 WLAN 802.11b/g/n


FCC ID: 2AN2O-RSW01
IC: 23317-RSW01
Applicant: Beijing Roborock Technology Co., Ltd.

Application Type: CLASS II PERMISSIVE CHANGE
Product: WIFI Module
Model No.: F89ETSM13-W2
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
IC Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013
Test Date: December 08 ~ 11, 2019

Reviewed By:


(Kevin Guo)

Approved By:


(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1909WSU020-U1	Rev. 01	Initial Report	12-30-2019	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Feature of Equipment under Test	7
2.2. Product Specification Subjective to this Report	7
2.3. Working Frequencies to this report	7
2.4. Test Mode	8
2.5. Test Software	8
2.6. Device Capabilities	8
2.7. Test Configuration	8
2.8. EMI Suppression Device(s)/Modifications	8
2.9. Labeling Requirements	9
3. DESCRIPTION of TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY	15
7. TEST RESULT	16
7.1. Summary	16
7.2. Output Power Measurement	17
7.2.1. Test Limit	17
7.2.2. Test Procedure Used	17
7.2.3. Test Setting	17
7.2.4. Test Setup	18
7.2.5. Test Result of Output Power	19
7.3. Radiated Spurious Emission Measurement	20
7.3.1. Test Limit	20
7.3.2. Test Procedure Used	20
7.3.3. Test Setting	20
7.3.4. Test Setup	22

7.3.5.	Test Result.....	23
7.4.	Radiated Restricted Band Edge Measurement.....	37
7.4.1.	Test Limit	37
7.4.2.	Test Procedure Used	40
7.4.3.	Test Setting.....	40
7.4.4.	Test Setup	41
7.4.5.	Test Result.....	42
8.	CONCLUSION	74
	Appendix A - Test Setup Photograph	75
	Appendix B - EUT Photograph.....	76

§2.1033 General Information

Applicant:	Beijing Roborock Technology Co., Ltd.
Applicant Address:	Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza, No.8 Heiquan Road, Haidian District, Beijing, P.R. China
Manufacturer:	Beijing Roborock Technology Co., Ltd.
Manufacturer Address:	Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza, No.8 Heiquan Road, Haidian District, Beijing, P.R. China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Designation No. CN1166) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	WIFI Module
Model No.:	F89ETSM13-W2
Wi-Fi Specification	802.11b/g/n
Power Type:	DC 3.3V

Note: Based on the original certification, EUT is changed the host and the Antenna Gain.

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412 ~ 2462 MHz
Channel Number:	802.11b/g/n-HT20: 11
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps
Antenna Type:	Internal PCB antenna
Antenna Gain:	3.87dBi

2.3. Working Frequencies to this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)

2.5. Test Software

The test utility software used during testing was the command provided by the customer.

2.6. Device Capabilities

This device contains the following capabilities:

802.11b/g/n

2.7. Test Configuration

The device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 12

The manufacturer, importer or distributor shall meet the labelling requirements set out in this section for every unit:

(i) prior to marketing in Canada, for products manufactured in Canada

(ii) prior to importation into Canada, for imported products

For information regarding the e-labelling option, see Notice 2014-DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2020/02/24
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2020/02/24
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission Measurement - SR2	
The maximum measurement uncertainty is evaluated as:	
9kHz~150kHz: 3.84dB	
150kHz~30MHz: 3.46dB	
Radiated Emission Measurement - AC1	
The maximum measurement uncertainty is evaluated as:	
Horizontal:	30MHz~300MHz: 4.07dB
	300MHz~1GHz: 3.63dB
	1GHz~18GHz: 4.16dB
Vertical:	30MHz~300MHz: 4.18dB
	300MHz~1GHz: 3.60dB
	1GHz~18GHz: 4.76dB
Radiated Emission Measurement - AC2	
The maximum measurement uncertainty is evaluated as:	
Horizontal:	30MHz~300MHz: 3.75dB
	300MHz~1GHz: 3.53dB
	1GHz~18GHz: 4.28dB
Vertical:	30MHz~300MHz: 3.86dB
	300MHz~1GHz: 3.53dB
	1GHz~18GHz: 4.33dB

7. TEST RESULT

7.1. Summary

FCC Section(s)	IC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(b)(3)	RSS-247 [5.4(4)]	Output Power	$\leq 30\text{dBm}$	Conducted	Pass	Section 7.2
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.3 & 7.4

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

7.2. Output Power Measurement

7.2.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

7.2.2. Test Procedure Used


ANSI C63.10-2013 - Section 11.9.2.3.2

7.2.3. Test Setting

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

7.2.4. Test Setup

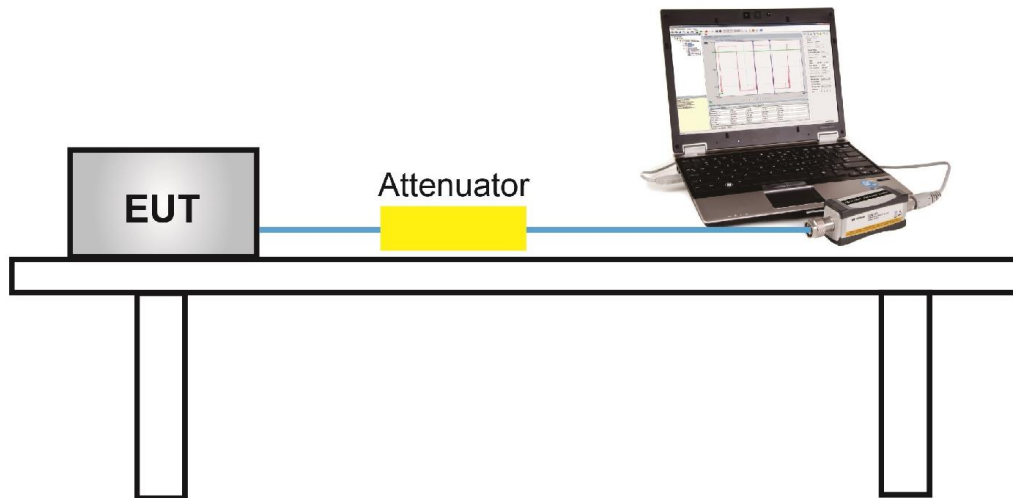

7.2.5. Test Result of Output Power

Product	WIFI Module	Temperature	23°C
Test Engineer	Snake Ni	Relative Humidity	53%
Test Site	TR3	Test Date	2019/12/08

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	EIRP (dBm)	E.I.R.P Limit (dBm)	Result
11b	1Mbps	01	2412	18.02	≤ 30.00	21.89	≤ 36.00	Pass
11b	1Mbps	06	2437	17.95	≤ 30.00	21.82	≤ 36.00	Pass
11b	1Mbps	11	2462	17.83	≤ 30.00	21.70	≤ 36.00	Pass
11g	6Mbps	01	2412	14.33	≤ 30.00	18.20	≤ 36.00	Pass
11g	6Mbps	06	2437	13.89	≤ 30.00	17.76	≤ 36.00	Pass
11g	6Mbps	11	2462	14.10	≤ 30.00	17.97	≤ 36.00	Pass
11n-HT20	MCS0	01	2412	13.94	≤ 30.00	17.81	≤ 36.00	Pass
11n-HT20	MCS0	06	2437	13.76	≤ 30.00	17.63	≤ 36.00	Pass
11n-HT20	MCS0	11	2462	14.33	≤ 30.00	18.20	≤ 36.00	Pass
11n-HT20	MCS0	01	2412	12.87	≤ 30.00	16.74	≤ 36.00	Pass
11n-HT20	MCS0	06	2437	12.89	≤ 30.00	16.76	≤ 36.00	Pass
11n-HT20	MCS0	11	2462	12.77	≤ 30.00	16.64	≤ 36.00	Pass

Note 1: EIRP Average Power (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = 3.87dBi.

7.3. Radiated Spurious Emission Measurement

7.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.3.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.3.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.3.4. Test Setup

30MHz ~ 1GHz Test Setup:

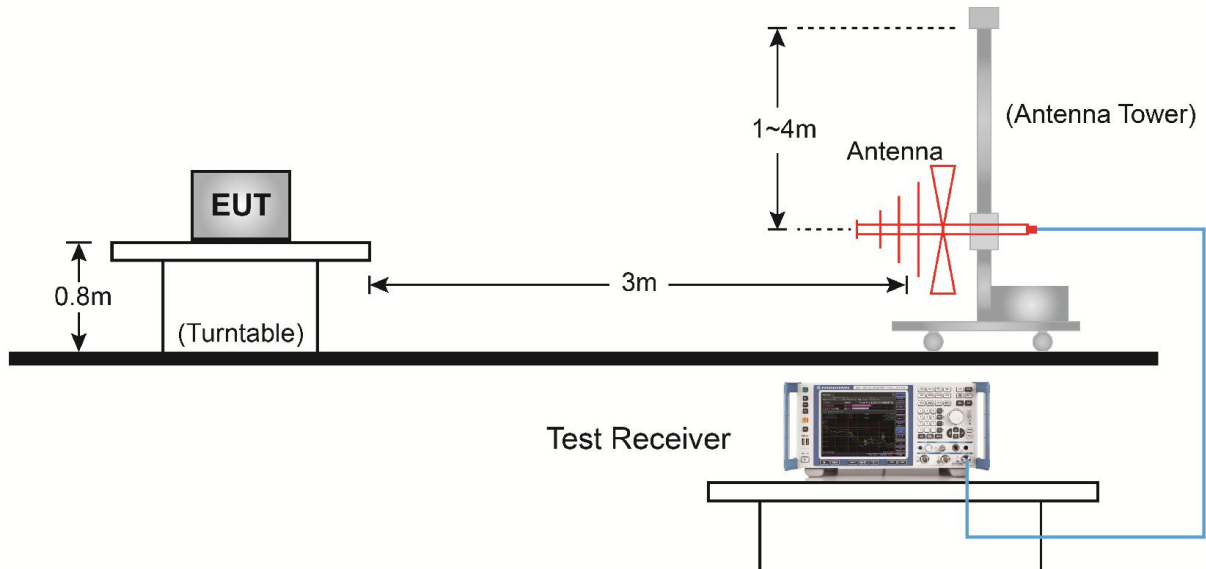

1GHz ~ 18GHz Test Setup:

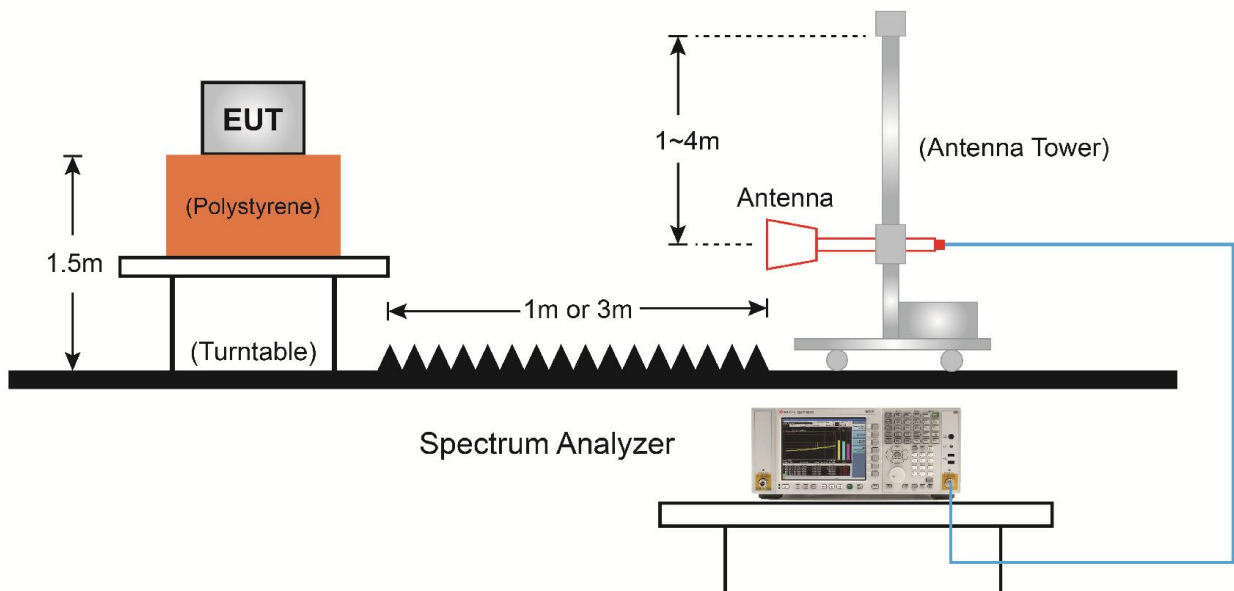

7.3.5. Test Result

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11b	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	40.5	4.0	44.5	74.0	-29.5	Peak	Horizontal
*	6465.5	34.0	8.4	42.4	75.6	-33.2	Peak	Horizontal
	7587.5	33.4	12.1	45.5	74.0	-28.5	Peak	Horizontal
*	10316.0	32.8	16.6	49.4	75.6	-26.2	Peak	Horizontal
	4825.0	40.4	4.0	44.4	74.0	-29.6	Peak	Vertical
*	5199.0	35.6	4.3	39.9	75.6	-35.7	Peak	Vertical
	5403.0	33.7	4.7	38.4	74.0	-35.6	Peak	Vertical
*	6202.0	35.3	7.1	42.4	75.6	-33.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11b	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	42.0	3.7	45.7	74.0	-28.3	Peak	Horizontal
*	5743.0	46.5	5.6	52.1	76.1	-24.0	Peak	Horizontal
	7570.5	33.5	12.1	45.6	74.0	-28.4	Peak	Horizontal
*	9695.5	33.9	14.6	48.5	76.1	-27.6	Peak	Horizontal
	3992.0	42.3	0.9	43.1	74.0	-30.9	Peak	Vertical
*	4485.0	34.6	2.9	37.5	76.1	-38.6	Peak	Vertical
	4876.0	40.9	3.7	44.6	74.0	-29.4	Peak	Vertical
*	5998.0	35.0	6.4	41.4	76.1	-34.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11b	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	42.4	4.3	46.7	74.0	-27.3	Peak	Horizontal
*	6193.5	36.3	7.0	43.3	76.7	-33.4	Peak	Horizontal
	7638.5	33.7	11.8	45.5	74.0	-28.5	Peak	Horizontal
*	10256.5	32.9	16.2	49.1	76.7	-27.6	Peak	Horizontal
	4927.0	42.1	4.3	46.4	74.0	-27.6	Peak	Vertical
*	5989.5	37.5	6.4	43.9	76.7	-32.8	Peak	Vertical
	7400.5	31.8	12.0	43.8	74.0	-30.2	Peak	Vertical
*	9619.0	33.5	14.5	48.0	76.7	-28.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11g	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5063.0	36.2	4.7	40.9	74.0	-33.1	Peak	Horizontal
*	6576.0	34.1	9.2	43.3	74.4	-31.1	Peak	Horizontal
	7460.0	33.9	12.1	46.0	74.0	-28.0	Peak	Horizontal
*	9704.0	34.1	14.8	48.9	74.4	-25.5	Peak	Horizontal
	4825.0	37.7	4.0	41.7	74.0	-32.3	Peak	Vertical
*	6091.5	34.9	6.9	41.8	74.4	-32.6	Peak	Vertical
	7664.0	33.8	11.8	45.6	74.0	-28.4	Peak	Vertical
*	9695.5	33.8	14.6	48.4	74.4	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (104.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11g	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4842.0	35.7	4.0	39.7	74.0	-34.3	Peak	Horizontal
*	6210.5	34.7	7.2	41.9	75.0	-33.1	Peak	Horizontal
	7630.0	33.0	11.9	44.9	74.0	-29.1	Peak	Horizontal
*	9806.0	33.6	14.9	48.5	75.0	-26.5	Peak	Horizontal
	5003.5	37.4	4.1	41.5	74.0	-32.5	Peak	Vertical
*	6601.5	33.8	9.2	43.0	75.0	-32.0	Peak	Vertical
	7570.5	33.7	12.1	45.8	74.0	-28.2	Peak	Vertical
*	9857.0	32.2	15.1	47.3	75.0	-27.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11g	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	5063.0	36.1	4.7	40.8	74.0	-33.2	Peak	Horizontal
*	6389.0	34.7	7.7	42.4	75.5	-33.1	Peak	Horizontal
	7451.5	33.6	12.2	45.8	74.0	-28.2	Peak	Horizontal
*	9704.0	33.5	14.8	48.3	75.5	-27.2	Peak	Horizontal
	4391.5	38.0	2.6	40.6	74.0	-33.4	Peak	Vertical
*	6584.5	34.1	9.2	43.3	75.5	-32.2	Peak	Vertical
	7672.5	34.0	12.0	46.0	74.0	-28.0	Peak	Vertical
*	9619.0	33.6	14.5	48.1	75.5	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11n-HT20	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4034.5	37.2	1.4	38.6	74.0	-35.4	Peak	Horizontal
*	6185.0	34.9	6.9	41.8	74.0	-32.2	Peak	Horizontal
	7638.5	34.0	11.8	45.8	74.0	-28.2	Peak	Horizontal
*	9619.0	34.2	14.5	48.7	74.0	-25.3	Peak	Horizontal
	4825.0	36.7	4.0	40.7	74.0	-33.3	Peak	Vertical
*	6839.5	34.3	9.8	44.1	74.0	-29.9	Peak	Vertical
	7528.0	33.7	11.8	45.5	74.0	-28.5	Peak	Vertical
*	10222.5	33.2	15.8	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11n-HT20	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	36.9	3.7	40.6	74.0	-33.4	Peak	Horizontal
*	6601.5	34.0	9.2	43.2	74.0	-30.8	Peak	Horizontal
	7519.5	33.6	11.9	45.5	74.0	-28.5	Peak	Horizontal
*	9738.0	33.5	14.7	48.2	74.0	-25.8	Peak	Horizontal
	4867.5	36.6	3.7	40.3	74.0	-33.7	Peak	Vertical
*	6814.0	34.2	9.7	43.9	74.0	-30.1	Peak	Vertical
	7426.0	34.4	12.1	46.5	74.0	-27.5	Peak	Vertical
*	10384.0	33.0	16.4	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11n-HT20	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	38.7	4.3	43.0	74.0	-31.0	Peak	Horizontal
*	6635.5	34.7	8.9	43.6	74.0	-30.4	Peak	Horizontal
	7553.5	33.6	12.1	45.7	74.0	-28.3	Peak	Horizontal
*	10401.0	32.4	16.5	48.9	74.0	-25.1	Peak	Horizontal
	4927.0	37.2	4.3	41.5	74.0	-32.5	Peak	Vertical
*	6542.0	34.2	8.8	43.0	74.0	-31.0	Peak	Vertical
	7358.0	33.6	12.2	45.8	74.0	-28.2	Peak	Vertical
*	9704.0	33.3	14.8	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (103.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11n-HT40	Test Channel	03
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4842.0	36.0	4.0	40.0	74.0	-34.0	Peak	Horizontal
*	6729.0	34.7	9.5	44.2	74.0	-29.8	Peak	Horizontal
	7460.0	33.0	12.1	45.1	74.0	-28.9	Peak	Horizontal
*	10316.0	32.5	16.6	49.1	74.0	-24.9	Peak	Horizontal
	4578.5	37.7	3.5	41.2	74.0	-32.8	Peak	Vertical
*	6516.5	35.1	8.6	43.7	74.0	-30.3	Peak	Vertical
	7604.5	34.5	12.0	46.5	74.0	-27.5	Peak	Vertical
*	10256.5	33.3	16.2	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (100.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11n-HT40	Test Channel	06
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	37.5	3.7	41.2	74.0	-32.8	Peak	Horizontal
*	7060.5	33.6	11.4	45.0	74.0	-29.0	Peak	Horizontal
	7579.0	33.9	12.1	46.0	74.0	-28.0	Peak	Horizontal
*	10452.0	33.0	16.3	49.3	74.0	-24.7	Peak	Horizontal
	4876.0	36.0	3.7	39.7	74.0	-34.3	Peak	Vertical
*	6431.5	33.9	8.1	42.0	74.0	-32.0	Peak	Vertical
	7494.0	33.0	12.1	45.1	74.0	-28.9	Peak	Vertical
*	9610.5	33.4	14.3	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (100.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	WIFI Module	Temperature	25°C
Test Engineer	Kyrie Xie	Relative Humidity	56%
Test Site	AC2	Test Date	2019/12/10
Test Mode	802.11n-HT40	Test Channel	09
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4901.5	37.4	4.1	41.5	74.0	-32.5	Peak	Horizontal
*	6627.0	34.5	9.1	43.6	74.0	-30.4	Peak	Horizontal
	7417.5	33.5	12.1	45.6	74.0	-28.4	Peak	Horizontal
*	9755.0	33.1	15.0	48.1	74.0	-25.9	Peak	Horizontal
	4901.5	37.7	4.1	41.8	74.0	-32.2	Peak	Vertical
*	6584.5	33.8	9.2	43.0	74.0	-31.0	Peak	Vertical
	7451.5	33.1	12.2	45.3	74.0	-28.7	Peak	Vertical
*	9627.5	34.4	14.4	48.8	74.0	-25.2	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (101.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC2	Time: 2019/12/10 - 07:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_VULB9162_0.03-7GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Worst Case Mode: There is the worst case within frequency range 30MHz~1GHz.	

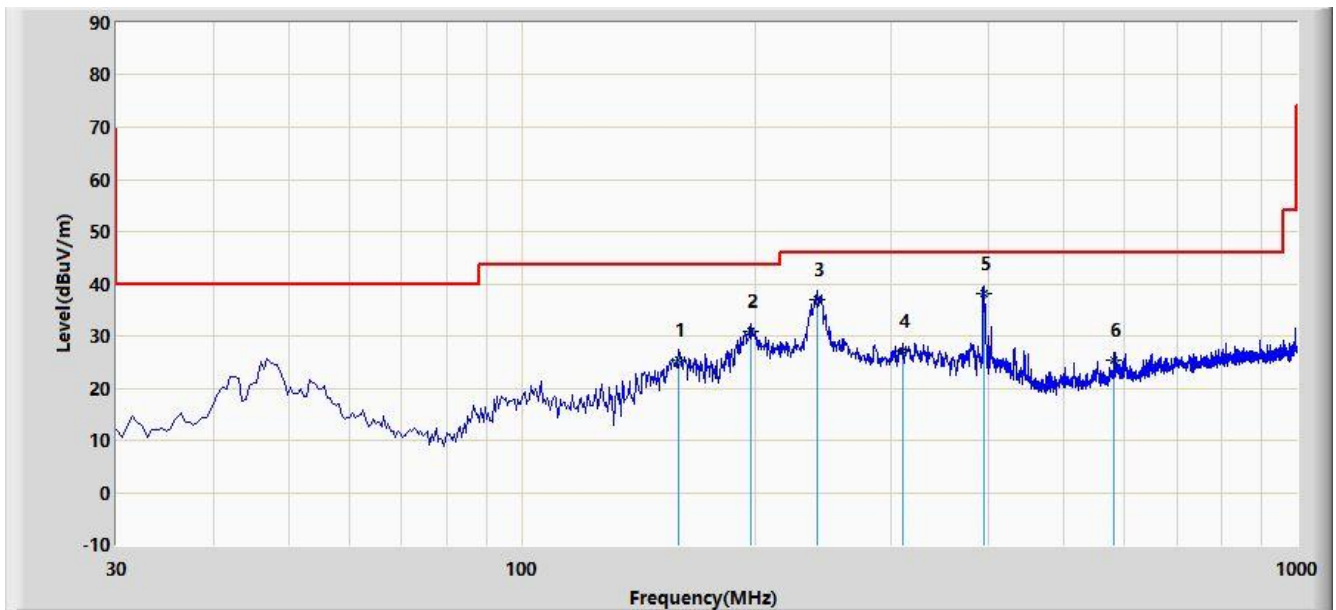


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			159.495	25.466	15.820	-18.034	43.500	9.646	QP
2			197.325	30.960	17.850	-12.540	43.500	13.110	QP
3			240.490	37.060	23.480	-8.940	46.000	13.580	QP
4			310.330	27.192	12.090	-18.808	46.000	15.102	QP
5		*	394.720	38.060	20.710	-7.940	46.000	17.350	QP
6			581.445	25.242	4.280	-20.758	46.000	20.963	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC2	Time: 2019/12/10 - 07:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Yeto Yin
Probe: AC2_VULB9162_0.03-7GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Worst Case Mode: There is the worst case within frequency range 30MHz~1GHz.	

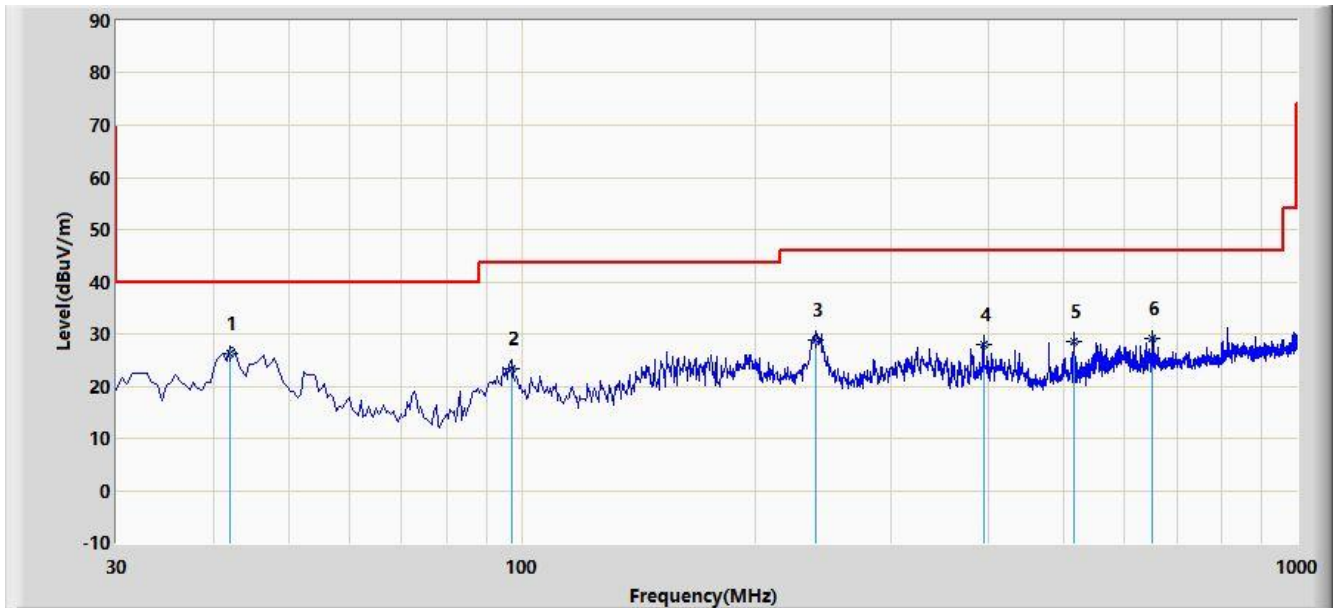

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	42.125	26.133	12.220	-13.867	40.000	13.914	QP
2			96.930	23.451	11.420	-20.049	43.500	12.032	QP
3			240.005	28.750	15.190	-17.250	46.000	13.560	QP
4			395.205	27.963	10.600	-18.037	46.000	17.363	QP
5			515.970	28.439	9.140	-17.561	46.000	19.299	QP
6			651.770	29.033	7.390	-16.967	46.000	21.643	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.4. Radiated Restricted Band Edge Measurement

7.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.525225	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2655 - 2900	
12.57675 - 12.57725	3260 - 3267	
13.36 -13.41	3332 -3339	
16.42 - 16.423	334.5 - 3358	
16.69475 - 16.69525	3500 - 4400	
16.80425 - 16.80475	4500 - 5150	
25.5 - 25.67	5350 - 5460	
37.5 - 38.25	7250 - 7750	
73 - 74.6	8025 - 8500	
74.8 - 75.2	--	
108 - 138		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.4.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.4.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.4.4.Test Setup

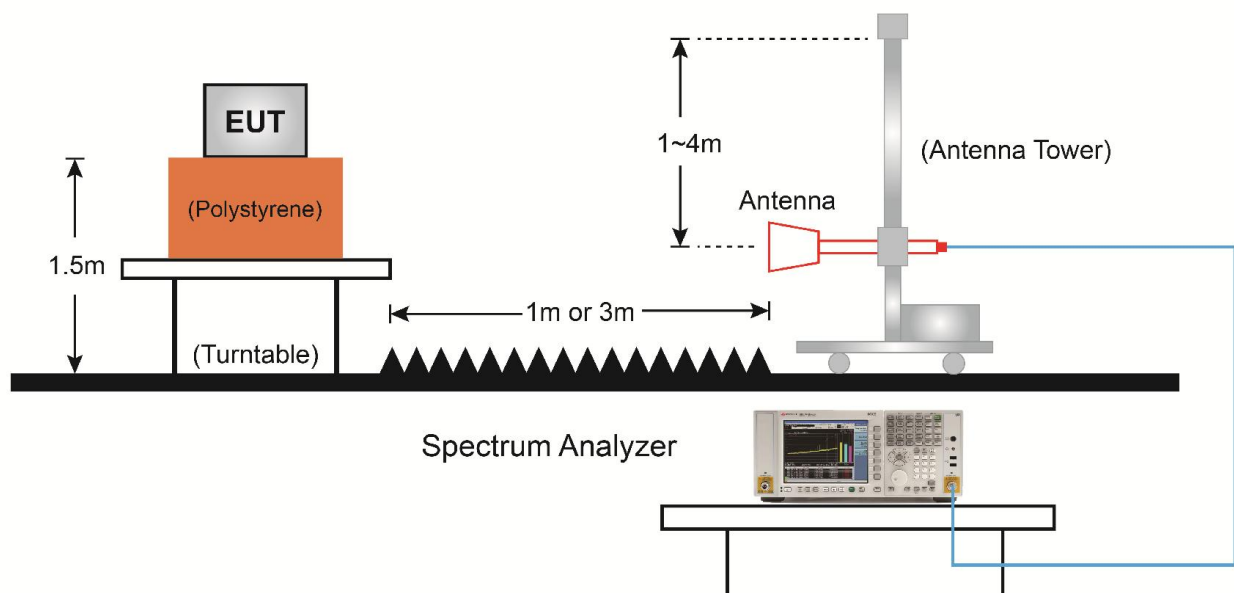

7.4.5.Test Result

Site: AC2	Time: 2019/12/09 - 21:41
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2412MHz	

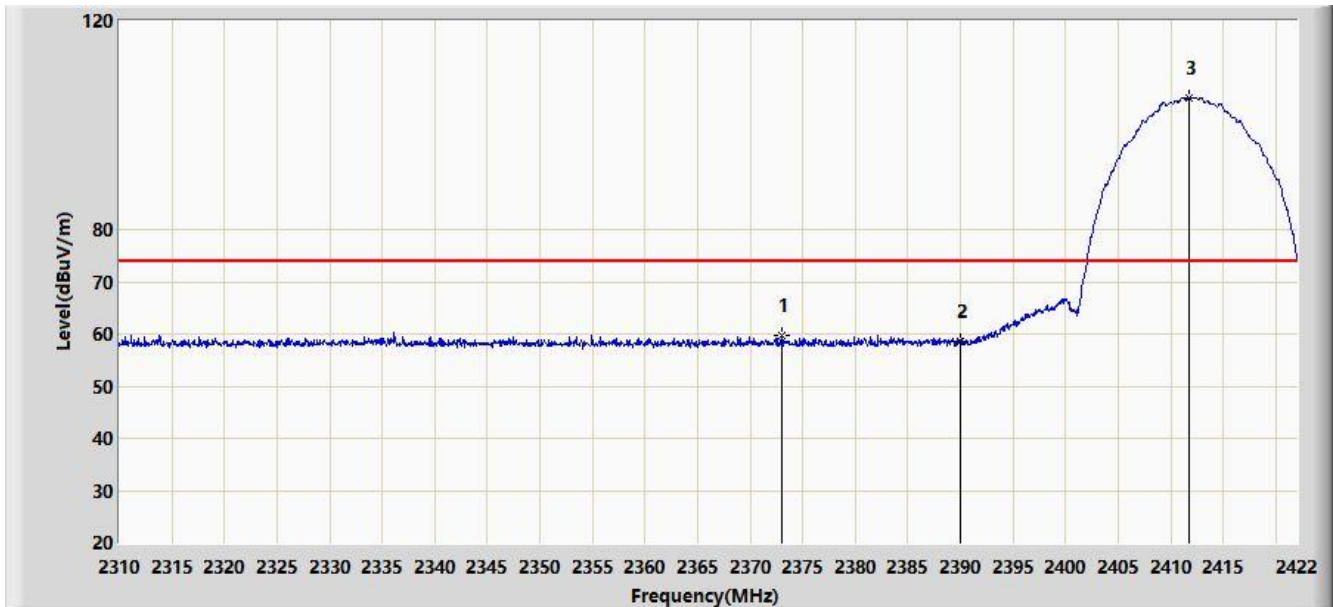


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.000	59.746	27.248	-14.254	74.000	32.498	PK
2			2390.000	58.422	25.937	-15.578	74.000	32.485	PK
3		*	2411.808	105.275	72.741	N/A	N/A	32.534	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 21:52
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2412MHz	

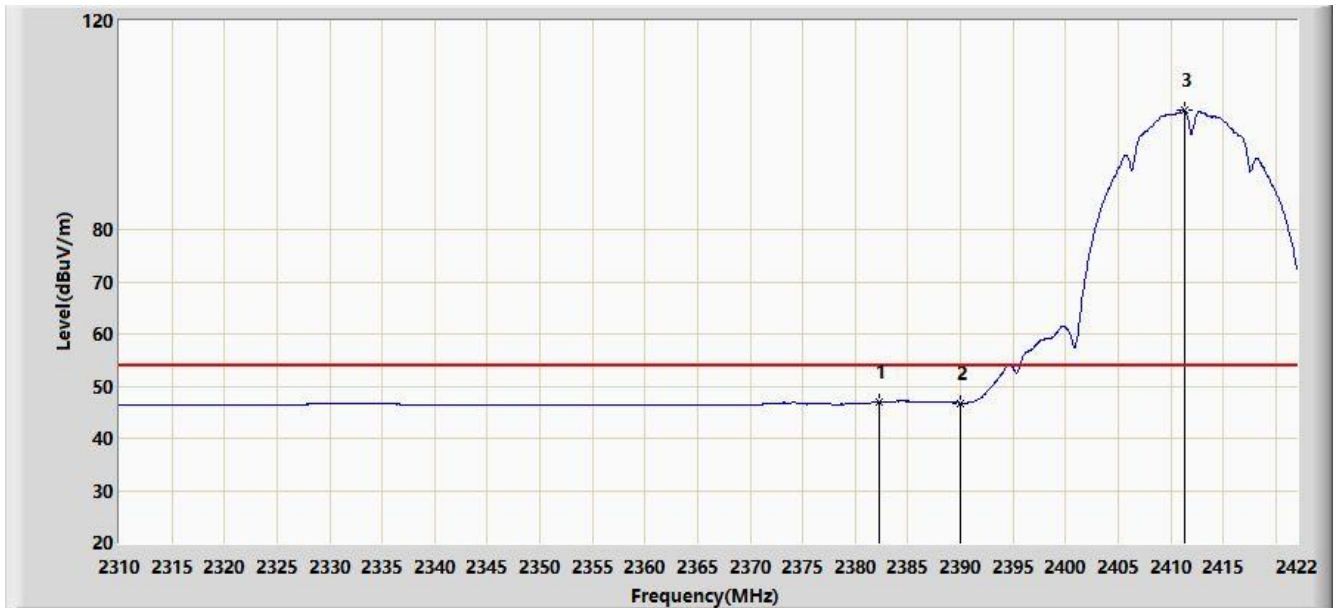


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.240	46.895	14.418	-7.105	54.000	32.477	AV
2			2390.000	46.772	14.287	-7.228	54.000	32.485	AV
3		*	2411.304	102.944	70.406	N/A	N/A	32.538	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:01
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2412MHz	

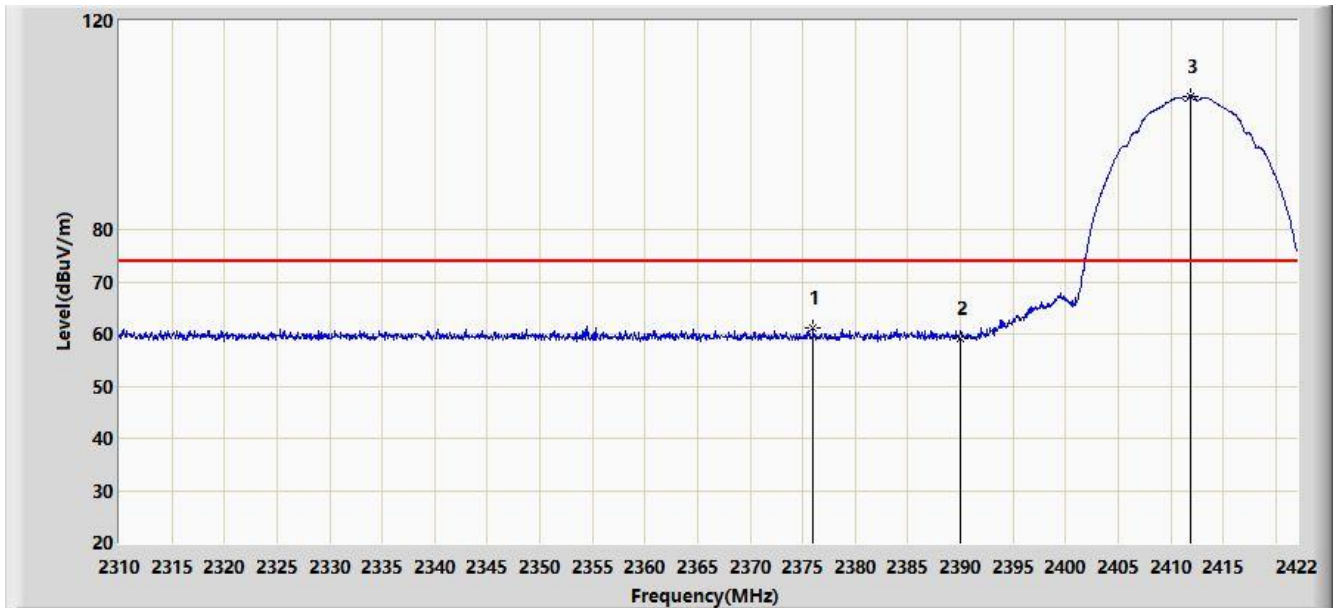


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.024	61.159	28.681	-12.841	74.000	32.478	PK
2			2390.000	59.159	26.674	-14.841	74.000	32.485	PK
3		*	2411.864	105.627	73.093	N/A	N/A	32.534	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:05
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2412MHz	

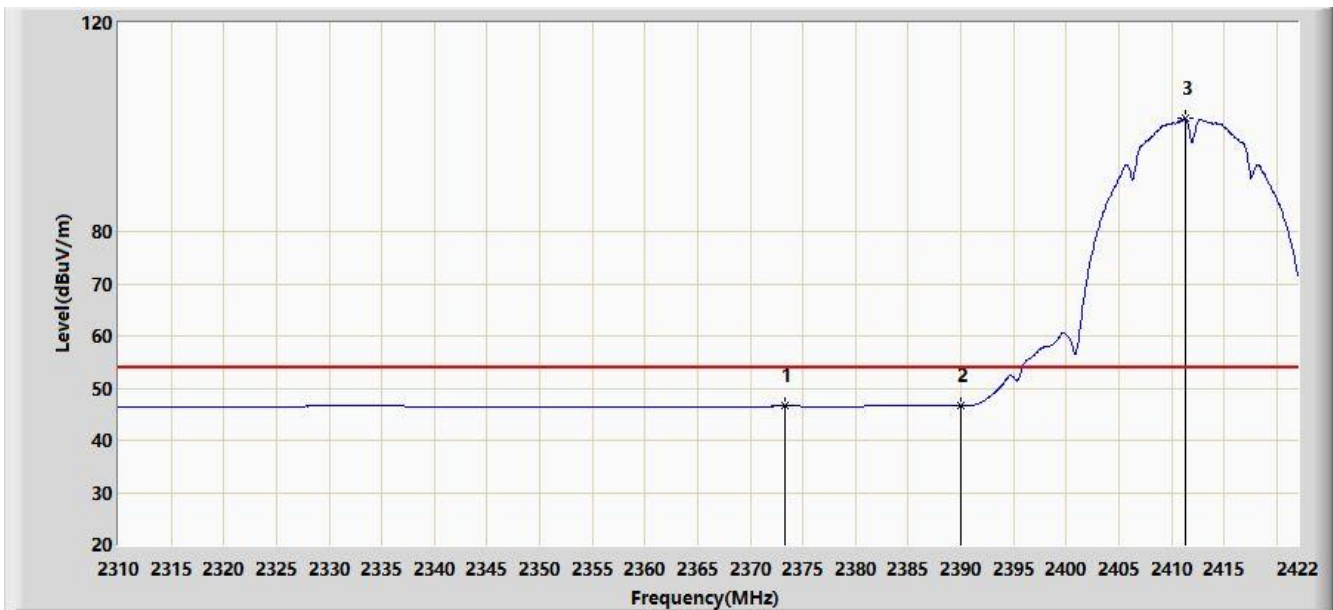


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.336	46.641	14.146	-7.359	54.000	32.495	AV
2			2390.000	46.632	14.147	-7.368	54.000	32.485	AV
3		*	2411.304	101.638	69.100	N/A	N/A	32.538	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:10
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2462MHz	

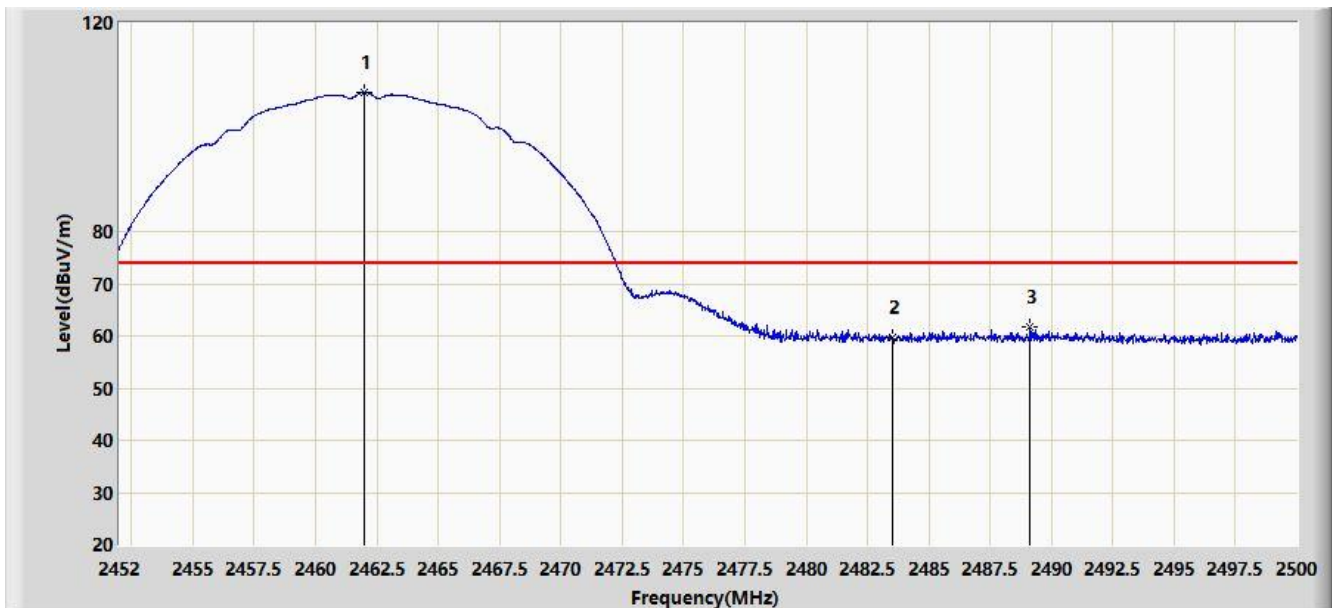


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	106.731	74.413	N/A	N/A	32.318	PK
2			2483.500	59.628	27.253	-14.372	74.000	32.375	PK
3			2489.128	61.849	29.487	-12.151	74.000	32.362	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:12
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2462MHz	

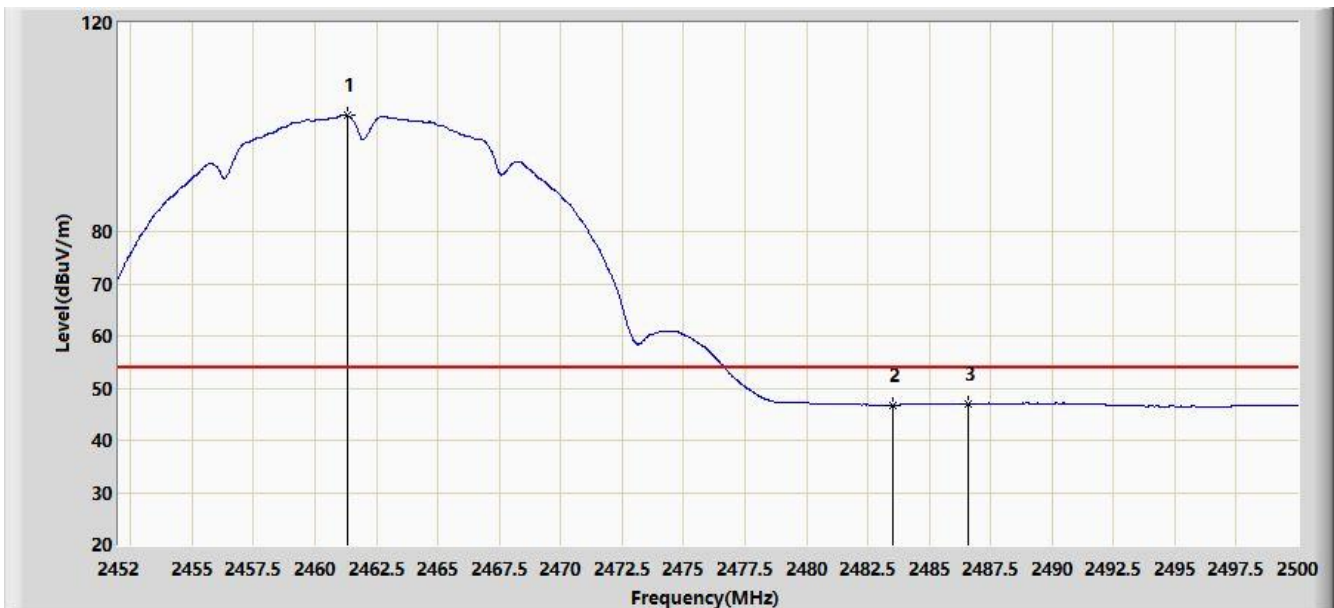


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	102.268	69.950	N/A	N/A	32.318	AV
2			2483.500	46.790	14.415	-7.210	54.000	32.375	AV
3			2486.608	47.045	14.677	-6.955	54.000	32.368	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:13
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2462MHz	

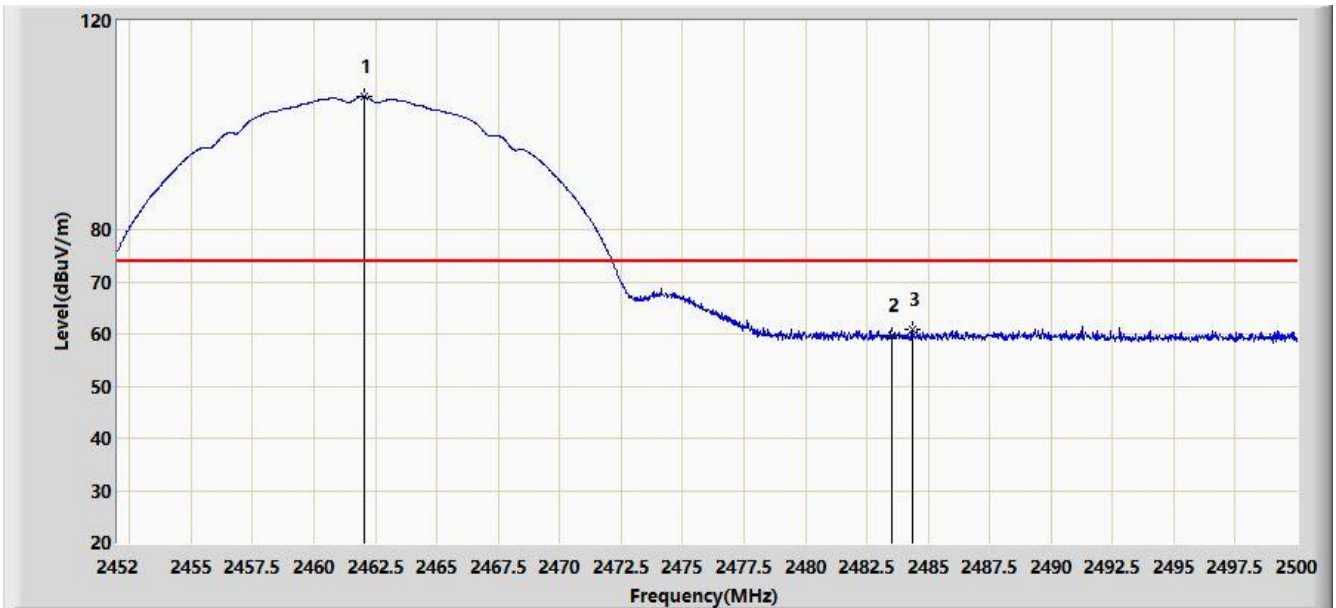


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.032	105.569	73.251	N/A	N/A	32.318	PK
2			2483.500	59.718	27.343	-14.282	74.000	32.375	PK
3			2484.376	60.960	28.587	-13.040	74.000	32.373	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:15
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11b at channel 2462MHz	

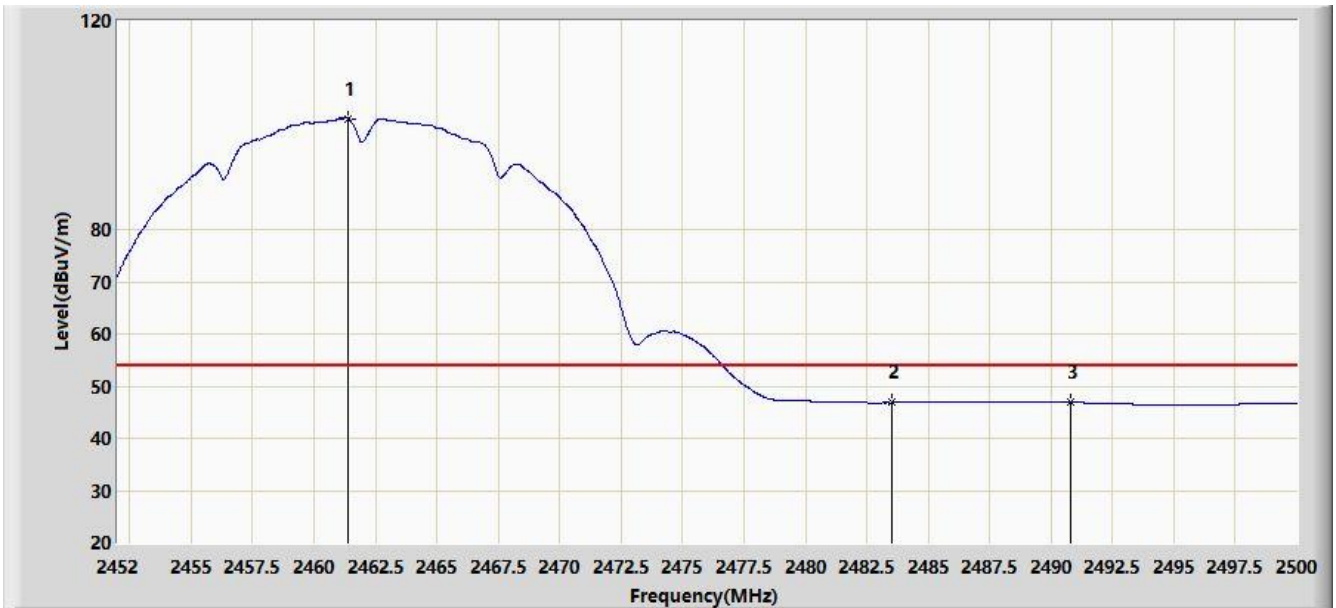


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.384	101.258	68.940	N/A	N/A	32.318	AV
2			2483.500	46.814	14.439	-7.186	54.000	32.375	AV
3			2490.784	46.912	14.554	-7.088	54.000	32.358	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:20
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2412MHz	

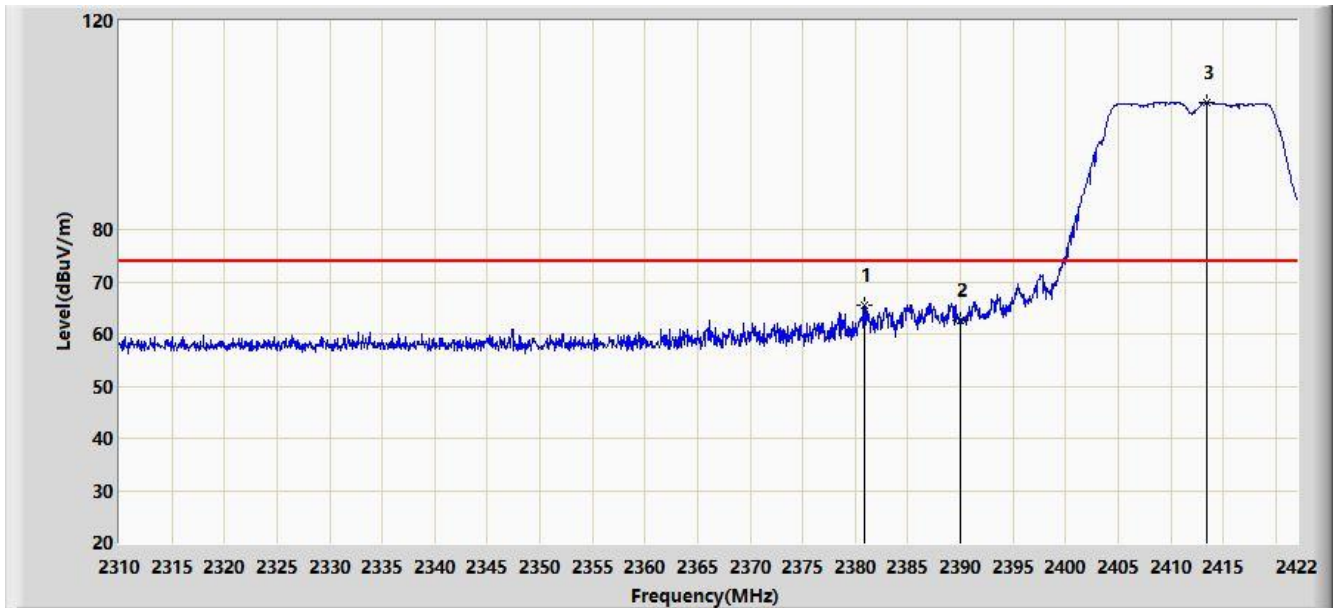


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.840	65.449	32.973	-8.551	74.000	32.476	PK
2			2390.000	62.690	30.205	-11.310	74.000	32.485	PK
3		*	2413.432	104.426	71.906	N/A	N/A	32.520	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:22
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2412MHz	

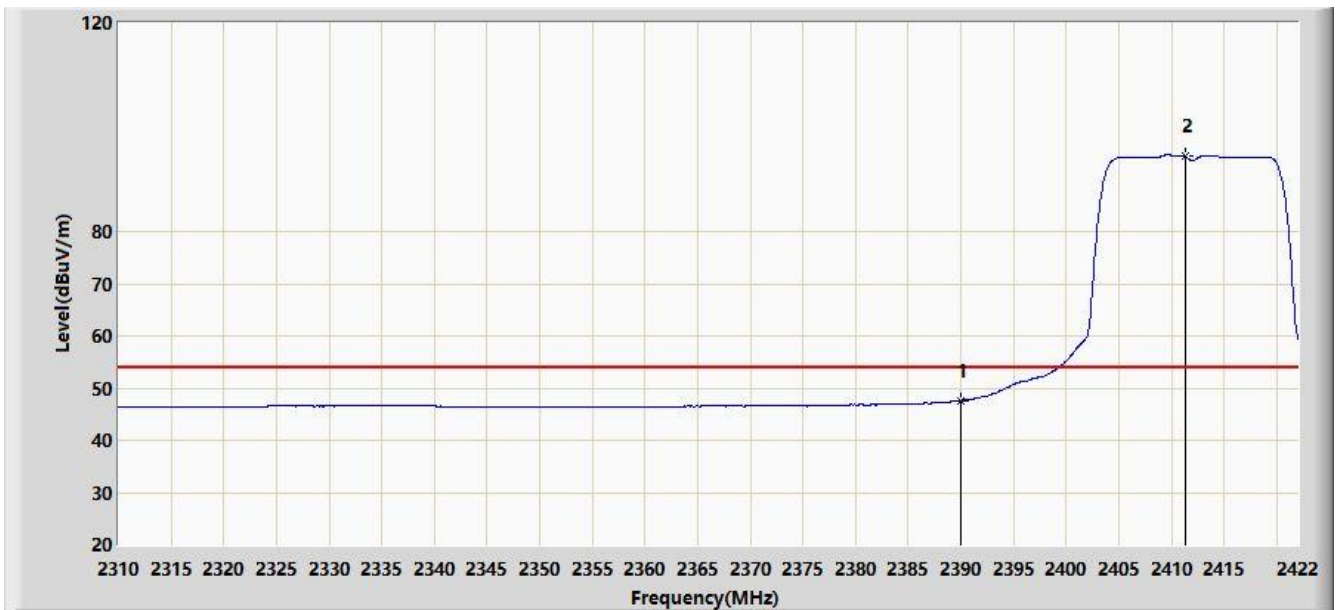


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.622	15.137	-6.378	54.000	32.485	AV
2		*	2411.304	94.405	61.867	N/A	N/A	32.538	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:23
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2412MHz	

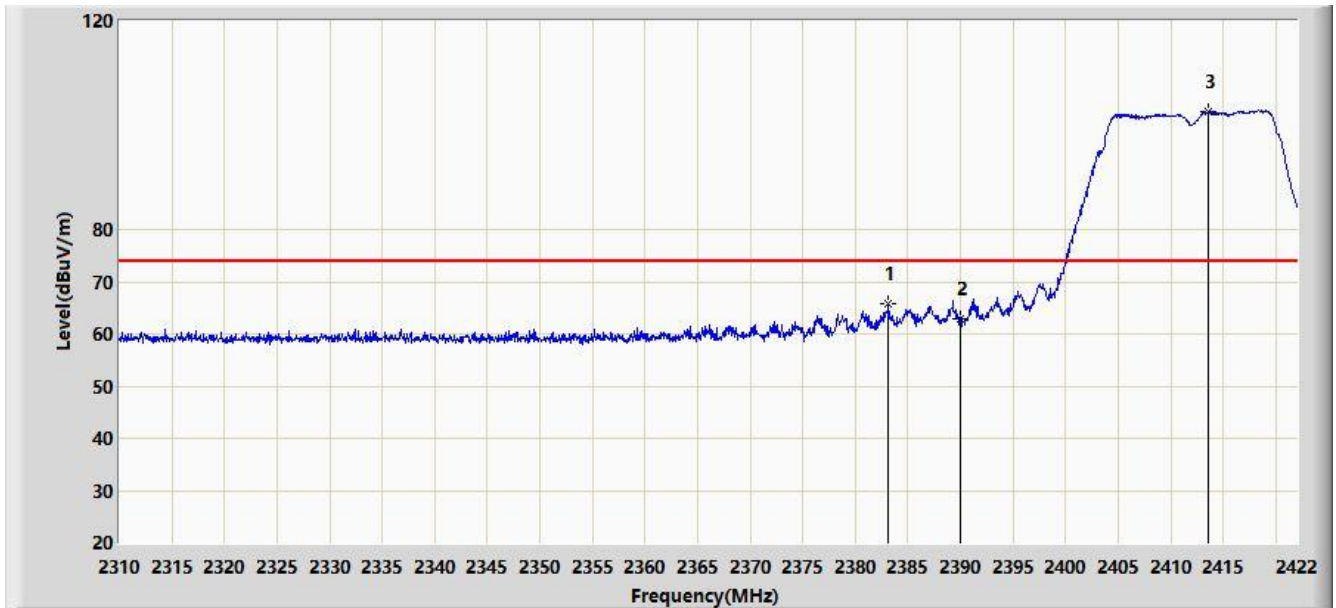


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.192	65.715	33.237	-8.285	74.000	32.479	PK
2			2390.000	62.756	30.271	-11.244	74.000	32.485	PK
3		*	2413.544	102.506	69.987	N/A	N/A	32.519	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:24
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2412MHz	

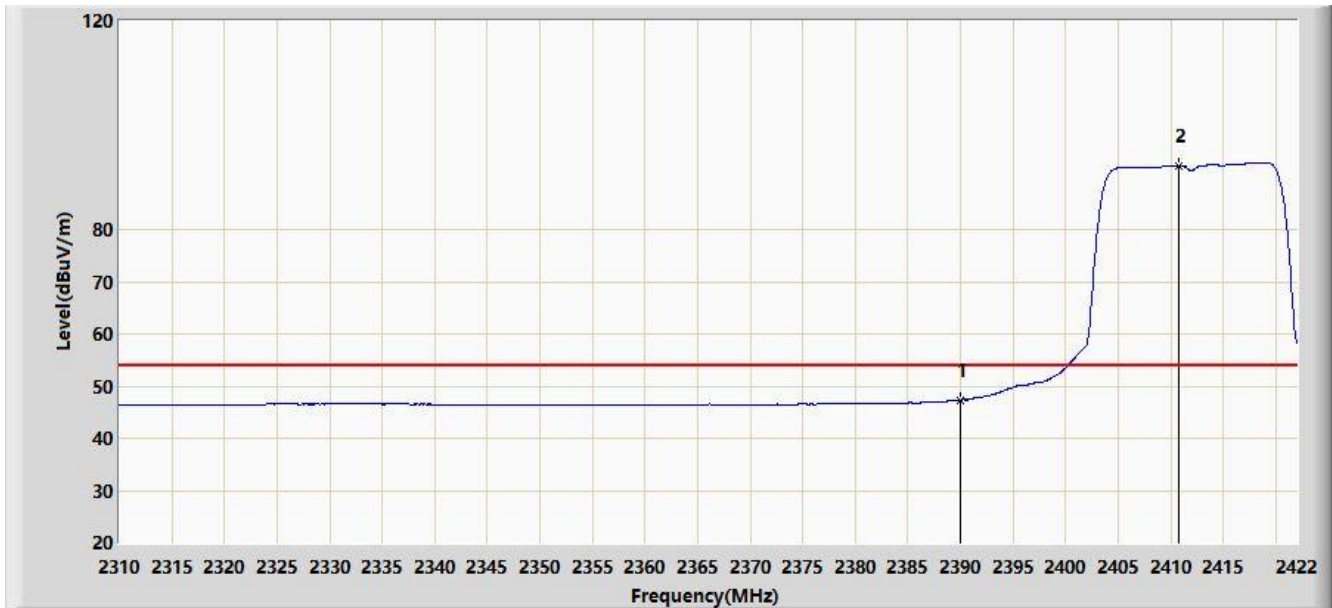


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.358	14.873	-6.642	54.000	32.485	AV
2		*	2410.744	92.210	59.670	N/A	N/A	32.540	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:25
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2462MHz	

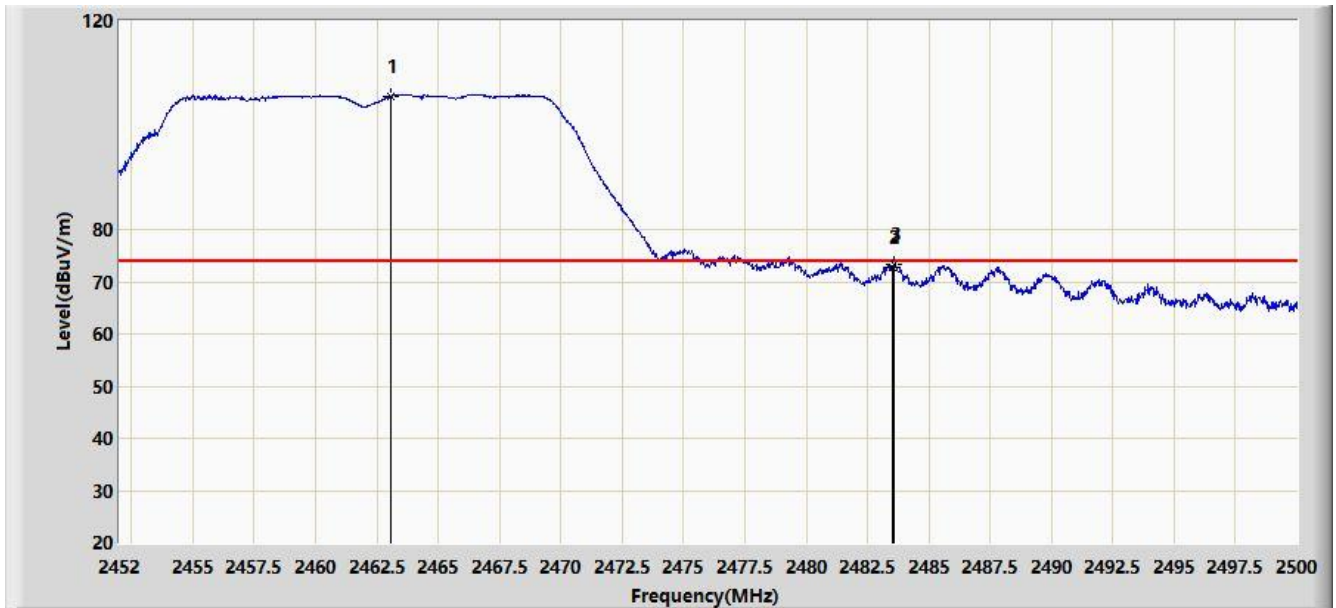


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.040	105.528	73.206	N/A	N/A	32.322	PK
2			2483.500	72.711	40.336	-1.289	74.000	32.375	PK
3			2483.584	73.240	40.866	-0.760	74.000	32.374	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2462MHz	

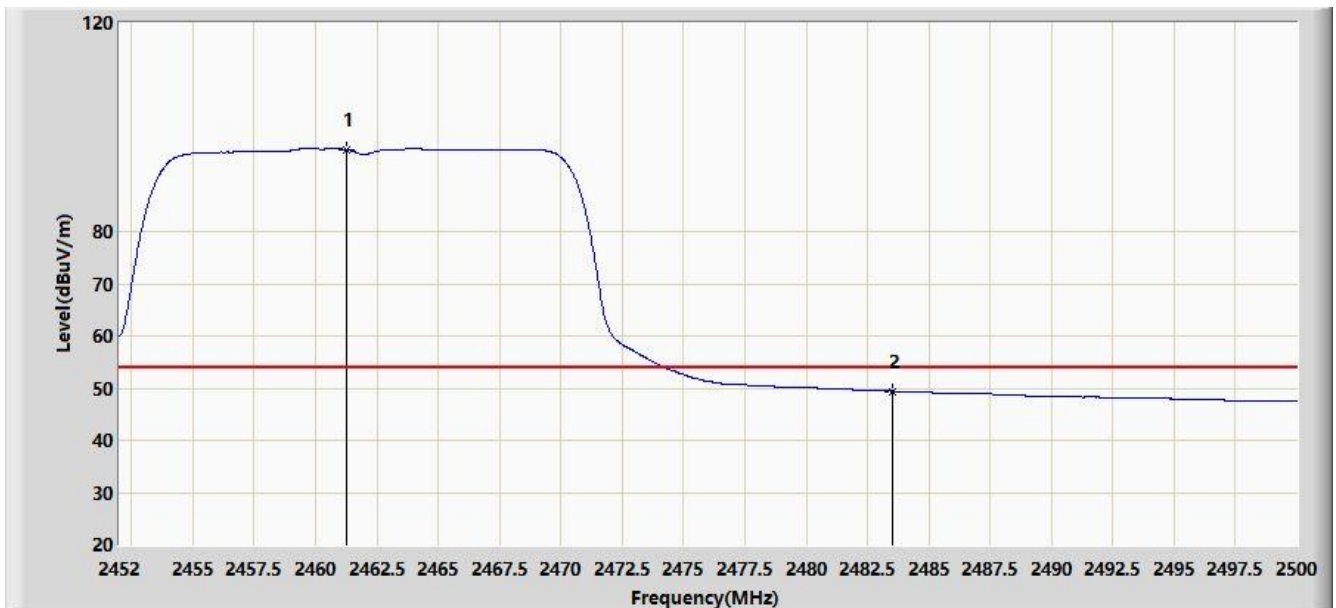


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	95.687	63.369	N/A	N/A	32.318	AV
2			2483.500	49.420	17.045	-4.580	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2462MHz	

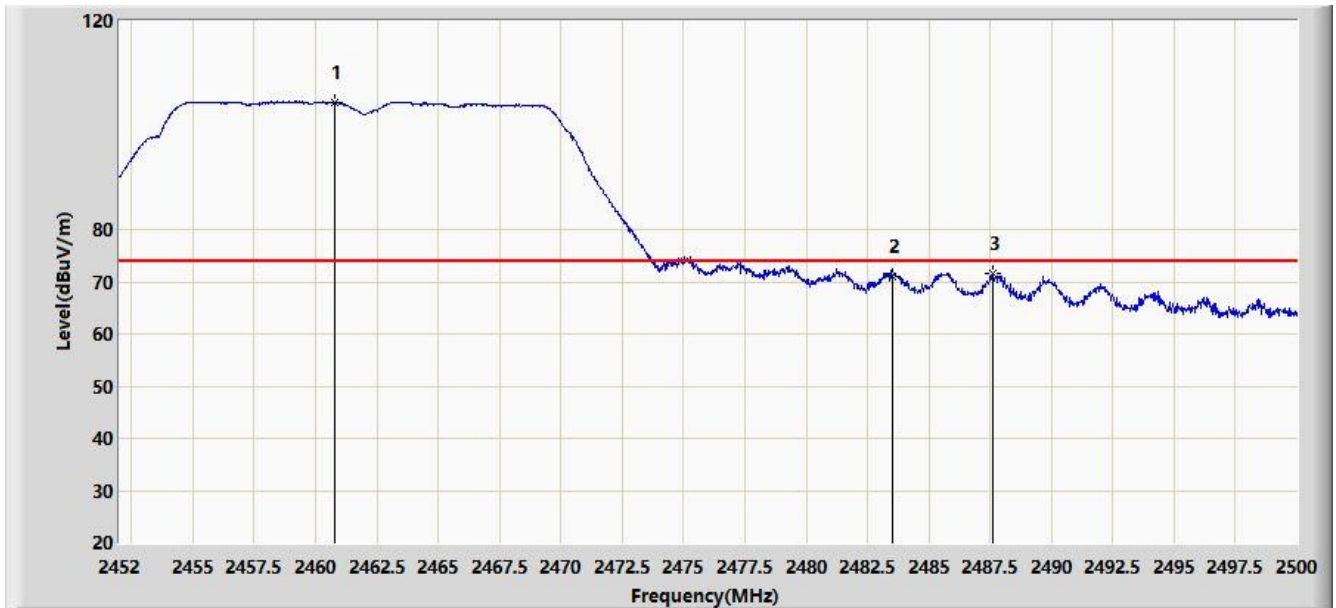


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.784	104.338	72.019	N/A	N/A	32.319	PK
2			2483.500	71.069	38.694	-2.931	74.000	32.375	PK
3			2487.592	71.511	39.146	-2.489	74.000	32.365	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:28
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11g at channel 2462MHz	

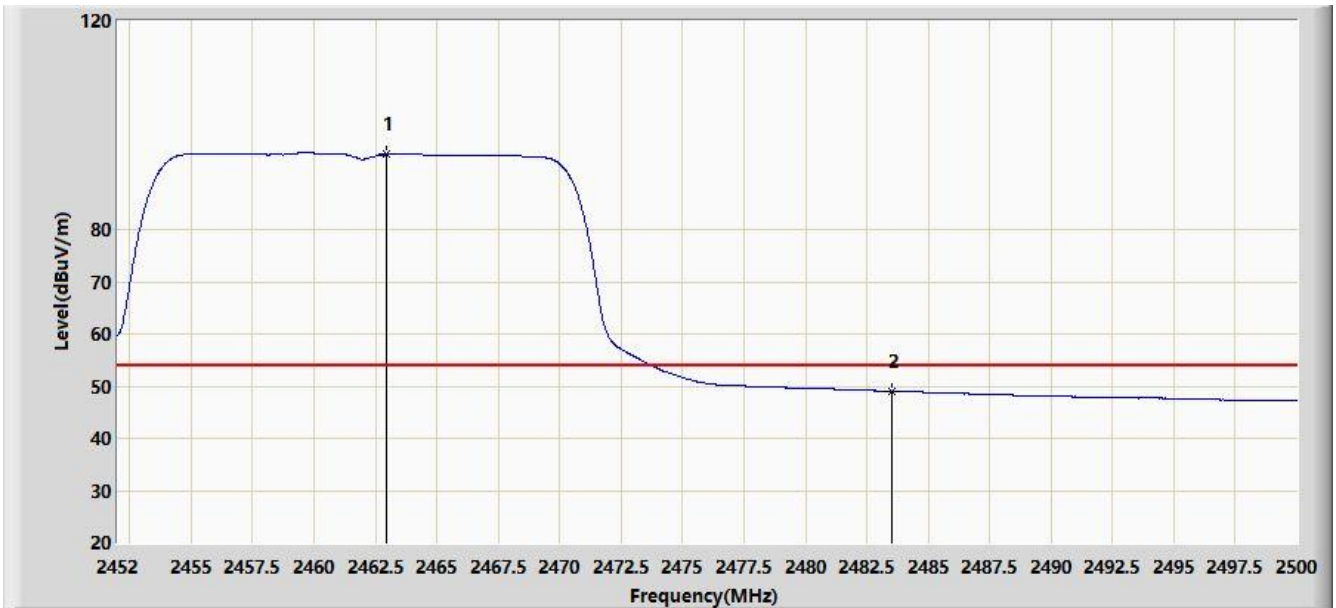


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.920	94.381	62.059	N/A	N/A	32.322	AV
2			2483.500	49.008	16.633	-4.992	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2412MHz	

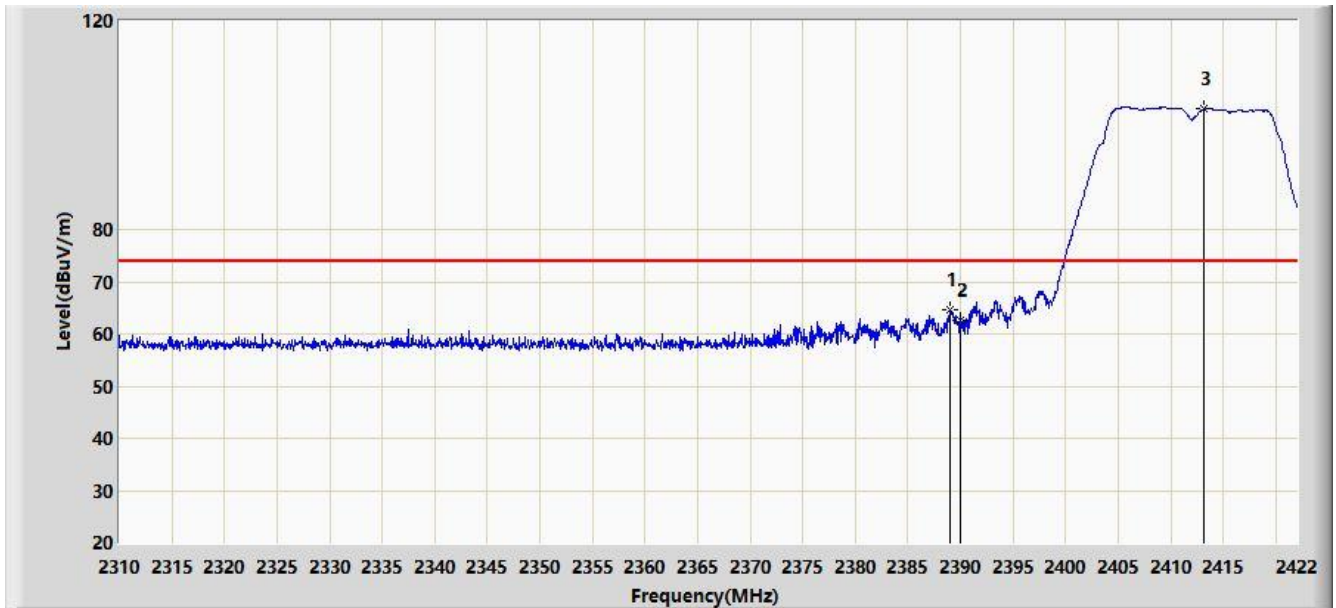


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	64.712	32.228	-9.288	74.000	32.484	PK
2			2390.000	62.577	30.092	-11.423	74.000	32.485	PK
3		*	2413.096	103.106	70.583	N/A	N/A	32.523	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:33
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2412MHz	

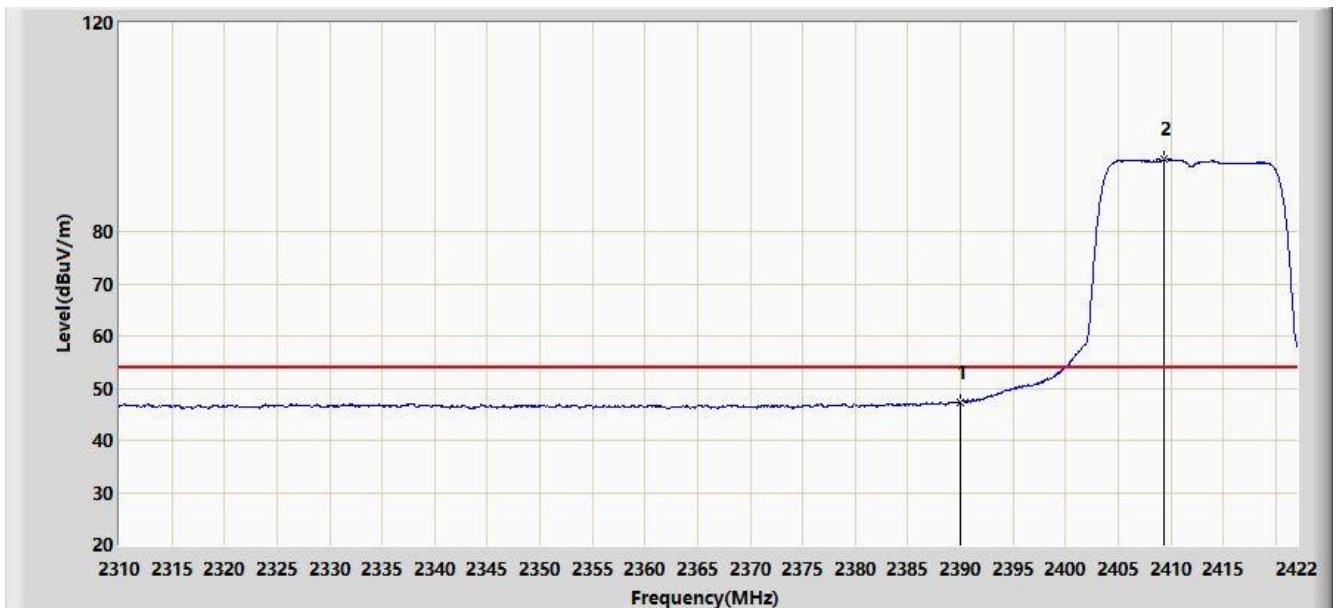


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.306	14.821	-6.694	54.000	32.485	AV
2		*	2409.400	93.771	61.235	N/A	N/A	32.536	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:33
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2412MHz	

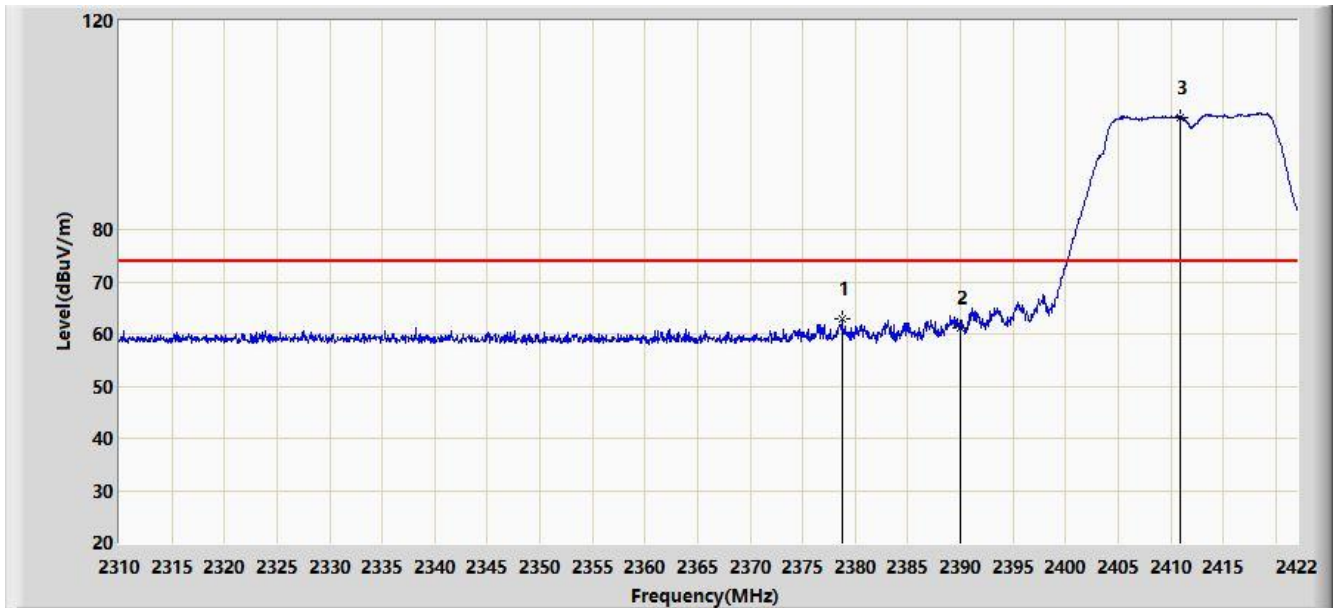


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.768	62.899	30.425	-11.101	74.000	32.473	PK
2			2390.000	61.088	28.603	-12.912	74.000	32.485	PK
3		*	2410.968	101.533	68.992	N/A	N/A	32.541	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:34
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2412MHz	

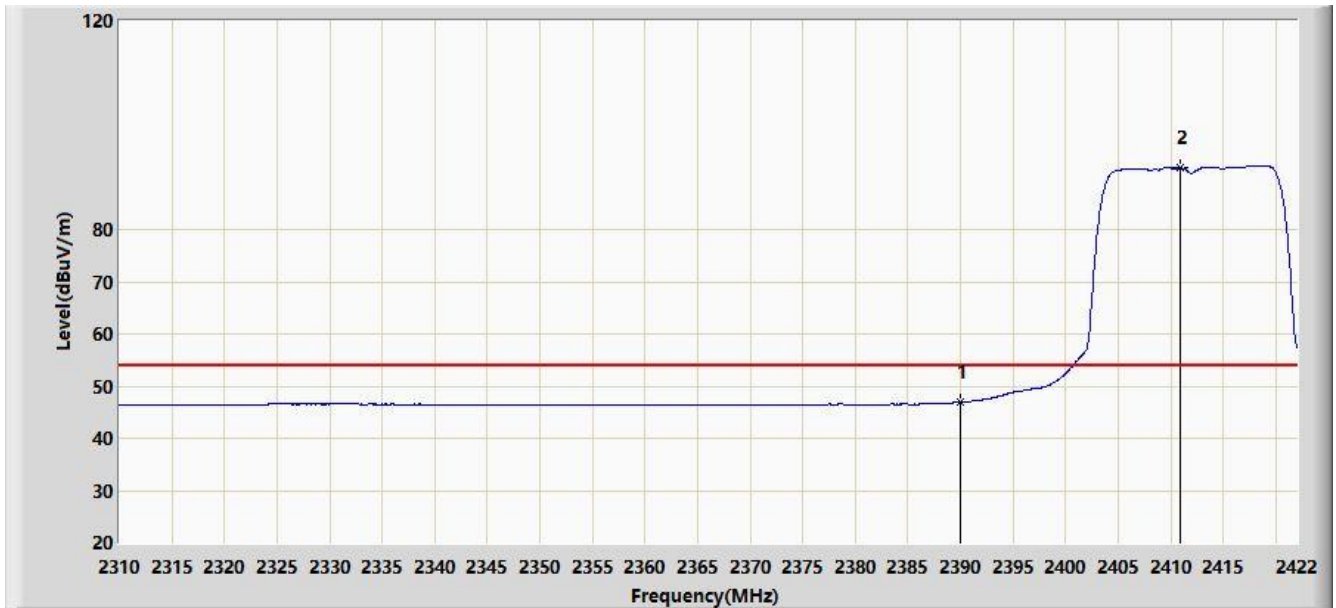


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.922	14.437	-7.078	54.000	32.485	AV
2		*	2410.968	91.763	59.222	N/A	N/A	32.541	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:36
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2462MHz	

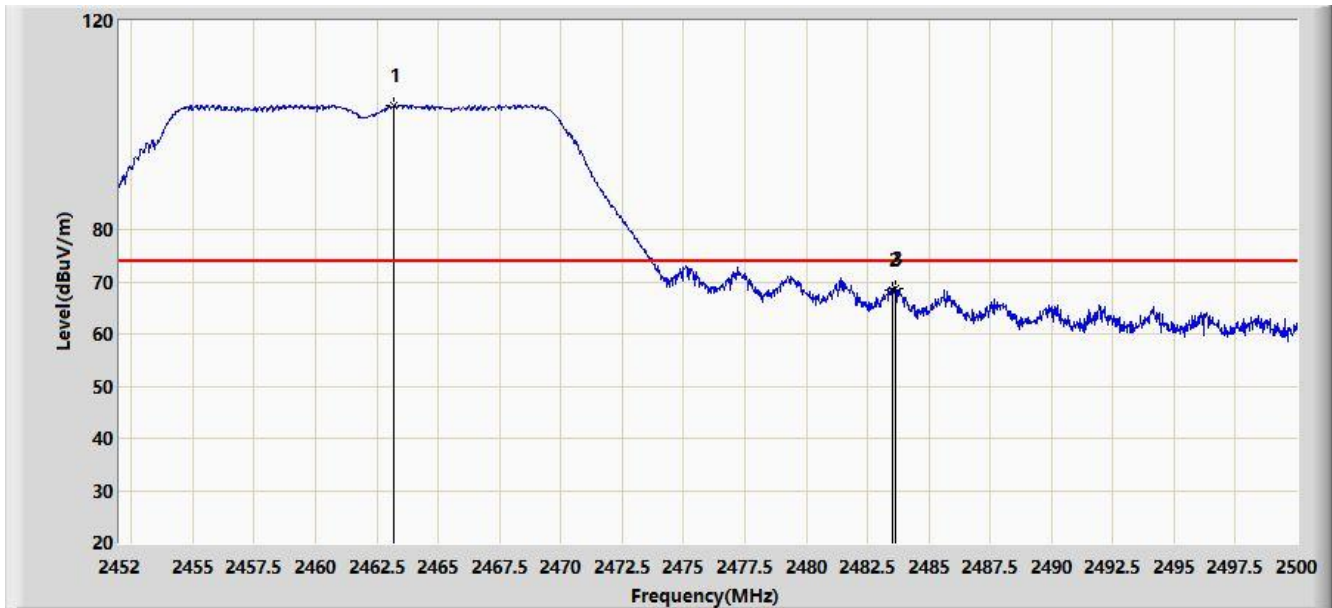


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.208	103.734	71.411	N/A	N/A	32.323	PK
2			2483.500	68.406	36.031	-5.594	74.000	32.375	PK
3			2483.656	68.585	36.211	-5.415	74.000	32.374	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:36
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2462MHz	

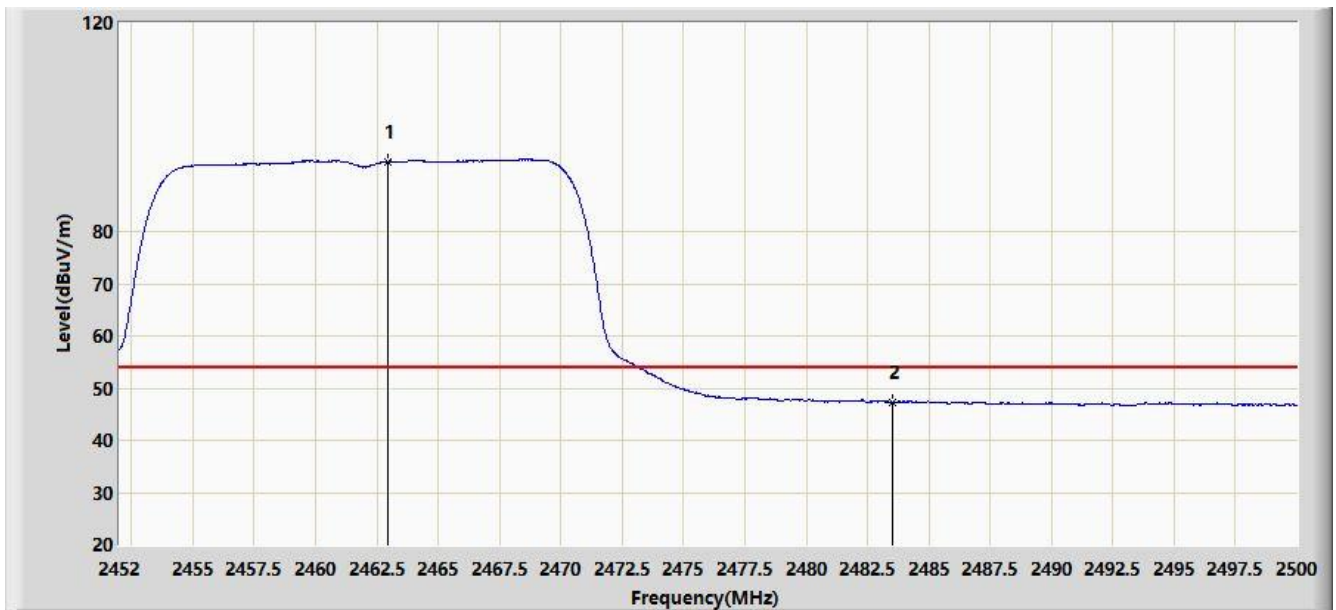


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.920	93.453	61.131	N/A	N/A	32.322	AV
2			2483.500	47.379	15.004	-6.621	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:37
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2462MHz	

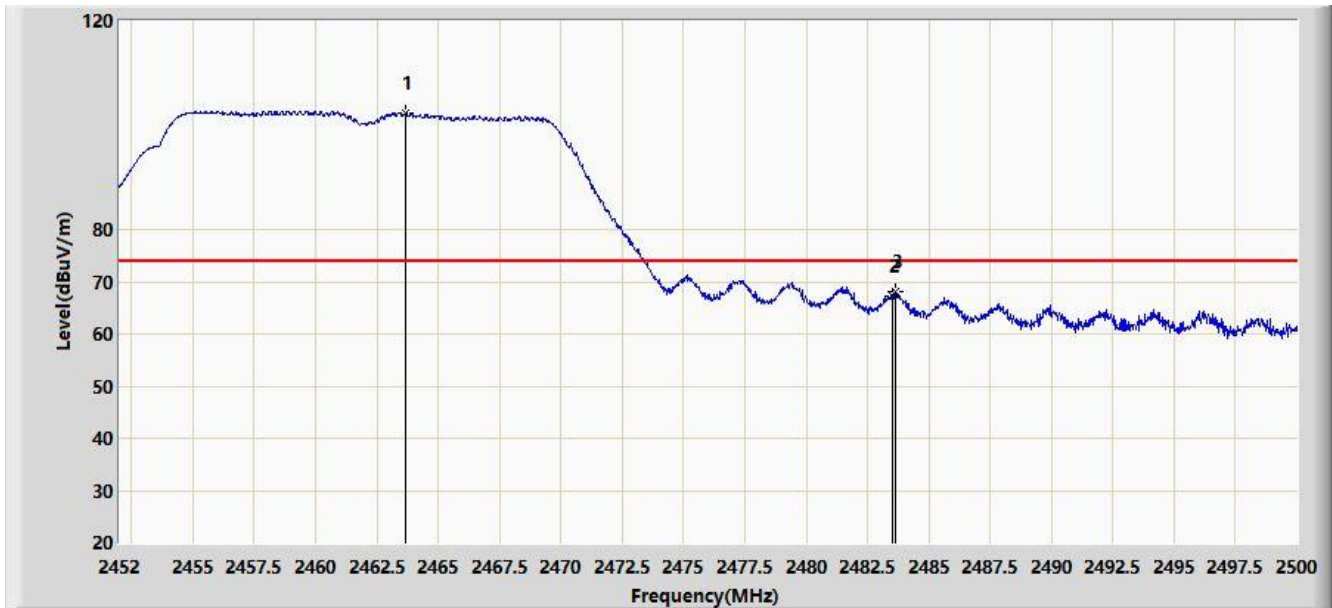


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.688	102.318	69.993	N/A	N/A	32.325	PK
2			2483.500	67.128	34.753	-6.872	74.000	32.375	PK
3			2483.656	68.031	35.657	-5.969	74.000	32.374	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:38
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT20 at channel 2462MHz	

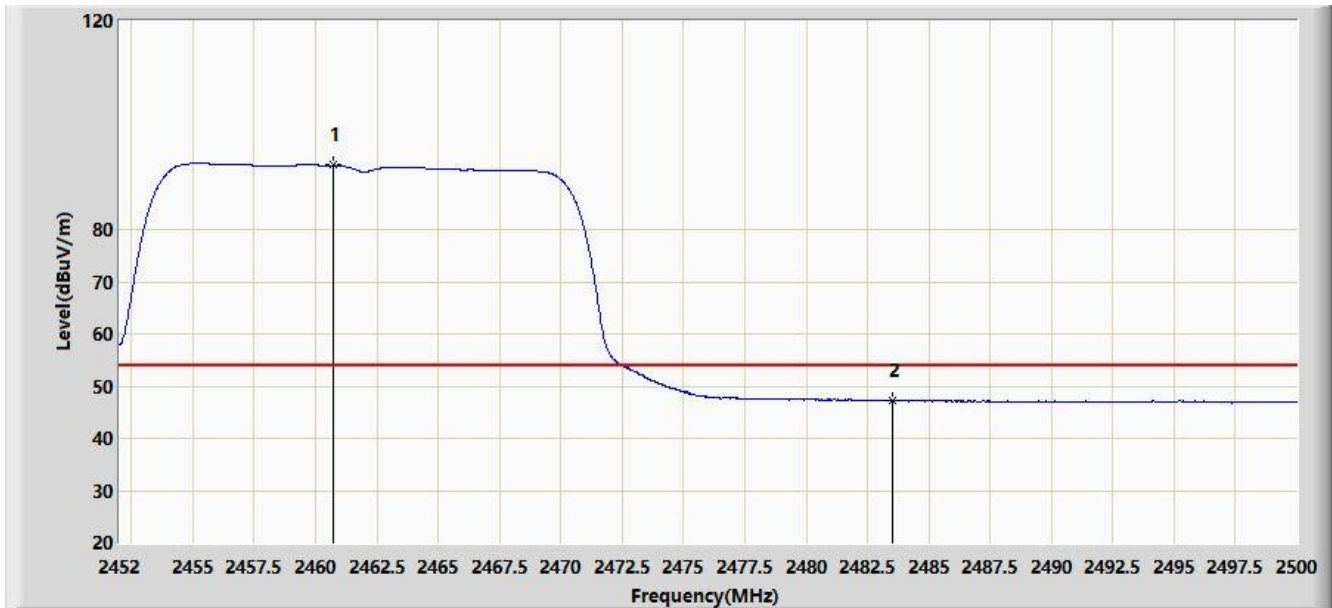


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.712	92.329	60.010	N/A	N/A	32.319	AV
2			2483.500	47.148	14.773	-6.852	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:40
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2422MHz	

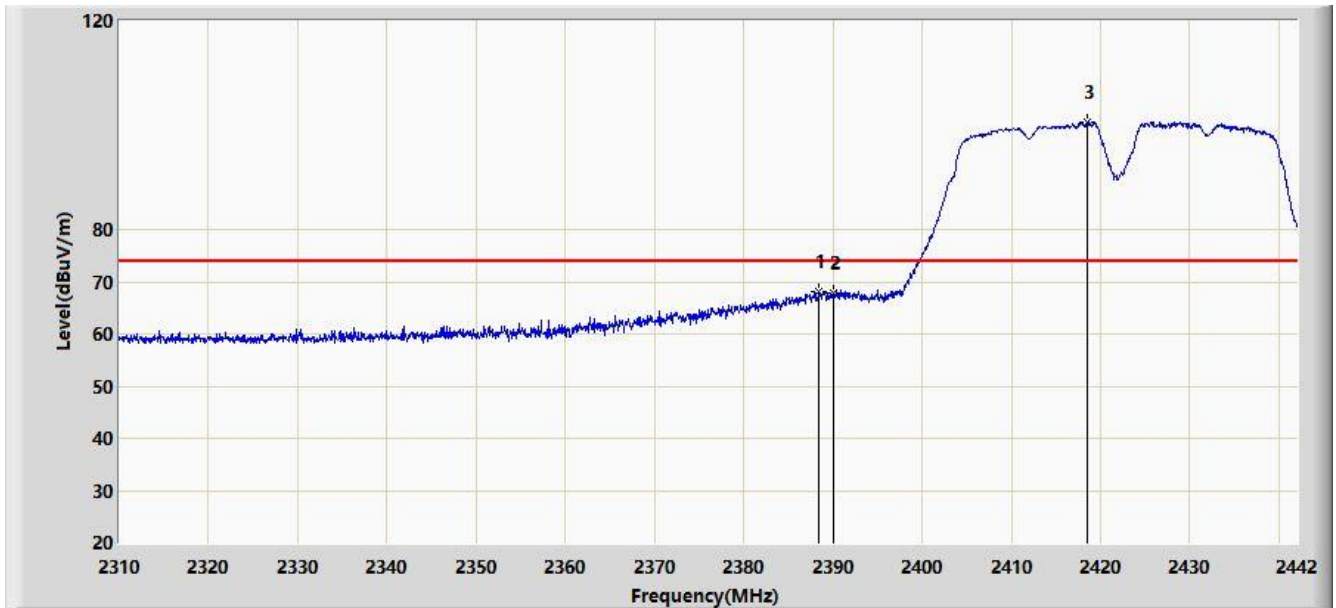


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.408	68.113	35.630	-5.887	74.000	32.483	PK
2			2390.000	67.801	35.316	-6.199	74.000	32.485	PK
3		*	2418.570	100.594	68.118	N/A	N/A	32.476	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:42
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2422MHz	

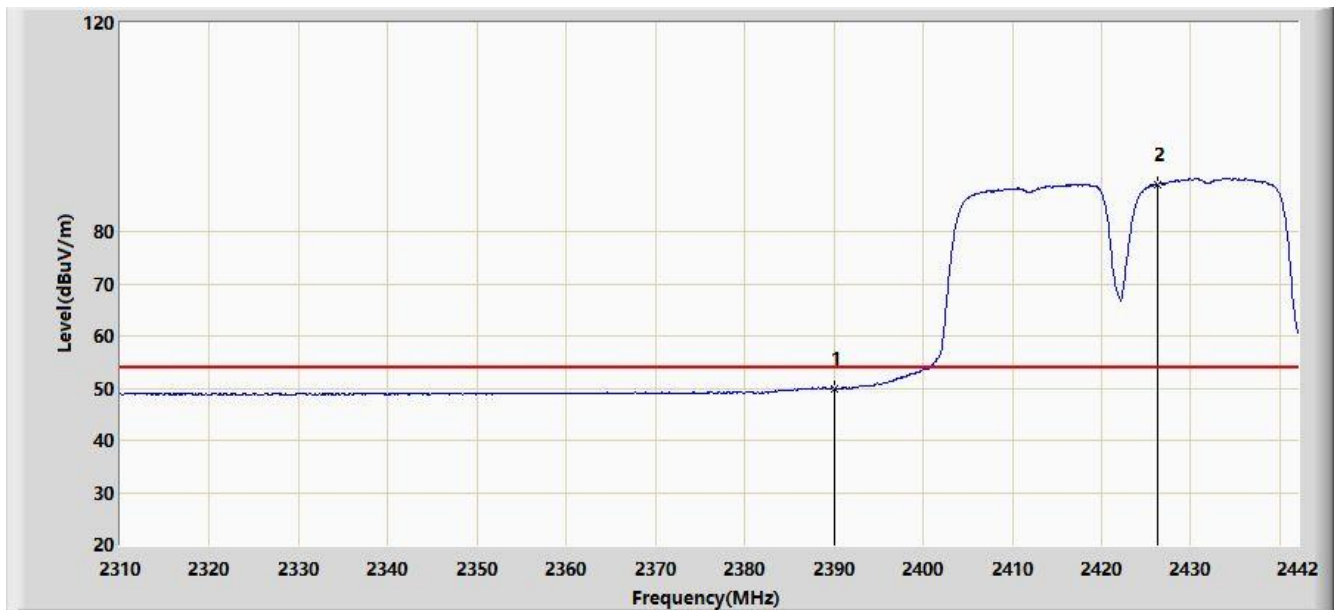


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.970	17.485	-4.030	54.000	32.485	AV
2		*	2426.358	89.111	56.702	N/A	N/A	32.409	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:44
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2422MHz	

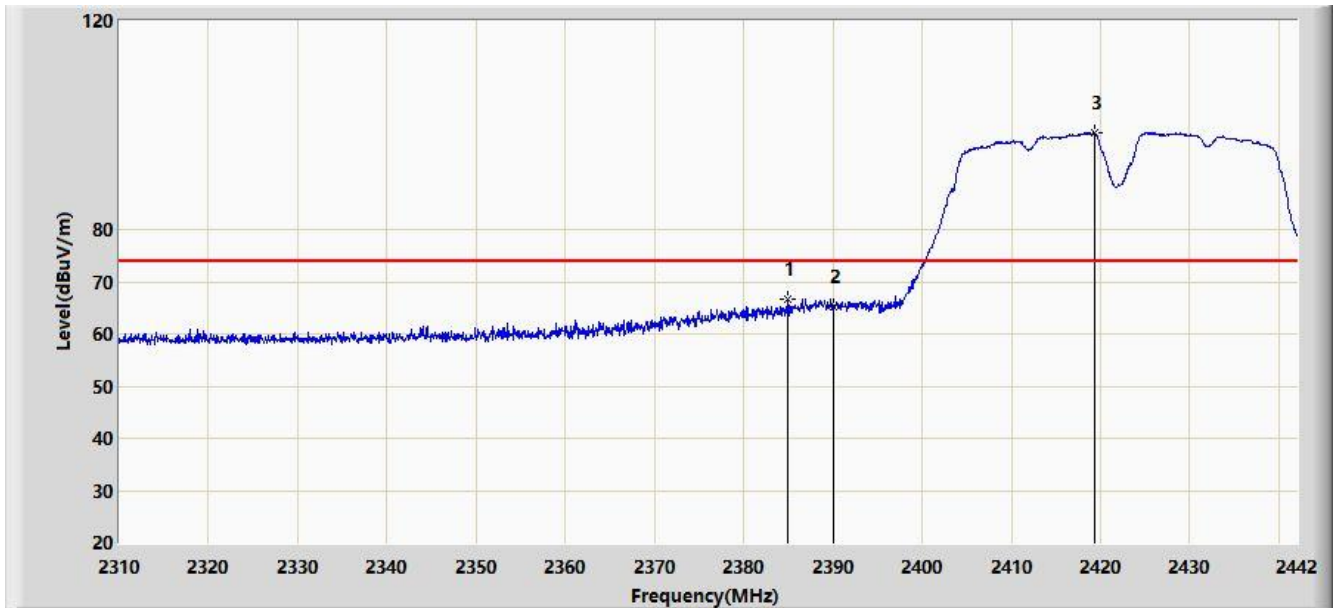


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.976	66.534	34.054	-7.466	74.000	32.480	PK
2			2390.000	65.296	32.811	-8.704	74.000	32.485	PK
3		*	2419.296	98.421	65.951	N/A	N/A	32.470	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:44
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2422MHz	

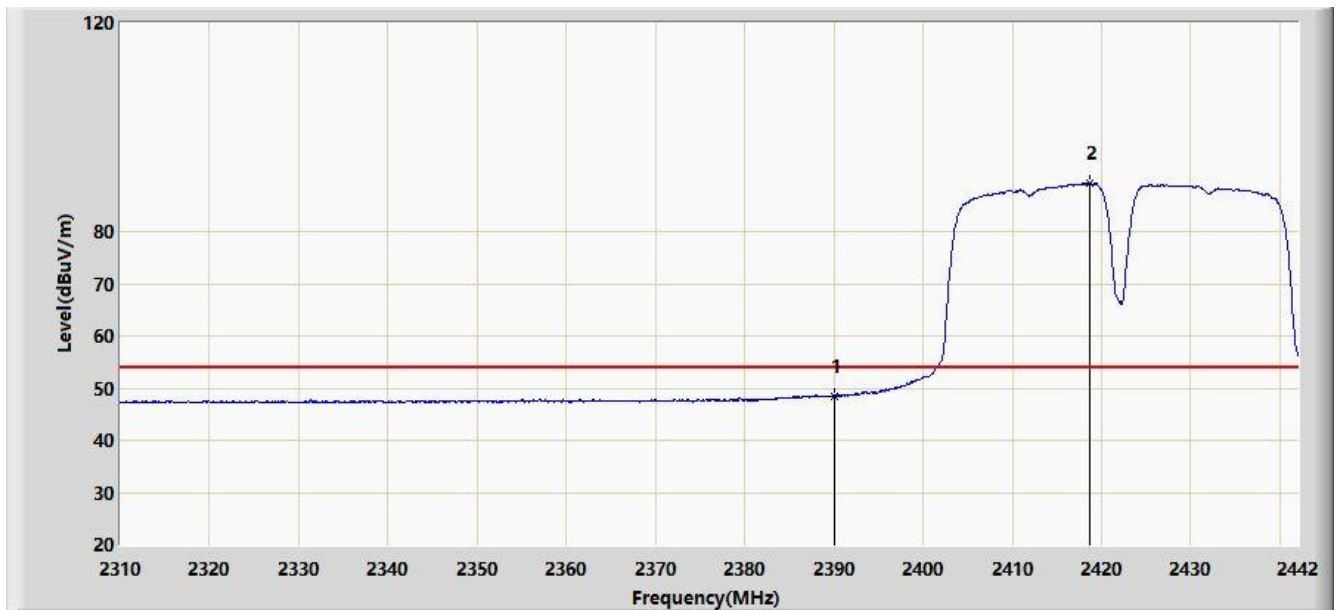


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.479	15.994	-5.521	54.000	32.485	AV
2		*	2418.702	89.256	56.781	N/A	N/A	32.474	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:46
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2452MHz	

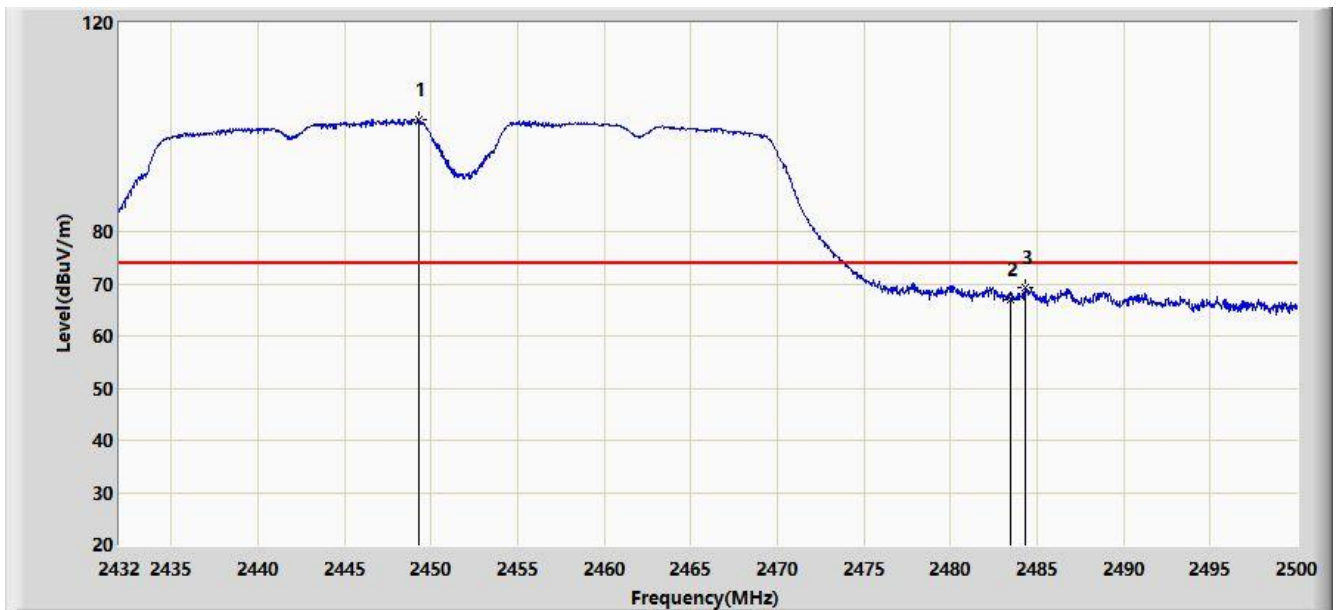


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.306	101.373	69.048	N/A	N/A	32.325	PK
2			2483.500	66.873	34.498	-7.127	74.000	32.375	PK
3			2484.326	69.244	36.871	-4.756	74.000	32.373	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:47
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2452MHz	

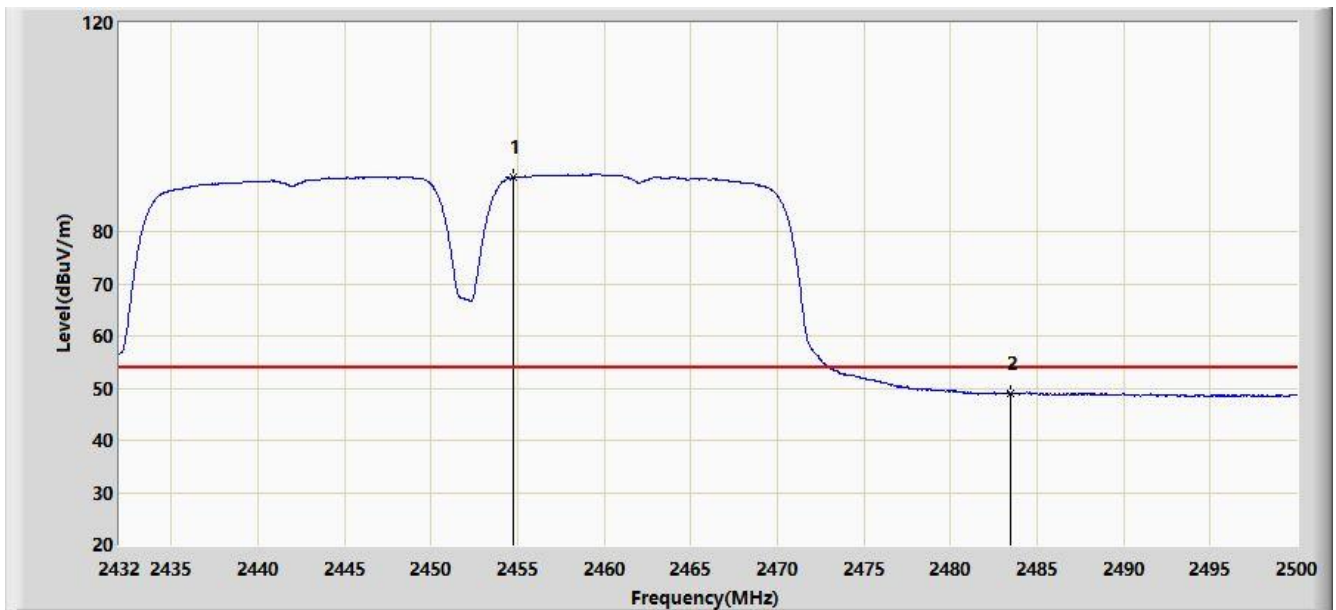


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.746	90.355	58.033	N/A	N/A	32.322	AV
2			2483.500	48.947	16.572	-5.053	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:47
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2452MHz	

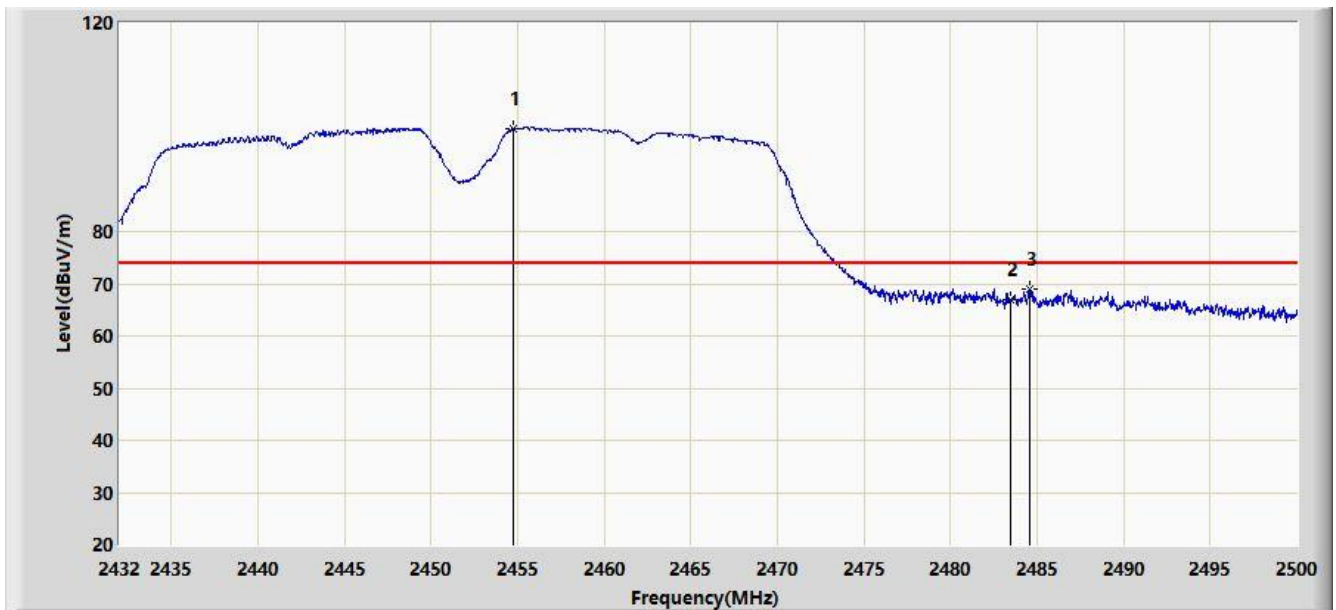


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.746	99.659	67.337	N/A	N/A	32.322	PK
2			2483.500	66.973	34.598	-7.027	74.000	32.375	PK
3			2484.564	69.102	36.730	-4.898	74.000	32.372	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2019/12/09 - 22:48
Limit: FCC_Part15_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI Module	Power: By Battery
Note: Transmit by 802.11n-HT40 at channel 2452MHz	

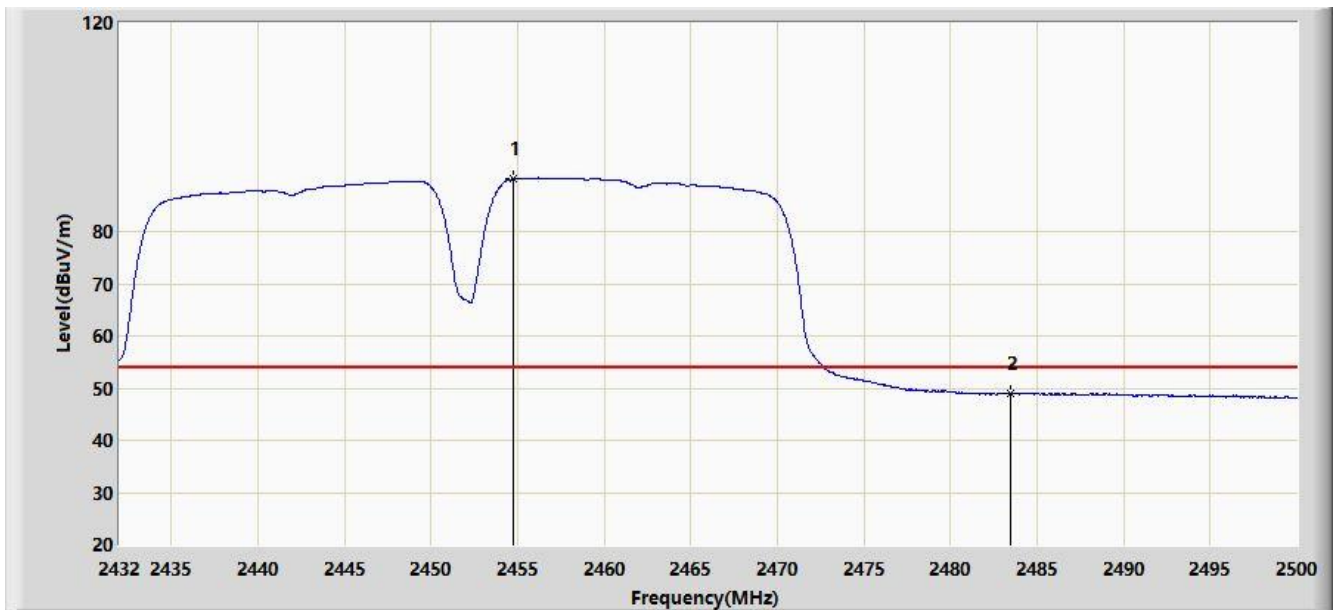

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.712	90.052	57.730	N/A	N/A	32.322	AV
2			2483.500	48.882	16.507	-5.118	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is in compliance with Part 15C of the FCC rules and ISED rules.

_____ The End _____

Appendix A - Test Setup Photograph

Refer to “1909WSU020-UT” file.

Appendix B - EUT Photograph

Refer to “1909RSU020-UE” file.