

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-181-RWD-008

AGR No. : A179A-112

Applicant : NPC Co., Ltd.

Address : 289, Hae-an-ro, Danwon-gu, Gyeonggi-do, Ansan-si, 15612, South Korea

Manufacturer : Natural & Human co., ltd.

Address : 406(Sicox tower), 484, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea

Type of Equipment : Smart pad

FCC ID. : 2AN4P-NT-A7

Model Name : NT-A7

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 86 pages (including this page)

Date of Incoming : November 29, 2017

Date of issue : January 08, 2018


SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by:


Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	9
4. EUT MODIFICATIONS.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION.....	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 MODE OF OPERATION DURING THE TEST	11
5.4 CONFIGURATION OF TEST SYSTEM.....	12
5.5 ANTENNA REQUIREMENT	12
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MIMIMUM 6 DB BANDWIDTH	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST EQUIPMENT USED.....	13
7.4 TEST DATA FOR 802.11B WLAN MODE.....	14
7.5 TEST DATA FOR 802.11G WLAN MODE	16
7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	18
7.7 TEST DATA FOR 802.11N_HT40 WLAN MODE.....	20
8. MAXIMUM PEAK OUTPUT POWER.....	22
8.1 OPERATING ENVIRONMENT	22

8.2 TEST SET-UP	22
8.3 TEST EQUIPMENT USED	22
8.4 TEST DATA FOR 802.11B WLAN MODE	23
8.5 TEST DATA FOR 802.11G WLAN MODE	23
8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	24
8.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	24
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	25
9.1 OPERATING ENVIRONMENT	25
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	25
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	25
9.4 TEST EQUIPMENT USED	25
9.5 TEST DATA FOR CONDUCTED EMISSION	26
9.5.1 Test data for 802.11b WLAN Mode.....	26
9.5.2 Test data for 802.11g WLAN Mode.....	31
9.5.3 Test data for 802.11n_HT20 WLAN Mode	36
9.5.4 Test data for 802.11n_HT40 WLAN Mode	41
9.6 TEST DATA FOR RADIATED EMISSION	46
9.6.1 Radiated Emission which fall in the Restricted Band.....	46
9.6.2 Radiated Emission which fall in the Band Edge	54
9.6.3 Spurious & Harmonic Radiated Emission.....	60
10. PEAK POWER SPECTRUL DENSITY	70
10.1 OPERATING ENVIRONMENT	70
10.2 TEST SET-UP	70
10.3 TEST EQUIPMENT USED	70
10.4 TEST DATA FOR 802.11B WLAN MODE	71
10.5 TEST DATA FOR 802.11G WLAN MODE	73
10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	75
10.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	77
11. RADIATED EMISSION TEST	79
11.1 OPERATING ENVIRONMENT	79
11.2 TEST SET-UP	79
11.3 TEST EQUIPMENT USED	79
11.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	80
11.5 TEST DATA FOR BELOW 30 MHz	83
11.6 TEST DATA FOR ABOVE 1 GHz	83
12. CONDUCTED EMISSION TEST	84

12.1 OPERATING ENVIRONMENT	84
12.2 TEST SET-UP	84
12.3 TEST EQUIPMENT USED	84
12.4 TEST DATA	85

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
OT-181-RWD-008	January 08, 2018	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : NPC Co., Ltd.
Address : 289, Hae-an-ro, Danwon-gu, Gyeonggi-do, Ansan-si, 15612, South Korea
Contact Person : Sungwoo, Kim / Manager
Telephone No. : +82-31-697-7432
FCC ID : 2AN4P-NT-A7
Model Name : NT-A7
Serial Number : N/A
Date : January 08, 2018

EQUIPMENT CLASS	DTS – DIGITAL TRANSMISSION SYSTEM
E.U.T. DESCRIPTION	Smart pad
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The NPC Co., Ltd., Model NT-A7 (referred to as the EUT in this report) is a Smart pad. Product specification information described herein was obtained from product data sheet or user's manual.

Device Type	Smart pad			
Temperature Range	- 10 °C ~ + 70 °C			
Operating Frequency	Bluetooth LE	2 402 MHz ~ 2 480 MHz		
	Bluetooth	2 402 MHz ~ 2 480 MHz		
	WLAN	2.4 GHz Band	802.11b/g/n(HT20)	2 412 MHz ~ 2 462 MHz
			802.11n(HT40)	2 422 MHz ~ 2 452 MHz
RF Output Power	Bluetooth LE	6.55 dBm		
	Bluetooth	1 Mbps	5.99 dBm	
		2 Mbps	7.47 dBm	
		3 Mbps	7.45 dBm	
	WLAN	2.4 GHz Band	12.45 dBm(802.11b)	
			12.20 dBm(802.11g)	
			11.48 dBm(802.11n_HT20)	
			7.92 dBm(802.11n_HT40)	
Modulation Type	Bluetooth LE	DSSS Modulation(GFSK)		
	Bluetooth	1 Mbps: GFSK 2 Mbps: $\pi/4$ -QPSK 3 Mbps: 8-DPSK		
	WLAN	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)		
Antenna Type	PCB ANTENNA			
Antenna Gain	4.71 dBi			
Electrical Rating	DC 5.0 V			
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	24 MHz			

3.2 Alternative type(s)/model(s); also covered by this test report.

-, None

4. EUT MODIFICATIONS

-, None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	N/A
Display	N/A	N/A	N/A
Speaker	N/A	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
NT-A7	Natural & Human co., ltd.	Smart pad (EUT)	Notebook PC
650	HP	Notebook PC	EUT
PPP012D-S	HP	Adapter	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

Modulation	DATA RATE	OUTPUT POWER[dBm]
802.11 b (Middle Channel)	1 Mbps	12.45
	2 Mbps	12.33
	5.5 Mbps	12.18
	11 Mbps	12.01
802.11g (Middle Channel)	6 Mbps	12.20
	9 Mbps	11.97
	12 Mbps	11.80
	18 Mbps	11.58
	24 Mbps	11.34
	36 Mbps	11.15
	48 Mbps	10.92
	54 Mbps	10.63
HT 20 (Middle Channel)	6.5 Mbps	11.48
	13 Mbps	11.28
	19.5 Mbps	11.14
	26 Mbps	10.93
	39 Mbps	10.75
	52 Mbps	10.61
	58.5 Mbps	10.32
	65 Mbps	10.14
HT 40 (Middle Channel)	13.5 Mbps	7.92
	27 Mbps	7.82
	40.5 Mbps	7.64
	54 Mbps	7.45
	81 Mbps	7.18
	108 Mbps	7.03
	121.5 Mbps	6.97
	135 Mbps	6.89

-. To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test: The DC Power Supply of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

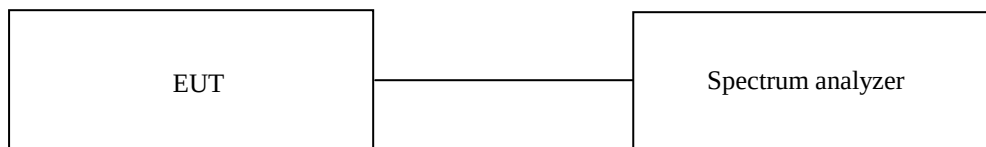

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11b WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	10.09	0.50	9.59
Middle	2 442.00	10.09	0.50	9.59
High	2 462.00	10.09	0.50	9.59

Remark. Margin = Measured Value - Limit



Tested by: Hyung-Kwon, Oh / Assistant Manager

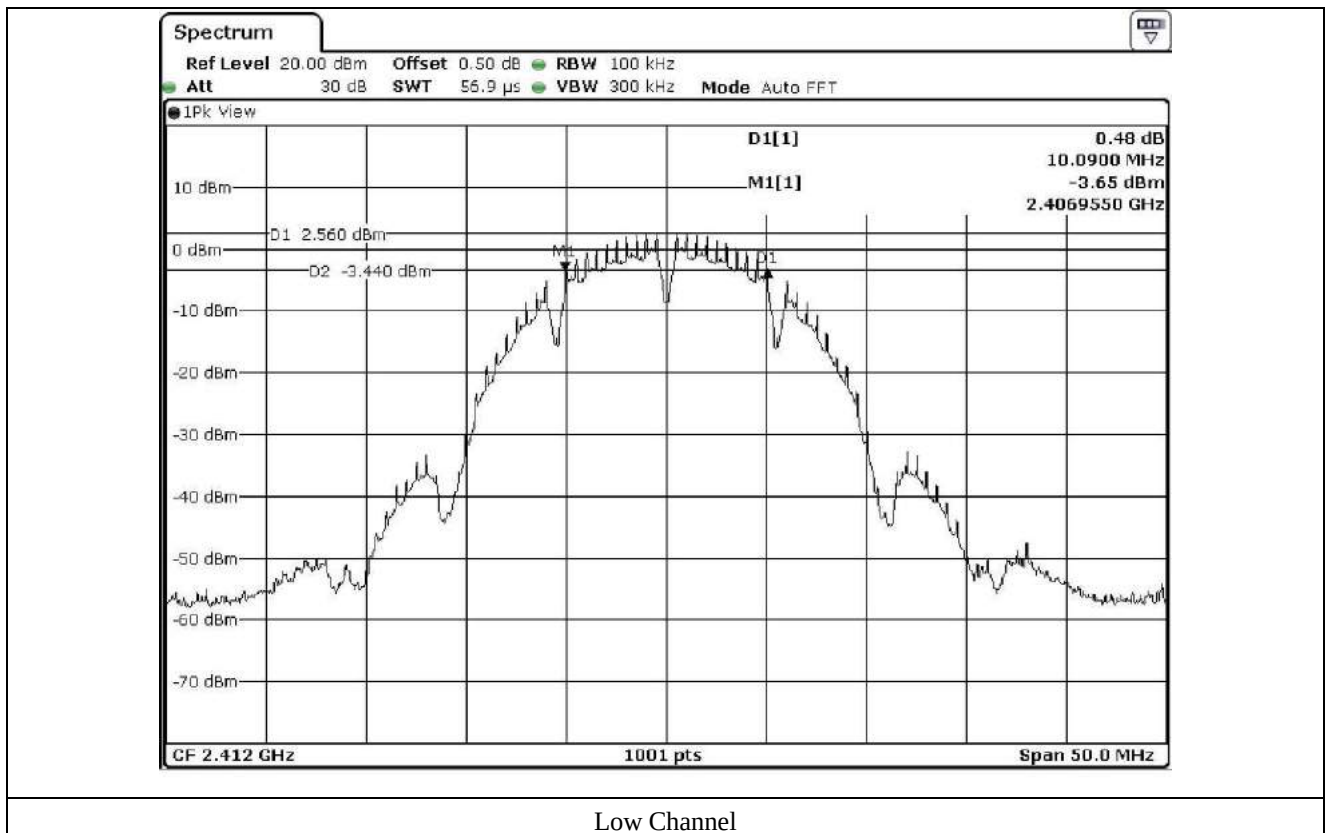

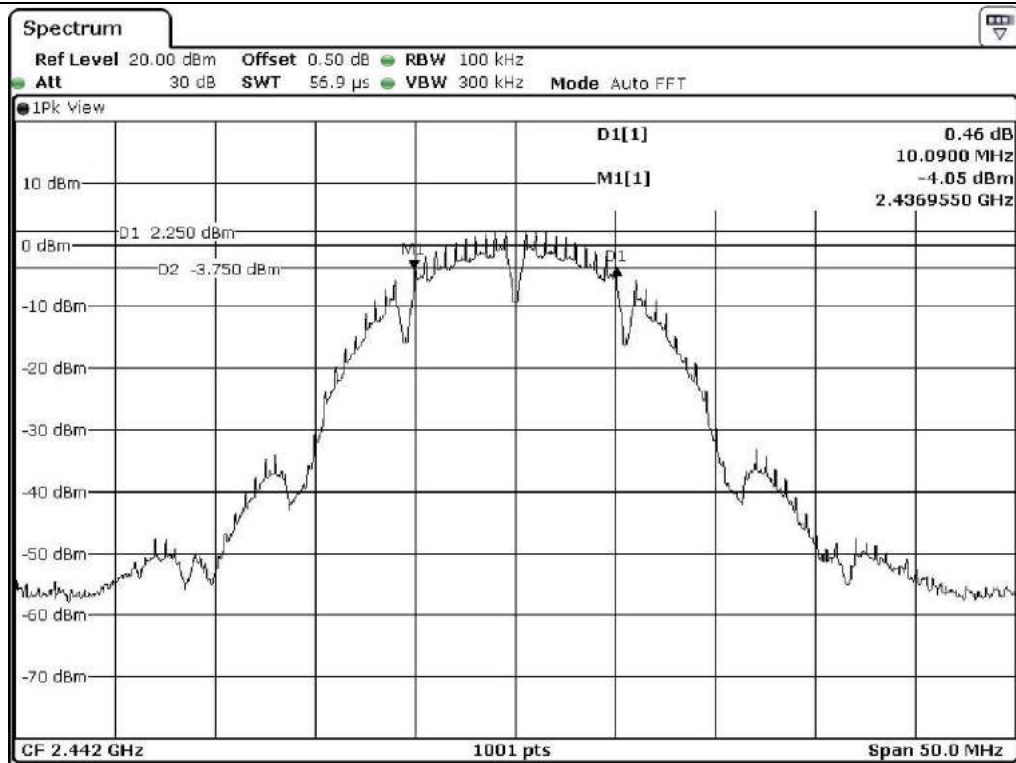

Middle Channel



High Channel

7.5 Test data for 802.11g WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.38	0.50	15.88
Middle	2 442.00	16.33	0.50	15.83
High	2 462.00	16.28	0.50	15.78

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

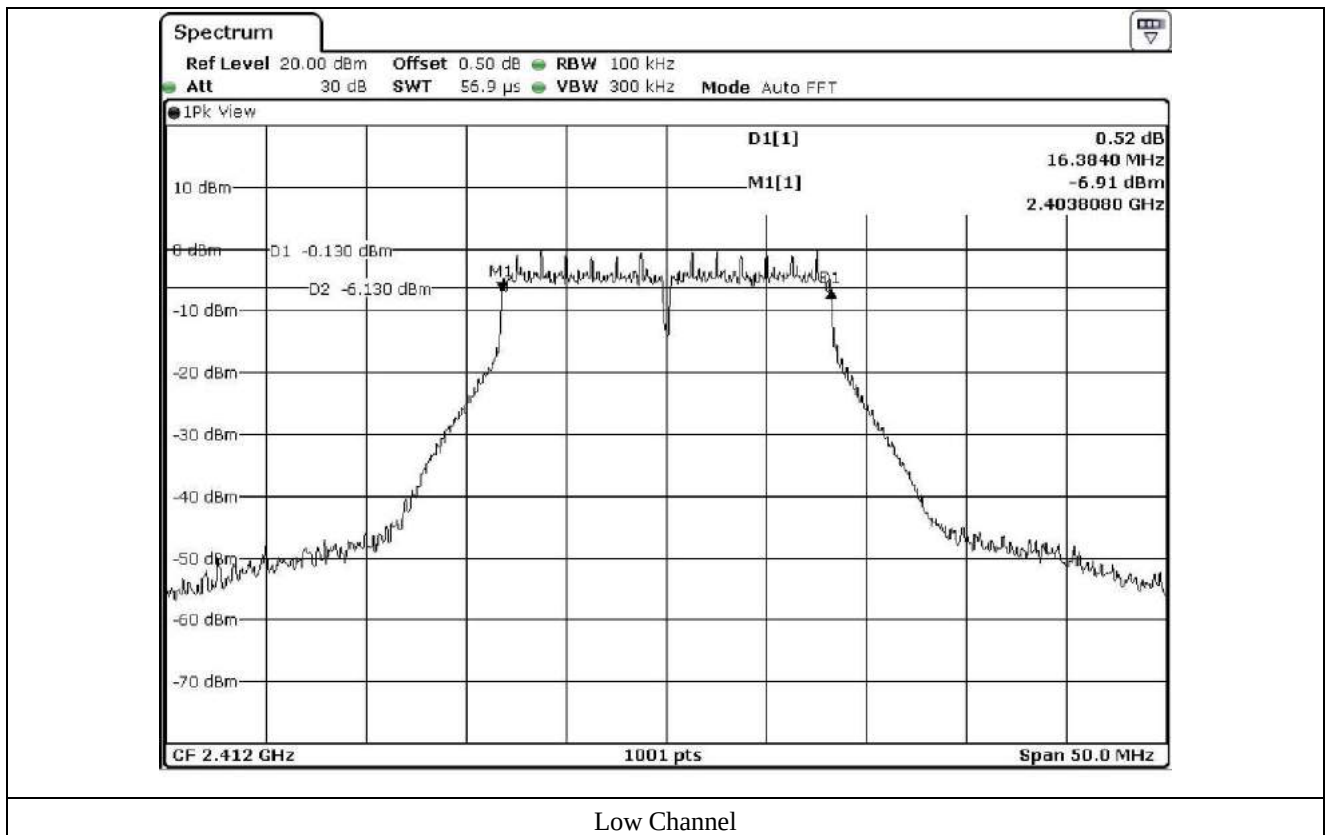

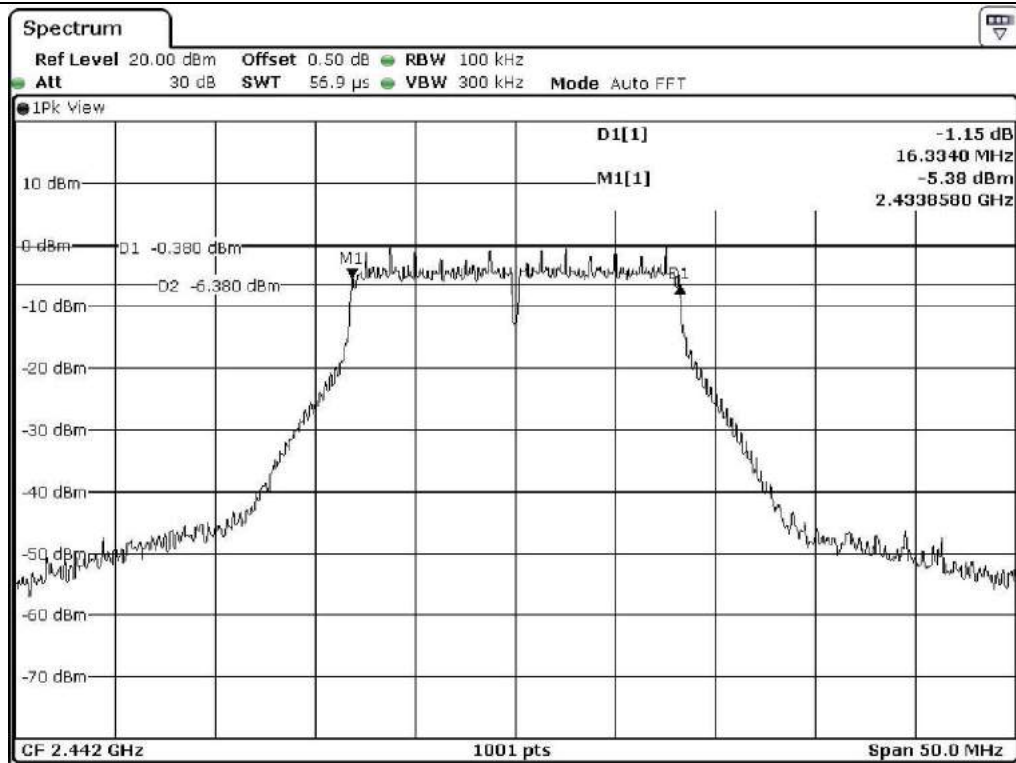

Middle Channel

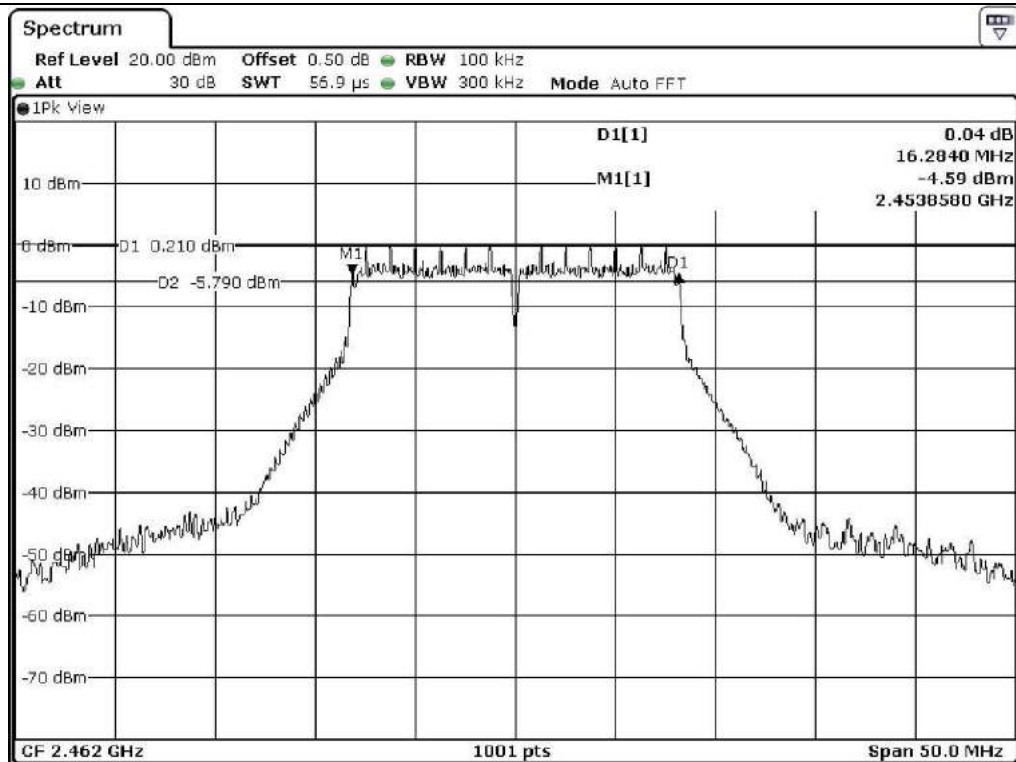

High Channel

7.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.58	0.50	17.08
Middle	2 442.00	17.58	0.50	17.08
High	2 462.00	17.58	0.50	17.08

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

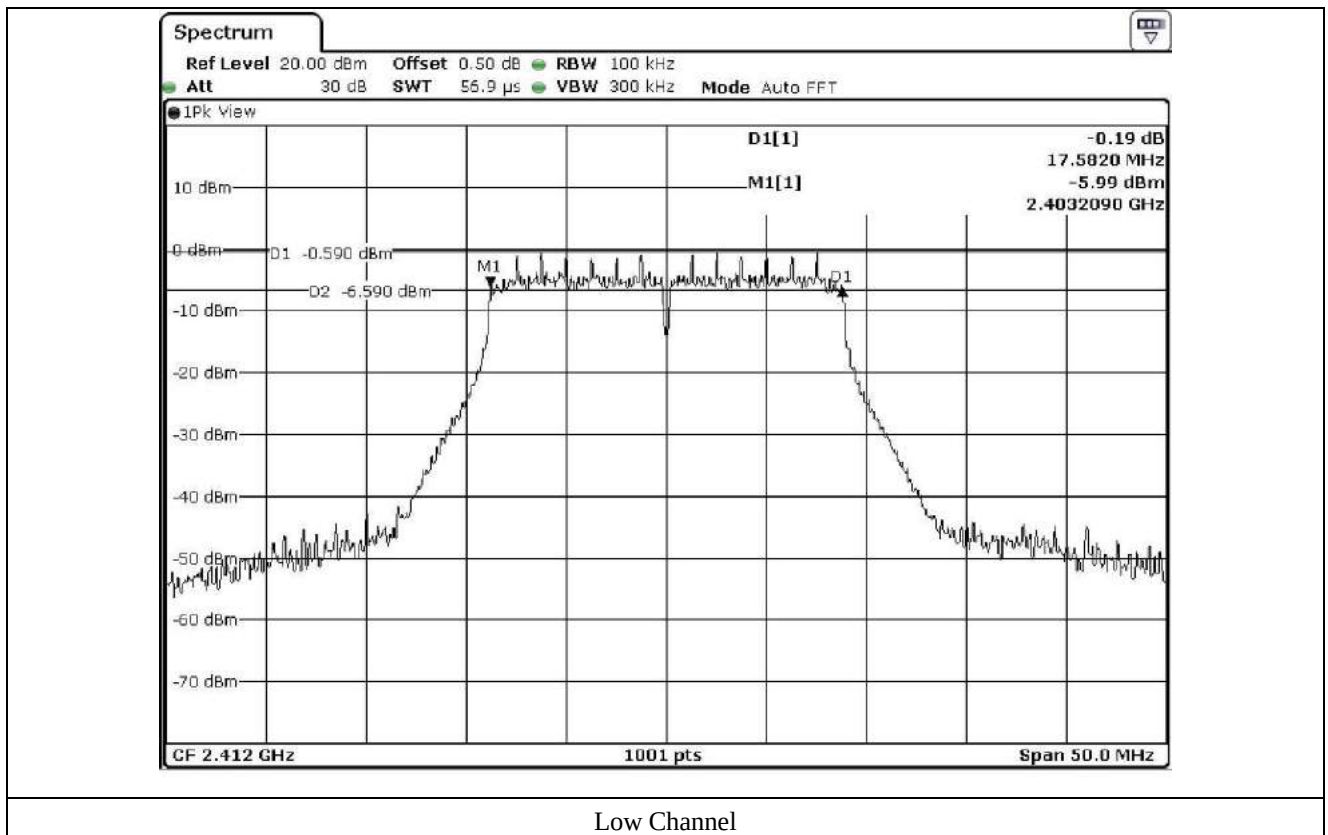

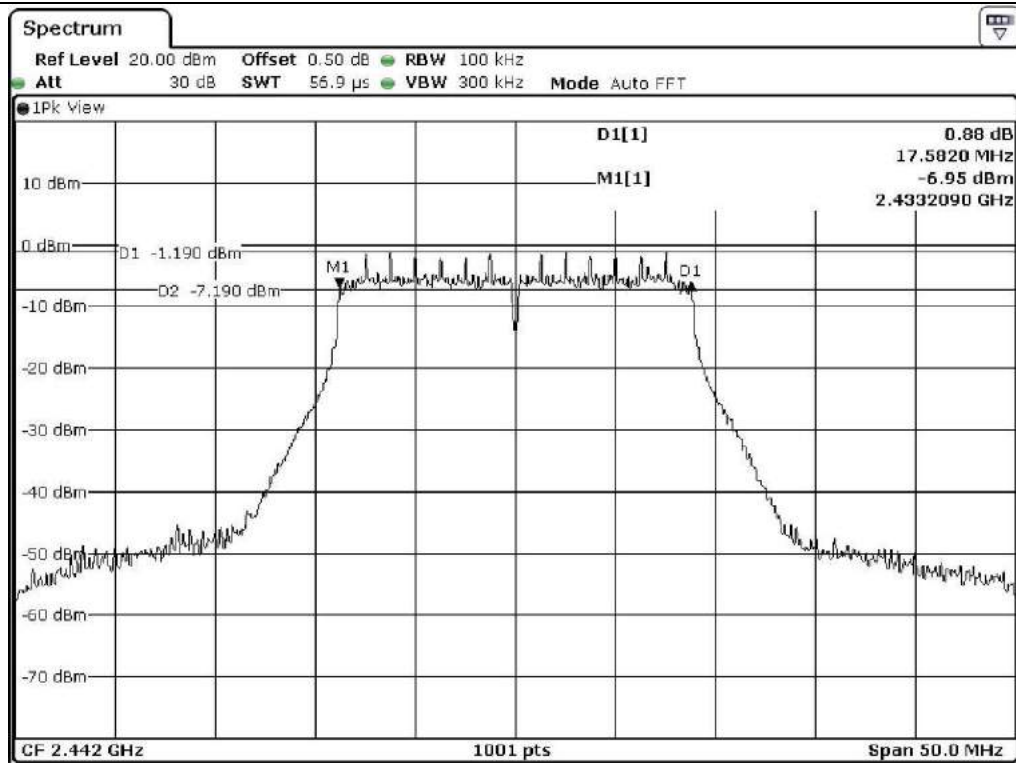

Middle Channel

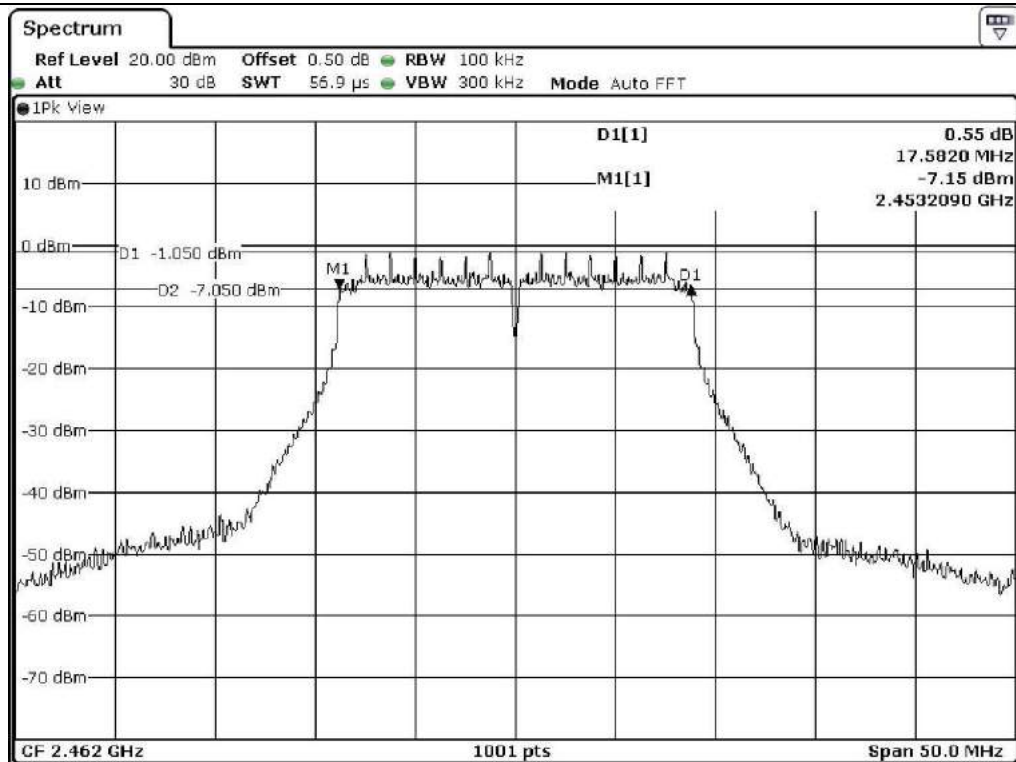

High Channel

7.7 Test data for 802.11n_HT40 WLAN Mode


-. Test Date : December 27, 2017 ~ January 03, 2018


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	36.06	0.50	35.56
Middle	2 442.00	36.06	0.50	35.56
High	2 452.00	35.66	0.50	35.16


Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Assistant Manager

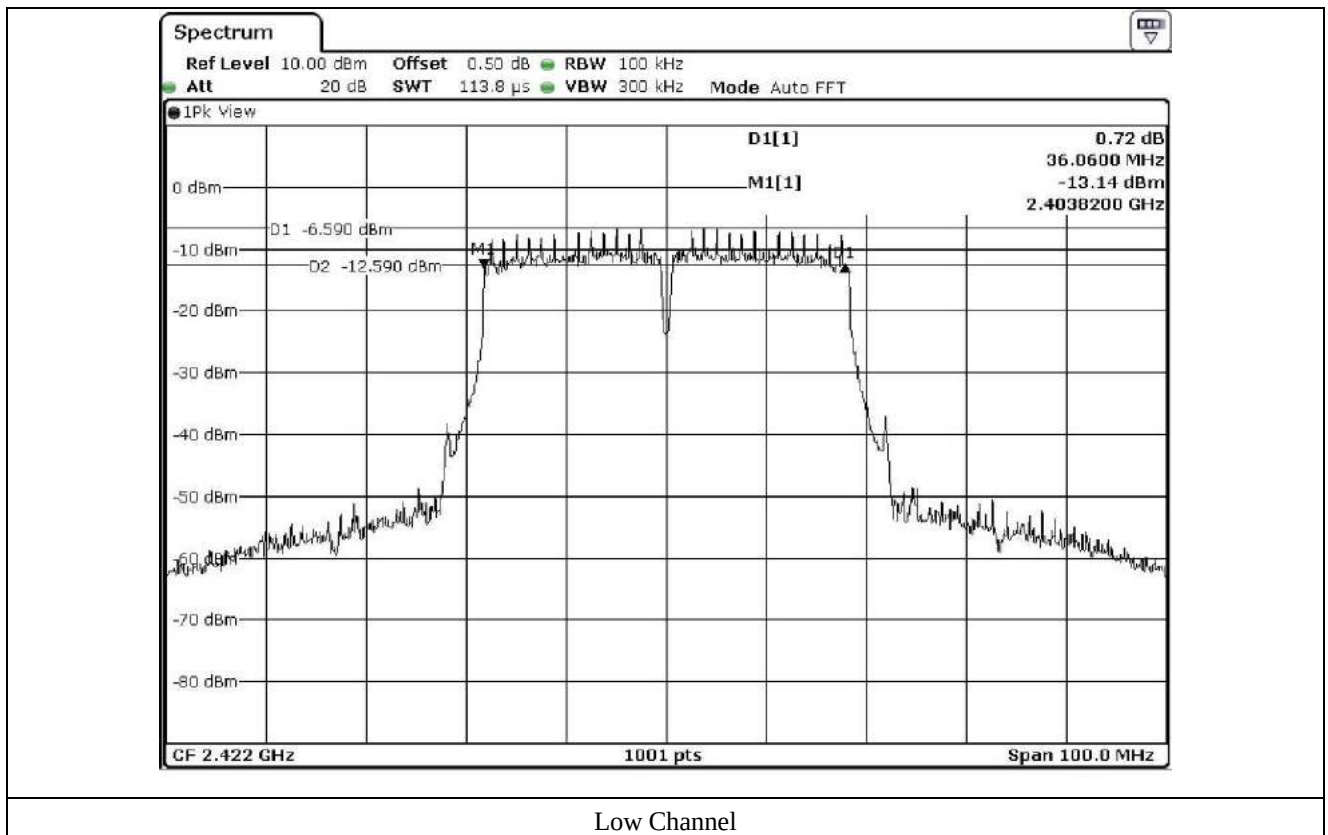

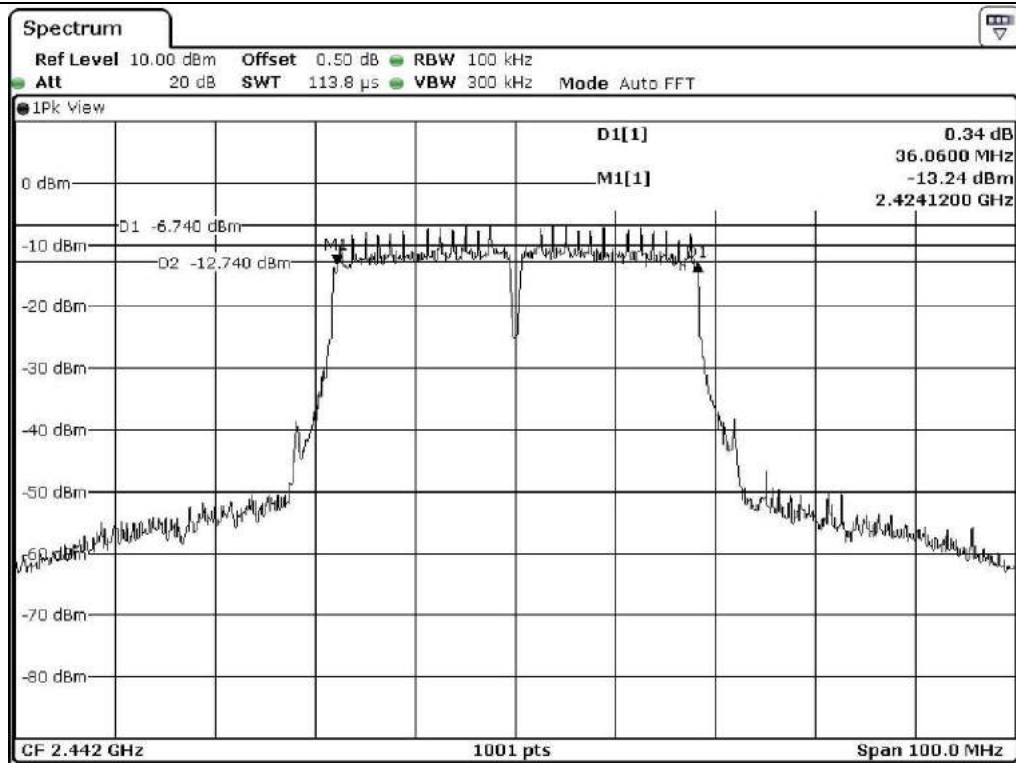

Middle Channel

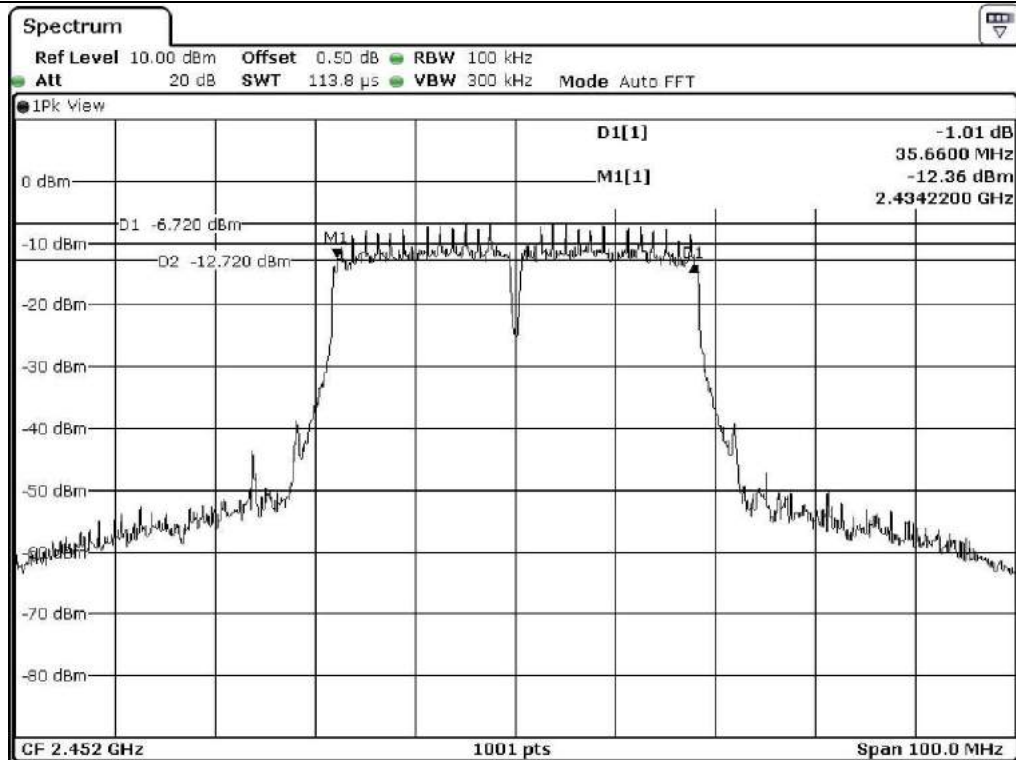

High Channel


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT.
The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 9.2.3(KDB 558074 D01 DTS Meas Guidance v04).
Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

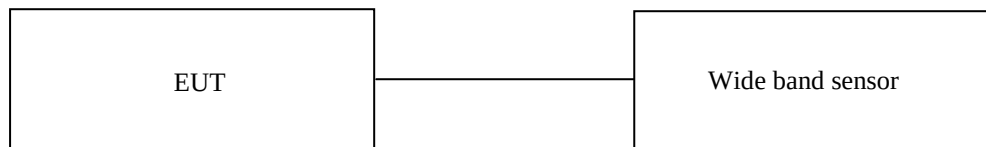

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - NRP-Z81	Rohde & Schwarz	Wide band Sensor	101975	April 04, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11b WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass

-. Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	12.45	30.00	17.55
MIDDLE	2 442.00	12.05	30.00	17.95
HIGH	2 462.00	11.40	30.00	18.60

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

8.5 Test data for 802.11g WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass

-. Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	12.20	30.00	17.80
MIDDLE	2 442.00	12.05	30.00	17.95
HIGH	2 462.00	11.99	30.00	18.01

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass

-. Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	11.48	30.00	18.52
MIDDLE	2 442.00	10.94	30.00	19.06
HIGH	2 462.00	10.84	30.00	19.16

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

8.7 Test data for 802.11n_HT40 WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass

-. Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	7.92	30.00	22.08
MIDDLE	2 442.00	7.47	30.00	22.53
HIGH	2 452.00	7.46	30.00	22.54

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Hyung-Kwon, Oh / Assistant Manager


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 25 °C
Relative humidity : 44 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

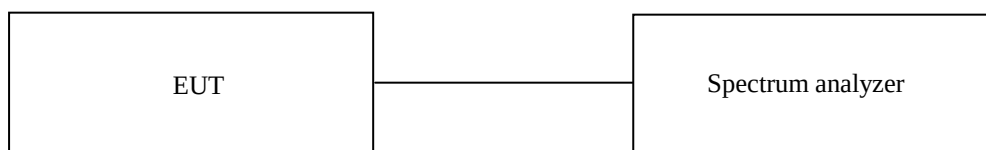

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ -	BBV9718	Schwarzbeck	Amplifier	310	Sep. 01, 2017 (1Y)
■	SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Apr. 04, 2017 (1Y)
■ -	DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ -	MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	May 26, 2017 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jul. 28, 2017 (2Y)


All test equipment used is calibrated on a regular basis.

9.5 Test data for conducted emission


9.5.1 Test data for 802.11b WLAN Mode

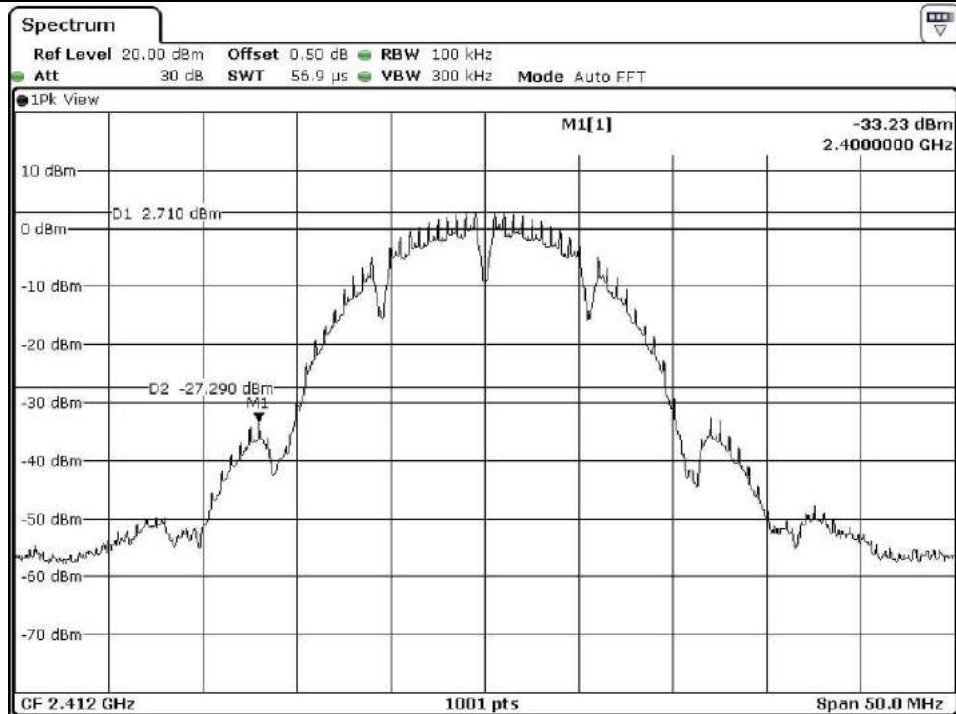


Low Channel

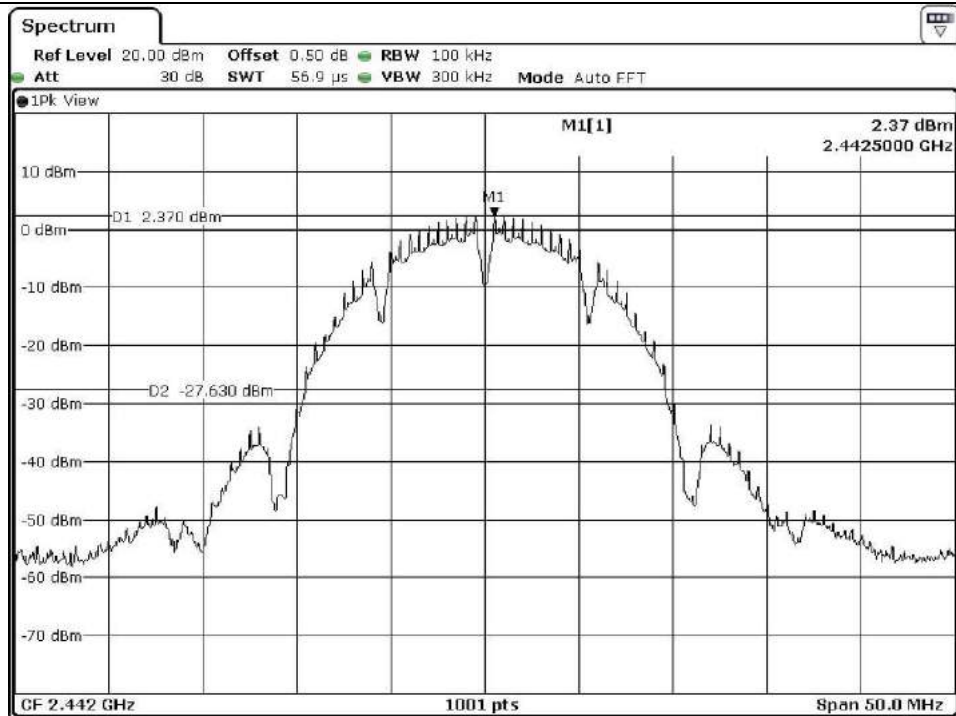


Middle Channel

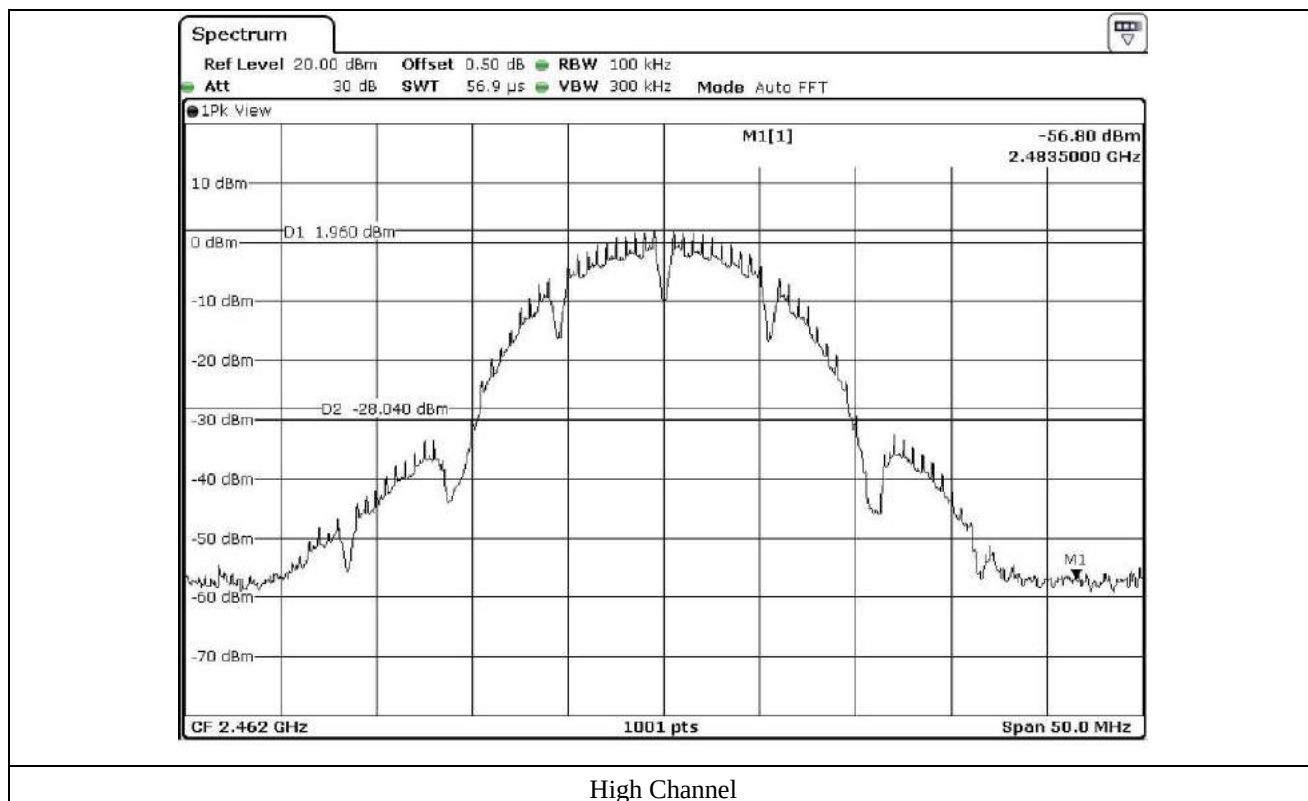


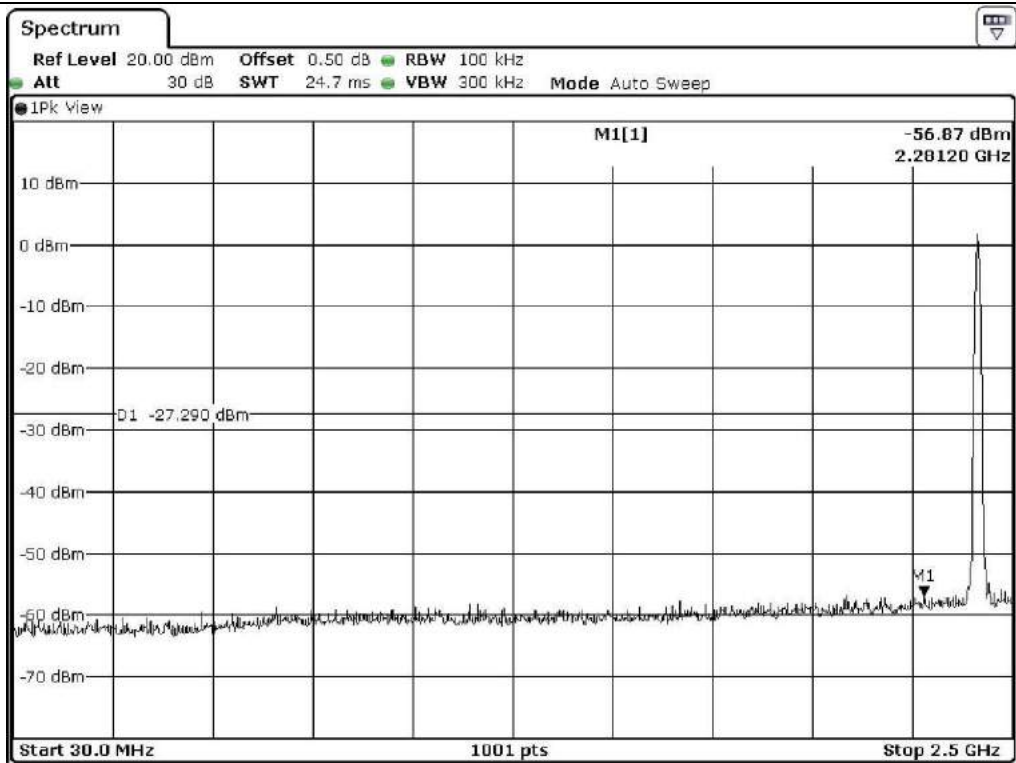


Low Channel

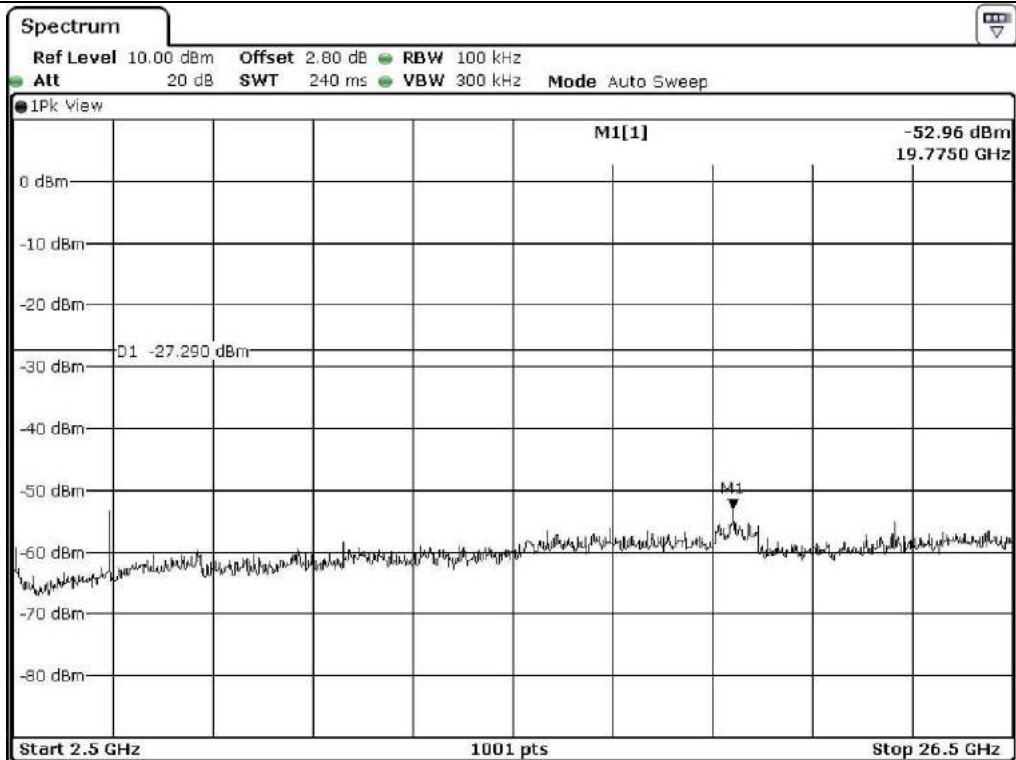


Low Channel

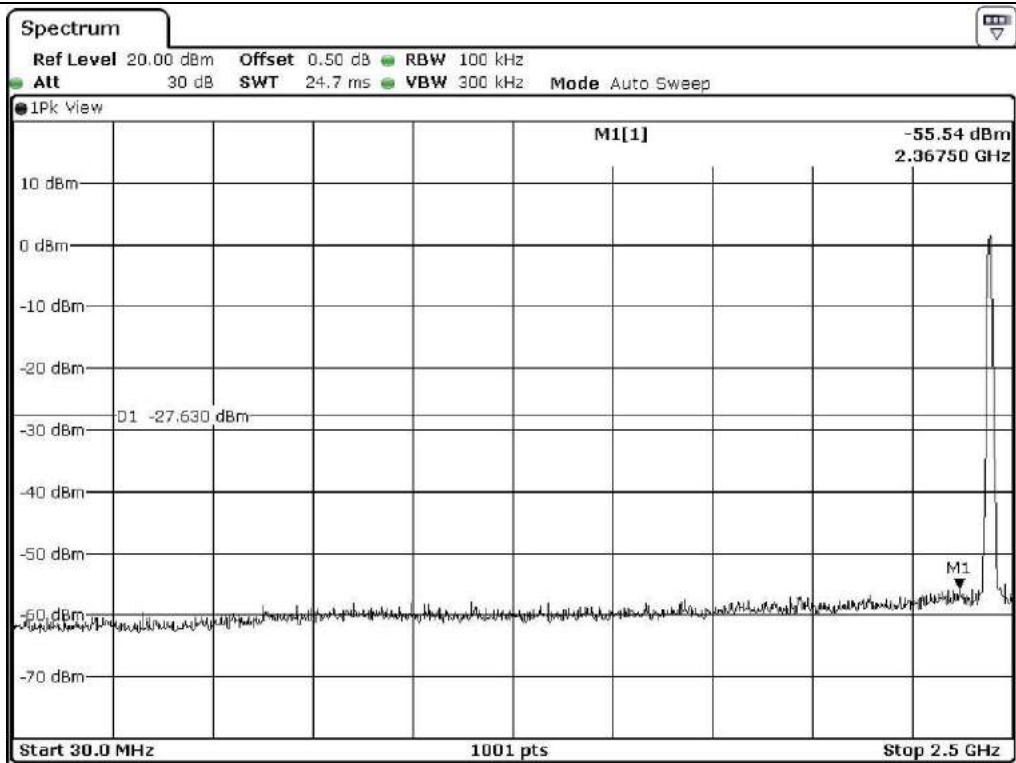


Middle Channel

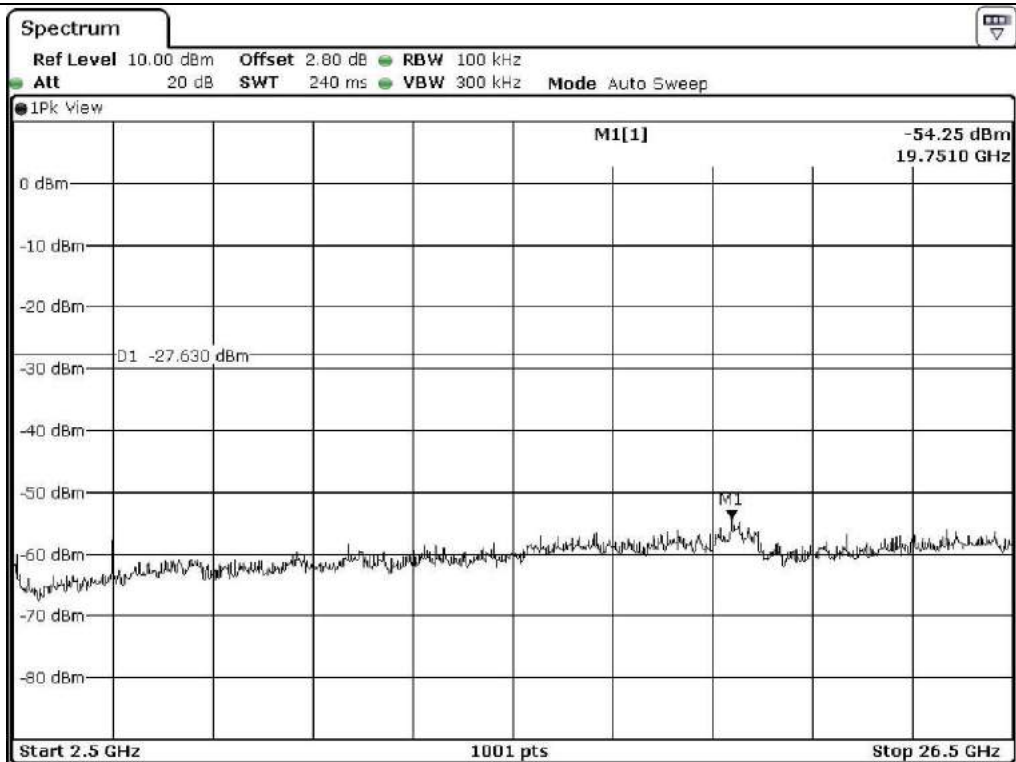

Middle Channel

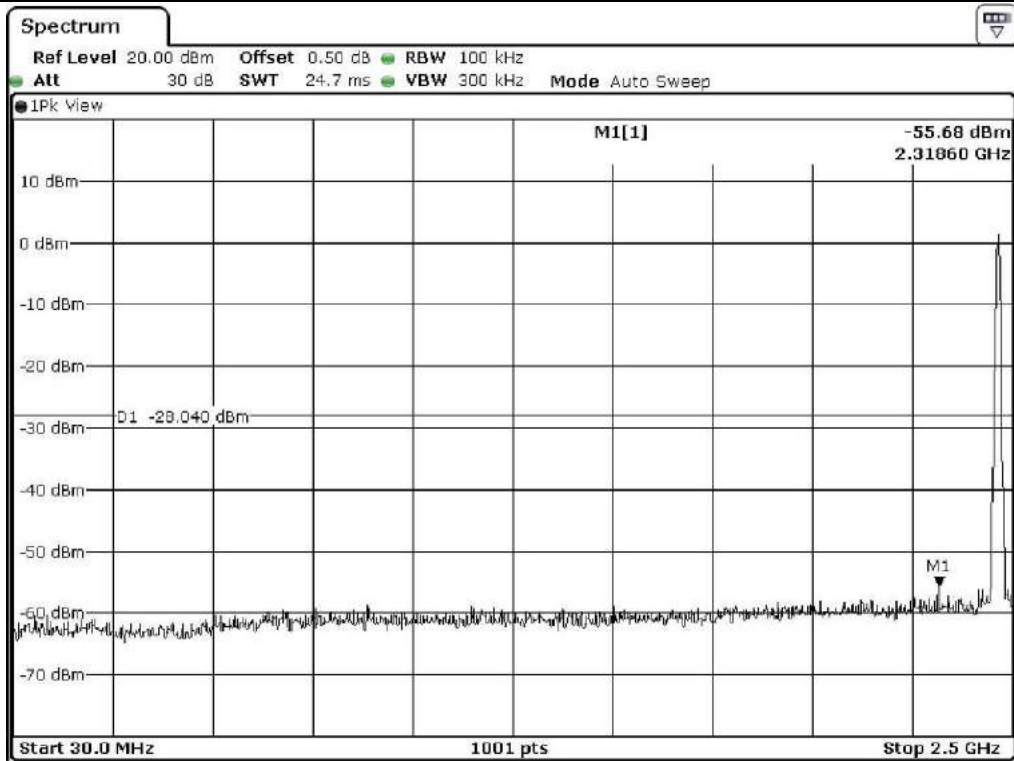


High Channel

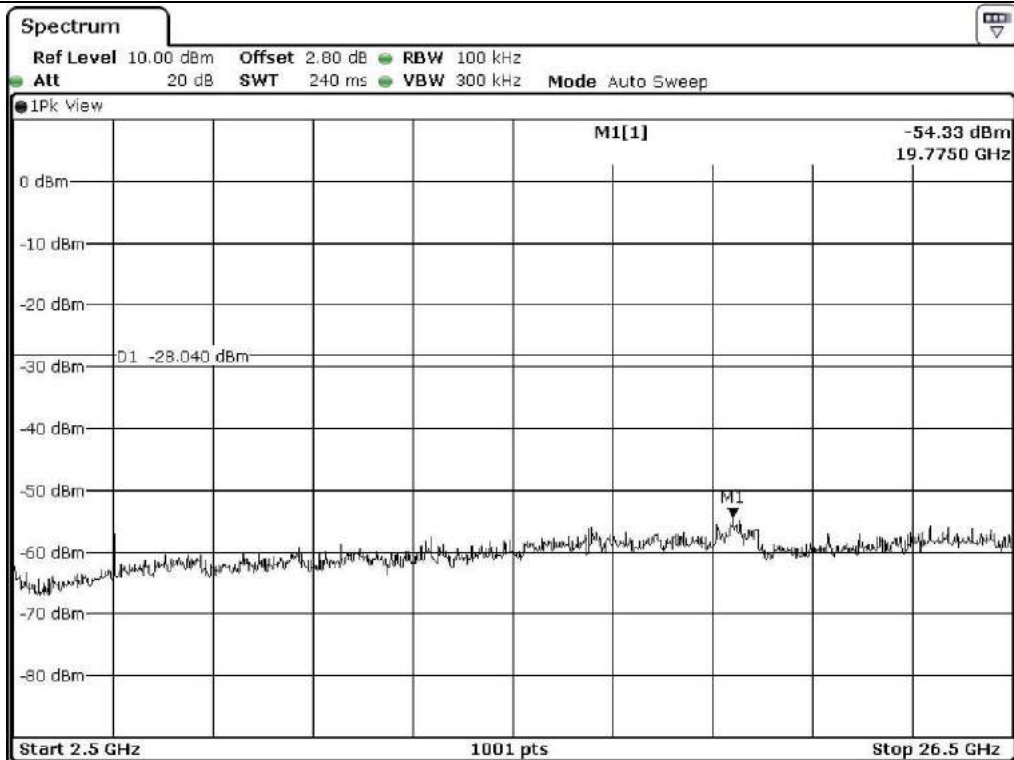


High Channel


9.5.2 Test data for 802.11g WLAN Mode

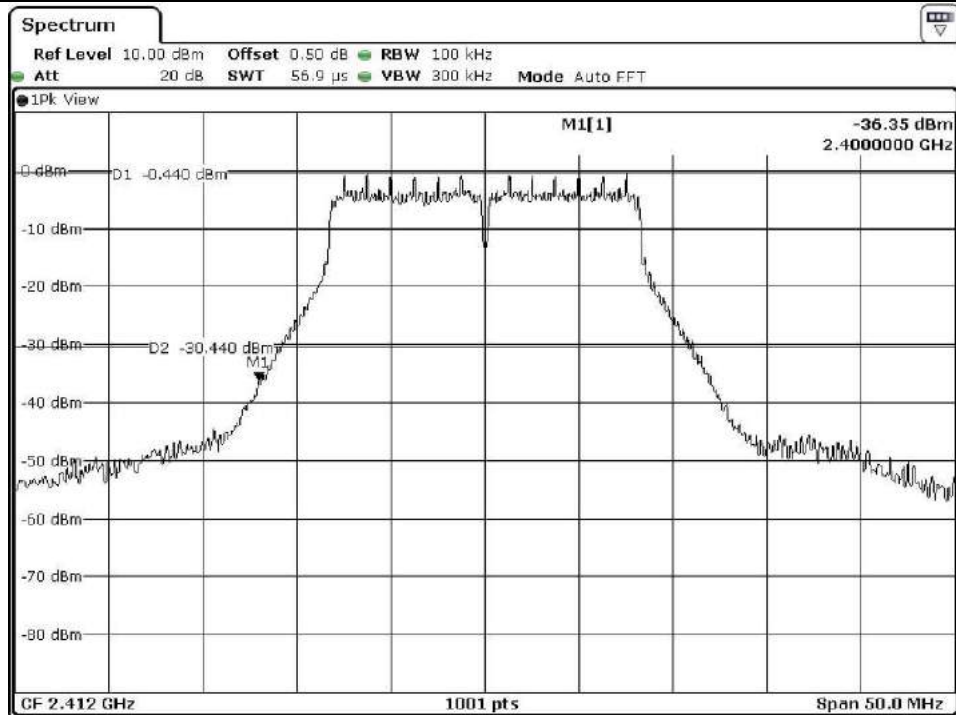


Low Channel

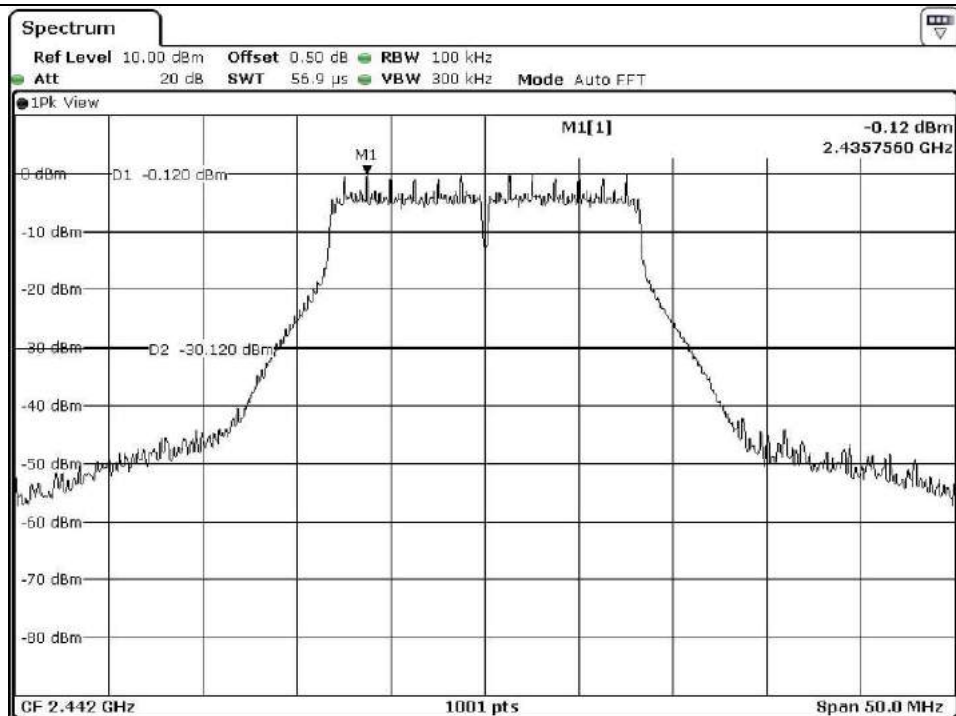


Middle Channel

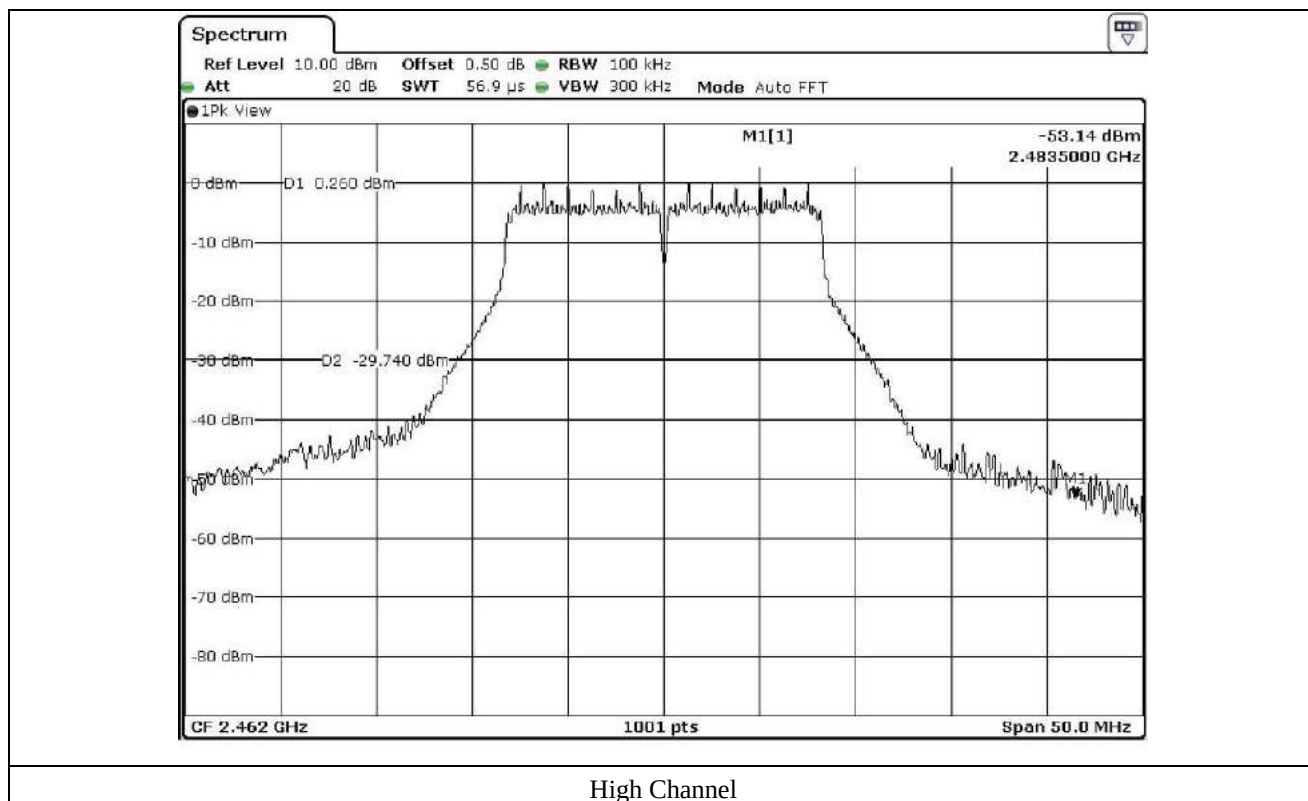


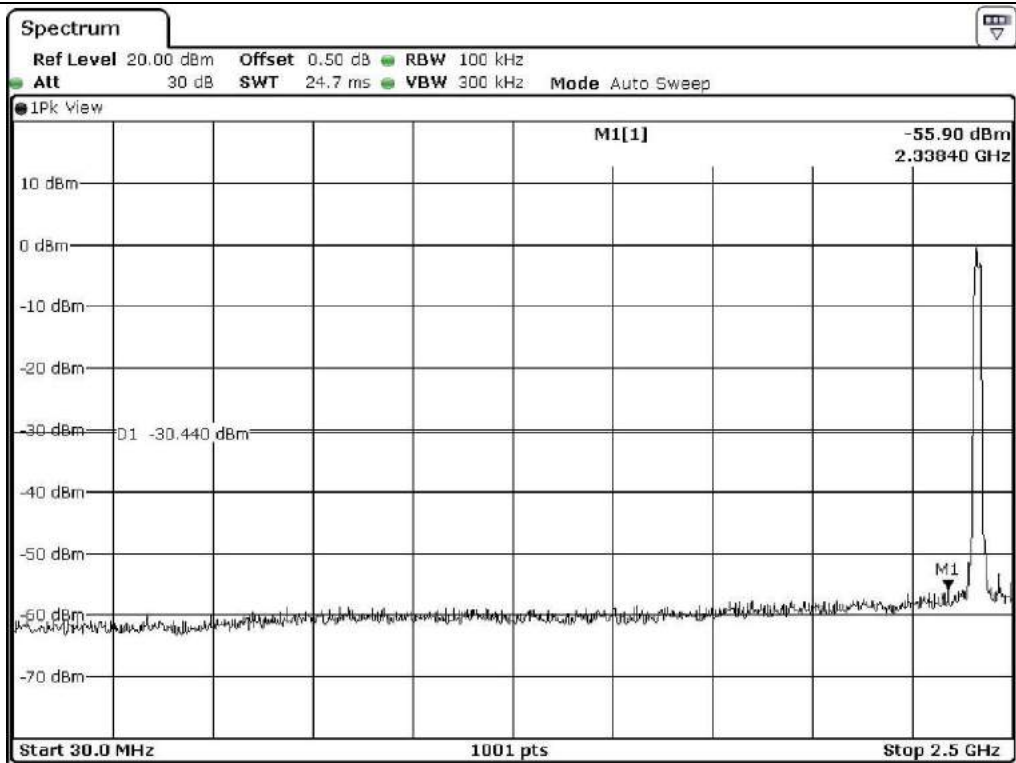


Low Channel

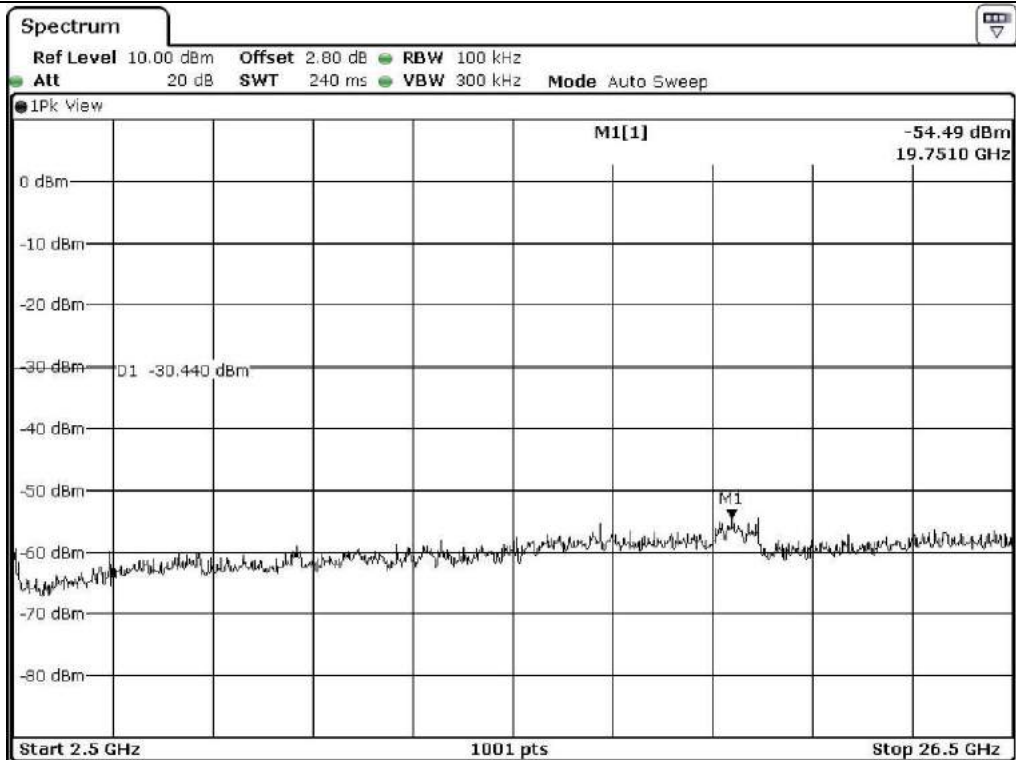


Low Channel

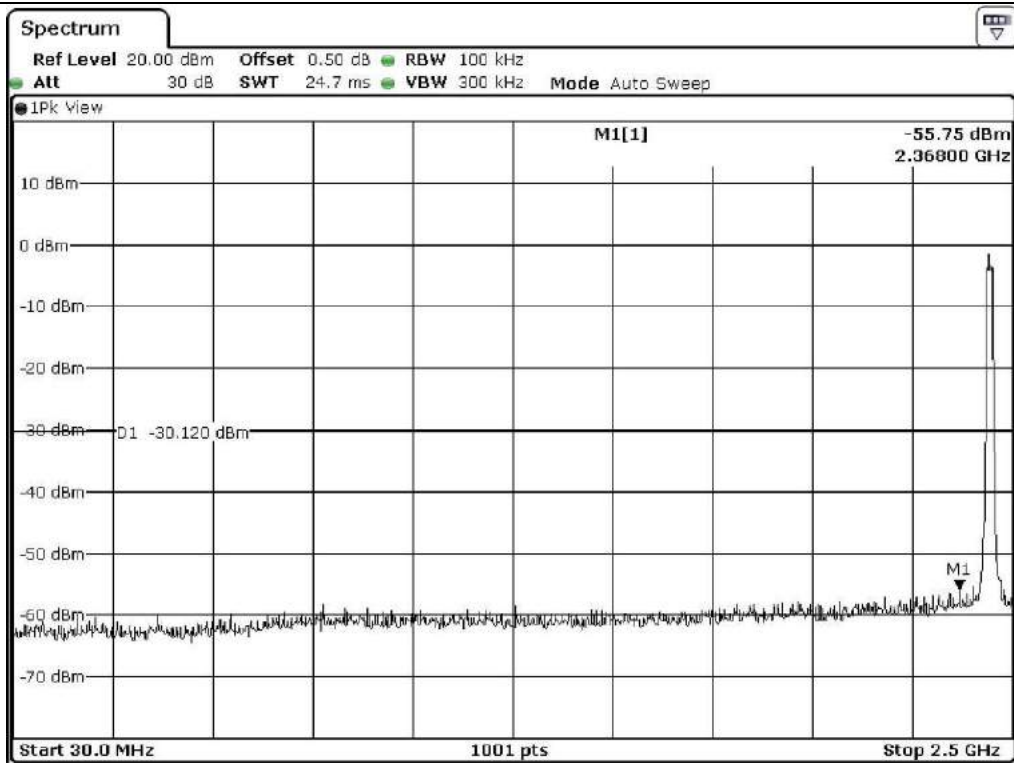


Middle Channel

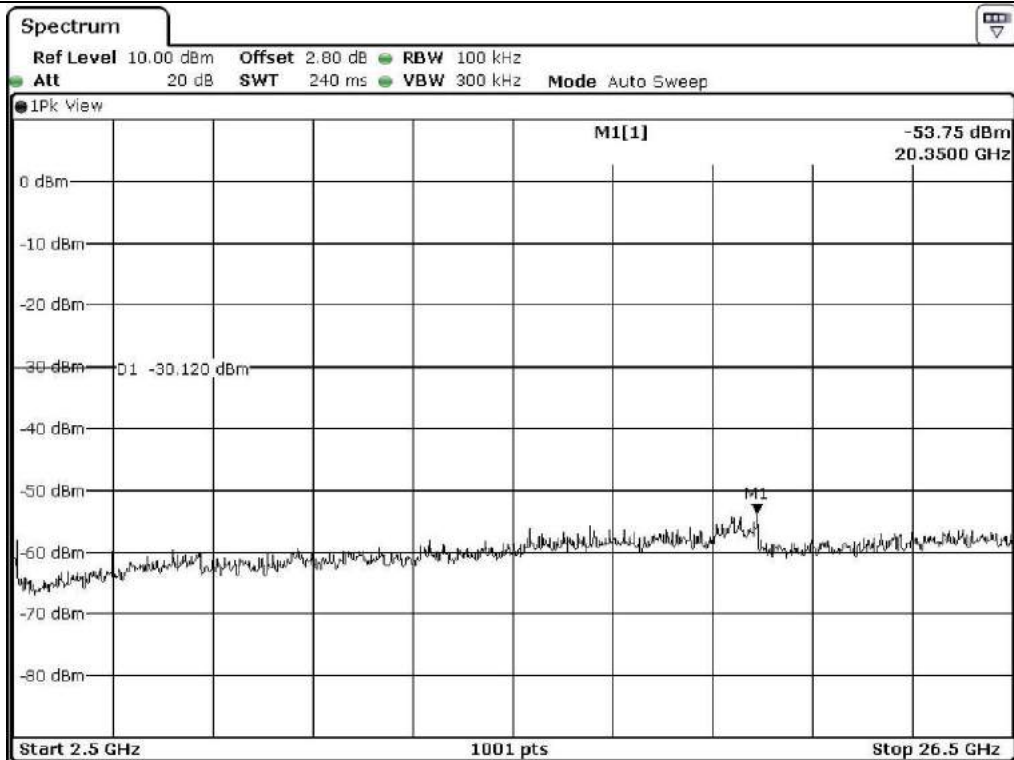

Middle Channel

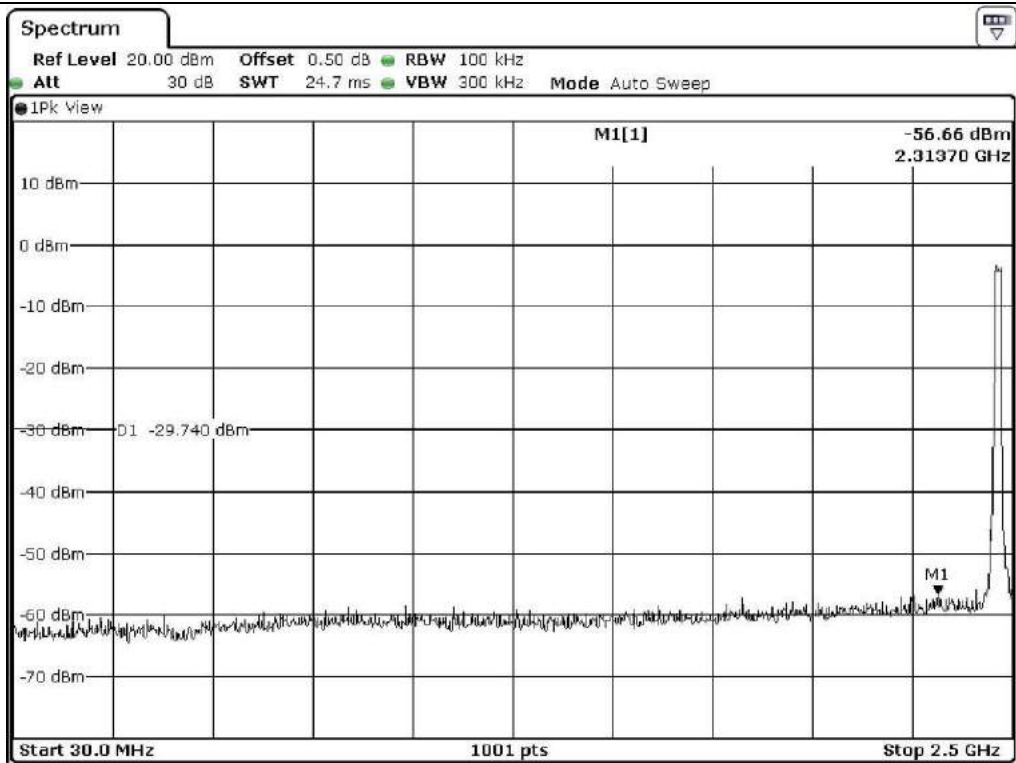


High Channel

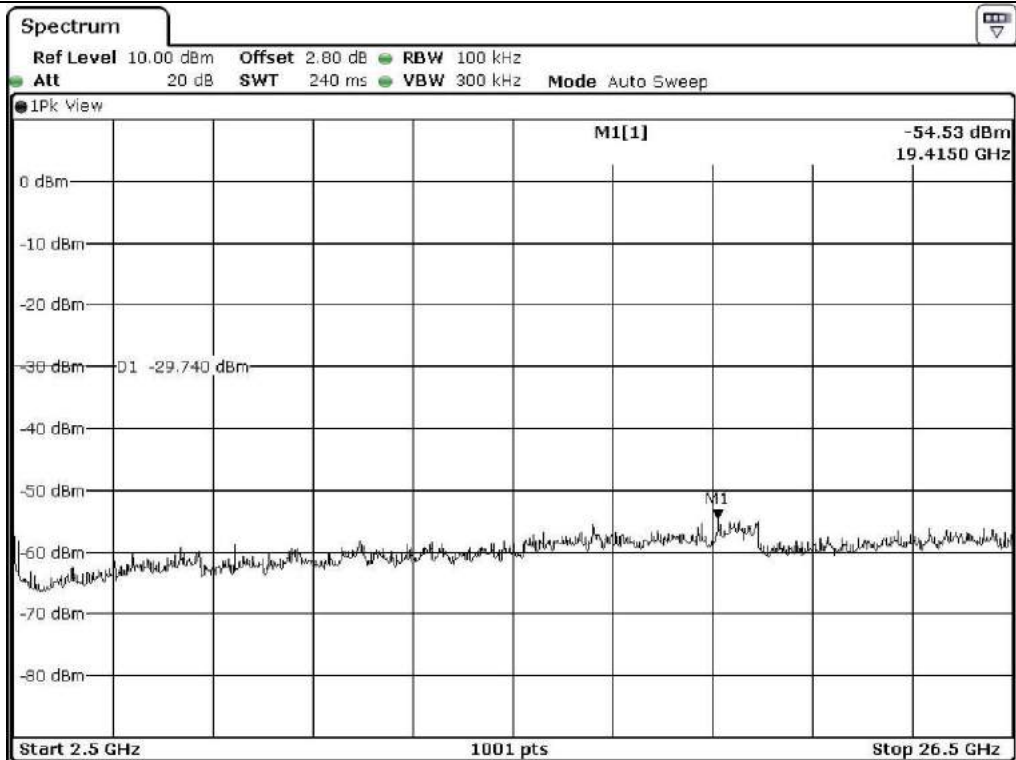


High Channel


9.5.3 Test data for 802.11n_HT20 WLAN Mode

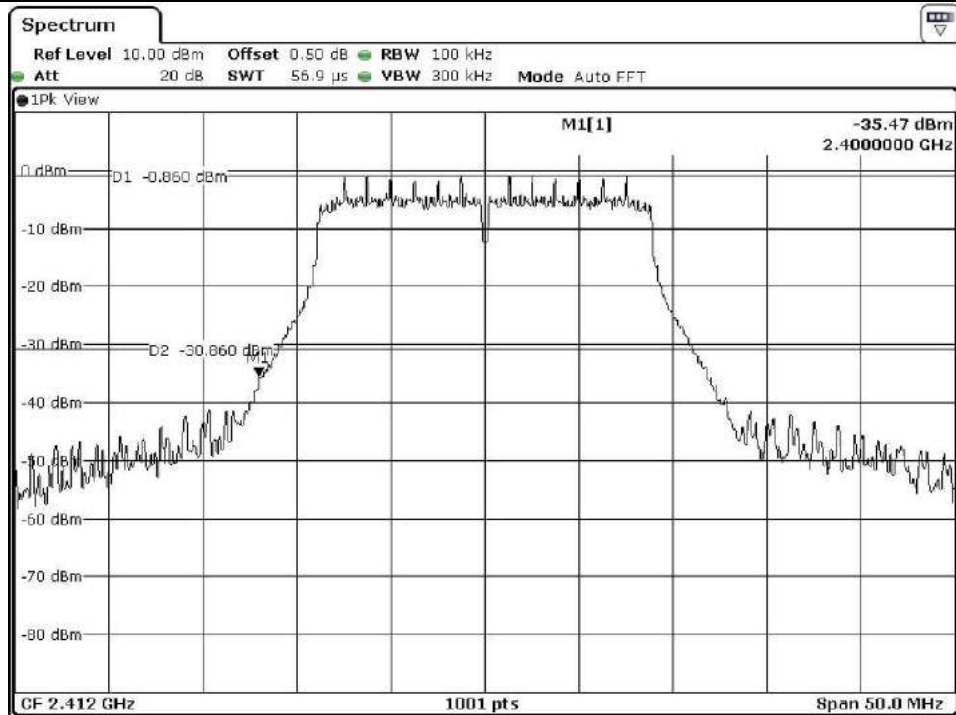


Low Channel

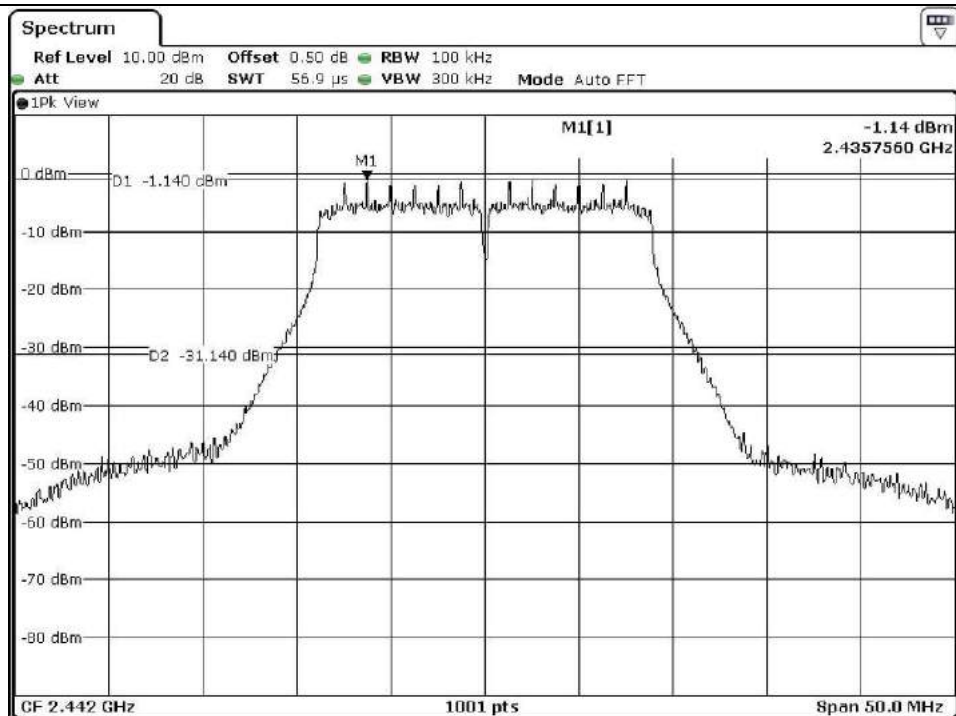


Middle Channel

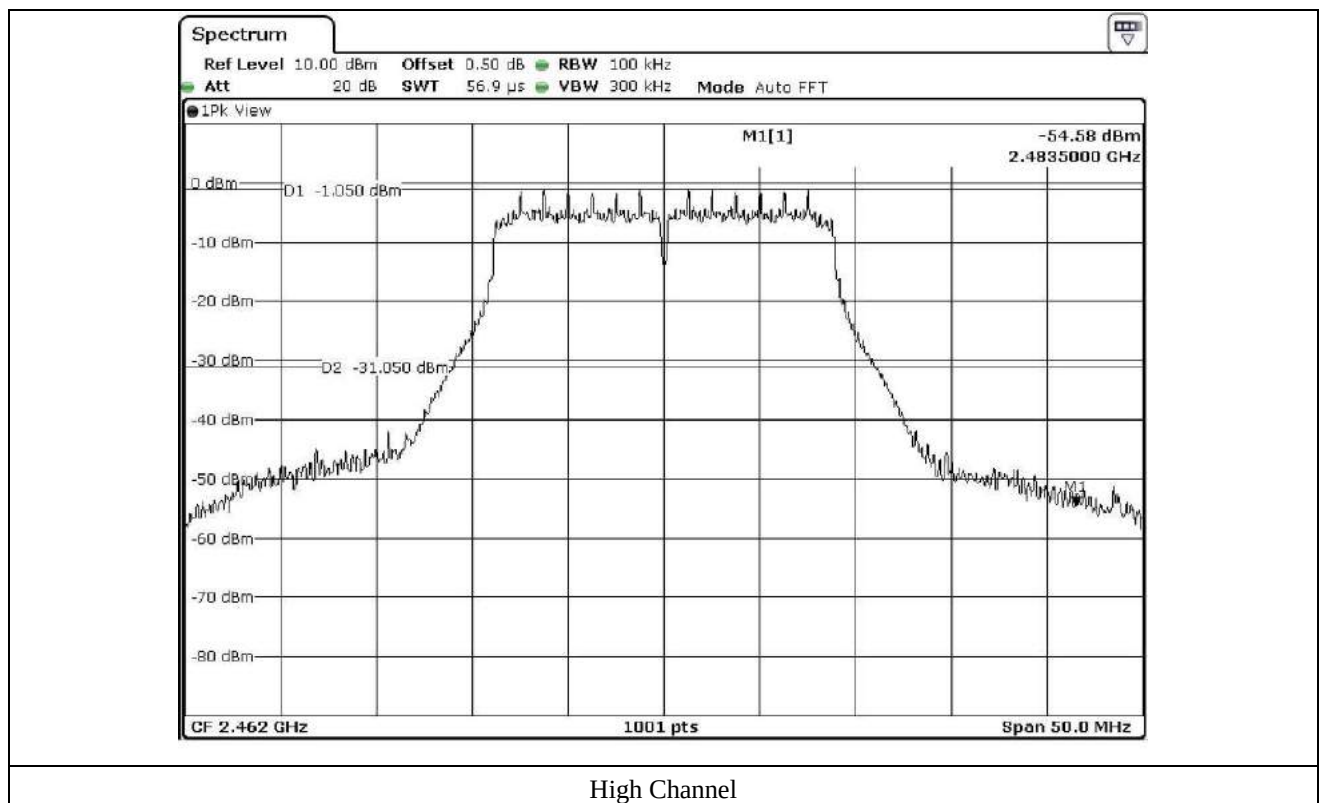


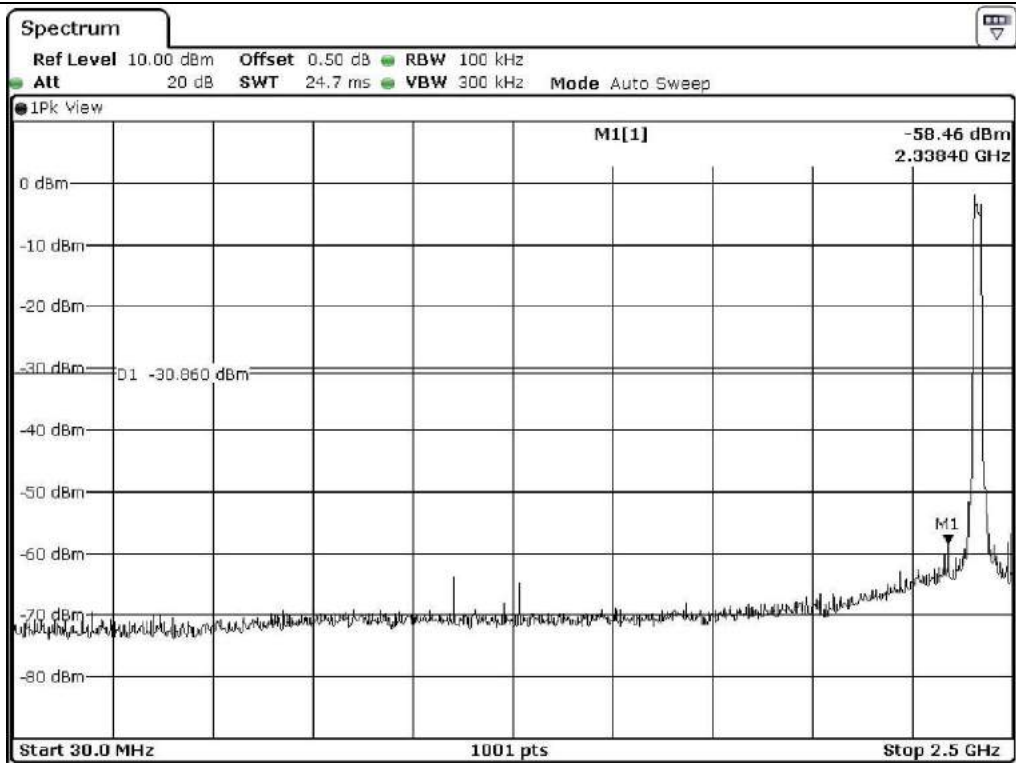


Low Channel

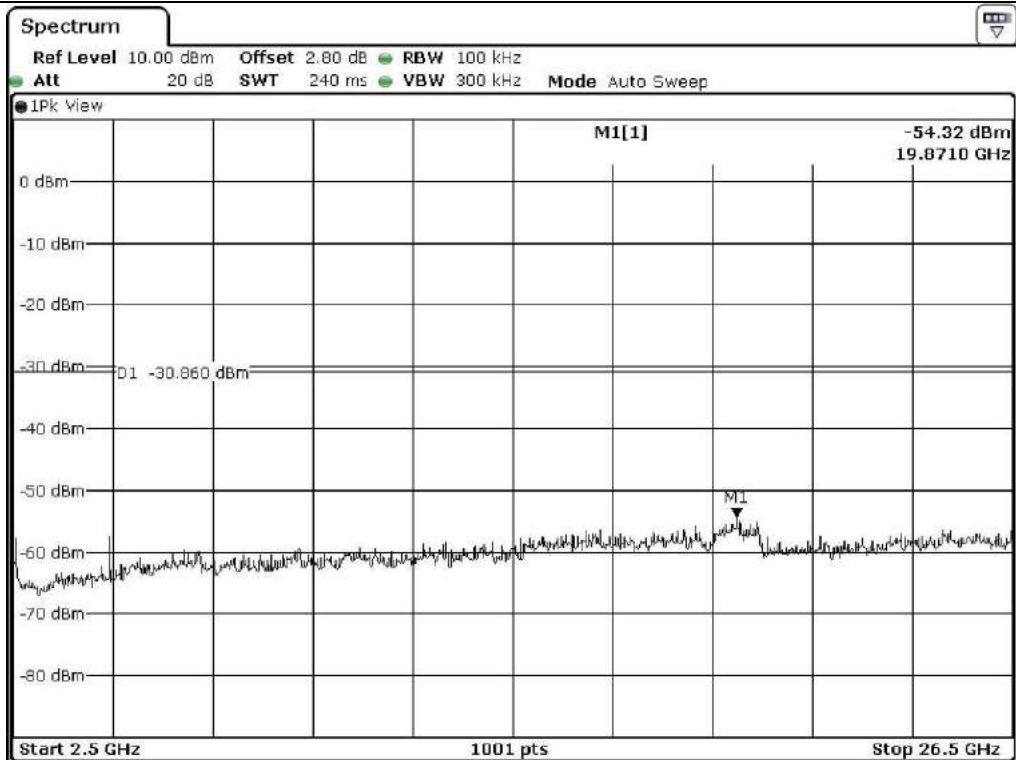


Low Channel

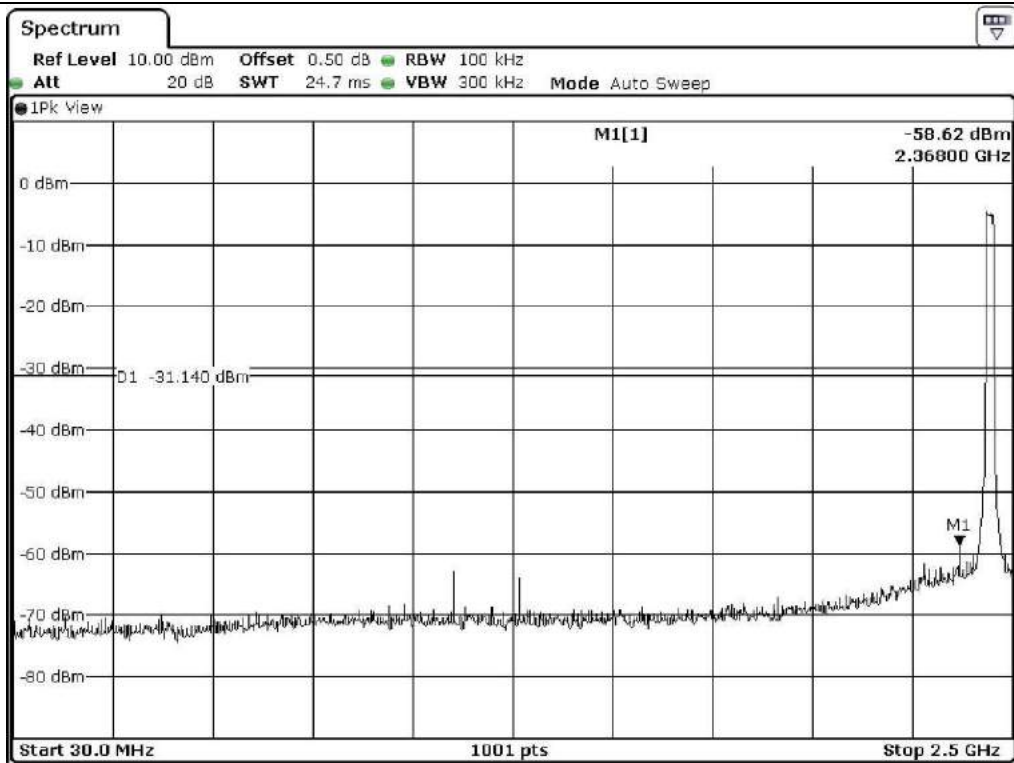


Middle Channel

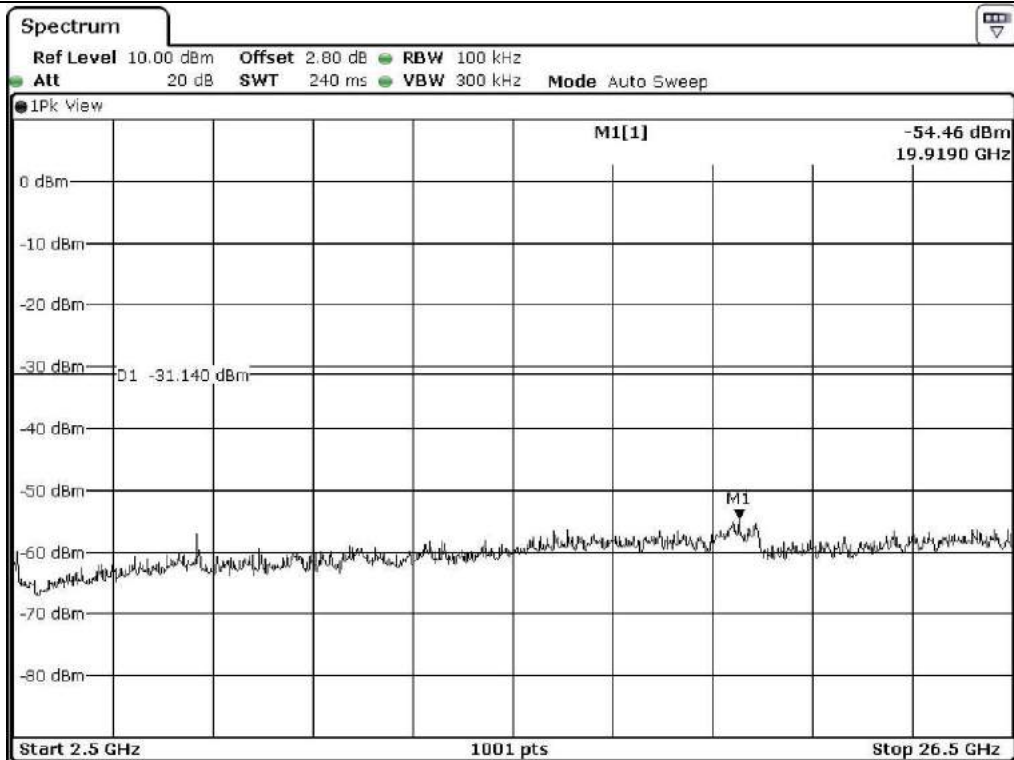

Middle Channel

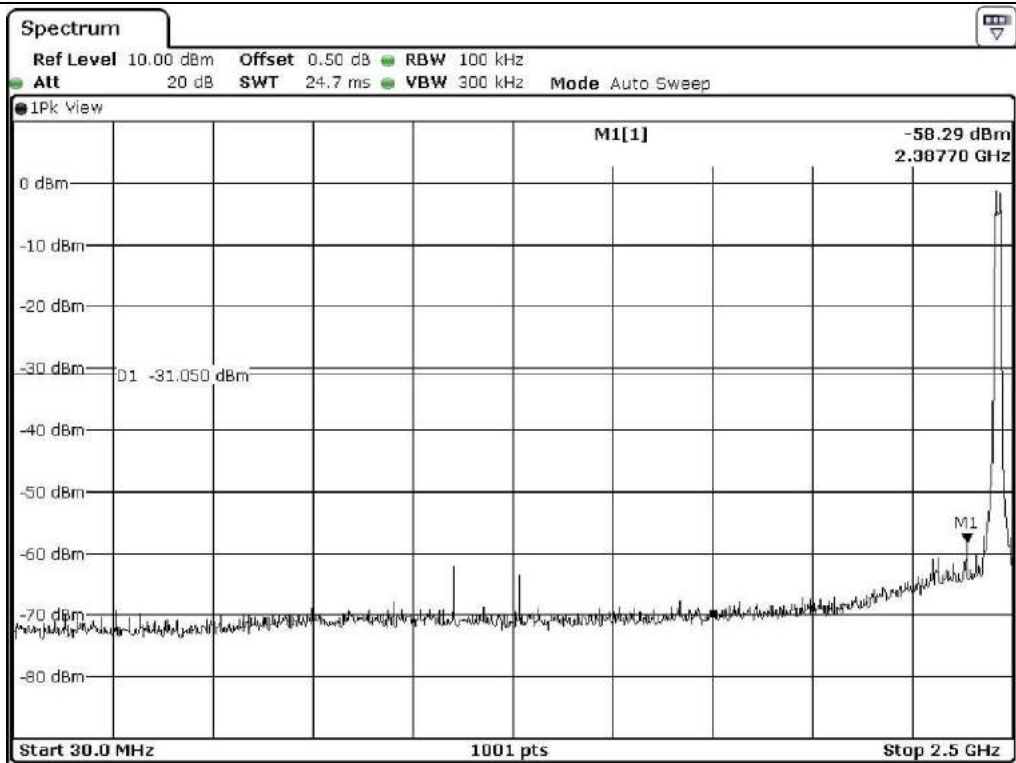


High Channel

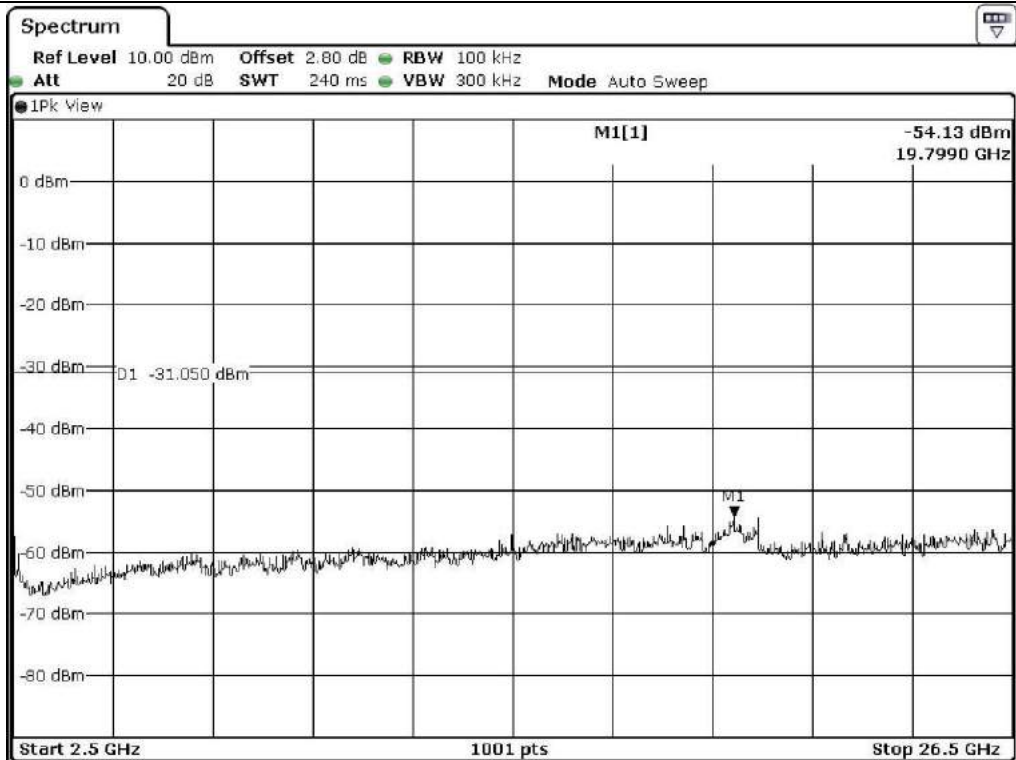


High Channel


9.5.4 Test data for 802.11n_HT40 WLAN Mode

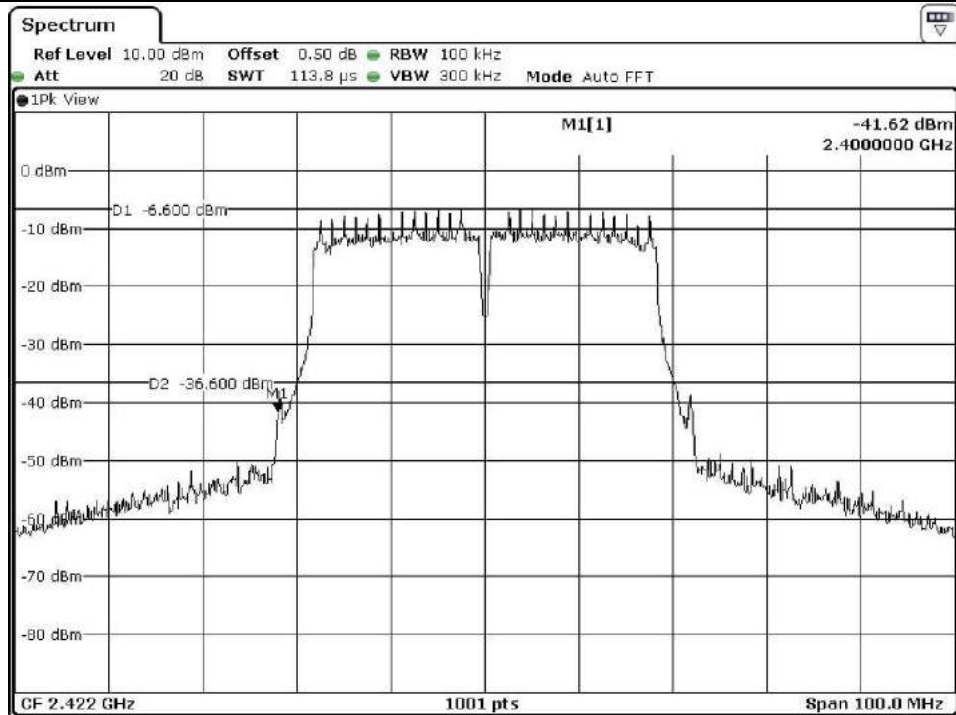


Low Channel

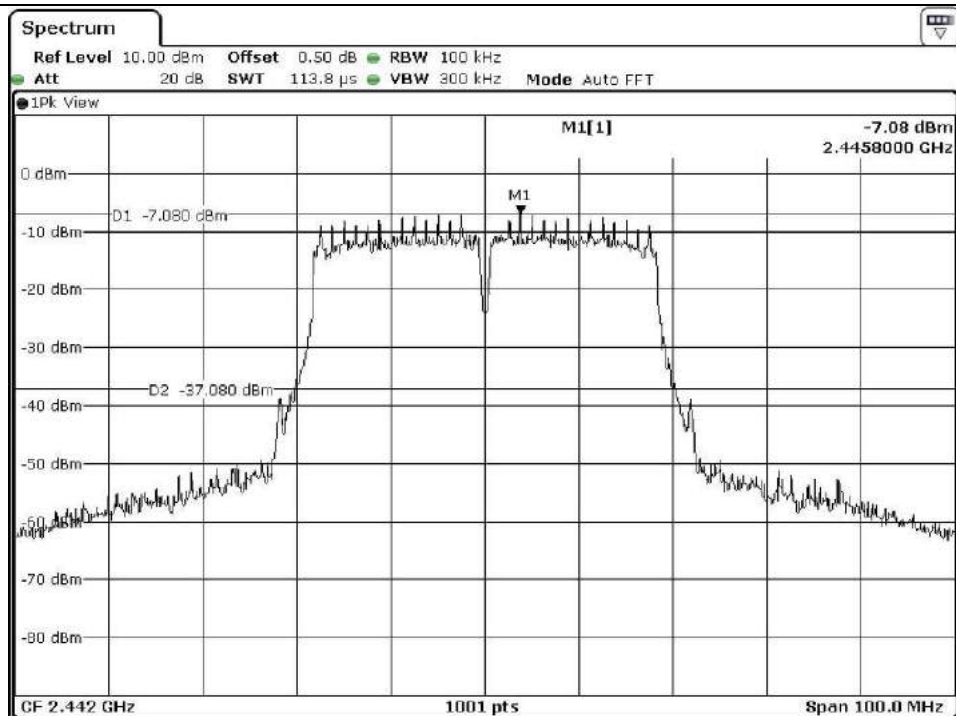


Middle Channel

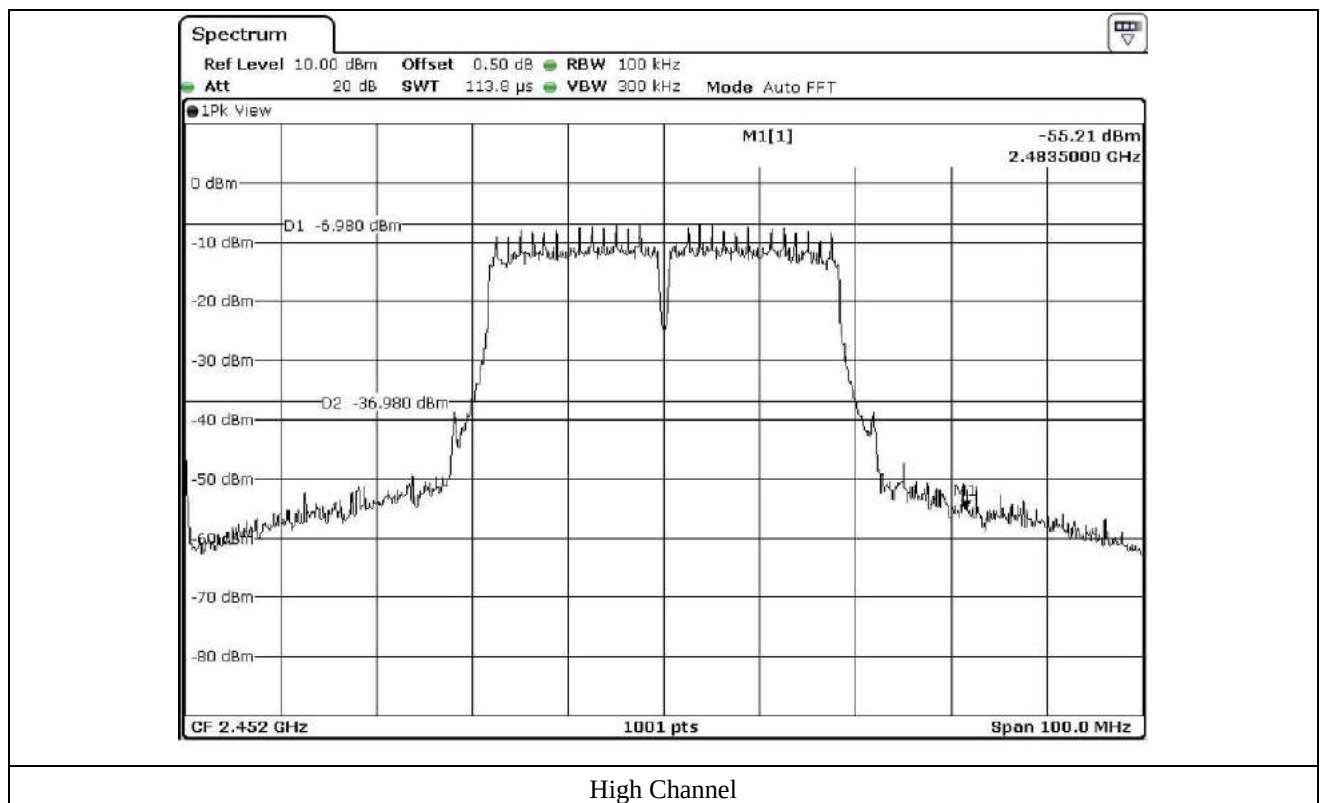


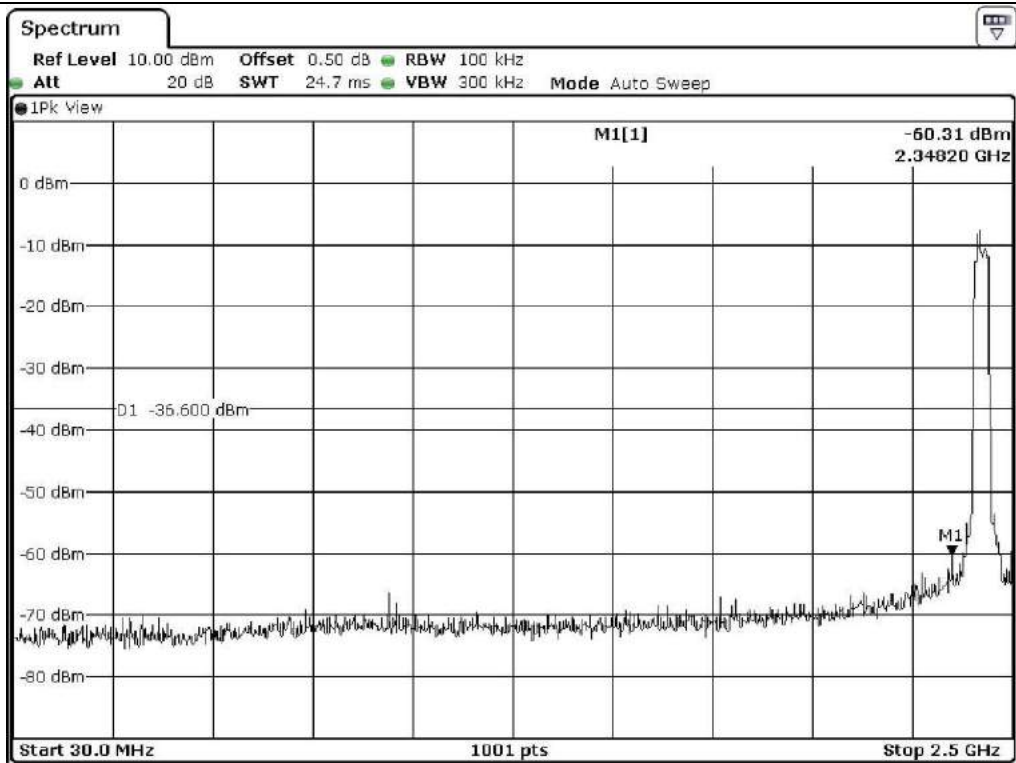


Low Channel

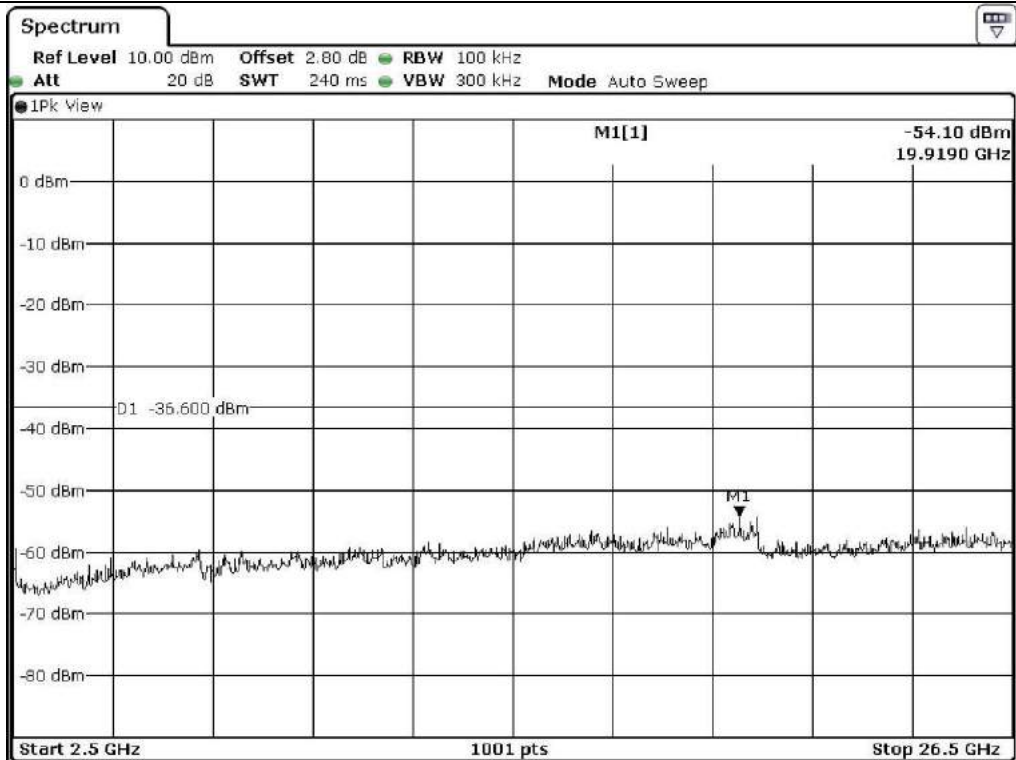


Low Channel

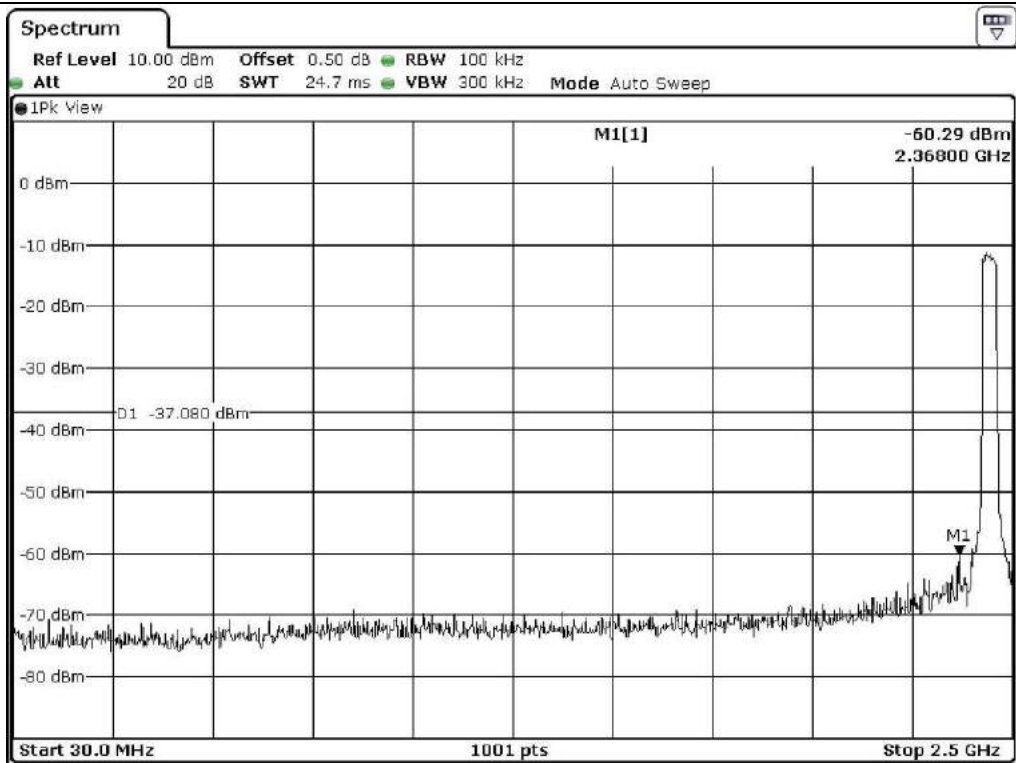


Middle Channel

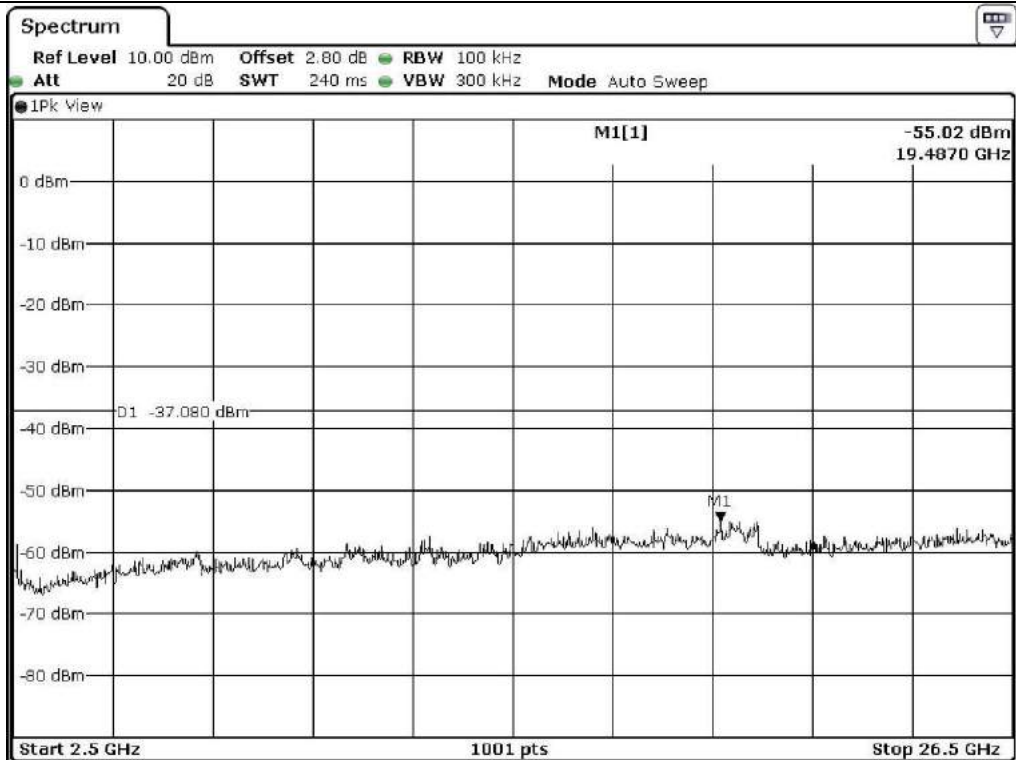

Middle Channel

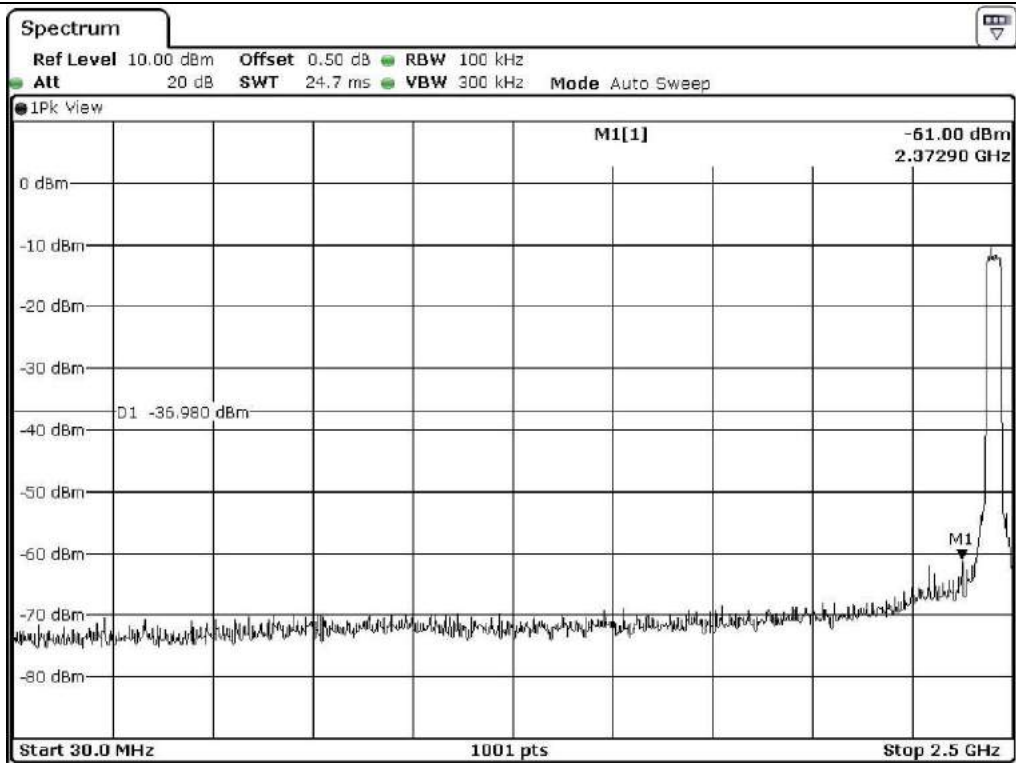

High Channel

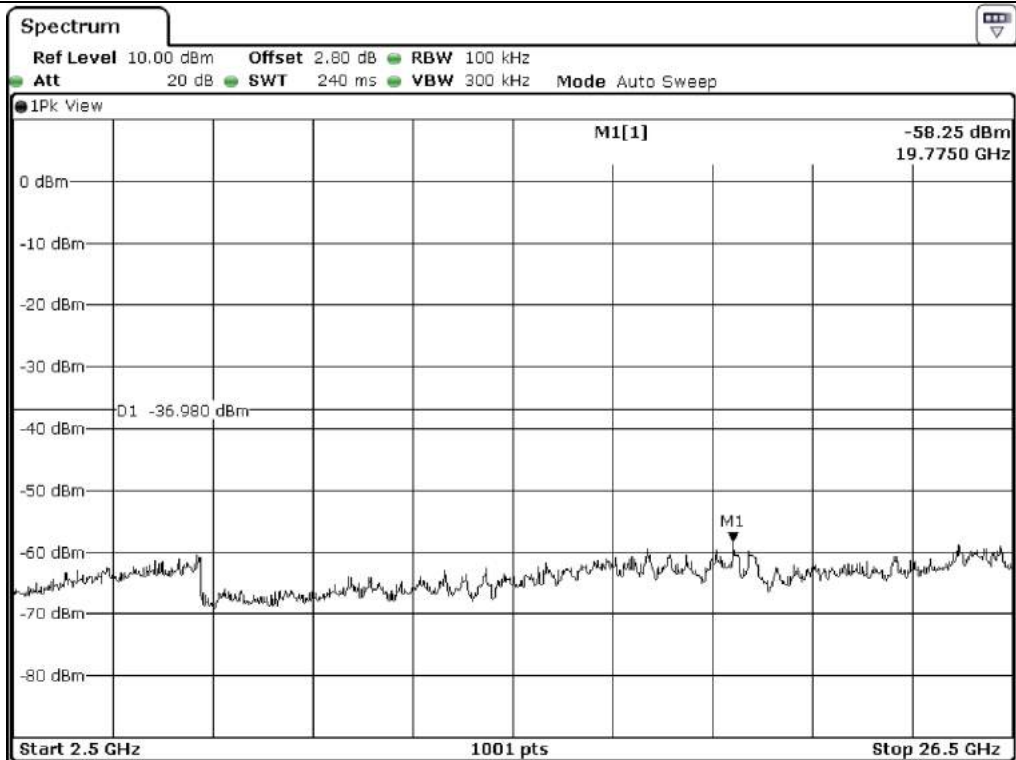

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 802.11b WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 376.15	45.55	Peak	H	26.94	9.20	34.76	46.93	74.00	27.07
	36.75	Average	H				38.13	54.00	15.87
	50.89	Peak	V				52.27	74.00	21.73
	45.61	Average	V				46.99	54.00	7.01
Test Data for High Channel									
2 387.88	43.71	Peak	H	27.47	9.49	35.51	45.16	74.00	28.84
	34.65	Average	H				36.10	54.00	17.90
	53.93	Peak	V				55.38	74.00	18.62
	45.80	Average	V				47.25	54.00	6.75

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)


Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain




Tested by: Hyung-Kwon, Oh / Assistant Manager

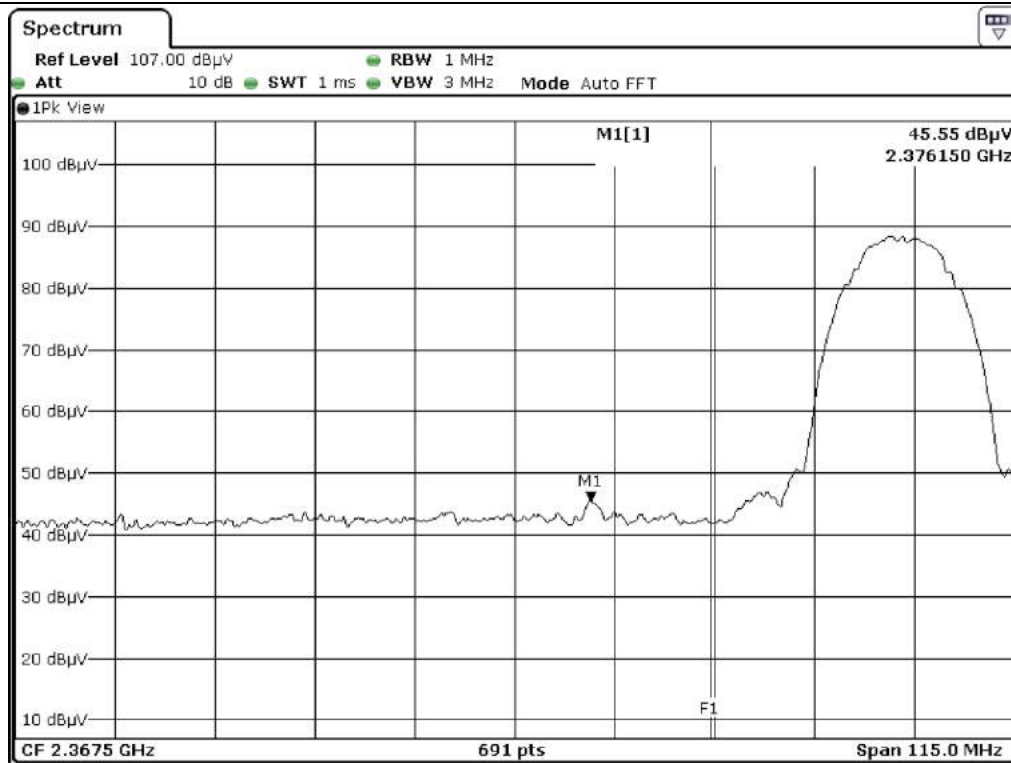


Low Channel_Peak_H

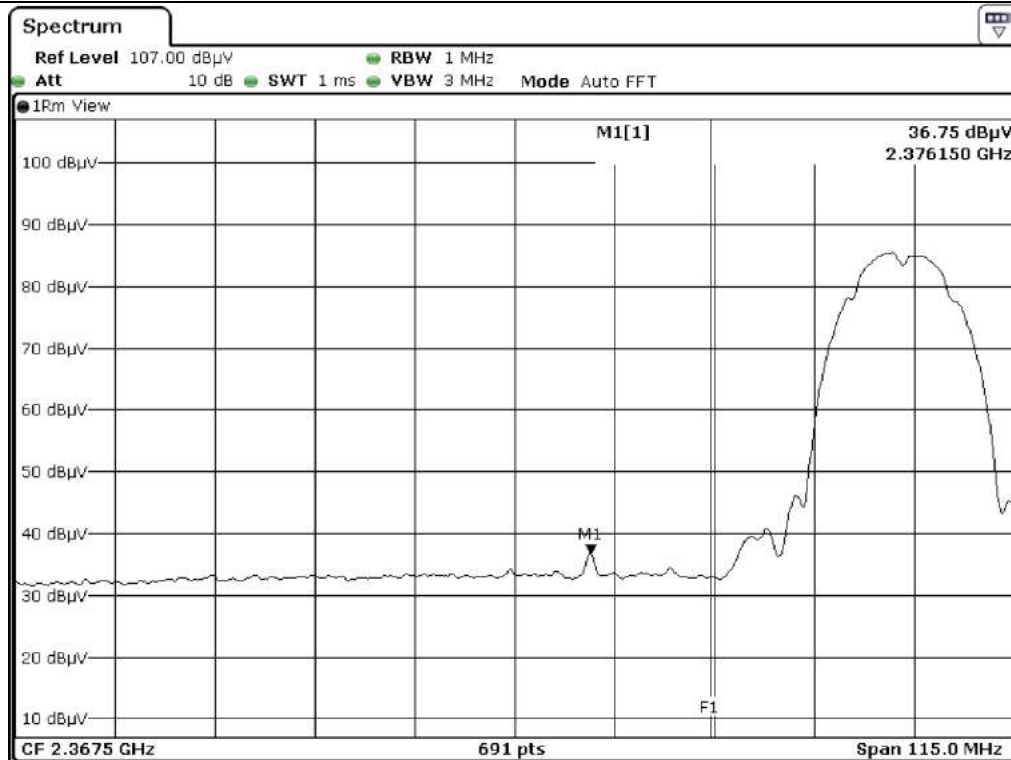


Low Channel_Average_H

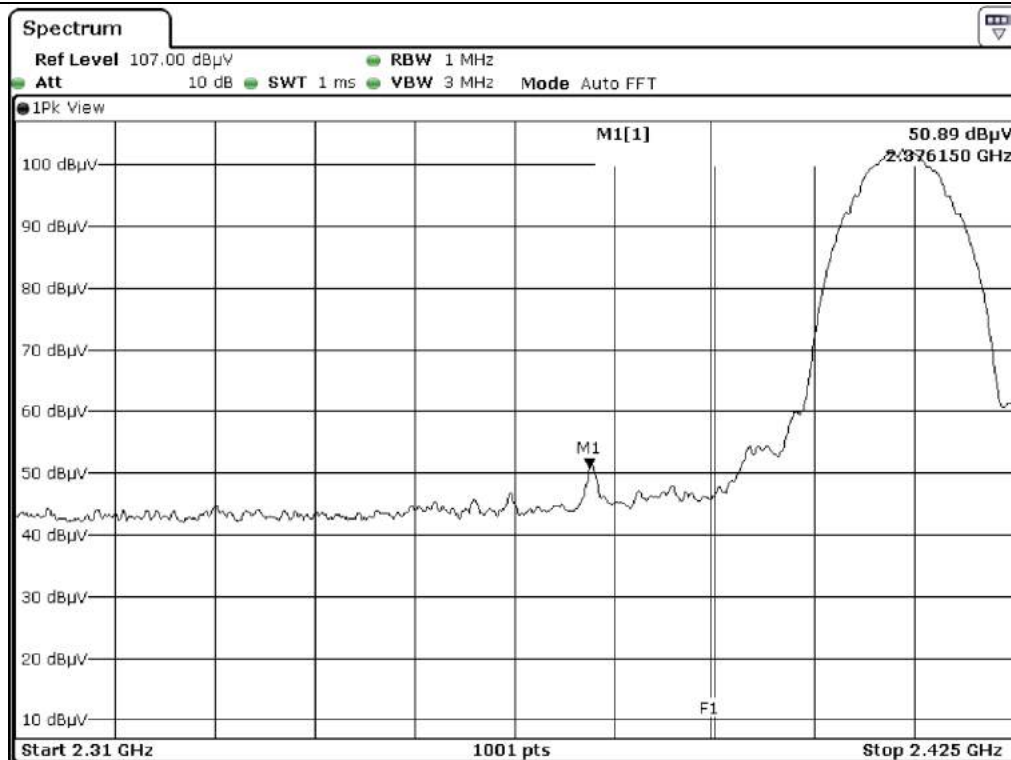

Low Channel_Peak_V

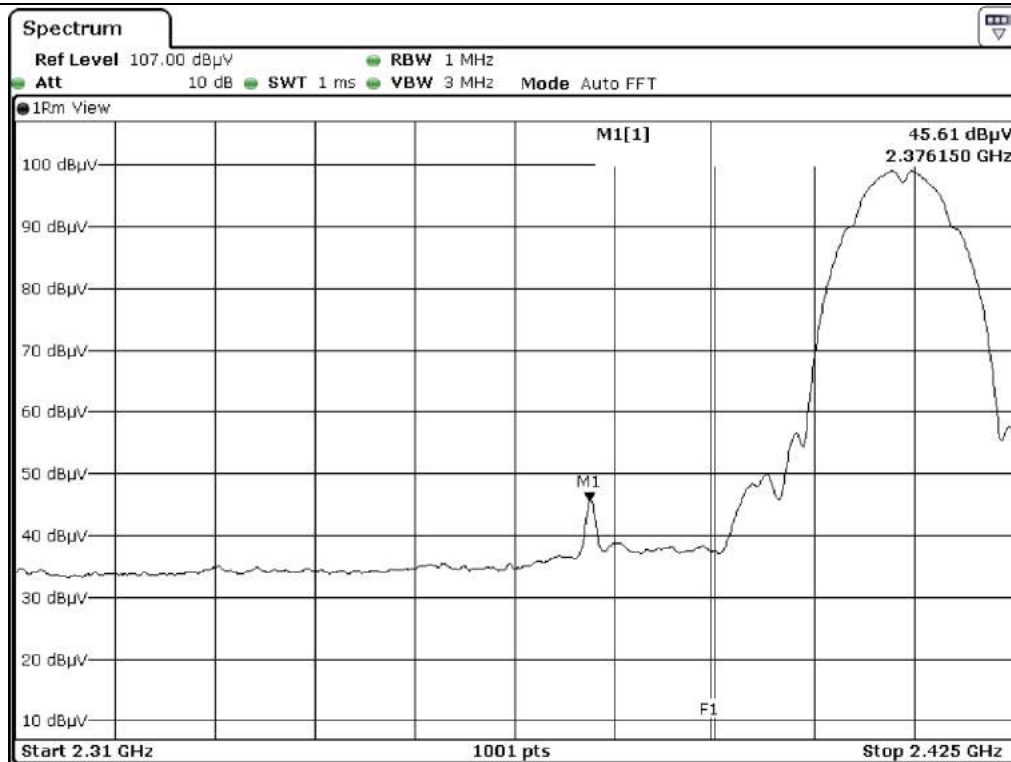

Low Channel_Average_V

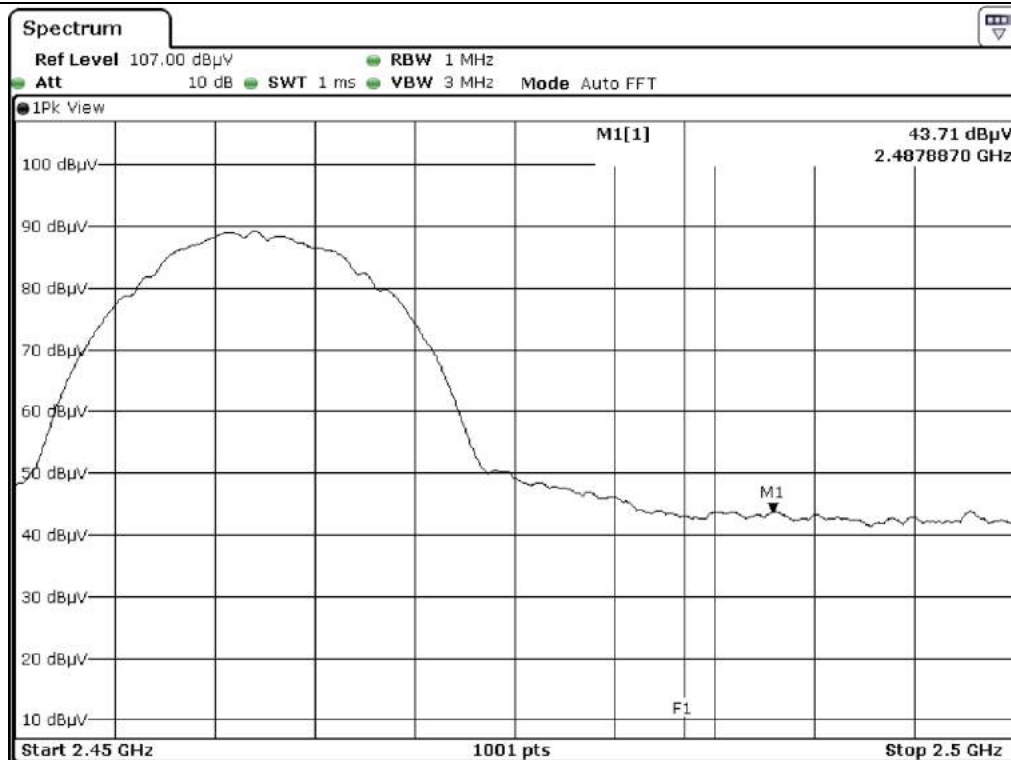


High Channel_Peak_H



High Channel_Average_H



High Channel_Peak_V

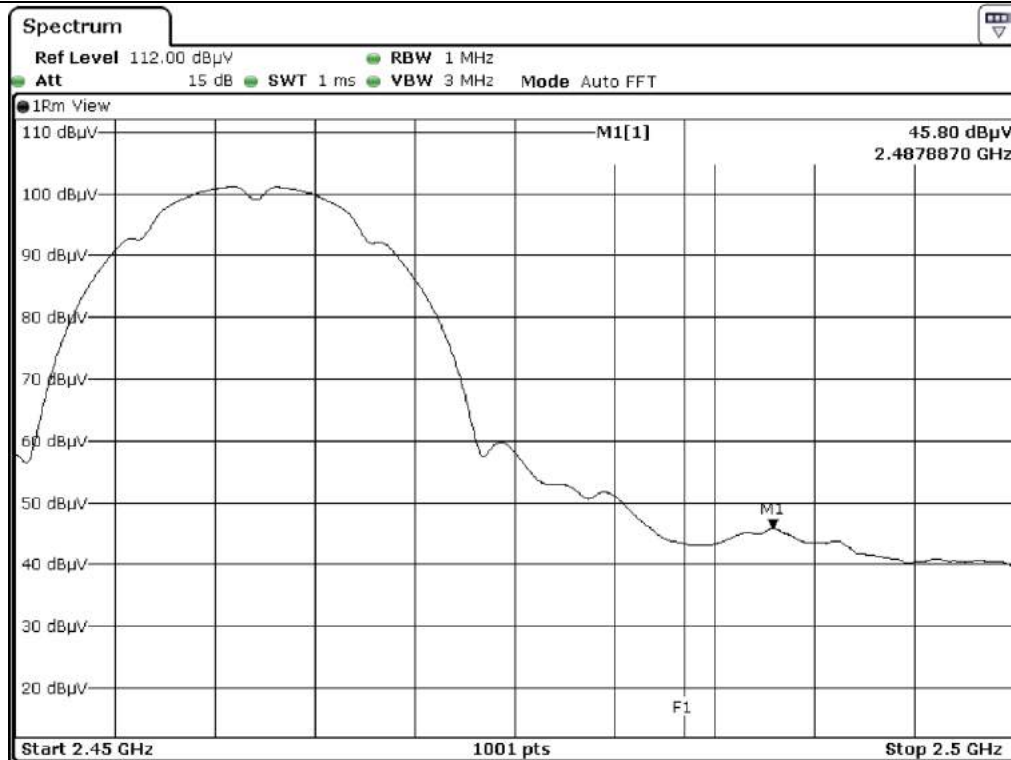

High Channel_Average_V

9.6.1.2 Test data for 802.11g WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	45.13	Peak	H	26.94	9.20	34.76	46.51	74.00	27.49
	34.01	Average	H				35.39	54.00	18.61
	54.63	Peak	V				56.01	74.00	17.99
	42.43	Average	V				43.81	54.00	10.19
Test Data for High Channel									
2 483.60	45.28	Peak	H	27.47	9.49	35.51	46.73	74.00	27.27
	33.52	Average	H				34.97	54.00	19.03
	58.35	Peak	V				59.80	74.00	14.20
	43.78	Average	V				45.23	54.00	8.77

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.1.3 Test data for 802.11n_HT20 WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	48.71	Peak	H	26.94	9.20	34.76	50.09	74.00	23.91
	36.49	Average	H				37.87	54.00	16.13
	62.27	Peak	V				63.65	74.00	10.35
	47.02	Average	V				48.40	54.00	5.60
Test Data for High Channel									
2 483.80	47.44	Peak	H	27.47	9.49	35.51	48.89	74.00	25.11
	37.00	Average	H				38.45	54.00	15.55
	59.07	Peak	V				60.52	74.00	13.48
	47.13	Average	V				48.58	54.00	5.42

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.1.4 Test data for 802.11n_HT40 WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 388.75	49.47	Peak	H	26.94	9.20	34.76	50.85	74.00	23.15
	37.15	Average	H				38.53	54.00	15.47
	55.23	Peak	V				56.61	74.00	17.39
	43.55	Average	V				44.93	54.00	9.07
Test Data for High Channel									
2 483.50	47.43	Peak	H	27.47	9.49	35.51	48.88	74.00	25.12
	37.50	Average	H				38.95	54.00	15.05
	52.87	Peak	V				54.32	74.00	19.68
	43.36	Average	V				44.81	54.00	9.19

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.2 Radiated Emission which fall in the Band Edge

9.6.2.2 Test data for 802.11b WLAN Mode

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- . Video bandwidth : 300 kHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : > 98 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	46.19	Peak	H	27.20	9.35	34.81	47.93	74.00	26.07
	37.70	Average	H				39.44	54.00	14.56
	56.40	Peak	V				58.14	74.00	15.86
	47.93	Average	V				49.67	54.00	4.33

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)


Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain




Tested by: Hyung-Kwon, Oh / Assistant Manager

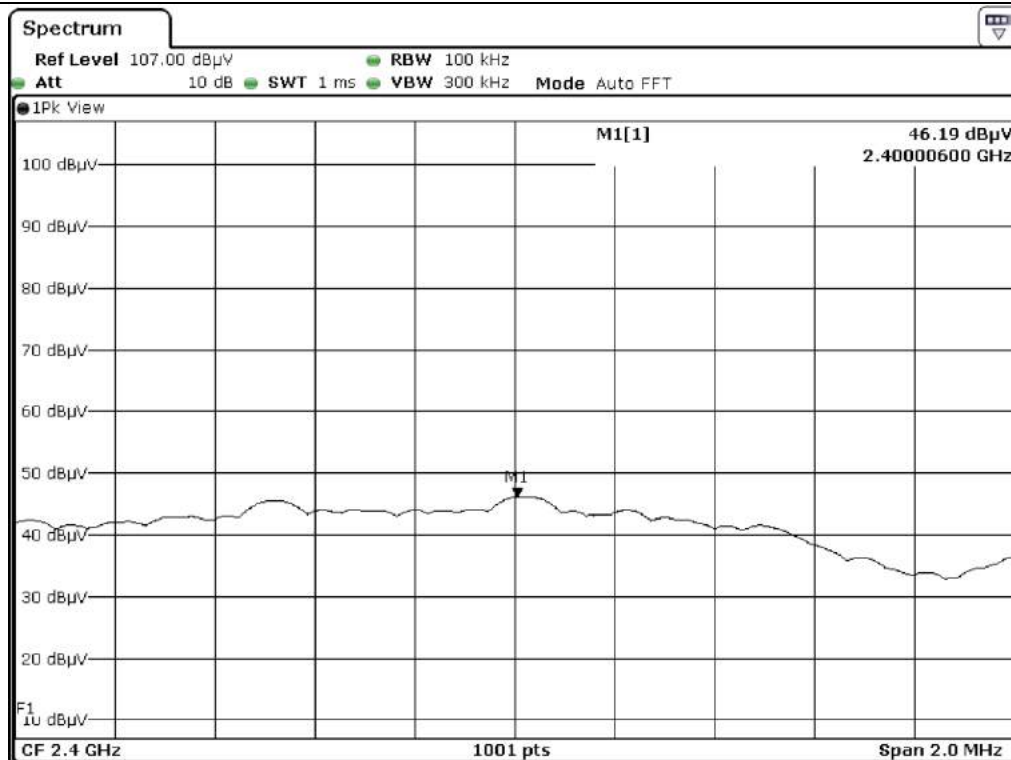


Low Channel_Peak_H

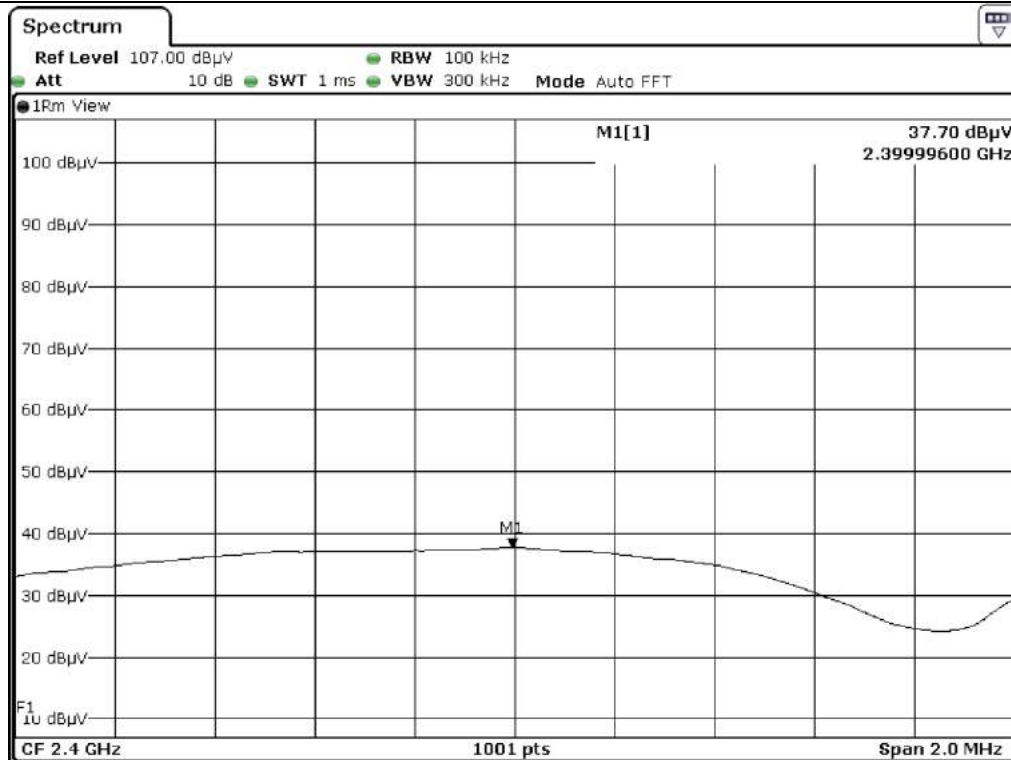

Low Channel_Average_H

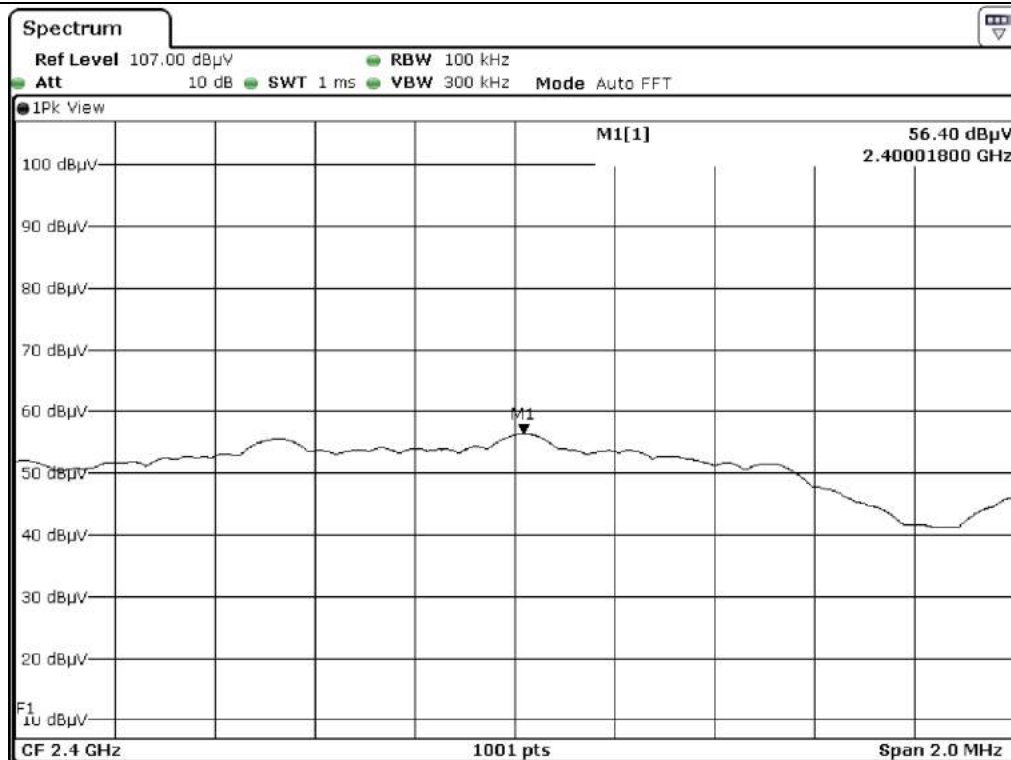

Low Channel_Peak_V

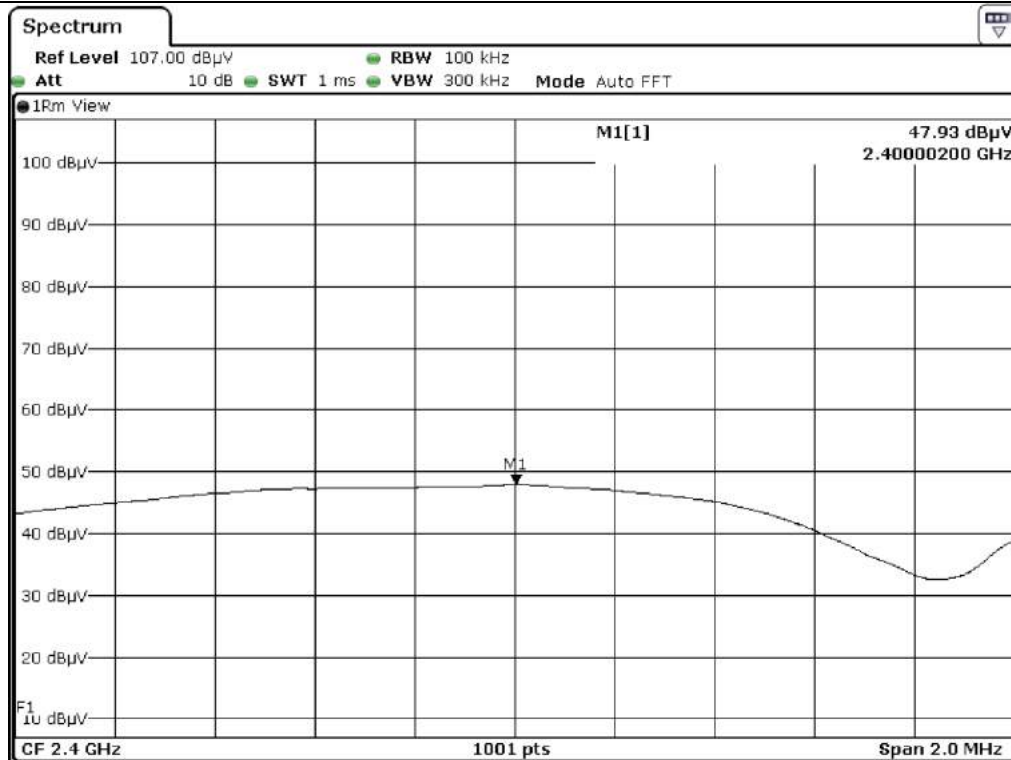

Low Channel_Average_V

9.6.2.2 Test data for 802.11g WLAN Mode

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- . Video bandwidth : 300 kHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : > 98 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	49.27	Peak	H	27.20	9.35	34.81	51.01	74.00	22.99
	39.65	Average	H				41.39	54.00	12.61
	62.23	Peak	V				63.97	74.00	10.03
	49.47	Average	V				51.21	54.00	2.79

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.2.3 Test data for 802.11n_HT20 WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- Video bandwidth : 300 kHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	50.45	Peak	H	27.20	9.35	34.81	52.19	74.00	21.81
	41.83	Average	H				43.57	54.00	10.43
	61.27	Peak	V				63.01	74.00	10.99
	47.77	Average	V				49.51	54.00	4.49

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.2.4 Test data for 802.11n_HT40 WLAN Mode

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- . Video bandwidth : 300 kHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : > 98 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	44.85	Peak	H	27.20	9.35	34.81	46.59	74.00	27.41
	38.52	Average	H				40.26	54.00	13.74
	52.21	Peak	V				53.95	74.00	20.05
	46.15	Average	V				47.89	54.00	6.11

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.3 Spurious & Harmonic Radiated Emission

9.6.3.1 Test data for 802.11b WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	41.76	Peak	H	30.84	12.31	35.74	49.17	74.00	24.83
	29.55	Average	H				36.96	54.00	17.04
	40.76	Peak	V				48.17	74.00	25.83
	29.51	Average	V				36.92	54.00	17.08
Test Data for Middle Channel									
4 884.00	39.20	Peak	H	30.01	12.43	35.80	45.84	74.00	28.16
	28.62	Average	H				35.26	54.00	18.74
	39.52	Peak	V				46.16	74.00	27.84
	28.67	Average	V				35.31	54.00	18.69
Test Data for High Channel									
4 924.00	39.49	Peak	H	31.15	12.81	35.96	47.49	74.00	26.51
	28.21	Average	H				36.21	54.00	17.79
	39.64	Peak	V				47.64	74.00	26.36
	28.26	Average	V				36.26	54.00	17.74


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Assistant Manager

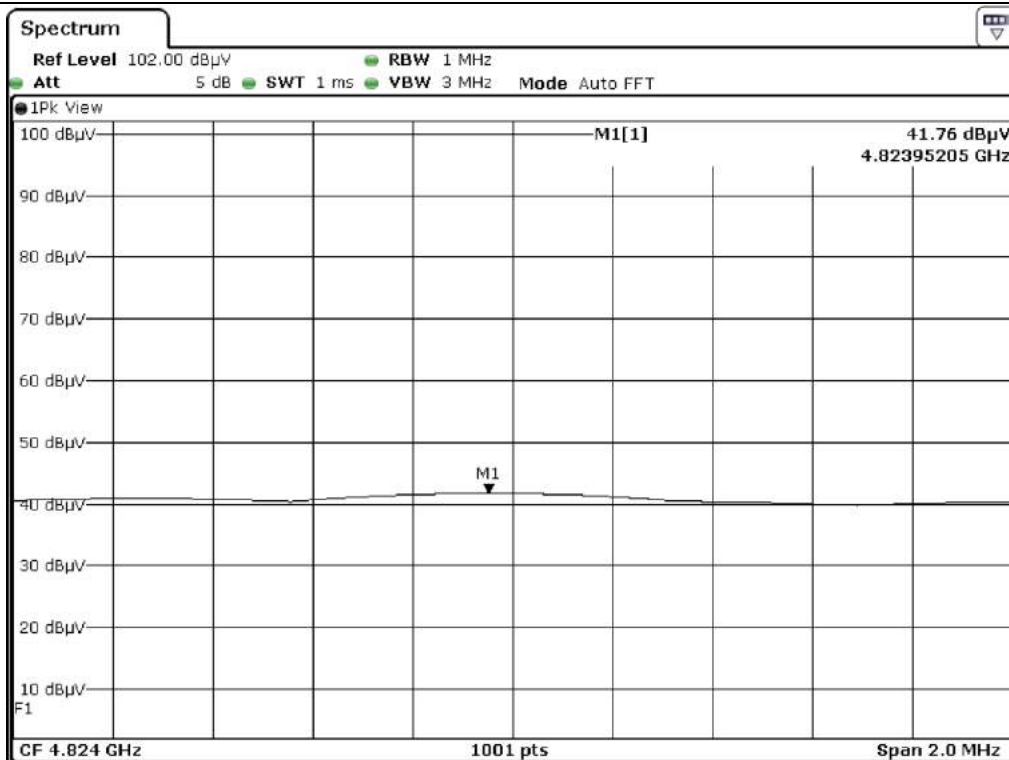


Low Channel_Peak_H

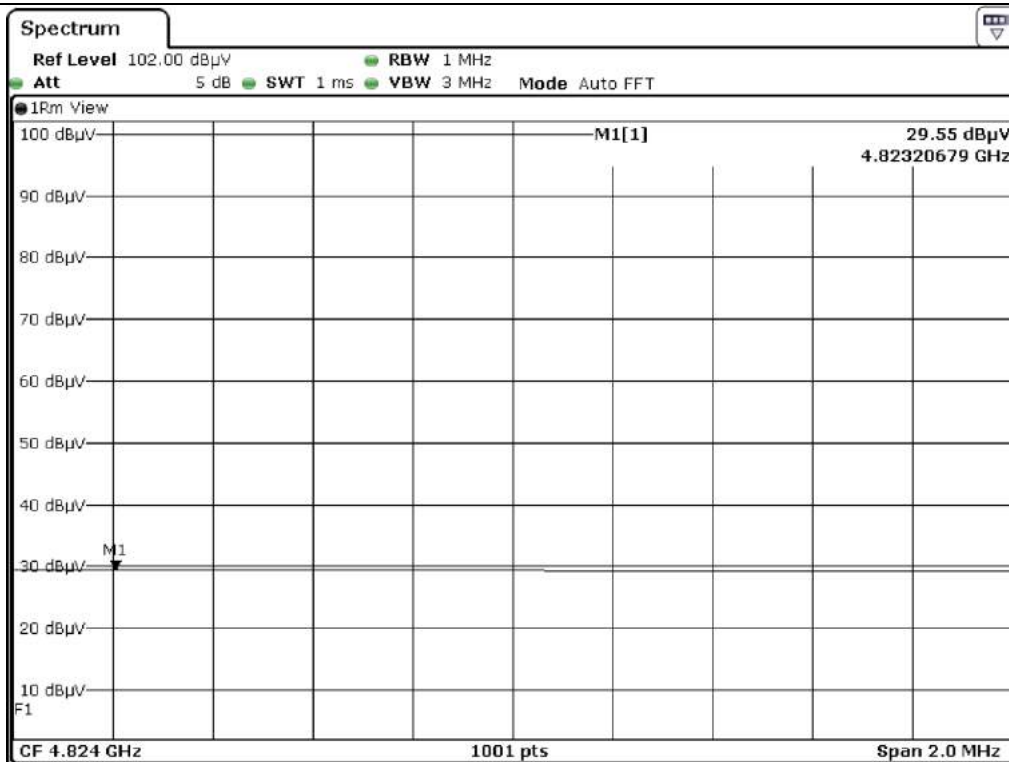


Low Channel_Average_H

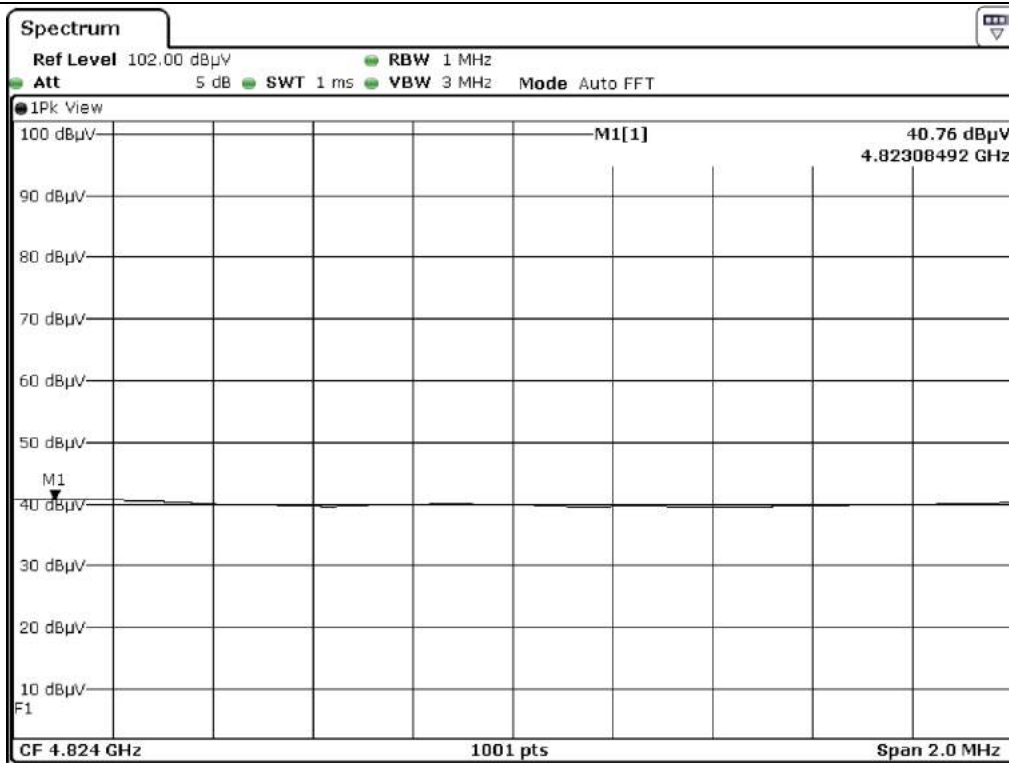


Low Channel_Peak_V

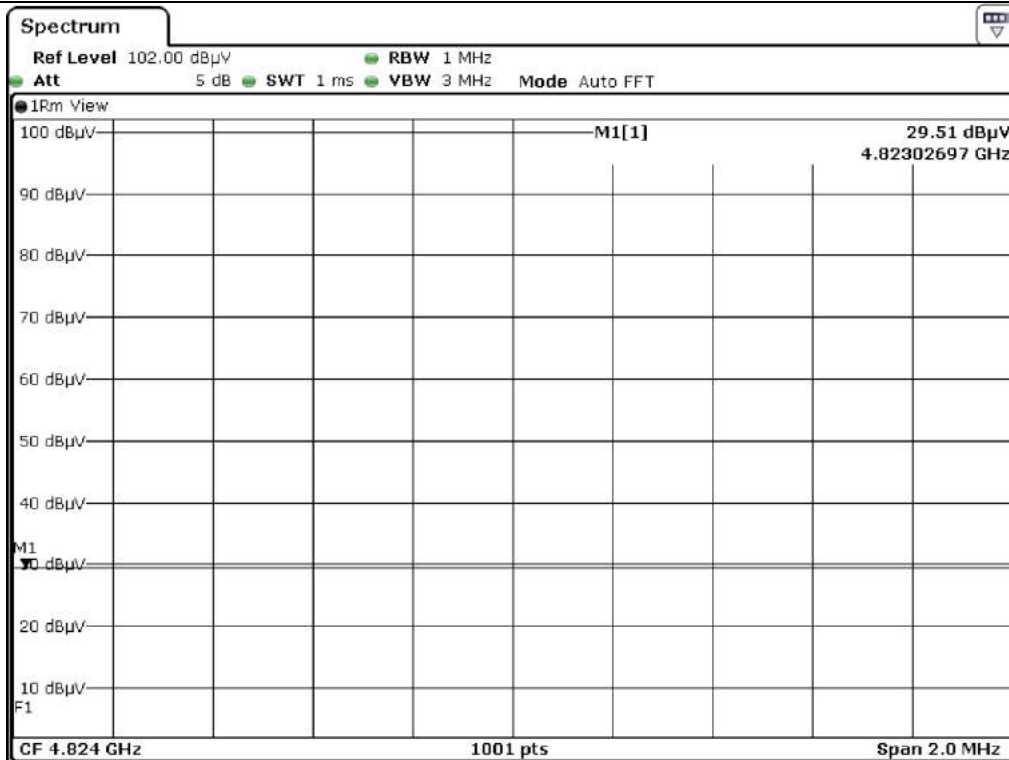


Low Channel_Average_V

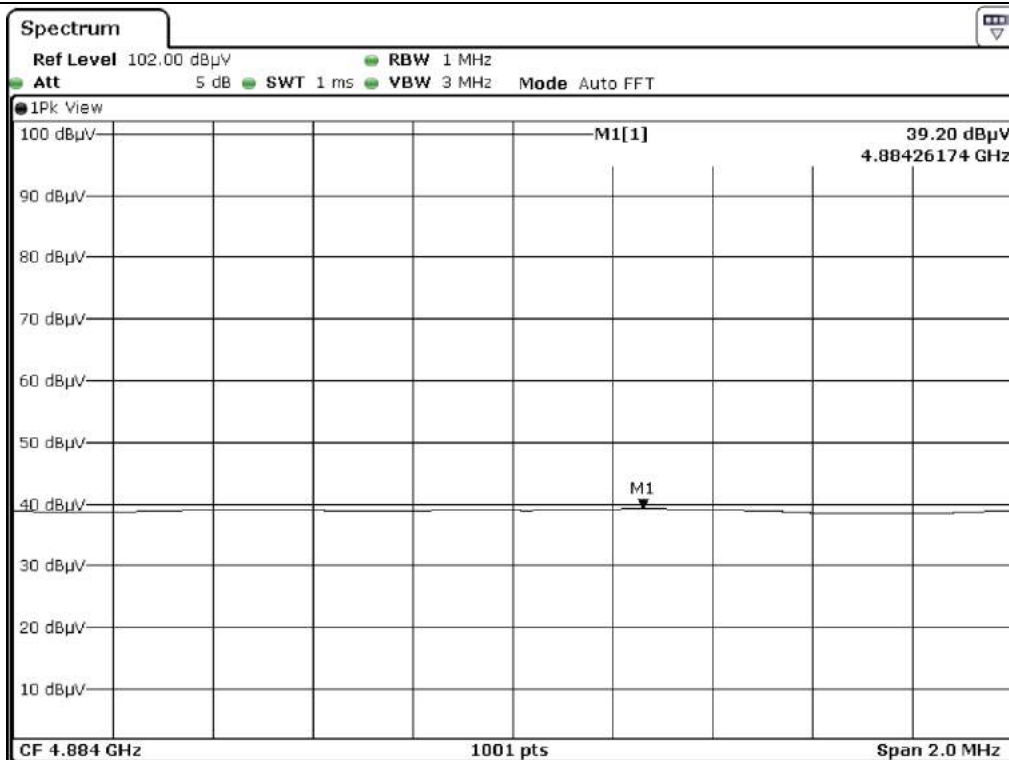


Middle Channel_Peak_H

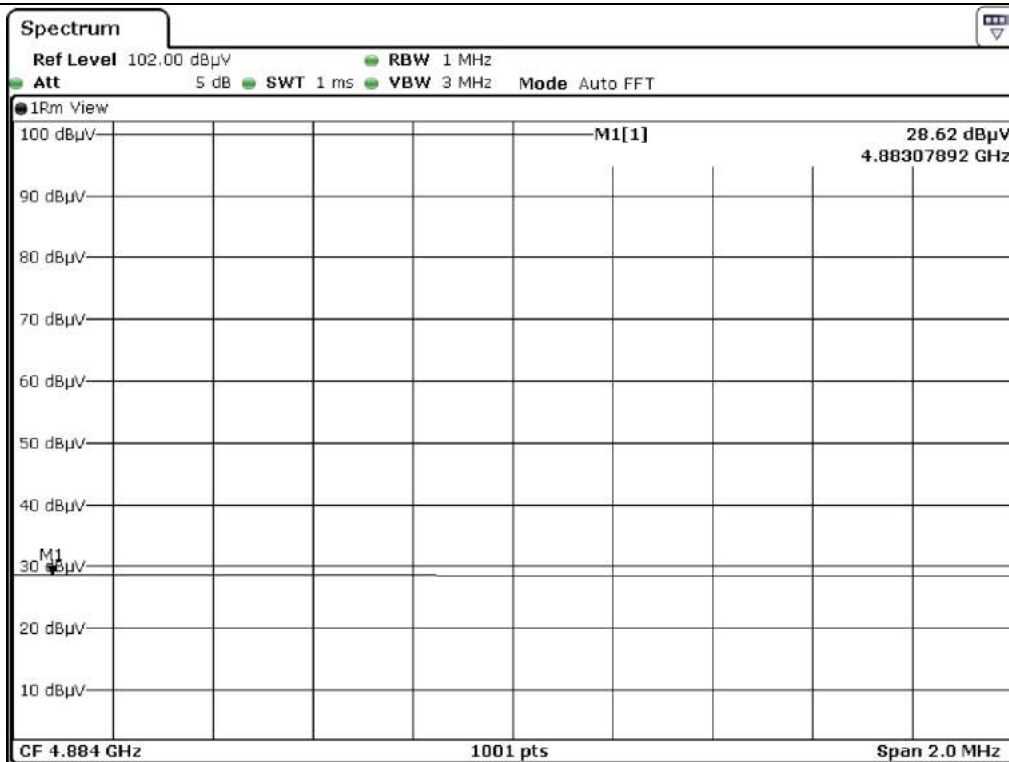


Middle Channel_Average_H

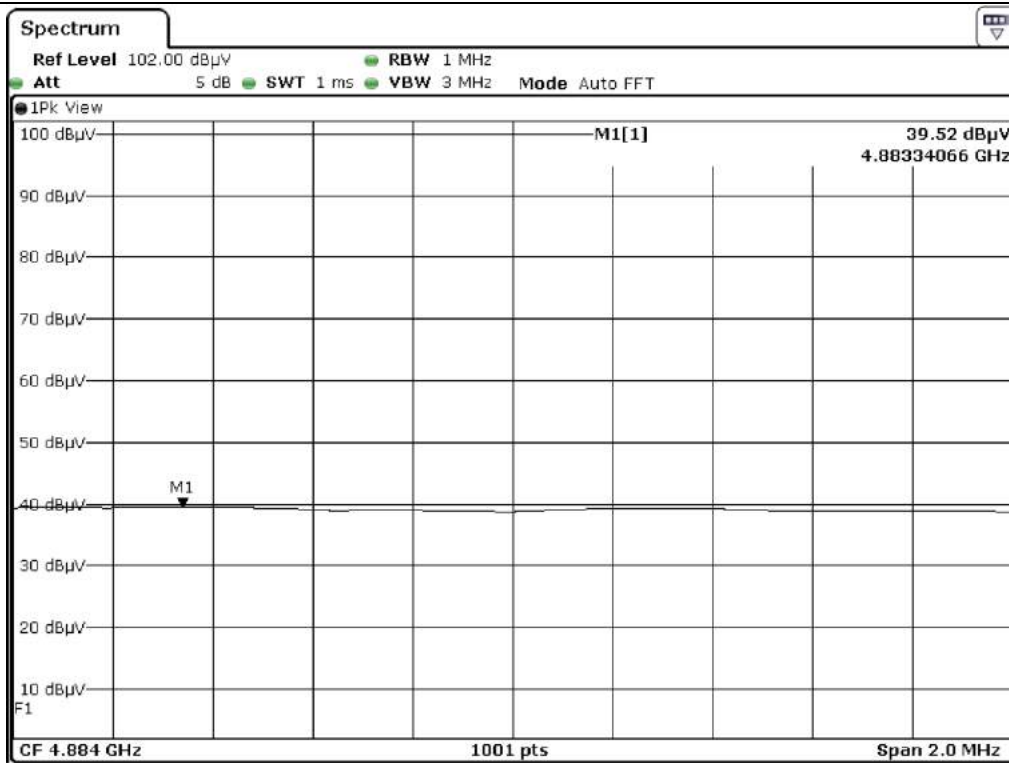


Middle Channel_Peak_V

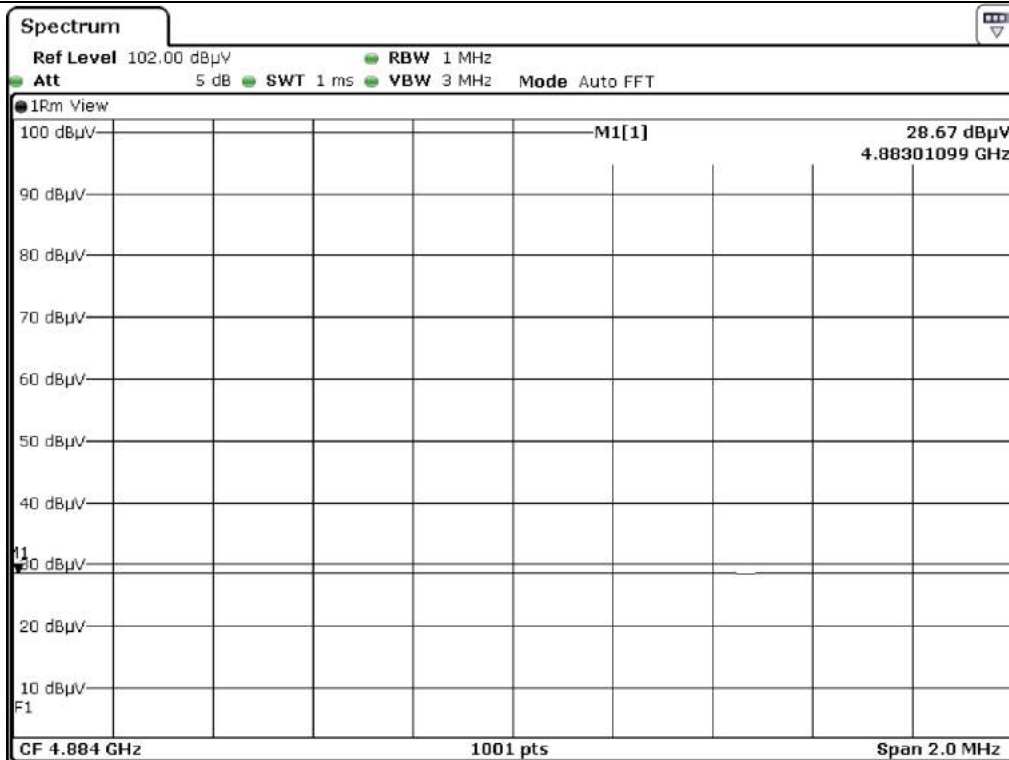


Middle Channel_Average_V

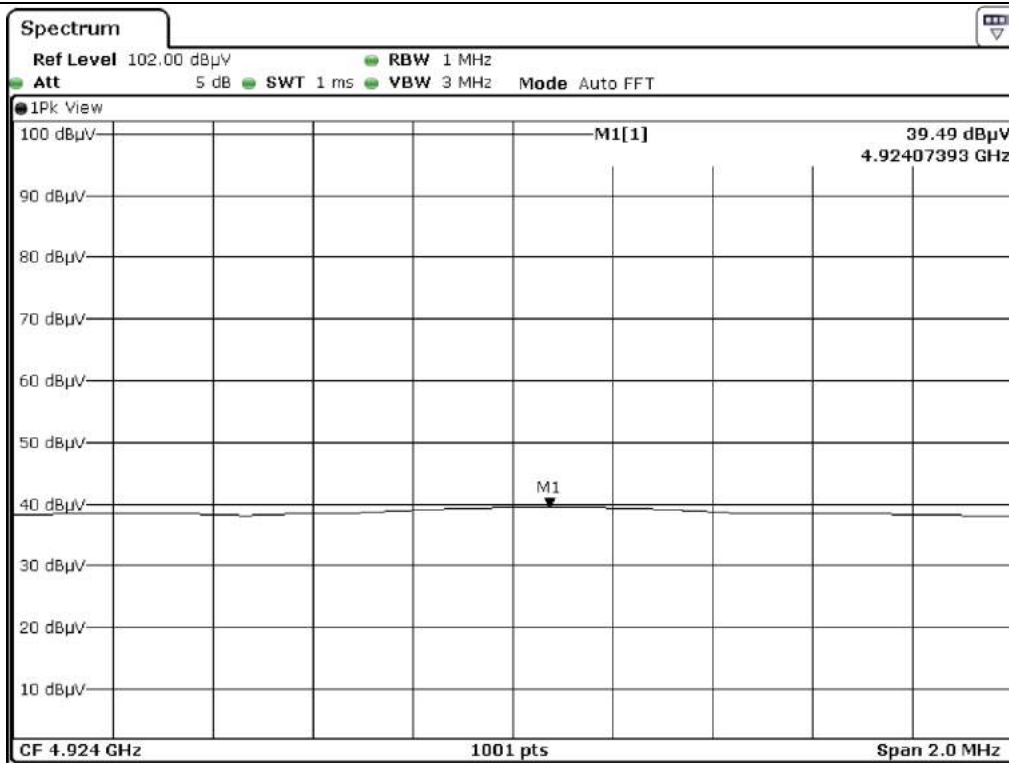


High Channel_Peak_H

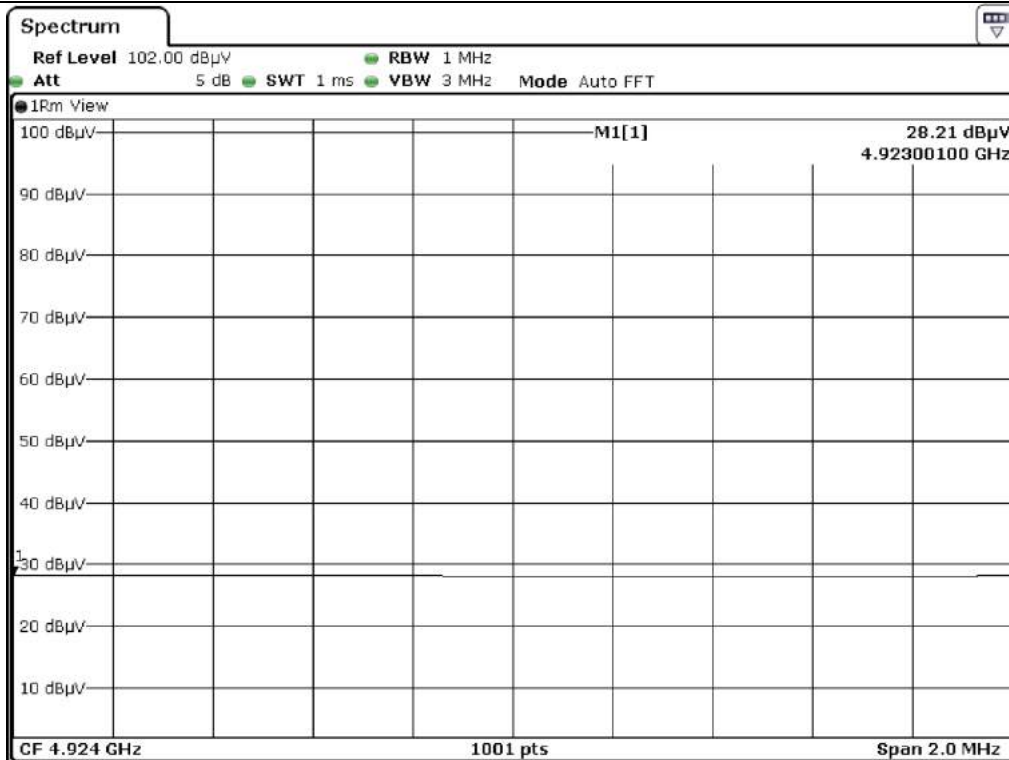

High Channel_Average_H

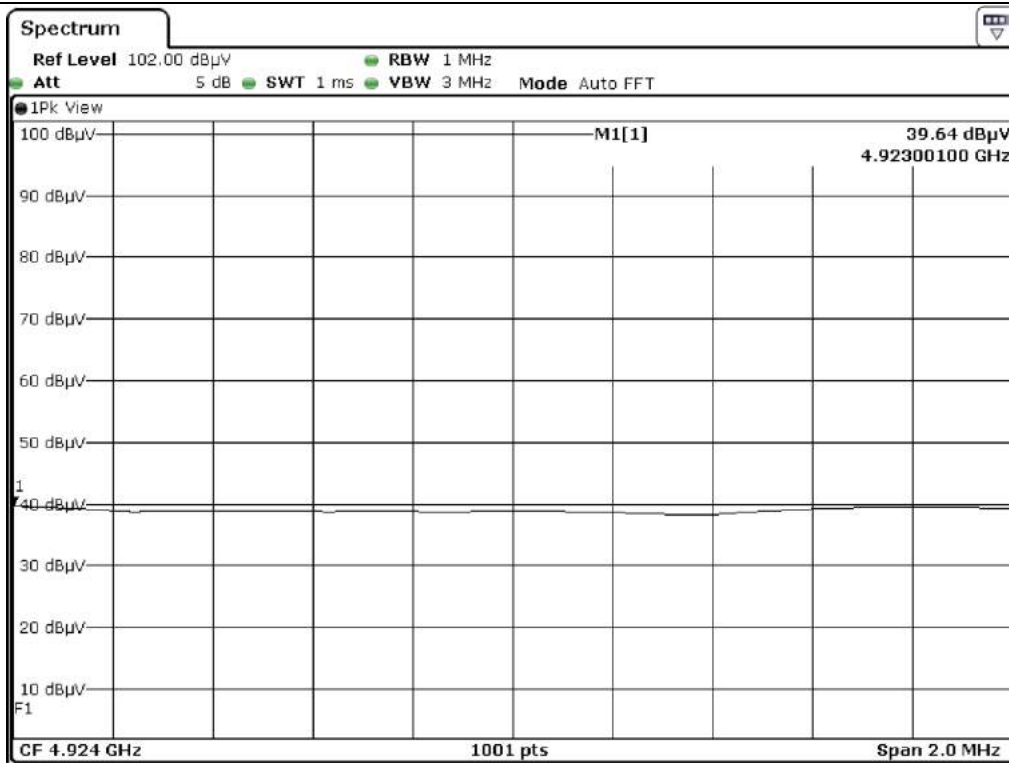

High Channel_Peak_V

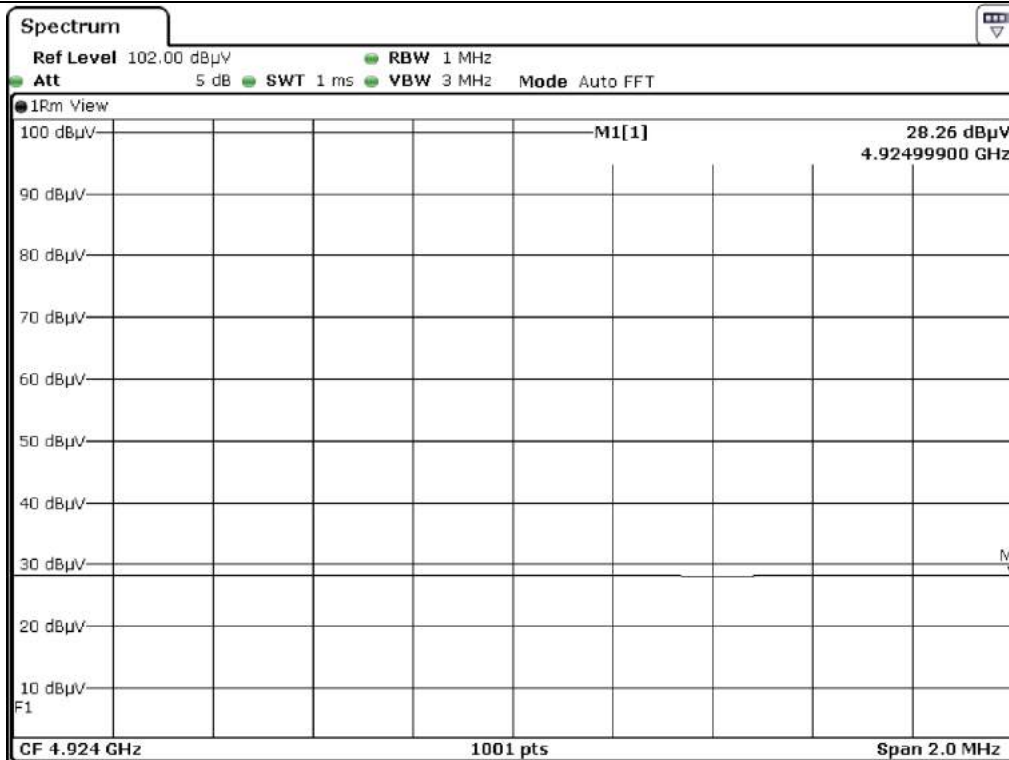

High Channel_Average_V

9.6.3.2 Test data for 802.11g WLAN Mode

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : > 98 %
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	40.00	Peak	H	30.84	12.31	35.74	47.41	74.00	26.59
	29.31	Average	H				36.72	54.00	17.28
	41.24	Peak	V				48.65	74.00	25.35
	29.38	Average	V				36.79	54.00	17.21
Test Data for Middle Channel									
4 884.00	39.61	Peak	H	30.01	12.43	35.80	46.25	74.00	27.75
	28.63	Average	H				35.27	54.00	18.73
	39.81	Peak	V				46.45	74.00	27.55
	28.74	Average	V				35.38	54.00	18.62
Test Data for High Channel									
4 924.00	38.89	Peak	H	31.15	12.81	35.96	46.89	74.00	27.11
	28.26	Average	H				36.26	54.00	17.74
	38.62	Peak	V				46.62	74.00	27.38
	28.24	Average	V				36.24	54.00	17.76

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain


Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.3.3 Test data for 802.11n_HT20 WLAN Mode

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : > 98 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	40.08	Peak	H	30.84	12.31	35.74	47.49	74.00	26.51
	29.31	Average	H				36.72	54.00	17.28
	40.11	Peak	V				47.52	74.00	26.48
	29.44	Average	V				36.85	54.00	17.15
Test Data for Middle Channel									
4 884.00	39.45	Peak	H	30.01	12.43	35.80	46.09	74.00	27.91
	28.67	Average	H				35.31	54.00	18.69
	39.41	Peak	V				46.05	74.00	27.95
	28.62	Average	V				35.26	54.00	18.74
Test Data for High Channel									
4 924.00	38.70	Peak	H	31.15	12.81	35.96	46.70	74.00	27.30
	28.11	Average	H				36.11	54.00	17.89
	38.70	Peak	V				46.70	74.00	27.30
	28.18	Average	V				36.18	54.00	17.82

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain


Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.3.4 Test data for 802.11n_HT40 WLAN Mode

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : > 98 %
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 844.00	39.37	Peak	H	30.84	12.31	35.74	46.78	74.00	27.22
	29.43	Average	H				36.84	54.00	17.16
	40.79	Peak	V				48.20	74.00	25.80
	29.53	Average	V				36.94	54.00	17.06
Test Data for Middle Channel									
4 884.00	38.87	Peak	H	30.01	12.43	35.80	45.51	74.00	28.49
	28.60	Average	H				35.24	54.00	18.76
	39.07	Peak	V				45.71	74.00	28.29
	28.75	Average	V				35.39	54.00	18.61
Test Data for High Channel									
4 904.00	40.27	Peak	H	31.15	12.81	35.96	48.27	74.00	25.73
	28.85	Average	H				36.85	54.00	17.15
	40.83	Peak	V				48.83	74.00	25.17
	28.95	Average	V				36.95	54.00	17.05

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain


Tested by: Hyung-Kwon, Oh / Assistant Manager

10. PEAK POWER SPECTRUL DENSITY


10.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

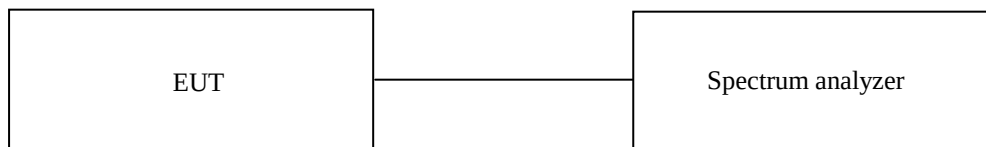

10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 802.11b WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-9.84	8.00	17.84
Middle	2 442.00	-10.57	8.00	18.57
High	2 462.00	-10.32	8.00	18.32

Remark. Margin = Limit – Measured value




Tested by: Hyung-Kwon, Oh / Assistant Manager

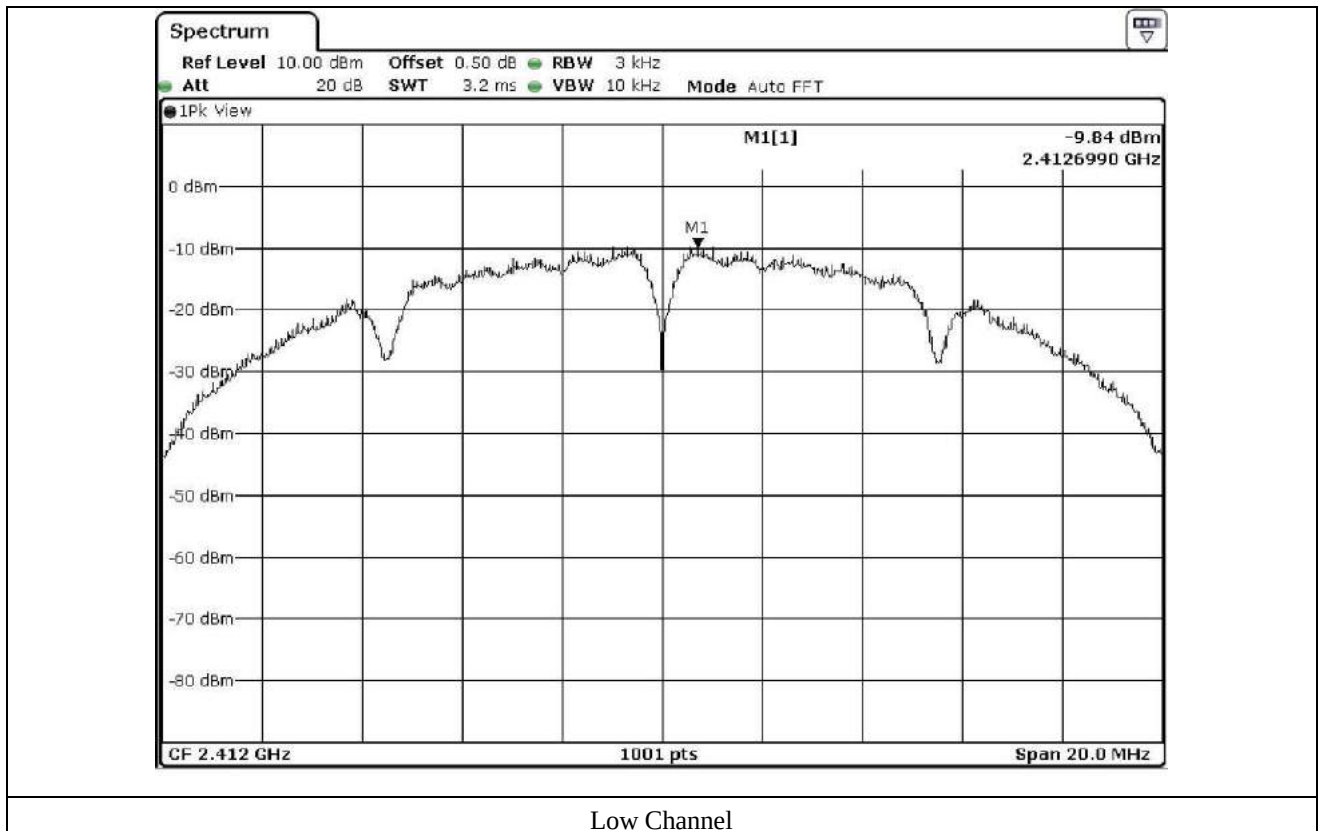

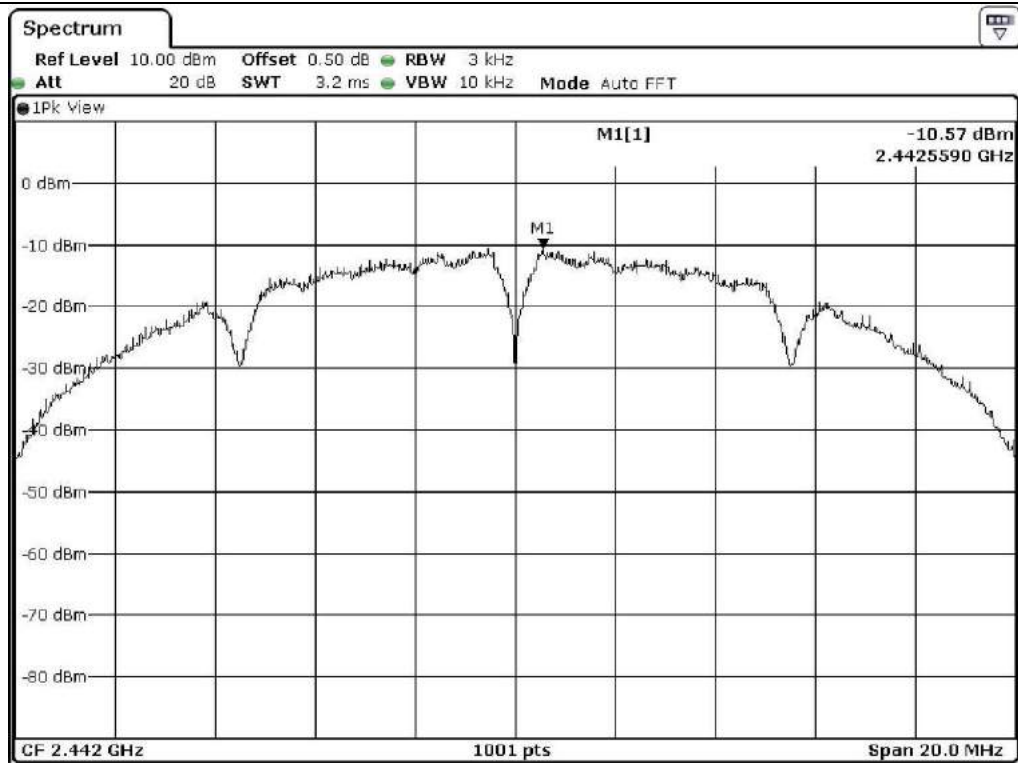

Middle Channel

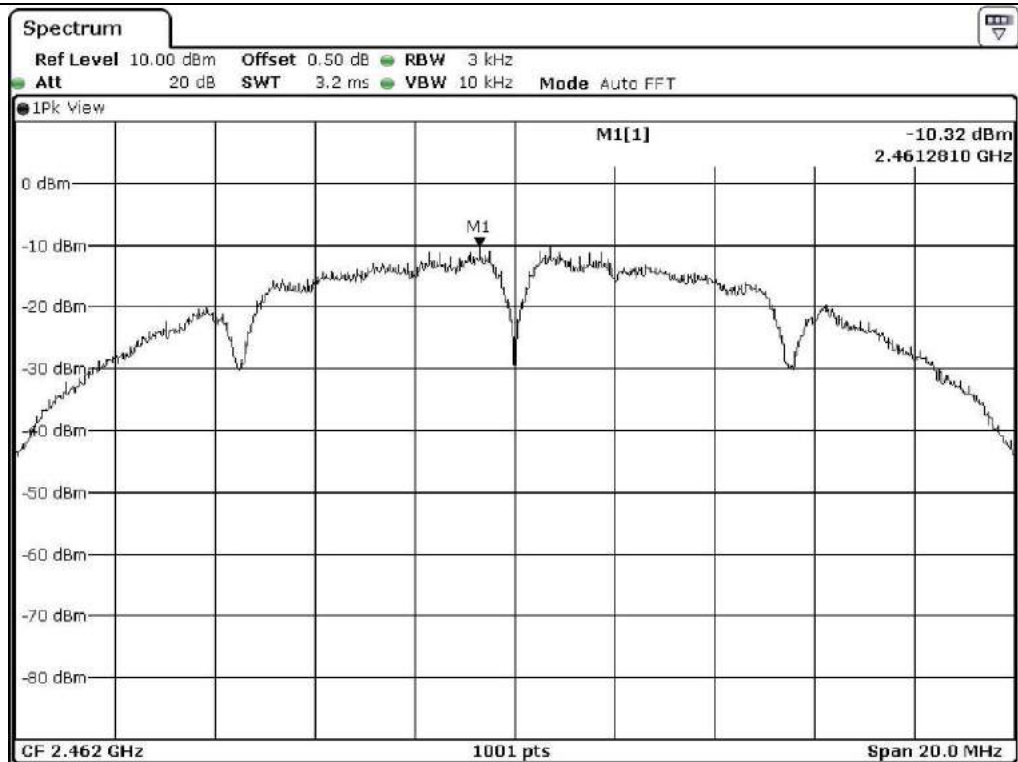

High Channel

10.5 Test data for 802.11g WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-13.65	8.00	21.65
Middle	2 442.00	-14.21	8.00	22.21
High	2 462.00	-13.53	8.00	21.53

Remark. Margin = Limit – Measured value




Tested by: Hyung-Kwon, Oh / Assistant Manager

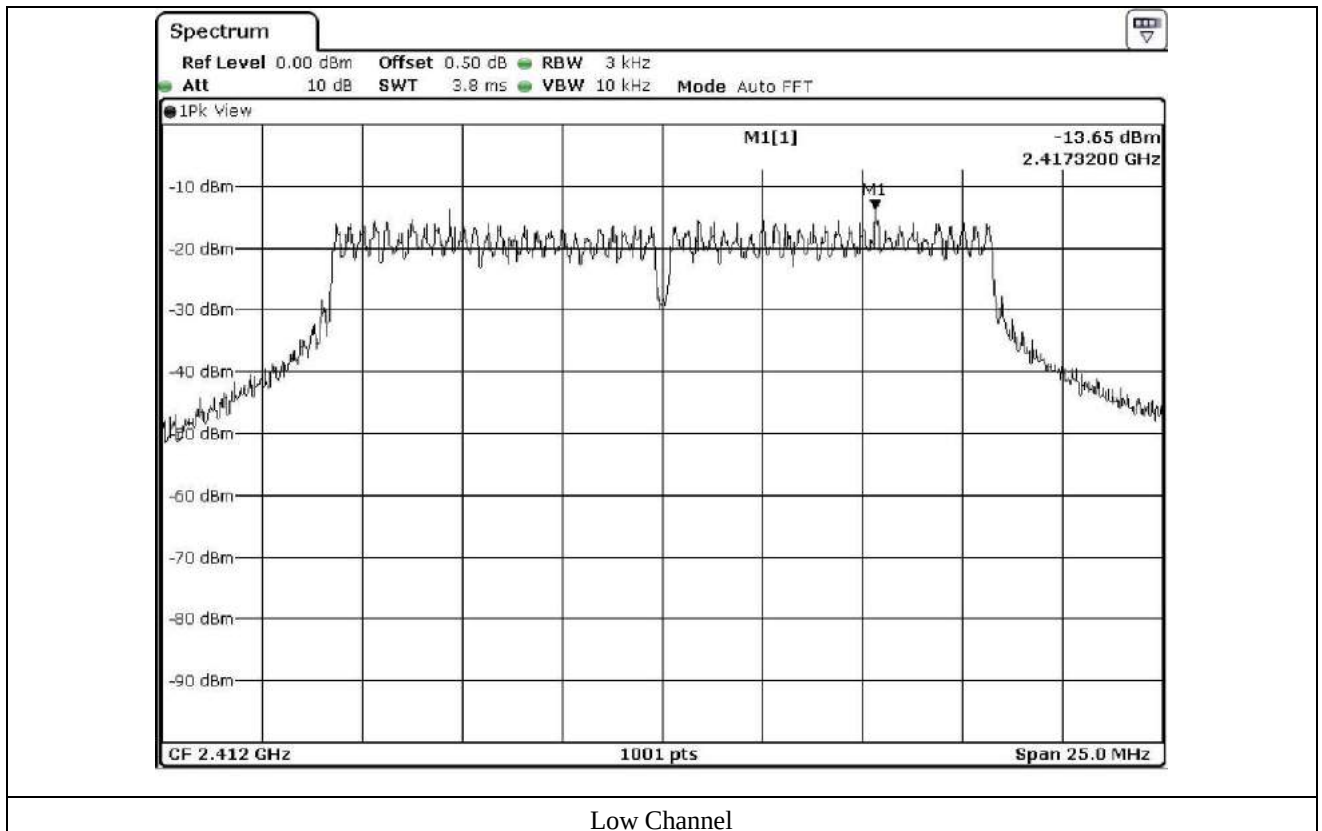

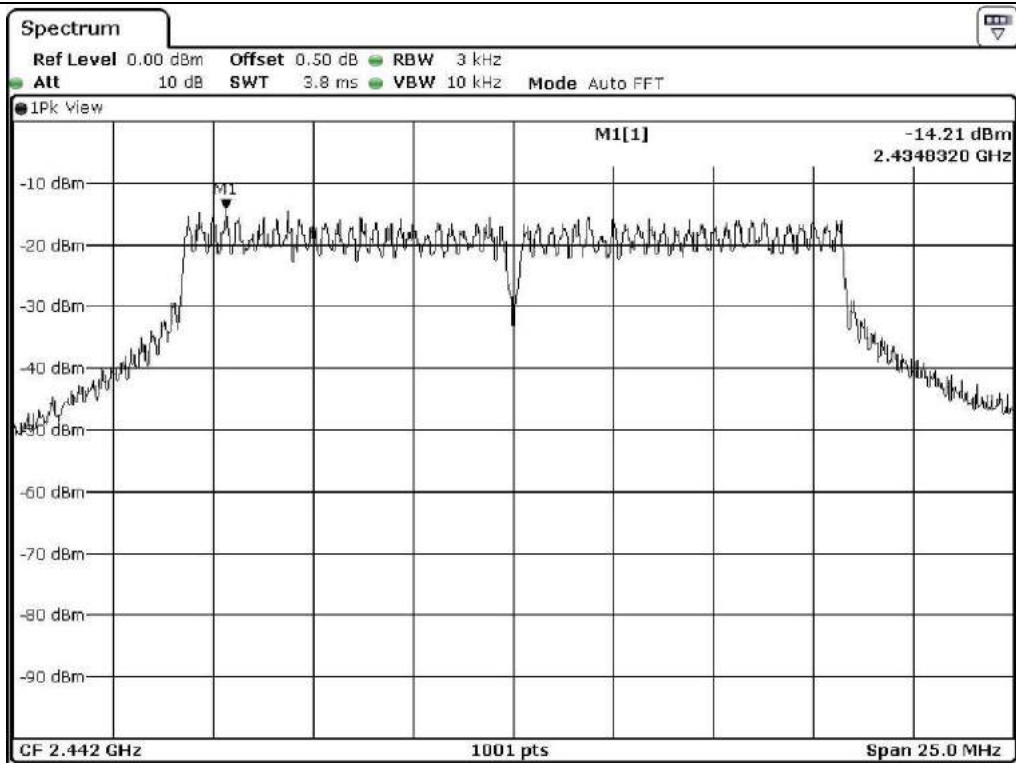

Middle Channel

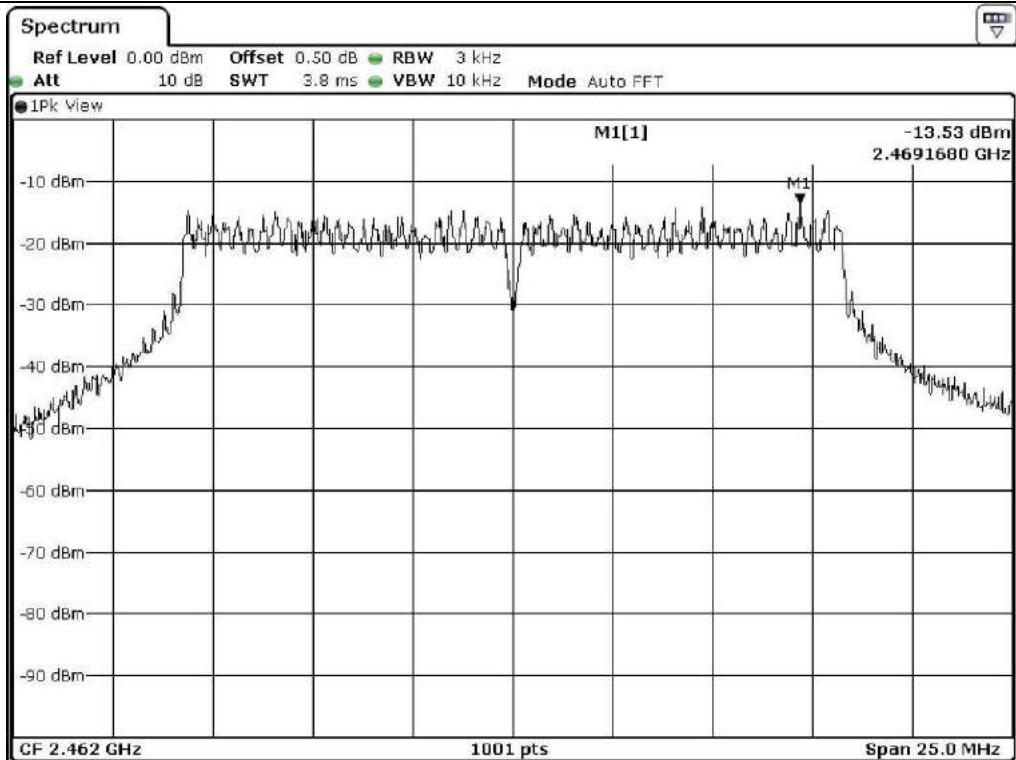

High Channel

10.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-14.61	8.00	22.61
Middle	2 442.00	-15.77	8.00	23.77
High	2 462.00	-14.96	8.00	22.96

Remark. Margin = Limit – Measured value




Tested by: Hyung-Kwon, Oh / Assistant Manager

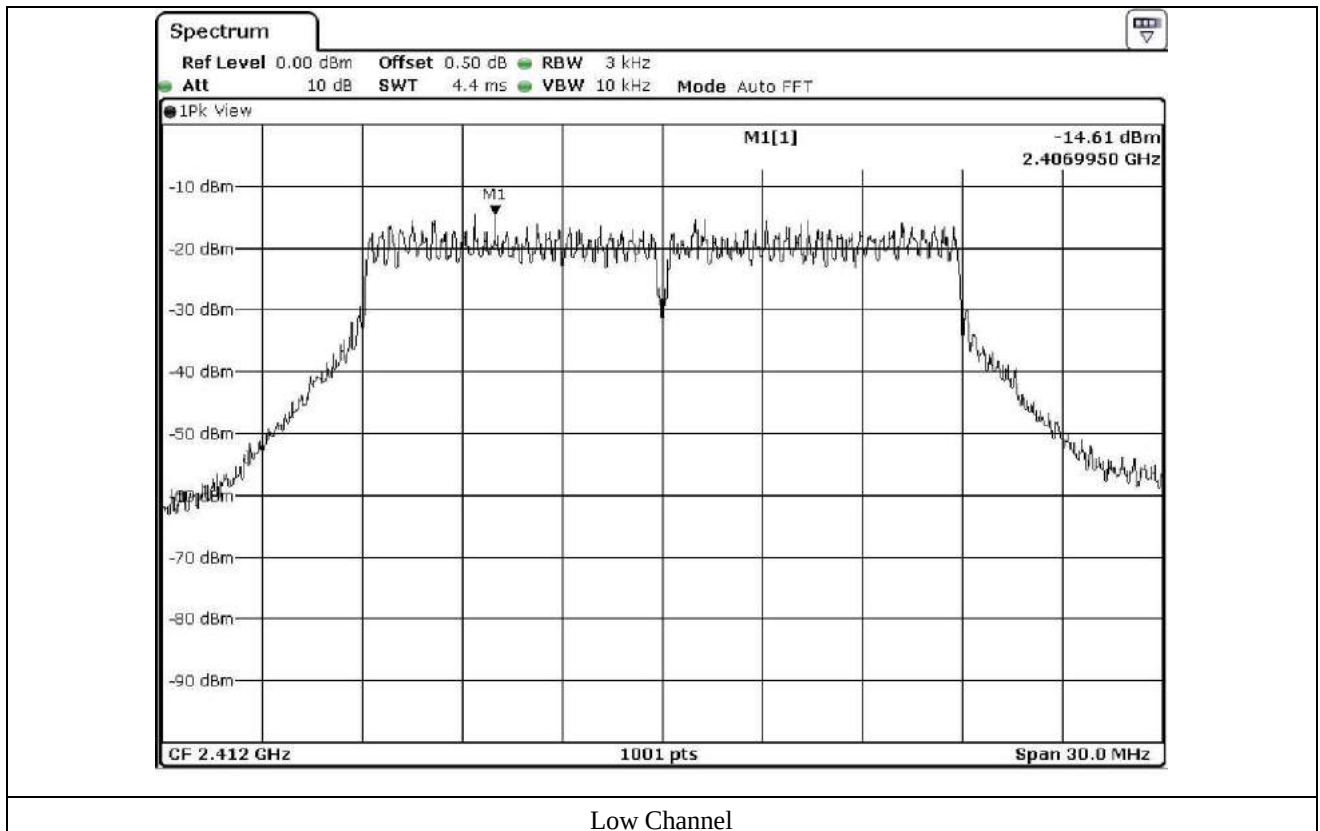

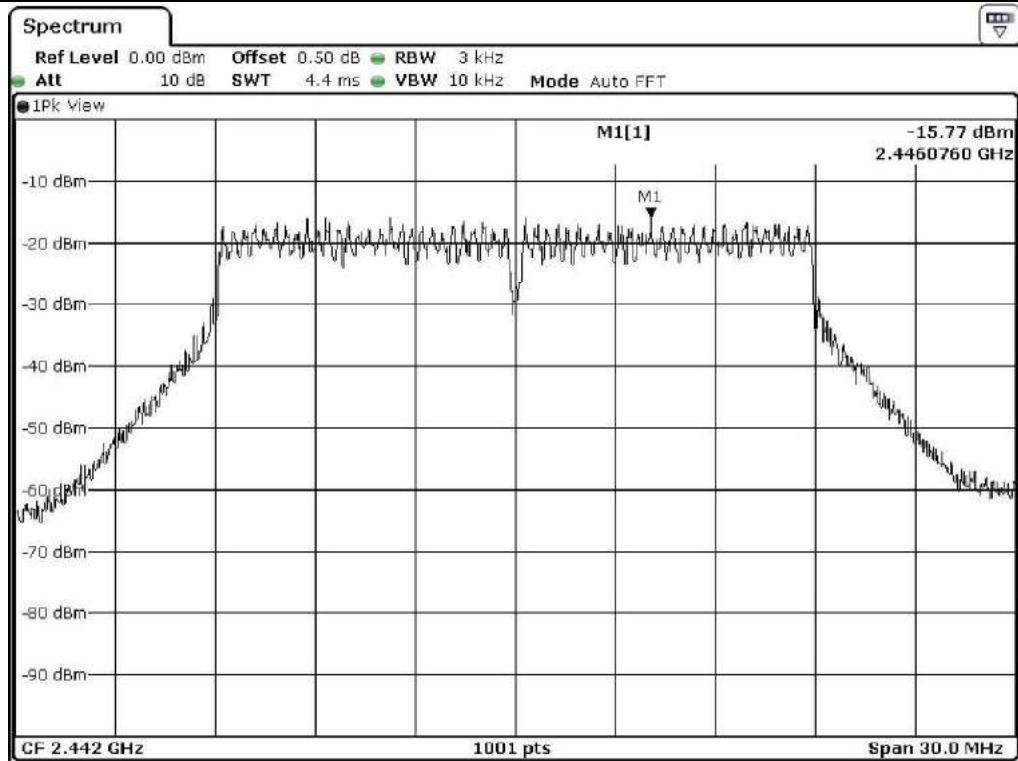

Middle Channel

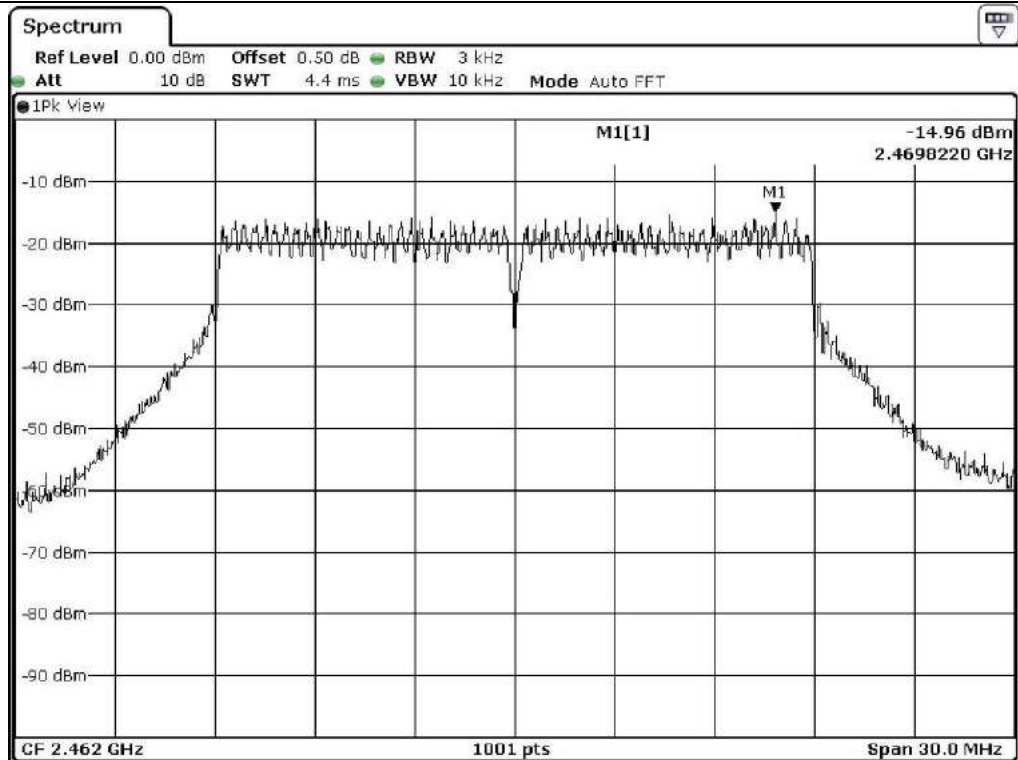

High Channel

10.7 Test data for 802.11n_HT40 WLAN Mode

-. Test Date : December 27, 2017 ~ January 03, 2018

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 422.00	-20.15	8.00	28.15
Middle	2 442.00	-21.07	8.00	29.07
High	2 452.00	-21.13	8.00	29.13

Remark. Margin = Limit – Measured value




Tested by: Hyung-Kwon, Oh / Assistant Manager

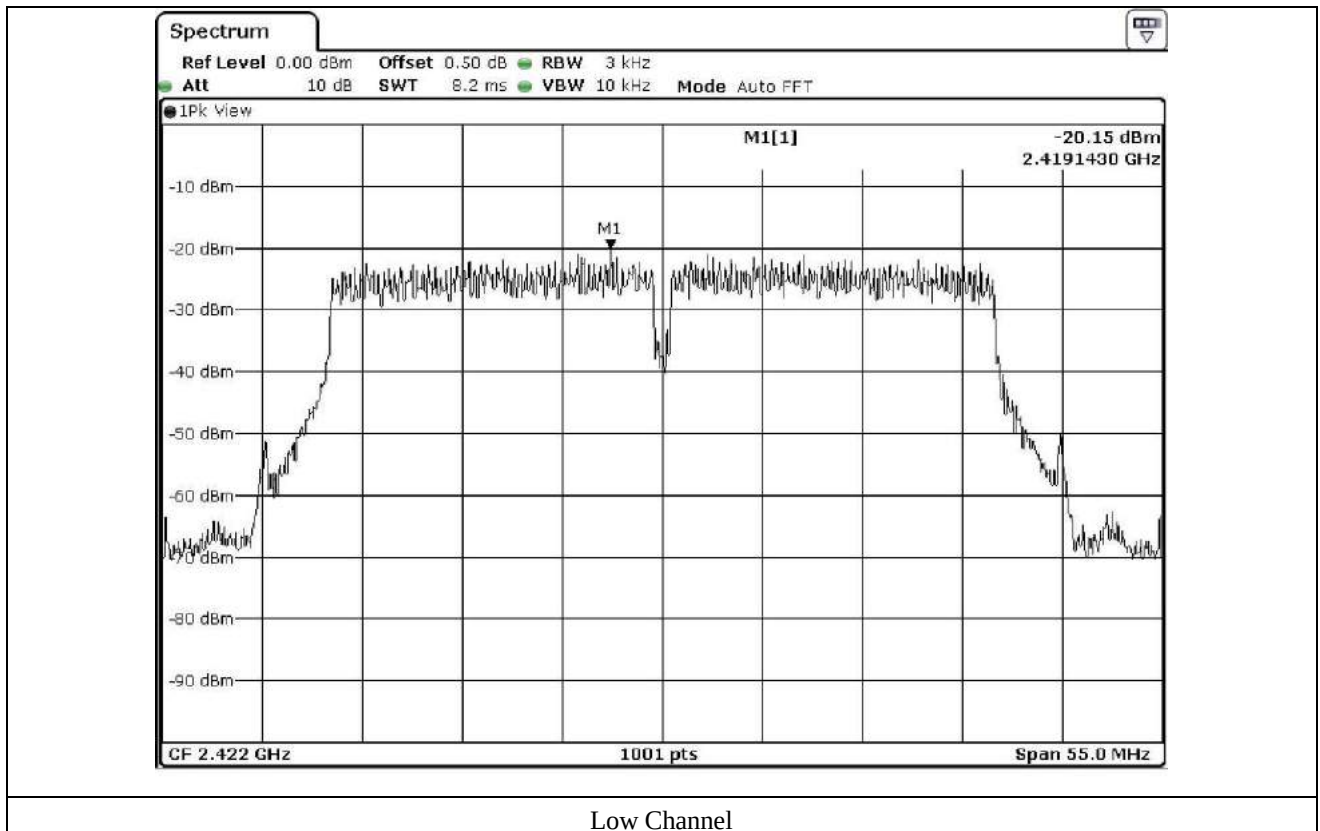

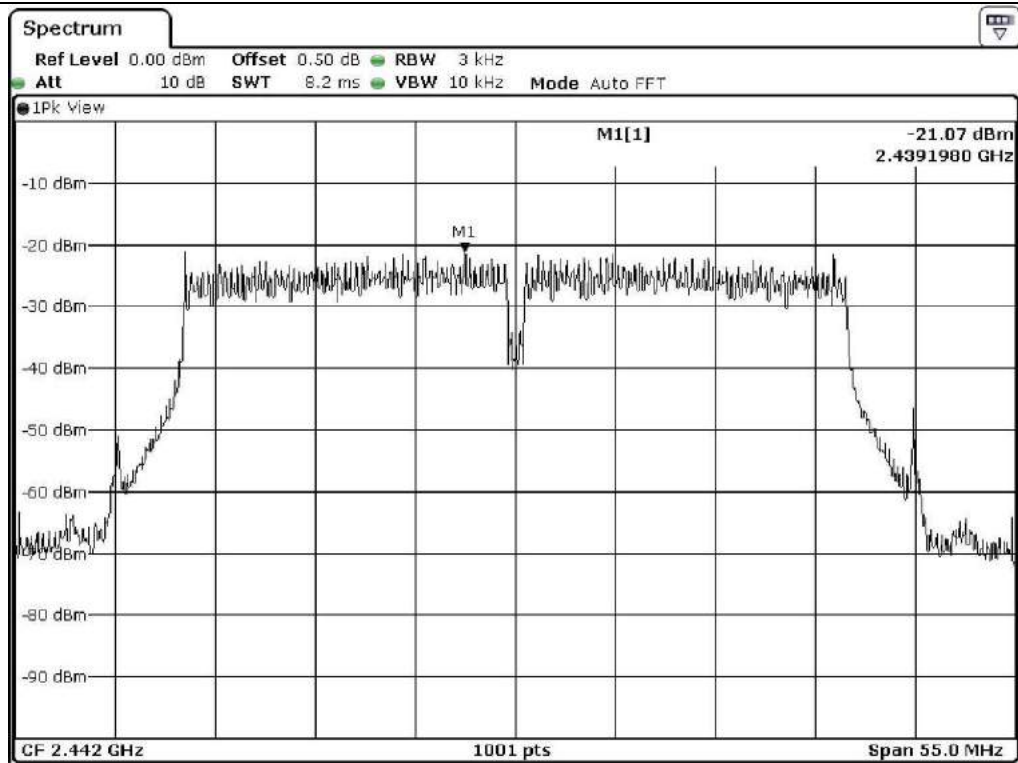

Middle Channel

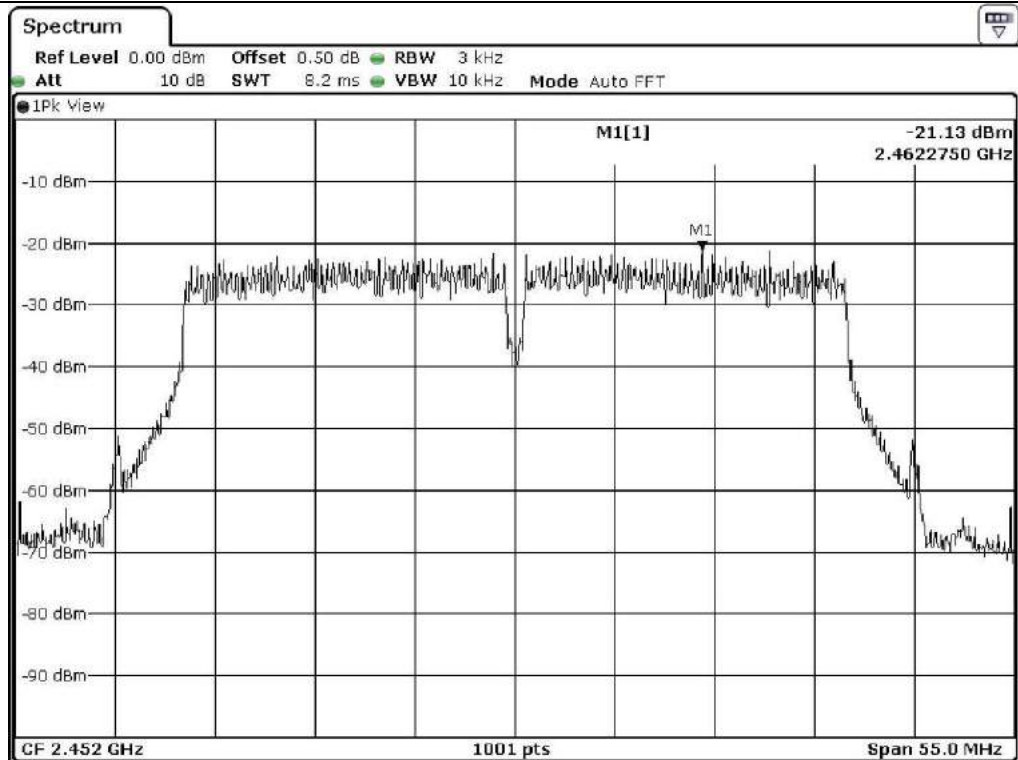

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ -	BBV9718	Schwarzbeck	Amplifier	310	Sep. 01, 2017 (1Y)
■	SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Apr. 04, 2017 (1Y)
■ -	DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ -	MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	May 26, 2017 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jul. 28, 2017 (2Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 30 MHz ~ 1 000 MHz

Humidity Level : 45 % R.H.

Temperature: 23°C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247


Result : PASSED

EUT : Smart pad

Date: December 27, 2017 ~ January 03, 2018


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

-. Operating condition : Low Channel

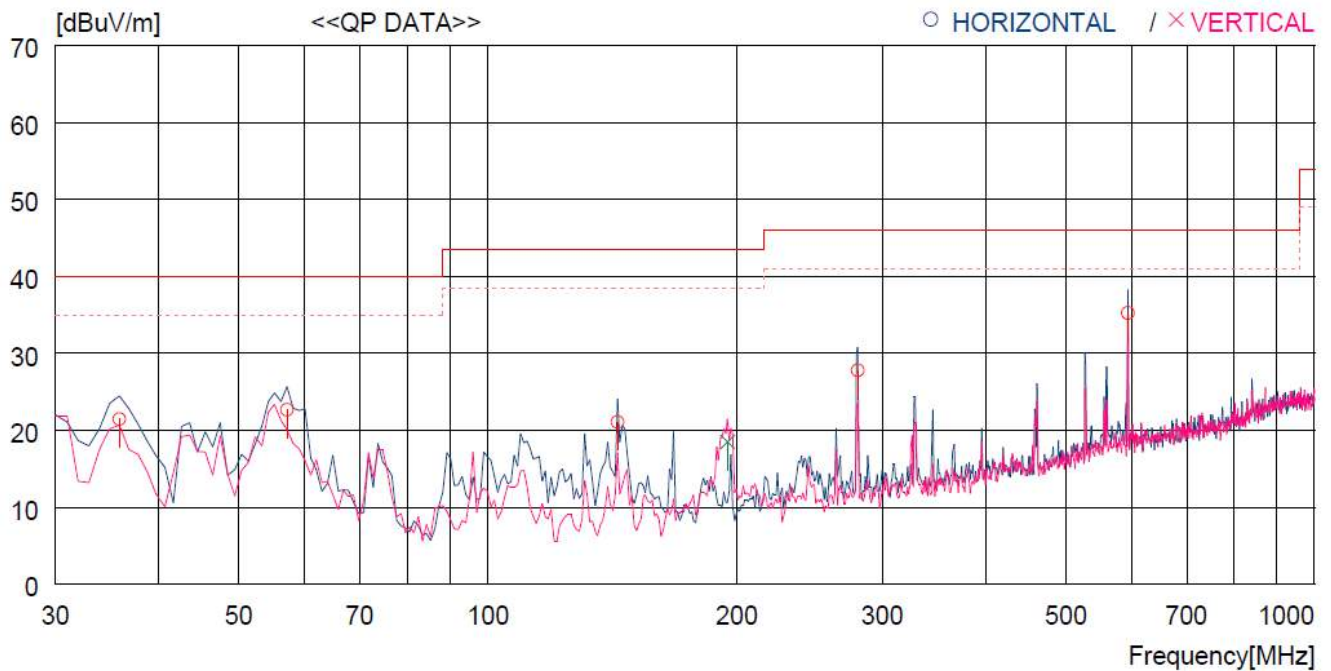


No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	35.820	40.7	12.5	1.4	33.1	21.5	40.0	18.5	400	2
2	57.160	40.4	13.6	1.8	33.1	22.7	40.0	17.3	400	2
3	143.490	43.3	7.9	2.8	32.9	21.1	43.5	22.4	400	157
4	280.260	44.9	12.0	3.9	33.0	27.8	46.0	18.2	400	188
5	594.538	44.0	19.0	5.6	33.3	35.3	46.0	10.7	400	2
----- Vertical -----										
6	194.900	37.8	10.6	3.3	33.2	18.5	43.5	25.0	400	160

Operating condition : Middle Channel

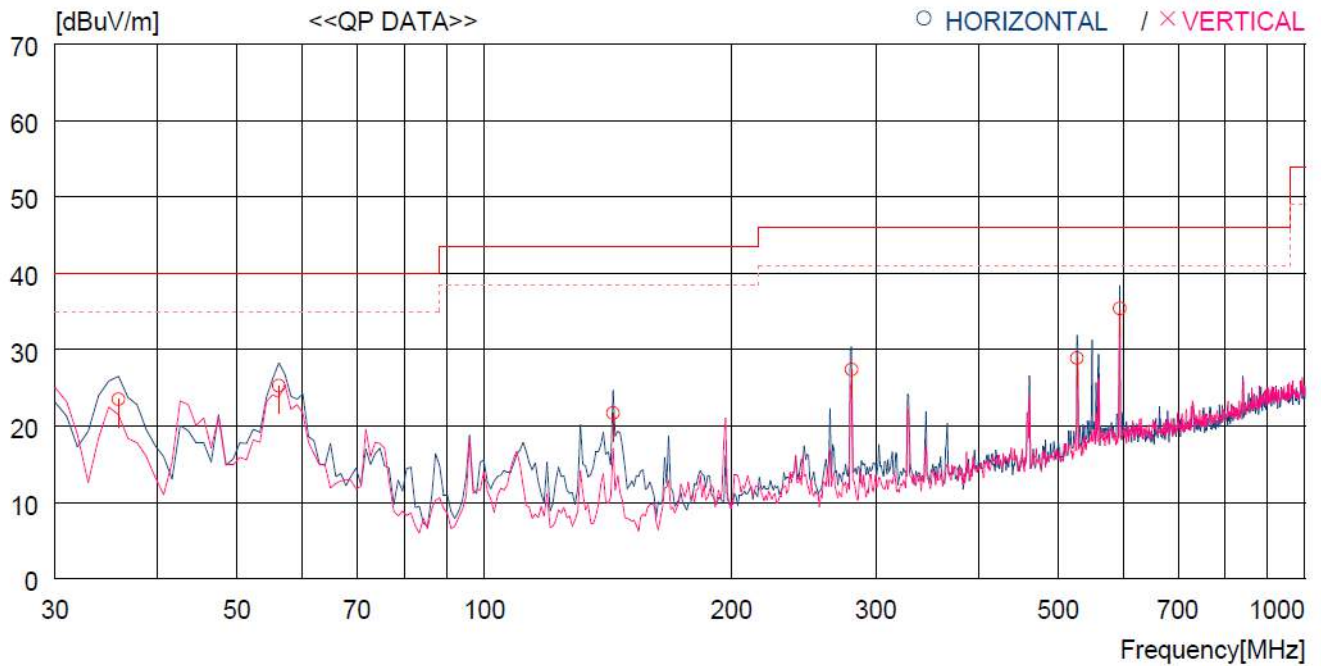

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
		[dBuV]	[dB]							
----- Horizontal -----										
1	35.820	42.7	12.5	1.4	33.1	23.5	40.0	16.5	400	245
2	56.190	42.9	13.7	1.8	33.1	25.3	40.0	14.7	400	186
3	143.490	43.9	7.9	2.8	32.9	21.7	43.5	21.8	400	245
4	280.260	44.5	12.0	3.9	33.0	27.4	46.0	18.6	400	245
5	527.610	39.5	17.5	5.2	33.3	28.9	46.0	17.1	400	245
6	594.538	44.1	19.0	5.6	33.3	35.4	46.0	10.6	400	245

Operating condition : High Channel

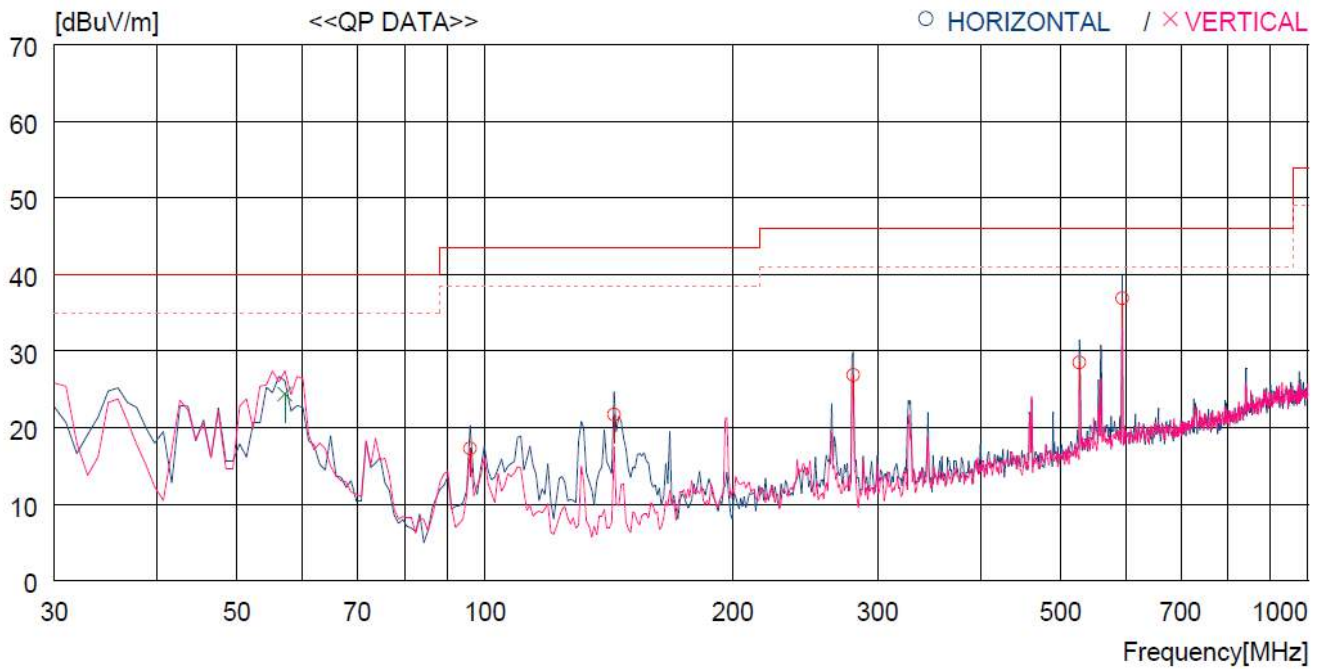

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	95.960	36.8	11.2	2.3	33.0	17.3	43.5	26.2	400	80
2	143.490	43.9	7.9	2.8	32.9	21.7	43.5	21.8	400	172
3	280.260	44.0	12.0	3.9	33.0	26.9	46.0	19.1	400	80
4	527.610	39.1	17.5	5.2	33.3	28.5	46.0	17.5	400	80
5	594.538	45.6	19.0	5.6	33.3	36.9	46.0	9.1	400	264
----- Vertical -----										
6	57.160	42.1	13.6	1.8	33.1	24.4	40.0	15.6	400	257

Tested by: Hyung-Kwon, Oh / Assistant Manager

11.5 Test data for Below 30 MHz

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

11.6 Test data for above 1 GHz

- . Test Date : December 27, 2017 ~ January 03, 2018
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								


 Tested by: Hyung-Kwon, Oh / Assistant Manager

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : (25 ~ 26) °C
Relative humidity : (44 ~ 45) % R.H.

12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


12.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESPI	Rohde & Schwarz	Test Receiver	101012	Oct. 27, 2017 (1Y)
□ -	ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Apr. 05, 2017 (1Y)
□ -	NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 06, 2017 (1Y)
■ -	NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 05, 2017 (1Y)
□ -	3825/2	EMCO	AMN	9109-1869	Apr. 06, 2017 (1Y)
■ -	3825/2	EMCO	AMN	9109-1867	Apr. 06, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


12.4 Test data

- Test Date : December 27, 2017 ~ January 03, 2018
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

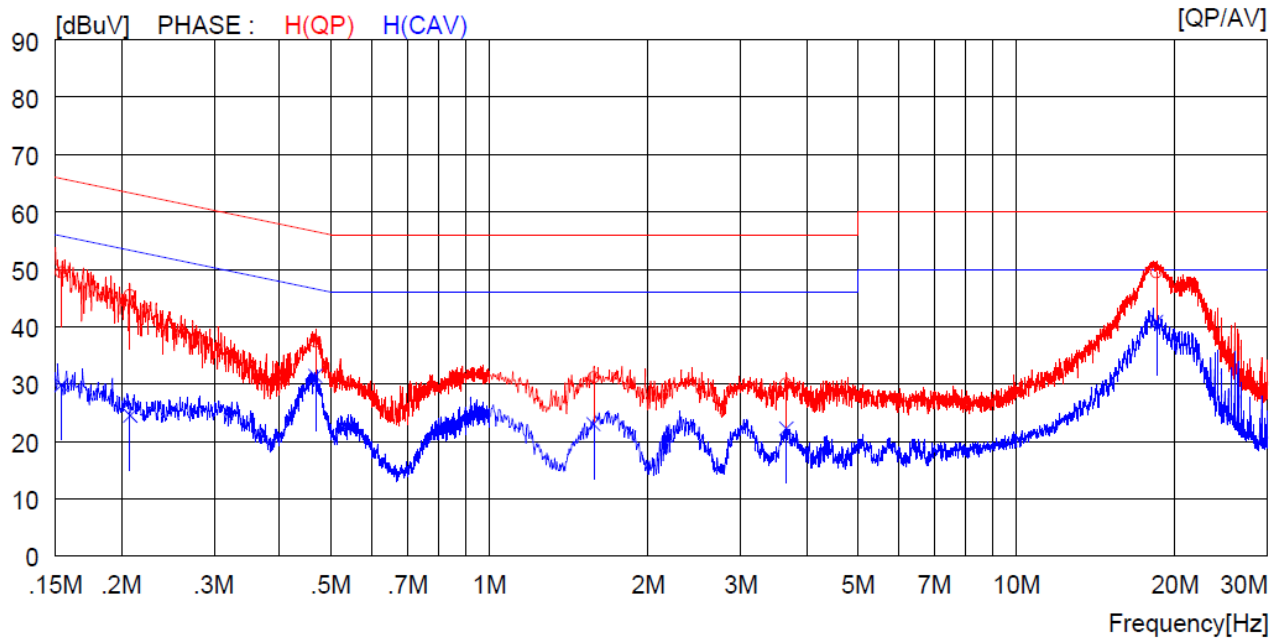

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	39.5	----	9.9	49.4	----	65.8	----	16.4	----	H (QP)
2	0.20800	35.6	----	9.9	45.5	----	63.3	----	17.8	----	H (QP)
3	0.46700	27.4	----	10.0	37.4	----	56.6	----	19.2	----	H (QP)
4	1.57600	21.1	----	10.0	31.1	----	56.0	----	24.9	----	H (QP)
5	3.65600	19.9	----	10.1	30.0	----	56.0	----	26.0	----	H (QP)
6	18.46000	39.2	----	10.3	49.5	----	60.0	----	10.5	----	H (QP)
7	0.15400	----	19.9	9.9	----	29.8	----	55.8	----	26.0	H (CAV)
8	0.20800	----	14.6	9.9	----	24.5	----	53.3	----	28.8	H (CAV)
9	0.46700	----	21.4	10.0	----	31.4	----	46.6	----	15.2	H (CAV)
10	1.57600	----	13.0	10.0	----	23.0	----	46.0	----	23.0	H (CAV)
11	3.65600	----	12.1	10.1	----	22.2	----	46.0	----	23.8	H (CAV)
12	18.46000	----	30.6	10.3	----	40.9	----	50.0	----	9.1	H (CAV)

-. Tested Line : NEUTRAL LINE

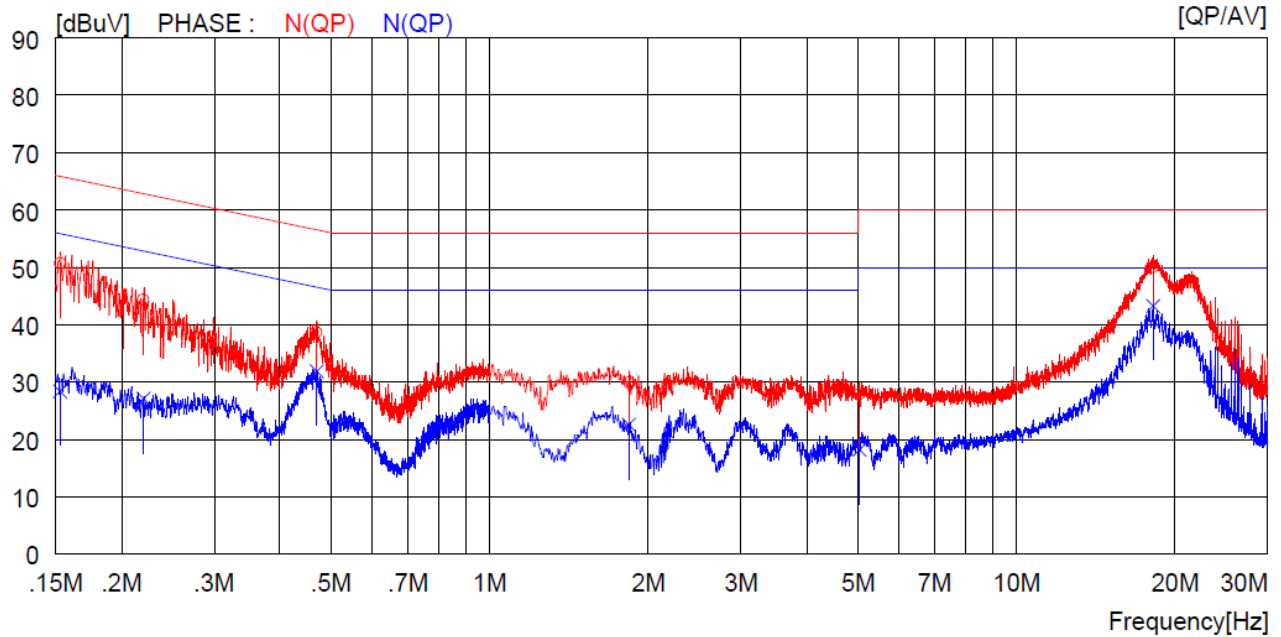

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15300	40.8	----	9.9	50.7	----	65.8	----	15.1	----	N (QP)
2	0.22000	34.4	----	9.9	44.3	----	62.8	----	18.5	----	N (QP)
3	0.46900	28.7	----	10.0	38.7	----	56.5	----	17.8	----	N (QP)
4	1.84000	19.9	----	10.0	29.9	----	56.0	----	26.1	----	N (QP)
5	5.03500	17.7	----	10.1	27.8	----	60.0	----	32.2	----	N (QP)
6	18.19000	39.7	----	10.3	50.0	----	60.0	----	10.0	----	N (QP)
7	0.15300	----	18.5	9.9	----	28.4	----	55.8	----	27.4	N (CAV)
8	0.22000	----	17.2	9.9	----	27.1	----	52.8	----	25.7	N (CAV)
9	0.46900	----	21.9	10.0	----	31.9	----	46.5	----	14.6	N (CAV)
10	1.84000	----	12.6	10.0	----	22.6	----	46.0	----	23.4	N (CAV)
11	5.03500	----	8.1	10.1	----	18.2	----	50.0	----	31.8	N (CAV)
12	18.19000	----	33.0	10.3	----	43.3	----	50.0	----	6.7	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Hyung-Kwon, Oh / Assistant Manager