

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
PURE TOY LIMITED

Nano HD Videl Drone with LED Lights

Model No.: 206003-1

FCC ID: 2AN6G-S26

Prepared for : PURE TOY LIMITED  
Address : Chenghua Toys Industrial Zone, Chenghai,  
Shantou, Guangdong, 515800, China.

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port,  
Science & Industry Park, Nanshan District,  
Shenzhen, Guangdong, P.R. China.

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20171778  
Date of Test : Aug. 22, 2017-Sep. 10, 2017  
Date of Report : Nov. 02, 2017

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Special Accessory and Auxiliary Equipment.....	4
1.3. Description of Test Facility .....	5
1.4. Measurement Uncertainty.....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. OPERATION OF EUT DURING TESTING.....</b>	<b>7</b>
3.1. Operating Mode .....	7
3.2. Configuration and peripherals .....	7
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>8</b>
<b>5. 20DB BANDWIDTH MEASUREMENT .....</b>	<b>9</b>
5.1. Block Diagram of Test Setup.....	9
5.2. The Requirement For Section 15.215(c).....	9
5.3. Operating Condition of EUT .....	9
5.4. Test Procedure .....	9
5.5. Test Result .....	10
<b>6. BAND EDGE COMPLIANCE TEST .....</b>	<b>12</b>
6.1. Block Diagram of Test Setup.....	12
6.2. The Requirement For Section 15.249.....	12
6.3. EUT Configuration on Measurement .....	12
6.4. Operating Condition of EUT .....	13
6.5. Test Procedure .....	13
6.6. Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION TEST .....</b>	<b>18</b>
7.1. Block Diagram of Test Setup.....	18
7.2. The Limit For Section 15.249.....	19
7.3. Restricted bands of operation .....	20
7.4. Configuration of EUT on Measurement .....	20
7.5. Operating Condition of EUT .....	21
7.6. Test Procedure .....	21
7.7. The Field Strength of Radiation Emission Measurement Results .....	22
<b>8. ANTENNA REQUIREMENT.....</b>	<b>35</b>
8.1. The Requirement .....	35
8.2. Antenna Construction .....	35
<b>9. PHOTO OF EUT.....</b>	<b>36</b>

## Test Report Certification

Applicant : PURE TOY LIMITED  
Address : Chenghua Toys Industrial Zone, Chenghai, Shantou, Guangdong, 515800, China  
Manufacturer : PURE TOY LIMITED  
Address : Chenghua Toys Industrial Zone, Chenghai, Shantou, Guangdong, 515800, China.  
Product : Nano HD Videl Drone with LED Lights  
Model No. : 206003-1(Please refer to the detailed description about coverage models on page 4)  
Trade name : SHARPER IMAGE

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.249  
ANSI C63.10: 2013**

The EUT was tested according to FCC 47CFR 15.249 for compliance to FCC 47CFR 15.249 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Aug. 22, 2017-Sep. 10, 2017

Date of Report : Nov. 02, 2017

Prepared by :



Approved & Authorized Signer :

( Sean Liu, Manager )

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Nano HD Videl Drone with LED Lights

Main test model Number : 206003-1

List model Number : S26, S51, S52, S53, S54, S55, S56, S57, S58, S59, S60, S61, 1501, 1503, 1506, 1507, 1508, 1601, 1601A, 1601B, 1601C, 1602, 1602A, 1602B, 1602C, 1603, 1603A, 1603B, 1603C, 1605, 1605A, 1605B, 1605C, 1701, 1701A, 1701B, 1701C, 1702, 1702A, 1702B, 1702C, 1703, 1703A, 1703B, 1703C, 1811, 1509, 1606, 1608, 1706, 1708, 1801, 1802, 1803, 1805, 1806, 1807, 1808, 1809, 1810, E012HC, E012HW, 1705C, 1705W, 1705S, 1705, 1706C, 1706W, 1706S, 1707, 1707S, 1707W, 1707C, 1708S, 1708C, 1708W, 1709, 1811W, 1812, 1813

Power Supply : DC 3V(Powered by battery)

Operate Frequency : 2405-2475MHz

Modulation mode : GFSK

Antenna Gain : 1dBi

Antenna type : Integral Antenna

Applicant : PURE TOY LIMITED

Address : Chenghua Toys Industrial Zone, Chenghai, Shantou, Guangdong, 515800, China

Manufacturer : PURE TOY LIMITED

Address : Chenghua Toys Industrial Zone, Chenghai, Shantou, Guangdong, 515800, China.

Date of sample received : Aug. 22, 2017

Date of Test : Aug. 22, 2017-Sep. 10, 2017

### 1.2. Special Accessory and Auxiliary Equipment

N/A

### 1.3. Description of Test Facility

EMC Lab	: Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
	Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
	Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
	Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	: Shenzhen Accurate Technology Co., Ltd.
Site Location	: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

### 1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	One Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	One Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 13, 2017	One Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	One Year

### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2405MHz

Middle Channel: 2445MHz

High Channel: 2475MHz

#### 3.2. Configuration and peripherals

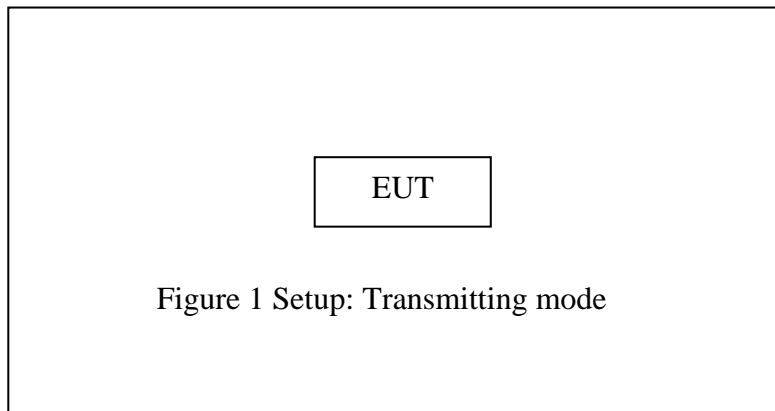


Figure 1 Setup: Transmitting mode


## 4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.215(c)	20dB Bandwidth	Compliant
Section 15.249(d)	Band Edge Compliance Test	Compliant
Section 15.205(a), Section 15.209(a), Section 15.249, Section 15.35	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

Note: The power supply mode of the EUT is DC 3V, According to the FCC standard requirements, conducted emission is not applicable.

## 5. 20DB BANDWIDTH MEASUREMENT

### 5.1. Block Diagram of Test Setup

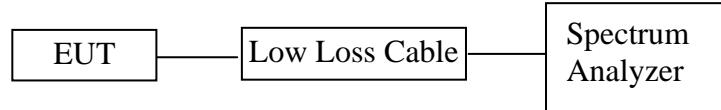

### 5.2. The Requirement For Section 15.215(c)

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long-term distribution appears evenly distributed.

### 5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 5.1.

5.3.2. Turn on the power of all equipment.

5.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405, 2445, 2475MHz.

### 5.4. Test Procedure

5.4.1. Place the EUT on the table and set it in transmitting mode.

5.4.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.4.3. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz, Detector function=peak, Trace=max hold, Sweep=auto.


5.4.4. Set the measured low, middle and high frequency and test 20dB bandwidth with spectrum analyzer.

### 5.5. Test Result

Channel	Frequency(MHz)	20 dB Bandwidth(MHz)
Low	2405	0.320
Middle	2445	0.312
High	2475	0.320


The spectrum analyzer plots are attached as below.

*Low channel*

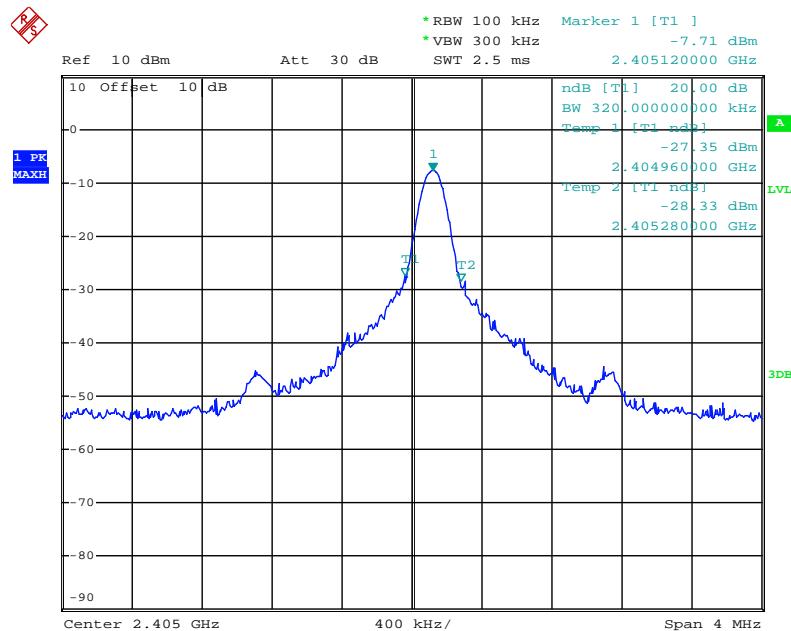


Date: 7.SEP.2017 10:42:24

## Middle channel

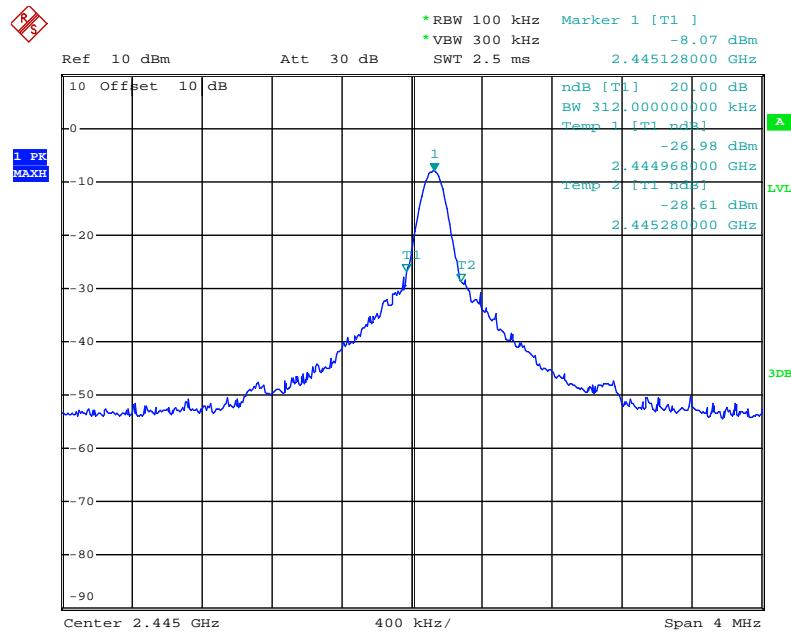

Date: 7.SEP.2017 10:44:17


## High channel

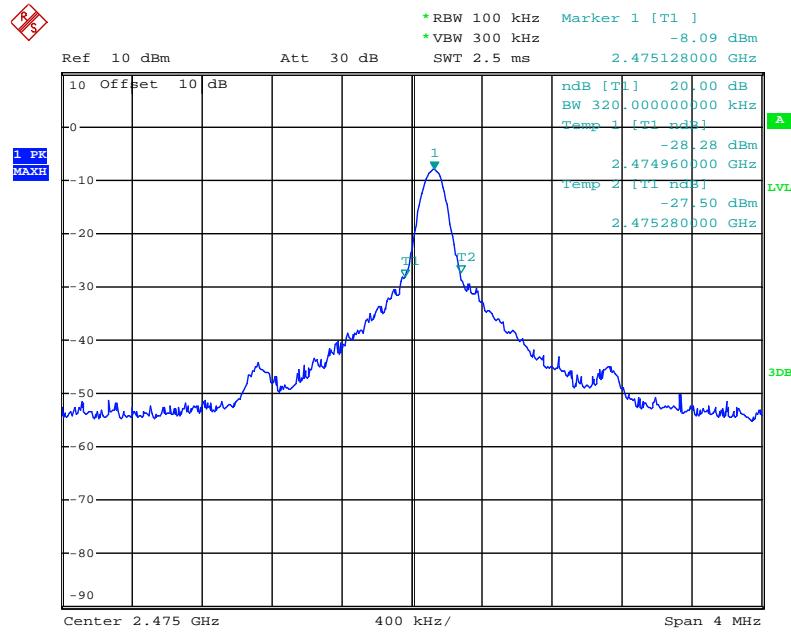

Date: 7.SEP.2017 10:45:21

## 6. BAND EDGE COMPLIANCE TEST

### 6.1. Block Diagram of Test Setup

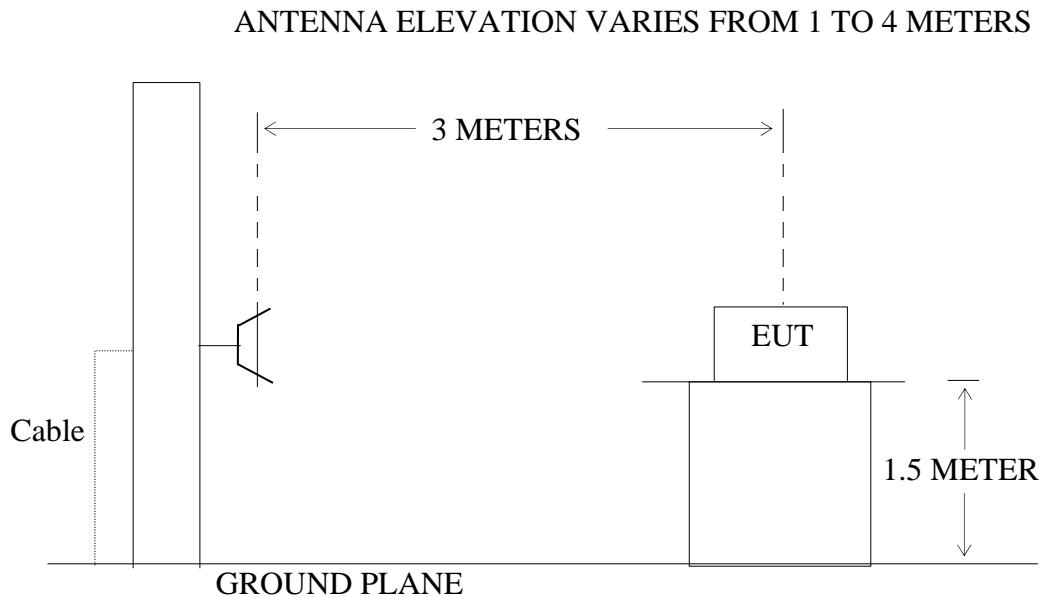

### 6.2. The Requirement For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405, 2475MHz.

## 6.5. Test Procedure

Radiate Band Edge:

6.5.1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

6.5.2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

6.5.3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

6.5.4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:


RBW=1MHz, VBW=1MHz

6.5.5. The band edges was measured and recorded.

## 6.6. Test Result

Job No.: DING11 #1019      Polarization: Horizontal  
 Standard: FCC PK      Power Source: DC 3V  
 Test item: Radiation Test      Date: 17/09/07/  
 Temp. ( C)/Hum.(%) 25 C / 55 %      Time: 10/21/10  
 EUT: Nano HD Video Drone with LED Lights      Engineer Signature: DING  
 Mode: TX 2475MHz      Distance: 3m  
 Model: 206003-1  
 Manufacturer: PURE TOY LIMITED


Note: Report NO.:ATE20171778

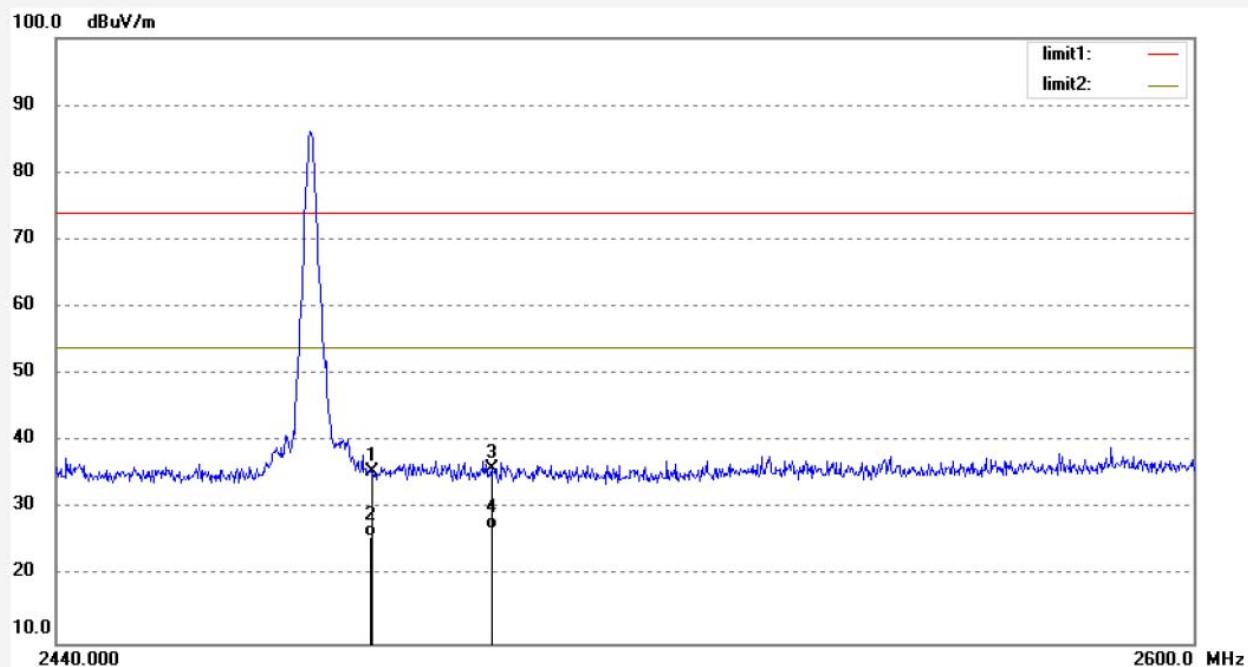

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	40.94	-5.51	35.43	74.00	-38.57	peak	220	29	
2	2483.500	31.48	-5.51	25.97	54.00	-28.03	AVG	220	28	
3	2500.000	41.44	-5.50	35.94	74.00	-38.06	peak	210	311	
4	2500.000	32.56	-5.50	27.06	54.00	-26.94	AVG	210	310	


Job No.: DING11 #1020      Polarization: Vertical  
 Standard: FCC PK      Power Source: DC 3V  
 Test item: Radiation Test      Date: 17/09/07/  
 Temp. ( C)/Hum.(%) 25 C / 55 %      Time: 10/22/56  
 EUT: Nano HD Video Drone with LED Lights      Engineer Signature: DING  
 Mode: TX 2475MHz      Distance: 3m  
 Model: 206003-1  
 Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

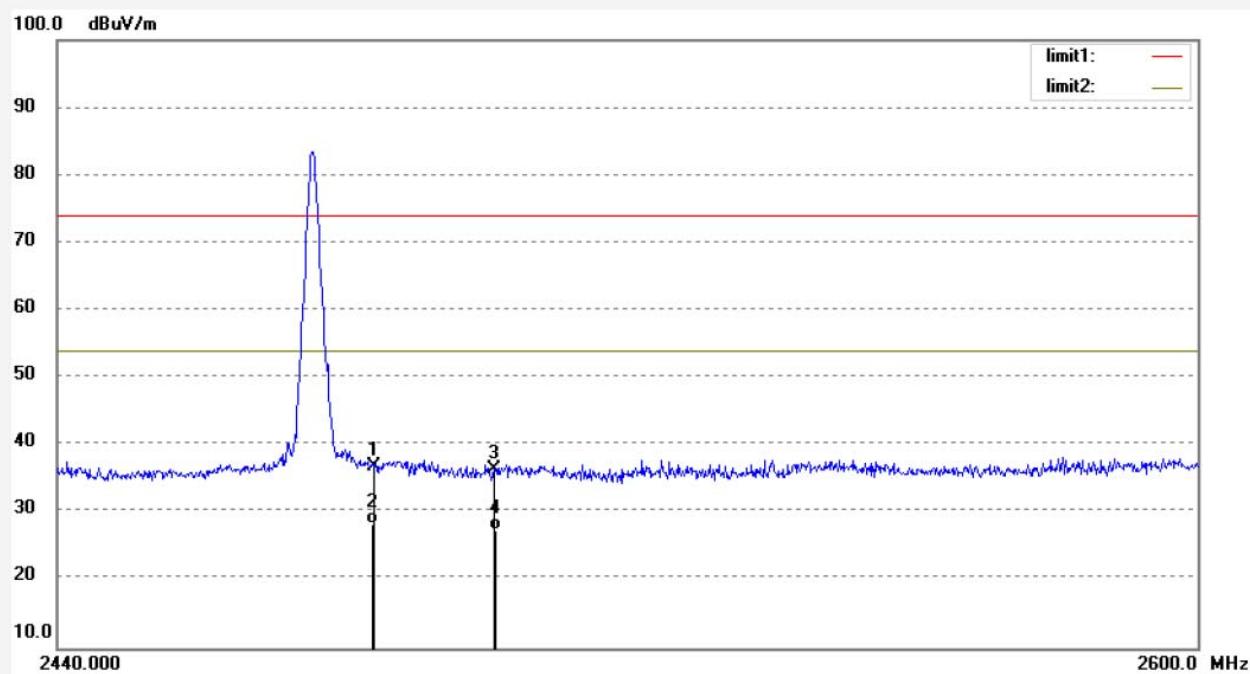


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	42.44	-5.51	36.93	74.00	-37.07	peak	171	29	
2	2483.500	33.76	-5.51	28.25	54.00	-25.75	AVG	170	27	
3	2500.000	41.94	-5.50	36.44	74.00	-37.56	peak	180	123	
4	2500.000	32.88	-5.50	27.38	54.00	-26.62	AVG	180	122	

Job No.: DING11 #1022	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3V
Test item: Radiation Test	Date: 17/09/07/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 10/26/52
EUT: Nano HD Video Drone with LED Lights	Engineer Signature: DING
Mode: TX 2405MHz	Distance: 3m
Model: 206003-1	
Manufacturer: PURE TOY LIMITED	
Note: Report NO.:ATE20171778	

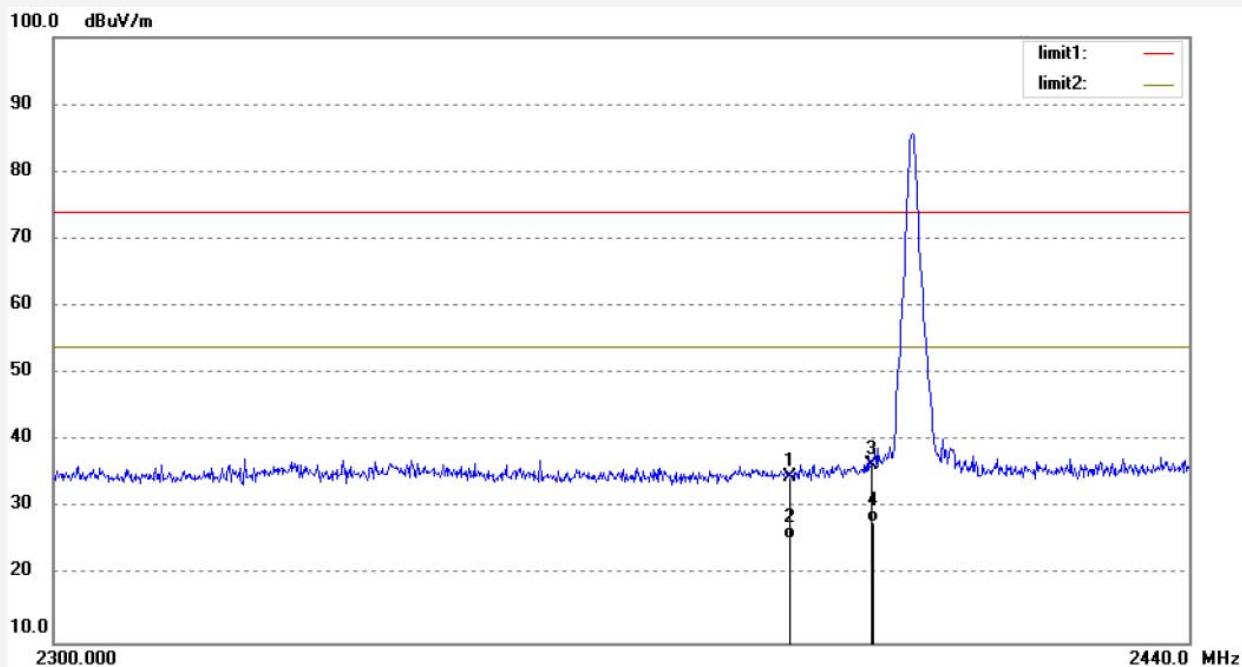

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	40.49	-5.89	34.60	74.00	-39.40	peak	160	238	
2	2390.000	31.25	-5.89	25.36	54.00	-28.64	AVG	160	237	
3	2400.000	42.29	-5.80	36.49	74.00	-37.51	peak	170	26	
4	2400.000	33.74	-5.80	27.94	54.00	-26.06	AVG	170	26	

Job No.: DING11 #1021      Polarization: Vertical  
 Standard: FCC PK      Power Source: DC 3V  
 Test item: Radiation Test      Date: 17/09/07/  
 Temp. ( C)/Hum.(%) 25 C / 55 %      Time: 10/24/49  
 EUT: Nano HD Video Drone with LED Lights      Engineer Signature: DING  
 Mode: TX 2405MHz      Distance: 3m  
 Model: 206003-1  
 Manufacturer: PURE TOY LIMITED  
 Note: Report NO.:ATE20171778

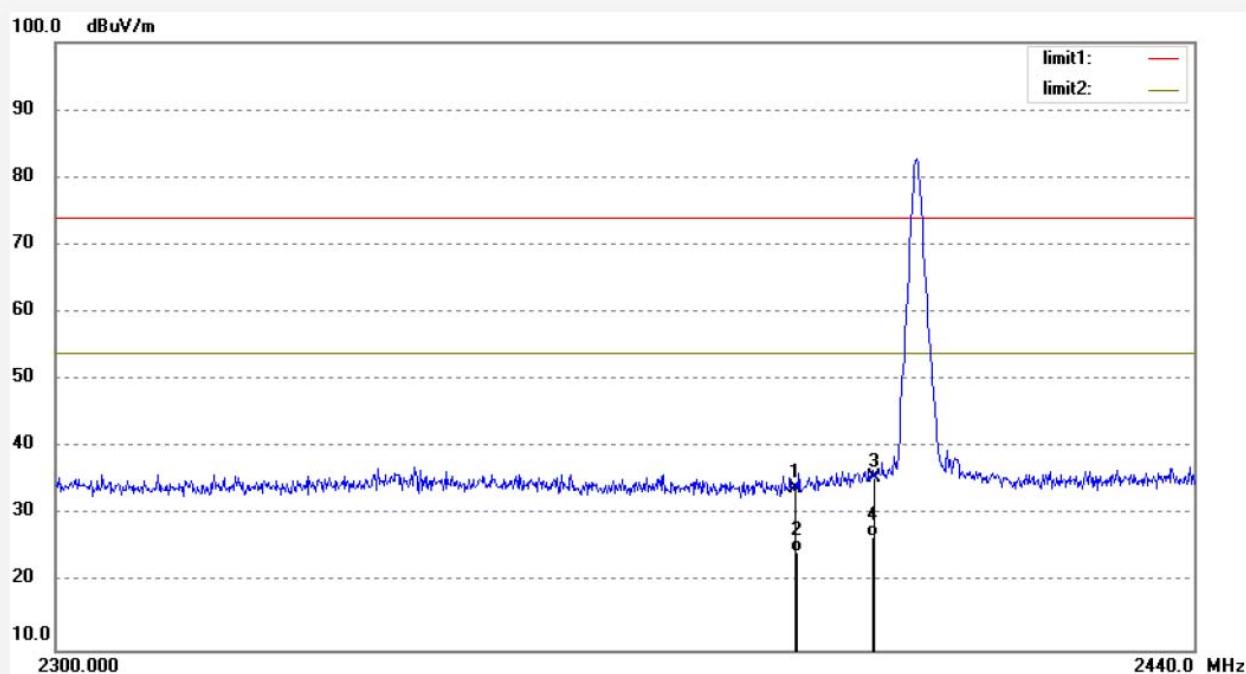

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	39.96	-5.89	34.07	74.00	-39.93	peak	178	127	
2	2390.000	30.42	-5.89	24.53	54.00	-29.47	AVG	179	128	
3	2400.000	41.29	-5.80	35.49	74.00	-38.51	peak	180	126	
4	2400.000	32.59	-5.80	26.79	54.00	-27.21	AVG	180	126	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:  

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.
4. The average measurement was not performed when peak measured data under the limit of average detection.

## 7. RADIATED SPURIOUS EMISSION TEST

### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and peripherals


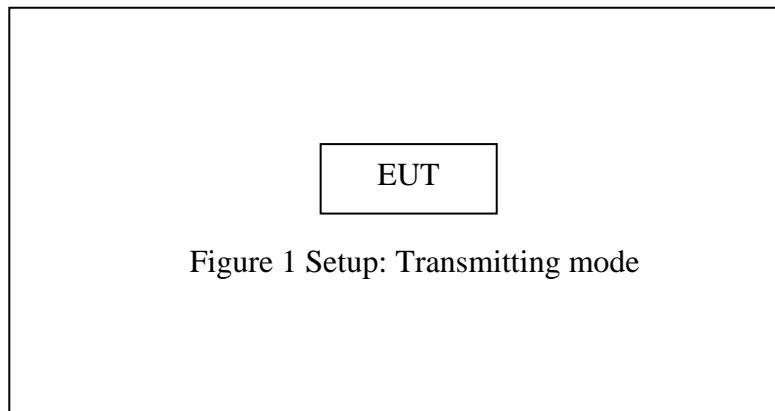



Figure 1 Setup: Transmitting mode

#### 7.1.2. Semi-Anechoic Chamber Test Setup Diagram


##### (A) Radiated Emission Test Set-Up, Frequency below 30MHz

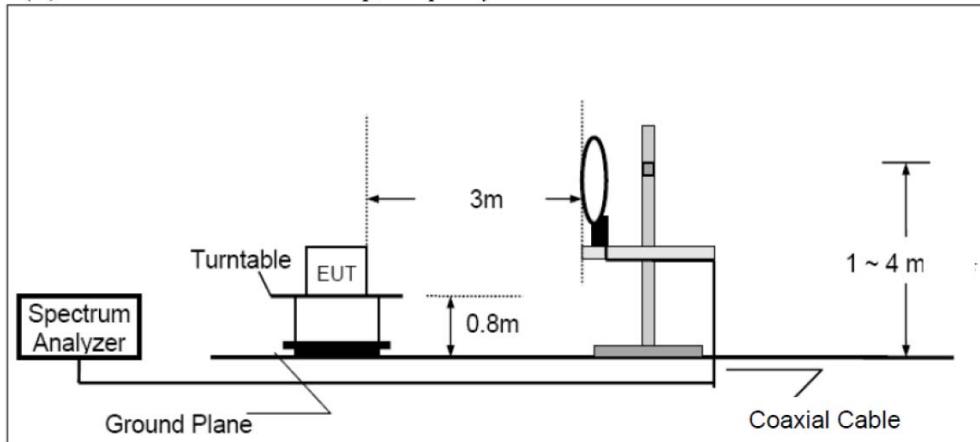

##### (B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

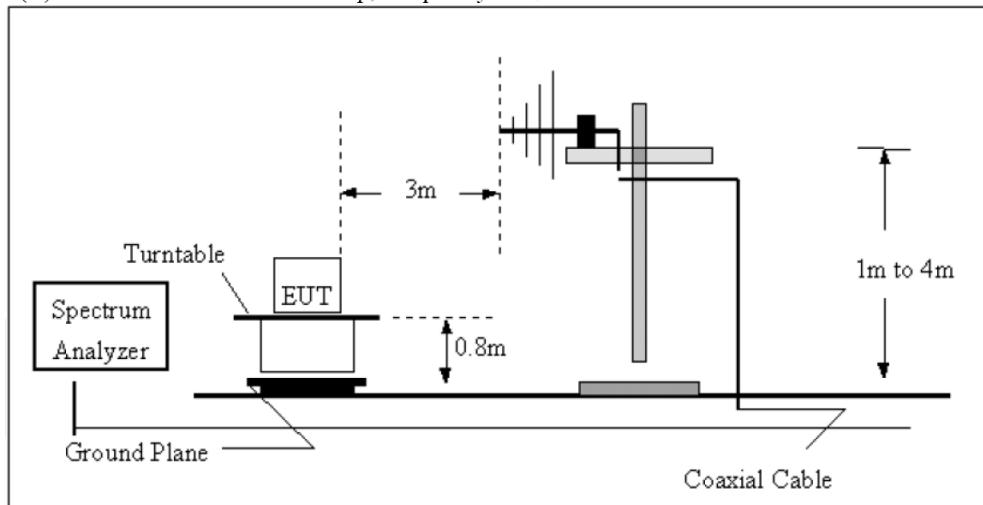

## (C) Radiated Emission Test Set-Up, Frequency above 1GHz

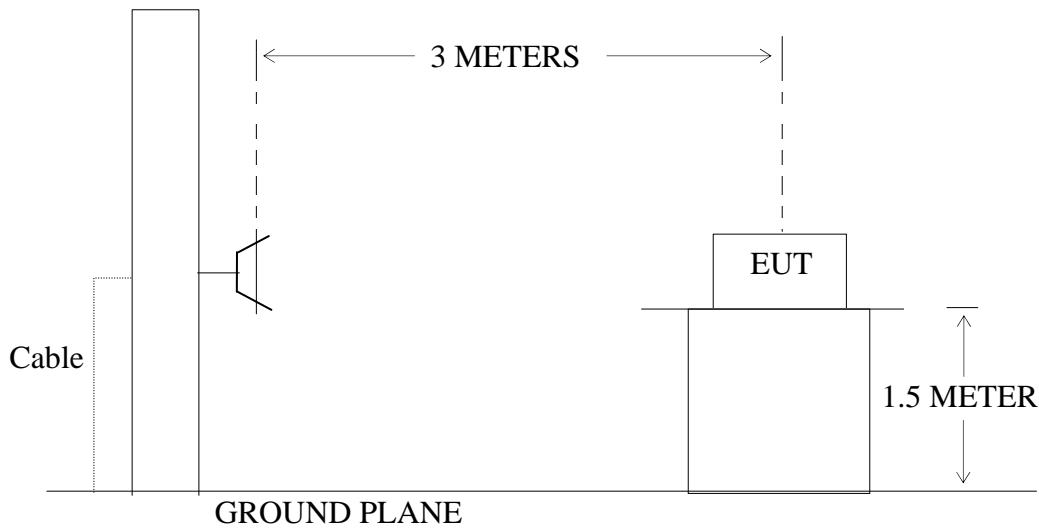

### 7.2. The Limit For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 7.3.Restricted bands of operation

#### 7.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 7.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 7.5.Operating Condition of EUT

7.5.1.Setup the EUT and simulator as shown as Section 7.1.

7.5.2.Turn on the power of all equipment.

7.5.3.Let the EUT work in TX modes and measure it. The transmit frequency are 2405, 2445, 2475MHz.

## 7.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter(Below 1GHz) and 1.5m(above 1GHz) high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz

Peak detector above 1GHz

RBW (1 MHz), VBW (3MHz) for Peak measurement

RBW (1 MHz), VBW (10Hz) for AV measurement

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

## 7.7. The Field Strength of Radiation Emission Measurement Results **PASS.**

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. \*: Denotes restricted band of operation.

3. The EUT is tested radiation emission in three axes. The worst emissions are reported in all channels.

4. The radiation emissions from 9KHz-30MHz and 18GHz-25GHz are not reported, because the test values lower than the limits of 20dB.

5. The average measurement was not performed when peak measured data under the limit of average detection.

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING11 #1007

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 17/09/07/

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 10/00/12

EUT: Nano HD Video Drone with LED Lights

Engineer Signature: DING


Mode: TX 2405MHz

Distance: 3m

Model: 206003-1

Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

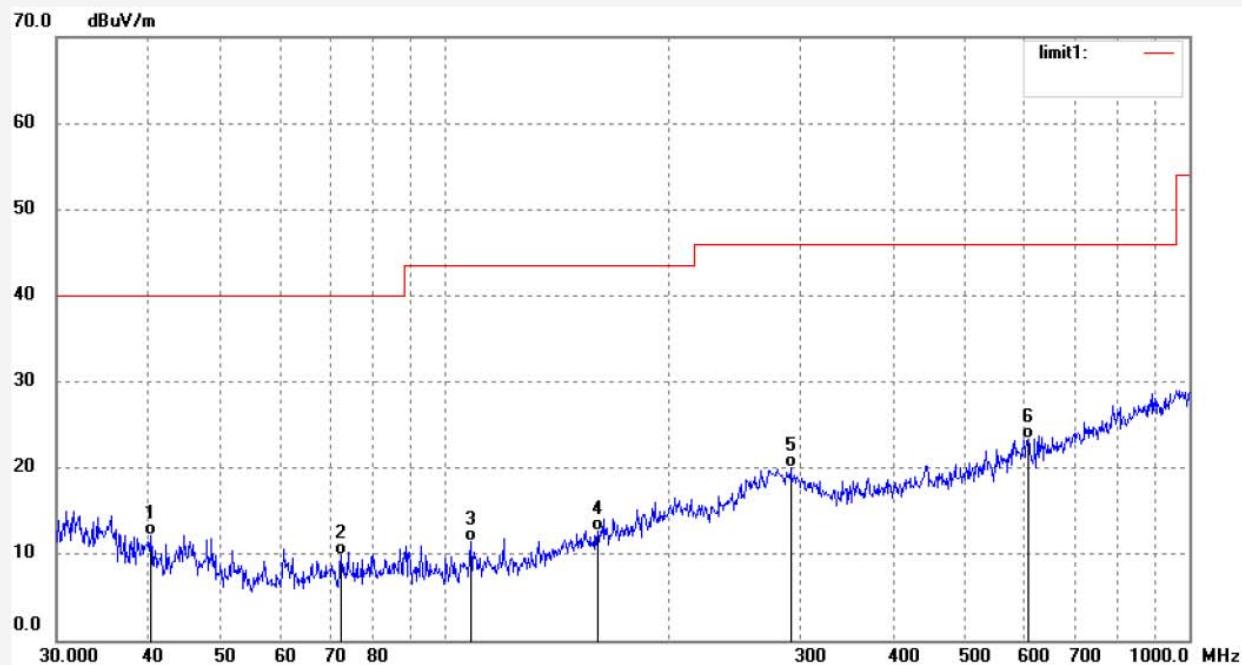


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.1581	30.21	-18.13	12.08	40.00	-27.92	QP	100	39	
2	72.4653	32.04	-22.19	9.85	40.00	-30.15	QP	120	310	
3	108.1648	33.54	-22.15	11.39	43.50	-32.11	QP	130	28	
4	160.3209	34.03	-21.34	12.69	43.50	-30.81	QP	140	122	
5	291.3388	36.14	-16.11	20.03	46.00	-25.97	QP	110	46	
6	607.1806	31.64	-8.23	23.41	46.00	-22.59	QP	120	301	

Job No.: DING11 #1008  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Nano HD Video Drone with LED Lights  
 Mode: TX 2405MHz  
 Model: 206003-1  
 Manufacturer: PURE TOY LIMITED

Polarization: Vertical  
 Power Source: DC 3V  
 Date: 17/09/07/  
 Time: 10/01/32  
 Engineer Signature: DING  
 Distance: 3m


Note: Report NO.:ATE20171778

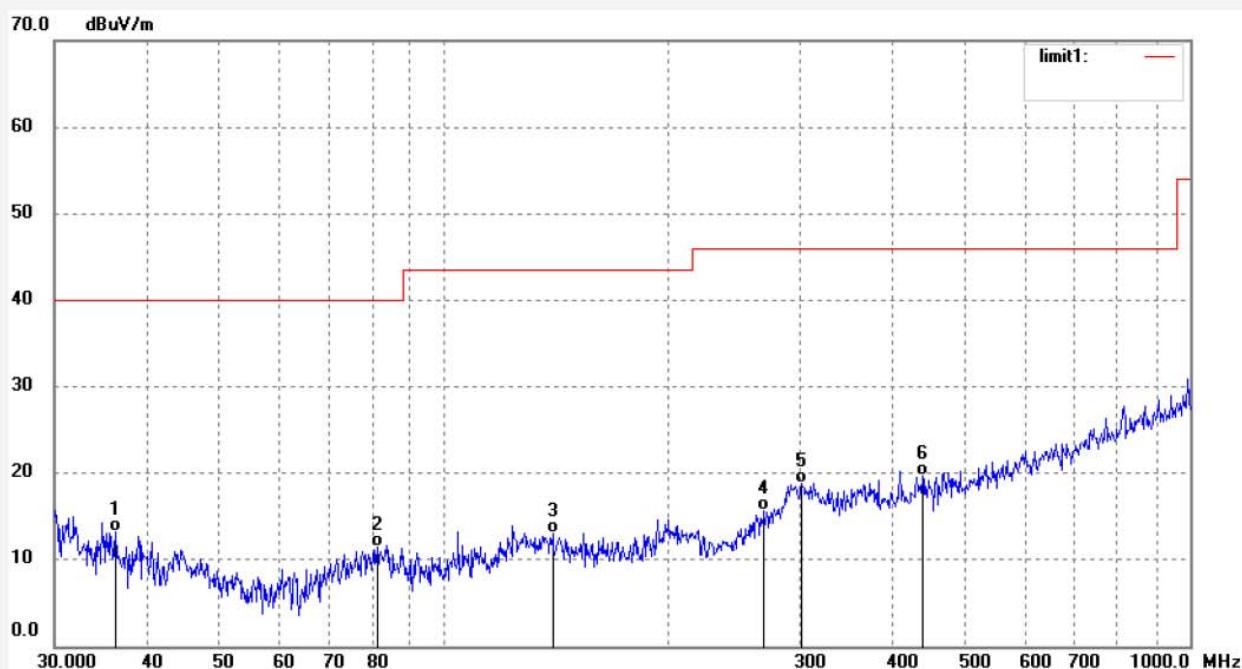

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.2678	29.72	-16.49	13.23	40.00	-26.77	QP	110	210	
2	81.3740	33.47	-21.99	11.48	40.00	-28.52	QP	120	320	
3	139.7909	35.39	-22.30	13.09	43.50	-30.41	QP	138	230	
4	268.7212	32.83	-17.11	15.72	46.00	-30.28	QP	122	25	
5	301.7572	34.51	-15.67	18.84	46.00	-27.16	QP	210	329	
6	437.9316	31.95	-12.21	19.74	46.00	-26.26	QP	112	42	

Job No.: DING11 #1010      Polarization: Horizontal  
 Standard: FCC Class B 3M Radiated      Power Source: DC 3V  
 Test item: Radiation Test      Date: 17/09/07/  
 Temp. ( C) / Hum. (%) 25 C / 55 %      Time: 10/02/33  
 EUT: Nano HD Video Drone with LED Lights      Engineer Signature: DING  
 Mode: TX 2445MHz      Distance: 3m  
 Model: 206003-1  
 Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

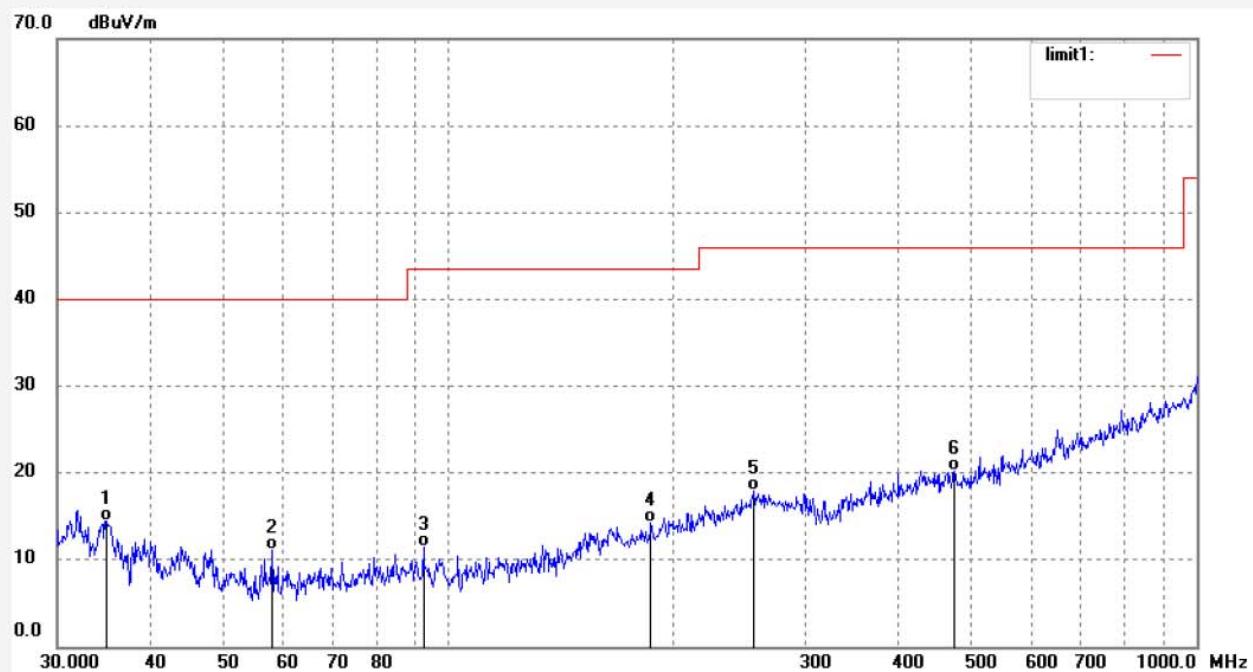

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8928	30.41	-15.92	14.49	40.00	-25.51	QP	100	302	
2	58.0759	32.76	-21.73	11.03	40.00	-28.97	QP	100	204	
3	92.6712	33.38	-21.92	11.46	43.50	-32.04	QP	100	172	
4	186.4684	33.97	-19.73	14.24	43.50	-29.26	QP	110	187	
5	255.8226	35.74	-17.80	17.94	46.00	-28.06	QP	120	232	
6	474.7913	31.55	-11.29	20.26	46.00	-25.74	QP	130	19	

Job No.: DING11 #1009

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 17/09/07/

Temp. ( C )/Hum.(%) 25 C / 55 %

Time: 10/01/55

EUT: Nano HD Video Drone with LED Lights

Engineer Signature: DING


Mode: TX 2445MHz

Distance: 3m

Model: 206003-1


Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

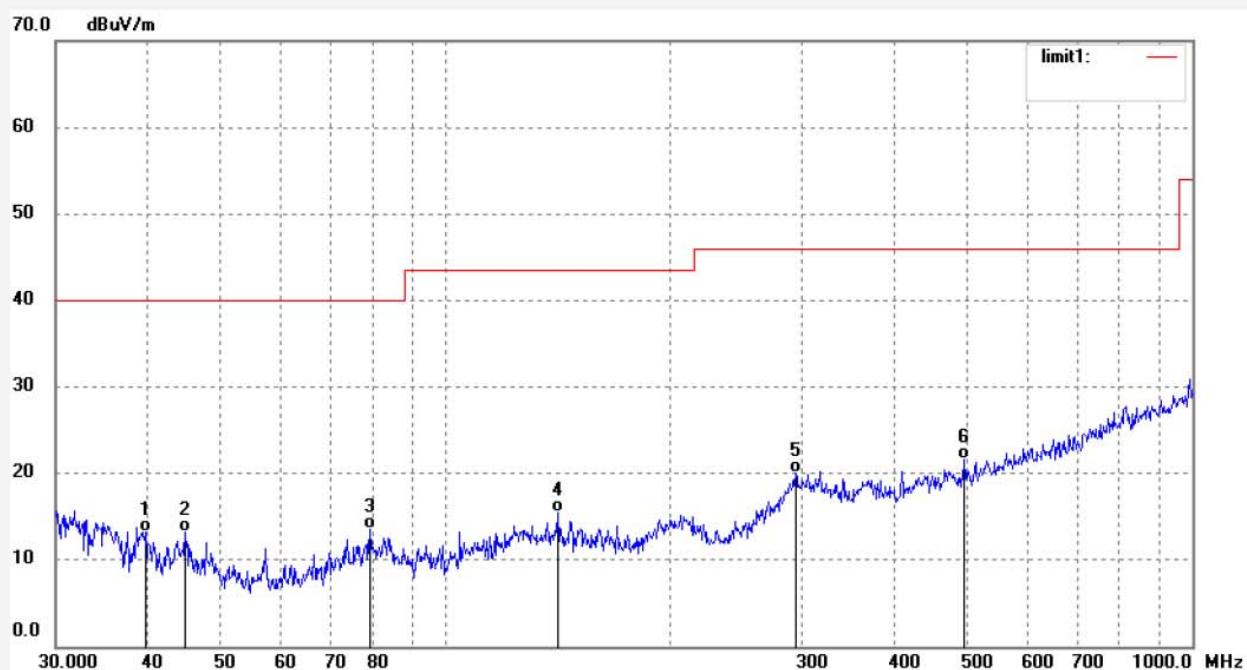

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.5977	31.17	-17.92	13.25	40.00	-26.75	QP	110	129	
2	44.7793	32.16	-18.88	13.28	40.00	-26.72	QP	120	23	
3	79.1185	35.56	-22.06	13.50	40.00	-26.50	QP	136	218	
4	141.2722	37.77	-22.32	15.45	43.50	-28.05	QP	181	34	
5	294.4260	36.06	-15.95	20.11	46.00	-25.89	QP	220	21	
6	495.2379	32.56	-10.98	21.58	46.00	-24.42	QP	120	180	

Job No.: DING11 #1011	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 17/09/07/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 10/02/51
EUT: Nano HD Video Drone with LED Lights	Engineer Signature: DING
Mode: TX 2475MHz	Distance: 3m
Model: 206003-1	
Manufacturer: PURE TOY LIMITED	
Note: Report NO.:ATE20171778	

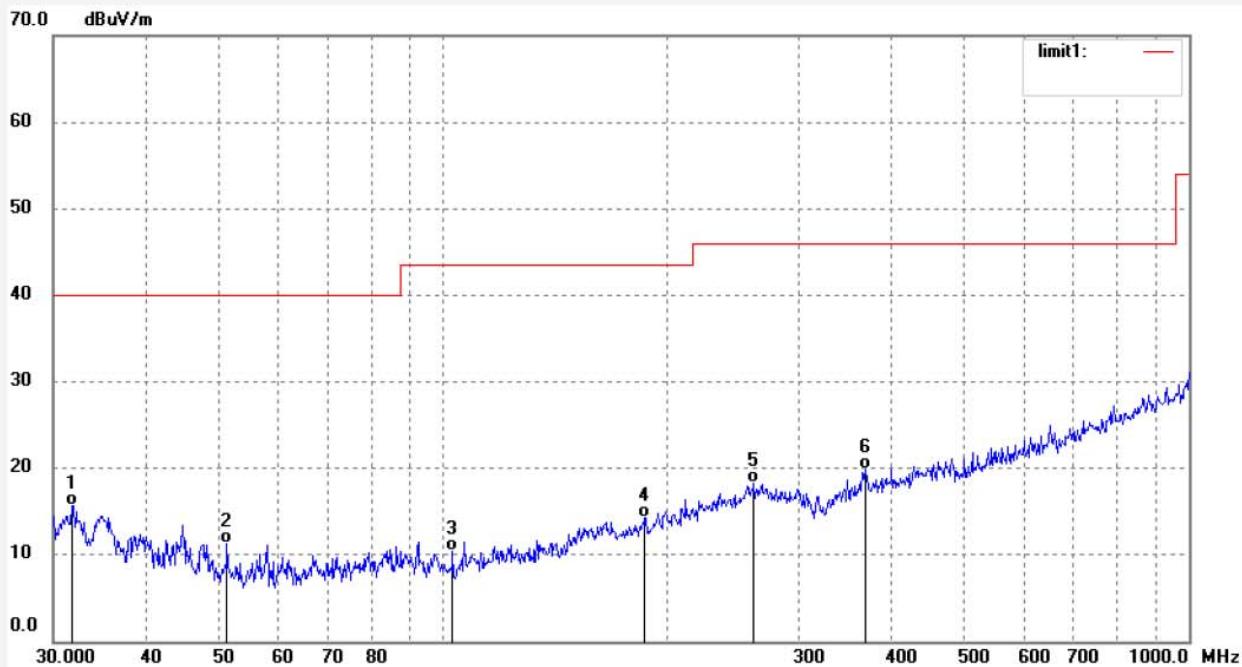

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.7348	30.86	-15.14	15.72	40.00	-24.28	QP	110	14	
2	51.3557	32.36	-21.02	11.34	40.00	-28.66	QP	120	239	
3	102.9729	33.13	-22.69	10.44	43.50	-33.06	QP	120	310	
4	186.4684	33.97	-19.73	14.24	43.50	-29.26	QP	130	204	
5	261.2730	35.77	-17.46	18.31	46.00	-27.69	QP	140	192	
6	368.6681	33.20	-13.36	19.84	46.00	-26.16	QP	120	38	

Job No.: DING11 #1012

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 17/09/07/

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 10/05/16

EUT: Nano HD Video Drone with LED Lights

Engineer Signature: DING


Mode: TX 2475MHz

Distance: 3m

Model: 206003-1

Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

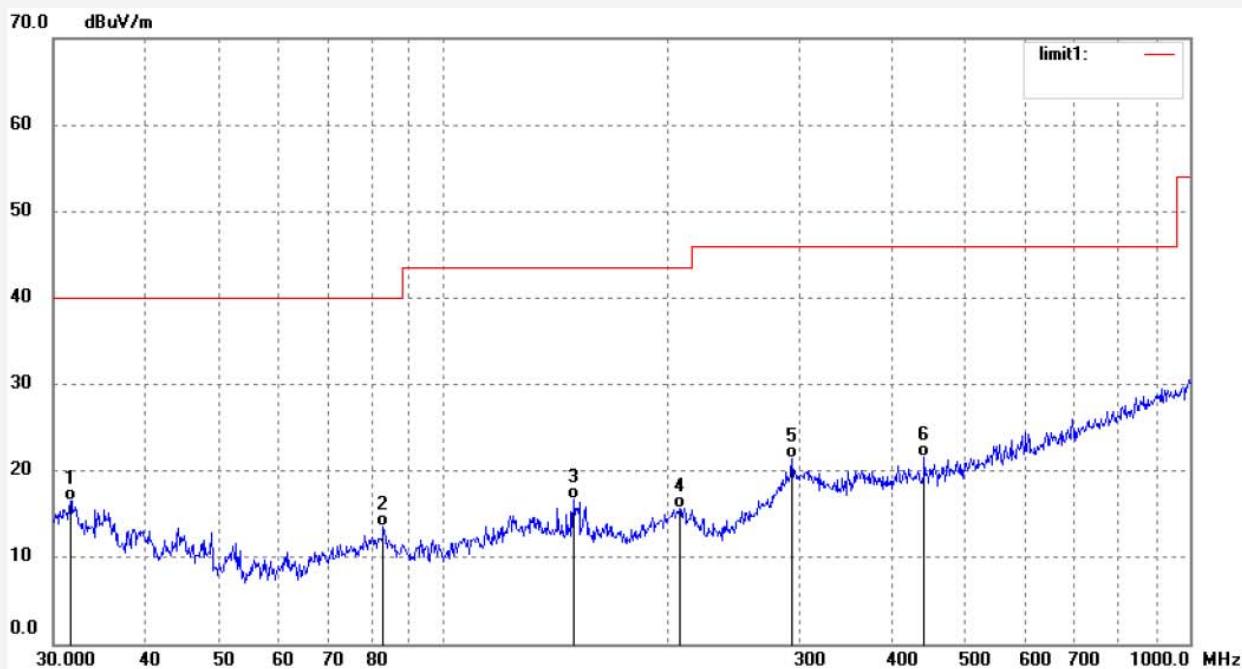

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.6235	31.70	-15.10	16.60	40.00	-23.40	QP	120	289	
2	83.1076	35.46	-21.98	13.48	40.00	-26.52	QP	130	120	
3	149.4416	39.12	-22.35	16.77	43.50	-26.73	QP	140	329	
4	207.1968	34.16	-18.47	15.69	43.50	-27.81	QP	128	231	
5	293.3933	37.40	-16.01	21.39	46.00	-24.61	QP	130	17	
6	441.0199	33.67	-12.13	21.54	46.00	-24.46	QP	100	186	

Above 1GHz



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING11 #1014

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 17/09/07/

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 10/08/35

EUT: Nano HD Video Drone with LED Lights

Engineer Signature: DING


Mode: TX 2405MHz

Distance: 3m

Model: 206003-1


Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

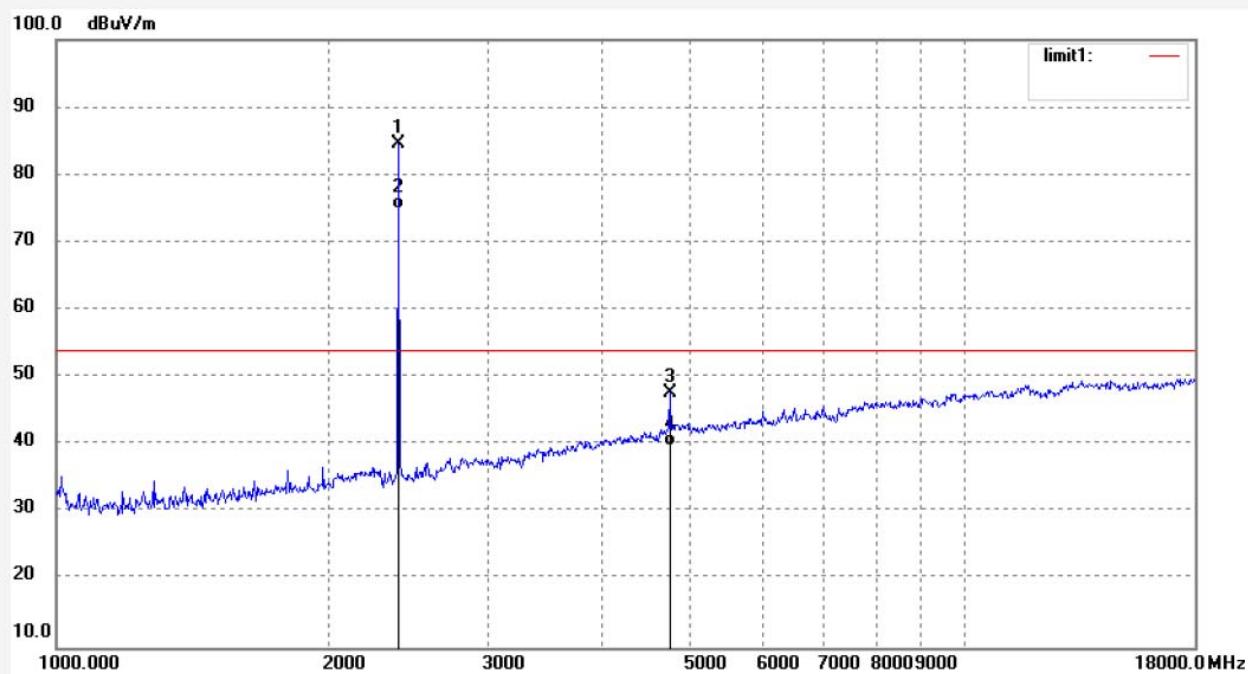

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.319	90.50	-5.98	84.52	114.00	-29.48	peak	150	37	
2	2405.319	80.79	-5.98	74.81	94.00	-19.19	AVG	150	38	
3	4810.751	44.57	3.23	47.80	74.00	-26.20	peak	160	329	
4	4810.751	36.58	3.23	39.81	54.00	-14.19	AVG	160	330	


Job No.: DING11 #1013	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 17/09/07/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 10/07/01
EUT: Nano HD Video Drone with LED Lights	Engineer Signature: DING
Mode: TX 2405MHz	Distance: 3m
Model: 206003-1	
Manufacturer: PURE TOY LIMITED	
Note: Report NO.:ATE20171778	

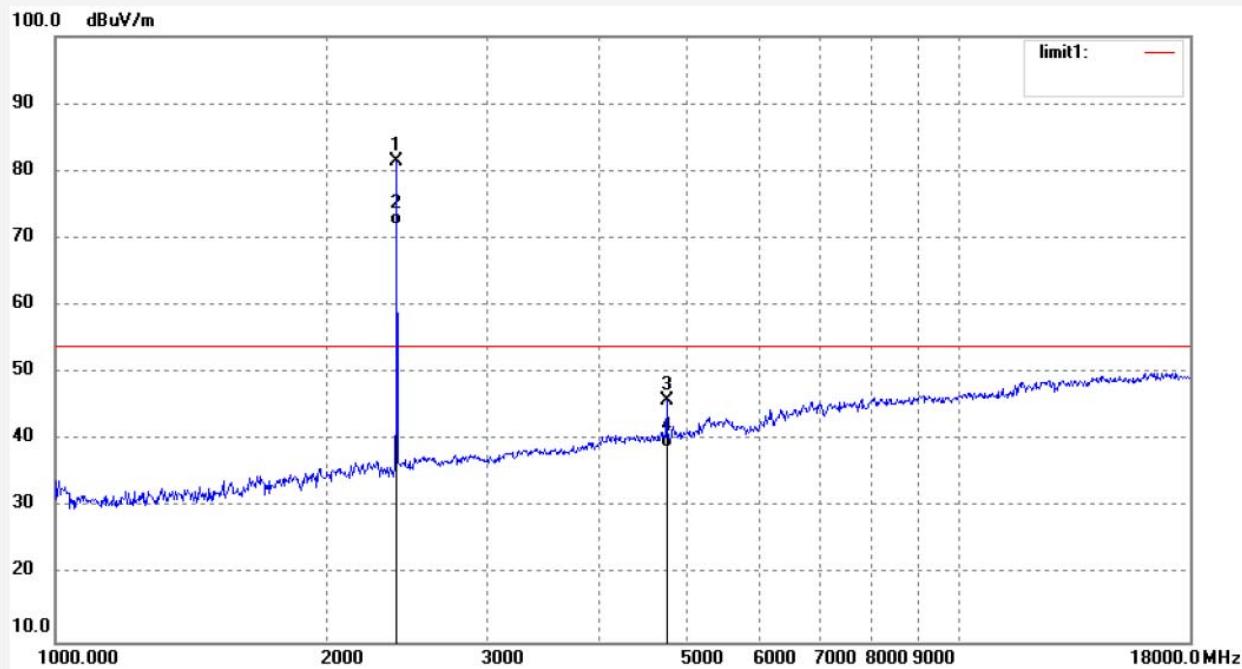

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.359	87.46	-5.91	81.55	114.00	-32.45	peak	150	14	
2	2405.359	77.95	-5.91	72.04	94.00	-21.96	AVG	150	15	
3	4810.751	42.64	3.23	45.87	74.00	-28.13	peak	150	239	
4	4810.751	35.71	3.23	38.94	54.00	-15.06	AVG	150	240	


Job No.: DING11 #1015      Polarization: Horizontal  
 Standard: FCC Class B 3M Radiated      Power Source: DC 3V  
 Test item: Radiation Test      Date: 17/09/07/  
 Temp.( C)/Hum.(%) 25 C / 55 %      Time: 10/13/23  
 EUT: Nano HD Video Drone with LED Lights      Engineer Signature: DING  
 Mode: TX 2445MHz      Distance: 3m  
 Model: 206003-1  
 Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

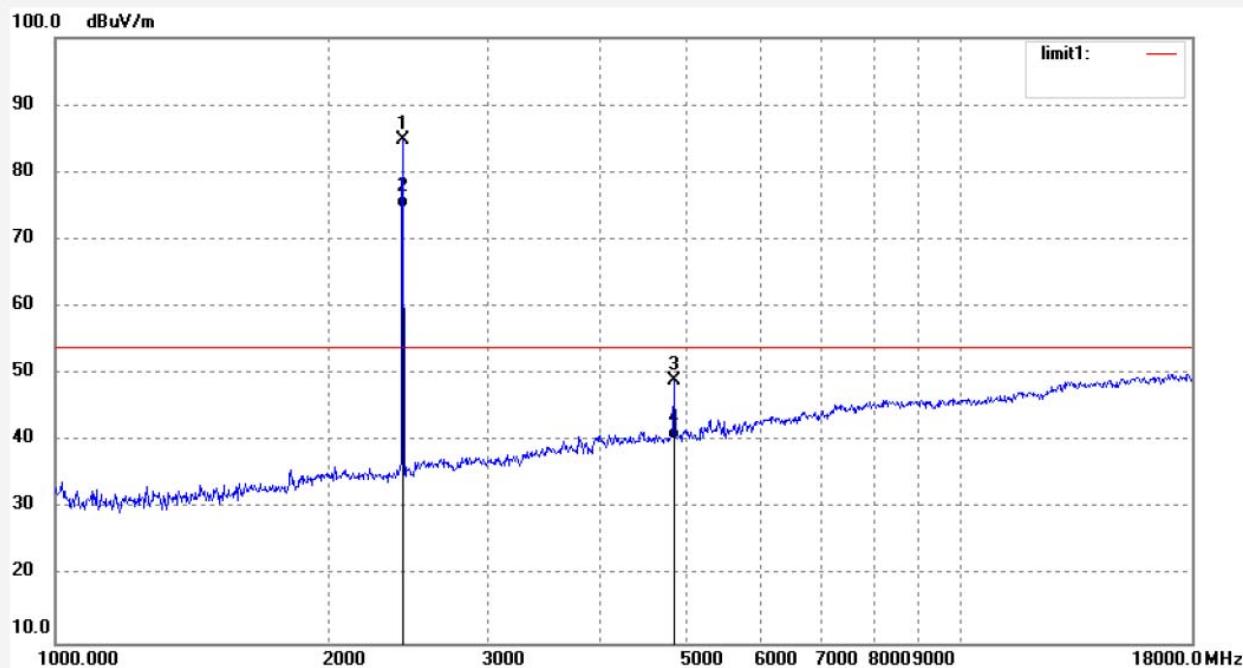

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2445.162	90.52	-5.69	84.83	114.00	-29.17	peak	160	28	
2	2445.162	80.43	-5.69	74.74	94.00	-19.26	AVG	160	29	
3	4890.361	45.29	3.80	49.09	74.00	-24.91	peak	150	238	
4	4890.361	36.42	3.80	40.22	54.00	-13.78	AVG	150	240	

Job No.: DING11 #1016	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 17/09/07/
Temp. ( C)/Hum.(%) 25 C / 55 %	Time: 10/14/29
EUT: Nano HD Video Drone with LED Lights	Engineer Signature: DING
Mode: TX 2445MHz	Distance: 3m
Model: 206003-1	
Manufacturer: PURE TOY LIMITED	
Note: Report NO.:ATE20171778	

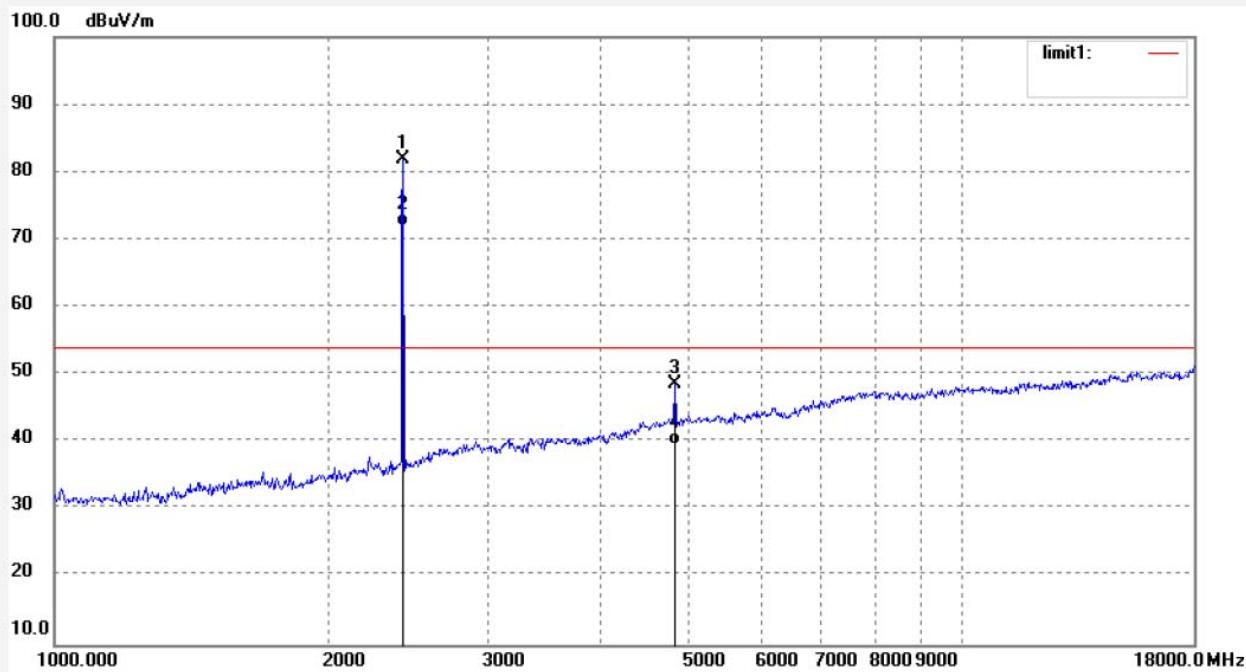

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2445.162	87.52	-5.69	81.83	114.00	-32.17	peak	152	90	
2	2445.162	77.61	-5.69	71.92	94.00	-22.08	AVG	151	89	
3	4890.361	44.79	3.80	48.59	74.00	-25.41	peak	157	287	
4	4890.361	35.83	3.80	39.63	54.00	-14.37	AVG	158	288	




## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.:	DING11 #1018	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	DC 3V
Test item:	Radiation Test	Date:	17/09/07/
Temp.( C)/Hum.(%)	25 C / 55 %	Time:	10/18/31
EUT:	Nano HD Video Drone with LED Lights	Engineer Signature:	DING
Mode:	TX 2475MHz	Distance:	3m
Model:	206003-1		
Manufacturer:	PURE TOY LIMITED		
Note:	Report NO.:ATE20171778		

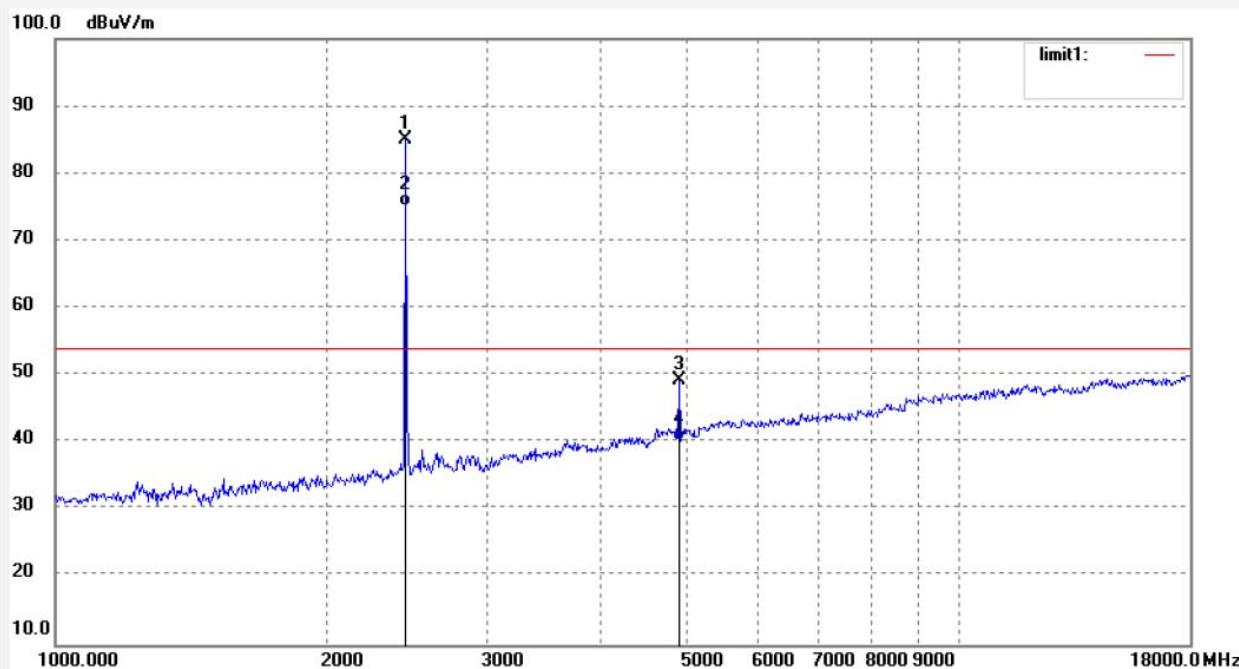

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2475.007	90.75	-5.61	85.14	114.00	-18.86	peak	160	237	
2	2475.007	80.64	-5.61	75.03	94.00	-18.97	AVG	160	238	
3	4950.160	44.77	4.46	49.23	74.00	-24.77	peak	150	221	
4	4950.160	35.84	4.46	40.30	54.00	-13.70	AVG	150	220	



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: DING11 #1017

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 17/09/07/

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 10/16/36

EUT: Nano HD Video Drone with LED Lights

Engineer Signature: DING


Mode: TX 2475MHz

Distance: 3m

Model: 206003-1

Manufacturer: PURE TOY LIMITED

Note: Report NO.:ATE20171778

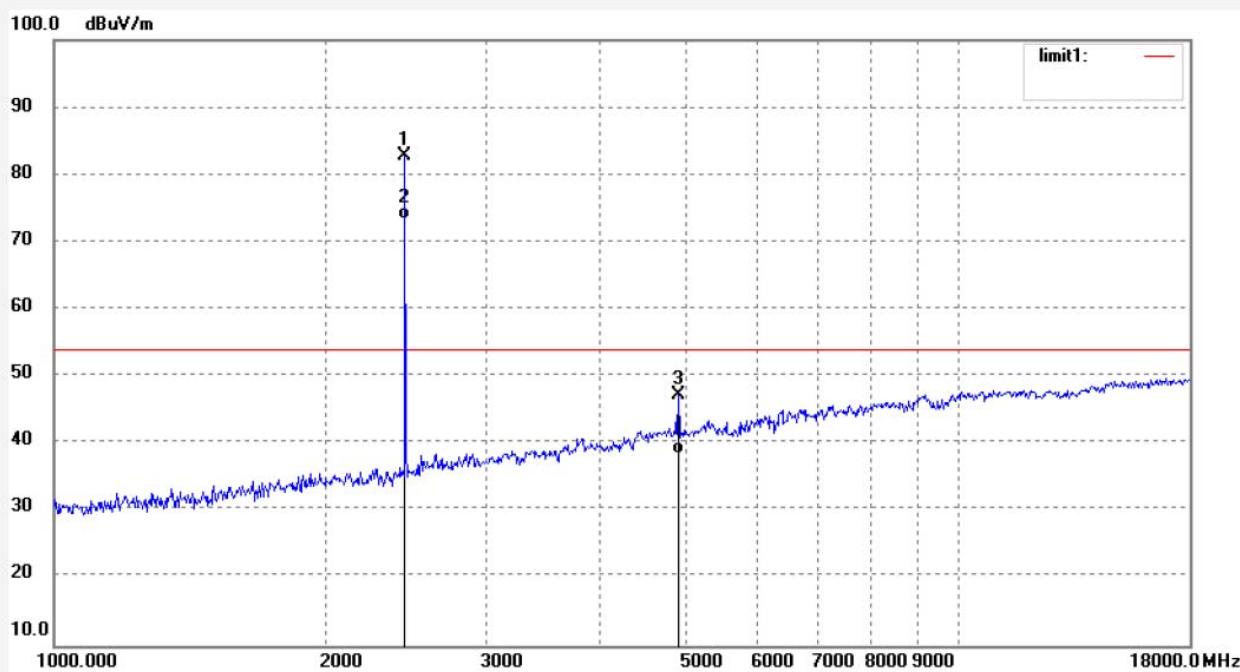

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2475.010	88.35	-5.58	82.77	114.00	-31.23	peak	152	323	
2	2475.010	78.94	-5.58	73.36	94.00	-20.64	AVG	153	229	
3	4950.160	42.77	4.46	47.23	74.00	-26.77	peak	155	30	
4	4950.160	33.95	4.46	38.41	54.00	-15.59	AVG	155	31	


## 8. ANTENNA REQUIREMENT

### 8.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 1dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

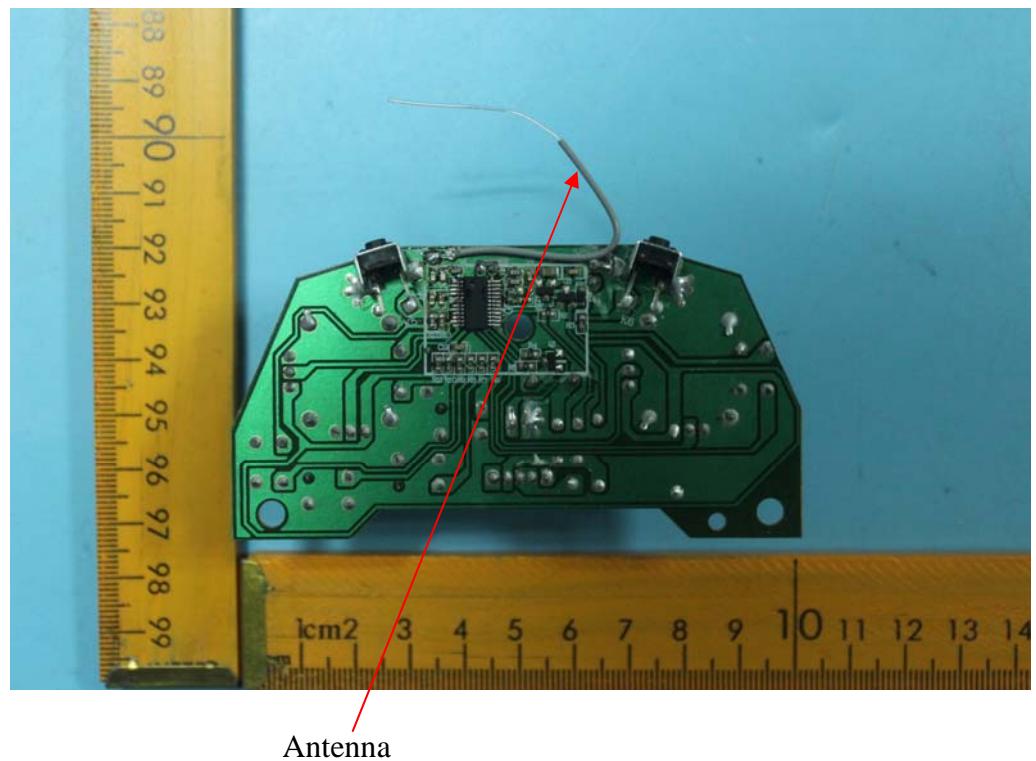

## 9. PHOTO OF EUT









