

FCC TEST REPORT

For

Shenzhen ISONWIFI Co.,Ltd

Smart-Home WiFi System

Model No.: e+2, e+1, e+3, e+4, e+5, e+6, e+7, e+8, e+9

Prepared For : Shenzhen ISONWIFI Co.,Ltd
Address : 3/F, Building 1, Henghui Science and Technology Park, Yuxing Road
NO.63 GuangMing New District, Shenzhen China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066365 Fax: (86) 755-26014772

Report Number : SZAWW180123006-01
Date of Test : Jan. 23~Mar. 31, 2018
Date of Report : Mar. 31, 2018

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	8
1.7. Test Equipment List.....	9
1.8. Measurement Uncertainty.....	10
1.9. Description of Test Facility.....	10
2. Summary of Test Results.....	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup.....	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission and Band Edge.....	17
4.1. Test Standard and Limit.....	17
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Peak Output Power Test.....	29
5.1. Test Standard and Limit.....	29
5.2. Test Setup.....	29
5.3. Test Procedure.....	29
5.4. Test Data.....	29
6. 6DB Occupy Bandwidth Test.....	36
6.1. Test Standard and Limit.....	36
6.2. Test Setup.....	36
6.3. Test Procedure.....	36
6.4. Test Data.....	36
7. Power Spectral Density Test.....	50
7.1. Test Standard and Limit.....	50
7.2. Test Setup.....	50
7.3. Test Procedure.....	50
7.4. Test Data.....	50
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	65
8.1. Test Standard and Limit.....	65
8.2. Test Setup.....	65
8.3. Test Procedure.....	65

8.4. Test Data.....65

9. Antenna Requirement.....87

 9.1. Test Standard and Requirement.....87

 9.2. Antenna Connected Construction.....87

APPENDIX I -- TEST SETUP PHOTOGRAPH.....88

APPENDIX II -- EXTERNAL PHOTOGRAPH.....90

APPENDIX III -- INTERNAL PHOTOGRAPH.....94



TEST REPORT

Applicant : Shenzhen ISONWIFI Co.,Ltd
Manufacturer : Shenzhen ISONWIFI Co.,Ltd
Product Name : Smart-Home WiFi System
Model No. : e+2, e+1, e+3, e+4, e+5, e+6, e+7, e+8, e+9
Trade Mark : ISONWIFI
Rating(s) : Input: DC 12V 1.5A

Test Standard(s) : **FCC Part15 Subpart C 2017, Section 15.247**
Test Method(s) : **ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v04**
KDB662911 D01 Multiple Transmitter Output v02r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Jan. 23~Mar. 31, 2018

Prepared by :  *Winkey Wang*
(Tested Engineer / Winkey Wang)

Reviewer : *Tangcy. T.*
(Project Manager /Tangcy. T)

Approved & Authorized Signer : *Tom Chen*
(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen ISONWIFI Co.,Ltd
Address	:	3/F, Building 1, Henghui Science and Technology Park, Yuxing Road NO.63 GuangMing New District, Shenzhen China
Manufacturer	:	Shenzhen ISONWIFI Co.,Ltd
Address	:	3/F, Building 1, Henghui Science and Technology Park, Yuxing Road NO.63 GuangMing New District, Shenzhen China

1.2. Description of Device (EUT)

Product Name	:	Smart-Home WiFi System	
Model No.	:	e+2, e+1, e+3, e+4, e+5, e+6, e+7, e+8, e+9 (Note: All samples are the same except the model number and colour, so we prepare “e+2” for test only.)	
Trade Mark	:	ISONWIFI	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter	
Product Description	:	Operation Frequency:	802.11b/ g/ n(HT20) 2412-2462MHz 802.11n(HT40) 2422-2452MHz
		Number of Channel:	11 Channels for 802.11b/ g/ n(HT20) 7 Channels for 802.11n(HT40)
		Modulation Type:	802.11b CCK; 802.11g/n OFDM
		Antenna Type:	PIFA Antenna
		Antenna Gain(Peak):	1.5 dBi
		The directional gain	4.51 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual. 2)This report is for WIFI 2.4G.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: HJF017-X120150XYC Input: 100-240V~50/60HZ, 0.5A Output: 12V/1.5A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanned based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

RADIATED EMISSION TEST (BELOW 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	CCK	DBPSK	1.0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode

EUT configure mode	Test Mode
-	TX+Charging mode

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.


Mode	Available Channel	Test Channel	Modulation Tech.	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5

1.5. List of channels


Channel	Freq. (MHz)						
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

1.6. Description Of Test Setup

CE

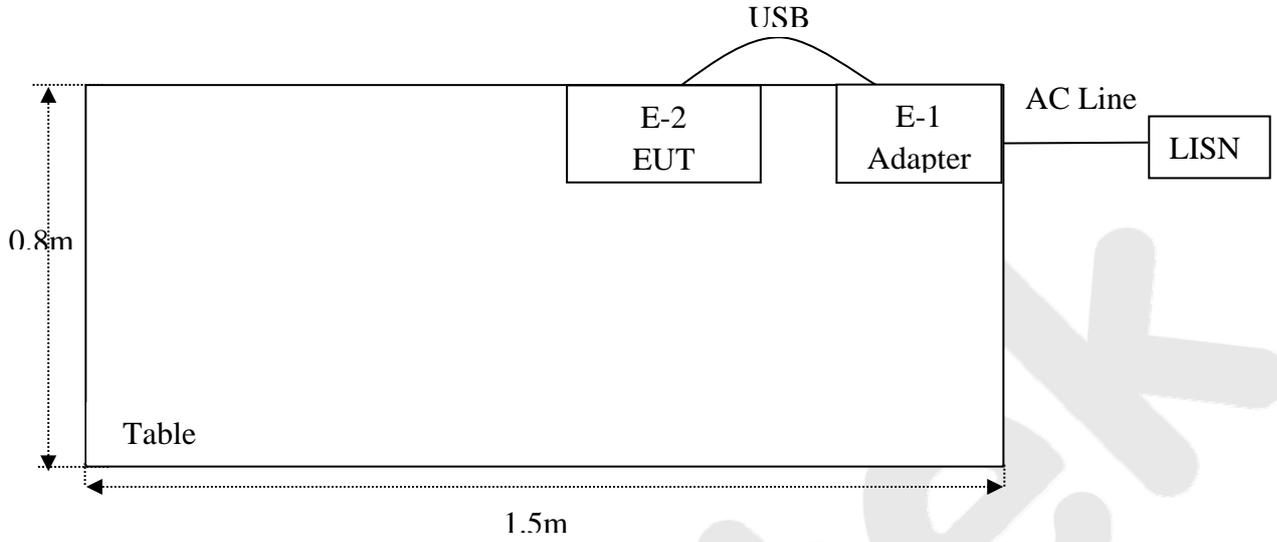

RE

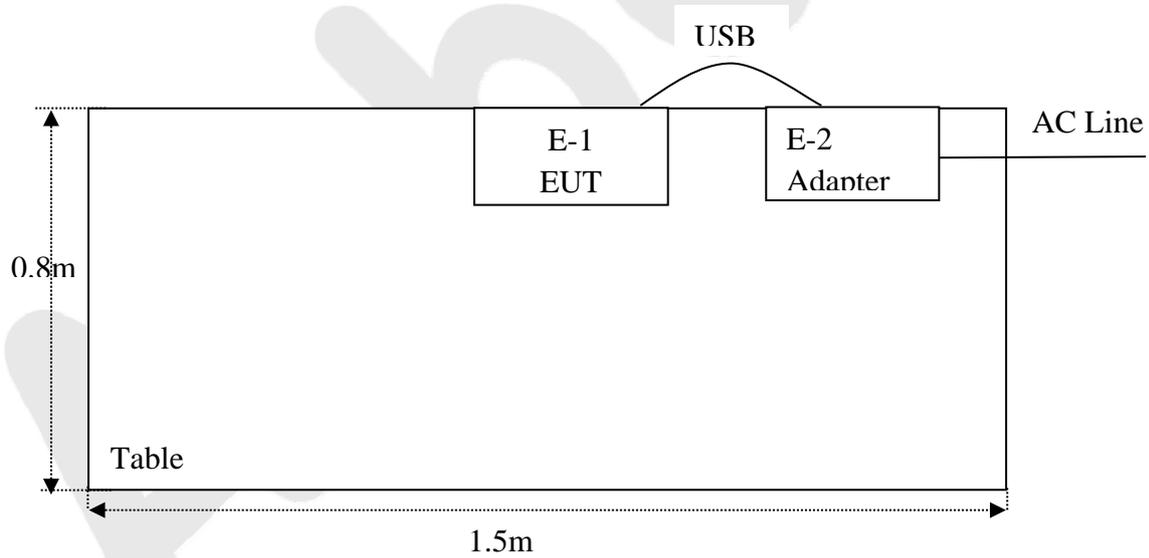

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80 B	ZJ-17042804	Nov. 01, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at Shenzhen Anbotek Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

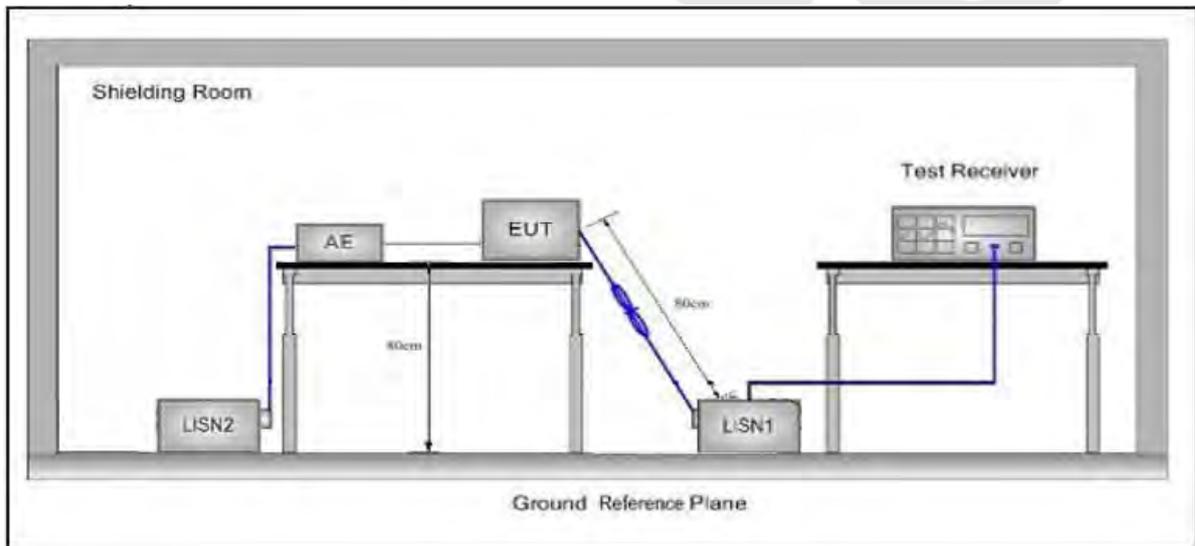

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX+Charging mode
 Test Specification: AC 120V, 60Hz via adapter
 Comment: Live Line
 Tem.:25.4°C Hum.:54%

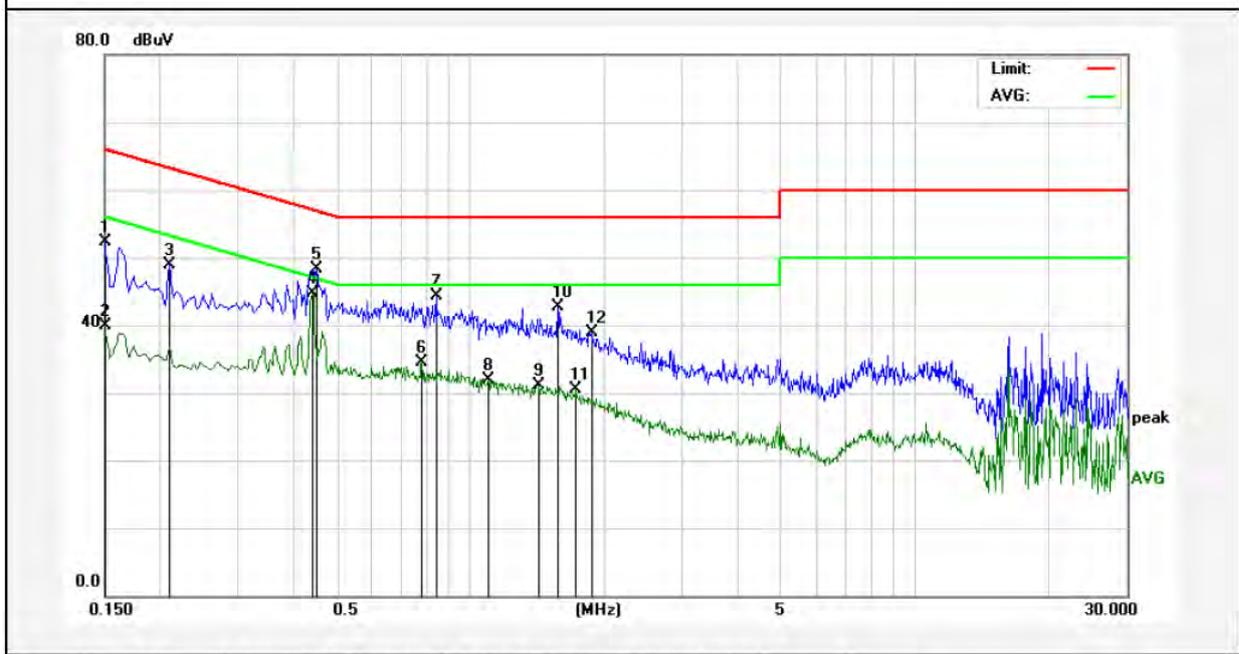

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	34.32	17.90	52.22	65.99	-13.77	QP	
2	0.1500	22.00	17.90	39.90	55.99	-16.09	AVG	
3	0.2100	30.92	17.90	48.82	63.20	-14.38	QP	
4	0.4420	26.75	17.95	44.70	47.02	-2.32	AVG	
5	0.4500	30.42	17.96	48.38	56.87	-8.49	QP	
6	0.7780	16.39	18.06	34.45	46.00	-11.55	AVG	
7	0.8380	26.23	18.08	44.31	56.00	-11.69	QP	
8	1.0940	13.80	18.12	31.92	46.00	-14.08	AVG	
9	1.4220	13.03	18.13	31.16	46.00	-14.84	AVG	
10	1.5700	24.52	18.13	42.65	56.00	-13.35	QP	
11	1.7300	12.35	18.13	30.48	46.00	-15.52	AVG	
12	1.8700	20.72	18.14	38.86	56.00	-17.14	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX+Charging mode
 Test Specification: AC 120V, 60Hz via adapter
 Comment: Neutral Line
 Tem.:25.4°C Hum.:54%

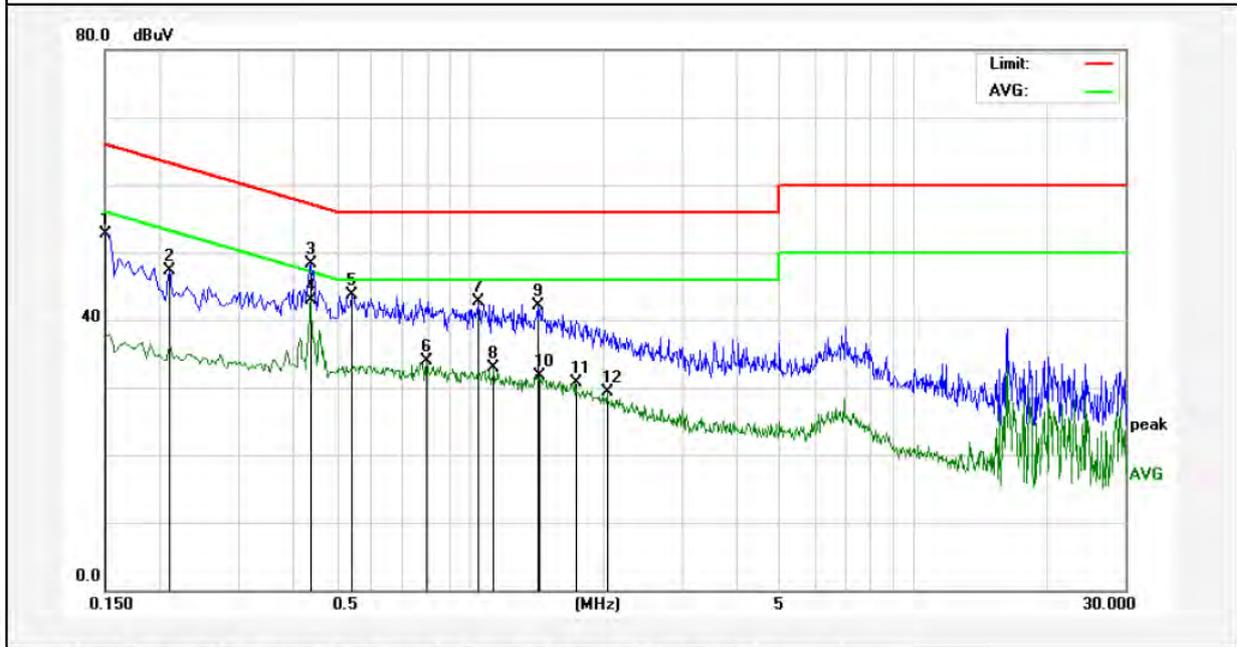

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	34.89	17.90	52.79	65.99	-13.20	QP	
2	0.2100	29.39	17.90	47.29	63.20	-15.91	QP	
3	0.4380	30.26	17.95	48.21	57.10	-8.89	QP	
4	0.4380	24.95	17.95	42.90	47.10	-4.20	AVG	
5	0.5420	25.80	17.99	43.79	56.00	-12.21	QP	
6	0.7980	15.89	18.07	33.96	46.00	-12.04	AVG	
7	1.0460	24.56	18.12	42.68	56.00	-13.32	QP	
8	1.1300	14.85	18.12	32.97	46.00	-13.03	AVG	
9	1.4220	24.02	18.13	42.15	56.00	-13.85	QP	
10	1.4340	13.48	18.13	31.61	46.00	-14.39	AVG	
11	1.7340	12.60	18.13	30.73	46.00	-15.27	AVG	
12	2.0420	11.14	18.14	29.28	46.00	-16.72	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX+Charging mode
 Test Specification: AC 240V, 60Hz via adapter
 Comment: Live Line
 Tem.:25.4°C Hum.:54%

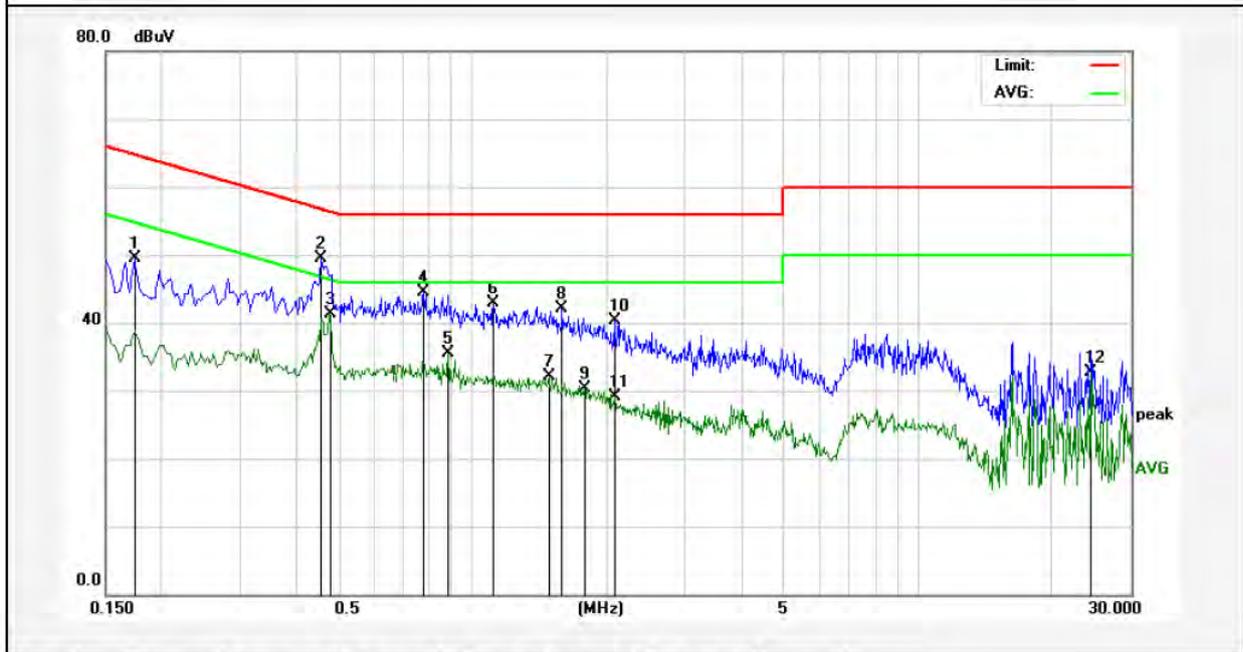

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1740	31.58	17.90	49.48	64.76	-15.28	QP	
2	0.4580	31.59	17.96	49.55	56.73	-7.18	QP	
3	0.4780	23.31	17.97	41.28	46.37	-5.09	AVG	
4	0.7780	26.48	18.06	44.54	56.00	-11.46	QP	
5	0.8820	17.49	18.09	35.58	46.00	-10.42	AVG	
6	1.1140	24.77	18.12	42.89	56.00	-13.11	QP	
7	1.4860	14.04	18.13	32.17	46.00	-13.83	AVG	
8	1.5900	24.01	18.13	42.14	56.00	-13.86	QP	
9	1.7900	12.24	18.14	30.38	46.00	-15.62	AVG	
10	2.0820	22.26	18.14	40.40	56.00	-15.60	QP	
11	2.0940	10.91	18.14	29.05	46.00	-16.95	AVG	
12	24.3500	14.38	18.29	32.67	50.00	-17.33	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: TX+Charging mode
 Test Specification: AC 240V, 60Hz via adapter
 Comment: Neutral Line
 Tem.:25.4°C Hum.:54%

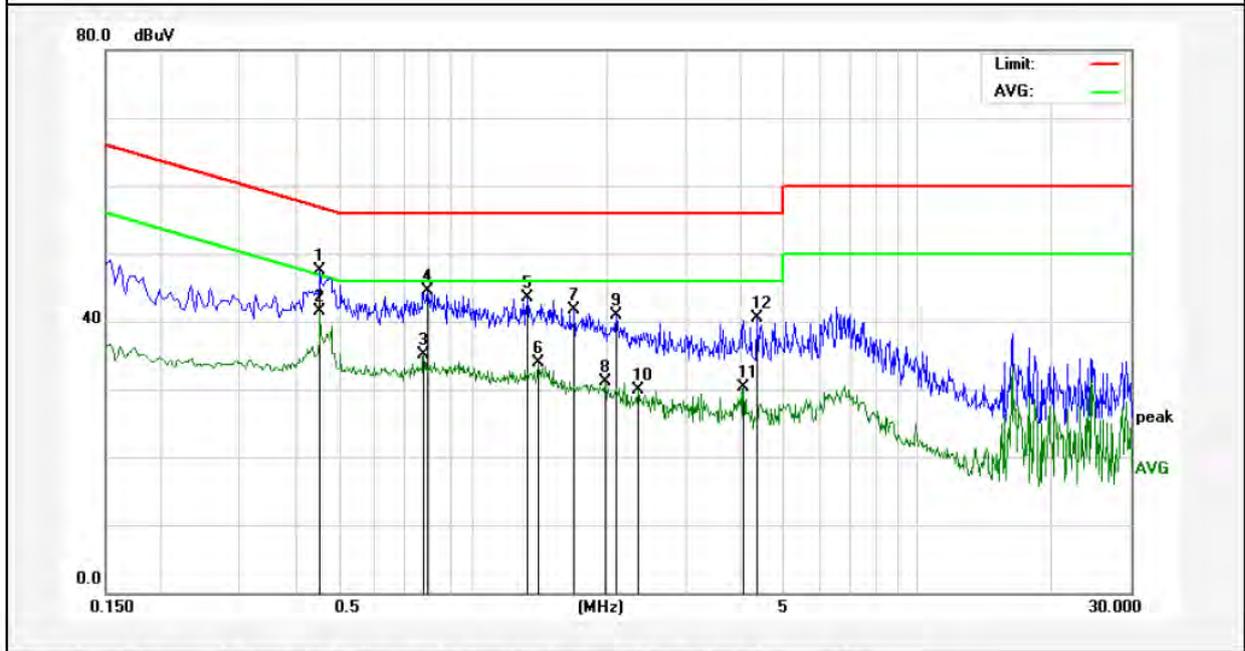

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4540	29.58	17.96	47.54	56.80	-9.26	QP	
2	0.4540	23.50	17.96	41.46	46.80	-5.34	AVG	
3	0.7780	17.12	18.06	35.18	46.00	-10.82	AVG	
4	0.7940	26.45	18.06	44.51	56.00	-11.49	QP	
5	1.3260	25.39	18.13	43.52	56.00	-12.48	QP	
6	1.4100	15.86	18.13	33.99	46.00	-12.01	AVG	
7	1.6940	23.50	18.13	41.63	56.00	-14.37	QP	
8	1.9900	12.91	18.14	31.05	46.00	-14.95	AVG	
9	2.1099	22.69	18.14	40.83	56.00	-15.17	QP	
10	2.3580	11.71	18.15	29.86	46.00	-16.14	AVG	
11	4.0660	12.19	18.18	30.37	46.00	-15.63	AVG	
12	4.3580	22.33	18.19	40.52	56.00	-15.48	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

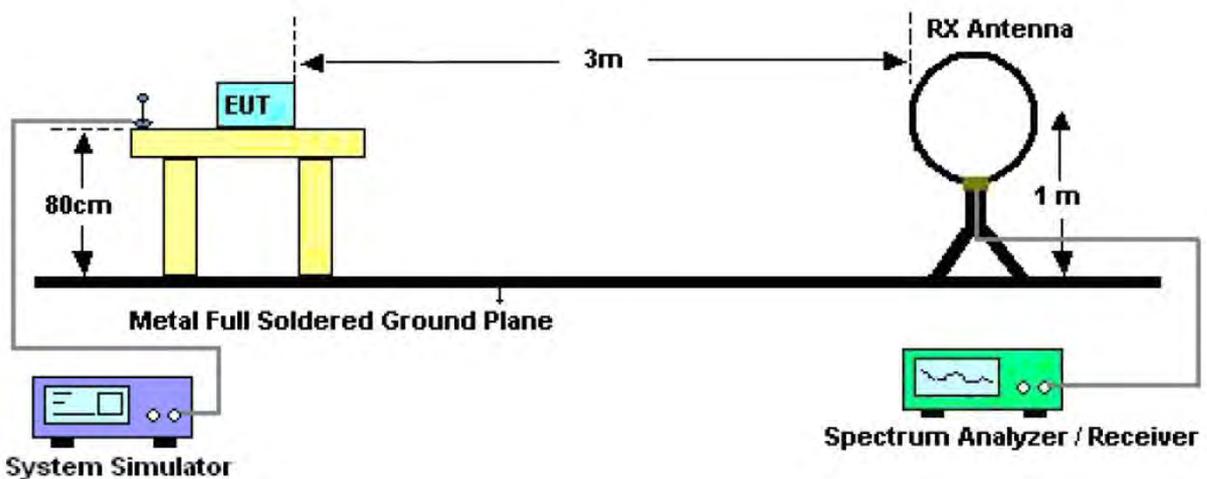


Figure 1. Below 30MHz

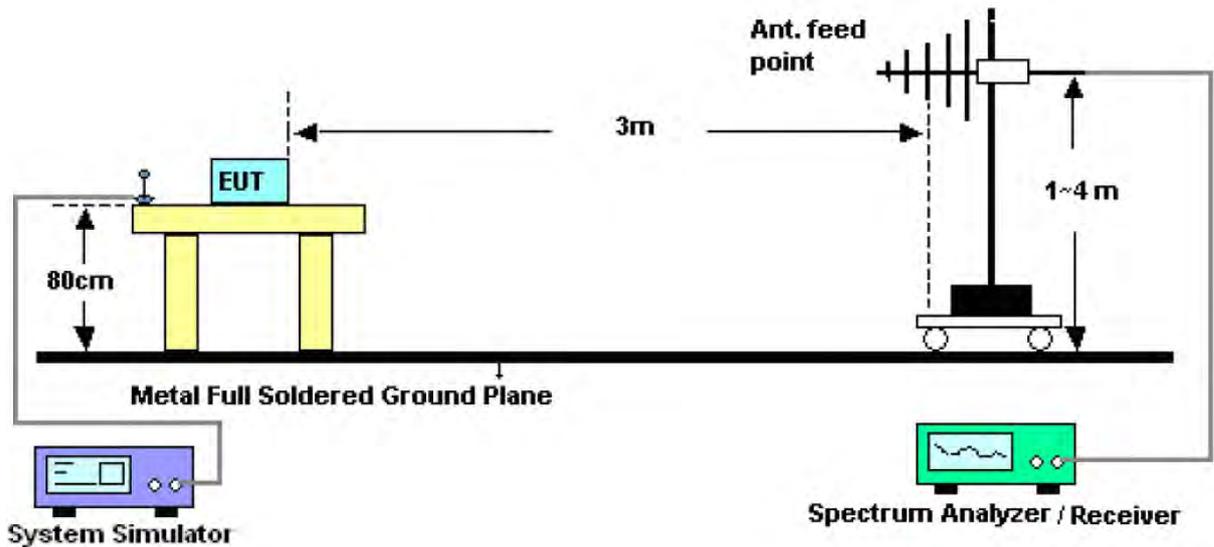


Figure 2. 30MHz to 1GHz

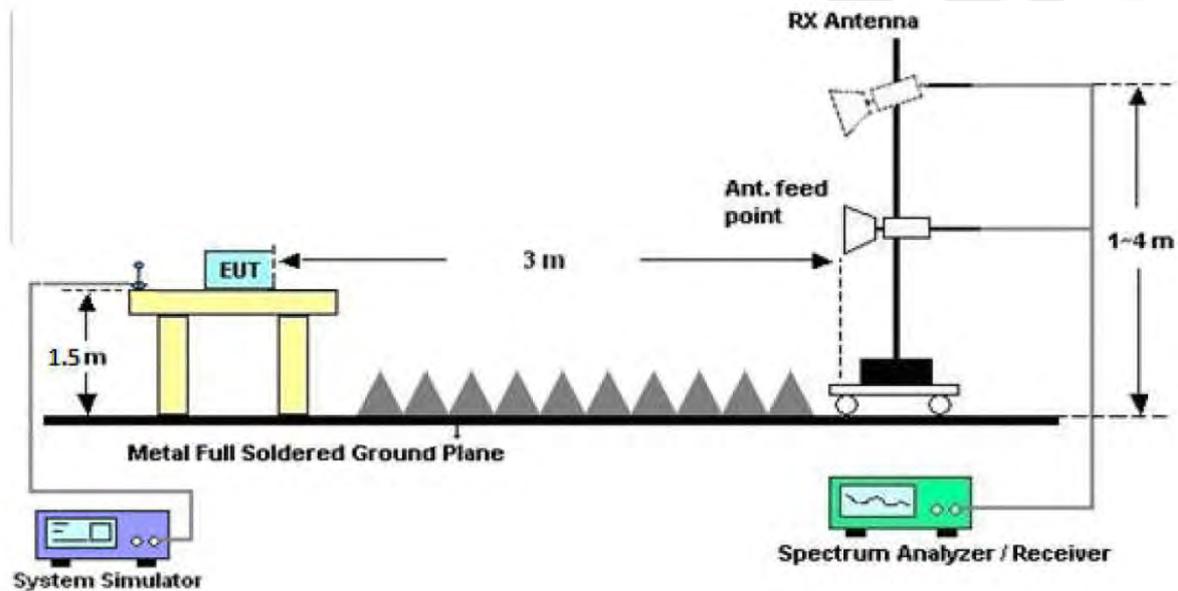


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for

maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)

Job No.: SZAWW180123006-01 Temp.(°C)/Hum.(%RH): 23.2°C/53.4%RH
 Standard: FCC PART 15C Power Source: AC120V/60Hz
 Test Mode: TX+Charging mode Polarization: Horizontal

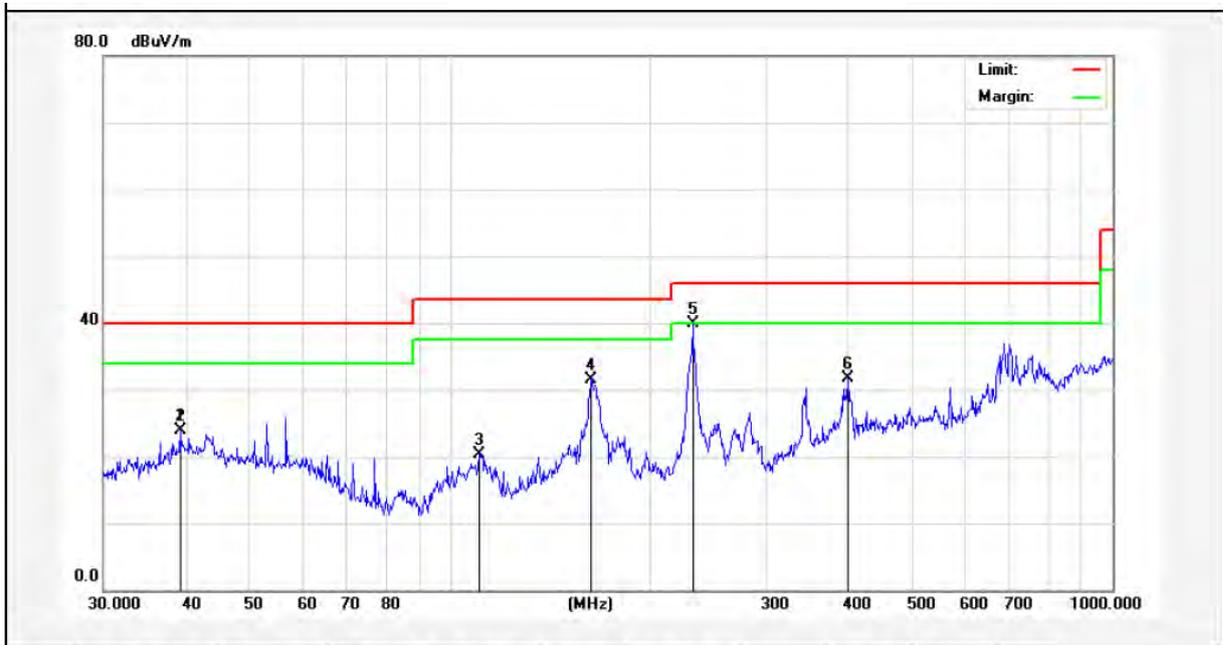

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.1616	32.73	-8.82	23.91	40.00	-16.09	QP	300	11	
2	39.1616	32.73	-8.82	23.91	40.00	-16.09	QP	300	25	
3	110.5687	35.02	-14.66	20.36	43.50	-23.14	QP	300	121	
4	163.1818	46.04	-14.46	31.58	43.50	-11.92	QP	300	233	
5	232.5318	52.00	-12.18	39.82	46.00	-6.18	QP	300	310	
6	399.0302	38.56	-6.88	31.68	46.00	-14.32	QP	300	346	



Test Results (30~1000MHz)

Job No.: SZAWW180123006-01 Temp.(°C)/Hum.(%RH): 23.2°C/53.4%RH
 Standard: FCC PART 15C Power Source: AC120V/60Hz
 Test Mode: TX+Charging mode Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9450	40.40	-8.50	31.90	40.00	-8.10	QP	300	16	
2	107.5333	43.90	-8.66	35.24	43.50	-8.26	QP	300	77	
3	152.6641	41.85	-11.22	30.63	43.50	-12.87	QP	300	121	
4	231.7179	39.88	-7.83	32.05	46.00	-13.95	QP	300	157	
5	489.0269	34.27	-5.27	29.00	46.00	-17.00	QP	300	216	
6	684.7454	37.93	-2.59	35.34	46.00	-10.66	QP	300	263	



Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	39.94	34.13	6.61	34.09	46.59	74.00	-27.41	V
7236.00	34.00	37.14	7.74	34.51	44.37	74.00	-29.63	V
9648.00	32.55	39.35	9.26	34.80	46.36	74.00	-27.64	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	38.66	34.13	6.61	34.09	45.31	74.00	-28.69	H
7236.00	33.77	37.14	7.74	34.51	44.14	74.00	-29.86	H
9648.00	32.15	39.35	9.26	34.80	45.96	74.00	-28.04	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	29.05	34.13	6.61	34.09	35.70	54.00	-18.30	V
7236.00	22.87	37.14	7.74	34.51	33.24	54.00	-20.76	V
9648.00	22.91	39.35	9.26	34.80	36.72	54.00	-17.28	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	28.22	34.13	6.61	34.09	34.87	54.00	-19.13	H
7236.00	22.36	37.14	7.74	34.51	32.73	54.00	-21.27	H
9648.00	21.90	39.35	9.26	34.80	35.71	54.00	-18.29	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.06	34.35	6.67	34.09	45.99	74.00	-28.01	V
7311.00	34.11	37.21	7.77	34.53	44.56	74.00	-29.44	V
9748.00	33.60	39.45	9.33	34.80	47.58	74.00	-26.42	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	39.58	34.35	6.67	34.09	46.51	74.00	-27.49	H
7311.00	32.77	37.21	7.77	34.53	43.22	74.00	-30.78	H
9748.00	33.50	39.45	9.33	34.80	47.48	74.00	-26.52	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	29.93	34.35	6.67	34.09	36.86	54.00	-17.14	V
7311.00	22.43	37.21	7.77	34.53	32.88	54.00	-21.12	V
9748.00	22.86	39.45	9.33	34.80	36.84	54.00	-17.16	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	29.71	34.35	6.67	34.09	36.64	54.00	-17.36	H
7311.00	21.86	37.21	7.77	34.53	32.31	54.00	-21.69	H
9748.00	23.22	39.45	9.33	34.80	37.20	54.00	-16.80	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode:802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	44.38	34.57	6.74	34.09	51.60	74.00	-22.40	V
7386.00	34.65	37.29	7.80	34.55	45.19	74.00	-28.81	V
9848.00	36.80	39.55	9.41	34.81	50.95	74.00	-23.05	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	43.76	34.57	6.74	34.09	50.98	74.00	-23.02	H
7386.00	33.59	37.29	7.80	34.55	44.13	74.00	-29.87	H
9848.00	32.99	39.55	9.41	34.81	47.14	74.00	-26.86	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	35.33	34.57	6.74	34.09	42.55	54.00	-11.45	V
7386.00	24.57	37.29	7.80	34.55	35.11	54.00	-18.89	V
9848.00	25.31	39.55	9.41	34.81	39.46	54.00	-14.54	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	34.15	34.57	6.74	34.09	41.37	54.00	-12.63	H
7386.00	22.99	37.29	7.80	34.55	33.53	54.00	-20.47	H
9848.00	22.26	39.55	9.41	34.81	36.41	54.00	-17.59	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20N),n(HT40N) mode, and found the 802.11b mode is worse case , the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

Radiated Band Edge:

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.01	29.15	3.41	34.01	50.56	74.00	-23.44	H
2400.00	61.15	29.16	3.43	34.01	59.73	74.00	-14.27	H
2390.00	53.72	29.15	3.41	34.01	52.27	74.00	-21.73	V
2400.00	63.04	29.16	3.43	34.01	61.62	74.00	-12.38	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.67	29.15	3.41	34.01	37.22	54.00	-16.78	H
2400.00	47.00	29.16	3.43	34.01	45.58	54.00	-8.42	H
2390.00	40.52	29.15	3.41	34.01	39.07	54.00	-14.93	V
2400.00	48.15	29.16	3.43	34.01	46.73	54.00	-7.27	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.82	29.28	3.53	34.03	51.60	74.00	-22.40	H
2500.00	48.53	29.30	3.56	34.03	47.36	74.00	-26.64	H
2483.50	55.16	29.28	3.53	34.03	53.94	74.00	-20.06	V
2500.00	51.11	29.30	3.56	34.03	49.94	74.00	-24.06	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.09	29.28	3.53	34.03	37.87	54.00	-16.13	H
2500.00	35.12	29.30	3.56	34.03	33.95	54.00	-20.05	H
2483.50	41.07	29.28	3.53	34.03	39.85	54.00	-14.15	V
2500.00	37.02	29.30	3.56	34.03	35.85	54.00	-18.15	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

Radiated Band Edge:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.95	27.53	5.47	33.92	50.03	74.00	-23.97	H
2400.00	59.73	27.55	5.49	29.93	62.84	74.00	-11.16	H
2390.00	52.58	27.53	5.47	33.92	51.66	74.00	-22.34	V
2400.00	61.34	27.55	5.49	29.93	64.45	74.00	-9.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.91	27.53	5.47	33.92	36.99	54.00	-17.01	H
2400.00	46.13	27.55	5.49	29.93	49.24	54.00	-4.76	H
2390.00	39.68	27.53	5.47	33.92	38.76	54.00	-15.24	V
2400.00	47.20	27.55	5.49	29.93	50.31	54.00	-3.69	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.31	29.28	3.53	34.03	50.09	74.00	-23.91	H
2500.00	47.36	29.30	3.56	34.03	46.19	74.00	-27.81	H
2483.50	53.42	29.28	3.53	34.03	52.20	74.00	-21.80	V
2500.00	49.74	29.30	3.56	34.03	48.57	74.00	-25.43	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.17	29.28	3.53	34.03	36.95	54.00	-17.05	H
2500.00	34.41	29.30	3.56	34.03	33.24	54.00	-20.76	H
2483.50	40.06	29.28	3.53	34.03	38.84	54.00	-15.16	V
2500.00	36.26	29.30	3.56	34.03	35.09	54.00	-18.91	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.50	27.53	5.47	33.92	49.58	74.00	-24.42	H
2400.00	59.12	27.55	5.49	29.93	62.23	74.00	-11.77	H
2390.00	52.10	27.53	5.47	33.92	51.18	74.00	-22.82	V
2400.00	60.61	27.55	5.49	29.93	63.72	74.00	-10.28	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.59	27.53	5.47	33.92	36.67	54.00	-17.33	H
2400.00	45.76	27.55	5.49	29.93	48.87	54.00	-5.13	H
2390.00	39.32	27.53	5.47	33.92	38.40	54.00	-15.60	V
2400.00	46.80	27.55	5.49	29.93	49.91	54.00	-4.09	V

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.66	29.28	3.53	34.03	49.44	74.00	-24.56	H
2500.00	46.85	29.30	3.56	34.03	45.68	74.00	-28.32	H
2483.50	52.68	29.28	3.53	34.03	51.46	74.00	-22.54	V
2500.00	49.15	29.30	3.56	34.03	47.98	74.00	-26.02	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.78	29.28	3.53	34.03	36.56	54.00	-17.44	H
2500.00	34.10	29.30	3.56	34.03	32.93	54.00	-21.07	H
2483.50	39.62	29.28	3.53	34.03	38.40	54.00	-15.60	V
2500.00	35.94	29.30	3.56	34.03	34.77	54.00	-19.23	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

Radiated Band Edge:

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	49.86	27.53	5.47	33.92	48.94	74.00	-25.06	H
2400.00	58.27	27.55	5.49	29.93	61.38	74.00	-12.62	H
2390.00	51.41	27.53	5.47	33.92	50.49	74.00	-23.51	V
2400.00	59.58	27.55	5.49	29.93	62.69	74.00	-11.31	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.13	27.53	5.47	33.92	36.21	54.00	-17.79	H
2400.00	45.23	27.55	5.49	29.93	48.34	54.00	-5.66	H
2390.00	38.81	27.53	5.47	33.92	37.89	54.00	-16.11	V
2400.00	46.22	27.55	5.49	29.93	49.33	54.00	-4.67	V

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	49.74	29.28	3.53	34.03	48.52	74.00	-25.48	H
2500.00	46.14	29.30	3.56	34.03	44.97	74.00	-29.03	H
2483.50	51.63	29.28	3.53	34.03	50.41	74.00	-23.59	V
2500.00	48.31	29.30	3.56	34.03	47.14	74.00	-26.86	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.23	29.28	3.53	34.03	36.01	54.00	-17.99	H
2500.00	33.67	29.30	3.56	34.03	32.50	54.00	-21.50	H
2483.50	39.01	29.28	3.53	34.03	37.79	54.00	-16.21	V
2500.00	35.48	29.30	3.56	34.03	34.31	54.00	-19.69	V

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60Hz	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

ANT 1

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (PK) (dBm)	Limit dBm	Results
TX 802.11b Mode				
CH01	2412	18.65	30	PASS
CH06	2437	17.96	30	PASS
CH11	2462	17.23	30	PASS
TX 802.11g Mode				
CH01	2412	17.21	30	PASS
CH06	2437	16.45	30	PASS
CH11	2462	15.24	30	PASS
TX 802.11n(20) Mode				
CH01	2412	15.59	30	PASS
CH06	2437	15.25	30	PASS
CH11	2462	15.36	30	PASS
TX 802.11n(40) Mode				
CH03	2422	15.23	30	PASS
CH06	2437	14.24	30	PASS
CH09	2452	14.16	30	PASS

ANT 2

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (PK) (dBm)	Limit dBm	Results
TX 802.11b Mode				
CH01	2412	18.36	30	PASS
CH06	2437	17.99	30	PASS
CH11	2462	17.55	30	PASS
TX 802.11g Mode				
CH01	2412	17.24	30	PASS
CH06	2437	15.68	30	PASS
CH11	2462	15.32	30	PASS
TX 802.11n(20) Mode				
CH01	2412	15.11	30	PASS
CH06	2437	15.17	30	PASS
CH11	2462	14.98	30	PASS
TX 802.11n(40) Mode				
CH03	2422	14.88	30	PASS
CH06	2437	14.67	30	PASS
CH09	2452	14.23	30	PASS


SUM

TX 802.11n(20) Mode				
CH01	2412	18.37	30	PASS
CH06	2437	18.22	30	PASS
CH11	2462	18.18	30	PASS
TX 802.11n(40) Mode				
CH03	2422	18.07	30	PASS
CH06	2437	17.47	30	PASS
CH09	2452	17.21	30	PASS


**Note: For power test the duty cycle is 100% in continuous transmitting mode.
Please see the plot of next page**

Duty Cycle


ANT 1

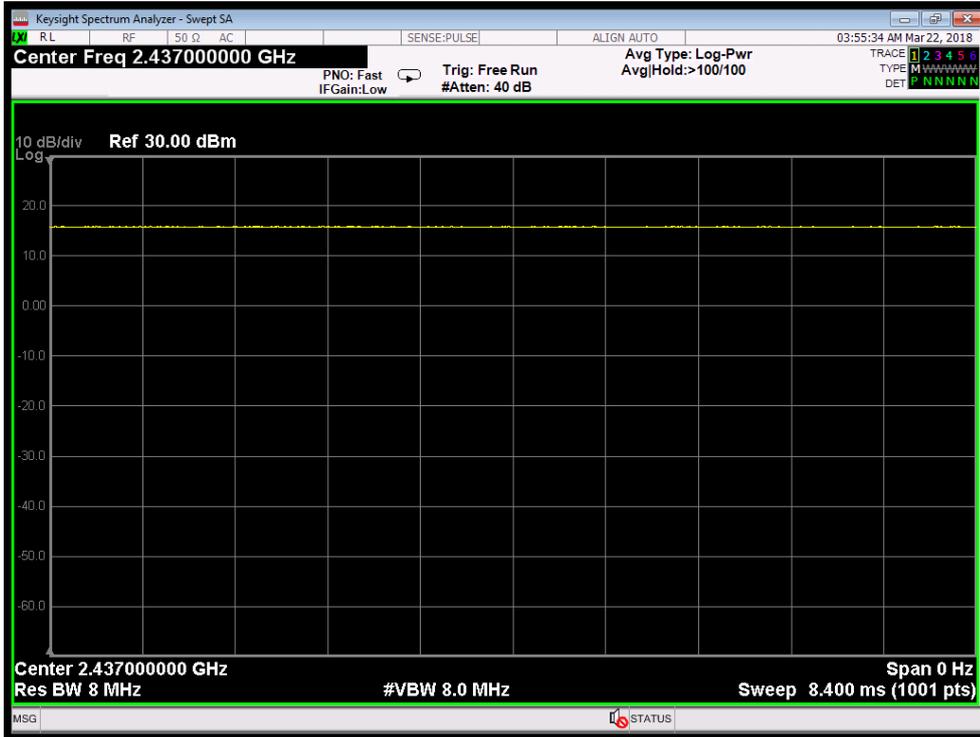


802.11b mode

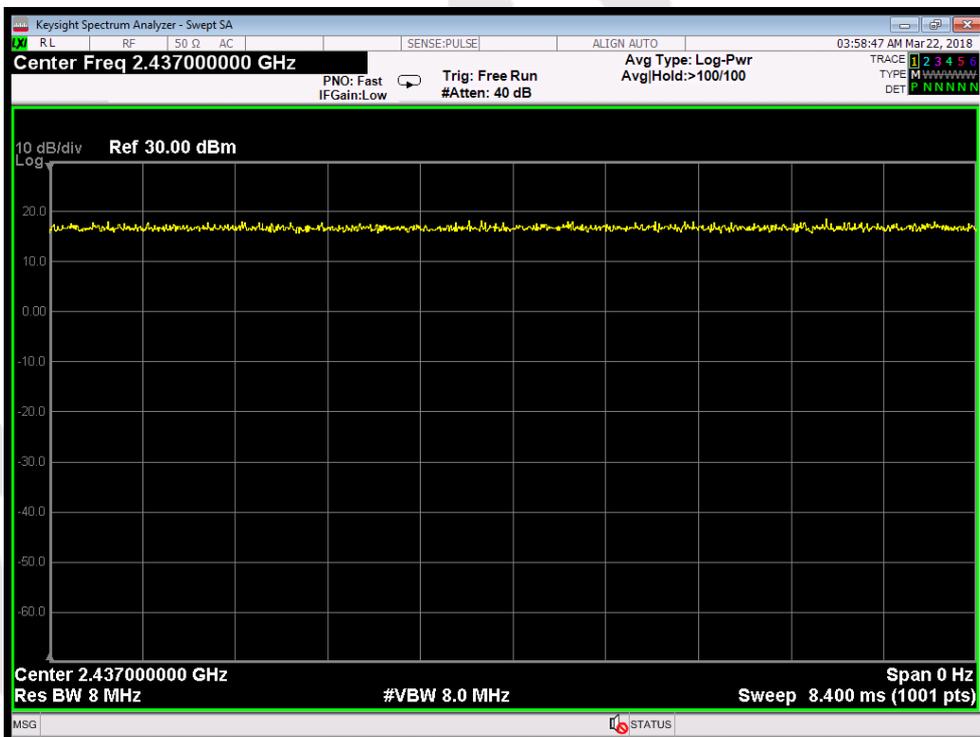

802.11g mode

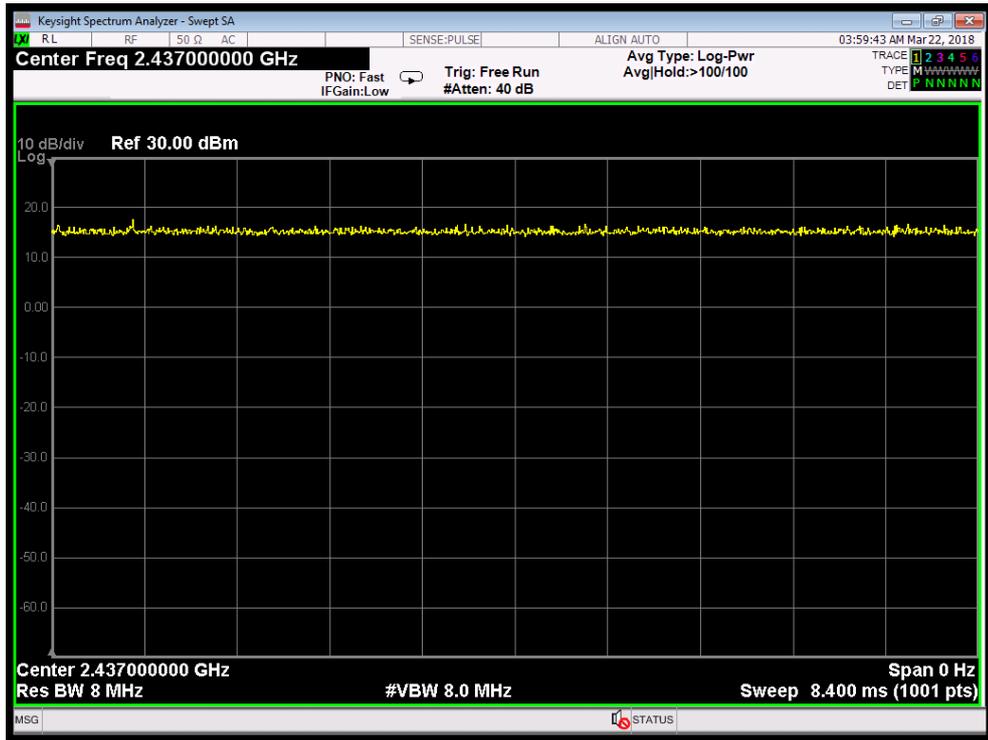


802.11n(HT20) mode

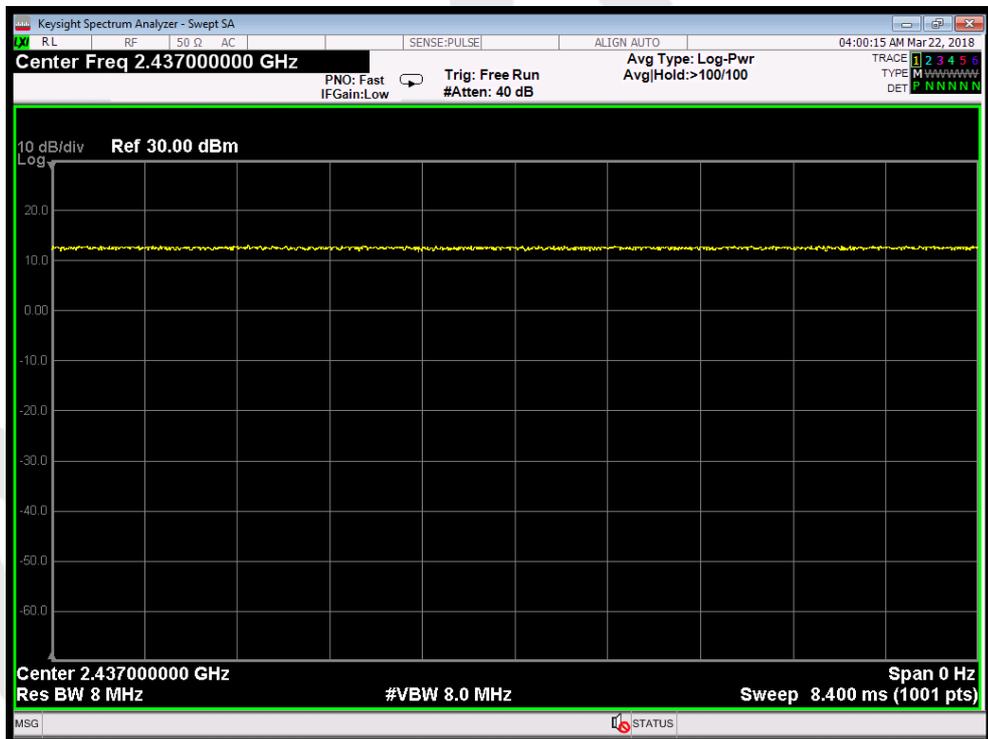


802.11n(HT40) mode

Duty Cycle


ANT 2

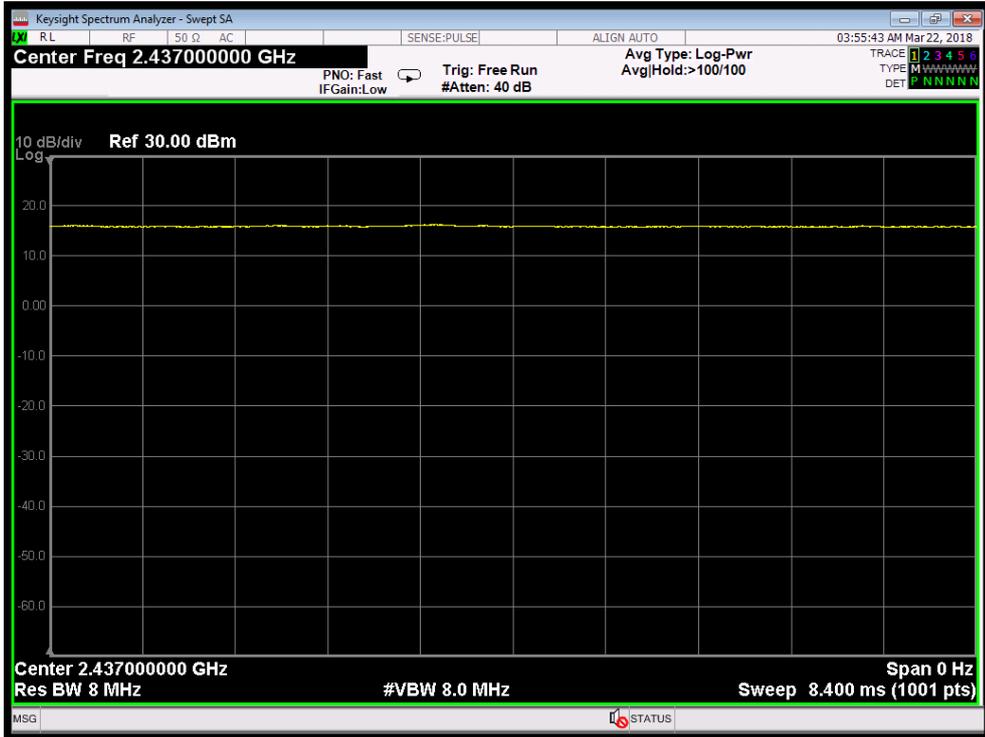


802.11b mode

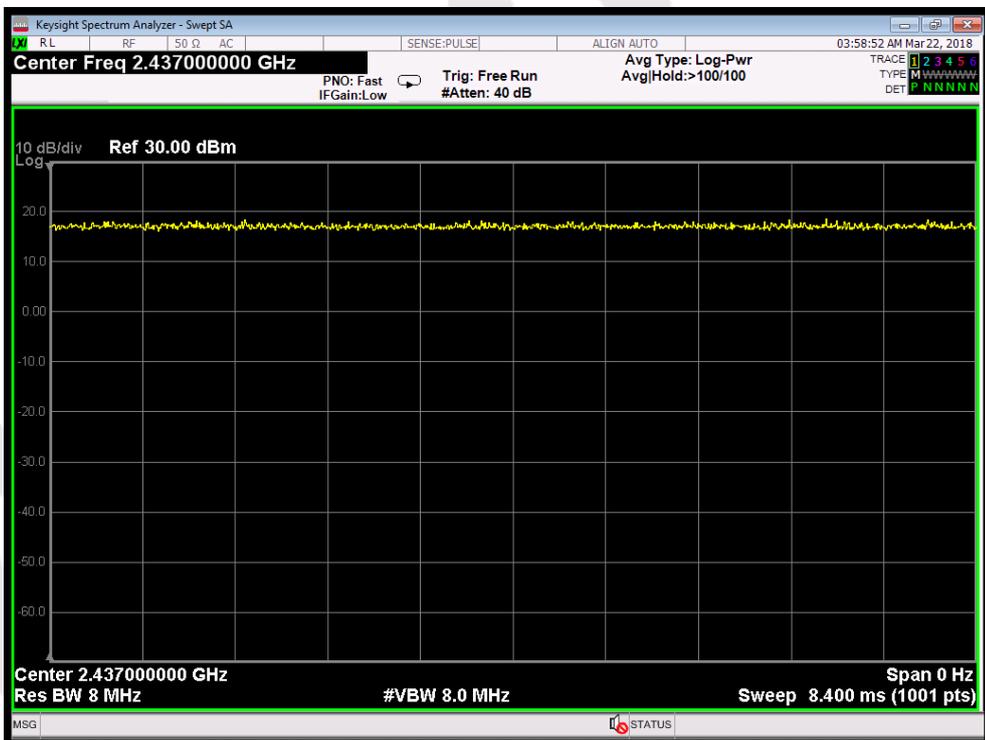

802.11g mode

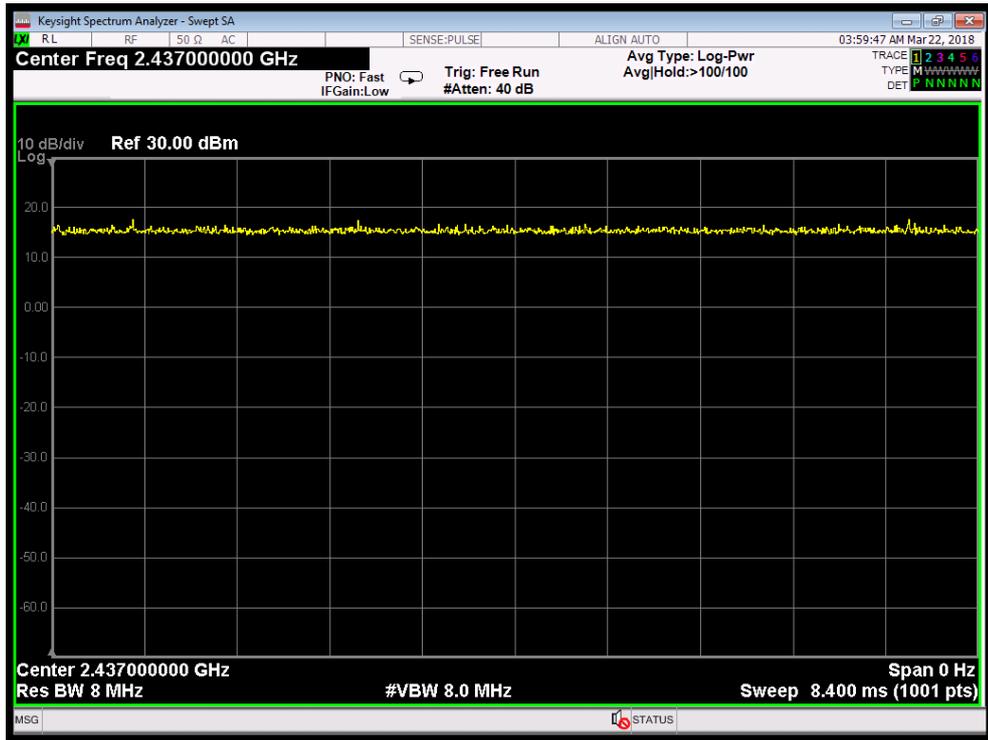

802.11n(HT20) mode

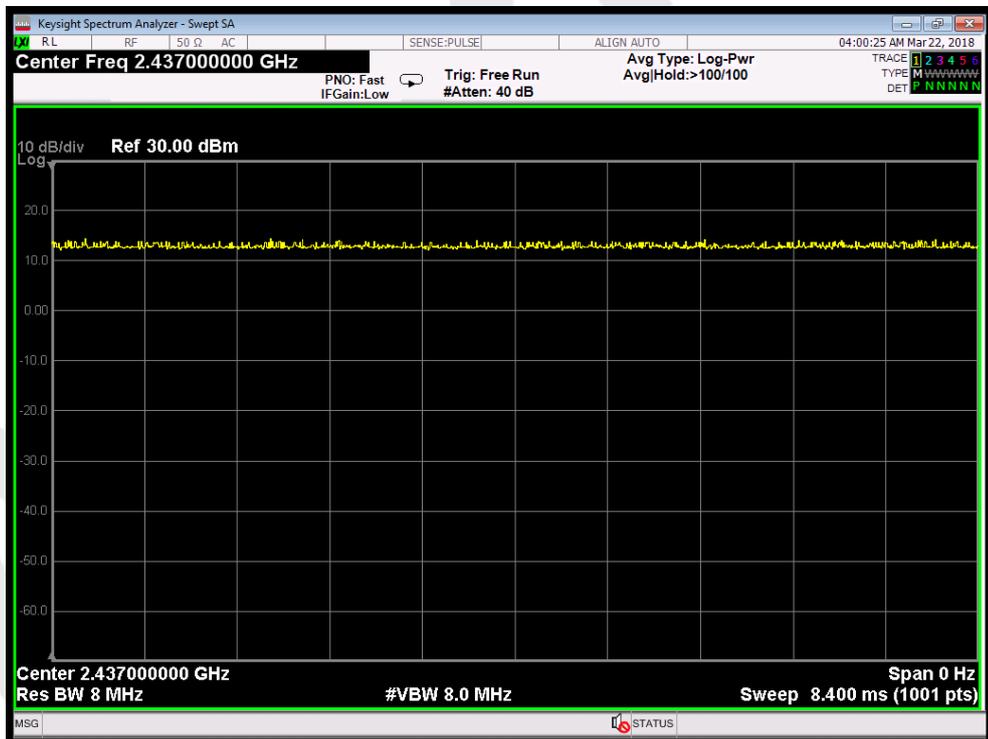


802.11n(HT40) mode

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup

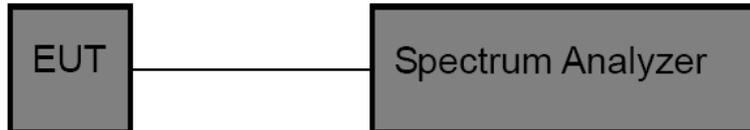

6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 RBW= 100kHz, VBW \geq 3*RBW =300kHz
 Detector= Peak
 Trace mode= Max hold.
 Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Test Item : 6dB Bandwidth
 Test Voltage : AC 120V/60Hz
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24°C
 Humidity : 55%RH


ANT 1

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
802.11b	Low	2412	9.563	>500	PASS
	Middle	2437	9.130		PASS
	High	2462	9.136		PASS
802.11g	Low	2412	15.16	>500	PASS
	Middle	2437	15.15		PASS
	High	2462	15.11		PASS
802.11n20	Low	2412	15.15	>500	PASS
	Middle	2437	13.90		PASS
	High	2462	15.45		PASS
802.11n40	Low	2422	35.15	>500	PASS
	Middle	2437	35.16		PASS
	High	2452	35.15		PASS


ANT 2

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
802.11b	Low	2412	9.167	>500	PASS
	Middle	2437	9.151		PASS
	High	2462	9.138		PASS
802.11g	Low	2412	15.15	>500	PASS
	Middle	2437	15.16		PASS
	High	2462	15.15		PASS
802.11n20	Low	2412	15.15	>500	PASS
	Middle	2437	15.12		PASS
	High	2462	15.46		PASS
802.11n40	Low	2422	35.16	>500	PASS
	Middle	2437	35.16		PASS
	High	2452	35.16		PASS


ANT 1

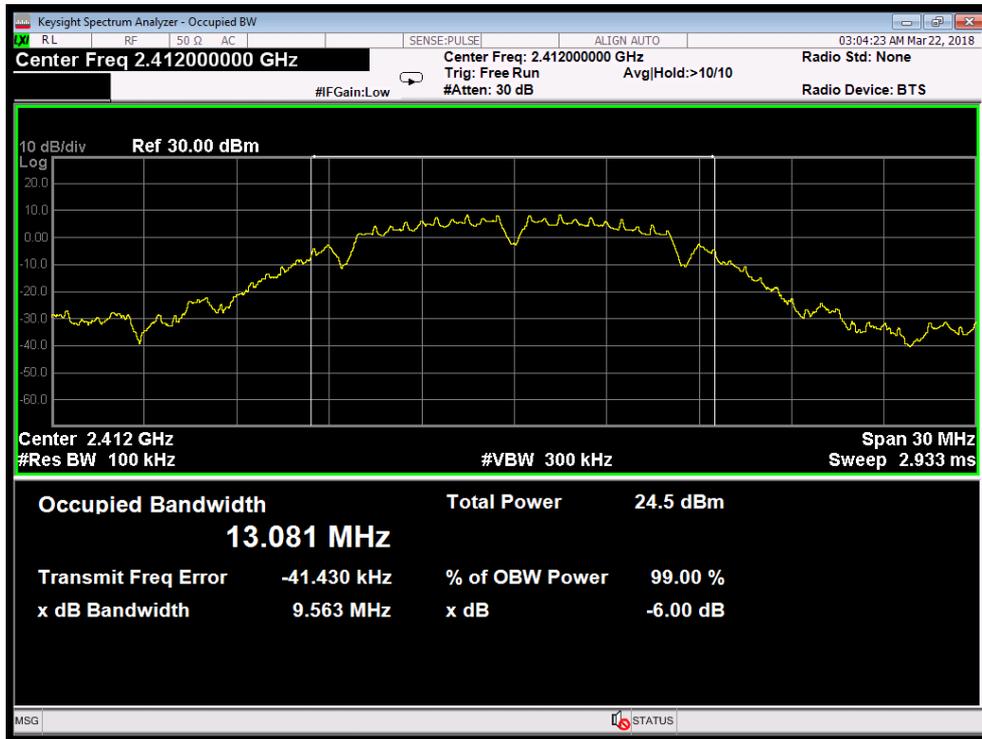


802.11b mode : Lowest

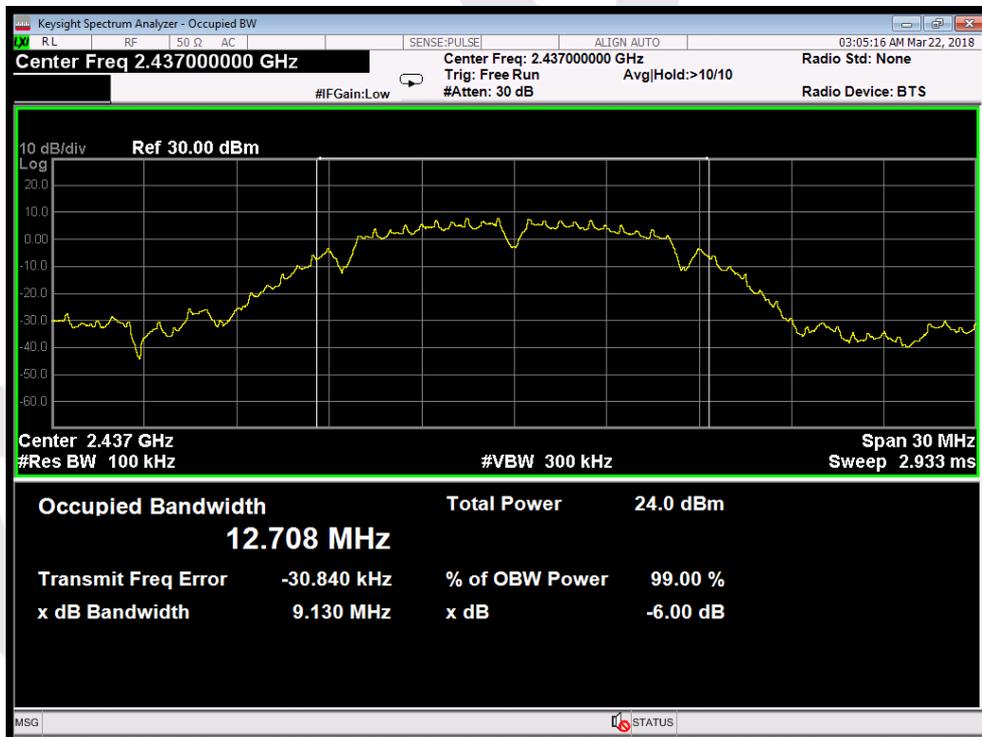


802.11b mode : Middle

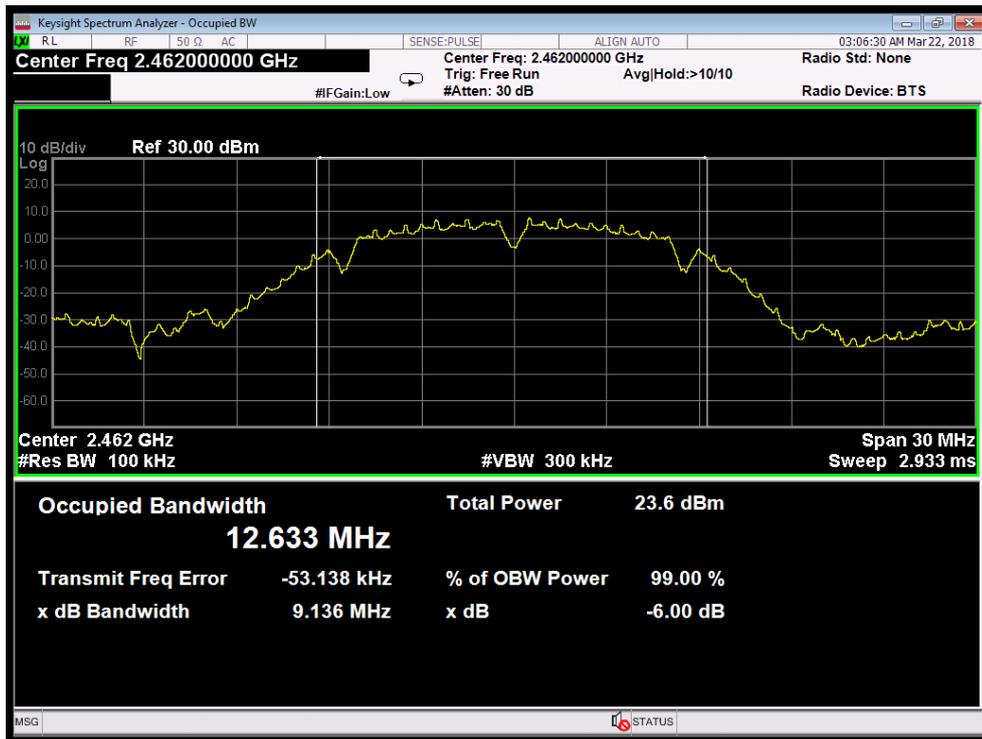


802.11b mode : Highest

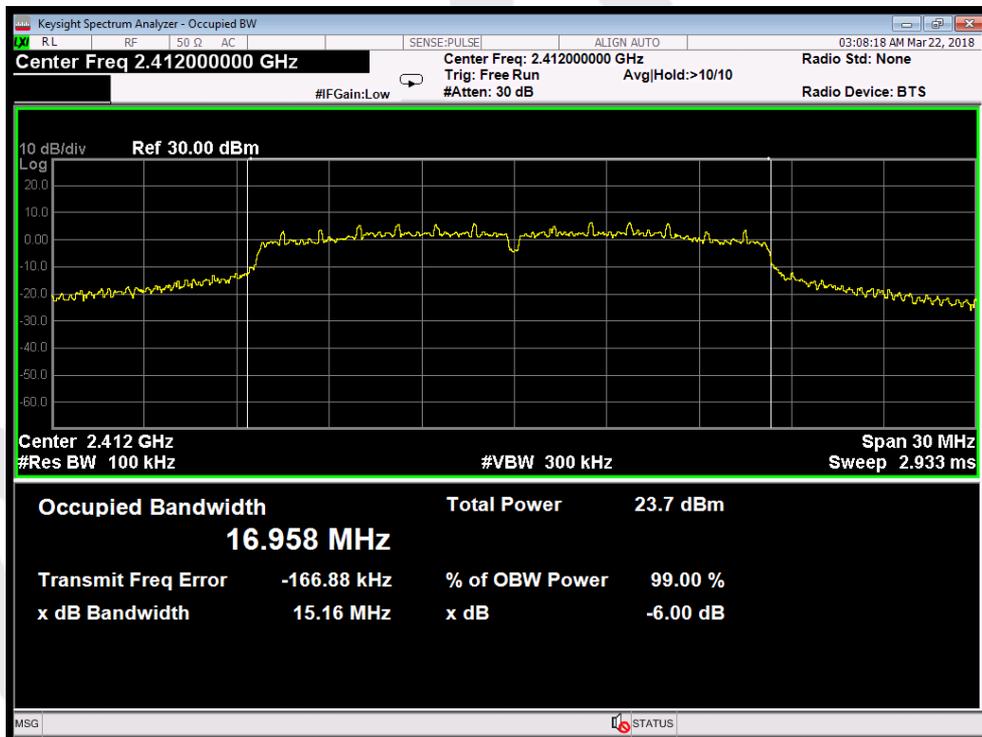


802.11g mode : Lowest

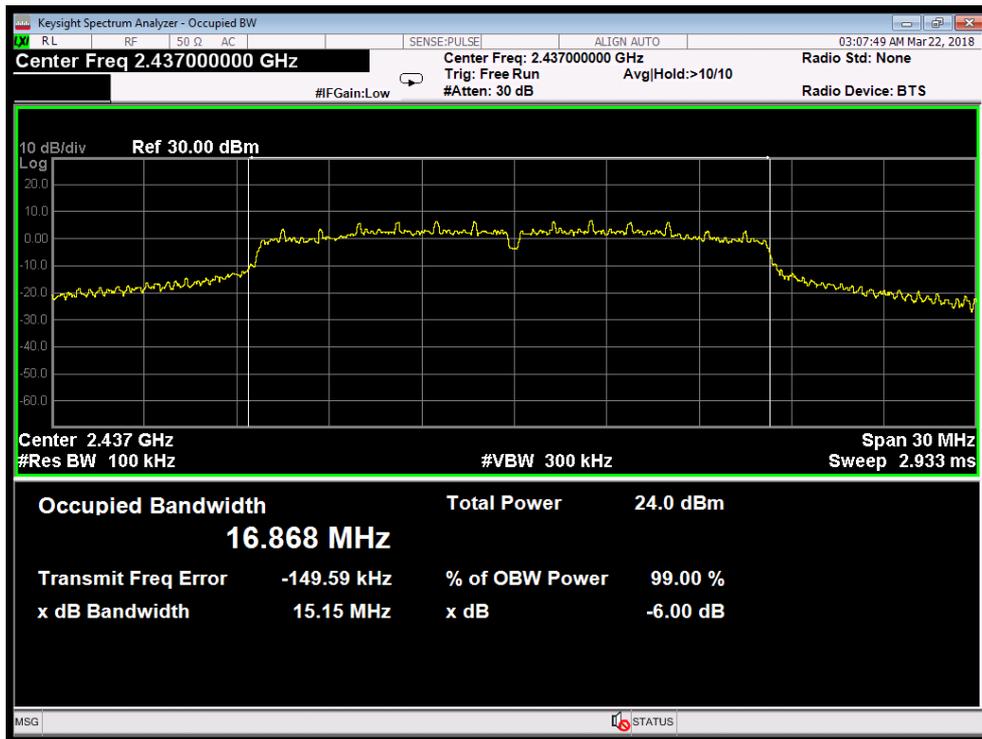


802.11g mode : Middle

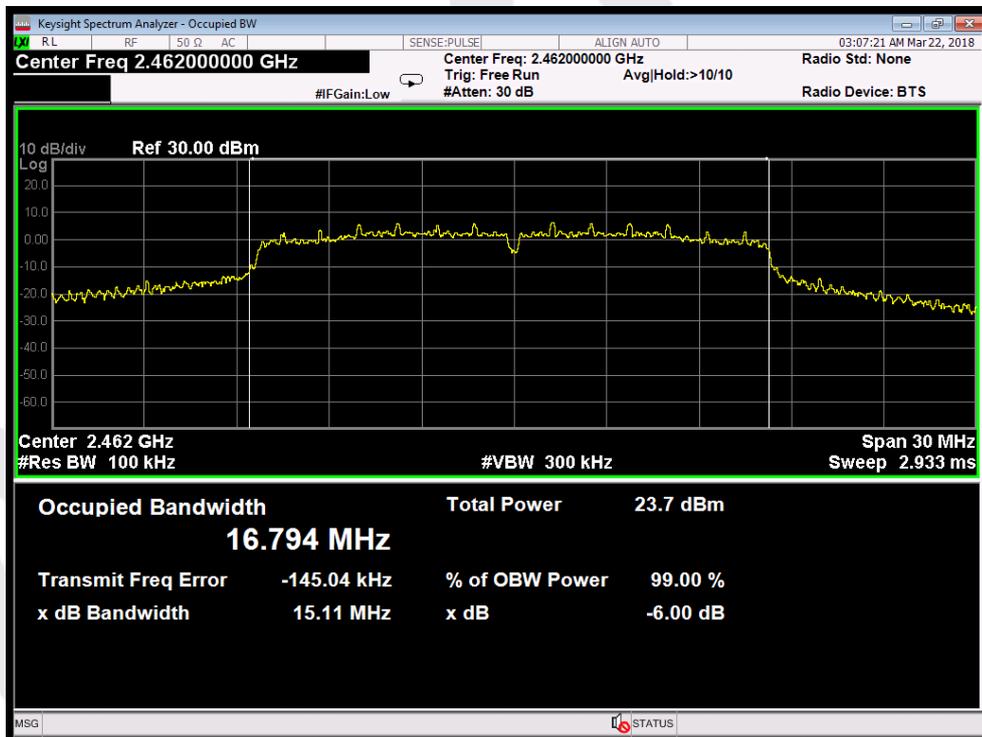


802.11g mode : Highest

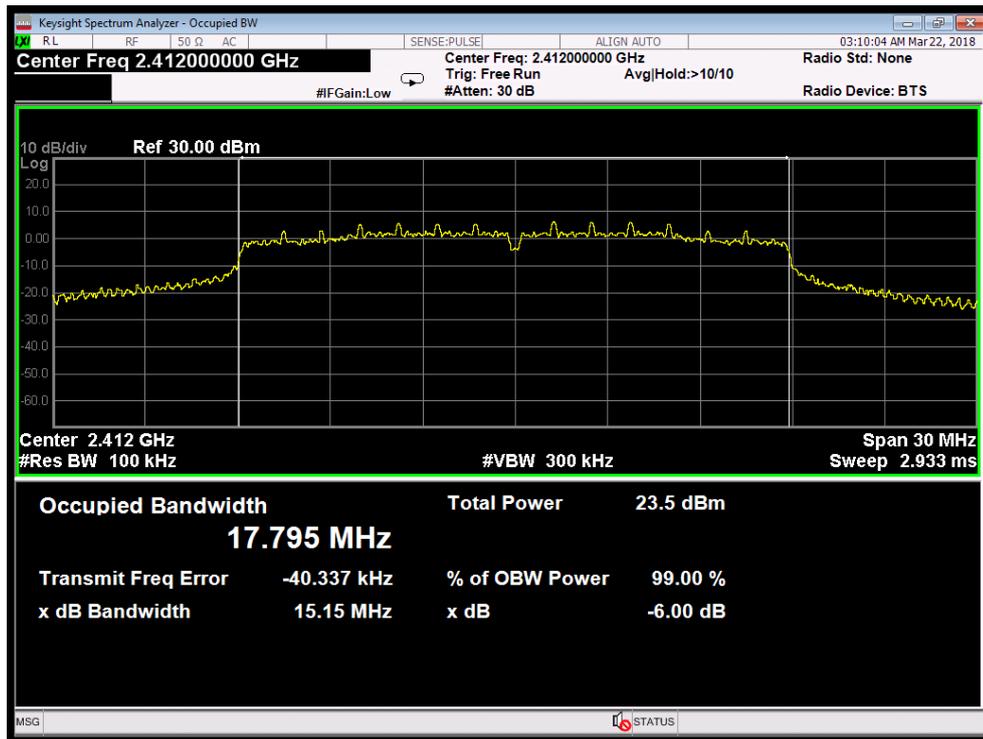


802.11n20 mode : Lowest

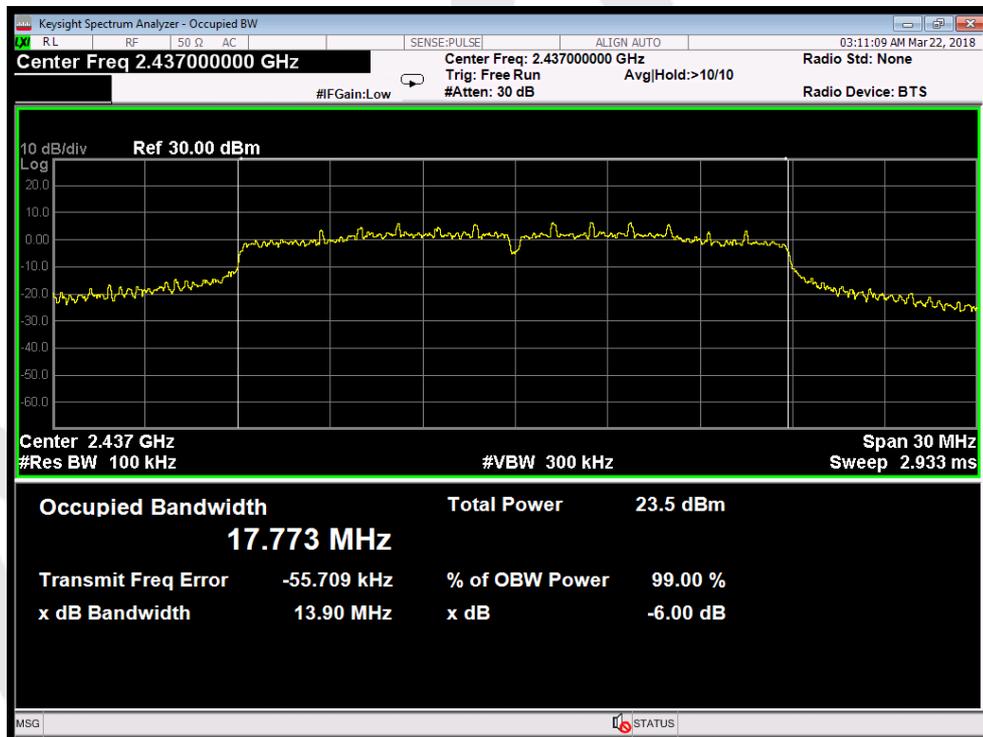


802.11n20 mode : Middle

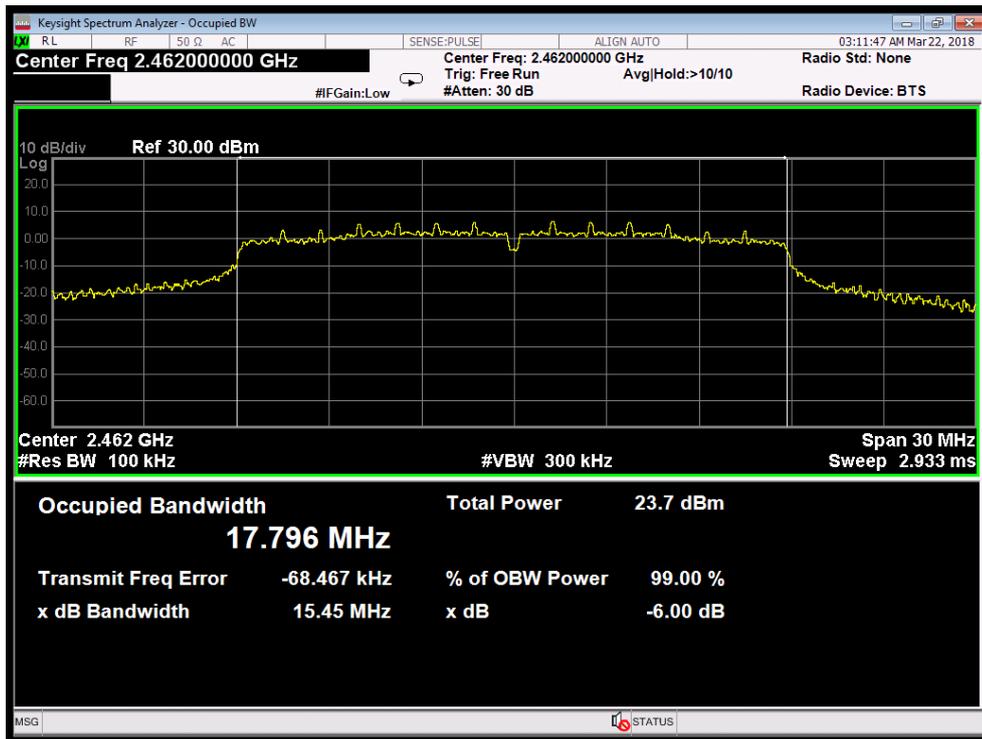


802.11n20 mode : Highest

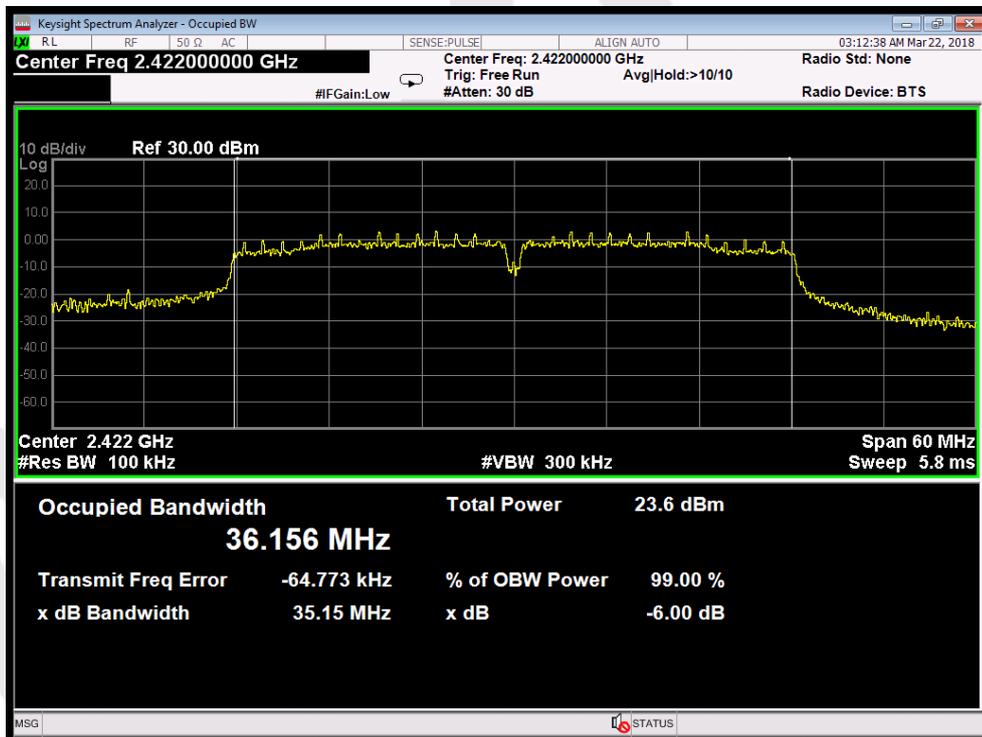

802.11n40 mode : Lowest

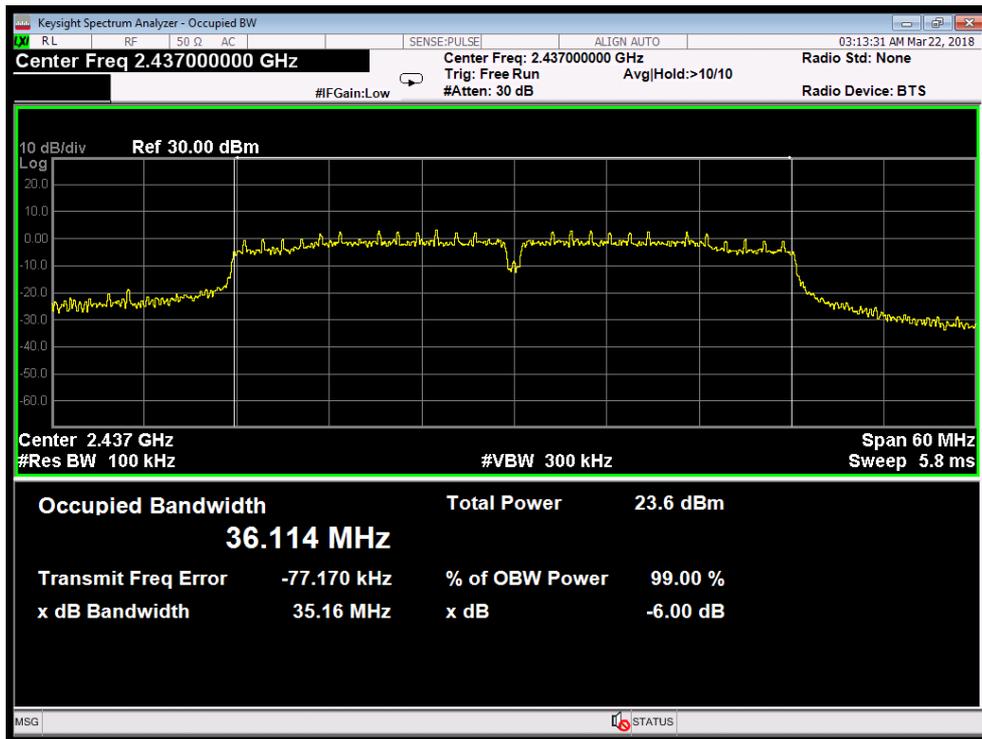


802.11n40 mode : Middle

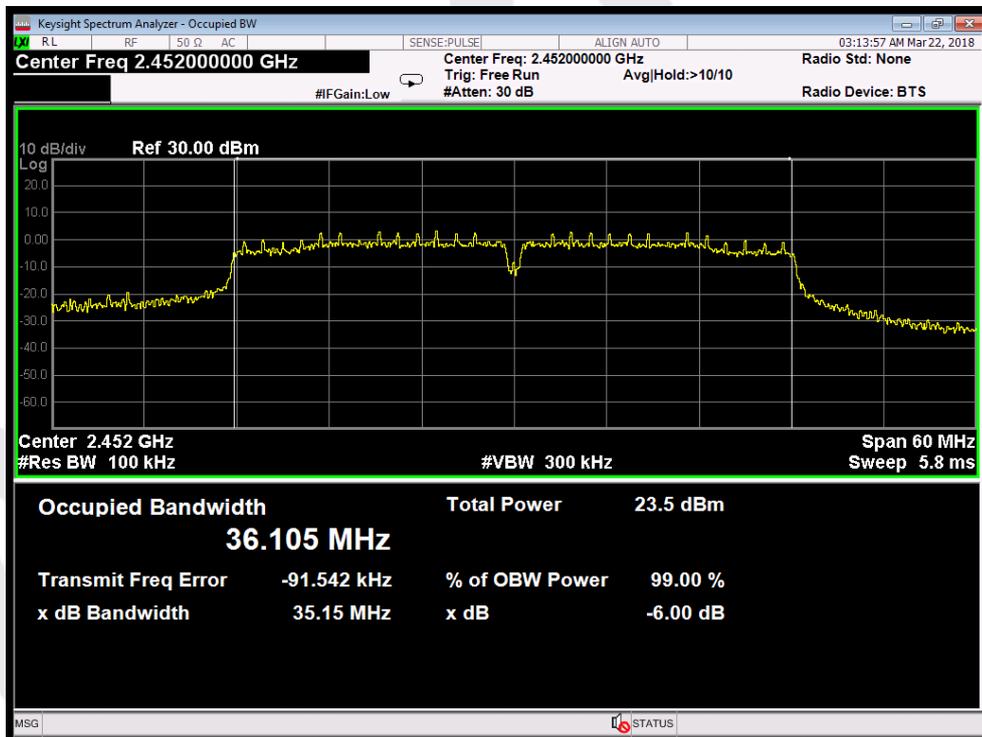


802.11n40 mode : Highest

ANT 2

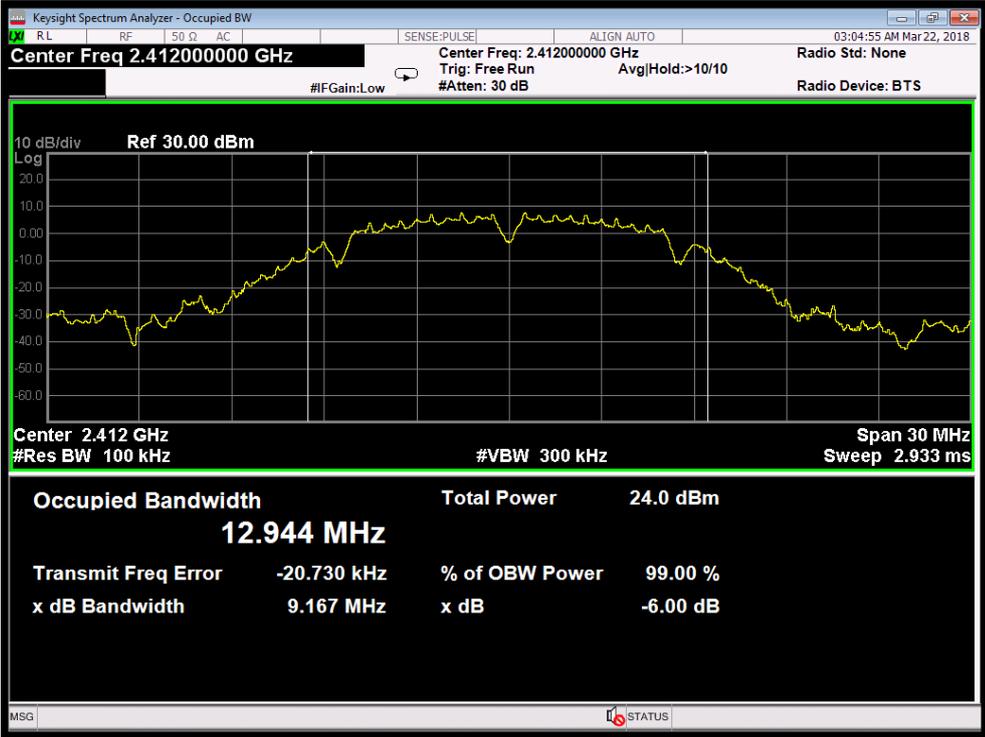


802.11b mode : Lowest

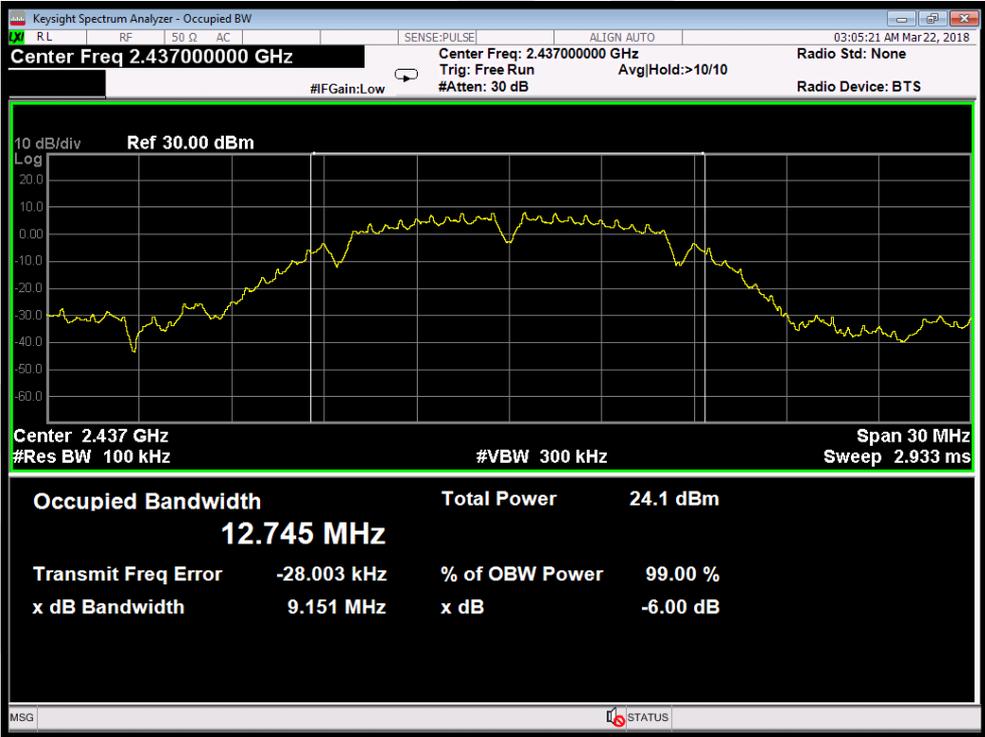


802.11b mode : Middle




802.11b mode : Highest

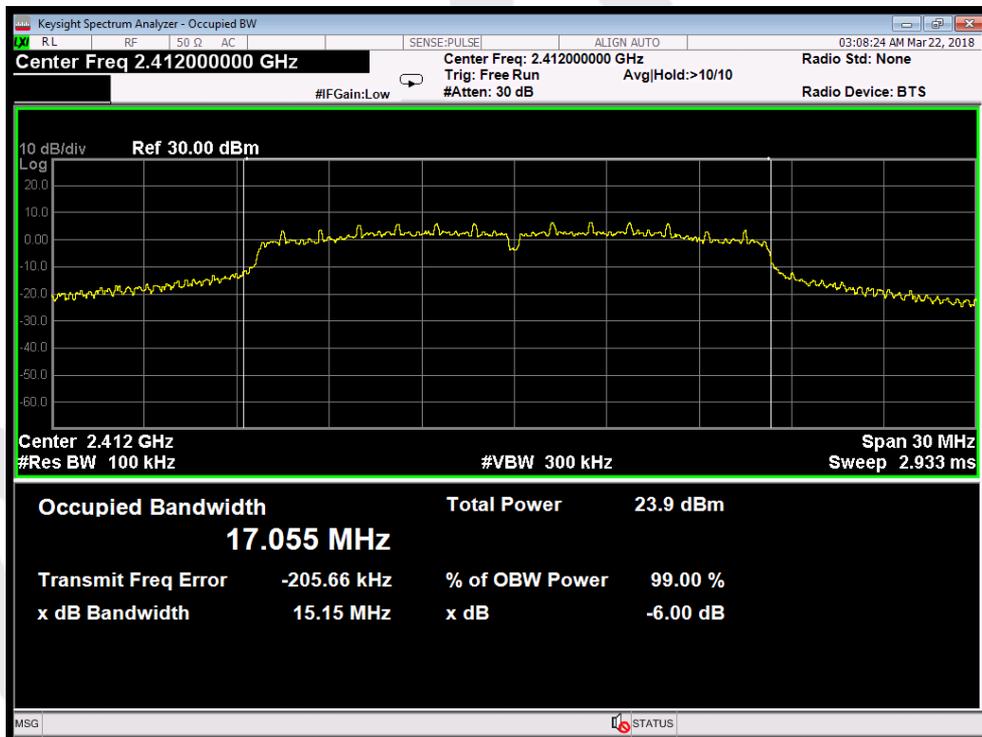


802.11g mode : Lowest

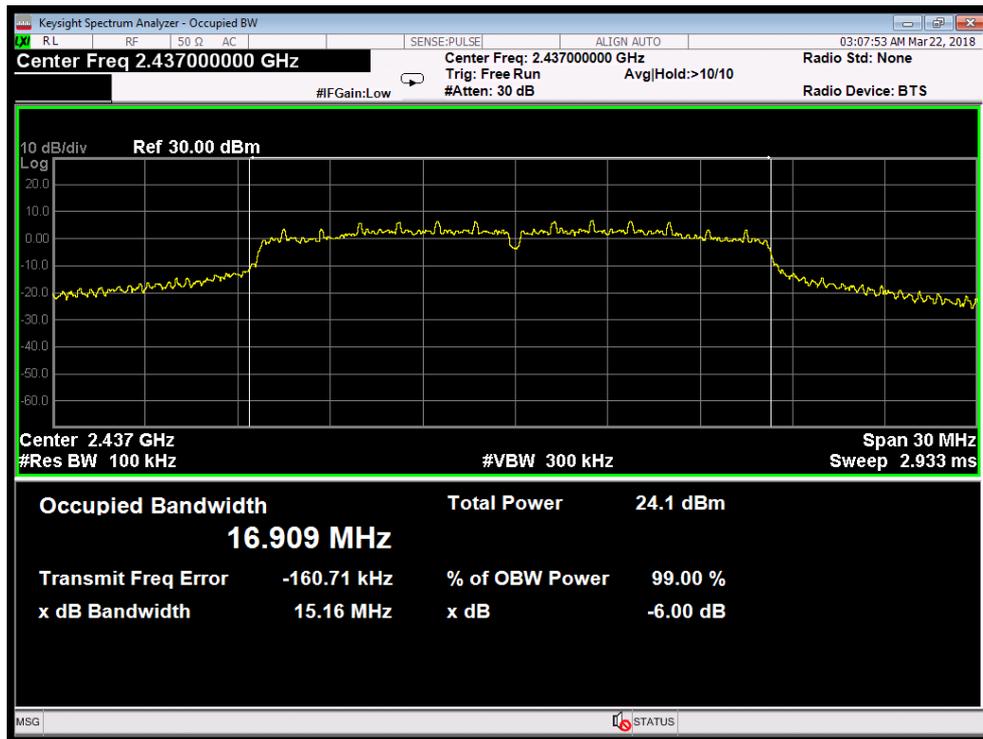


802.11g mode : Middle

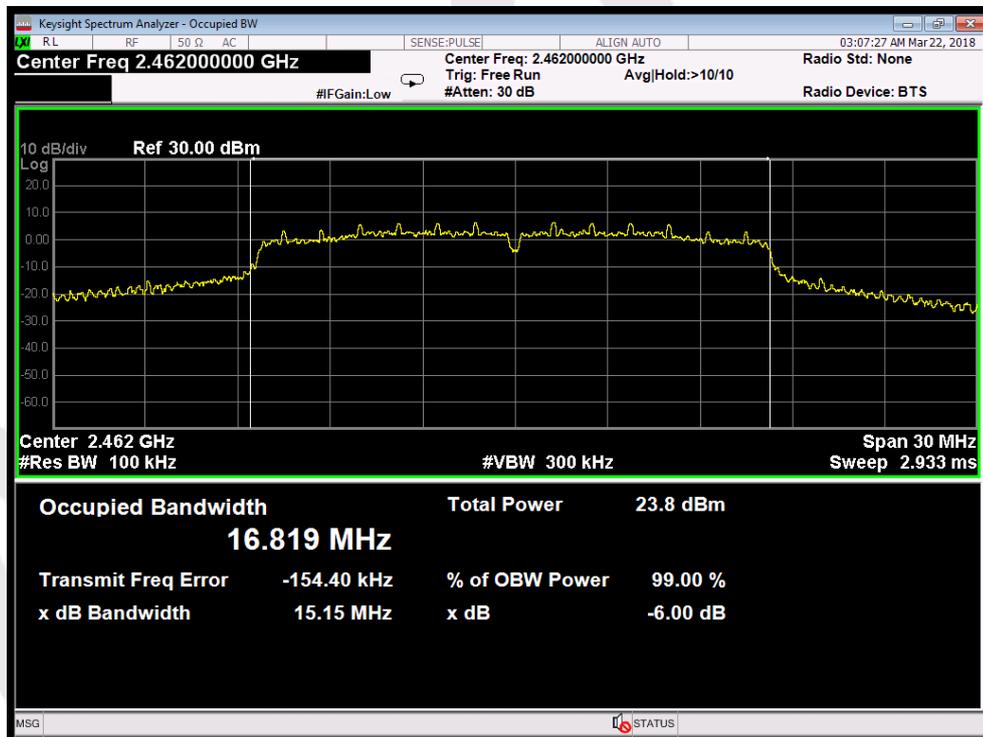


802.11g mode : Highest

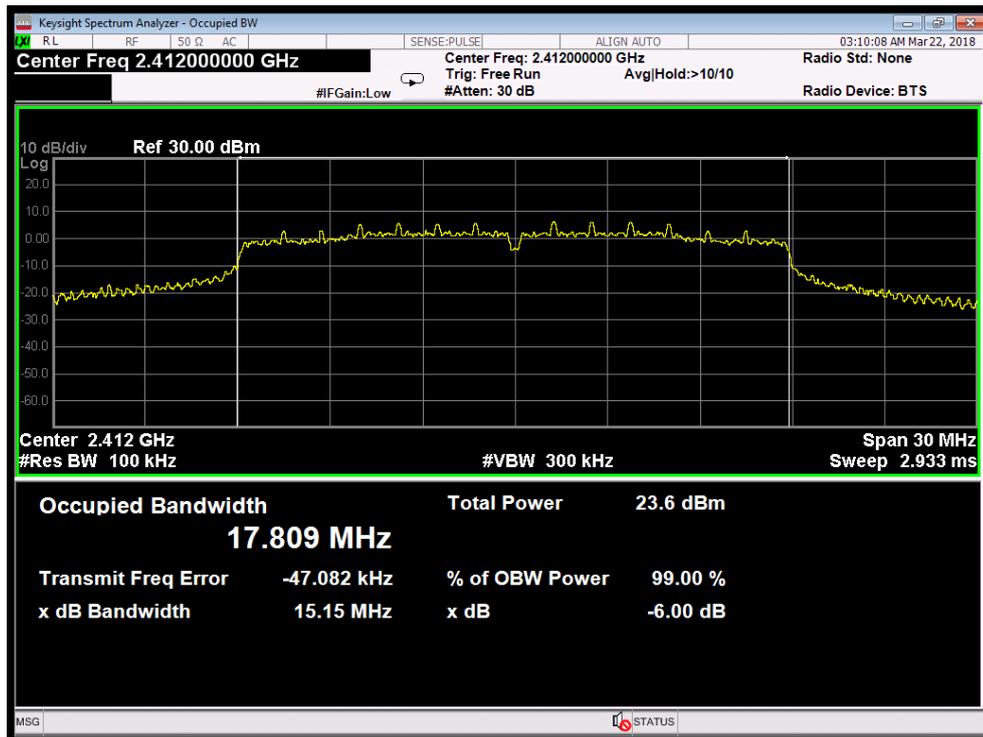


802.11n20 mode : Lowest

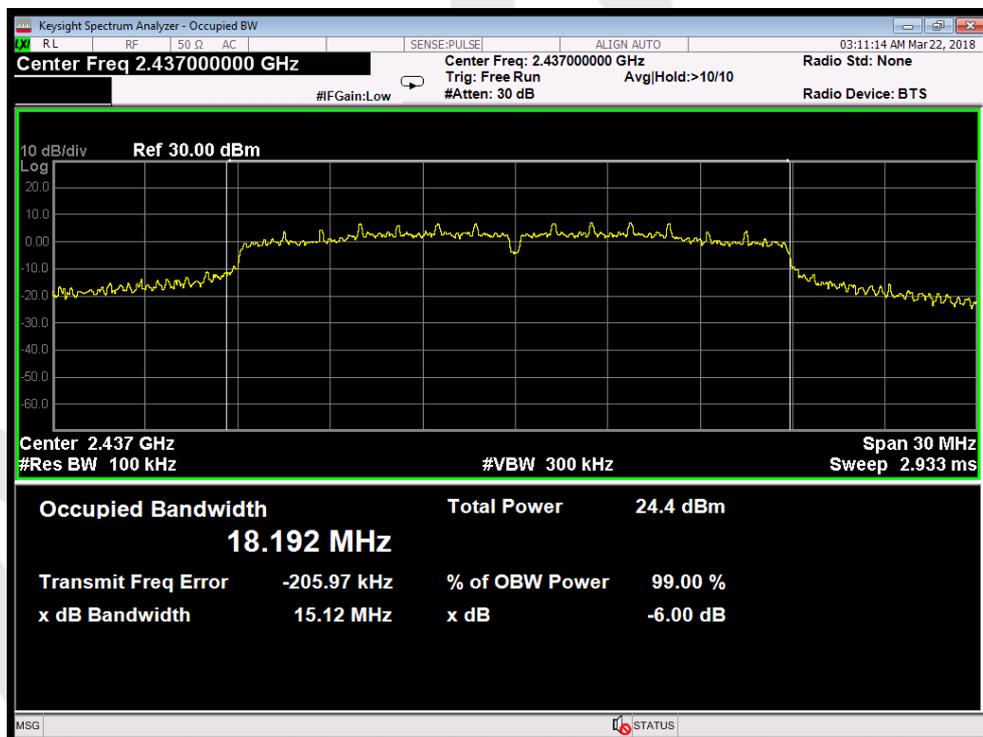


802.11n20 mode : Middle

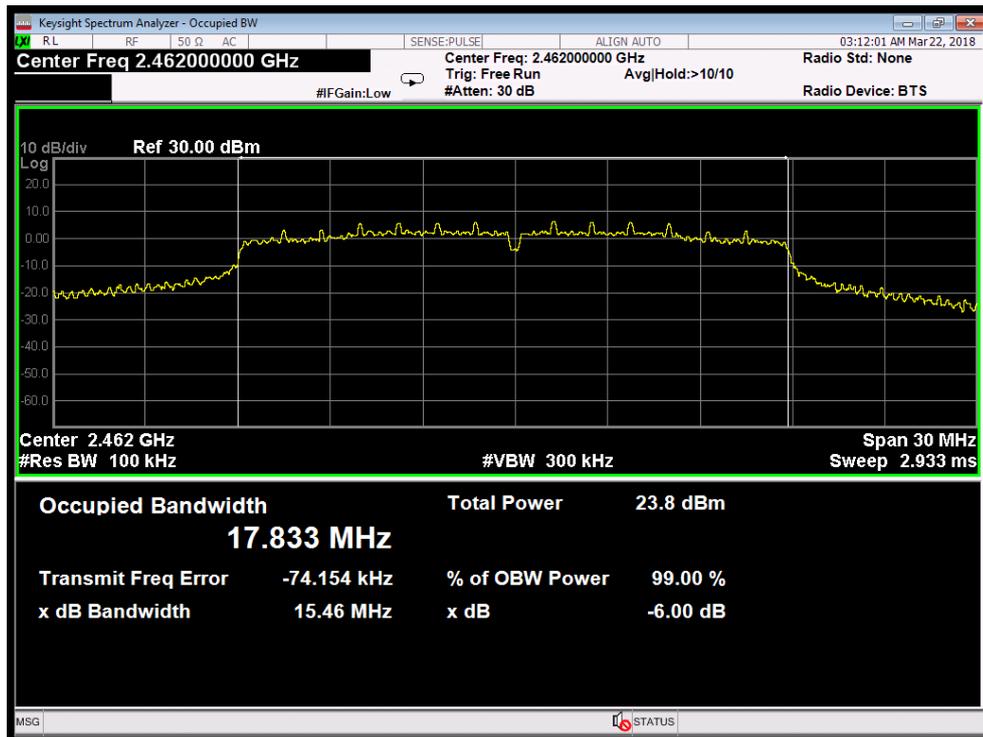


802.11n20 mode : Highest

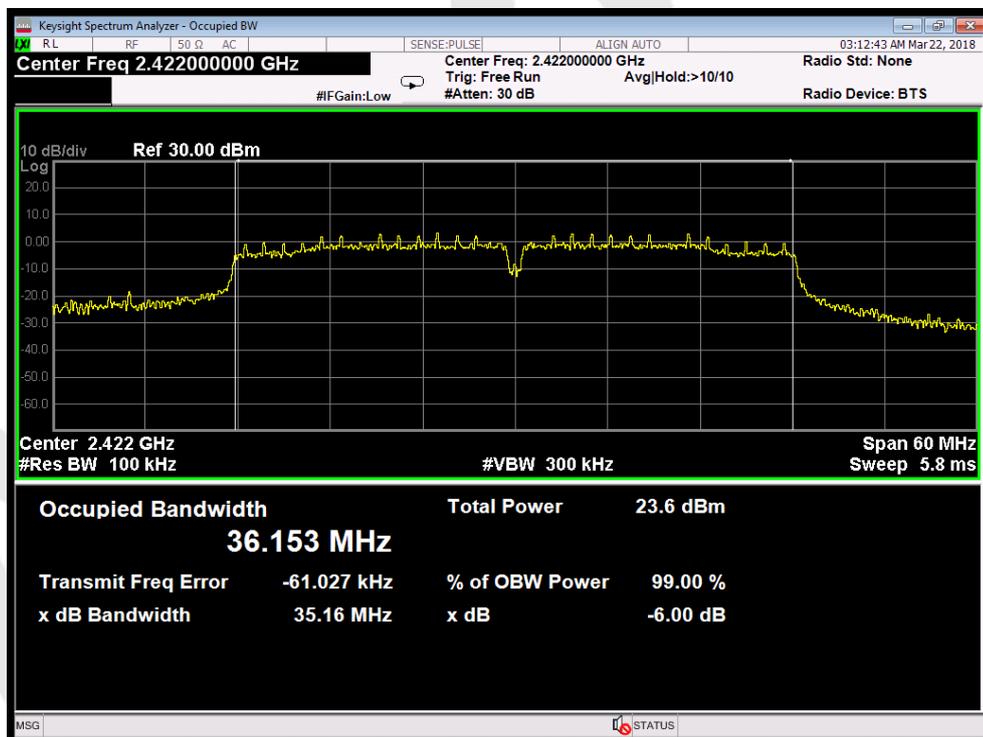

802.11n40 mode : Lowest

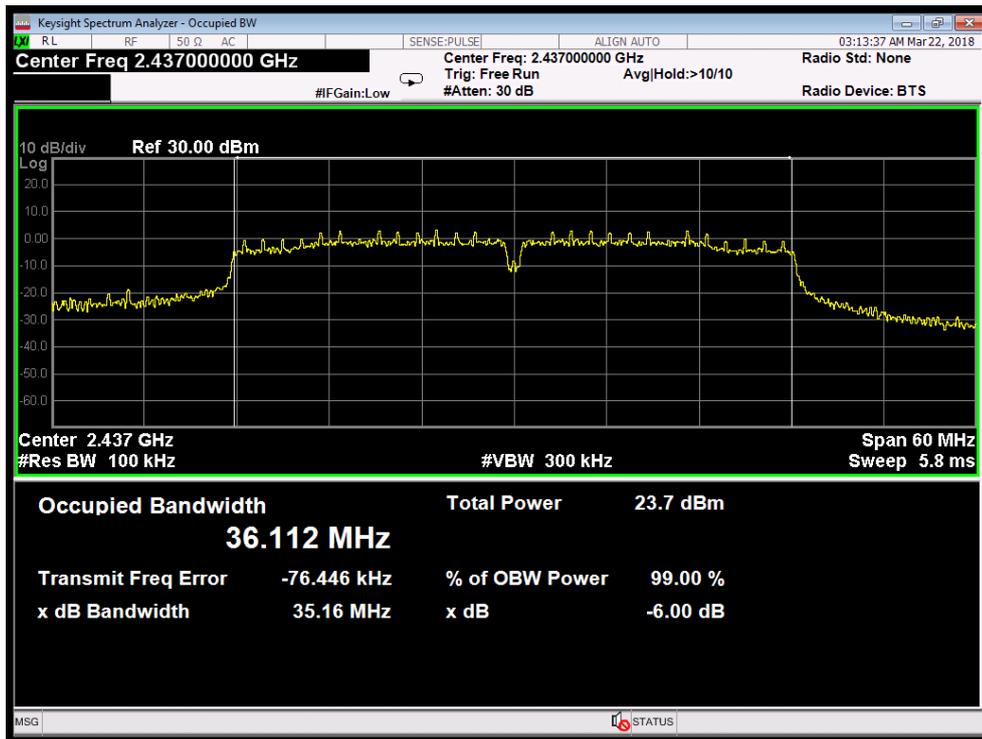

802.11n40 mode : Middle

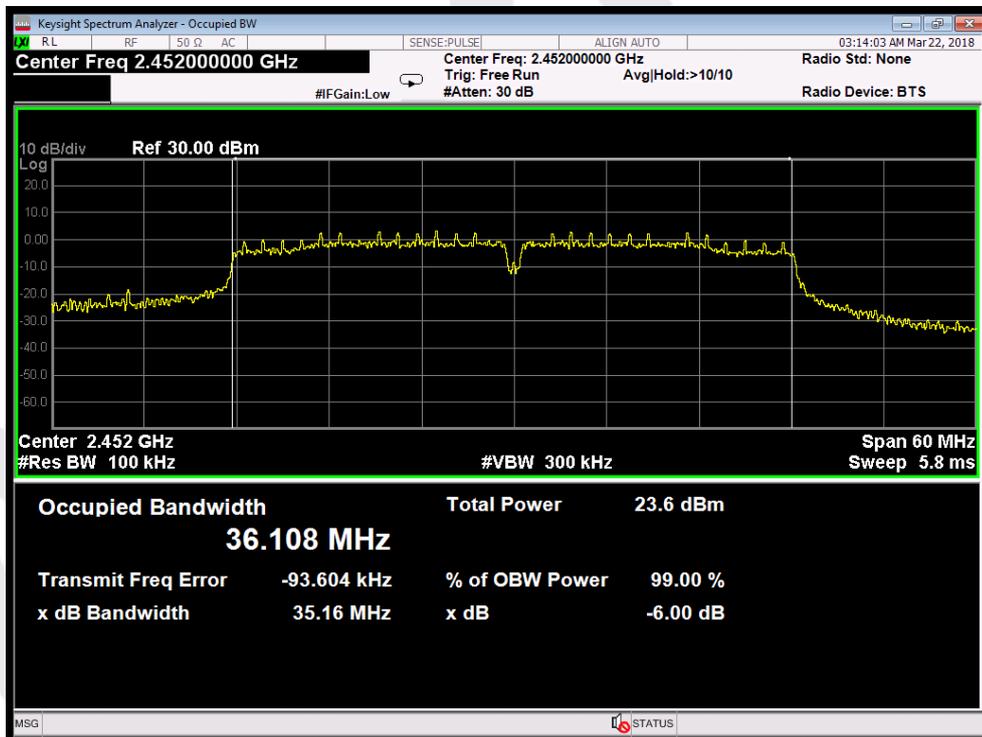


802.11n40 mode : Highest

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

7.2. Test Setup

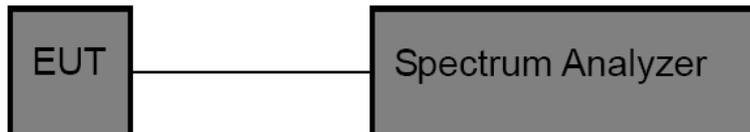

7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60Hz	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

ANT 1

Mode	Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
802.11b	Low	2412	-10.507	8.00	PASS
	Middle	2437	-11.274	8.00	PASS
	High	2462	-11.911	8.00	PASS
802.11g	Low	2412	-11.523	8.00	PASS
	Middle	2437	-12.051	8.00	PASS
	High	2462	-12.287	8.00	PASS
802.11n2 0	Low	2412	-12.379	8.00	PASS
	Middle	2437	-10.825	8.00	PASS
	High	2462	-12.728	8.00	PASS
802.11n4 0	Low	2422	-13.985	8.00	PASS
	Middle	2437	-13.151	8.00	PASS
	High	2452	-14.021	8.00	PASS

ANT 2

Mode	Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
802.11b	Low	2412	-10.477	8.00	PASS
	Middle	2437	-10.790	8.00	PASS
	High	2462	-11.905	8.00	PASS
802.11g	Low	2412	-11.435	8.00	PASS
	Middle	2437	-11.959	8.00	PASS
	High	2462	-11.041	8.00	PASS
802.11n2 0	Low	2412	-12.486	8.00	PASS
	Middle	2437	-11.601	8.00	PASS
	High	2462	-12.509	8.00	PASS
802.11n4 0	Low	2422	-13.295	8.00	PASS
	Middle	2437	-14.249	8.00	PASS
	High	2452	-13.299	8.00	PASS

SUM


Mode	Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
802.11n2 0	Low	2412	-9.42	8.00	PASS
	Middle	2437	-8.19	8.00	PASS
	High	2462	-9.61	8.00	PASS
802.11n4 0	Low	2422	-10.605	8.00	PASS
	Middle	2437	-10.655	8.00	PASS
	High	2452	-10.605	8.00	PASS




ANT 1




802.11b mode : Lowest

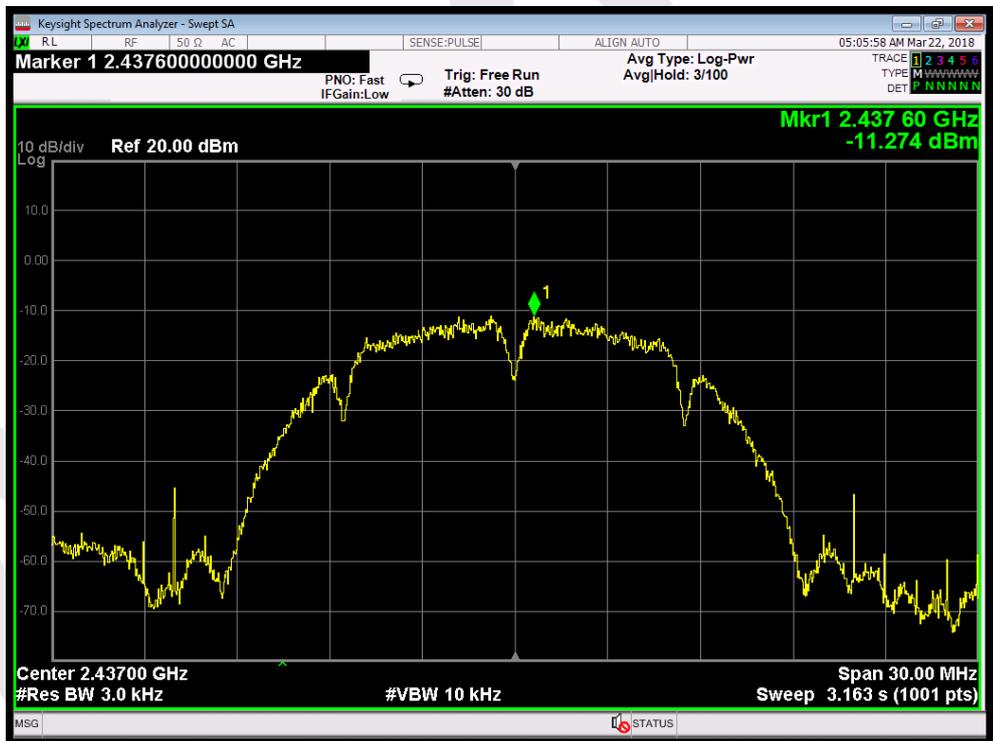


802.11b mode : Middle

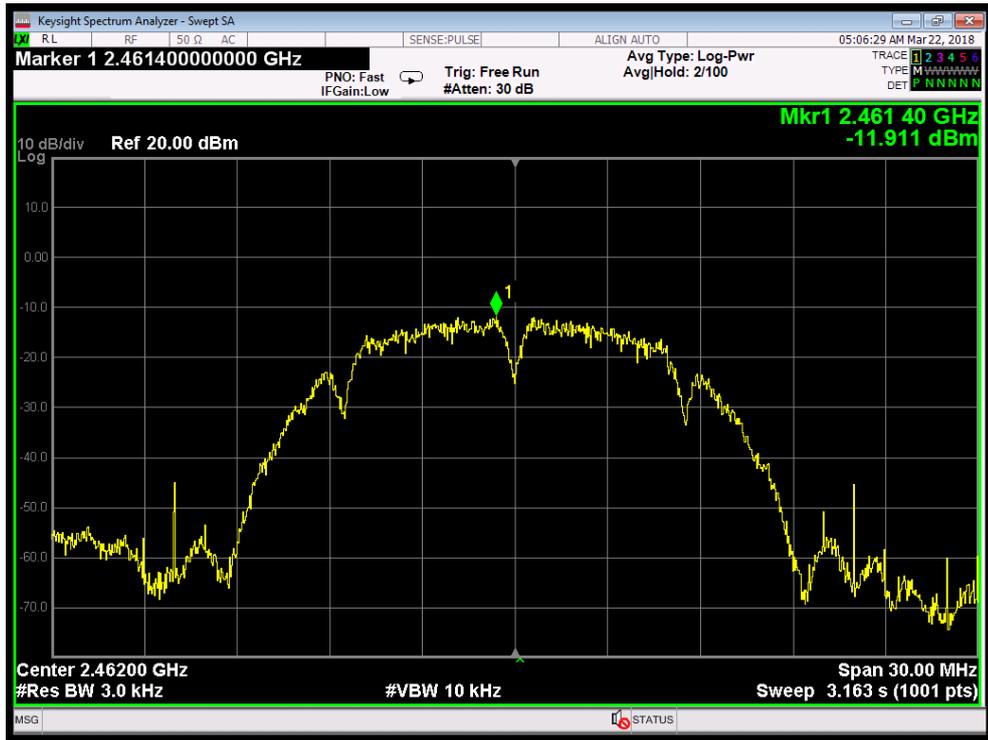


802.11b mode : Highest

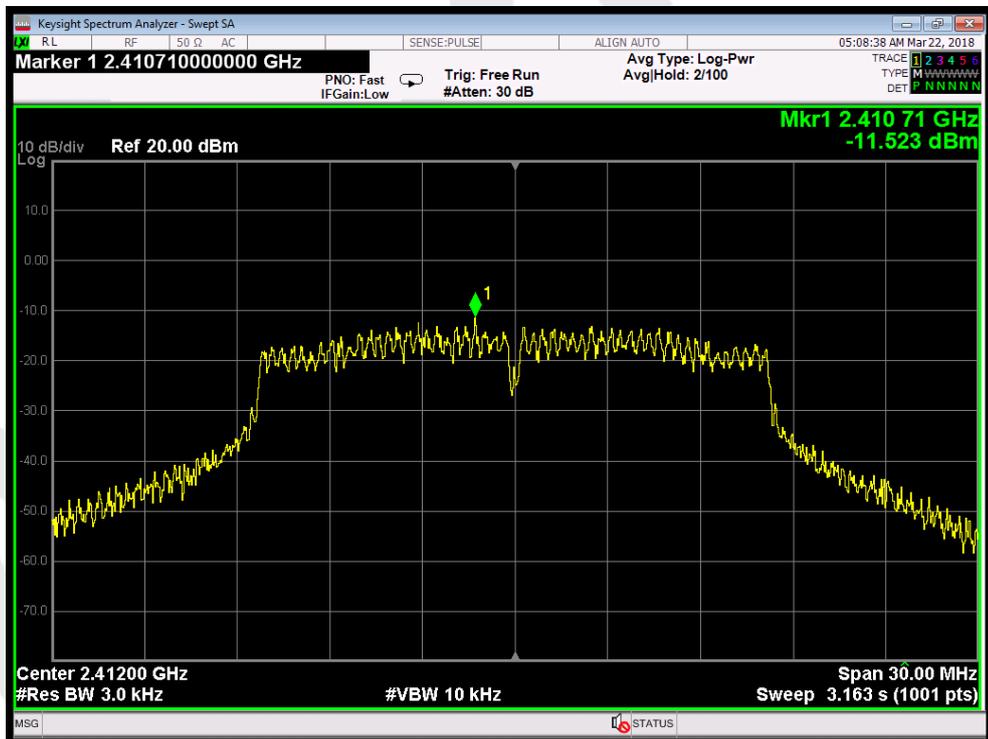


802.11g mode : Lowest

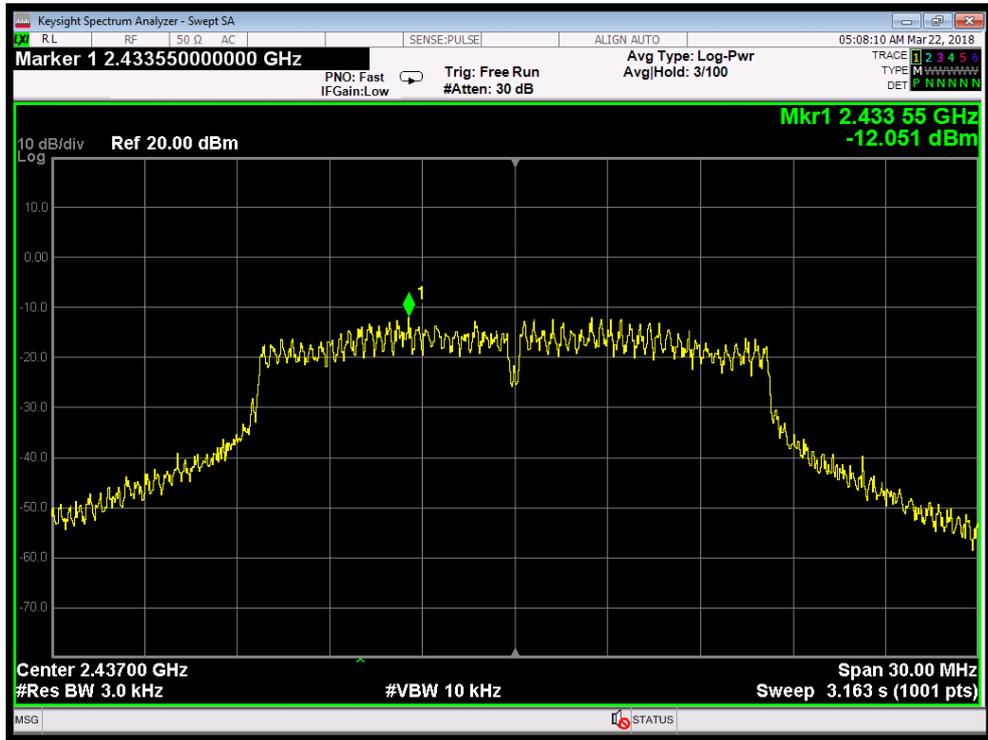


802.11g mode : Middle

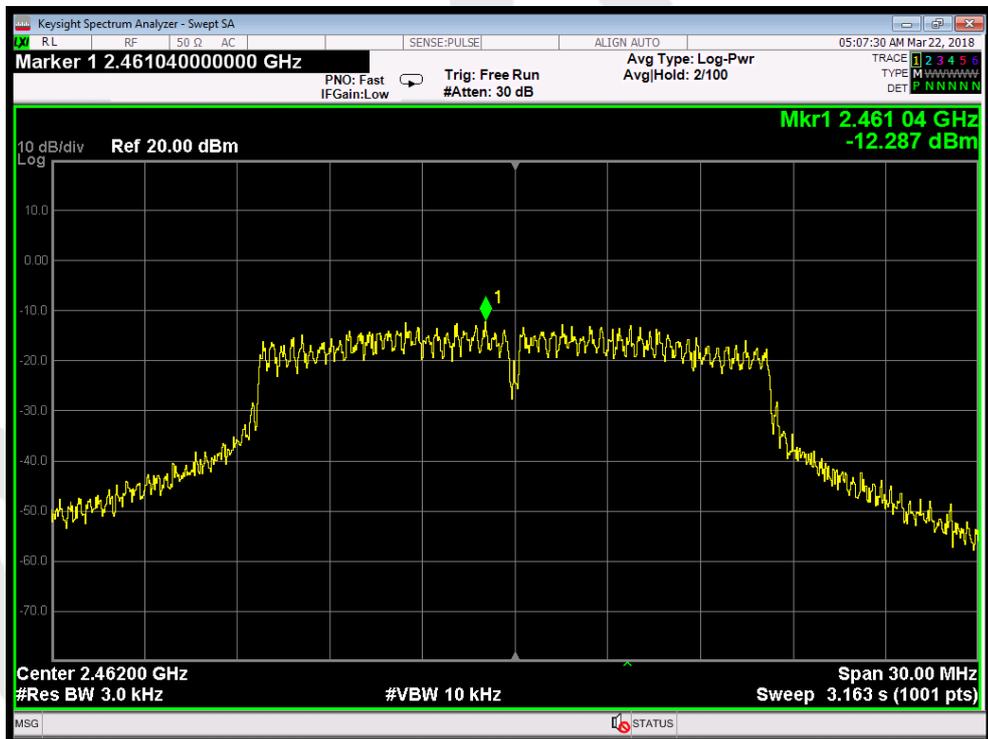


802.11g mode : Highest

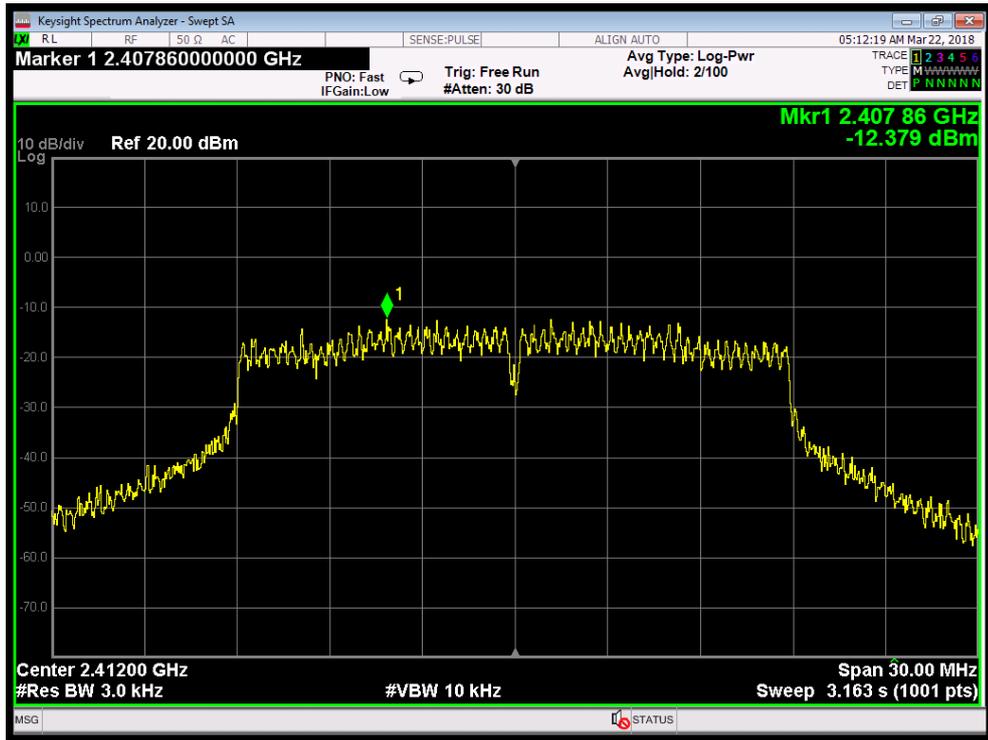


802.11n20 mode : Lowest

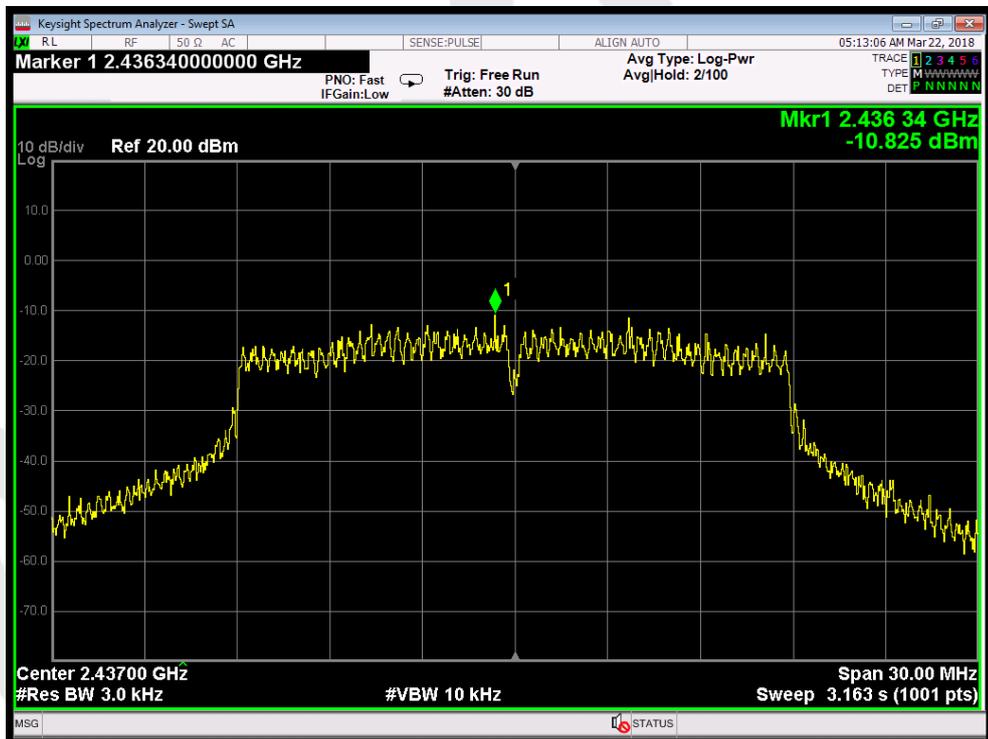


802.11n20 mode : Middle

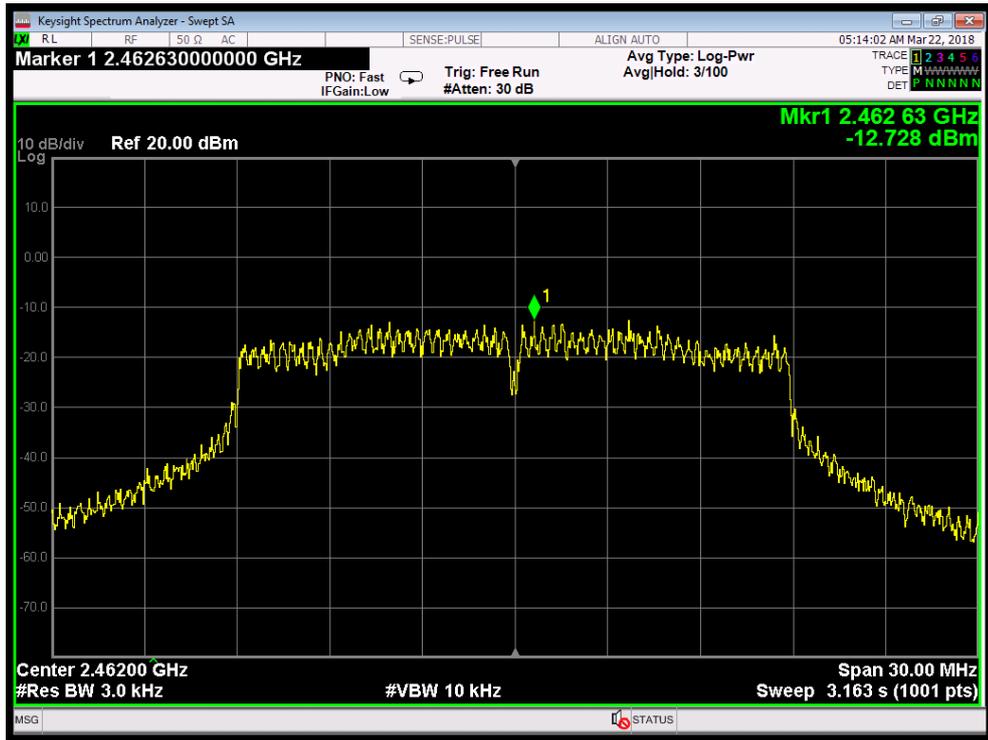


802.11n20 mode : Highest

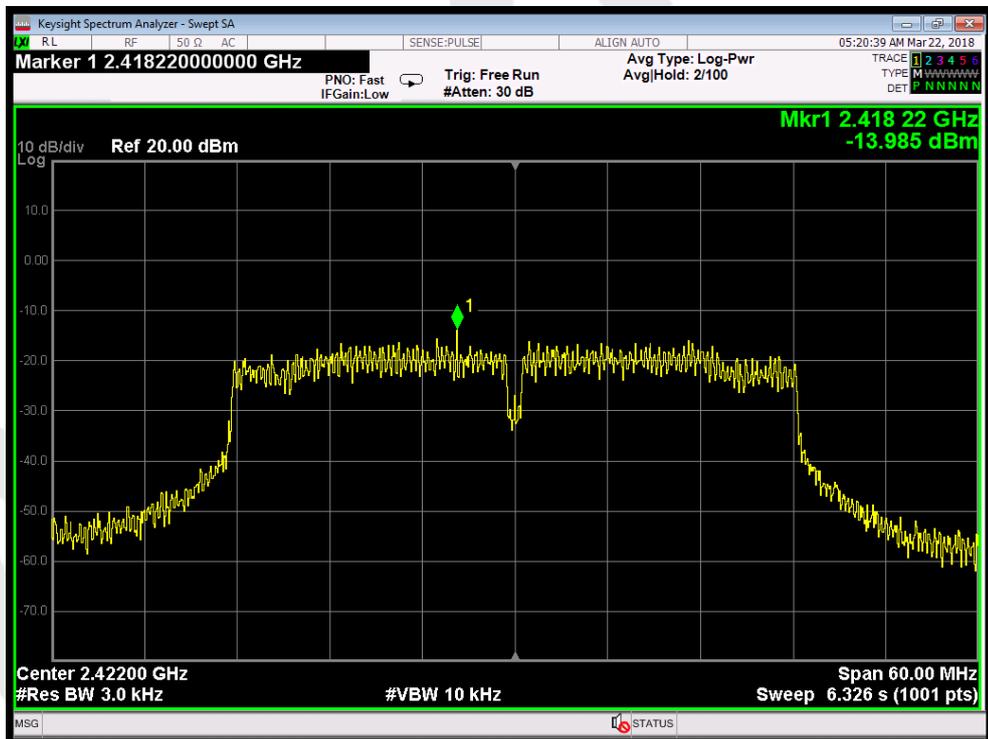

802.11n40 mode : Lowest

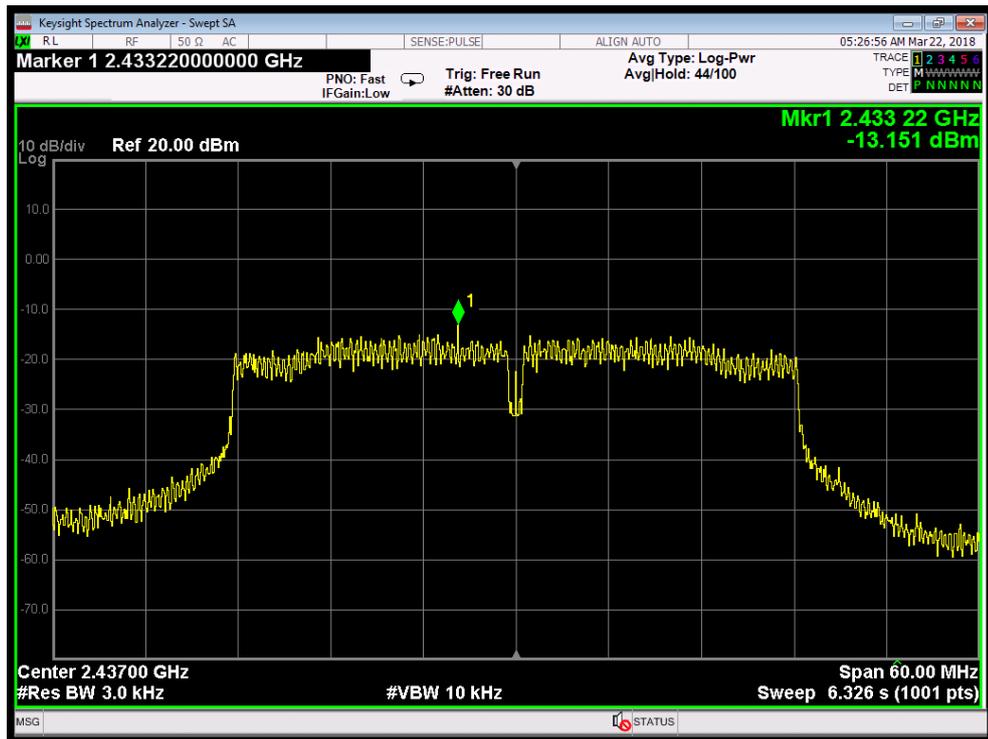

802.11n40 mode : Middle

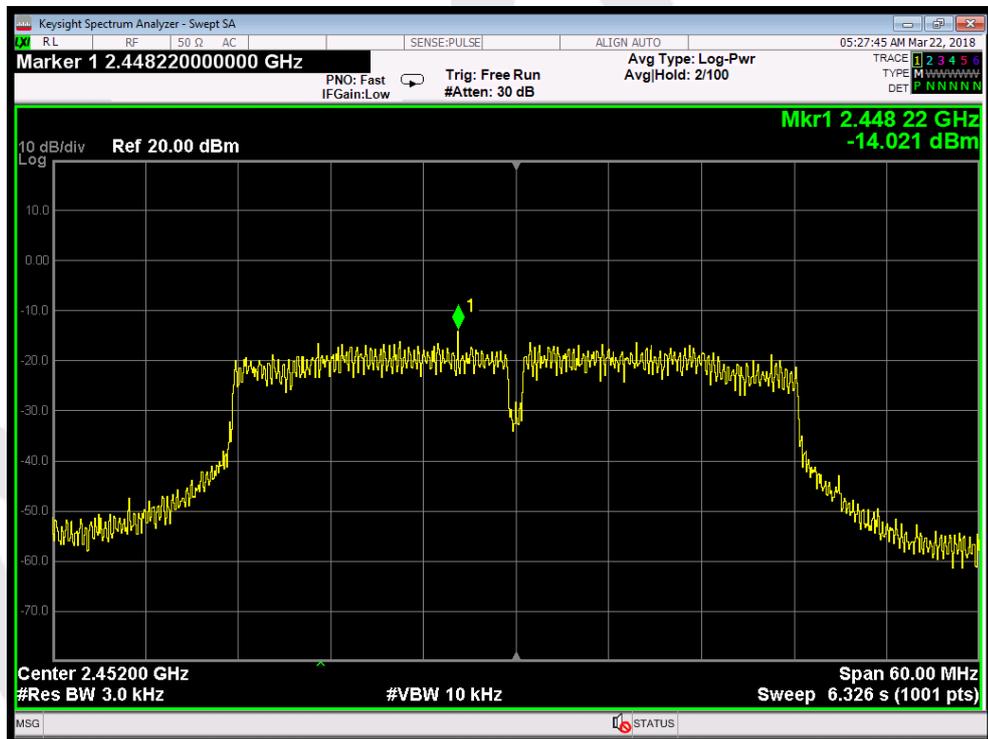


802.11n40 mode : Highest

ANT 2




802.11b mode : Lowest

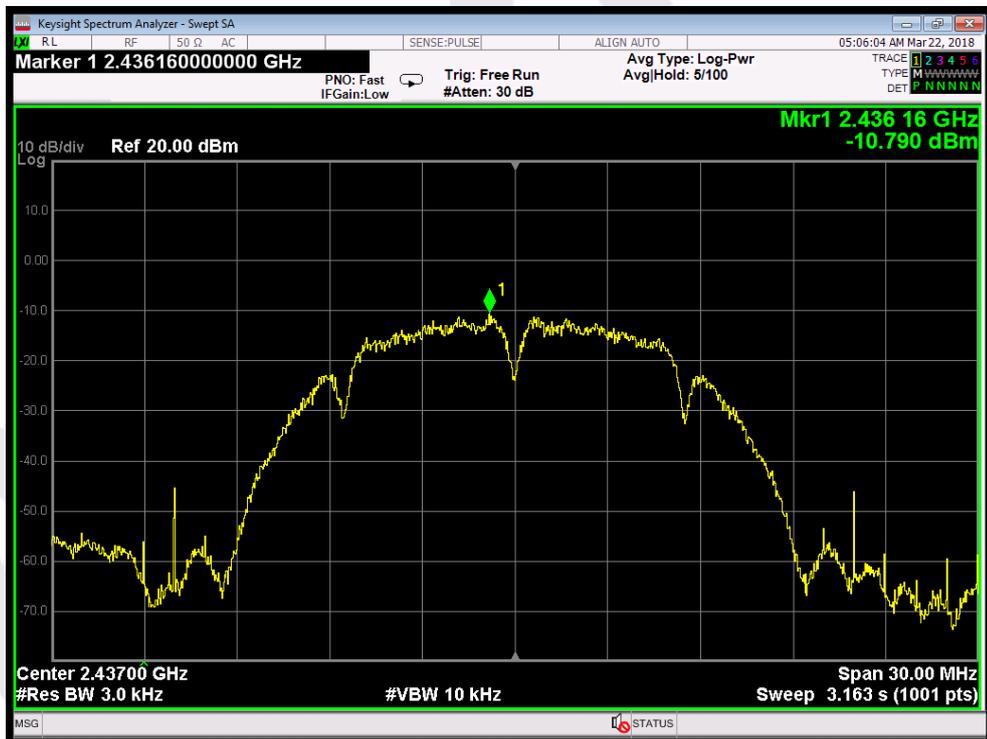


802.11b mode : Middle




802.11b mode : Highest

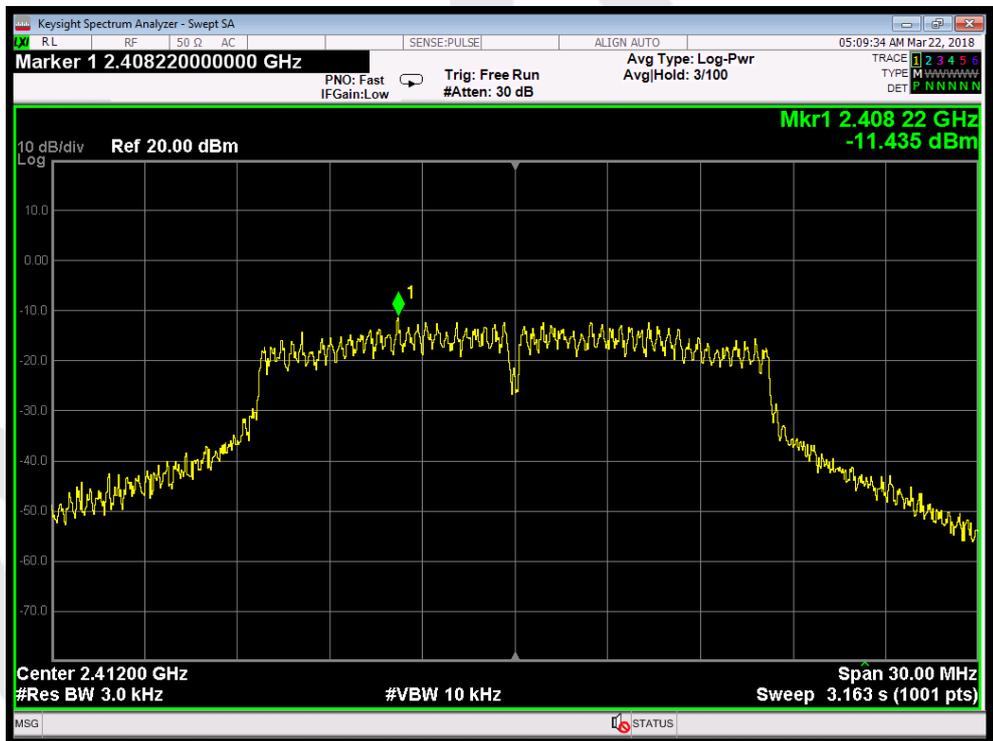


802.11g mode : Lowest

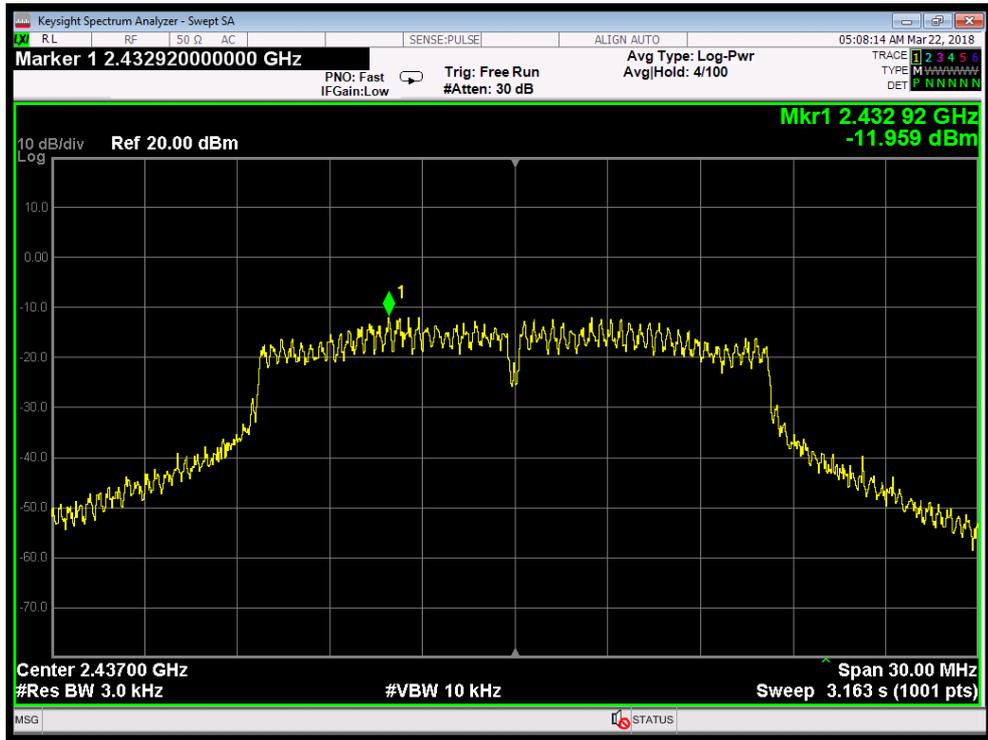


802.11g mode : Middle

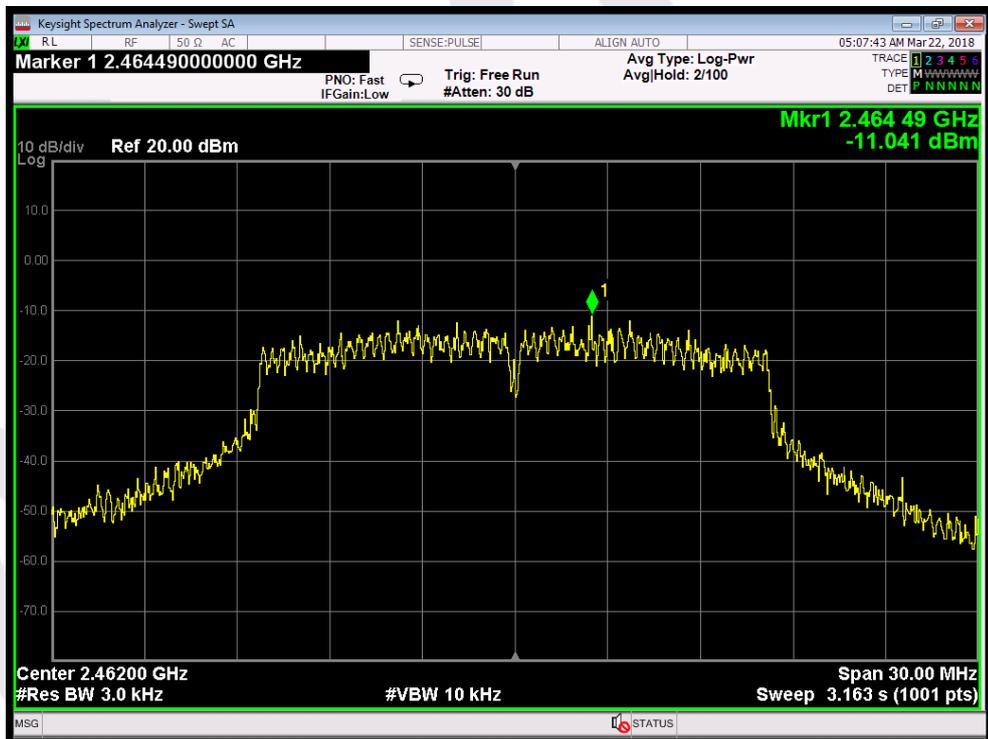


802.11g mode : Highest

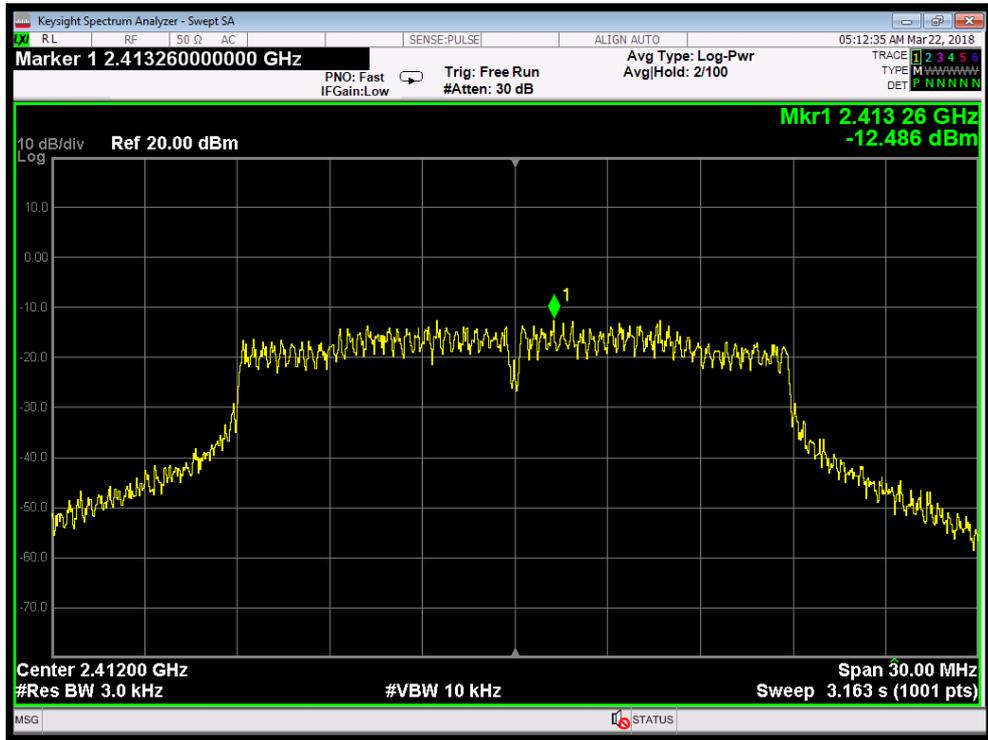


802.11n20 mode : Lowest

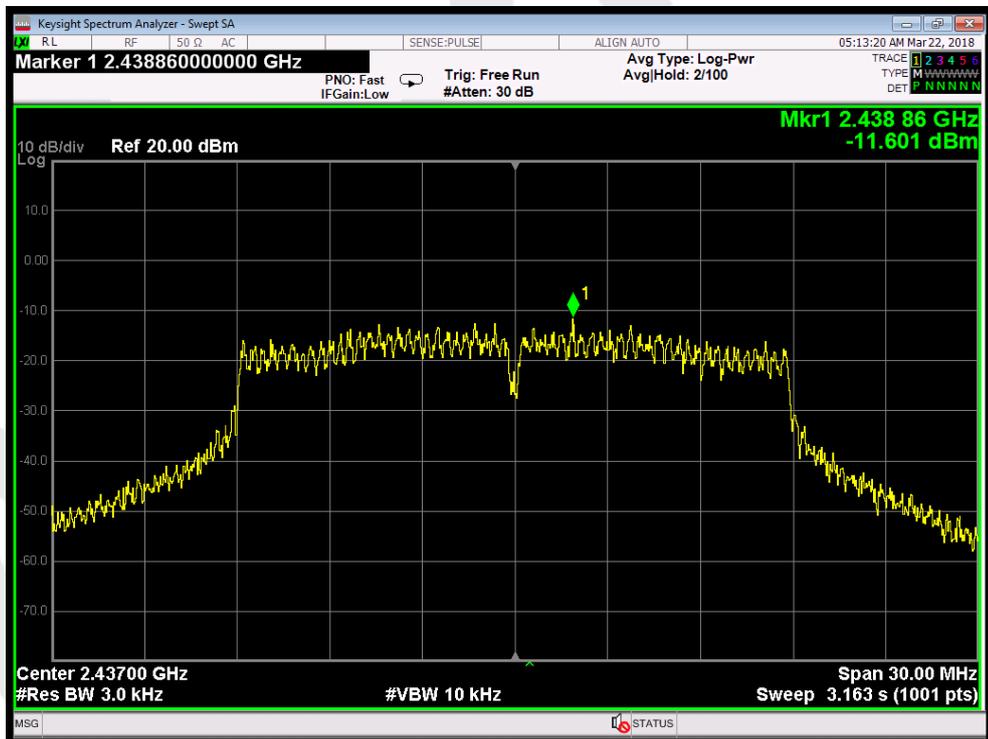


802.11n20 mode : Middle

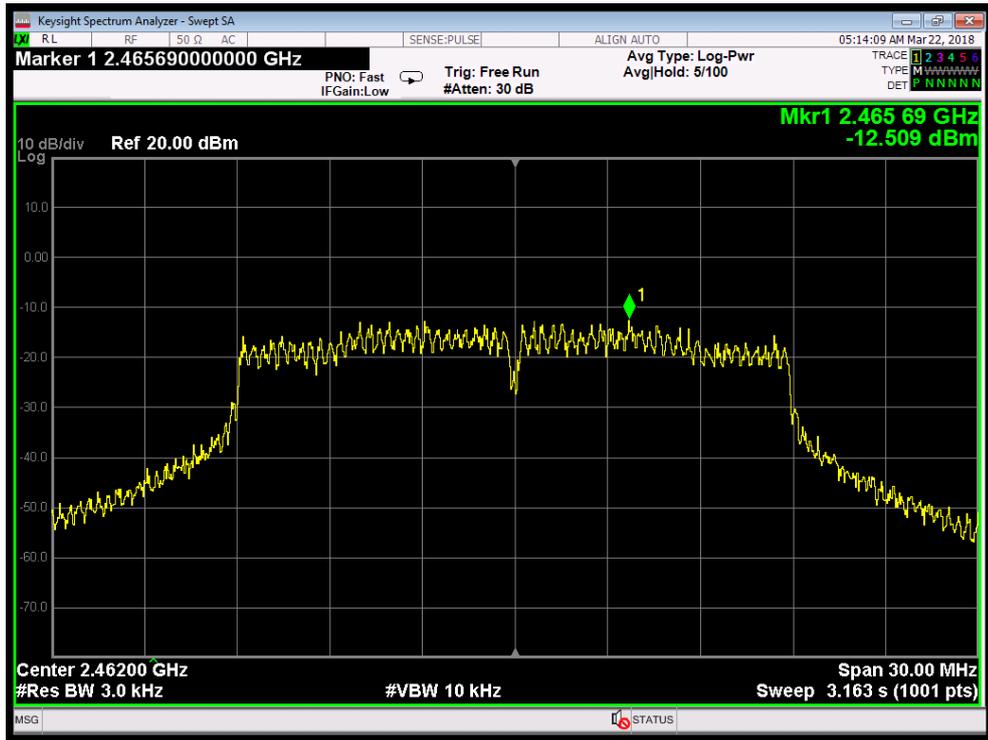


802.11n20 mode : Highest

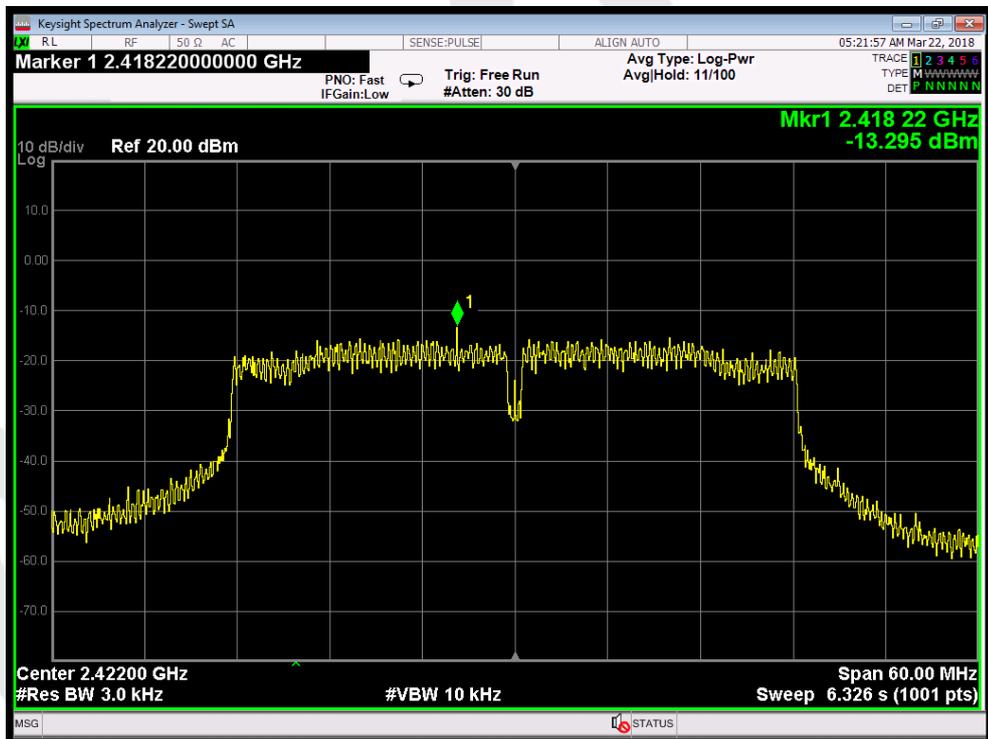

802.11n40 mode : Lowest

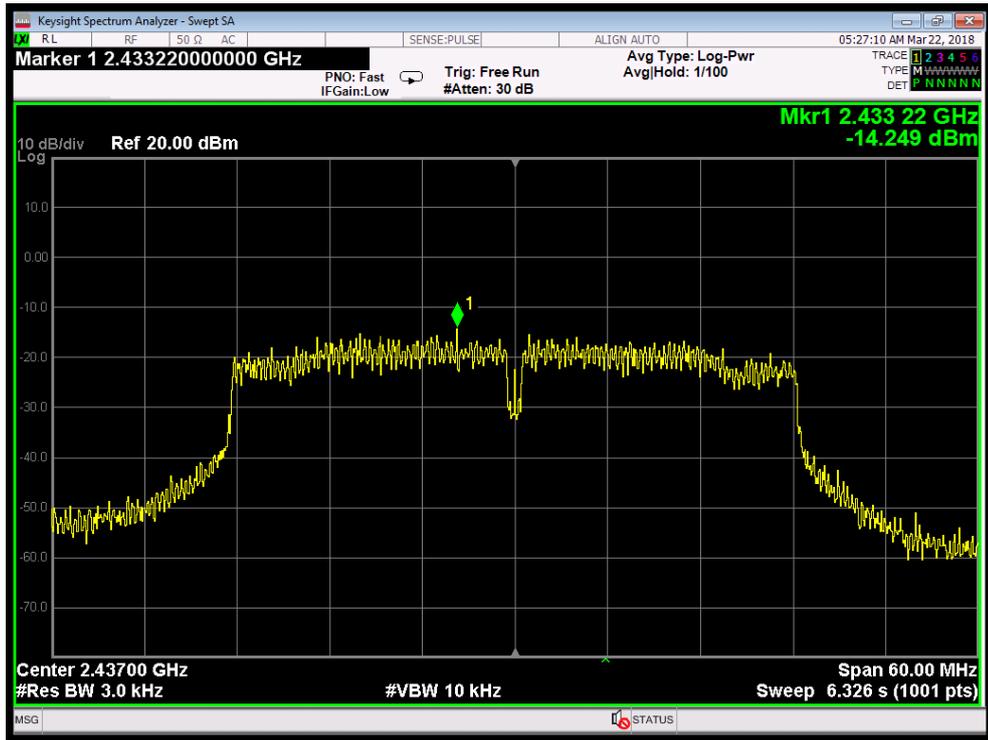

802.11n40 mode : Middle

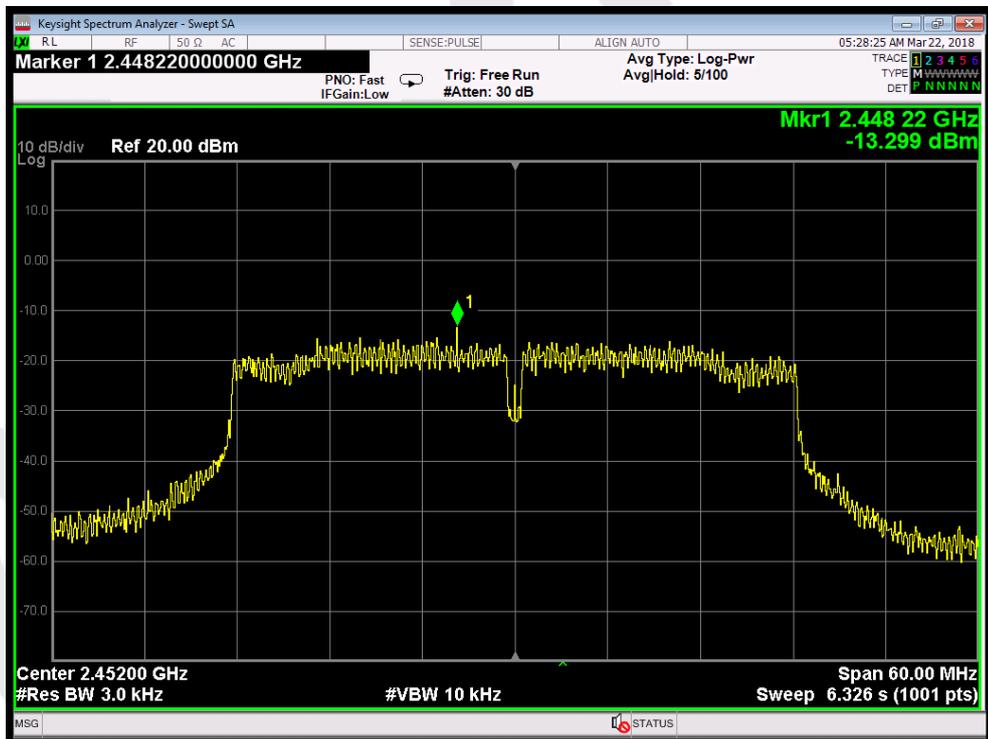


802.11n40 mode : Highest

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup

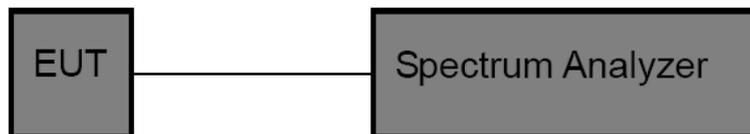

8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60Hz	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


ANT 1

Mode	Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
802.11b	2412	42.865	>20	PASS
	2462	45.007	>20	PASS
802.11g	2412	23.737	>20	PASS
	2462	36.967	>20	PASS
802.11n20	2412	24.583	>20	PASS
	2462	36.498	>20	PASS
802.11n40	2422	24.563	>20	PASS
	2452	33.377	>20	PASS

ANT 2

Mode	Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
802.11b	2412	43.550	>20	PASS
	2462	43.513	>20	PASS
802.11g	2412	24.091	>20	PASS
	2462	38.616	>20	PASS
802.11n20	2412	24.755	>20	PASS
	2462	35.473	>20	PASS
802.11n40	2422	23.834	>20	PASS
	2452	33.726	>20	PASS


ANT 1

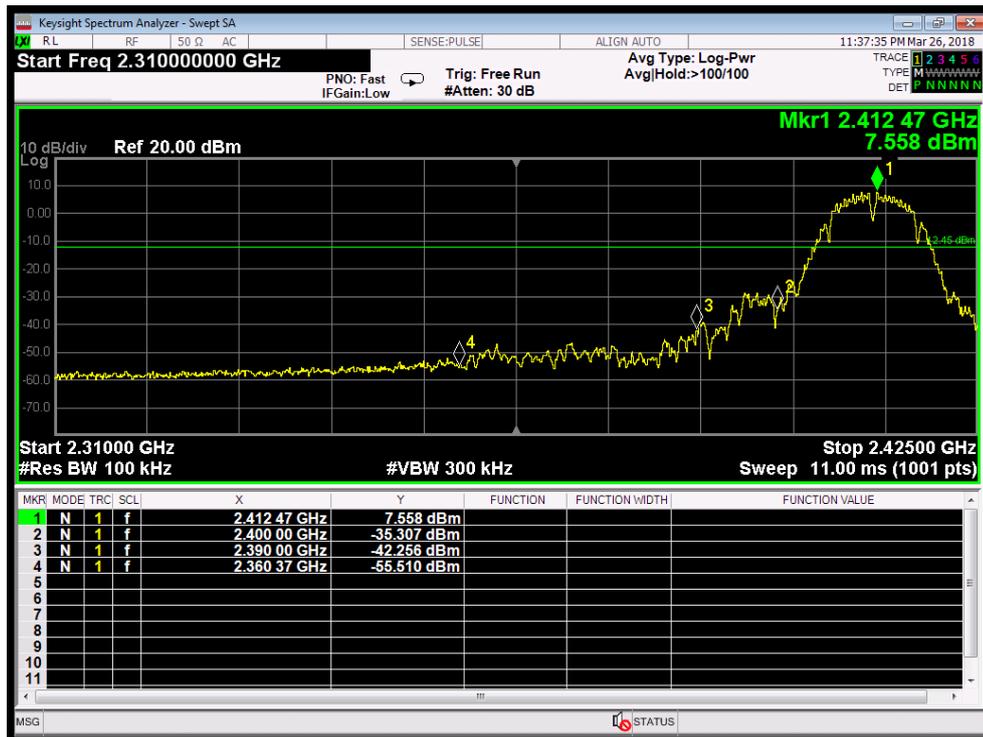

802.11b mode : Lowest




802.11b mode : Highest

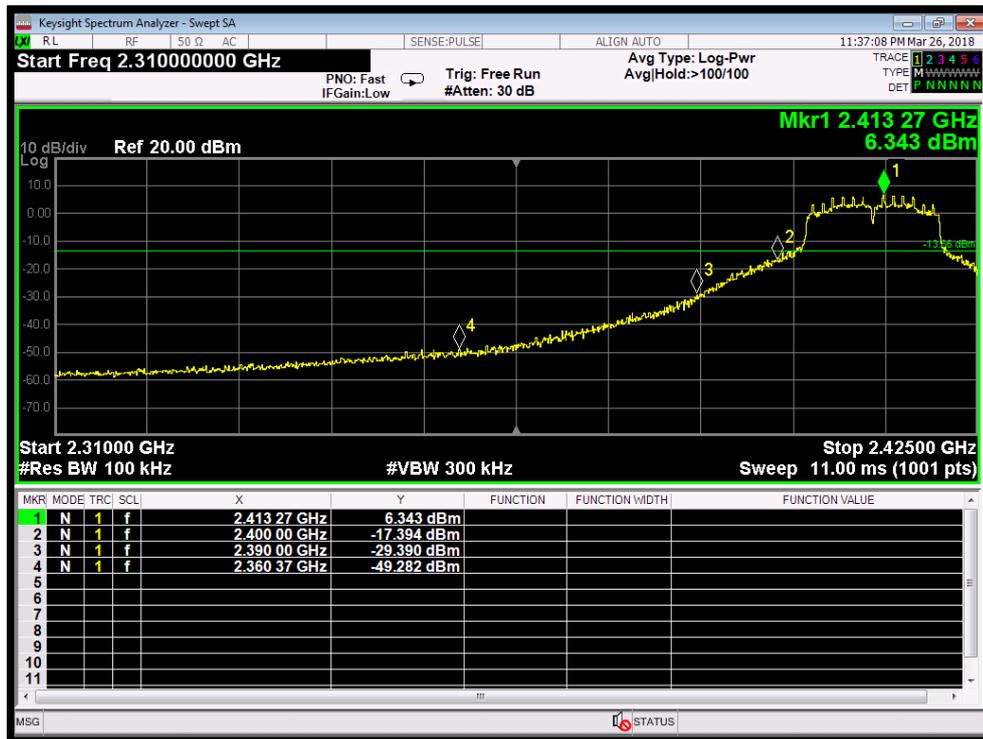

802.11g mode : Lowest




802.11g mode : Highest

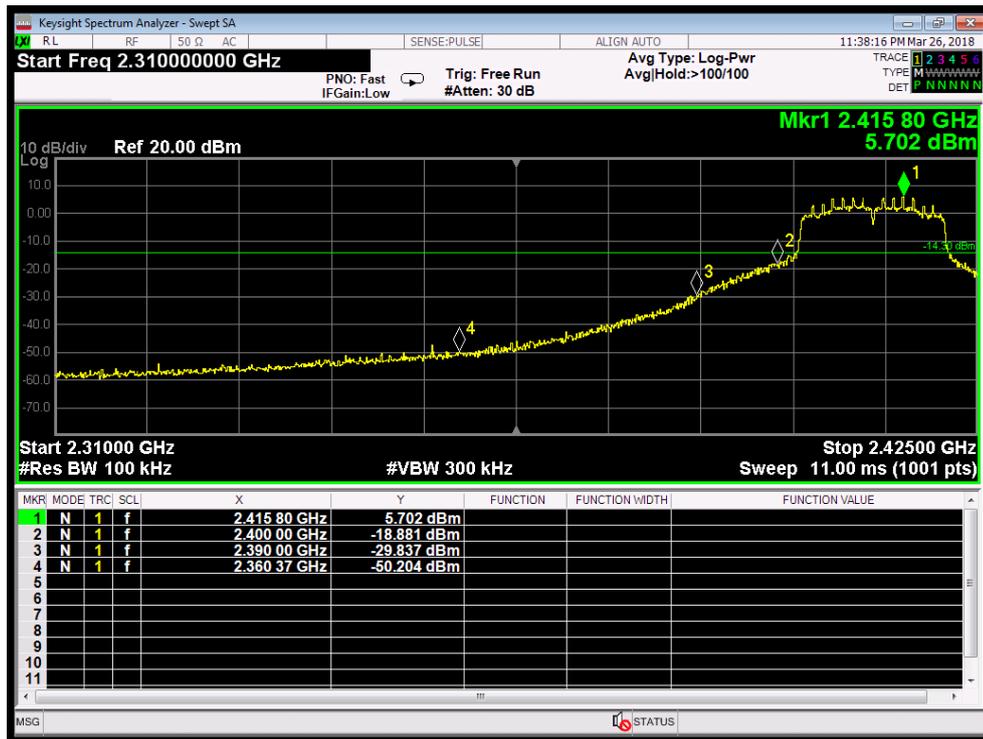


802.11n20 mode : Lowest



802.11n20 mode : Highest

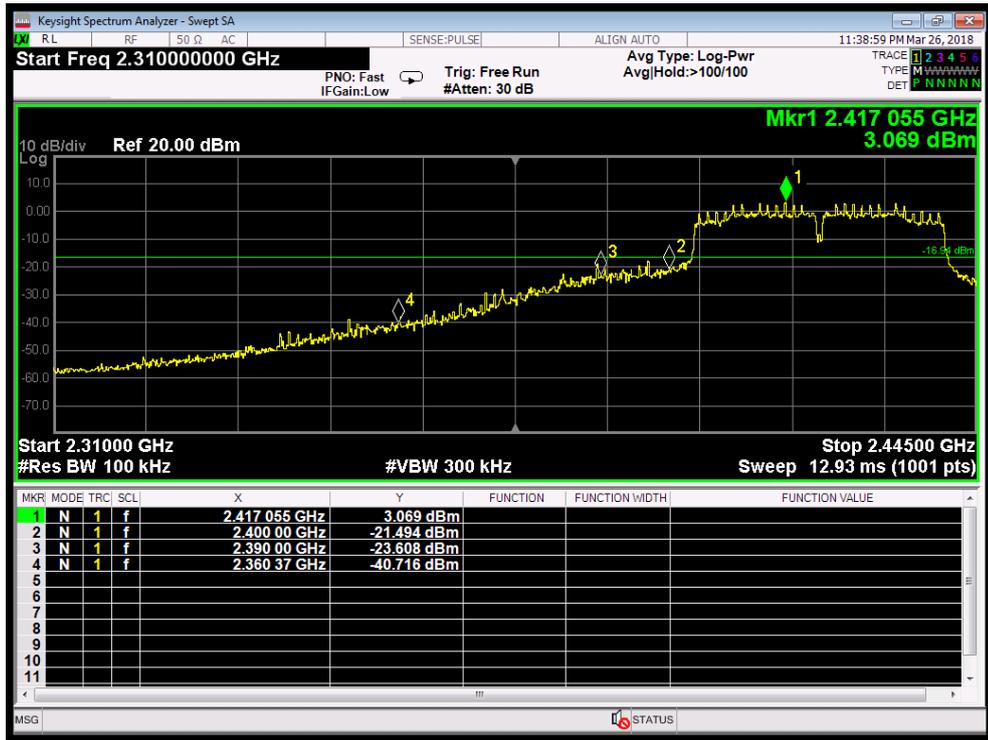


802.11n40 mode : Lowest

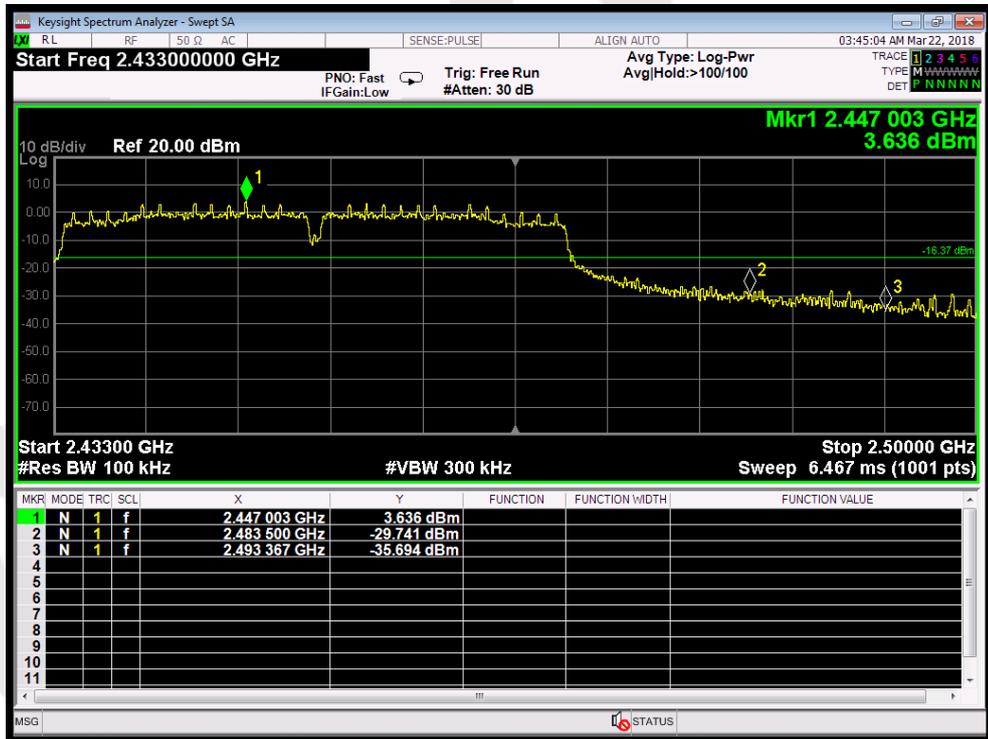

802.11n40 mode : Highest


ANT 2

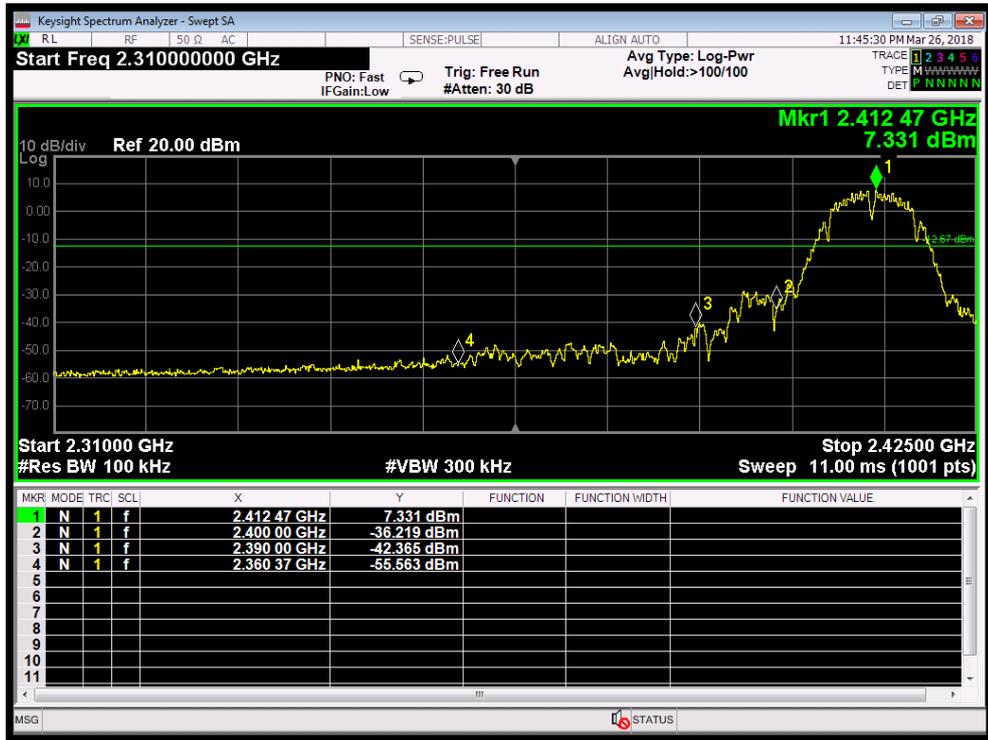

802.11b mode : Lowest




802.11b mode : Highest

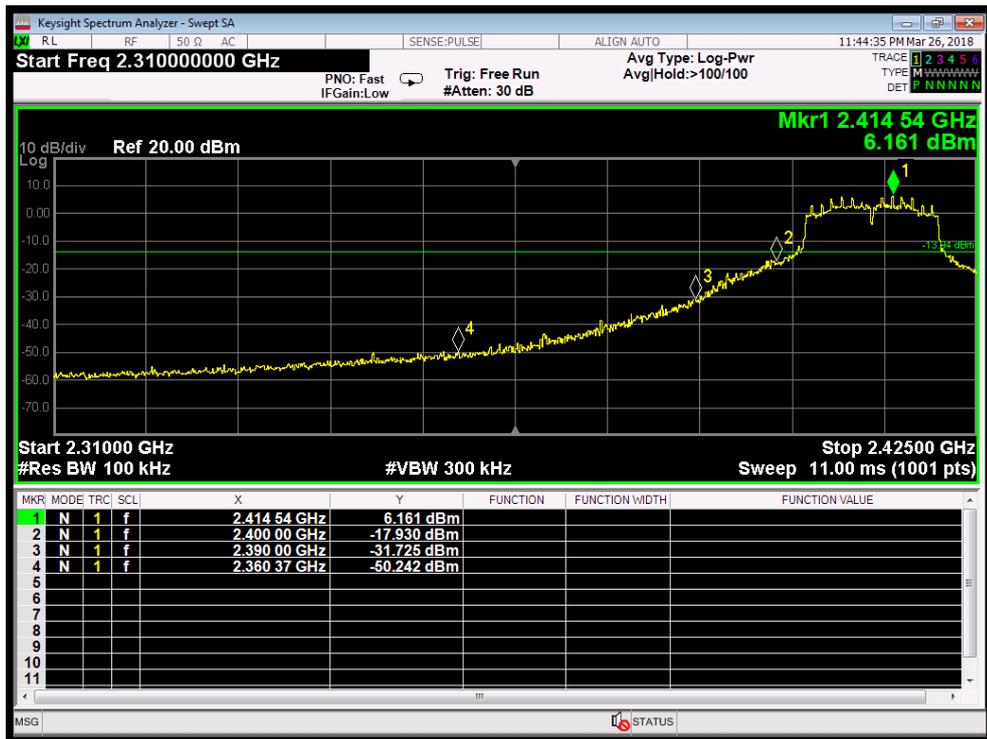

802.11g mode : Lowest



802.11g mode : Highest

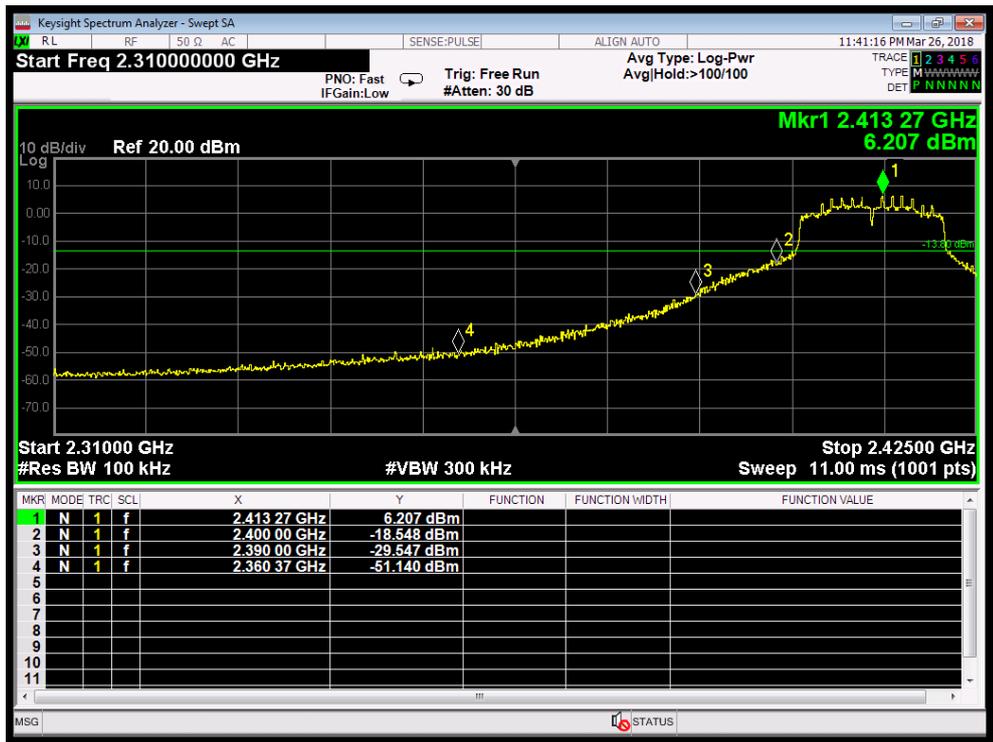

802.11n20 mode : Lowest



802.11n20 mode : Highest




802.11n40 mode : Lowest




802.11n40 mode : Highest

Conducted Emission Method


Ant 1

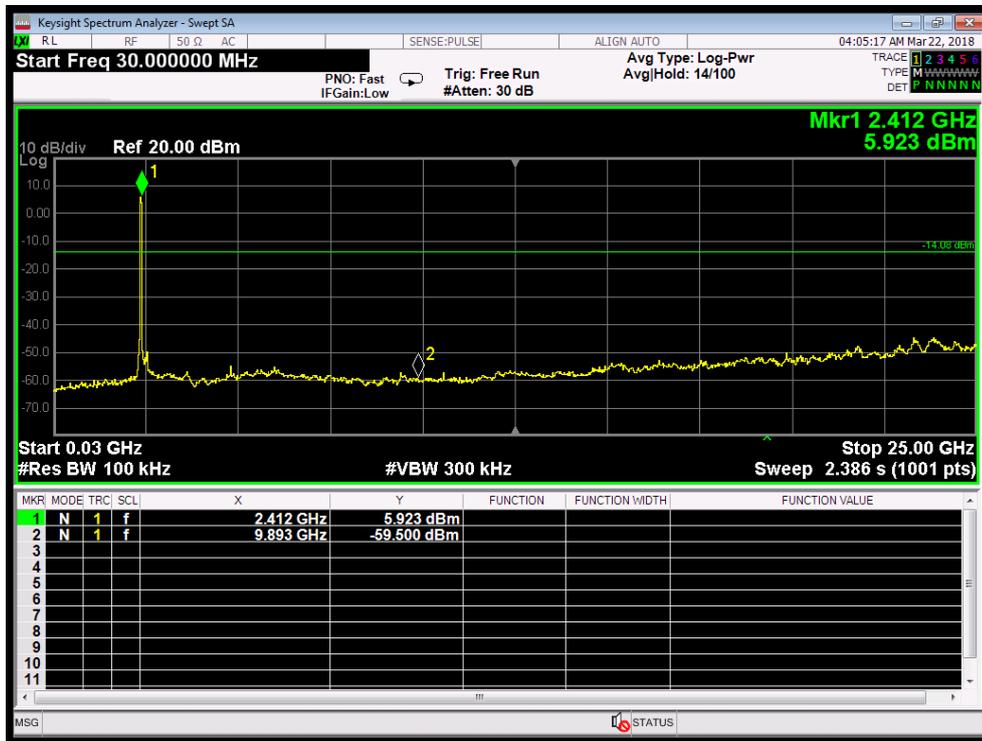


802.11b mode : Lowest

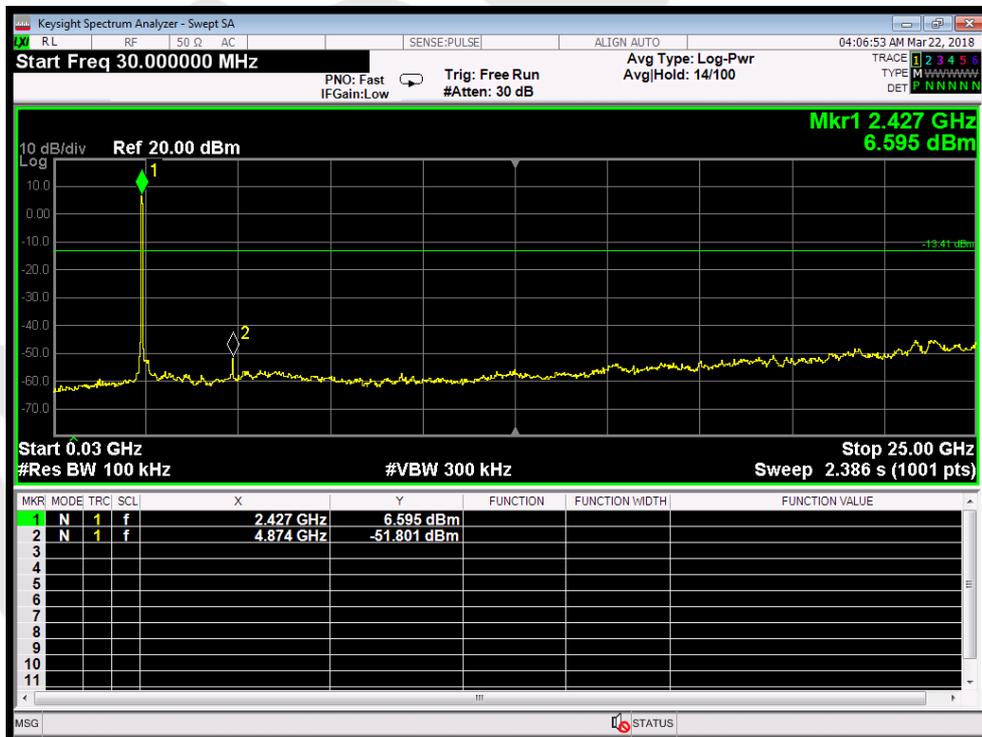


802.11b mode : Middle

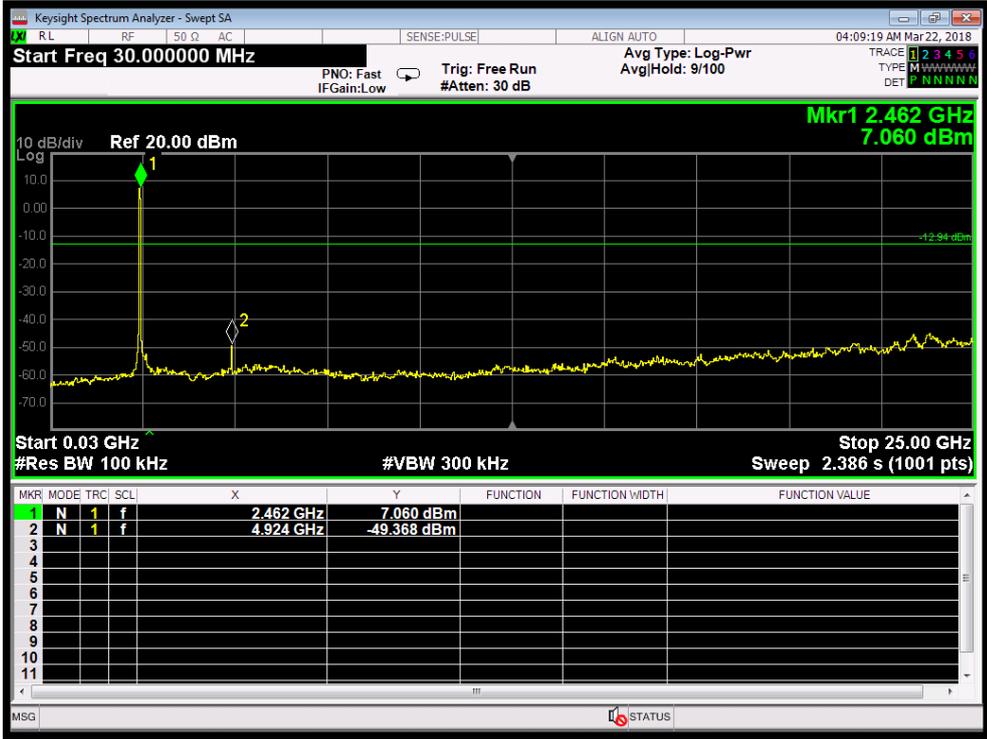


802.11b mode : Highest

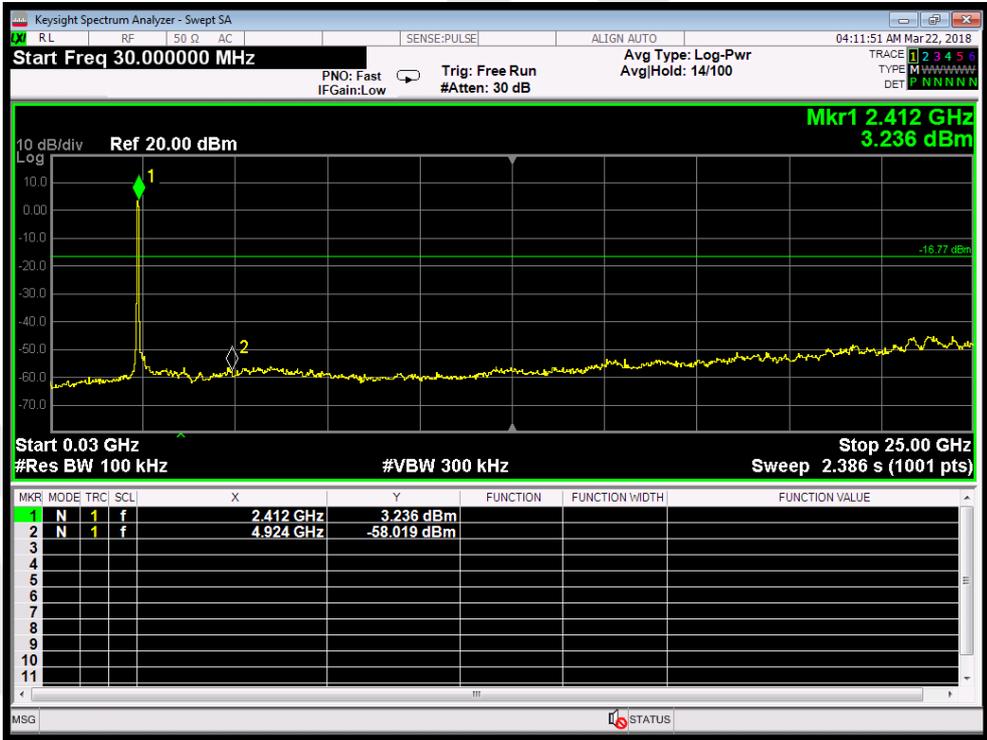


802.11g mode : Lowest

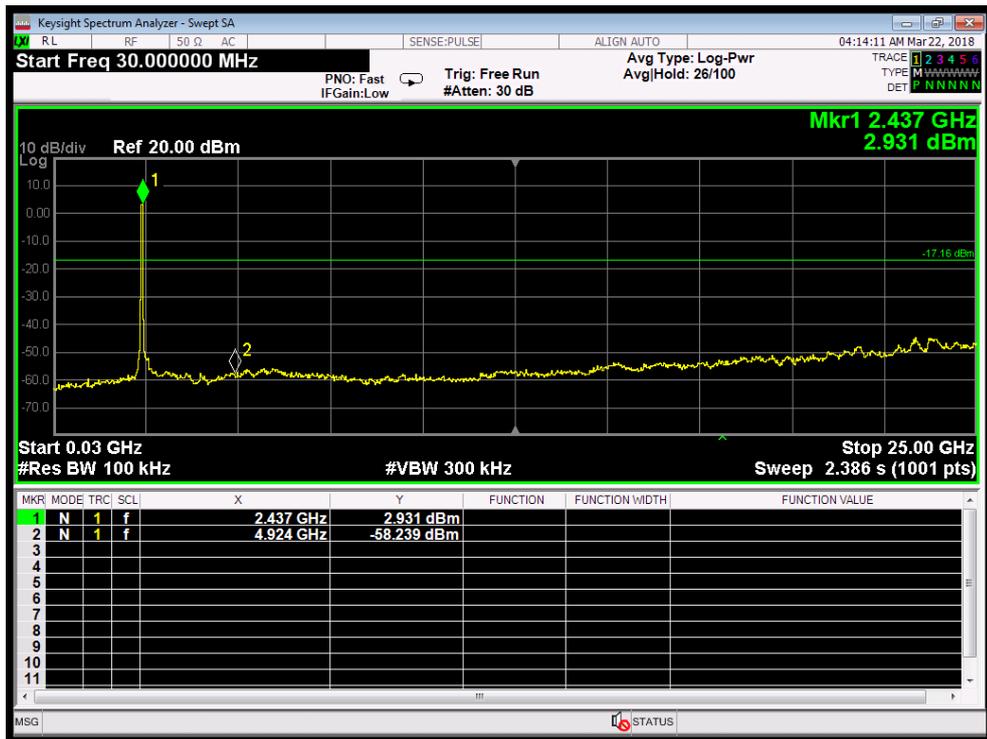


802.11g mode : Middle

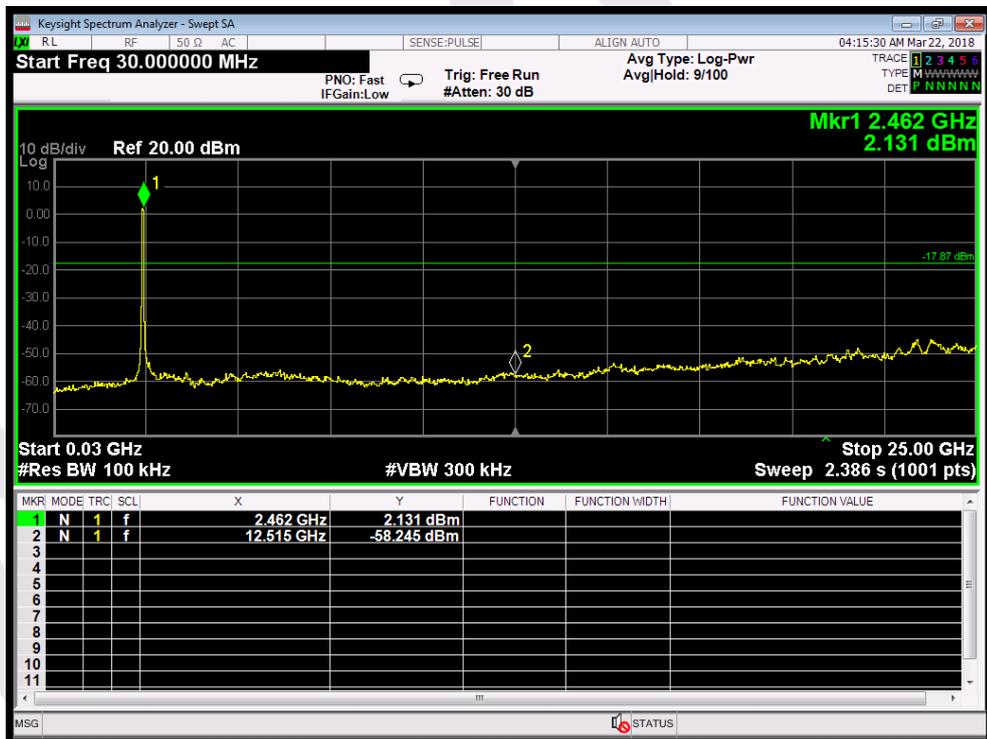


802.11g mode : Highest

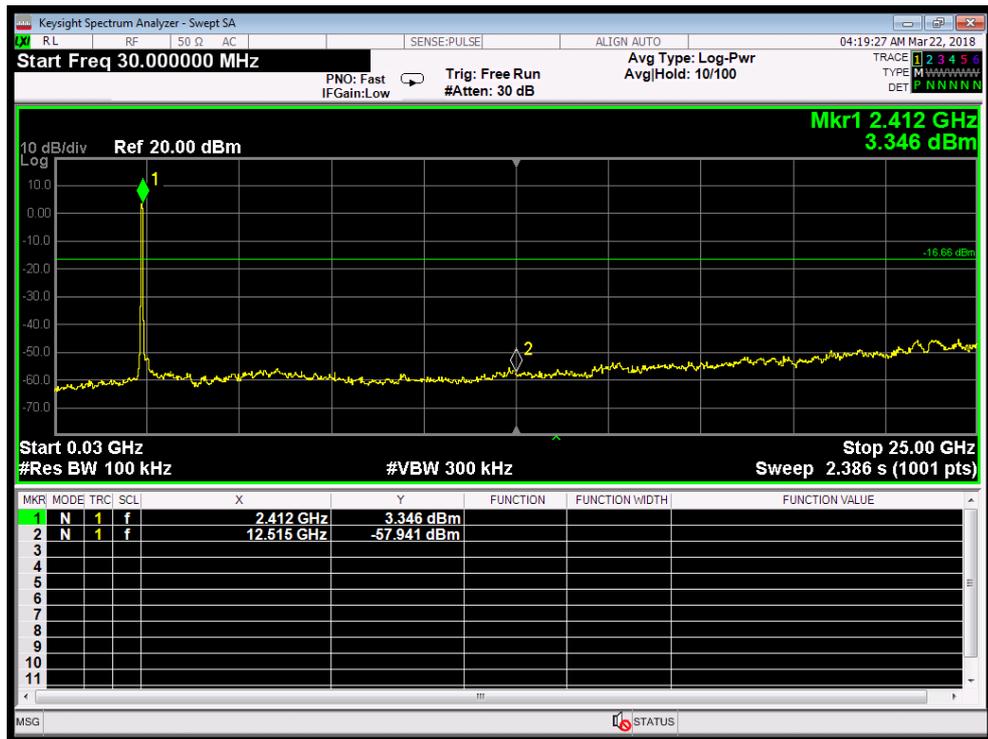


802.11n20 mode : Lowest

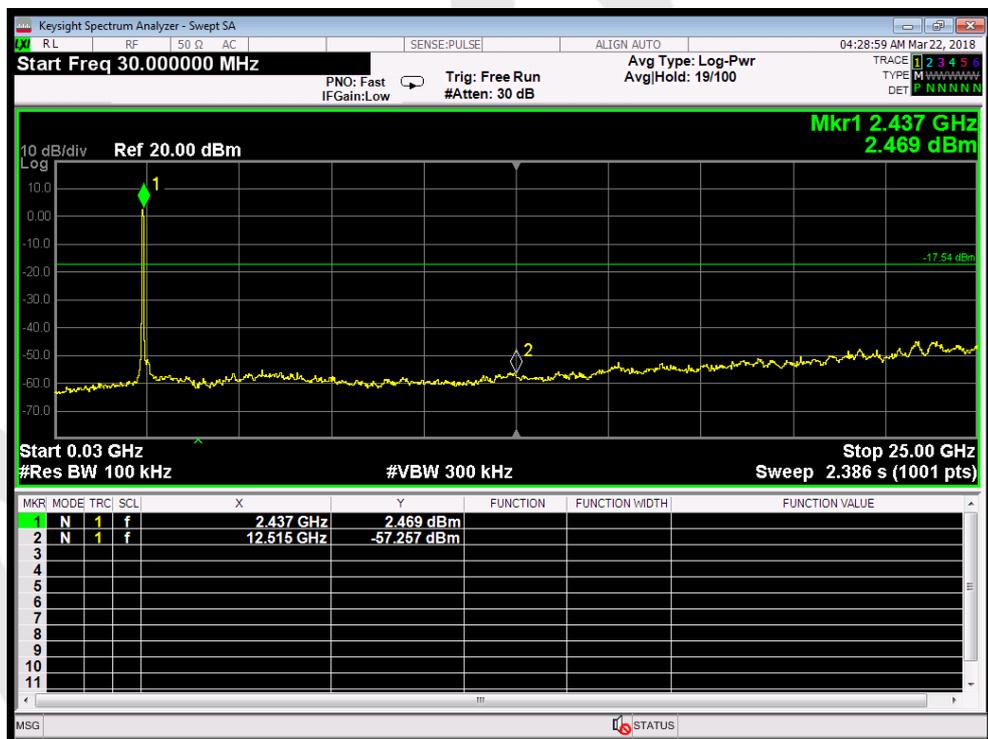


802.11n20 mode : Middle

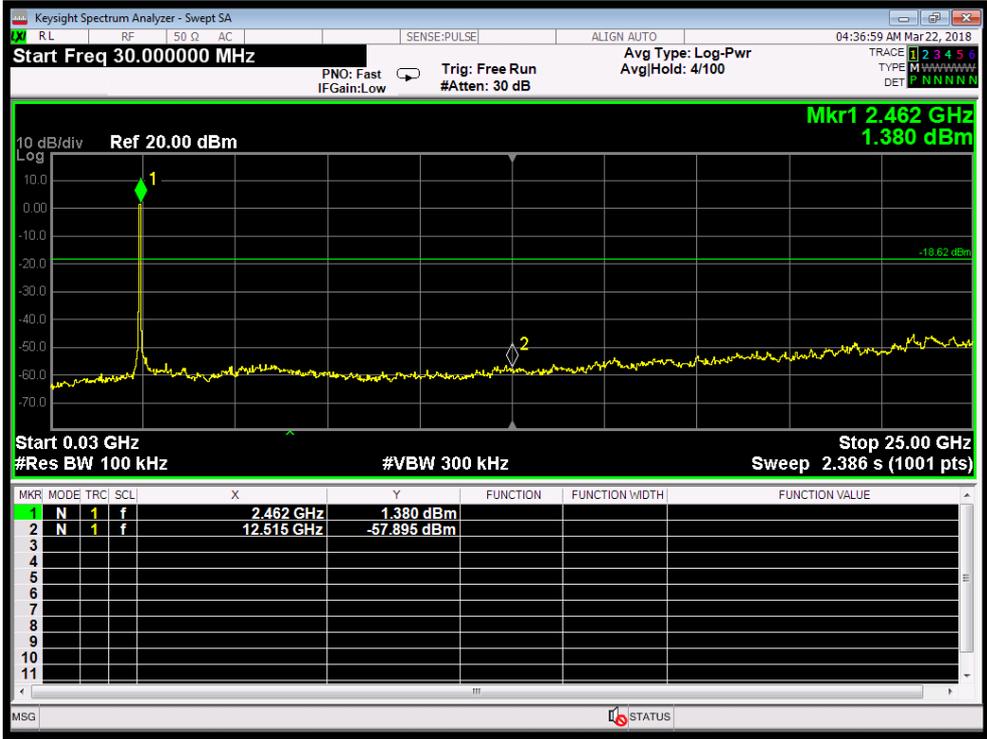


802.11n20 mode : Highest

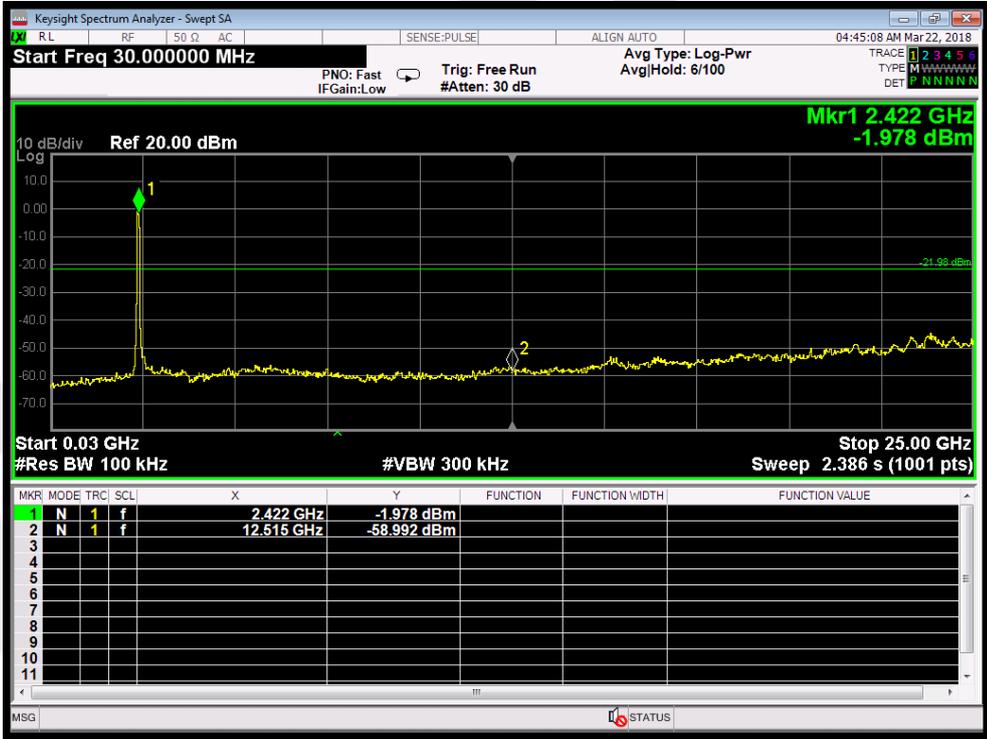

802.11n40 mode : Lowest

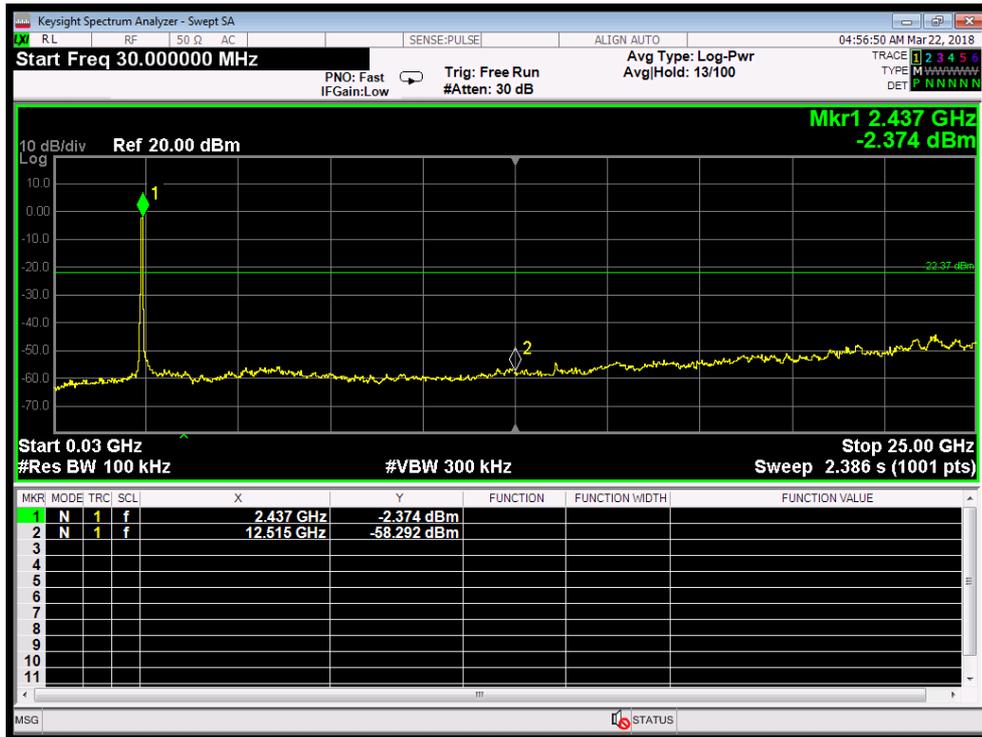


802.11n40 mode : Middle

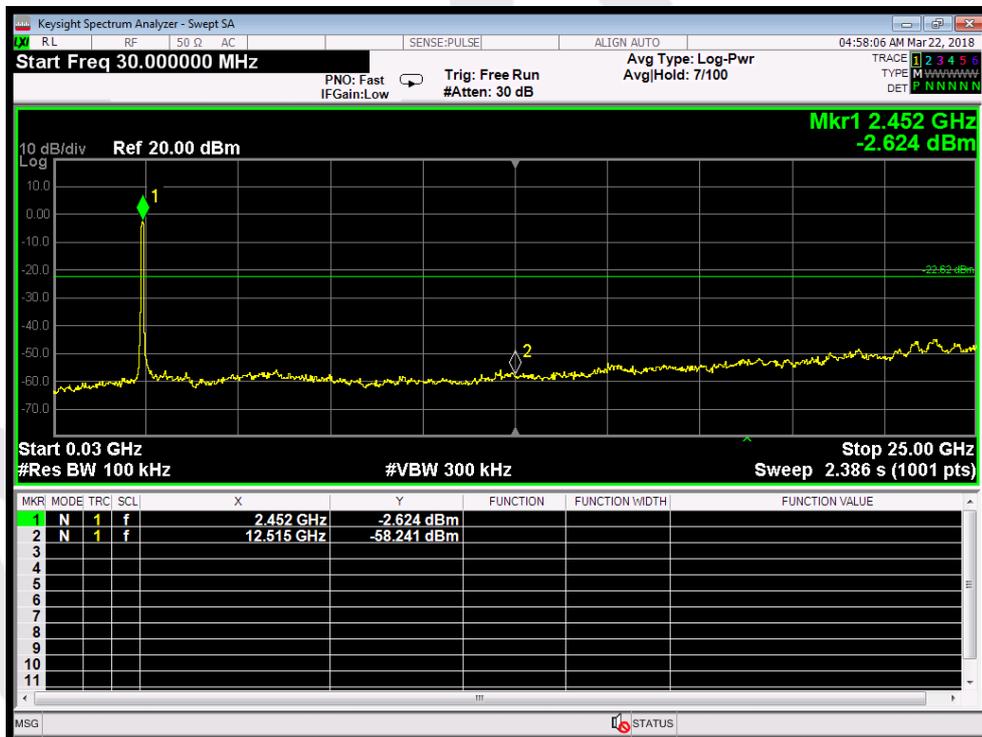


802.11n40 mode : Highest


Ant 2

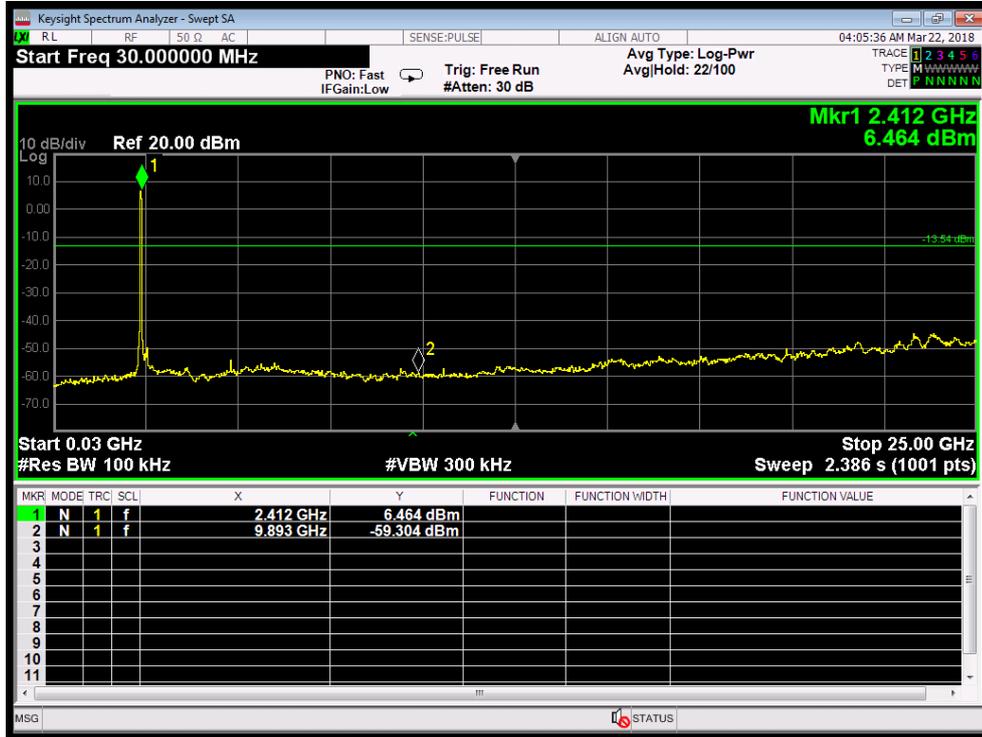


802.11b mode : Lowest

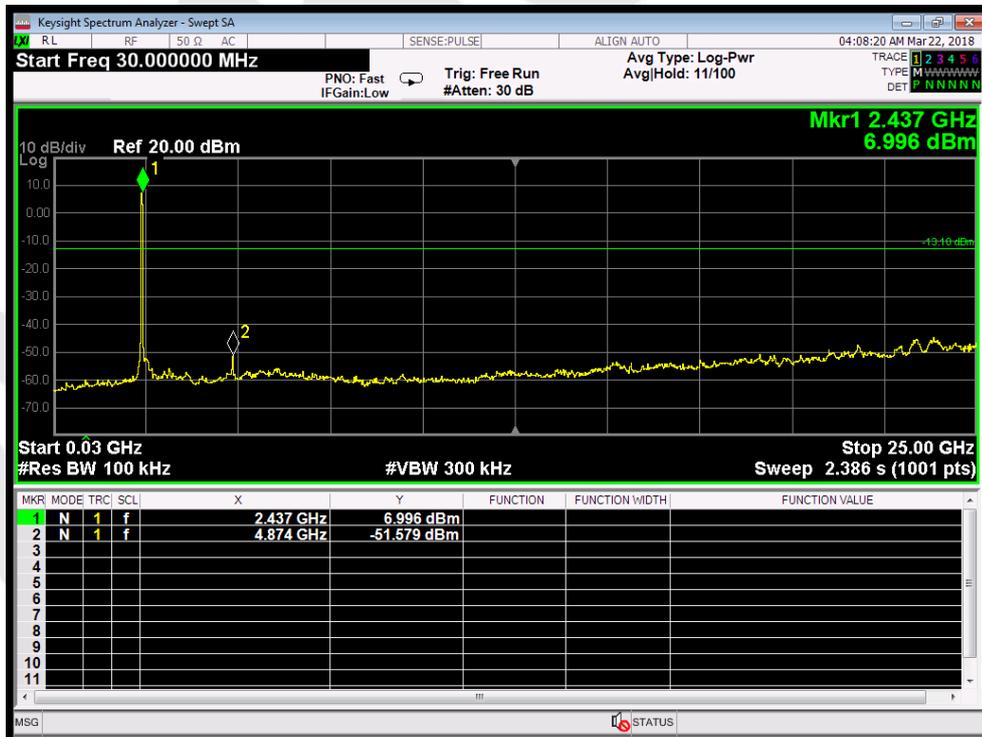


802.11b mode : Middle

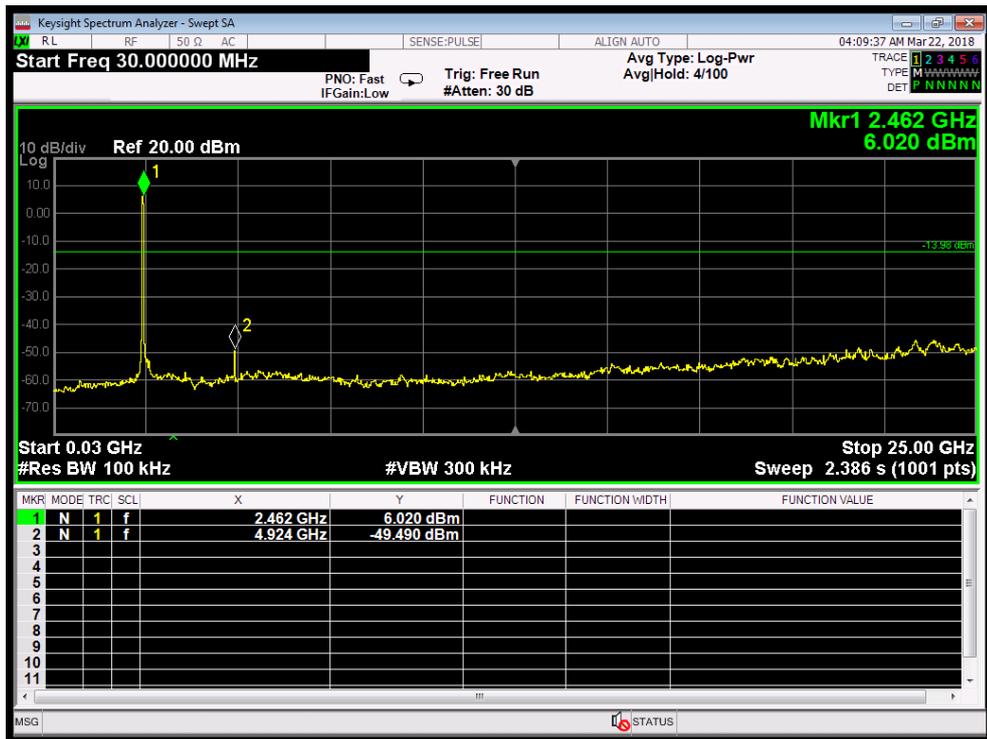


802.11b mode : Highest

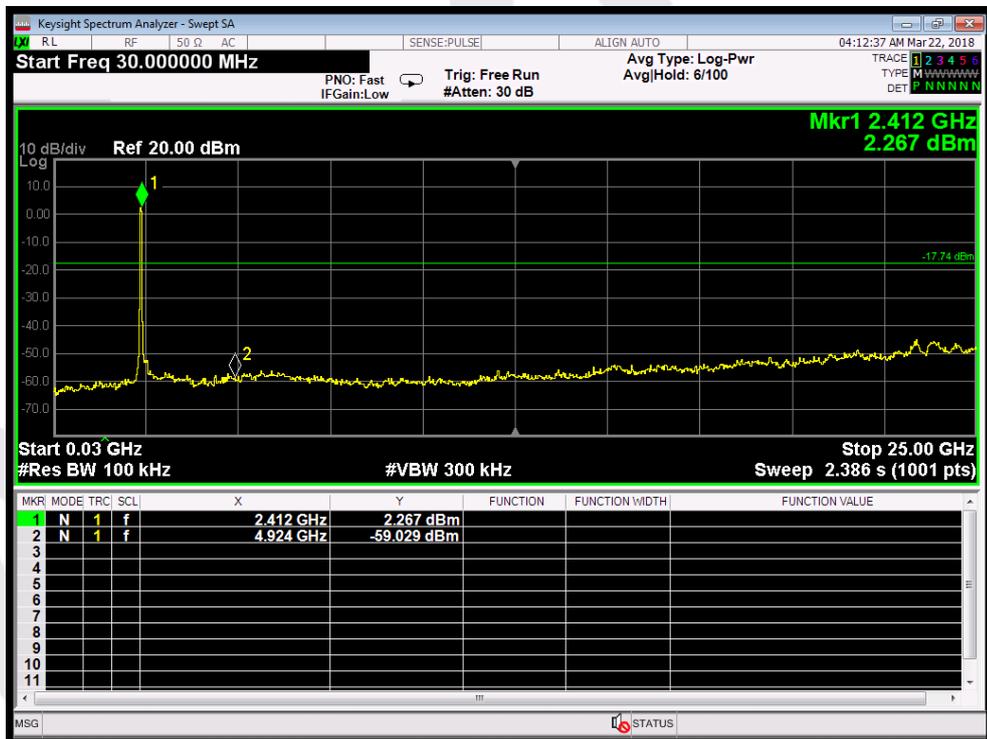


802.11g mode : Lowest

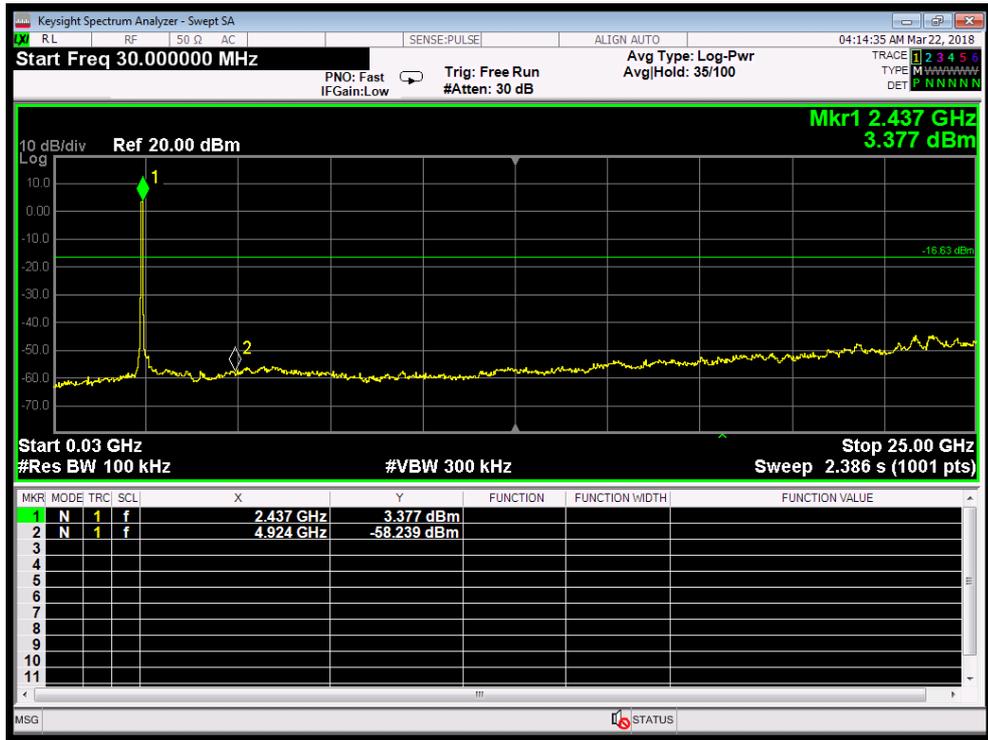


802.11g mode : Middle

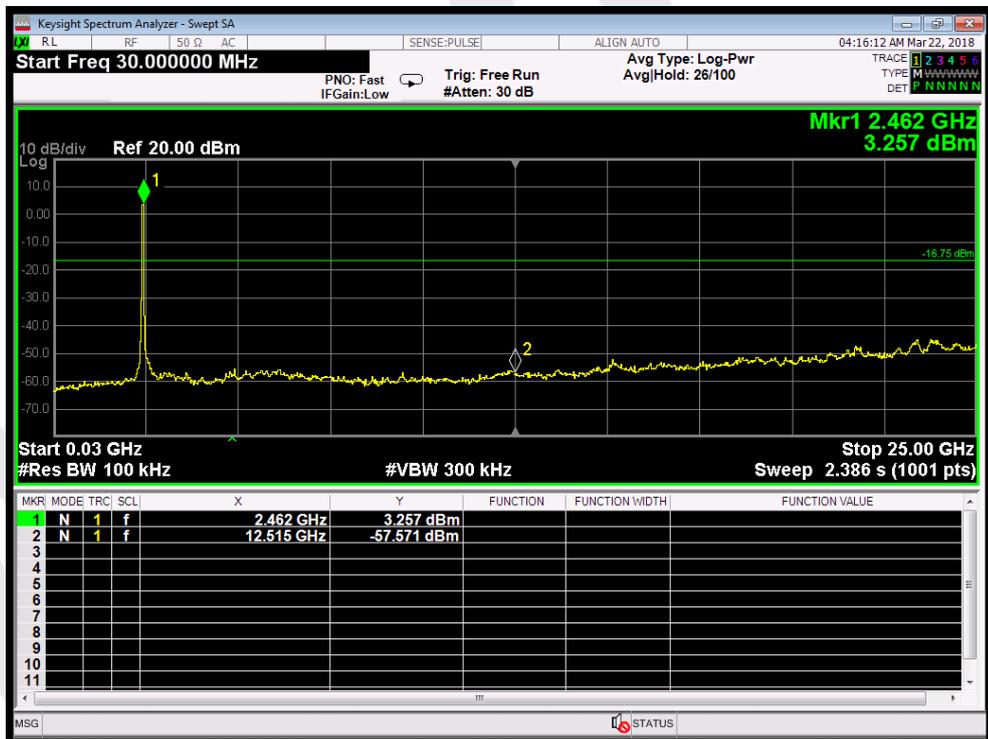


802.11g mode : Highest

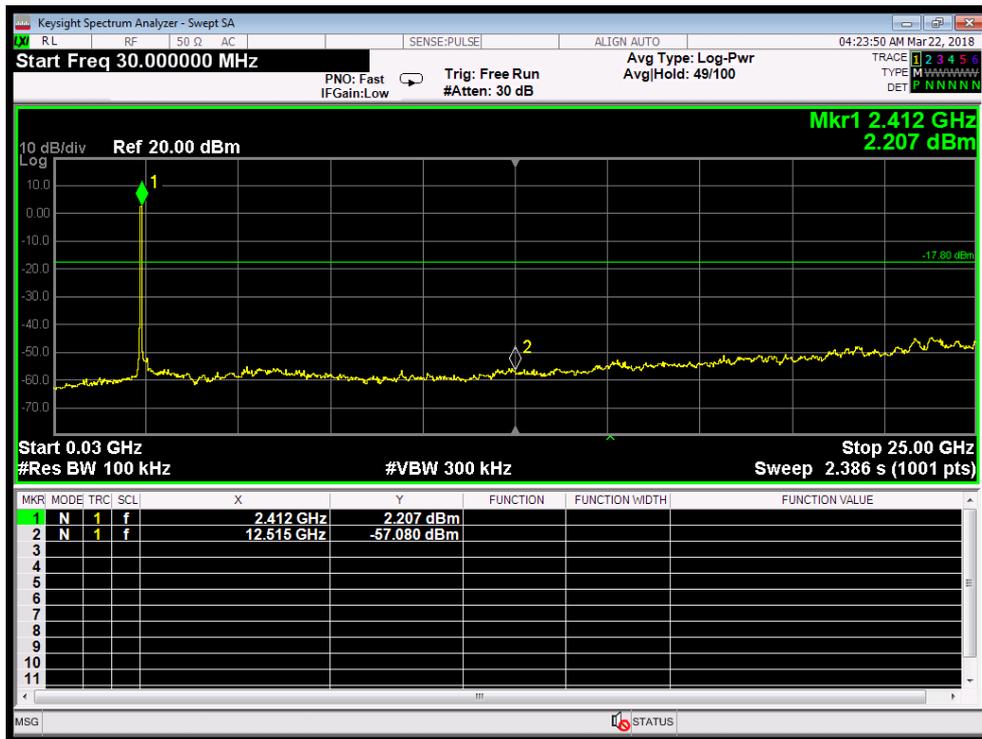


802.11n20 mode : Lowest

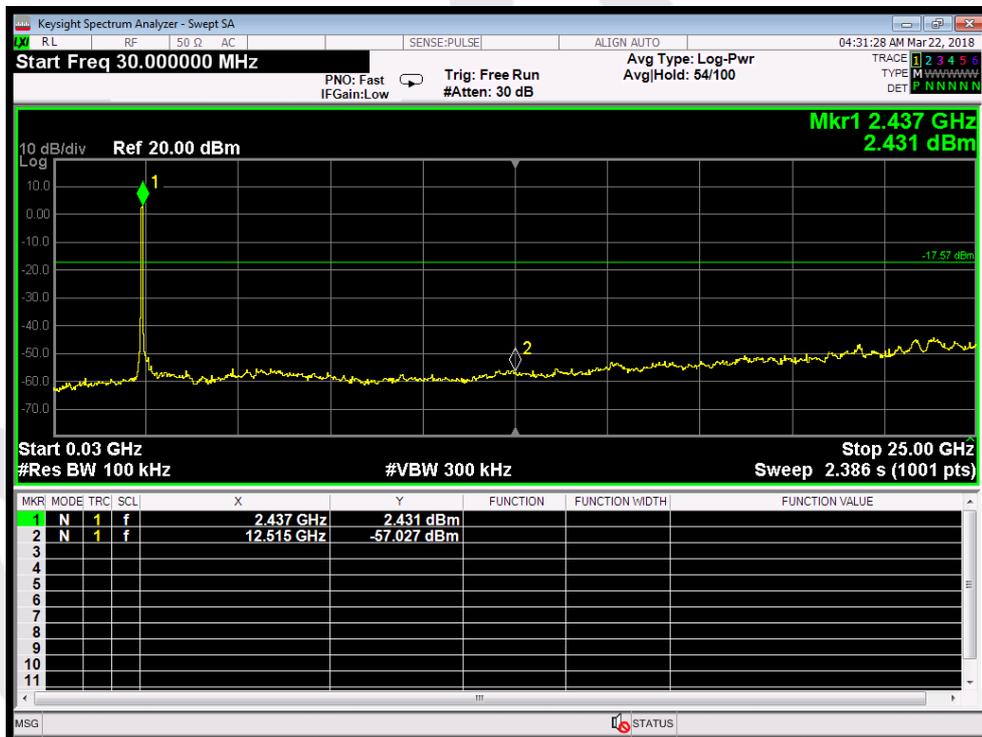


802.11n20 mode : Middle

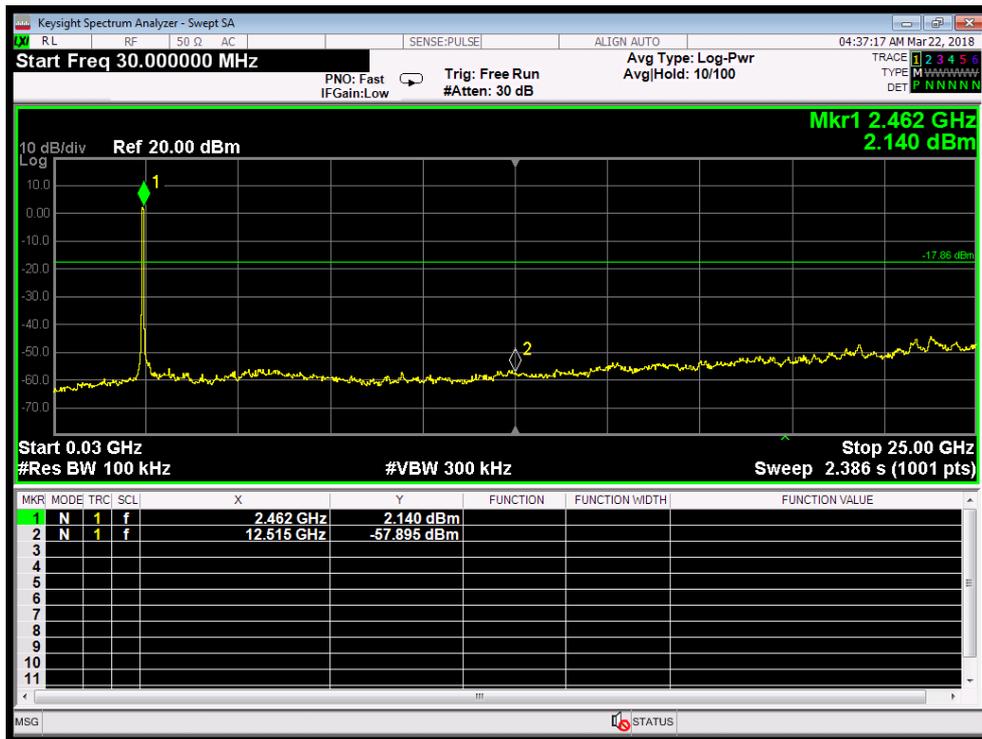


802.11n20 mode : Highest

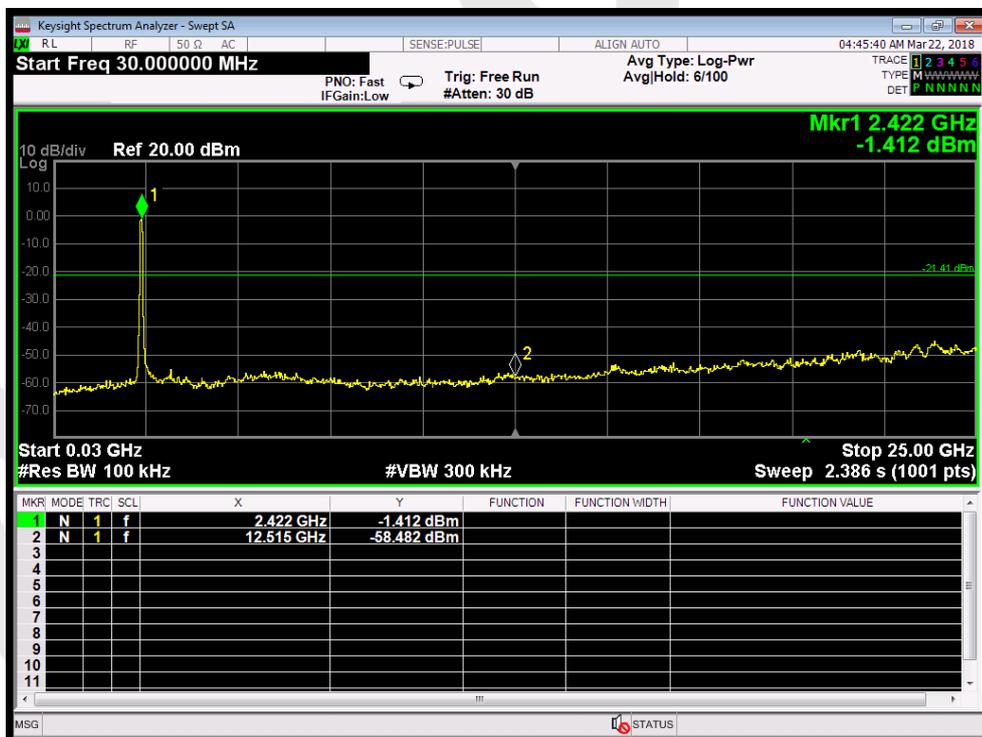

802.11n40 mode : Lowest

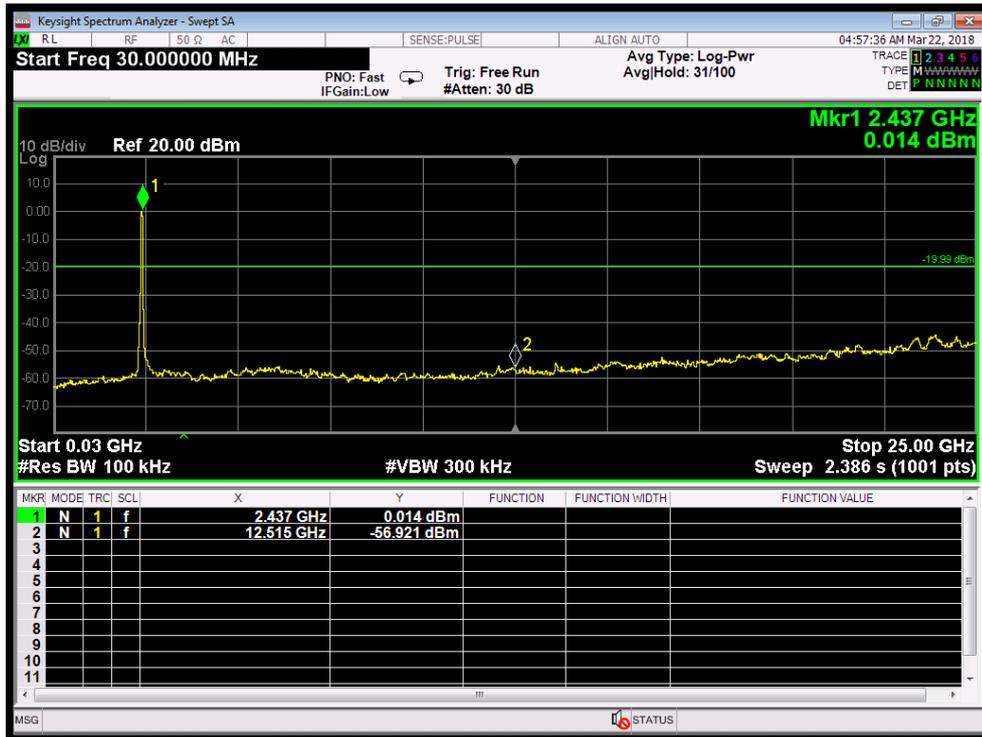

802.11n40 mode : Middle

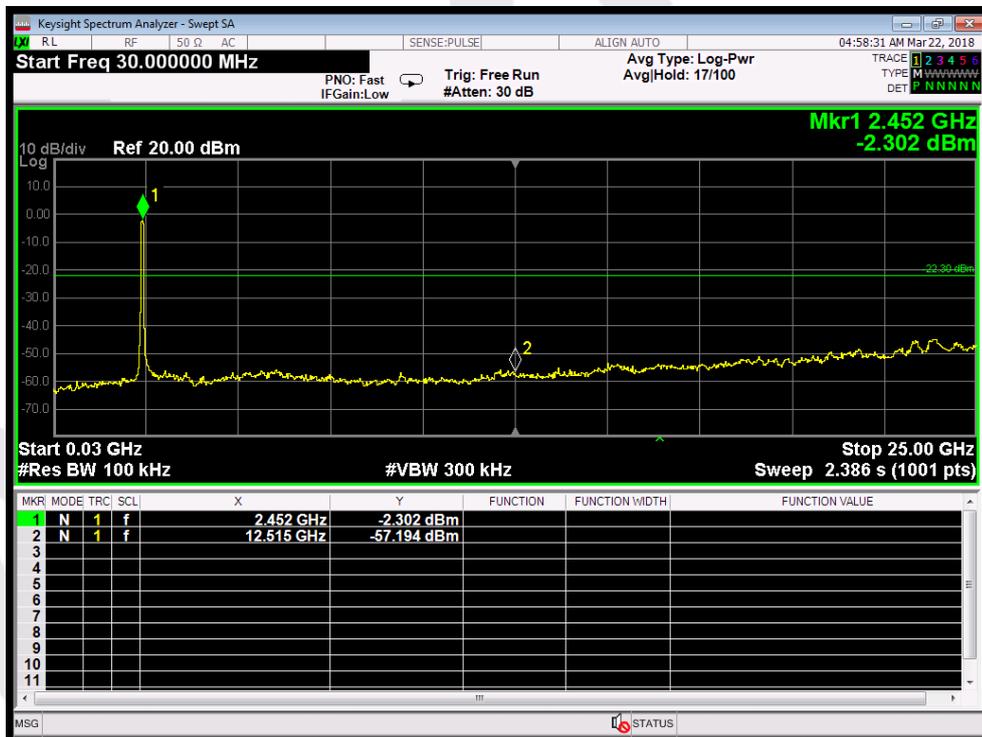

802.11n40 mode : Highest


9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

9.2. Antenna Connected Construction

The WIFI antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 1.5 dBi It complies with the standard requirement.

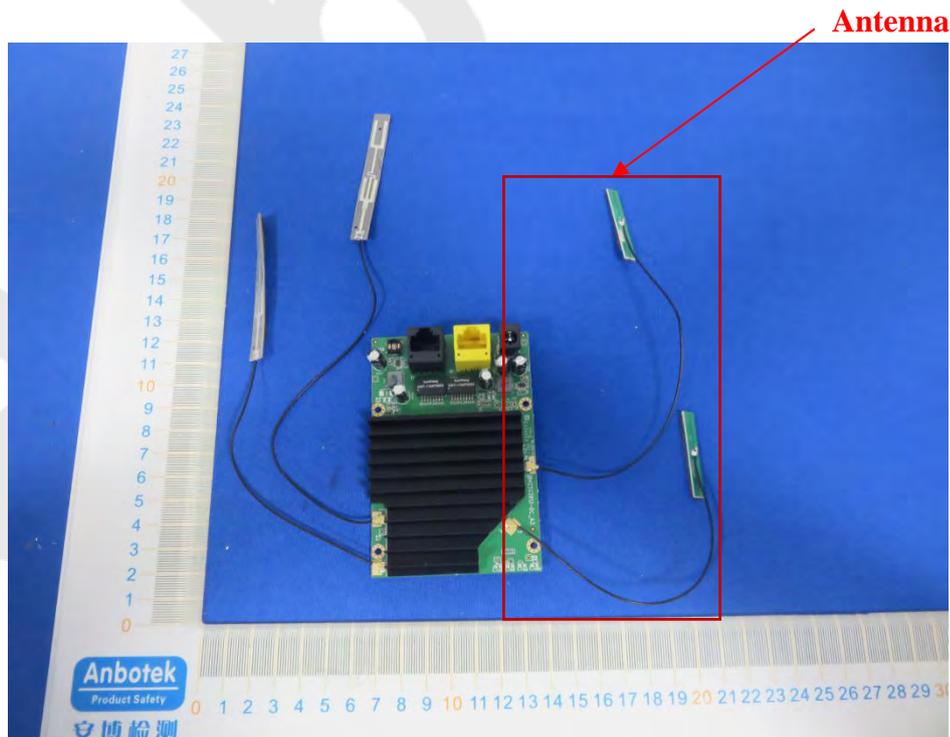

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement




Photo of Radiation Emission Test






Anbotek

APPENDIX II -- EXTERNAL PHOTOGRAPH

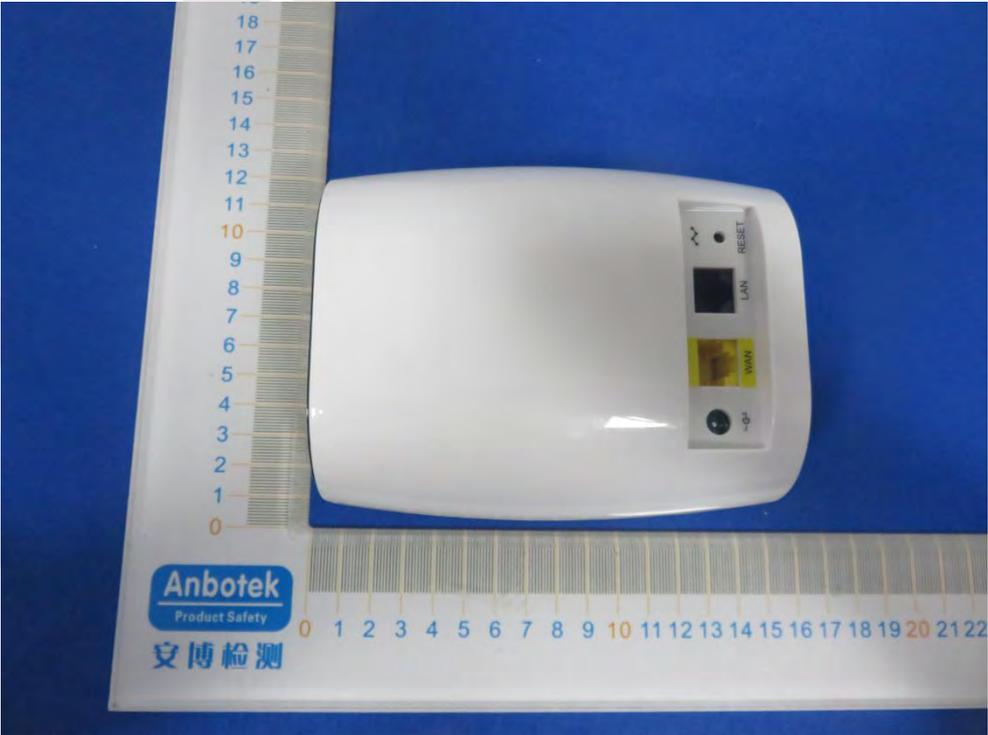

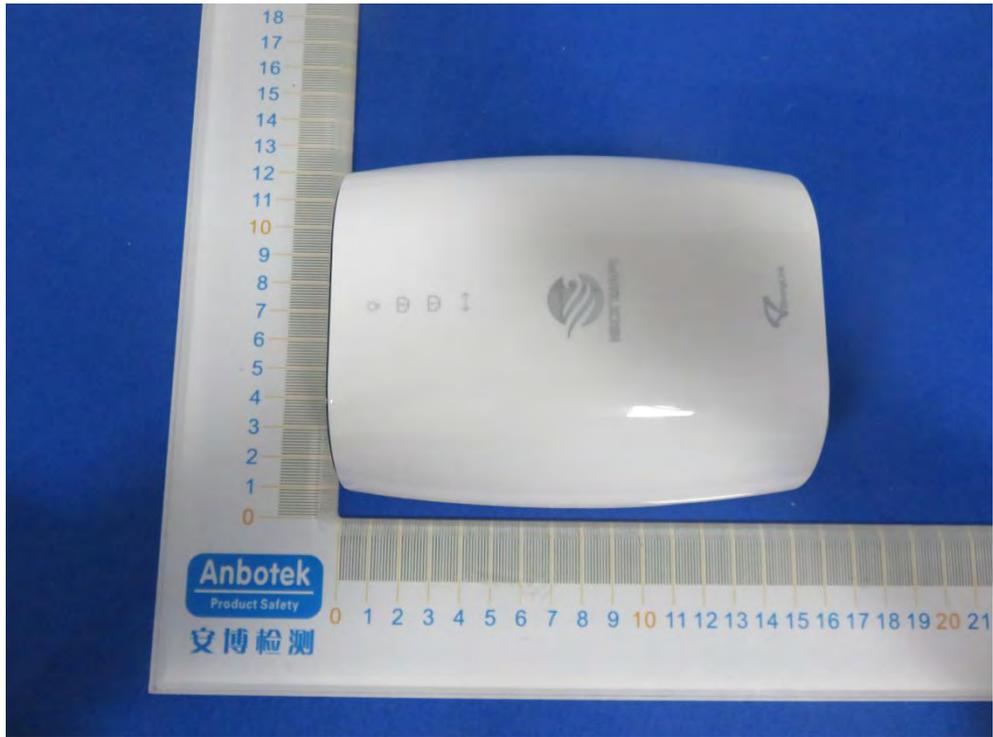










Anbotek

APPENDIX III -- INTERNAL PHOTOGRAPH

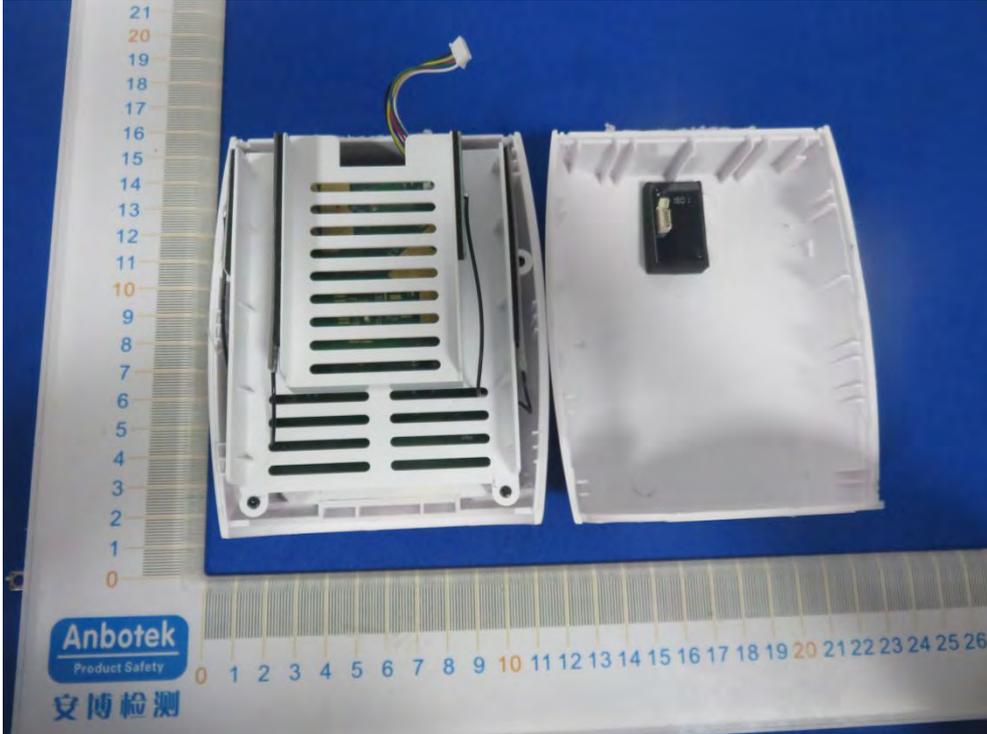

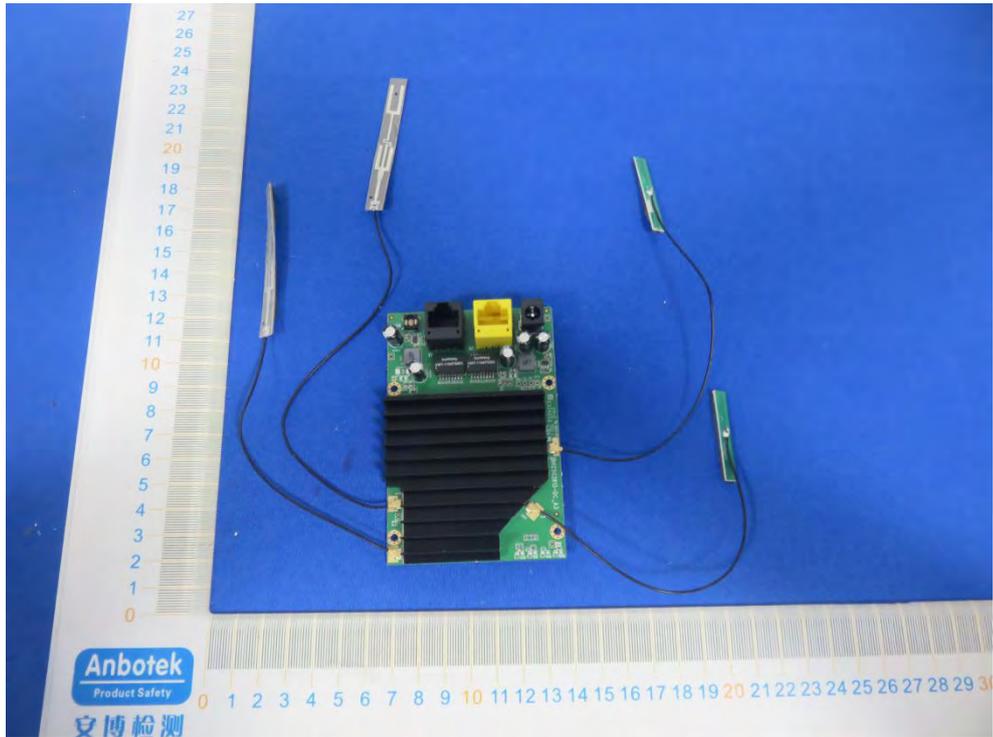

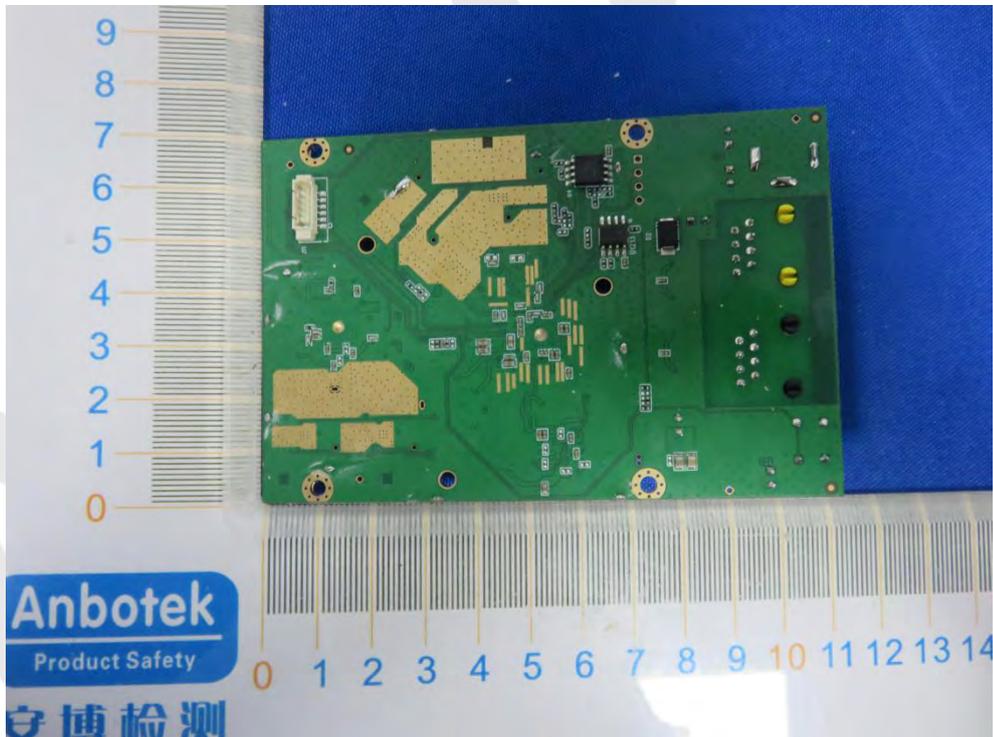

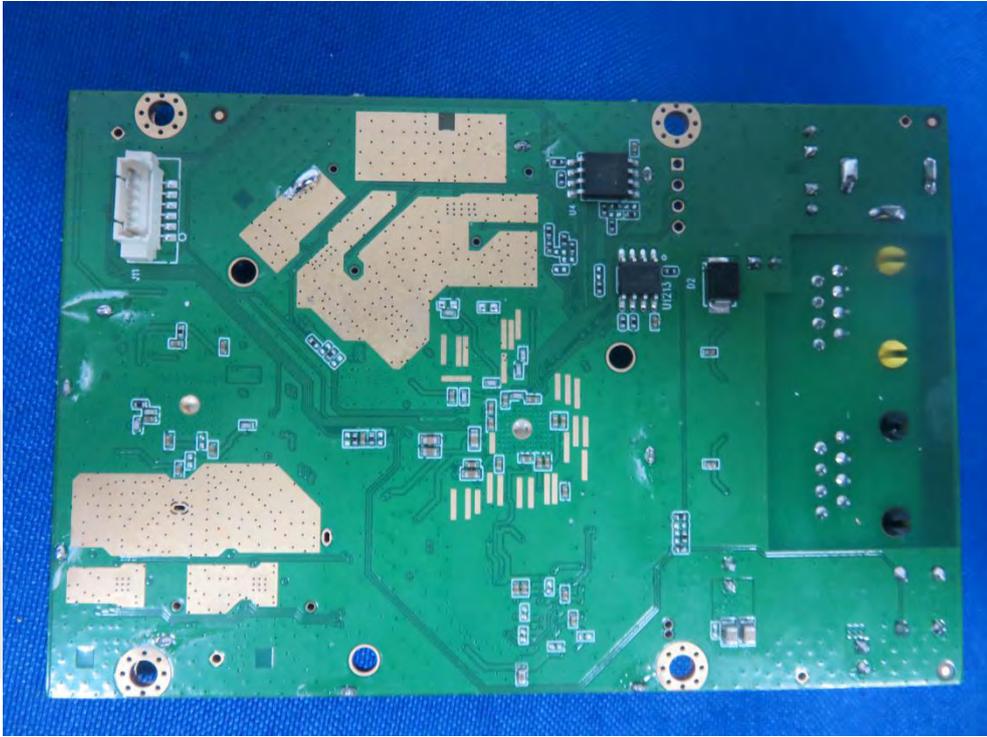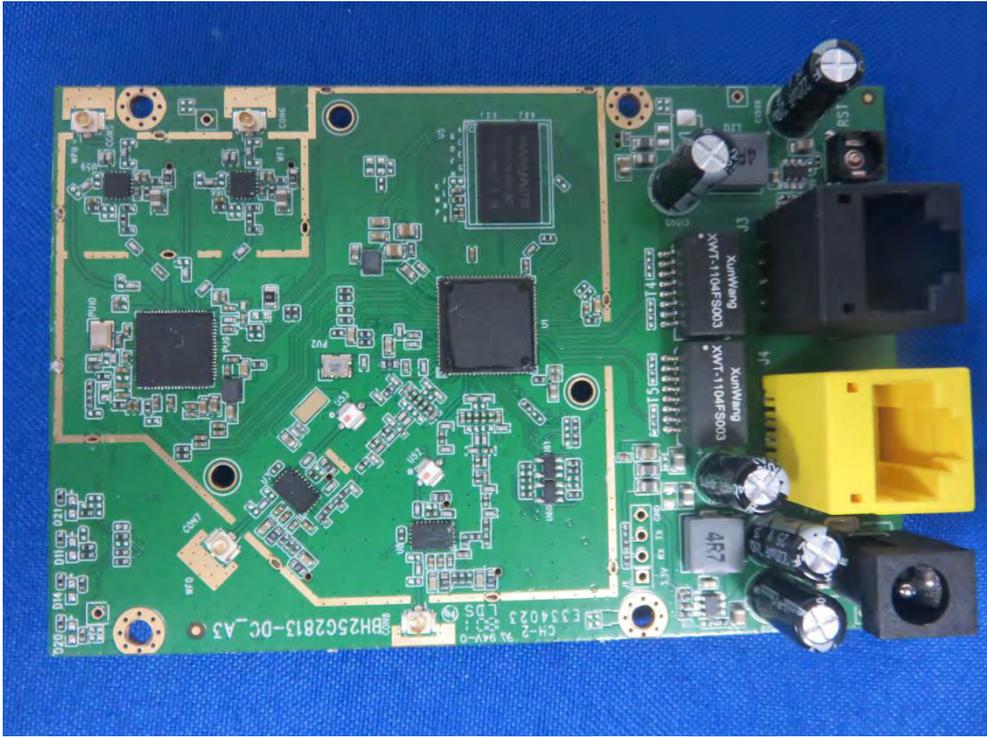



End of Report