



REPORT No. : SZ18060250S01

# TEST REPORT

**APPLICANT** : Entel PCS Telecomunicaciones S.A.  
**PRODUCT NAME** : Smartphone  
**MODEL NAME** : Smart 9  
**BRAND NAME** : ÖWN  
**FCC ID** : 2AO8VSMART9  
**STANDARD(S)** : 47CFR 2.1093  
IEEE 1528-2013  
**TEST DATE** : 2018-06-25 to 2018-07-06  
**ISSUE DATE** : 2018-07-09

Tested by:

*Gan Yueming*  
Gan Yueming(Test engineer)

Approved by:

*Peng Huarui*  
Peng Huarui (Supervisor)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



## DIRECTORY

1. Technical Information .....	5
1.1. Applicant and Manufacturer Information .....	5
1.2. Equipment Under Test (EUT) Description .....	5
1.3. Summary of Maximum SAR Value .....	7
1.4. Photographs of the EUT .....	8
1.5. Applied Reference Documents .....	8
2. RF Exposure Limits .....	9
3. Specific Absorption Rate (SAR) .....	10
3.1. Introduction .....	10
3.2. SAR Definition .....	10
4. SAR Measurement System .....	11
4.1. E-Field Probe .....	12
4.2. Data Acquisition Electronics (DAE) .....	13
4.3. Robot .....	14
4.4. Measurement Server .....	14
4.5. Phantom .....	15
5. Device Holder .....	16
5.1. Data Storage and Evaluation .....	17
6. Measurement Procedures .....	20
6.1. Spatial Peak SAR Evaluation .....	20
6.2. Power Reference Measurement .....	21
6.3. Area Scan .....	21
6.4. Zoom Scan .....	22
6.5. Volume Scan Procedures .....	23
6.6. Power Drift Monitoring .....	23
7. Tissue Simulating Liquids .....	24



<b>8. Uncertainty Assessment .....</b>	<b>26</b>
<b>9. SAR Measurement Evaluation .....</b>	<b>29</b>
<b>9.1. Purpose of System Performance check .....</b>	<b>29</b>
<b>9.2. System Setup .....</b>	<b>29</b>
<b>9.3. Validation Results .....</b>	<b>30</b>
<b>10. RF Exposure Positions .....</b>	<b>32</b>
<b>10.1. Information on the testing .....</b>	<b>32</b>
<b>10.2. Body-worn Configurations .....</b>	<b>33</b>
<b>10.3. Hotspot Mode Exposure Position Conditions .....</b>	<b>34</b>
<b>11. SAR Measurement Procedure .....</b>	<b>35</b>
<b>11.1. General scan Requirements .....</b>	<b>35</b>
<b>11.2. Measurement procedure .....</b>	<b>36</b>
<b>11.3. Description of interpolation/extrapolation scheme .....</b>	<b>36</b>
<b>11.4. Wireless Router .....</b>	<b>37</b>
<b>12. SAR Measurement Evaluation .....</b>	<b>38</b>
<b>13. Measurement of Conducted output power .....</b>	<b>43</b>
<b>14. Hot-Spot Mode Evaluation Procedure .....</b>	<b>59</b>
<b>15. Test Results List .....</b>	<b>60</b>
<b>15.1. Head SAR Evaluation .....</b>	<b>64</b>
<b>15.2. Hotspot SAR Evaluation (Test distance 10mm) .....</b>	<b>66</b>
<b>15.3. Body-worn SAR Evaluation (Test distance 15mm) .....</b>	<b>69</b>
<b>15.4. Extremity SAR Evaluation (Test distance 0mm) .....</b>	<b>71</b>
<b>15.5. Repeated SAR Measurement .....</b>	<b>72</b>
<b>15.6. DUT holder perturbation uncertainty evaluation .....</b>	<b>74</b>
<b>16. Simultaneous Transmission Evaluation .....</b>	<b>75</b>
<b>Annex A General Information</b>	
<b>Annex B Test Setup Photos</b>	
<b>Annex C Plots of System Performance Check</b>	
<b>Annex D Plots of Maximum SAR Test Results</b>	



REPORT No. : SZ18060250S01

**Annex E DASY Calibration Certificate**

Change History		
Issue	Date	Reason for change
1.0	2018-07-09	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Entel PCS Telecomunicaciones S.A.
<b>Applicant Address:</b>	Costanera Sur 2760, Torre C, Piso 18, las condes, Santiago, Chile
<b>Manufacturer:</b>	Shenzhen Tinn Mobile Technology Corp.
<b>Manufacturer Address:</b>	4/F., H-3 Building, OCT Eastern Industrial Park. NO.1 XiangShan East Road., Nan Shan District, Shenzhen, P.R. China.

## 1.2. Equipment Under Test (EUT) Description

<b>EUT Type:</b>	Smartphone
<b>Hardware Version:</b>	V1.0
<b>Software Version:</b>	OWN_SMART_9_8.0
<b>Frequency Bands:</b>	GSM 850: 824.2 MHz ~ 848.8 MHz GSM 1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 7: 2500 MHz ~ 2570 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Modulation Mode:</b>	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK LTE: QPSK/16QAM WLAN 2.4GHz 802.11b: DSSS WLAN 2.4GHz 802.11g/n HT20/HT40: OFDM Bluetooth: GFSK, $\pi/4$ -DQPSK, 8-DPSK
<b>Multi-slot Class:</b>	GPRS: Multi-slot Class 12; EDGE: Multi-slot Class 12;
<b>DTM:</b>	Not support
<b>Hotspot Mode:</b>	Support
<b>Antenna Type:</b>	PIFA antenna
<b>Battery:</b>	3000mAh 3.85V



REPORT No. : SZ18060250S01

<b>SIM Cards Description:</b>	For dual SIM card version, SIM 1 and SIM 2 are the same chipset unit and tested as a single chipset, the SIM 1 is chosen for test		
<b>Max Reported SAR-1g(W/Kg)</b>	Head	0.592W/kg	Limit(W/kg): 1.6W/kg
	Body-worn	1.276W/kg	
	Hotspot	1.280W/kg	

For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



### 1.3. Summary of Maximum SAR Value

Frequency Band		Highest SAR Summary		
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Hotspot (Separation 10mm)
		1g SAR (W/kg)		
GSM	GSM850	0.354	0.281	0.316
	GSM1900	0.378	0.753	1.280
WCDMA	WCDMA Band II	0.442	1.202	1.208
	WCDMA Band IV	0.543	0.856	1.200
	WCDMA Band V	0.249	0.306	0.360
LTE	LTE Band 2	0.456	1.276	0.898
	LTE Band 4	0.313	0.405	0.818
	LTE Band 7	0.340	0.314	1.033
WLAN	2.4GHz WLAN	0.592	0.113	0.257
BT	Bluetooth	N/A	N/A	N/A
Highest Simultaneous Transmission		0.910	1.389	1.398

**Note:**

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



## 1.4. Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

## 1.5. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	<b>47 CFR§2.1093</b>	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	<b>IEEE 1528-2013</b>	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	<b>KDB 447498 D01v06</b>	General RF Exposure Guidance
4	<b>KDB 248227 D01v02r02</b>	SAR Measurement Procedures for 802.11 Transmitters
5	<b>KDB 865664 D01v01r04</b>	SAR Measurement 100 MHz to 6 GHz
6	<b>KDB 865664 D02v01r02</b>	RF Exposure Reporting
7	<b>KDB 648474 D04v01r03</b>	Handset SAR
8	<b>KDB 941225 D01v03r01</b>	3G SAR MEAUREMENT PROCEDURES
9	<b>KDB 941225 D05v02r05</b>	SAR Evaluation Consideration for LTE Devices
10	<b>KDB 941225 D06v02r01</b>	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities



## 2. RF Exposure Limits

### Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Uncontrolled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## 3. Specific Absorption Rate (SAR)

### 3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are Middle than the limits for general population/uncontrolled.

### 3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left( \frac{\delta T}{\delta t} \right)$$


Where C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and  $|E|$  is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4. SAR Measurement System

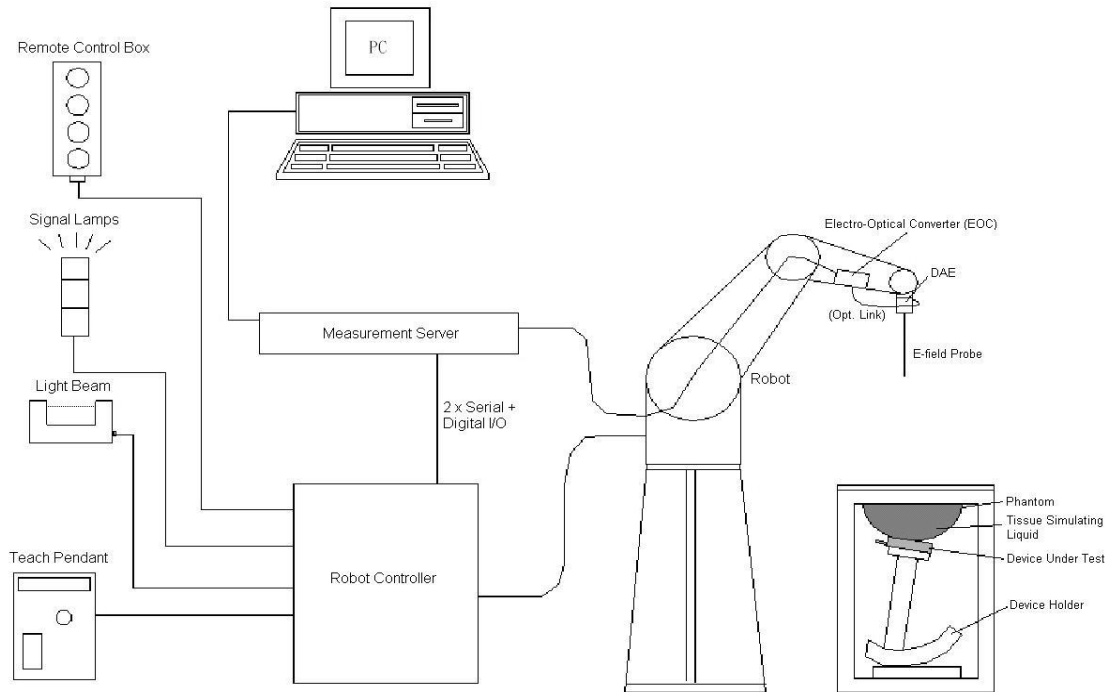

**Fig 4.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

A standard high precision 6-axis robot with controller, a teach pendant and software

A data acquisition electronic (DAE) attached to the robot arm extension

A dosimetric probe equipped with an optical surface detector system

The electro-optical converter (ECO) performs the conversion between optical and electrical signals

A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

A probe alignment unit which improves the accuracy of the probe positioning

A computer operating Windows XP

DASY software

Remove control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM twin phantom

A device holder

Tissue simulating liquid

Dipole for evaluating the proper functioning of the system


Some of the components are described in details in the following sub-sections.

## 4.1. E-Field Probe


The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### E-Field Probe Specification

#### <ET3DV6 Probe >

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <b>Fig 4.2 Photo of ES3DV3</b>
<b>Frequency</b>	10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

#### <EX3DV4 Probe>

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <b>Fig 4.3 Photo of EX3DV4</b>
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

## E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## 4.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 4.4**Photo of DAE

### 4.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability  $\pm 0.035$  mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 4.5 Photo of DASY5

### 4.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium;

DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 4.6 Photo of Server for DASY5

## 4.5. Phantom

### <SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



**Fig 4.7Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.



## 5. Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Fig 5.1 Device Holder**



### <Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

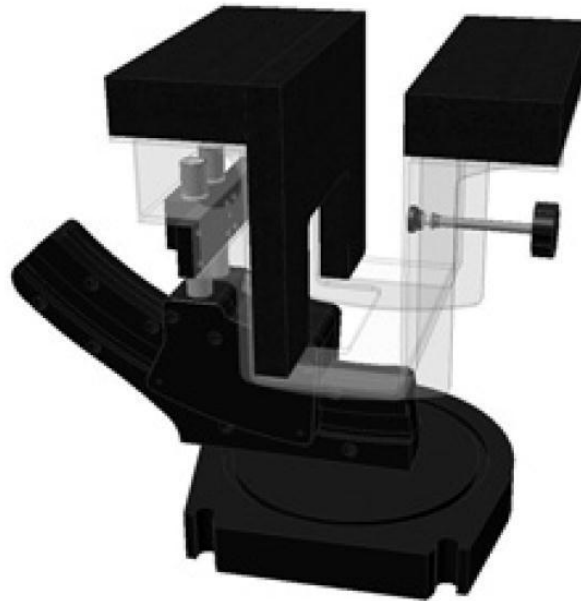


Fig 5.2 Laptop Extension Kit

## 5.1. Data Storage and Evaluation

### Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

**Data Evaluation**

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

<b>Probe parameters:</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcpi
<b>Device parameters:</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters:</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcpi}$$

With  
 $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcpi = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2}f^2}{f}$$



With  $V_i$  = compensated signal of channel  $i$ , ( $i = x, y, z$ )  
Norm $_i$  = sensor sensitivity of channel  $i$ , ( $i = x, y, z$ ),  $\mu V/(V/m)^2$  for E-field  
Probes ConvF = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel  $i$  in V/m  
 $H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $g/cm^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

## 6. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band

Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 6.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value. The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## 6.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 6.3. Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

## 6.4.Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				



## 6.5. Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.


## 6.6. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 5.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 5.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

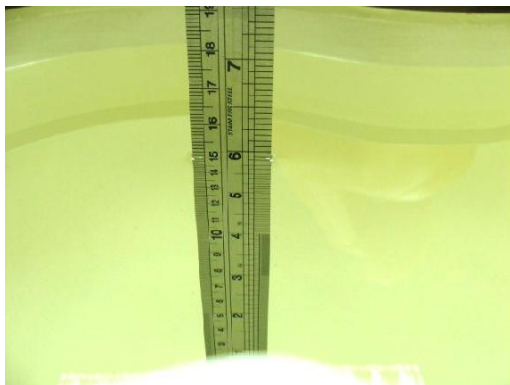

**Fig 7.1 Photo of Liquid Height for Head SAR**



**Fig 7.2 Photo of Liquid Height for Body SAR**

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%





Note: Please refer to the validation results for dielectric parameters of each frequency band.

The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

**Table 1: Dielectric Performance of Tissue Simulating Liquid**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Conductivity Target ( $\sigma$ )	Delta ( $\sigma$ ) (%)	Limit (%)	Date
835	HSL	22.6	0.910	0.90	1.11	±5	2018.07.05
1800	HSL	22.2	1.443	1.40	3.07	±5	2018.07.03
1900	HSL	22.5	1.450	1.40	3.57	±5	2018.07.03
2450	HSL	22.6	1.810	1.80	0.56	±5	2018.07.04
2600	HSL	22.8	2.038	1.96	3.98	±5	2018.07.04
835	MSL	22.7	0.945	0.97	-2.58	±5	2018.07.06
1800	MSL	22.9	1.537	1.52	1.12	±5	2018.07.06
1900	MSL	22.1	1.531	1.52	0.72	±5	2018.07.02
2450	MSL	22.5	2.037	1.95	4.46	±5	2018.07.06
2600	MSL	22.3	2.178	2.16	0.83	±5	2018.06.25

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Permittivity ( $\epsilon_r$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	HSL	22.6	40.800	41.50	-1.69	±5	2018.07.05
1800	HSL	22.2	41.320	40.00	3.30	±5	2018.07.03
1900	HSL	22.5	40.889	40.00	2.22	±5	2018.07.03
2450	HSL	22.6	40.022	39.20	2.10	±5	2018.07.04
2600	HSL	22.8	39.187	39.00	0.48	±5	2018.07.04
835	MSL	22.7	54.342	55.20	-1.55	±5	2018.07.06
1800	MSL	22.9	53.911	53.30	1.15	±5	2018.07.06
1900	MSL	22.1	52.395	53.30	-1.70	±5	2018.07.02
2450	MSL	22.5	50.607	52.70	-3.97	±5	2018.07.06
2600	MSL	22.3	50.724	52.50	-3.38	±5	2018.06.25

## 8. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 8.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which



corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						11.4%	11.4%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						22.9%	22.7%



REPORT No. : SZ18060250S01

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.55	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	0.089	0.089
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						12.5%	12.5%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						25.1 %	25.1%

## 9. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 9.1. Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 9.2. System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

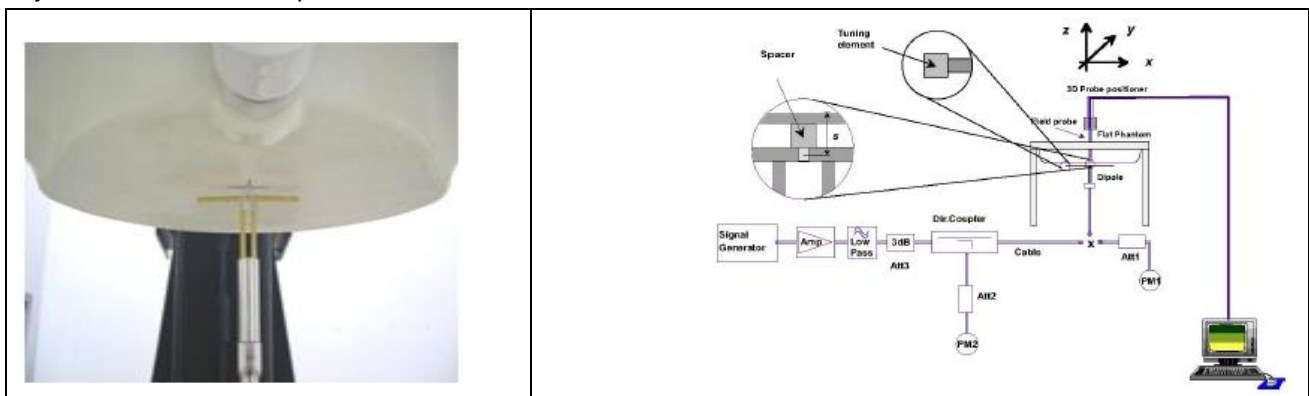


Fig 9.1 Photo of Dipole Setup

Fig 9.2 System Setup for System Evaluation

### 9.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

#### <Validation Setup>

Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N
835	HSL	250	D835V2-4d227	SN3154	480
1800	HSL	250	D1800V2-2d158	SN3154	480
1900	HSL	250	D1900V2_5d221	SN3154	480
2450	HSL	250	D2450V2-805	SN3154	480
2600	HSL	250	D2600V2-1139	SN3154	480
835	MSL	250	D835V2-4d227	SN3154	480
1800	MSL	250	D1800V2-2d158	SN3154	480
1900	MSL	250	D1900V2_5d221	SN3154	480
2450	MSL	250	D2450V2-805	SN3154	480
2600	MSL	250	D2600V2-1139	SN3154	480

#### <1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018.07.05	835	HSL	250	2.41	9.46	9.64	1.90
2018.07.03	1800	HSL	250	10.10	39.20	40.4	3.06
2018.07.03	1900	HSL	250	10.20	39.30	40.8	3.82
2018.07.04	2450	HSL	250	13.10	52.50	52.4	-0.19
2018.07.04	2600	HSL	250	13.50	53.30	54	1.31
2018.07.06	835	MSL	250	2.38	9.56	9.52	-0.42
2018.07.06	1800	MSL	250	10.30	39.60	41.2	4.04
2018.07.02	1900	MSL	250	9.92	40.40	39.68	-1.78
2018.07.06	2450	MSL	250	13.20	52.50	52.8	0.57
2018.06.25	2600	MSL	250	13.26	50.80	53.04	4.41



## &lt;10g SAR&gt;

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018.07.05	835	HSL	250	1.52	6.11	6.08	-0.49
2018.07.03	1800	HSL	250	5.30	20.50	21.2	3.41
2018.07.03	1900	HSL	250	5.33	20.50	21.32	4.00
2018.07.04	2450	HSL	250	6.05	24.70	24.2	-2.02
2018.07.04	2600	HSL	250	5.96	24.40	23.84	-2.30
2018.07.06	835	MSL	250	1.55	6.28	6.2	-1.27
2018.07.06	1800	MSL	250	5.35	21.00	21.4	1.90
2018.07.02	1900	MSL	250	5.50	21.30	22	3.29
2018.07.06	2450	MSL	250	6.17	24.50	24.68	0.73
2018.06.25	2600	MSL	250	5.96	22.90	23.84	4.10

Note: System checks the specific test data please see Annex C

## 10. RF Exposure Positions

### 10.1. Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

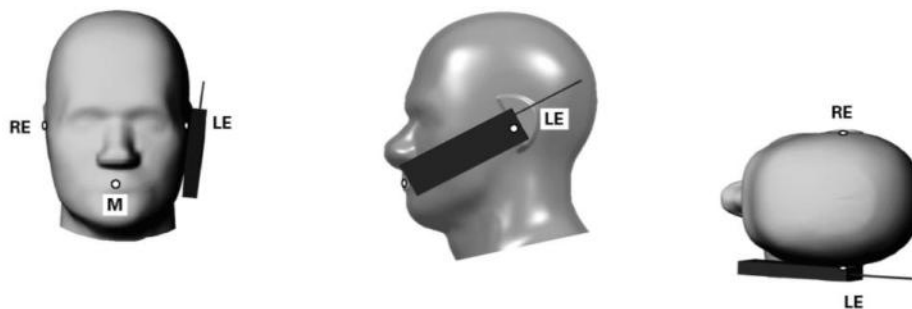


Fig 10.1 Illustration for Cheek Position

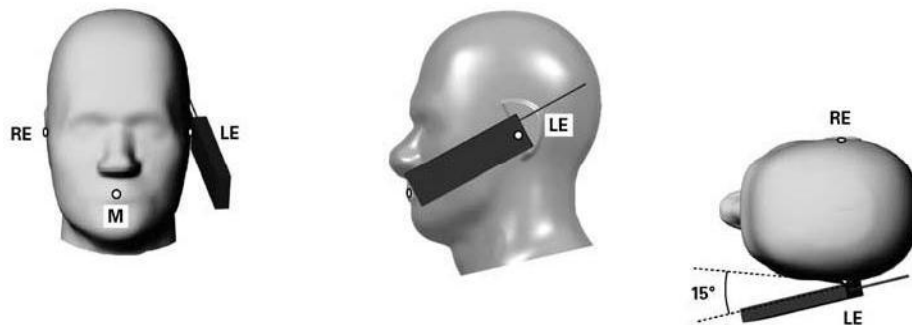


Fig 10.2 Illustration for Tilted Position

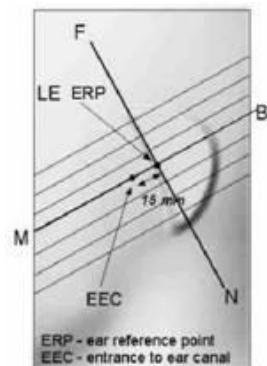


Fig 10.3 Close-up side view of phantom showing the ear region.

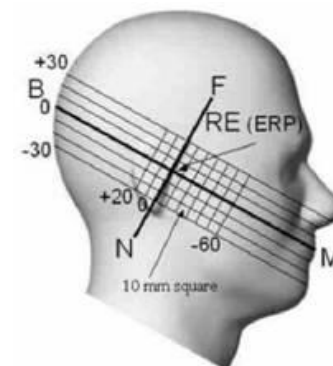


Fig 10.4 Side view of the phantom showing relevant markings and seven cross-sectional plane locations



Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

## 10.2. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.


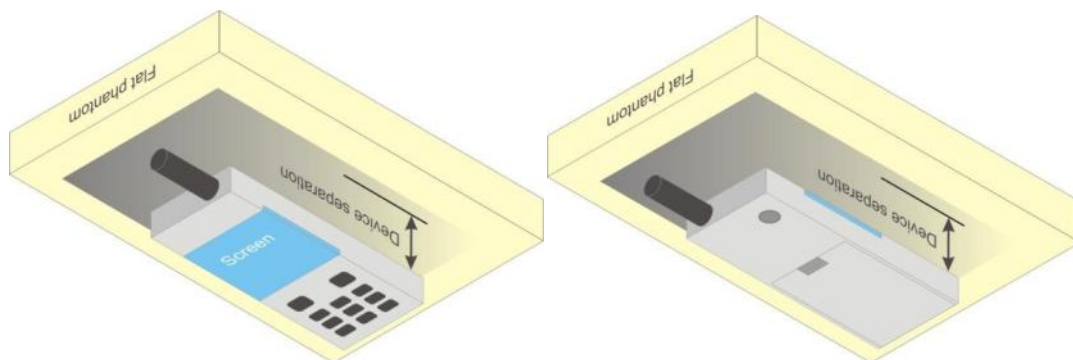


Fig 10.3 Illustration for Body Worn Position

### 10.3. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

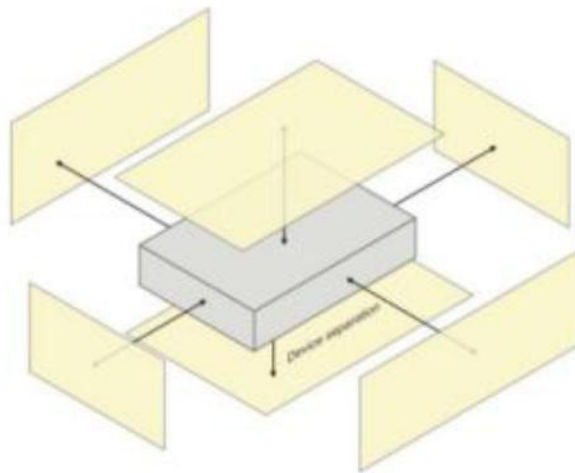

**Fig 10.4 Illustration for Hotspot Position**

# 11. SAR Measurement Procedure

## 11.1. General scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{4} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$			$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

## 11.2. Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

## 11.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.



## 11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 12. SAR Measurement Evaluation

### <GSM Mode>

A summary of these settings are illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5)

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

### <WCDMA Mode>

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2Kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the



power reduction triggered.

### HSDPA Setup Configuration:

Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 \cdot \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 \cdot \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 \cdot \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

### HSUPA Setup Configuration:

Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{EC}$	$\beta_{ED}$ (Note 4) (Note 5)	$\beta_{ED}$ (SF)	$\beta_{ED}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/2 25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ED1}$ : 47/15 $\beta_{ED2}$ : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 \cdot \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{HS} = 5/15 \cdot \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{ED}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ED}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could result in slightly smaller MPR values.

### HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	$\beta_c$ (Note 3)	$\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{EC}$	$\beta_{ED}$ (2xSF2) (Note 4)	$\beta_{ED}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ED1}$ : 30/15 $\beta_{ED2}$ : 30/15	$\beta_{ED3}$ : 24/15 $\beta_{ED4}$ : 24/15	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 \cdot \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ED}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.



## &lt;LTE Mode&gt;

**LTE Target MPR level**

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR	3GPP
	1.4	3.0	5	10	15	20	Target	MPR
	MHz	MHz	MHz	MHz	MHz	MHz	(dB)	(dB)
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

**Note:** The measurement result showed some difference from the target MPR level, due to expected 0.5dB measurement tolerance

**LTE Bands**

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4	3.0	5	10	15	20
	MHz	MHz	MHz	MHz	MHz	MHz
2	v	v	v	v	v	v
4	v	v	v	v	v	v
7	N/A	N/A	v	v	v	v

**Note:**

- Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
- Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
- Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is > not ½ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.





7. For LTE B4 / B5 / B12 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 17 / 2 SAR test was covered by Band 12 / 25; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAM signal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. A fixed level power reduction is applied for LTE Band 7 when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.

#### <WLAN 2.4GHz>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
  - 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
  - 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.
3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required.



Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.

4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
5. A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.

#### <WLAN 5GHz>

1. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
2. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

During SAR testing the WLAN transmission was verified using a spectrum analyzer



## 13. Measurement of Conducted output power

<GSM Mode>

### Full Power

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.99	33.74	34.07	34.50	24.99	24.74	25.07	25.50
GPRS 1 Tx slot	32.97	32.65	32.65	34.00	23.97	23.65	23.65	25.00
GPRS 2 Tx slots	31.67	31.60	31.64	32.00	25.67	25.60	25.64	26.00
GPRS 3 Tx slots	29.35	29.24	28.96	30.00	25.09	24.98	24.70	25.74
GPRS 4 Tx slots	27.07	26.78	26.73	28.00	24.07	23.78	23.73	25.00
EDGE 1 Tx slot	29.35	29.19	29.29	30.00	20.35	20.19	20.29	21.00
EDGE 2 Tx slots	27.14	26.91	27.01	28.00	21.14	20.91	21.01	22.00
EDGE 3 Tx slots	26.47	26.44	26.44	27.00	22.21	22.18	22.18	22.74
EDGE 4 Tx slots	24.44	24.13	24.36	25.00	21.44	21.13	21.36	22.00

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.78	31.15	31.41	31.50	20.78	22.15	22.41	22.50
GPRS 1 Tx slot	29.11	29.24	29.28	30.50	20.11	20.24	20.28	21.50
GPRS 2 Tx slots	27.47	27.79	27.85	28.50	21.47	21.79	21.85	22.50
GPRS 3 Tx slots	25.36	25.89	26.00	27.00	21.10	21.63	21.74	22.74
GPRS 4 Tx slots	23.53	23.93	24.20	25.00	20.53	20.93	21.20	22.00
EDGE 1 Tx slot	27.56	27.92	27.95	29.50	18.56	18.92	18.95	20.50
EDGE 2 Tx slots	25.59	26.04	26.20	27.00	19.59	20.04	20.20	21.00
EDGE 3 Tx slots	24.42	25.04	25.27	26.00	20.16	20.78	21.01	21.74
EDGE 4 Tx slots	22.49	22.92	23.19	24.00	19.49	19.92	20.19	21.00

**Power Reduction**

GSM1900	Burst Average Power (dBm)			Tune-up	Frame-Average Power (dBm)			Tune-up
TX Channel	512	661	810	Limit	512	661	810	Limit
Frequency (MHz)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8	(dBm)
GSM 1 Tx slot	27.78	29.15	29.41	29.50	18.78	20.15	20.41	20.50
GPRS 1 Tx slot	27.11	27.24	27.28	28.50	18.11	18.24	18.28	19.50
GPRS 2 Tx slots	25.47	25.79	25.85	26.50	19.47	19.79	19.85	20.50
GPRS 3 Tx slots	23.36	23.89	24.00	25.00	19.10	19.63	19.74	20.74
GPRS 4 Tx slots	21.53	21.93	22.20	23.00	18.53	18.93	19.20	20.00
EDGE 1 Tx slot	25.56	25.92	25.95	27.50	16.56	16.92	16.95	18.50
EDGE 2 Tx slots	23.59	24.04	24.20	25.00	17.59	18.04	18.20	19.00
EDGE 3 Tx slots	22.42	23.04	23.27	24.00	18.16	18.78	19.01	19.74
EDGE 4 Tx slots	20.49	20.92	21.19	22.00	17.49	17.92	18.19	19.00

Note: It will reduce about 2dBm when the hotspot function is on and be used for hotspot measurement.

**Timeslot consignations:**

No. of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB



REPORT No. : SZ18060250S01

<WCDMA Mode>

**Full Power**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	RMC 12.2Kbps	23.87	23.73	23.82	24.80	23.37	23.24	23.26	24.80
3GPP Rel 6	HSDPA Subtest-1	23.07	22.94	23.16	23.50	22.31	22.44	22.46	23.00
3GPP Rel 6	HSDPA Subtest-2	23.04	22.98	23.19	23.50	22.33	22.40	22.51	23.00
3GPP Rel 6	HSDPA Subtest-3	22.54	22.50	22.66	23.00	21.92	21.91	21.98	22.50
3GPP Rel 6	HSDPA Subtest-4	22.52	22.49	22.63	23.00	21.90	21.89	21.97	22.50
3GPP Rel 6	HSUPA Subtest-1	22.94	22.86	23.07	23.50	22.34	22.39	22.50	23.00
3GPP Rel 6	HSUPA Subtest-2	20.91	20.90	21.07	21.50	20.41	20.38	20.49	21.00
3GPP Rel 6	HSUPA Subtest-3	21.96	21.87	22.08	22.50	21.42	21.37	21.50	22.00
3GPP Rel 6	HSUPA Subtest-4	20.96	20.86	21.10	21.50	20.43	20.40	20.53	21.00
3GPP Rel 6	HSUPA Subtest-5	22.94	22.88	23.10	23.50	22.44	22.39	22.49	23.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	22.09	22.98	21.77	23.00	21.05	21.30	21.47	22.00

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.36	23.42	23.41	24.80
3GPP Rel 6	HSDPA Subtest-1	22.41	22.47	22.49	23.00
3GPP Rel 6	HSDPA Subtest-2	22.42	22.48	22.52	23.00
3GPP Rel 6	HSDPA Subtest-3	21.89	21.96	22.01	22.50
3GPP Rel 6	HSDPA Subtest-4	21.93	21.96	21.97	22.50
3GPP Rel 6	HSUPA Subtest-1	22.45	22.51	22.51	23.00
3GPP Rel 6	HSUPA Subtest-2	20.44	20.47	20.49	21.00
3GPP Rel 6	HSUPA Subtest-3	21.44	21.52	21.50	22.00
3GPP Rel 6	HSUPA Subtest-4	20.41	20.49	20.52	21.00
3GPP Rel 6	HSUPA Subtest-5	22.46	22.49	22.48	23.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	21.33	21.45	20.97	22.00

**Power Reduction**

Band		WCDMA II			Tune-up Limit (dBm)
TX Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	RMC 12.2Kbps	19.87	19.73	19.82	20.80
3GPP Rel 6	HSDPA Subtest-1	19.07	18.94	19.16	19.00
3GPP Rel 6	HSDPA Subtest-2	19.04	18.98	19.19	19.00
3GPP Rel 6	HSDPA Subtest-3	18.54	18.50	18.66	18.50
3GPP Rel 6	HSDPA Subtest-4	18.52	18.49	18.63	18.50
3GPP Rel 6	HSUPA Subtest-1	18.94	18.86	19.07	19.00
3GPP Rel 6	HSUPA Subtest-2	16.91	16.90	17.07	17.00
3GPP Rel 6	HSUPA Subtest-3	17.96	17.87	18.08	18.00
3GPP Rel 6	HSUPA Subtest-4	16.96	16.86	17.10	17.00
3GPP Rel 6	HSUPA Subtest-5	18.94	18.88	19.10	19.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	18.09	18.98	17.77	18.00

Note: It will reduce about 4dBm when the hotspot function is on and be used for hotspot measurement.



<LTE Mode>

Full Power

LTE Band 2

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	23.11	22.51	22.52	24
20	QPSK	1	49	22.85	23.15	22.63	
20	QPSK	1	99	22.76	22.97	22.33	
20	QPSK	50	0	22.36	22.39	22.22	24
20	QPSK	50	24	22.28	22.04	22.08	
20	QPSK	50	50	22.26	22.12	22.11	
20	QPSK	100	0	22.18	22.15	22.17	
20	16QAM	1	0	22.14	22.38	22.08	23
20	16QAM	1	49	22.63	22.47	22.37	
20	16QAM	1	99	22.56	21.96	22.57	
20	16QAM	50	0	22.81	22.13	22.41	23
20	16QAM	50	24	22.67	21.94	22.53	
20	16QAM	50	50	22.52	22.02	22.37	
20	16QAM	100	0	22.48	22.28	21.06	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.92	22.26	22.57	24
15	QPSK	1	37	22.95	22.48	22.69	
15	QPSK	1	74	23.12	22.39	22.34	
15	QPSK	36	0	22.56	22.28	22.39	23
15	QPSK	36	20	22.37	22.43	22.25	
15	QPSK	36	39	22.35	21.82	22.43	
15	QPSK	75	0	22.03	21.93	22.05	
15	16QAM	1	0	21.98	22.26	22.69	23
15	16QAM	1	37	21.85	22.69	22.28	
15	16QAM	1	74	22.01	22.48	22.17	
15	16QAM	36	0	21.99	22.43	22.39	22
15	16QAM	36	20	22.21	22.29	22.41	
15	16QAM	36	39	22.12	22.16	22.22	



15	16QAM	75	0	21.36	22.28	22.33	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	23.08	23.05	23.09	24
10	QPSK	1	25	23.13	23.04	23.06	
10	QPSK	1	49	23.02	23.06	23.07	
10	QPSK	25	0	22.25	22.14	22.03	23
10	QPSK	25	12	22.13	22.18	22.13	
10	QPSK	25	25	22.35	22.15	22.37	
10	QPSK	50	0	22.04	22.16	22.16	
10	16QAM	1	0	22.94	22.46	22.20	23
10	16QAM	1	25	22.78	22.14	22.18	
10	16QAM	1	49	22.33	22.17	22.39	
10	16QAM	25	0	22.49	22.19	22.28	22
10	16QAM	25	12	22.43	22.26	22.12	
10	16QAM	25	25	22.14	22.17	22.08	
10	16QAM	50	0	21.88	21.15	21.24	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	23.11	22.70	22.60	24
5	QPSK	1	12	22.99	22.45	22.28	
5	QPSK	1	24	22.94	22.48	23.01	
5	QPSK	12	0	22.73	22.23	22.23	23
5	QPSK	12	7	22.66	22.05	22.15	
5	QPSK	12	13	22.54	22.06	22.02	
5	QPSK	25	0	22.75	21.92	21.84	
5	16QAM	1	0	22.86	22.81	22.16	23
5	16QAM	1	12	22.05	22.69	22.38	
5	16QAM	1	24	22.99	22.37	22.29	
5	16QAM	12	0	22.08	22.58	22.03	22
5	16QAM	12	7	22.76	22.56	22.05	
5	16QAM	12	13	22.65	22.43	22.09	
5	16QAM	25	0	22.63	22.23	21.68	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	





REPORT No. : SZ18060250S01

3	QPSK	1	0	23.04	23.07	23.03	24
3	QPSK	1	8	23.06	23.02	23.09	
3	QPSK	1	14	23.01	23.01	23.05	
3	QPSK	8	0	22.00	22.11	22.28	23
3	QPSK	8	4	22.03	22.16	22.39	
3	QPSK	8	7	22.09	22.17	22.30	
3	QPSK	15	0	22.02	22.19	22.29	
3	16QAM	1	0	22.04	22.12	22.22	23
3	16QAM	1	8	22.08	21.86	22.28	
3	16QAM	1	14	22.03	21.81	22.26	
3	16QAM	8	0	22.68	21.85	22.36	23
3	16QAM	8	4	22.39	21.91	22.23	
3	16QAM	8	7	22.26	21.83	22.17	
3	16QAM	15	0	22.95	21.05	21.06	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.67	22.83	22.77	24
1.4	QPSK	1	3	23.03	23.06	23.08	
1.4	QPSK	1	5	23.12	22.99	23.01	
1.4	QPSK	3	0	23.02	23.08	23.04	
1.4	QPSK	3	1	23.01	22.39	23.04	
1.4	QPSK	3	3	22.93	22.26	23.07	
1.4	QPSK	6	0	23.05	22.14	22.42	24
1.4	16QAM	1	0	22.14	22.08	22.33	23
1.4	16QAM	1	3	22.20	21.97	22.51	
1.4	16QAM	1	5	22.16	22.00	22.38	
1.4	16QAM	3	0	22.17	21.95	22.43	
1.4	16QAM	3	1	22.06	21.93	22.47	
1.4	16QAM	3	3	21.82	21.82	22.12	
1.4	16QAM	6	0	20.97	21.01	21.51	22



**LTE Band 4**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	22.53	23.04	23.20	24
20	QPSK	1	49	22.97	23.34	23.03	
20	QPSK	1	99	22.83	23.15	22.97	
20	QPSK	50	0	23.23	23.07	23.19	24
20	QPSK	50	24	22.16	22.04	22.31	
20	QPSK	50	50	22.06	22.99	22.02	
20	QPSK	100	0	22.08	22.12	22.17	
20	16QAM	1	0	22.61	22.11	22.17	23
20	16QAM	1	49	22.31	22.15	21.94	
20	16QAM	1	99	22.24	21.78	21.53	
20	16QAM	50	0	22.39	21.49	21.29	23
20	16QAM	50	24	22.16	21.58	21.23	
20	16QAM	50	50	22.17	21.33	21.99	
20	16QAM	100	0	21.08	21.07	21.94	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.16	23.28	23.28	24
15	QPSK	1	37	23.05	23.27	23.13	
15	QPSK	1	74	23.29	23.21	23.01	
15	QPSK	36	0	22.25	22.14	22.39	23
15	QPSK	36	20	22.38	22.49	22.26	
15	QPSK	36	39	22.43	22.32	22.18	
15	QPSK	75	0	22.04	22.11	22.01	
15	16QAM	1	0	22.65	22.25	22.17	23
15	16QAM	1	37	22.14	22.40	22.00	
15	16QAM	1	74	22.38	21.79	21.68	
15	16QAM	36	0	22.46	21.58	21.39	22
15	16QAM	36	20	22.23	21.31	21.34	
15	16QAM	36	39	22.17	21.18	21.06	
15	16QAM	75	0	21.11	21.94	21.01	
Channel				20000	20175	20350	Tune-up



REPORT No. : SZ18060250S01

Frequency (MHz)				1715	1732.5	1750	limit (dBm)
10	QPSK	1	0	23.27	22.99	22.81	24
10	QPSK	1	25	23.06	23.18	22.85	
10	QPSK	1	49	22.81	23.14	22.80	
10	QPSK	25	0	22.05	22.14	22.94	23
10	QPSK	25	12	22.10	22.99	22.91	
10	QPSK	25	25	22.01	22.93	22.02	
10	QPSK	50	0	22.05	22.06	22.05	
10	16QAM	1	0	22.50	22.25	22.14	23
10	16QAM	1	25	22.43	22.03	22.08	
10	16QAM	1	49	22.05	21.92	21.90	
10	16QAM	25	0	21.96	21.96	21.94	22
10	16QAM	25	12	21.91	22.14	22.02	
10	16QAM	25	25	21.83	22.15	21.98	
10	16QAM	50	0	21.01	21.04	21.90	
Channel				19975	20175	20375	Tune-up
Frequency (MHz)				1712.5	1732.5	1752.5	limit (dBm)
5	QPSK	1	0	23.31	22.43	22.90	24
5	QPSK	1	12	23.11	22.39	22.94	
5	QPSK	1	24	22.49	22.41	22.85	
5	QPSK	12	0	22.67	22.44	22.76	23
5	QPSK	12	7	22.36	22.35	22.77	
5	QPSK	12	13	22.03	22.21	22.65	
5	QPSK	25	0	22.47	22.16	22.46	
5	16QAM	1	0	22.58	22.24	22.25	23
5	16QAM	1	12	22.69	22.19	22.38	
5	16QAM	1	24	22.65	22.15	22.67	
5	16QAM	12	0	22.33	21.92	22.43	23
5	16QAM	12	7	22.30	21.94	22.19	
5	16QAM	12	13	22.23	21.98	22.23	
5	16QAM	25	0	22.58	22.99	22.31	
Channel				19965	20175	20385	Tune-up
Frequency (MHz)				1711.5	1732.5	1753.5	limit (dBm)
3	QPSK	1	0	23.26	23.14	22.88	24
3	QPSK	1	8	23.12	22.99	22.99	



3	QPSK	1	14	22.61	23.12	22.95	
3	QPSK	8	0	22.14	22.08	22.04	23
3	QPSK	8	4	22.13	22.03	22.08	
3	QPSK	8	7	22.89	22.02	22.89	
3	QPSK	15	0	22.12	22.09	22.97	
3	16QAM	1	0	22.57	22.04	22.07	23
3	16QAM	1	8	22.77	22.03	21.85	
3	16QAM	1	14	22.76	21.84	21.61	
3	16QAM	8	0	22.64	21.86	21.36	22
3	16QAM	8	4	22.56	21.91	21.83	
3	16QAM	8	7	22.35	21.93	21.90	
3	16QAM	15	0	21.28	21.22	21.81	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	23.27	23.02	22.89	24
1.4	QPSK	1	3	23.26	23.07	23.07	
1.4	QPSK	1	5	23.17	23.07	22.54	
1.4	QPSK	3	0	23.29	23.11	22.92	
1.4	QPSK	3	1	23.11	23.10	22.96	
1.4	QPSK	3	3	22.94	23.16	22.98	
1.4	QPSK	6	0	23.10	22.11	22.96	24
1.4	16QAM	1	0	22.77	22.22	21.99	23
1.4	16QAM	1	3	22.81	22.27	22.09	
1.4	16QAM	1	5	22.78	22.16	22.00	
1.4	16QAM	3	0	22.58	22.33	22.01	
1.4	16QAM	3	1	22.65	22.26	22.04	
1.4	16QAM	3	3	22.43	22.02	22.03	
1.4	16QAM	6	0	21.52	21.22	21.13	22



**LTE Band 7**

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	22.58	22.65	22.48	23
20	QPSK	1	49	21.91	22.57	22.61	
20	QPSK	1	99	21.19	22.28	21.90	
20	QPSK	50	0	22.13	22.24	22.34	23
20	QPSK	50	24	21.92	21.88	21.92	
20	QPSK	50	50	21.82	21.39	21.81	
20	QPSK	100	0	21.68	21.86	22.12	23
20	16QAM	1	0	21.49	22.60	21.95	
20	16QAM	1	49	21.68	21.83	22.57	
20	16QAM	1	99	22.32	21.54	21.52	23
20	16QAM	50	0	22.22	21.48	22.01	
20	16QAM	50	24	22.12	21.29	21.88	
20	16QAM	50	50	22.08	21.26	21.98	23
20	16QAM	100	0	21.90	22.50	22.27	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	21.97	22.58	22.63	23
15	QPSK	1	37	21.78	21.85	22.60	
15	QPSK	1	74	22.62	21.50	21.57	
15	QPSK	36	0	21.67	21.74	22.56	23
15	QPSK	36	20	21.65	21.65	21.88	
15	QPSK	36	39	21.79	21.03	21.18	
15	QPSK	75	0	21.22	21.44	21.79	23
15	16QAM	1	0	21.34	22.35	22.26	
15	16QAM	1	37	21.29	21.48	21.96	
15	16QAM	1	74	22.24	21.11	21.85	23
15	16QAM	36	0	21.69	21.92	21.39	
15	16QAM	36	20	21.92	21.29	21.29	
15	16QAM	36	39	22.02	21.65	21.62	23
15	16QAM	75	0	21.43	21.62	21.07	
Channel				20800	21100	21400	Tune-up limit
Frequency (MHz)				2505	2535	2565	



							(dBm)
10	QPSK	1	0	21.44	22.33	22.34	23
10	QPSK	1	25	22.06	21.68	22.63	
10	QPSK	1	49	22.39	21.43	21.91	
10	QPSK	25	0	21.54	21.40	22.51	23
10	QPSK	25	12	21.95	21.25	21.69	
10	QPSK	25	25	22.01	21.98	21.19	
10	QPSK	50	0	21.76	21.24	21.99	
10	16QAM	1	0	21.43	21.91	22.62	23
10	16QAM	1	25	21.99	21.30	21.96	
10	16QAM	1	49	22.37	21.04	21.15	
10	16QAM	25	0	21.75	21.15	21.36	23
10	16QAM	25	12	21.62	21.98	21.55	
10	16QAM	25	25	21.26	21.95	21.59	
10	16QAM	50	0	21.91	21.41	21.08	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	21.25	21.35	21.54	23
5	QPSK	1	12	21.48	21.00	21.27	
5	QPSK	1	24	21.31	21.79	21.64	
5	QPSK	12	0	21.43	21.57	21.26	23
5	QPSK	12	7	21.18	21.44	21.32	
5	QPSK	12	13	21.80	21.20	21.13	
5	QPSK	25	0	21.59	21.42	21.72	
5	16QAM	1	0	21.24	21.80	22.11	23
5	16QAM	1	12	21.13	21.98	21.77	
5	16QAM	1	24	21.72	21.23	21.24	
5	16QAM	12	0	21.25	21.22	21.95	22
5	16QAM	12	7	21.18	21.11	21.95	
5	16QAM	12	13	21.29	21.09	21.00	
5	16QAM	25	0	21.89	21.67	21.98	



**Power Reduction**

**LTE Band 2**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				100	0	-100	
Frequency (MHz)				10	0	-10	
20	QPSK	1	0	19.11	18.51	18.52	
20	QPSK	1	49	18.85	19.15	18.63	20.00
20	QPSK	1	99	18.76	18.97	18.33	20.00
20	QPSK	50	0	18.76	18.39	18.22	
20	QPSK	50	24	18.28	18.04	18.08	
20	QPSK	50	50	18.26	18.12	18.11	
20	QPSK	100	0	18.18	18.15	18.17	20.00
20	16QAM	1	0	18.14	18.38	18.08	
20	16QAM	1	49	18.63	18.47	18.37	
20	16QAM	1	99	18.56	17.96	18.57	19.00
20	16QAM	50	0	18.81	18.13	18.41	
20	16QAM	50	24	18.67	17.94	18.53	
20	16QAM	50	50	18.52	18.02	18.37	
20	16QAM	100	0	18.48	18.28	17.06	19.00
Channel				75	0	-75	
Frequency (MHz)				7.5	0	-7.5	
15	QPSK	1	0	18.92	18.26	18.57	20.00
15	QPSK	1	37	18.95	18.48	18.69	
15	QPSK	1	74	19.12	18.39	18.34	
15	QPSK	36	0	18.56	18.28	18.39	19.00
15	QPSK	36	20	18.37	18.43	18.25	
15	QPSK	36	39	18.35	17.82	18.43	
15	QPSK	75	0	18.03	17.93	18.05	
15	16QAM	1	0	17.98	18.26	18.69	19.00
15	16QAM	1	37	17.85	18.69	18.28	
15	16QAM	1	74	18.01	18.48	18.17	
15	16QAM	36	0	17.99	18.43	18.39	19.00
15	16QAM	36	20	18.21	18.29	18.41	
15	16QAM	36	39	18.12	18.16	18.22	
15	16QAM	75	0	17.36	18.28	18.33	



REPORT No. : SZ18060250S01

Channel				50	0	-50	Tune-up limit (dBm)
Frequency (MHz)				5	0	-5	
10	QPSK	1	0	19.08	19.05	19.09	20.00
10	QPSK	1	25	19.13	19.04	19.06	
10	QPSK	1	49	19.02	19.06	19.07	
10	QPSK	25	0	18.25	18.14	18.03	20.00
10	QPSK	25	12	18.13	18.18	18.13	
10	QPSK	25	25	18.35	18.15	18.37	
10	QPSK	50	0	18.04	18.16	18.16	
10	16QAM	1	0	18.94	18.46	18.20	20.00
10	16QAM	1	25	18.78	18.14	18.18	
10	16QAM	1	49	18.33	18.17	18.39	
10	16QAM	25	0	18.49	18.19	18.28	19.00
10	16QAM	25	12	18.43	18.26	18.12	
10	16QAM	25	25	18.14	18.17	18.08	
10	16QAM	50	0	17.88	17.15	17.24	
Channel				25	0	-25	Tune-up limit (dBm)
Frequency (MHz)				2.5	0	-2.5	
5	QPSK	1	0	19.11	18.70	18.60	20.00
5	QPSK	1	12	18.99	18.45	18.28	
5	QPSK	1	24	18.94	18.48	19.01	
5	QPSK	12	0	18.73	18.23	18.23	20.00
5	QPSK	12	7	18.66	18.05	18.15	
5	QPSK	12	13	18.54	18.06	18.02	
5	QPSK	25	0	18.75	17.92	17.84	
5	16QAM	1	0	18.86	18.81	18.16	20.00
5	16QAM	1	12	18.05	18.69	18.38	
5	16QAM	1	24	18.99	18.37	18.29	
5	16QAM	12	0	18.08	18.58	18.03	19.00
5	16QAM	12	7	18.76	18.56	18.05	
5	16QAM	12	13	18.65	18.43	18.09	
5	16QAM	25	0	18.63	18.23	17.68	
Channel				15	0	-15	Tune-up limit (dBm)
Frequency (MHz)				1.5	0	-1.5	
3	QPSK	1	0	19.04	19.07	19.03	20.00





3	QPSK	1	8	19.06	19.02	19.09	
3	QPSK	1	14	19.01	19.01	19.05	
3	QPSK	8	0	18.00	18.11	18.28	20.00
3	QPSK	8	4	18.03	18.16	18.39	
3	QPSK	8	7	18.09	18.17	18.30	
3	QPSK	15	0	18.02	18.19	18.29	
3	16QAM	1	0	18.04	18.12	18.22	19.00
3	16QAM	1	8	18.08	17.86	18.28	
3	16QAM	1	14	18.03	17.81	18.26	
3	16QAM	8	0	18.68	17.85	18.36	19.00
3	16QAM	8	4	18.39	17.91	18.23	
3	16QAM	8	7	18.26	17.83	18.17	
3	16QAM	15	0	18.95	17.05	17.06	
Channel				7	0	-7	Tune-up limit (dBm)
Frequency (MHz)				0.7	0	-0.7	
1.4	QPSK	1	0	18.67	18.83	18.77	20.00
1.4	QPSK	1	3	19.03	19.06	19.08	
1.4	QPSK	1	5	19.12	18.99	19.01	
1.4	QPSK	3	0	19.02	19.08	19.04	
1.4	QPSK	3	1	19.01	18.39	19.04	
1.4	QPSK	3	3	18.93	18.26	19.07	
1.4	QPSK	6	0	19.05	18.14	18.42	20.00
1.4	16QAM	1	0	18.14	18.08	18.33	19.00
1.4	16QAM	1	3	18.20	17.97	18.51	
1.4	16QAM	1	5	18.16	18.00	18.38	
1.4	16QAM	3	0	18.17	17.95	18.43	
1.4	16QAM	3	1	18.06	17.93	18.47	
1.4	16QAM	3	3	17.82	17.82	18.12	
1.4	16QAM	6	0	16.97	17.01	17.51	19.00

Note: It will reduce about 4dBm when the hotspot function is on and be used for hotspot measurement.



<WLAN 2.4GHz

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Power Setting	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	CH 1	2412	16.38	17.00	19.00	97.80
		CH 6	2437	17.81	18.00	19.00	
		CH 11	2462	16.48	17.00	19.00	
	802.11g 6Mbps	CH 1	2412	12.51	13.00	17.00	87.20
		CH 6	2437	13.86	14.00	17.00	
		CH 11	2462	12.97	14.00	17.00	
	802.11n-HT20 MCS0	CH 1	2412	12.56	13.00	17.00	86.50
		CH 6	2437	13.87	14.00	17.00	
		CH 11	2462	12.96	14.00	17.00	
	802.11n-HT40 MCS0	CH 3	2422	13.08	14.00	17.00	76.00
		CH 6	2437	13.55	14.00	17.00	
		CH 9	2452	12.76	13.00	17.00	


<Bluetooth Mode>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 0	2402	6.68	7.49	7.76
	CH 39	2441	9.40	10.16	10.47
	CH 78	2480	7.96	8.71	9.06
Tune-up Limit			10.00	10.50	10.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 0	2402	-1.41
	CH 19	2440	0.93
	CH 39	2480	-0.44
Tune-up Limit			1.50

## 14. Hot-Spot Mode Evaluation Procedure

### EUT Antenna Location :

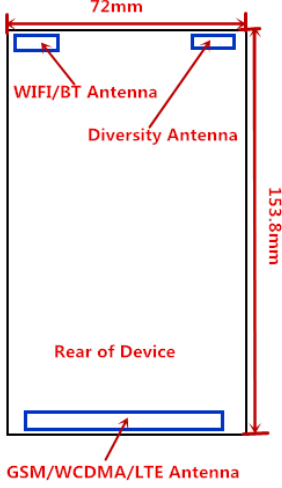 <p>The diagram shows the rear of a device with dimensions 72mm (width) and 153.8mm (height). It identifies the locations of three antennas: a WIFI/BT Antenna at the top left, a Diversity Antenna at the top right, and a GSM/WCDMA/LTE Antenna at the bottom center. The area is labeled 'Rear of Device'.</p>	<p>Main antenna supported TX bands : GSM 850/1900 UMTS Band II/IV/V LTE Band 2/4/7</p> <p>WIFI/BT antenna supported bands : 2.4GHz</p>
--	--

### Hotspot Evaluation

Assessment	Hotspot side for SAR				Test distance: 10mm	
Antennas	Back	Front	Top	Bottom	Left	Right
LTE/WCDMA/GSM	Yes	Yes	No	Yes	Yes	Yes
WLAN&BT	Yes	Yes	Yes	No	No	Yes

### Note :

1. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
2. Head/Body-worn/Hotspot mode SAR assessments are required.
3. Referring to KDB 941225 D06, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
4. For Main antenna, SAR measurements at Top side are not required since the distance between DUT and flat phantom  $> 25\text{mm}$ .
5. For WLAN&BT antenna, SAR measurements Bottom side and Right side are not required since the distance between DUT and flat phantom  $> 25\text{mm}$ .
6. For the Diversity antenna, it supports RX only, SAR is not required.

## 15. Test Results List

### Test Guidance:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. When hotspot mode is active, GSM1900, WCDMA Band II, and LTE Band 2 power reduction will be active.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
  - a. When hotspot is not worked, GSM1900, WCDMA Band II, LTE Band 2 product specific 10g SAR is required.
  - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.



### <GSM>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

### <WCDMA>

7. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.
8. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
9. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
10. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
11. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

### <LTE>

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor

- e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) \* Tune-up Scaling Factor \* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
  3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/kg.
  4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
  5. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
    - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
    - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
    - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
    - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
    - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) \* Tune-up Scaling Factor \* scaling factor for extended cyclic prefix.

### <WLAN>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
  - 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
  - 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for
3. 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.
4. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.

### <Bluetooth>

1. According to KDB 447498 section 4.3.1, the 1-g SAR test exclusion thresholds at test separation distances  $\leq 50$  mm are determined by following:

Test distance: 10mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
Bluetooth	11.0	$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR	No

2. The BT Body stand-alone SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:  
(Max power=11.0mW; min. test separation distance= 15mm for Body-worn; f=2.4GHz)  
Bluetooth estimated Body SAR =0.153W/Kg (1g)





## 15.1. Head SAR Evaluation

Plot No.	Band	BW (MHz)	Mode/Modulation	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1#	GSM850	-	GPRS(2 TX slots)	Right Cheek	128	31.67	32.00	1.078	0.328	<b>0.354</b>
	GSM850	-	GPRS(2 TX slots)	Right Tilt	128	31.67	32.00	1.078	0.178	0.192
	GSM850	-	GPRS(2 TX slots)	Left Cheek	128	31.67	32.00	1.078	0.275	0.297
	GSM850	-	GPRS(2 TX slots)	Left Tilt	128	31.67	32.00	1.078	0.153	0.165
2#	GSM1900	-	GPRS(3 TX slots)	Right Cheek	810	26.00	27.00	1.259	0.300	<b>0.378</b>
	GSM1900	-	GPRS(3 TX slots)	Right Tilt	810	26.00	27.00	1.259	0.097	0.122
	GSM1900	-	GPRS(3 TX slots)	Left Cheek	810	26.00	27.00	1.259	0.228	0.287
	GSM1900	-	GPRS(3 TX slots)	Left Tilt	810	26.00	27.00	1.259	0.120	0.151
3#	WCDMA Band II	-	RMC 12.2Kbps	Right Cheek	9262	23.87	24.80	1.239	0.357	<b>0.442</b>
	WCDMA Band II	-	RMC 12.2Kbps	Right Tilt	9262	23.87	24.80	1.239	0.176	0.218
	WCDMA Band II	-	RMC 12.2Kbps	Left Cheek	9262	23.87	24.80	1.239	0.207	0.256
	WCDMA Band II	-	RMC 12.2Kbps	Left Tilt	9262	23.87	24.80	1.239	0.149	0.185
4#	WCDMA Band IV	-	RMC 12.2Kbps	Right Cheek	1312	23.37	24.80	1.390	0.391	<b>0.543</b>
	WCDMA Band IV	-	RMC 12.2Kbps	Right Tilt	1312	23.37	24.80	1.390	0.176	0.245
	WCDMA Band IV	-	RMC 12.2Kbps	Left Cheek	1312	23.37	24.80	1.390	0.222	0.309
	WCDMA Band IV	-	RMC 12.2Kbps	Left Tilt	1312	23.37	24.80	1.390	0.183	0.254
5#	WCDMA Band V	-	RMC 12.2Kbps	Right Cheek	4182	23.42	24.80	1.374	0.181	<b>0.249</b>
	WCDMA Band V	-	RMC 12.2Kbps	Right Tilt	4182	23.42	24.80	1.374	0.079	0.109
	WCDMA Band V	-	RMC 12.2Kbps	Left Cheek	4182	23.42	24.80	1.374	0.116	0.159
	WCDMA Band V	-	RMC 12.2Kbps	Left Tilt	4182	23.42	24.80	1.374	0.069	0.094
6#	LTE Band 2	20Mhz	QPSK 1RB 49offset	Right Cheek	18900	23.15	24.00	1.216	0.375	<b>0.456</b>
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Right Tilt	18900	23.15	24.00	1.216	0.292	0.355
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Left Cheek	18900	23.15	24.00	1.216	0.261	0.317
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Left Tilt	18900	23.15	24.00	1.216	0.201	0.244
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Right Cheek	18900	22.39	24.00	1.449	0.292	0.423
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Right Tilt	18900	22.39	24.00	1.449	0.128	0.185
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Left Cheek	18900	22.39	24.00	1.449	0.201	0.291
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Left Tilt	18900	22.39	24.00	1.449	0.154	0.223



REPORT No. : SZ18060250S01

Plot No.	Band	BW (MHz)	Mode/ Modulation	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Right Cheek	20175	23.34	24.00	1.164	0.234	0.272
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Right Tilt	20175	23.34	24.00	1.164	0.129	0.150
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Left Cheek	20175	23.34	24.00	1.164	0.212	0.247
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Left Tilt	20175	23.34	24.00	1.164	0.184	0.214
7#	LTE Band 4	20Mhz	QPSK 50RB 0offset	Right Cheek	20050	22.33	24.00	1.469	0.213	<b>0.313</b>
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Right Tilt	20050	22.33	24.00	1.469	0.098	0.144
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Left Cheek	20050	22.33	24.00	1.469	0.161	0.236
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Left Tilt	20050	22.33	24.00	1.469	0.133	0.195
8#	LTE Band 7	20Mhz	QPSK 1RB 0offset	Right Cheek	21100	22.65	23.00	1.084	0.314	<b>0.340</b>
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Right Tilt	21100	22.65	23.00	1.084	0.088	0.096
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Left Cheek	21100	22.65	23.00	1.084	0.144	0.156
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Left Tilt	21100	22.65	23.00	1.084	0.121	0.131
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Right Cheek	21350	22.34	23.00	1.164	0.281	0.327
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Right Tilt	21350	22.34	23.00	1.164	0.090	0.105
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Left Cheek	21350	22.34	23.00	1.164	0.129	0.150
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Left Tilt	21350	22.34	23.00	1.164	0.117	0.136

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b	Right Cheek	6	17.81	18.00	1.045	97.8	1.022	0.344	0.367
	WLAN2.4GHz	802.11b	Right Tilt	6	17.81	18.00	1.045	97.8	1.022	0.355	0.379
	WLAN2.4GHz	802.11b	Left Cheek	6	17.81	18.00	1.045	97.8	1.022	0.479	0.511
9#	WLAN2.4GHz	802.11b	Left Tilt	6	17.81	18.00	1.045	97.8	1.022	0.554	<b>0.592</b>



## 15.2. Hotspot SAR Evaluation (Test distance 10mm)

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	-	GPRS(2 TX slots)	Front Side	128	31.67	32.00	1.078	0.259	0.279
10#	GSM850	-	GPRS(2 TX slots)	Back Side	128	31.67	32.00	1.078	0.293	<b>0.316</b>
	GSM850	-	GPRS(2 TX slots)	Left Side	128	31.67	32.00	1.078	0.040	0.043
	GSM850	-	GPRS(2 TX slots)	Right Side	128	31.67	32.00	1.078	0.018	0.019
	GSM850	-	GPRS(2 TX slots)	Bottom Side	128	31.67	32.00	1.078	0.052	0.056
	GSM1900	-	GPRS(3 TX slots)	Front Side	810	24.00	25.00	1.259	0.686	0.864
	GSM1900	-	GPRS(3 TX slots)	Back Side	810	24.00	25.00	1.259	0.882	1.110
	GSM1900	-	GPRS(3 TX slots)	Left Side	810	24.00	25.00	1.259	0.084	0.106
	GSM1900	-	GPRS(3 TX slots)	Right Side	810	24.00	25.00	1.259	0.152	0.191
	GSM1900	-	GPRS(3 TX slots)	Bottom Side	810	24.00	25.00	1.259	0.854	1.075
	GSM1900	-	GPRS(3 TX slots)	Back Side	512	23.36	25.00	1.458	0.783	1.141
	GSM1900	-	GPRS(3 TX slots)	Back Side	661	23.89	25.00	1.292	0.804	1.038
11#	GSM1900	-	GPRS(3 TX slots)	Bottom Side	512	23.36	25.00	1.458	0.878	<b>1.280</b>
	GSM1900	-	GPRS(3 TX slots)	Bottom Side	661	23.89	25.00	1.292	0.718	0.927
	WCDMA Band II	-	RMC 12.2Kbps	Front Side	9262	19.87	20.80	1.239	0.489	0.606
	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9262	19.87	20.80	1.239	0.689	0.854
	WCDMA Band II	-	RMC 12.2Kbps	Left Side	9262	19.87	20.80	1.239	0.102	0.126
	WCDMA Band II	-	RMC 12.2Kbps	Right Side	9262	19.87	20.80	1.239	0.051	0.063
12#	WCDMA Band II	-	RMC 12.2Kbps	Bottom Side	9262	19.87	20.80	1.239	0.975	<b>1.208</b>
	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9400	19.73	20.80	1.279	0.602	0.770
	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9538	19.82	20.80	1.253	0.549	0.688
	WCDMA Band II	-	RMC 12.2Kbps	Bottom Side	9400	19.73	20.80	1.279	0.837	1.071
	WCDMA Band II	-	RMC 12.2Kbps	Bottom Side	9538	19.82	20.80	1.253	0.701	0.878
	WCDMA Band IV	-	RMC 12.2Kbps	Front Side	1312	23.37	24.80	1.390	0.642	0.892
	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1312	23.37	24.80	1.390	0.762	1.059
	WCDMA Band IV	-	RMC 12.2Kbps	Left Side	1312	23.37	24.80	1.390	0.133	0.185
	WCDMA Band IV	-	RMC 12.2Kbps	Right Side	1312	23.37	24.80	1.390	0.026	0.036
13#	WCDMA Band IV	-	RMC 12.2Kbps	Bottom Side	1312	23.37	24.80	1.390	0.863	<b>1.200</b>
	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1413	23.24	24.80	1.432	0.699	1.001
	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1513	23.26	24.80	1.426	0.642	0.915
	WCDMA Band IV	-	RMC 12.2Kbps	Bottom Side	1413	23.24	24.80	1.432	0.700	1.003



REPORT No. : SZ18060250S01

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band IV	-	RMC 12.2Kbps	Bottom Side	1513	23.26	24.80	1.426	0.633	0.902
	WCDMA Band V	-	RMC 12.2Kbps	Front Side	4182	23.42	24.80	1.374	0.182	0.250
14#	WCDMA Band V	-	RMC 12.2Kbps	Back Side	4182	23.42	24.80	1.374	0.262	<b>0.360</b>
	WCDMA Band V	-	RMC 12.2Kbps	Left Side	4182	23.42	24.80	1.374	0.208	0.286
	WCDMA Band V	-	RMC 12.2Kbps	Right Side	4182	23.42	24.80	1.374	0.120	0.165
	WCDMA Band V	-	RMC 12.2Kbps	Bottom Side	4182	23.42	24.80	1.374	0.032	0.044
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Front Side	18900	19.15	20.00	1.216	0.362	0.440
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	18900	19.15	20.00	1.216	0.532	0.647
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Left Side	18900	19.15	20.00	1.216	0.066	0.081
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Right Side	18900	19.15	20.00	1.216	0.059	0.071
15#	LTE Band 2	20Mhz	QPSK 1RB 49offset	Bottom Side	18900	19.15	20.00	1.216	0.738	<b>0.898</b>
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Bottom Side	18700	18.85	20.00	1.303	0.675	0.880
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Bottom Side	19100	18.63	20.00	1.371	0.651	0.892
	LTE Band 2	20Mhz	QPSK 100RB 0offset	Bottom Side	18900	19.15	20.00	1.216	0.597	0.726
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Front Side	18900	18.39	20.00	1.449	0.286	0.414
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Back Side	18900	18.39	20.00	1.449	0.444	0.643
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Left Side	18900	18.39	20.00	1.449	0.046	0.067
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Right Side	18900	18.39	20.00	1.449	0.050	0.073
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Bottom Side	18900	18.39	20.00	1.449	0.607	0.879
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Front Side	20175	23.34	24.00	1.164	0.351	0.409
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Back Side	20175	23.34	24.00	1.164	0.555	0.646
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Left Side	20175	23.34	24.00	1.164	0.078	0.091
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Right Side	20175	23.34	24.00	1.164	0.041	0.048
	LTE Band 4	20Mhz	QPSK 1RB 49offset	Bottom Side	20175	23.34	24.00	1.164	0.465	0.541
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Front Side	20050	23.23	24.00	1.194	0.294	0.351
16#	LTE Band 4	20Mhz	QPSK 50RB 0offset	Back Side	20050	23.23	24.00	1.194	0.685	<b>0.818</b>
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Left Side	20050	23.23	24.00	1.194	0.038	0.045
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Right Side	20050	23.23	24.00	1.194	0.019	0.023
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Bottom Side	20050	23.23	24.00	1.194	0.553	0.660
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Back Side	20175	23.07	24.00	1.239	0.528	0.654



REPORT No. : SZ18060250S01

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Back Side	20300	23.19	24.00	1.205	0.490	0.590
	LTE Band 4	20Mhz	QPSK 100RB 0offset	Back Side	20050	22.08	24.00	1.556	0.387	0.602
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Front Side	21100	22.65	23.00	1.084	0.525	0.569
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Back Side	21100	22.65	23.00	1.084	0.368	0.399
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Left Side	21100	22.65	23.00	1.084	0.018	0.019
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Right Side	21100	22.65	23.00	1.084	0.167	0.181
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Bottom Side	21100	22.65	23.00	1.084	0.951	1.031
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Bottom Side	20850	22.58	23.00	1.103	0.632	0.697
17#	LTE Band 7	20Mhz	QPSK 1RB 0offset	Bottom Side	21350	22.48	23.00	1.127	0.916	<b>1.033</b>
	LTE Band 7	20Mhz	QPSK 100RB 0offset	Bottom Side	21100	22.50	23.00	1.122	0.746	0.837
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Front Side	21350	22.34	23.00	1.164	0.430	0.501
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Back Side	21350	22.34	23.00	1.164	0.377	0.439
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Left Side	21350	22.34	23.00	1.164	0.014	0.016
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Right Side	21350	22.34	23.00	1.164	0.137	0.159
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Bottom Side	21350	22.34	23.00	1.164	0.841	0.979
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Bottom Side	20850	22.13	23.00	1.222	0.563	0.688
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Bottom Side	21100	22.24	23.00	1.191	0.766	0.912
	LTE Band 7	20Mhz	QPSK 100RB 0offset	Bottom Side	21350	22.27	23.00	1.183	0.702	0.830

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b	Front Side	6	17.81	18.00	1.045	97.8	1.022	0.092	0.098
18#	WLAN2.4GHz	802.11b	Back Side	6	17.81	18.00	1.045	97.8	1.022	0.241	<b>0.257</b>
	WLAN2.4GHz	802.11b	Right Side	6	17.81	18.00	1.045	97.8	1.022	0.150	0.160
	WLAN2.4GHz	802.11b	Top Side	6	17.81	18.00	1.045	97.8	1.022	0.121	0.129



### 15.3. Body-worn SAR Evaluation (Test distance 15mm)

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	-	GPRS(2 TX slots)	Front Side	128	31.67	32.00	1.078	0.166	0.179
19#	GSM850	-	GPRS(2 TX slots)	Back Side	128	31.67	32.00	1.078	0.261	<b>0.281</b>
	GSM1900	-	GPRS(3 TX slots)	Front Side	810	26.00	27.00	1.259	0.549	0.691
20#	GSM1900	-	GPRS(3 TX slots)	Back Side	810	26.00	27.00	1.259	0.598	<b>0.753</b>
	WCDMA Band II	-	RMC 12.2Kbps	Front Side	9262	23.87	24.80	1.239	0.686	0.850
21#	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9262	23.87	24.80	1.239	0.970	<b>1.202</b>
	WCDMA Band II	-	RMC 12.2Kbps	Front Side	9400	23.73	24.80	1.279	0.708	0.906
	WCDMA Band II	-	RMC 12.2Kbps	Front Side	9538	23.82	24.80	1.253	0.725	0.909
	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9400	23.73	24.80	1.279	0.701	0.897
	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9538	23.82	24.80	1.253	0.830	1.040
	WCDMA Band II	-	RMC 12.2Kbps	Back Side Headset	9262	23.87	24.80	1.239	0.952	1.179
	WCDMA Band IV	-	RMC 12.2Kbps	Front Side	1312	23.37	24.80	1.390	0.486	0.676
22#	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1312	23.37	24.80	1.390	0.616	<b>0.856</b>
	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1413	23.24	24.80	1.432	0.585	0.838
	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1513	23.26	24.80	1.426	0.579	0.825
	WCDMA Band V	-	RMC 12.2Kbps	Front Side	4182	23.42	24.80	1.374	0.172	0.236
23#	WCDMA Band V	-	RMC 12.2Kbps	Back Side	4132	23.42	24.80	1.374	0.223	<b>0.306</b>
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Front Side	18900	23.15	24.00	1.216	0.566	0.688
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	18900	23.15	24.00	1.216	0.942	1.146
24#	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	18700	22.85	24.00	1.303	0.979	<b>1.276</b>
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	19100	22.63	24.00	1.371	0.873	1.197
	LTE Band 2	20Mhz	QPSK 100RB 0offset	Back Side	18900	23.15	24.00	1.216	0.840	1.022
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Front Side	18900	22.39	24.00	1.449	0.470	0.681
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Back Side	18900	22.39	24.00	1.449	0.843	1.221
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Back Side	18700	22.28	24.00	1.486	0.735	1.092
	LTE Band 2	20Mhz	QPSK 50RB 0offset	Back Side	19100	22.22	24.00	1.507	0.577	0.869



REPORT No. : SZ18060250S01

	LTE Band 4	20Mhz	QPSK 1RB 49offset	Front Side	20175	23.34	24.00	1.164	0.156	0.182
25#	LTE Band 4	20Mhz	QPSK 1RB 49offset	Back Side	20175	23.34	24.00	1.164	0.348	<b>0.405</b>
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Front Side	20050	22.33	24.00	1.469	0.187	0.275
	LTE Band 4	20Mhz	QPSK 50RB 0offset	Back Side	20050	22.33	24.00	1.469	0.261	0.383
26#	LTE Band 7	20Mhz	QPSK 1RB 0offset	Front Side	21100	22.65	23.00	1.084	0.290	<b>0.314</b>
	LTE Band 7	20Mhz	QPSK 1RB 0offset	Back Side	21100	22.65	23.00	1.084	0.255	0.276
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Front Side	21350	22.34	23.00	1.164	0.246	0.286
	LTE Band 7	20Mhz	QPSK 50RB 0offset	Back Side	21350	22.34	23.00	1.164	0.214	0.249

Plot No.	Band	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b	Front Side	6	17.81	18.00	1.045	97.8	1.022	0.058	0.062
27#	WLAN2.4GHz	802.11b	Back Side	6	17.81	18.00	1.045	97.8	1.022	0.106	<b>0.113</b>





## 15.4. Extremity SAR Evaluation (Test distance 0mm)

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM1900	-	GPRS(3 TX slots)	Front Side	810	24.00	25.00	1.259	0.936	1.178
28#	GSM1900	-	GPRS(3 TX slots)	Back Side	512	23.36	25.00	1.457	1.330	<b>1.938</b>
	GSM1900	-	GPRS(3 TX slots)	Bottom Side	512	23.36	25.00	1.457	0.790	1.151
	WCDMA Band II	-	RMC 12.2Kbps	Front Side	9262	19.87	20.80	1.239	0.920	1.140
29#	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9262	19.87	20.80	1.239	1.180	<b>1.462</b>
	WCDMA Band II	-	RMC 12.2Kbps	Bottom Side	9262	19.87	20.80	1.239	0.812	1.006
30#	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	18900	19.15	20.00	1.216	0.984	<b>1.197</b>
	LTE Band 2	20Mhz	QPSK 1RB 49offset	Bottom Side	18900	19.15	20.00	1.216	0.704	0.856

**Note:**

Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

- c. When hotspot is not worked, GSM1900, WCDMA Band II/IV, LTE Band 2 product specific 10g SAR is required.
- d. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.



## 15.5. Repeated SAR Measurement

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2)through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### <Hotspot Repeated SAR (Test distance 10mm)>

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
OR	GSM1900	-	GPRS(3 TX slots)	Bottom Side	512	23.36	25.00	1.458	0.878	<b>1.280</b>
Repeated	GSM1900	-	GPRS(3 TX slots)	Bottom Side	512	23.36	25.00	1.458	0.873	1.273
OR	WCDMA Band II	-	RMC 12.2Kbps	Bottom Side	9262	19.87	20.80	1.239	0.975	<b>1.208</b>
Repeated	WCDMA Band II	-	RMC 12.2Kbps	Bottom Side	9262	19.87	20.80	1.239	0.924	1.145
OR	WCDMA Band IV	-	RMC 12.2Kbps	Bottom Side	1312	23.37	24.80	1.390	0.863	<b>1.200</b>
Repeated	WCDMA Band IV	-	RMC 12.2Kbps	Bottom Side	1312	23.37	24.80	1.390	0.753	1.047
OR	LTE Band 2	20Mhz	QPSK 1RB 49offset	Bottom Side	18900	19.15	20.00	1.216	0.738	<b>0.898</b>
Repeated	LTE Band 2	20Mhz	QPSK 1RB 49offset	Bottom Side	18900	19.15	20.00	1.216	0.732	0.890
OR	LTE Band 4	20Mhz	QPSK 50RB 0offset	Back Side	20050	23.23	24.00	1.194	0.685	<b>0.818</b>
Repeated	LTE Band 4	20Mhz	QPSK 50RB 0offset	Back Side	20050	23.23	24.00	1.194	0.661	0.789
OR	LTE Band 7	20Mhz	QPSK 1RB 0offset	Bottom Side	21350	22.48	23.00	1.127	0.916	<b>1.033</b>
Repeated	LTE Band 7	20Mhz	QPSK 1RB 0offset	Bottom Side	21350	22.48	23.00	1.127	0.953	<b>1.074</b>



REPORT No. : SZ18060250S01

## &lt;Body-worn Repeated SAR (Test distance 15mm)

Plot No.	Band	BW (MHz)	Mode	Test Position	Ch.	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
OR	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9262	23.87	24.80	1.239	0.970	<b>1.202</b>
Repeated	WCDMA Band II	-	RMC 12.2Kbps	Back Side	9262	23.87	24.80	1.239	0.968	1.199
OR	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1312	23.37	24.80	1.390	0.616	<b>0.856</b>
Repeated	WCDMA Band IV	-	RMC 12.2Kbps	Back Side	1312	23.37	24.80	1.390	0.581	0.808
OR	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	18700	22.85	24.00	1.303	0.979	<b>1.276</b>
Repeated	LTE Band 2	20Mhz	QPSK 1RB 49offset	Back Side	18700	22.85	24.00	1.303	0.966	1.259

## 15.6. DUT holder perturbation uncertainty evaluation

1. According to TCB workshop, Oct 2016:

When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.

2. When the highest reported SAR of an antenna is > 1.2W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.

3. According to IEEE 1528-2013 section E 4.1, when it is unknown if a device holder perturbs the fields of a test device, the SAR uncertainty shall be assessed with a flat phantom (see Clause 5) by comparing the SAR with and without the device holder according to the following tests:

- a) With device holder: 1 g or 10 g peak spatial-average SAR is measured with the handset fixed in the holder in a manner similar to the way it was held when tested for the head SAR position. The handset horizontal and vertical centerlines (see Clause 6) are aligned parallel to the bottom of the flat phantom and the device is in direct contact with the phantom. The test shall be performed with the antenna position and device operational configuration corresponding to that where the highest head SAR was previously measured for each frequency band.
- b) Without device holder: 1g or 10g peak spatial-average SAR is measured with the handset placed on a low-loss foam block or support in the position identical to that tested with the device holder. The relative permittivity and loss tangent of the foam material shall be less than 1.2 and 10<sup>-5</sup>, respectively.

### Test result:

Band	Mode	Test Position	Ch.	Test configuration	Measured 1g SAR (W/kg)
GSM1900	GPRS(3 TX slots)	Back Side	512	With device holder	3.390
GSM1900	GPRS(3 TX slots)	Back Side	512	Without device holder:	3.387

$$SAR_{\text{tolerance}} [\%] = 100 \times \left( \frac{SAR_{\text{w/ holder}} - SAR_{\text{w/o holder}}}{SAR_{\text{w/o holder}}} \right)$$

The plots of test result please check Appendix D

Therefore, the SAR, tolerance = 100 x [(3.39-3.387)/3.387] = 0.089%.

## 16. Simultaneous Transmission Evaluation

### Simultaneous Evaluation:

No.	Simultaneous transmission Condition	Head	Hotspot	Body-worn
1	GSM/GPRS/EDGE + WLAN 2.4GHz	Yes	Yes	Yes
2	WCDMA + WLAN 2.4GHz	Yes	Yes	Yes
3	LTE + WLAN 2.4GHz	Yes	Yes	Yes
4	GSM/GPRS/EDGE + Bluetooth	Yes	Yes	Yes
5	WCDMA + Bluetooth	Yes	Yes	Yes
6	LTE + Bluetooth	Yes	Yes	Yes

#### Note:

- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the Wi-Fi transmitter and another WWAN transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
- GSM supports voice and data transmission, though not simultaneously. WCDMA supports voice and data transmission simultaneously.
- Simultaneous Transmission SAR evaluation is not required for BT and Wi-Fi , because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
- Per KDB 447498D01v06, Simultaneous Transmission SAR Evaluation procedures is as followed:  
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.  
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.  
Step 3: If the ratio of SAR to peak separation distance is  $\leq 0.04$ , Simultaneous SAR measurement is not required.  
Step 4: If the ratio of SAR to peak separation distance is  $> 0.04$ , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.  
(The ratio is determined by:  $(SAR1 + SAR2) \wedge 1.5/Ri \leq 0.04$ ,  
Ri is the separation distance between the peak SAR locations for the antenna pair in mm.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.



- i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$  W/kg for test separation distances  $\leq 50$  mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- ii) When the minimum separation distance is  $< 5$  mm, the distance is used 5 mm to determine SAR test exclusion.
- iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm.

**<Bluetooth Estimated SAR>**

Maximum tune-up tolerance (dBm)	Maximum tune-up tolerance (mW)	Minimum Distance(mm)	Frequency(GHz)	Test threshold
10.5	11.00	15	2.441	1.73

Maximum tune-up tolerance (dBm)	Maximum tune-up tolerance (mW)	Minimum Distance(mm)	Frequency(GHz)	Estimated SAR (W/kg)
10.5	11.00	10	2.441	0.229

Maximum tune-up tolerance (dBm)	Maximum tune-up tolerance (mW)	Minimum Distance(mm)	Frequency(GHz)	Estimated SAR (W/kg)
10.5	11.00	15	2.441	0.153

Note: Held-to ear configuration are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission.

**< Head Exposure>**



REPORT No. : SZ18060250S01

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Right Cheek	0.354	0.367	0.721
		Right Tilt	0.192	0.379	0.571
		Left Cheek	0.297	0.511	0.808
		Left Tilt	0.165	0.592	0.757
	GSM1900	Right Cheek	0.378	0.367	0.745
		Right Tilt	0.122	0.379	0.501
		Left Cheek	0.287	0.511	0.798
		Left Tilt	0.151	0.592	0.743
WCDMA	WCDMA Band II	Right Cheek	0.442	0.367	0.809
		Right Tilt	0.218	0.379	0.597
		Left Cheek	0.256	0.511	0.767
		Left Tilt	0.185	0.592	0.777
	WCDMA Band IV	Right Cheek	0.543	0.367	0.910
		Right Tilt	0.245	0.379	0.624
		Left Cheek	0.309	0.511	0.820
		Left Tilt	0.254	0.592	0.846
	WCDMA Band V	Right Cheek	0.249	0.367	0.616
		Right Tilt	0.109	0.379	0.488
		Left Cheek	0.159	0.511	0.670
		Left Tilt	0.094	0.592	0.686
LTE	LTE Band 2	Right Cheek	0.456	0.367	0.823
		Right Tilt	0.355	0.379	0.734
		Left Cheek	0.317	0.511	0.828
		Left Tilt	0.244	0.592	0.836
	LTE Band 4	Right Cheek	0.313	0.367	0.680
		Right Tilt	0.150	0.379	0.529
		Left Cheek	0.247	0.511	0.758
		Left Tilt	0.214	0.592	0.806
	LTE Band 7	Right Cheek	0.340	0.367	0.707
		Right Tilt	0.105	0.379	0.484
		Left Cheek	0.156	0.511	0.667
		Left Tilt	0.136	0.592	0.728

<Hotspot Exposure>



WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	WLAN 2.4GHz	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Front	0.279	0.098	0.377
		Back	0.316	0.257	0.573
		Left side	0.043		0.043
		Right side	0.019	0.160	0.179
		Top side		0.129	0.129
		Bottom side	0.056		0.056
	GSM1900	Front	0.864	0.098	0.962
		Back	1.141	0.257	1.398
		Left side	0.106		0.106
		Right side	0.191	0.160	0.351
		Top side		0.129	0.129
		Bottom side	1.280		1.280
WCDMA	WCDMA Band II	Front	0.606	0.098	0.704
		Back	0.854	0.257	1.111
		Left side	0.126		0.126
		Right side	0.063	0.160	0.223
		Top side		0.129	0.129
		Bottom side	1.208		1.208
	WCDMA Band IV	Front	0.892	0.098	0.990
		Back	1.059	0.257	1.316
		Left side	0.185		0.185
		Right side	0.036	0.160	0.196
		Top side		0.129	0.129
		Bottom side	1.200		1.200
	WCDMA Band V	Front	0.250	0.098	0.348
		Back	0.360	0.257	0.617
		Left side	0.286		0.286
		Right side	0.165	0.160	0.325
		Top side		0.129	0.129
		Bottom side	0.044		0.044
LTE	LTE Band 2	Front	0.440	0.098	0.538
		Back	0.647	0.257	0.904
		Left side	0.081		0.081





		Right side	0.073	0.160	0.233
		Top side		0.129	0.129
		Bottom side	0.898		0.898
	LTE Band 4	Front	0.409	0.098	0.507
		Back	0.818	0.257	1.075
		Left side	0.091		0.091
		Right side	0.048	0.160	0.208
		Top side		0.129	0.129
		Bottom side	0.660		0.660
	LTE Band 7	Front	0.569	0.098	0.667
		Back	0.439	0.257	0.696
		Left side	0.019		0.019
		Right side	0.181	0.160	0.341
		Top side		0.129	0.129
		Bottom side	1.033		1.033

<Body-worn Exposure>

WWAN Band		Exposure Position	WWAN 1g SAR(W/kg)	WLAN2.4GHz 1g SAR(W/kg)	Bluetooth Estimated1g SAR (W/kg)	WWAN+2.4G Summed 1g SAR (W/kg)	WWAN+BT Summed 1g SAR (W/kg)
GSM	GSM850	Front	0.179	0.062	0.153	0.241	0.332
		Back	0.281	0.113	0.153	0.394	0.434
	GSM1900	Front	0.691	0.062	0.153	0.753	0.844
		Back	0.753	0.113	0.153	0.866	0.906
WCDMA	WCDMA Band II	Front	0.909	0.062	0.153	0.971	1.062
		Back	1.202	0.113	0.153	1.315	1.355
	WCDMA Band IV	Front	0.676	0.062	0.153	0.738	0.829
		Back	0.856	0.113	0.153	0.969	1.009
	WCDMA Band V	Front	0.236	0.062	0.153	0.298	0.389
		Back	0.306	0.113	0.153	0.419	0.459
LTE	LTE Band 2	Front	0.688	0.062	0.153	0.750	0.841
		Back	1.276	0.113	0.153	1.389	1.429
	LTE Band 4	Front	0.275	0.062	0.153	0.337	0.428
		Back	0.405	0.113	0.153	0.518	0.558
	LTE Band 7	Front	0.314	0.062	0.153	0.376	0.467
		Back	0.276	0.113	0.153	0.389	0.429



REPORT No. : SZ18060250S01

## Annex A General Information

### 1. Identification of the Responsible Testing Laboratory

<b>Company Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Department:</b>	Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>ResponsibleTest Lab Manager:</b>	Mr. Su Feng
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn



REPORT No. : SZ18060250S01

### 3. List of Test Equipments

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d227	2018.06.13	2019.06.12
SPEAG	1800MHz System Validation Kit	D1800V2	2d158	2017.10.11	2018.10.10
SPEAG	1900MHz System Validation Kit	D1900V2	5d211	2018.06.13	2019.06.12
SPEAG	2450MHz System Validation Kit	D2450V2	805	2017.10.12	2018.10.11
SPEAG	2600MHz System Validation Kit	D2600V2	1139	2018.06.13	2019.06.12
SPEAG	Dosimetric E-Field Probe	ES3DV3	3154	2017.10.30	2018.10.29
SPEAG	Data Acquisition Electronics	DAE4	480	2017.09.27	2018.09.26
SPEAG	SAM Twin Phantom 1	QD 000 P40 CB	TP-1471	NCR	NCR
SPEAG	SAM Twin Phantom 2	QD 000 P40 CB	TP-1464	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	124534	2018.04.17	2019.04.16
Agilent	Network Emulator	8960	10752	2018.04.17	2019.04.16
Agilent	Network Analyzer	E5071B	MY42404762	2018.04.17	2019.04.16
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	SMP_02	N/A	201.07.08	2018.07.07
Agilent	Signal Generator	N5182B	MY53050509	2018.04.17	2019.04.16
Agilent	Power Sensor	N8482A	MY41091706	2017.07.08	2018.07.07
Agilent	Power Meter	E4416A	MY45102093	2017.12.07	2018.12.06
Anritsu	Power Sensor	MA2411B	N/A	2017.07.08	2018.07.07
R&S	Power Meter	NRVD	101066	2017.07.08	2018.07.07
MCL	Attenuation1	351-218-010	N/A	NA	NA

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



REPORT No. : SZ18060250S01

## Annex C Plots of System Performance Check

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

[Http://www.morlab.cn](http://www.morlab.cn)

E-mail: [service@morlab.cn](mailto:service@morlab.cn)

## System Check\_835MHz\_Head\_180705

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_180705 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.80$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(6.26, 6.26, 6.26); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 835/Area Scan (81x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 2.73 W/kg



**CW 835/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 54.95 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.52 W/kg**

Maximum value of SAR (measured) = 2.75 W/kg

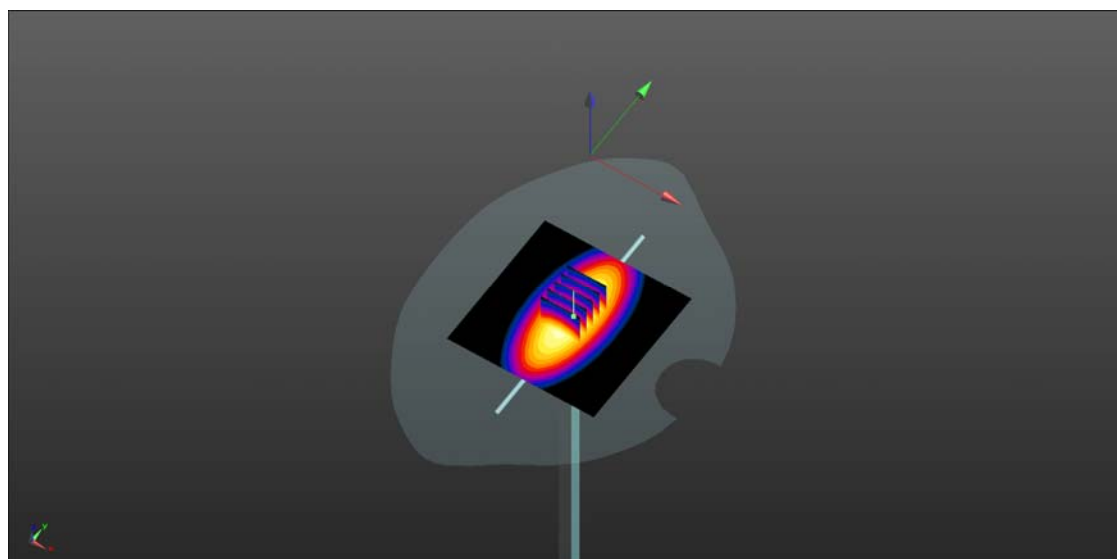

0 dB = 2.73 W/kg

## System Check\_1800MHz\_Head\_180703

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_180703 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 41.32$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(5.15, 5.15, 5.15); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW1800/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.6 W/kg



**CW1800/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.15 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.3 W/kg**

Maximum value of SAR (measured) = 11.3 W/kg

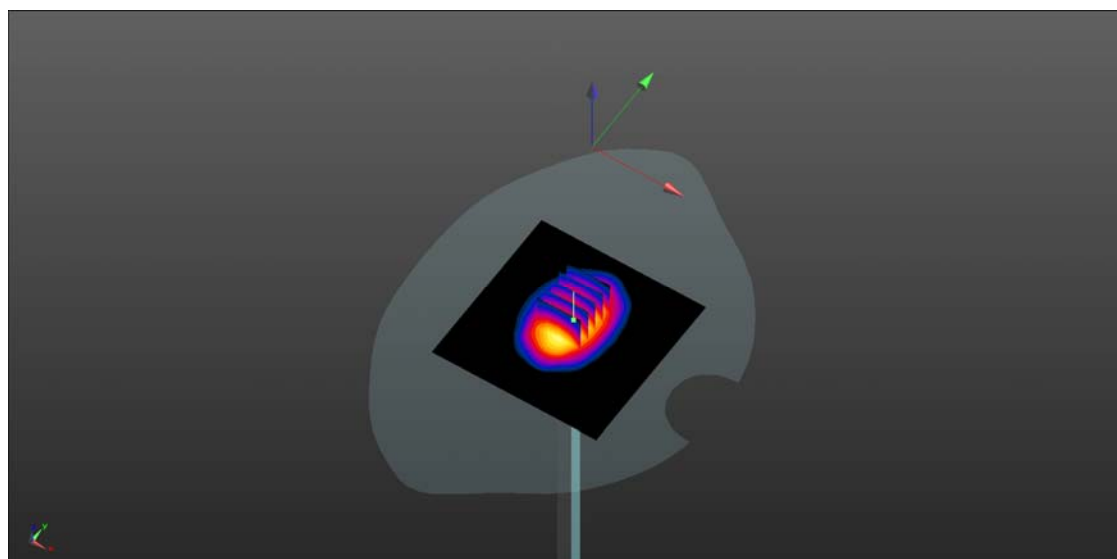

0 dB = 11.6 W/kg

**System Check\_1900MHz\_Head\_180703**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_180703 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 40.889$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.98, 4.98, 4.98); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.6 W/kg



**CW 1900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.78 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 20.1 W/kg

**SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.33 W/kg**

Maximum value of SAR (measured) = 12.5 W/kg

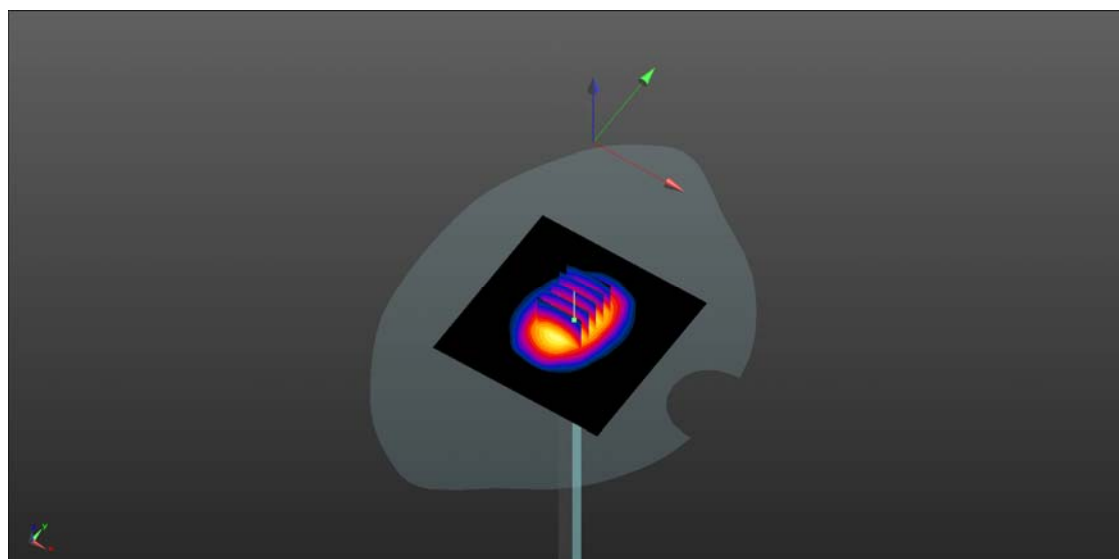

0 dB = 12.5 W/kg

## System Check\_2450MHz\_Head\_180704

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_180704 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.81$  S/m;  $\epsilon_r = 40.022$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW2450/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 16.4 W/kg


**CW2450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 29.4 W/kg

**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.05 W/kg**

Maximum value of SAR (measured) = 14.7 W/kg

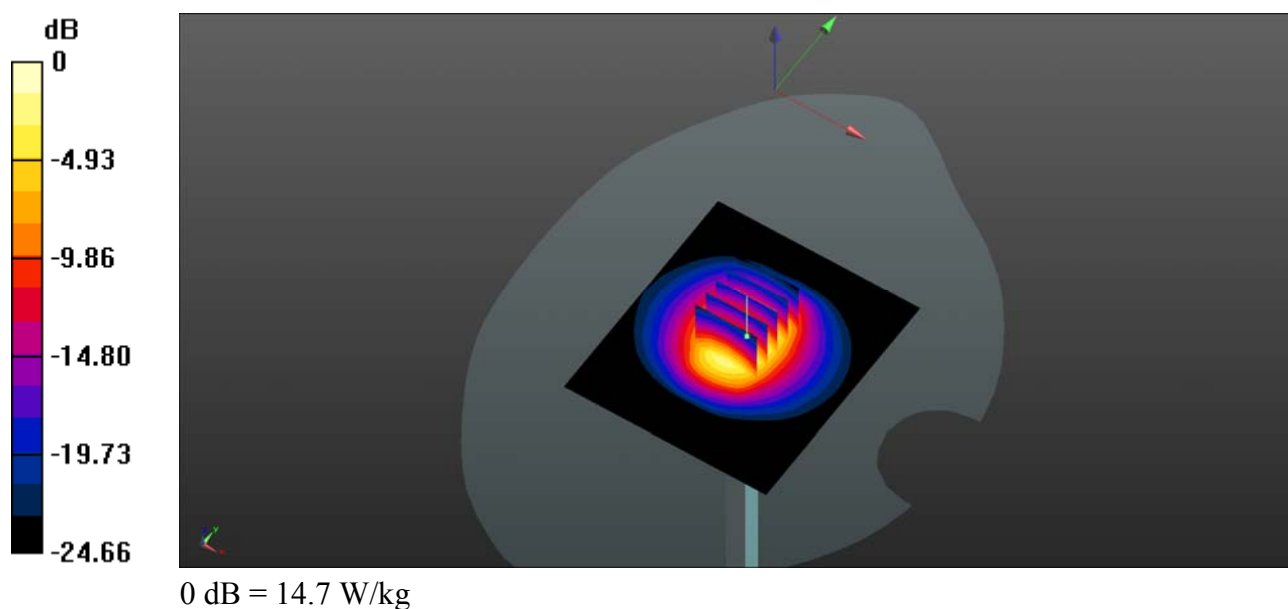



**System Check\_2600MHz\_Head\_20180704**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_180704 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.038$  S/m;  $\epsilon_r = 39.187$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.26, 4.26, 4.26); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2600/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 15.0 W/kg



**CW 2600/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.78 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 33.3 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 5.96 W/kg**

Maximum value of SAR (measured) = 14.8 W/kg

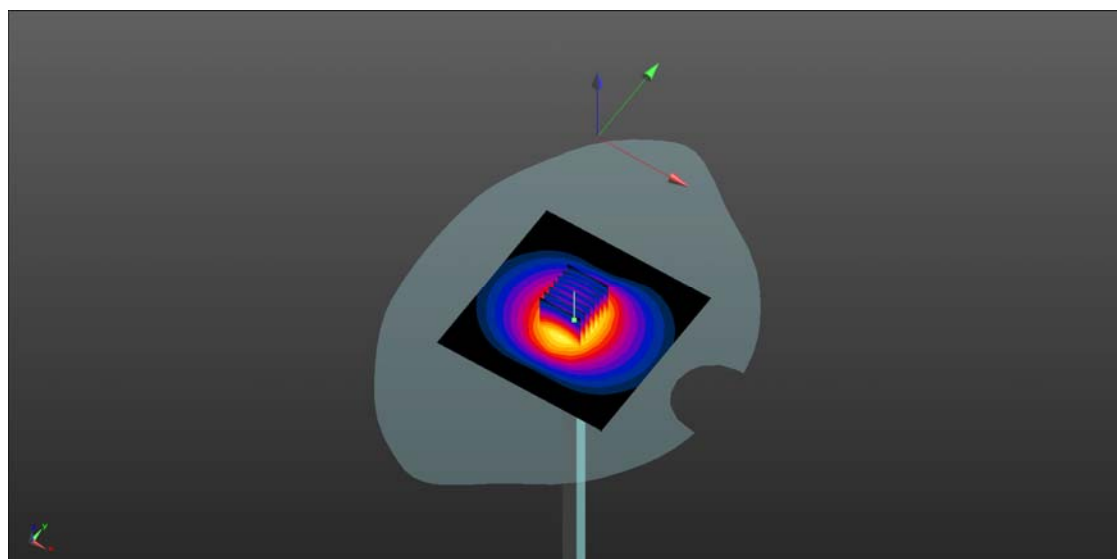

0 dB = 14.8 W/kg

## System Check\_835MHz\_Body\_180706

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_180706 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.945$  S/m;  $\epsilon_r = 54.342$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

### DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(6.22, 6.22, 6.22); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 835/Area Scan (81x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 2.53 W/kg



**CW 835/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 51.04 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.44 W/kg

**SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 2.56 W/kg

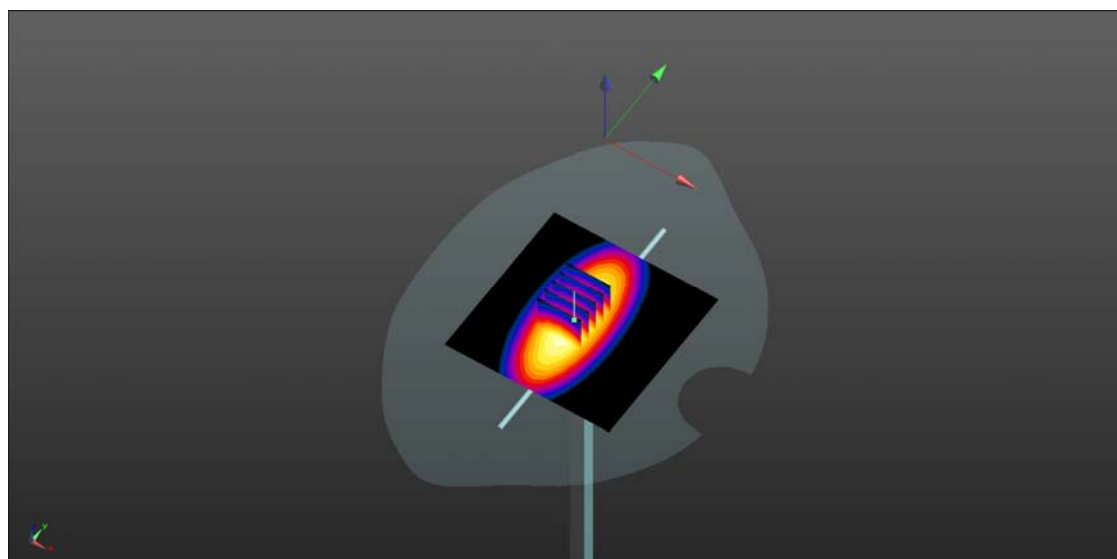

0 dB = 2.53 W/kg

**System Check\_1800MHz\_Body\_180706**

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 53.911$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW1800/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.0 W/kg


**CW1800/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.23 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 20.7 W/kg

**SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.35 W/kg**

Maximum value of SAR (measured) = 12.7 W/kg

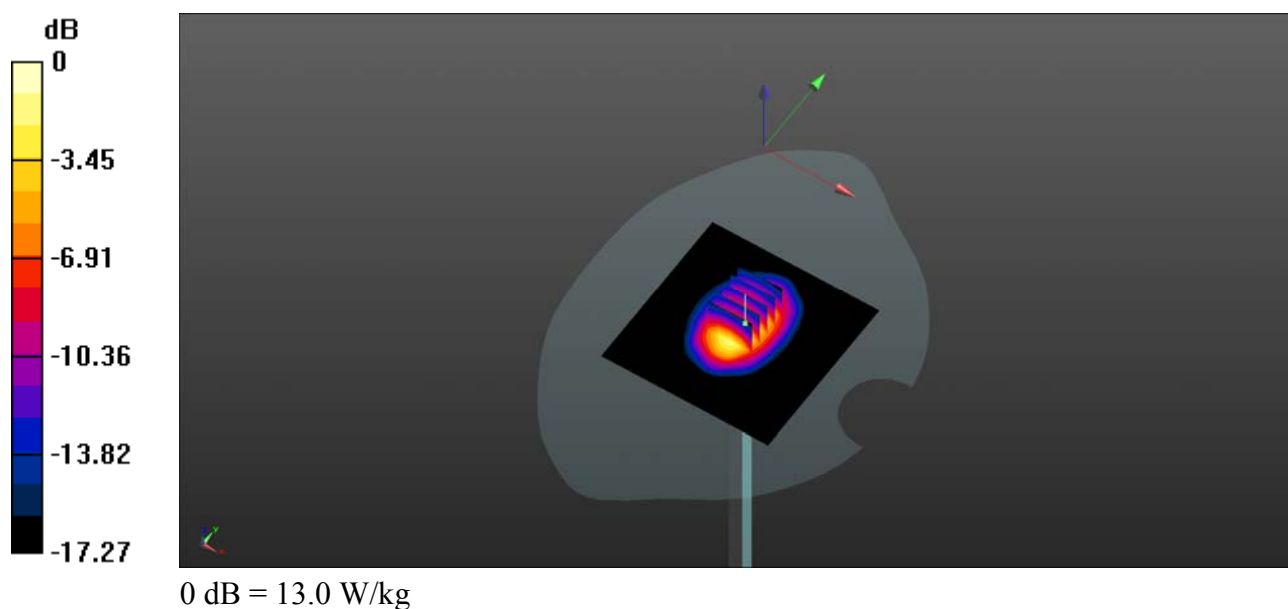

## System Check\_1900MHz\_Body\_180702

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.531$  S/m;  $\epsilon_r = 52.395$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.1 W/kg



**CW 1900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.19 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 18.0 W/kg

**SAR(1 g) = 9.92 W/kg; SAR(10 g) = 5.5 W/kg**

Maximum value of SAR (measured) = 11.2 W/kg

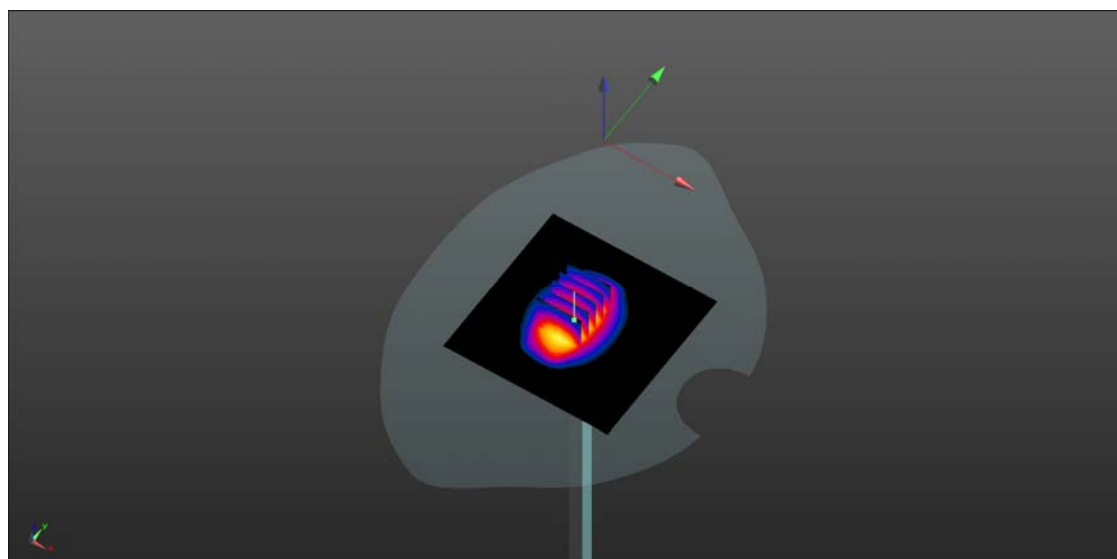

0 dB = 11.1 W/kg

## System Check\_2450MHz\_Body\_180706

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_180706 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.037$  S/m;  $\epsilon_r = 50.607$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2450/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.6 W/kg


**CW 2450/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.5 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 26.3 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.17 W/kg**

Maximum value of SAR (measured) = 20.5 W/kg

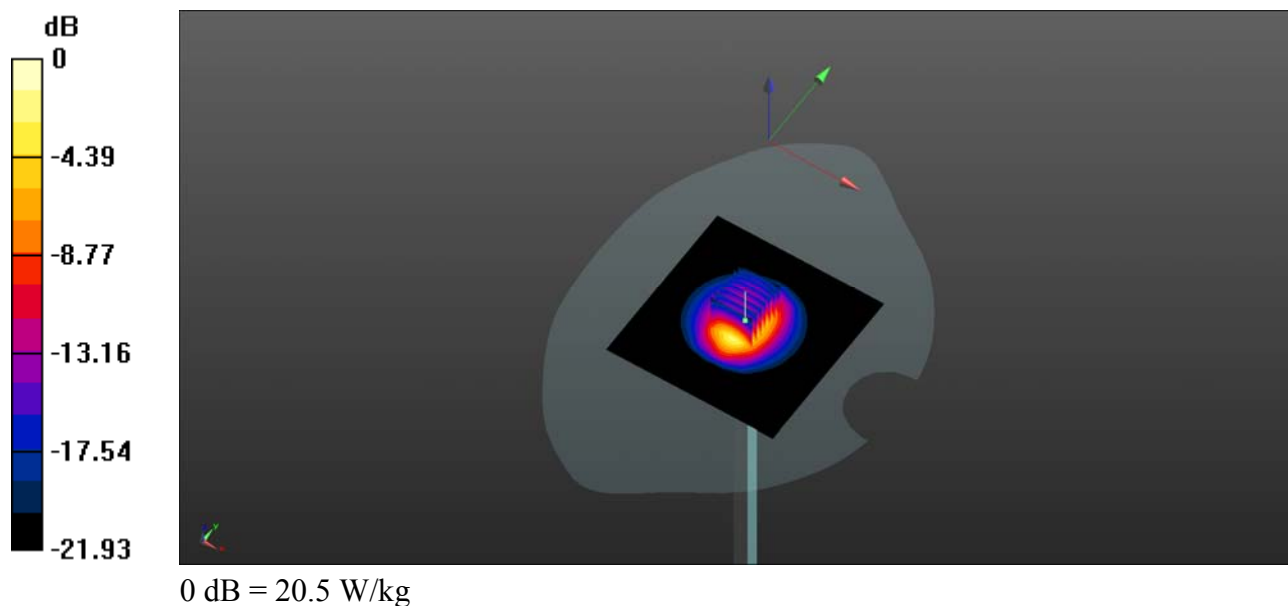

**System Check\_2600MHz\_Body\_180625**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_180625 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.178$  S/m;  $\epsilon_r = 50.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.08, 4.08, 4.08); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2600/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 15.6 W/kg



**CW 2600/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.68 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 28.7 W/kg

**SAR(1 g) = 13.26 W/kg; SAR(10 g) = 5.96 W/kg**

Maximum value of SAR (measured) = 15.6 W/kg

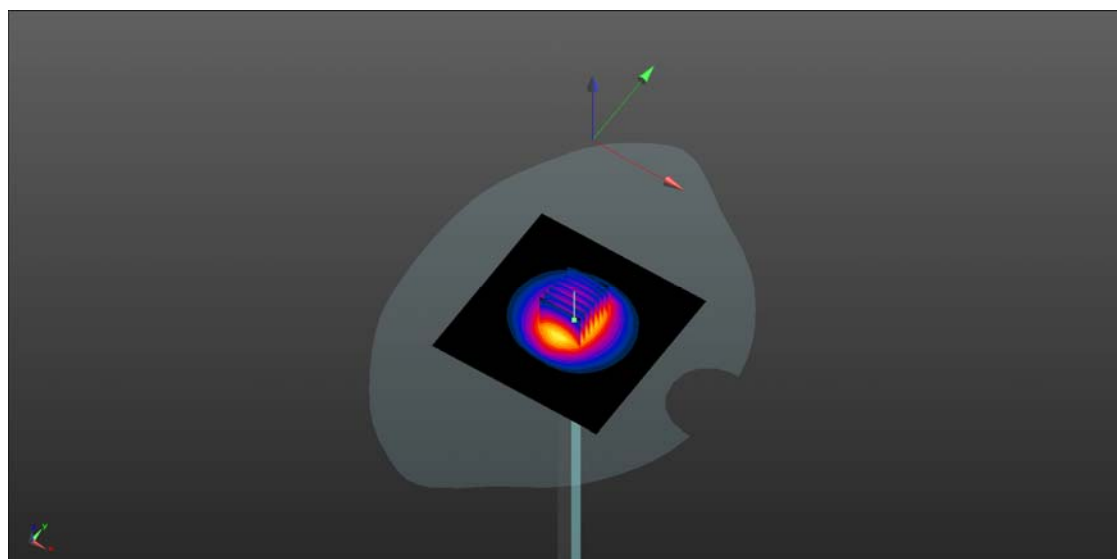

0 dB = 15.6 W/kg



REPORT No. : SZ18060250S01

## Annex D Plots of Maximum SAR Test Results

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

[Http://www.morlab.cn](http://www.morlab.cn)

E-mail: [service@morlab.cn](mailto:service@morlab.cn)

**GSM850\_GPRS(2 TX slots)\_Right Cheek\_Ch128**

Communication System: UID 0, GSM850(class 10) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: HSL\_835\_180705 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 42.374$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(6.26, 6.26, 6.26); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.262 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.786 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.768 W/kg

**SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.267 W/kg

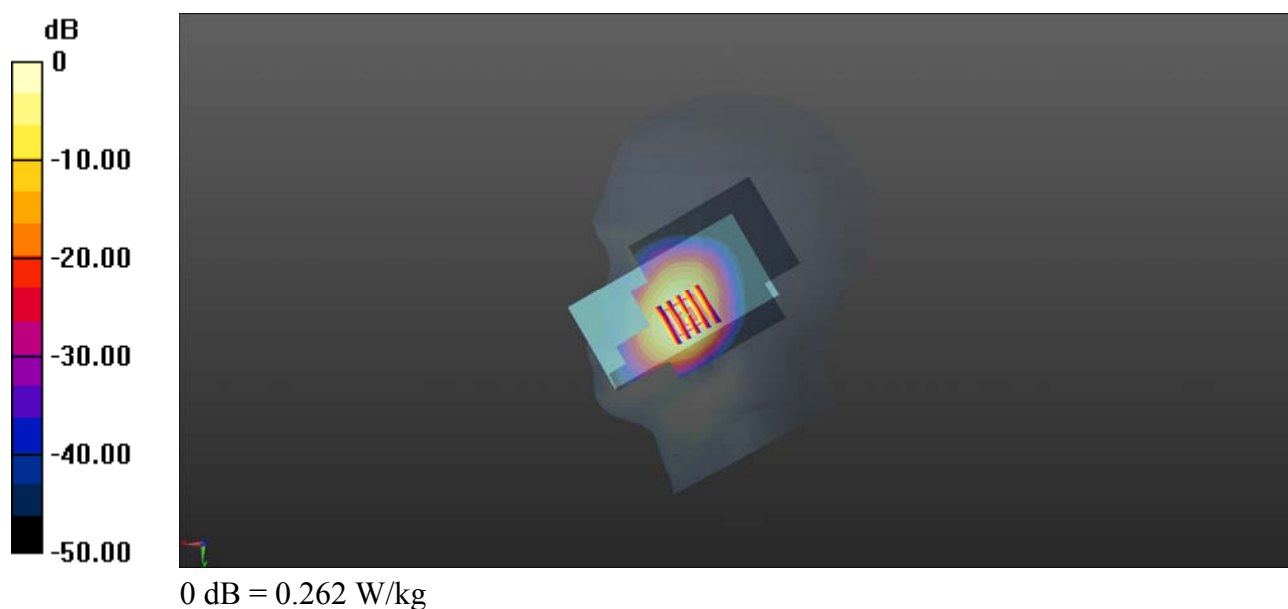



**GSM1900\_GPRS(3 TX slots)\_Right Cheek\_Ch810**

Communication System: UID 0, PCS1900(class 11) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_1900\_180703 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.471$  S/m;  $\epsilon_r = 40.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.98, 4.98, 4.98); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.310 W/kg



**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.003 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.454 W/kg

**SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.321 W/kg

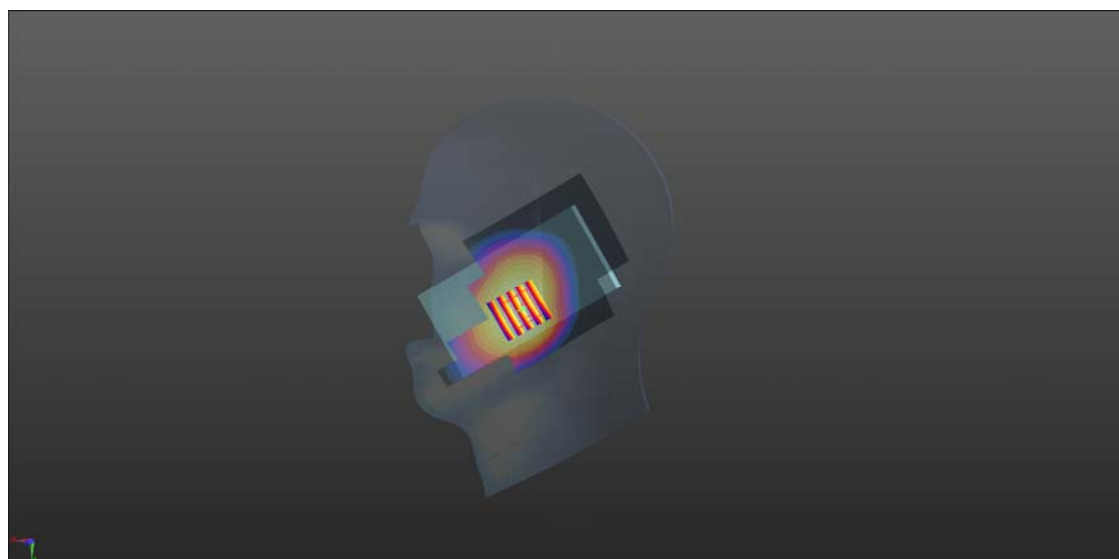

0 dB = 0.310 W/kg

**WCDMA Band II\_RMC 12.2Kbps\_Right Cheek\_Ch9262**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_180703 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 41.067$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.98, 4.98, 4.98); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.388 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.472 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.544 W/kg

**SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 0.378 W/kg

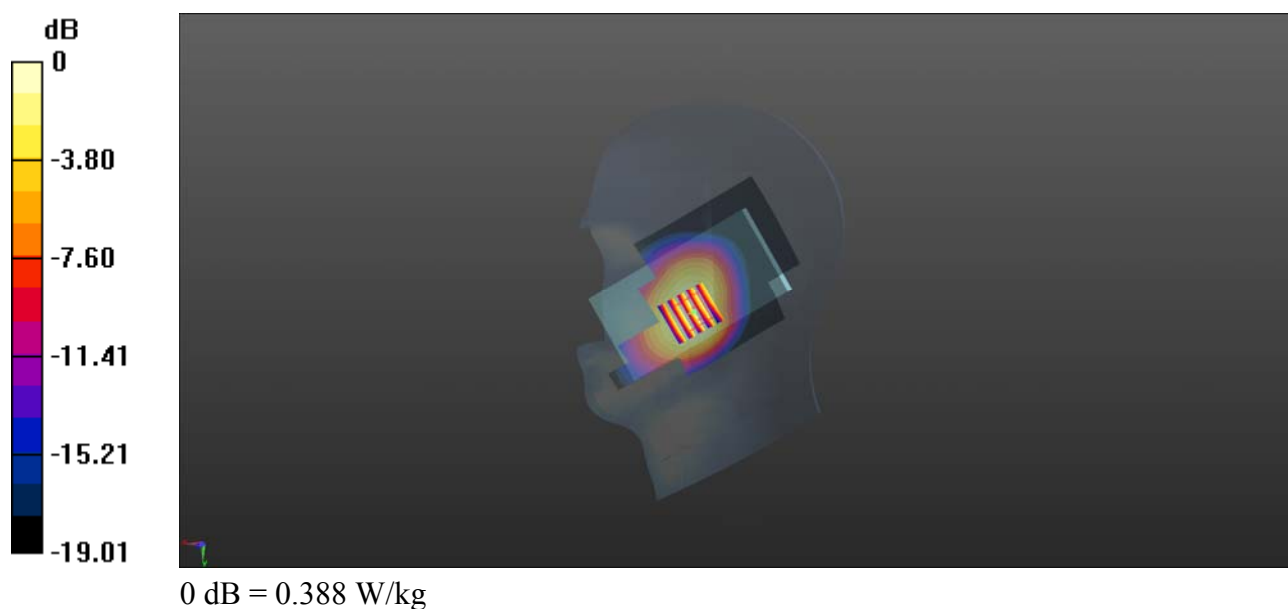

**WCDMA Band IV\_RMC 12.2Kbps\_Right Cheek\_Ch1312**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1800\_180703 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.342$  S/m;  $\epsilon_r = 41.761$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(5.15, 5.15, 5.15); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1312/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.419 W/kg


**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.845 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.549 W/kg

**SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.260 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

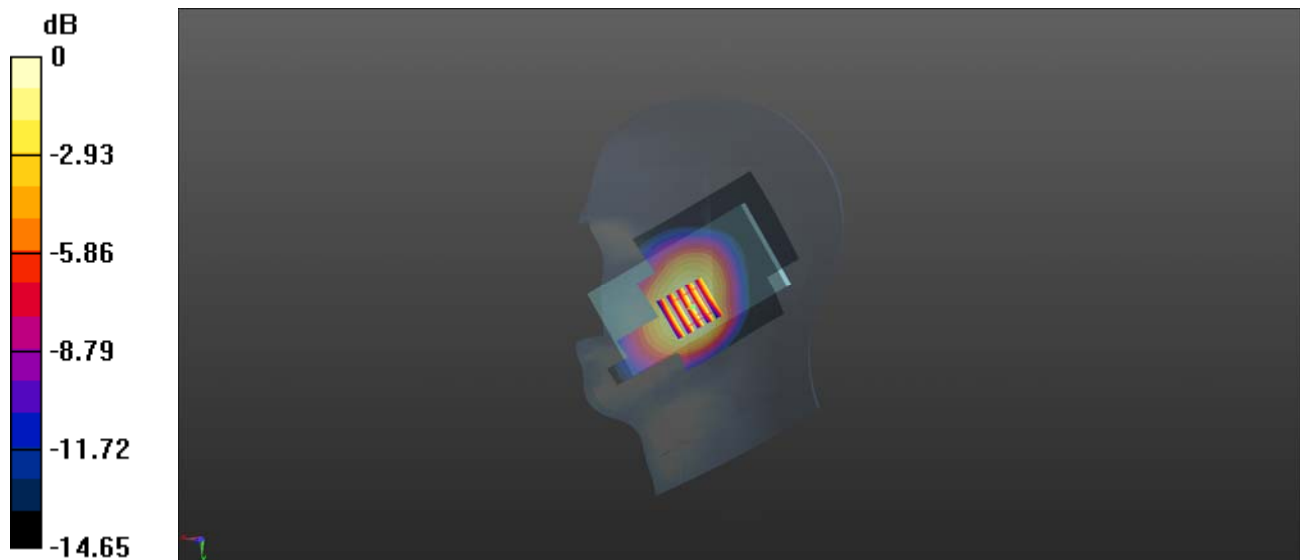

0 dB = 0.419 W/kg

**WCDMA Band V\_RMC 12.2Kbps\_Right Cheek\_Ch4182**

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_180705 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 42.26$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(6.26, 6.26, 6.26); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4182/Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.194 W/kg



**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.153 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.315 W/kg

**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.194 W/kg

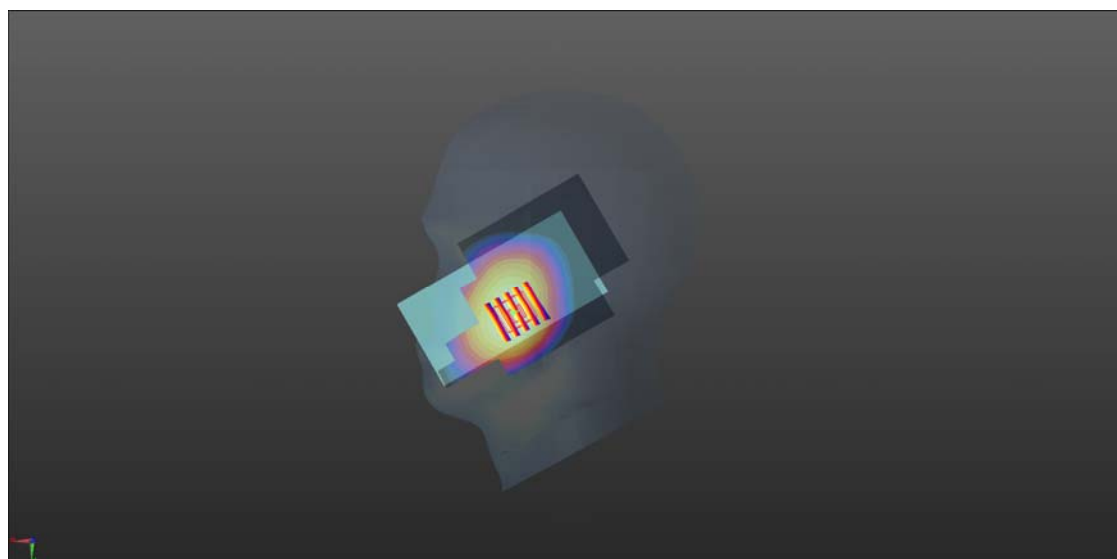

0 dB = 0.194 W/kg

**LTE Band 2\_20MHz\_QPSK\_1RB\_49Offset\_\_Right Cheek\_Ch18900**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_180703 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.438$  S/m;  $\epsilon_r = 40.969$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.98, 4.98, 4.98); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18700/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.404 W/kg



**Ch18700/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.475 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.563 W/kg

**SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.235 W/kg**

Maximum value of SAR (measured) = 0.405 W/kg

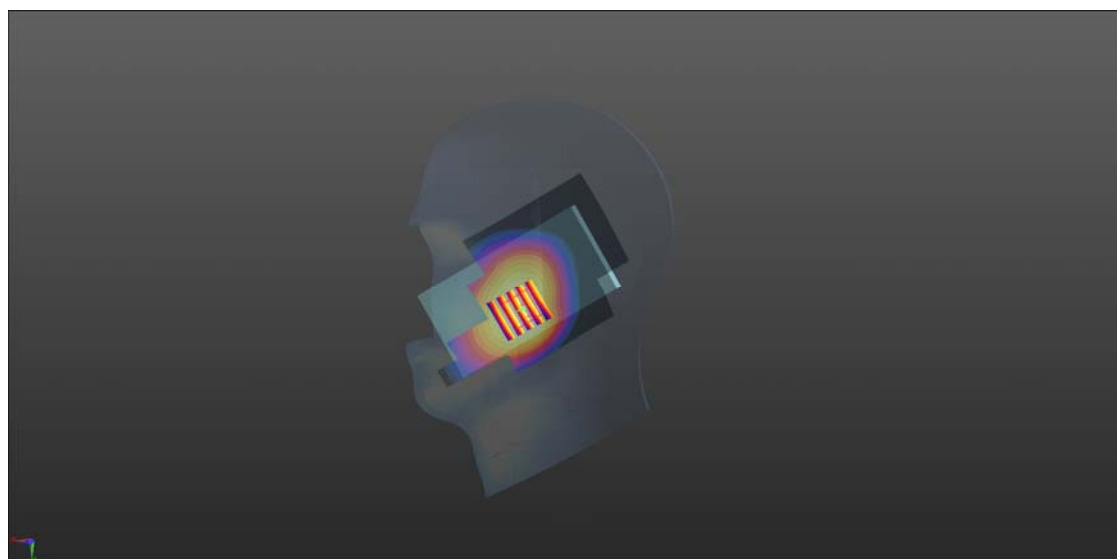

0 dB = 0.404 W/kg

**LTE Band 4\_20MHz\_QPSK\_50RB\_0Offset\_\_Right Cheek\_Ch20050**

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL\_1800\_180703 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.35$  S/m;  $\epsilon_r = 41.723$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(5.15, 5.15, 5.15); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20050/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.229 W/kg


**Ch20050/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.819 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.307 W/kg

**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.226 W/kg

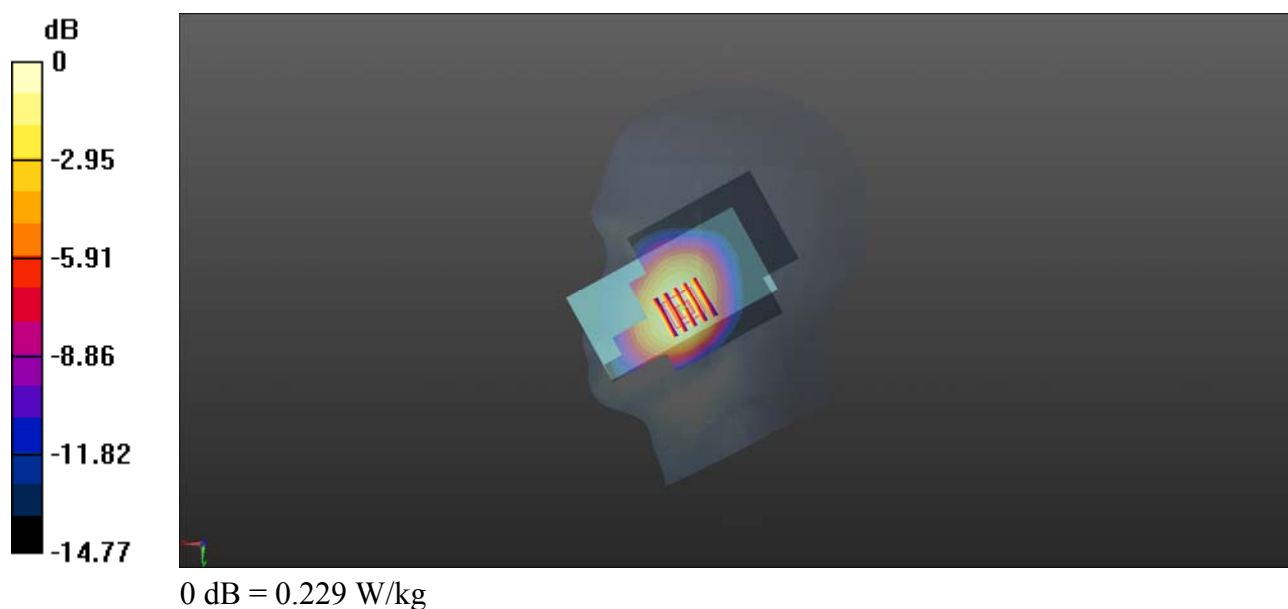

**LTE Band 7\_20MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch21100**

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_180704 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.804$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21100/Area Scan (81x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.330 W/kg


**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.615 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.618 W/kg

**SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.159 W/kg**

Maximum value of SAR (measured) = 0.349 W/kg

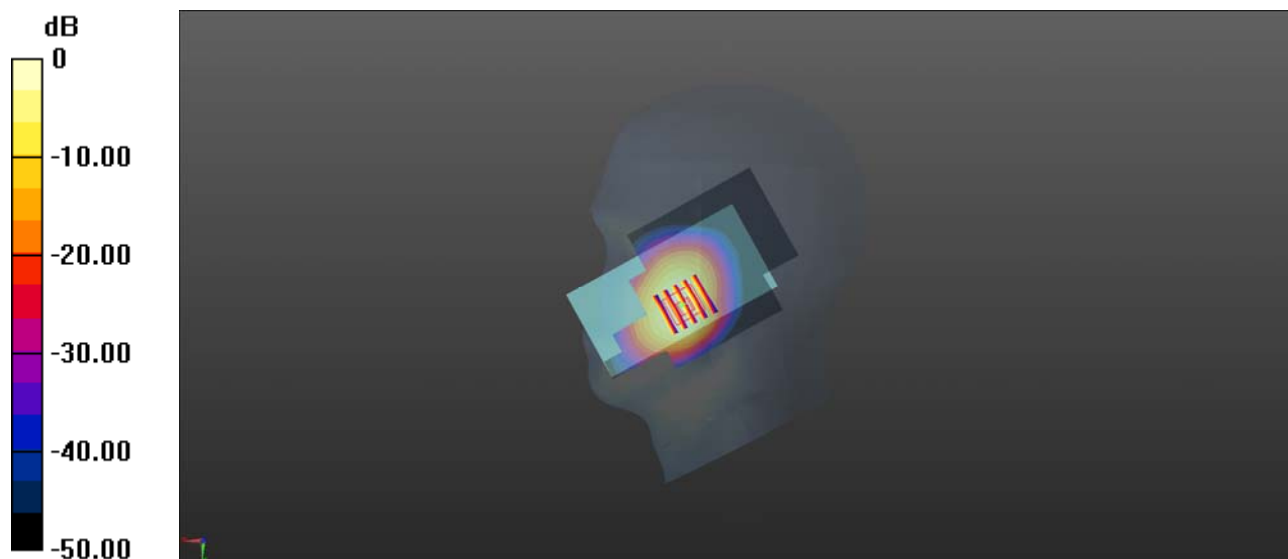

0 dB = 0.330 W/kg

**WLAN 2.4GHz\_802.11b 1Mbps\_Left Tilt\_Ch6**

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_180704 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.815$  S/m;  $\epsilon_r = 39.95$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 2; Type: QD000P40CC; Serial: TP:1464
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.652 W/kg



**Ch6/Zoom Scan (5x5x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.601 W/kg

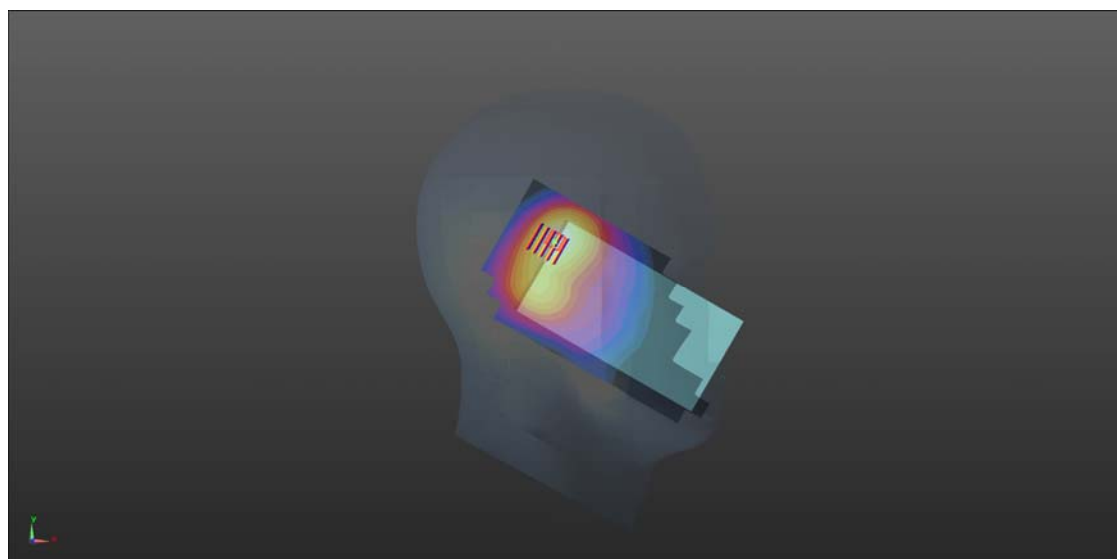

0 dB = 0.652 W/kg



**GSM850\_GPRS(2 TX slots)\_Back Side\_10mm\_Ch128**

Communication System: UID 0, GSM850(class 10) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_180706 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 54.481$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(6.22, 6.22, 6.22); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.307 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.64 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.435 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 0.311 W/kg

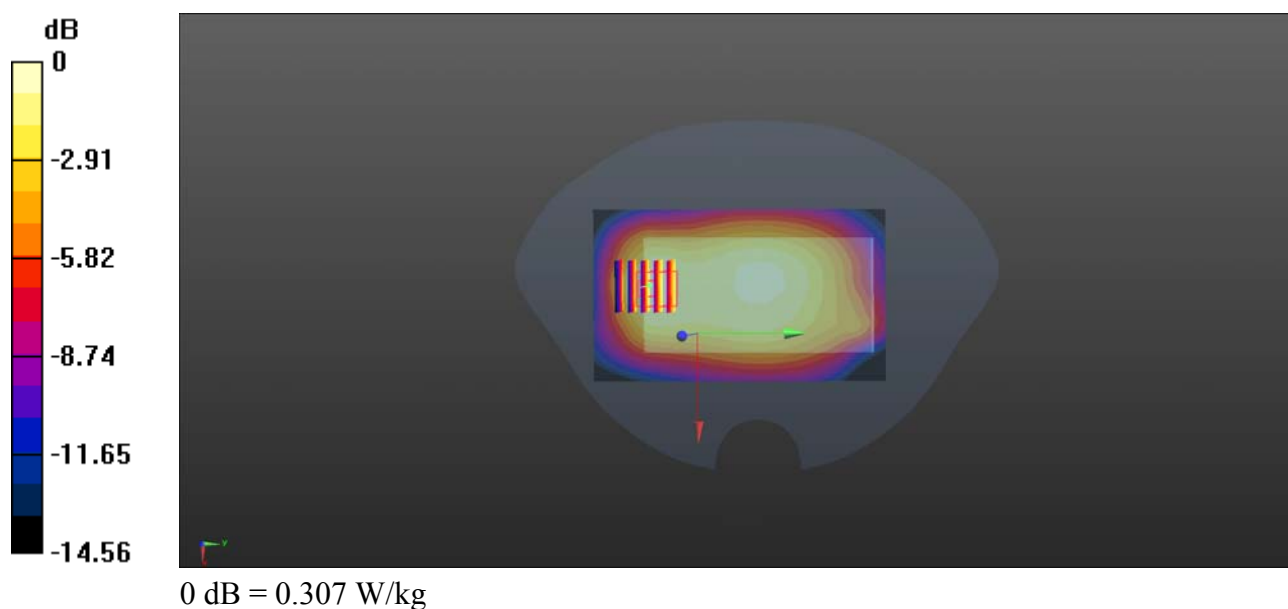

**GSM1900\_GPRS(3 TX slots)\_Bottom Side\_10mm\_Ch512**

Communication System: UID 0, PCS1900(class 11) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 52.577$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch512/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.07 W/kg


**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.00 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.471 W/kg**

Maximum value of SAR (measured) = 0.980 W/kg

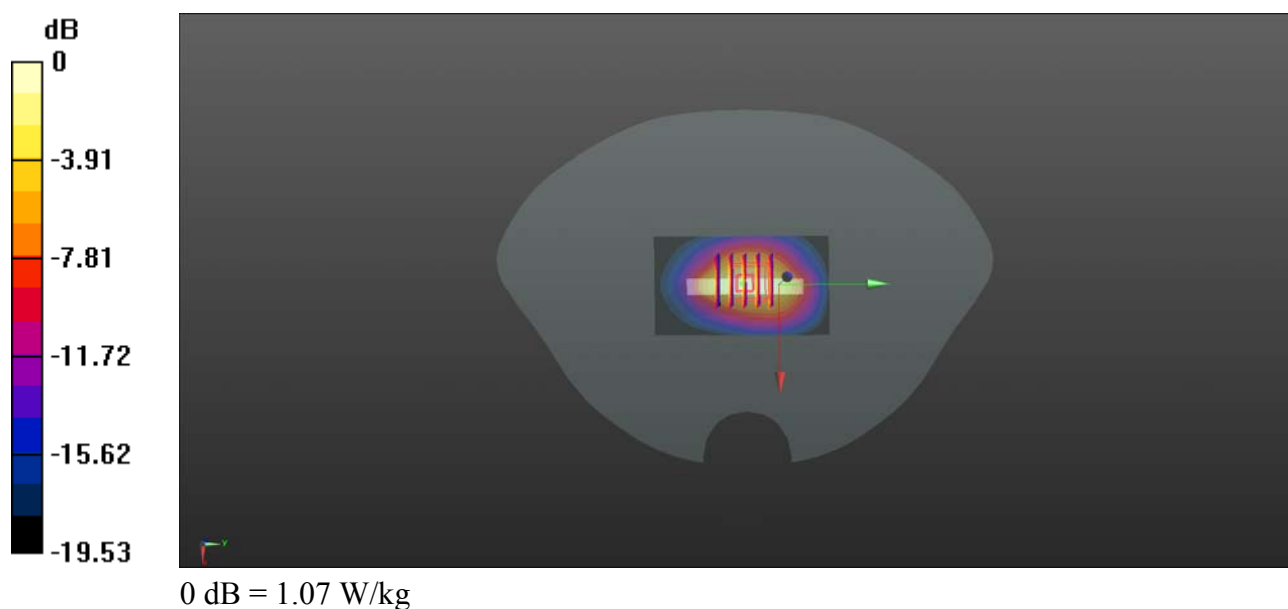

**WCDMA Band II\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch9262**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_180702 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.478$  S/m;  $\epsilon_r = 52.57$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.13 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.525 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

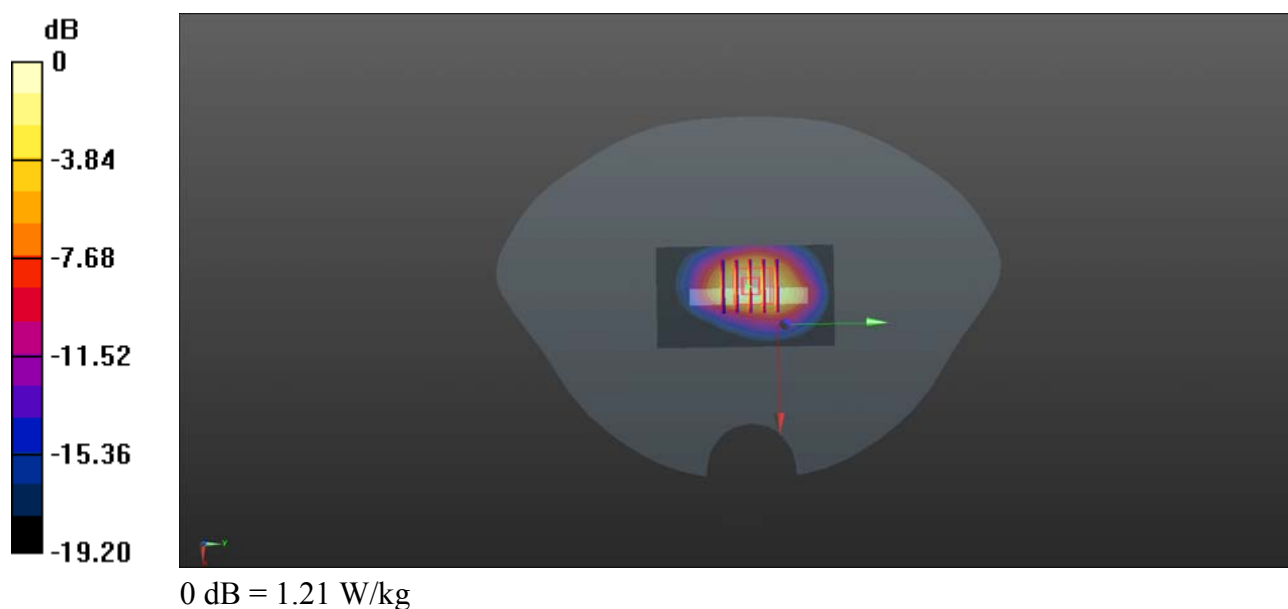

**WCDMA Band IV\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch1312**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.451$  S/m;  $\epsilon_r = 54.225$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1312/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.00 W/kg


**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.82 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.485 W/kg**

Maximum value of SAR (measured) = 0.938 W/kg

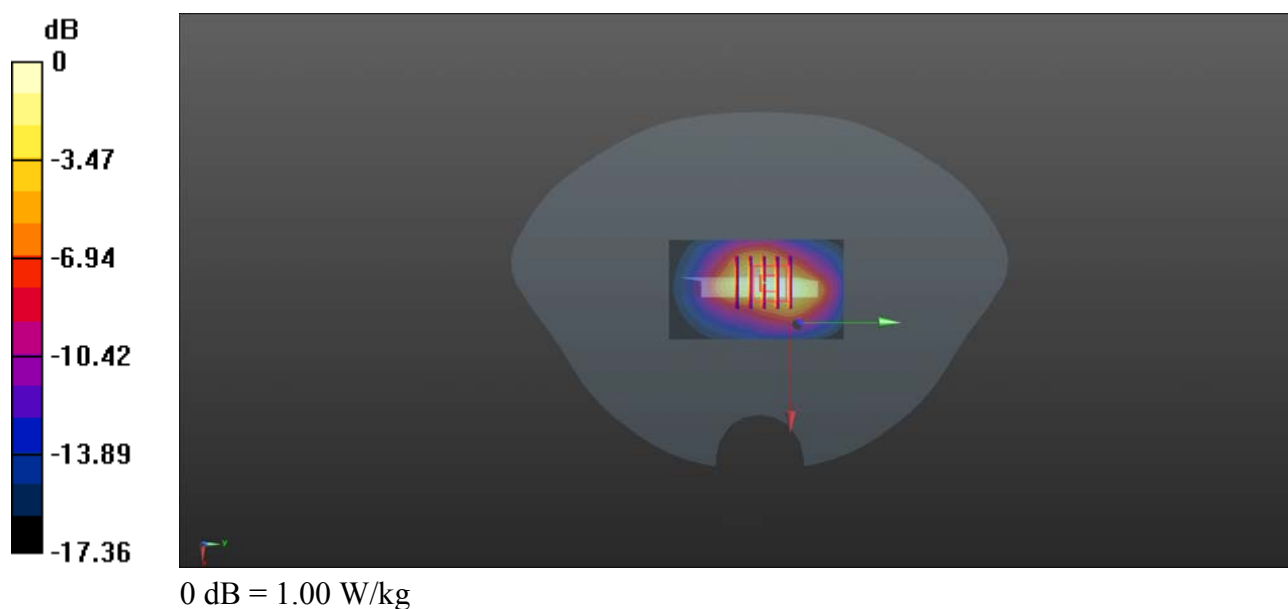

**WCDMA Band V\_RMC 12.2Kbps\_Back Side\_10mm\_Ch4182**

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_180706 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 54.317$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(6.22, 6.22, 6.22); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4182/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.276 W/kg


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.01 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.331 W/kg

**SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

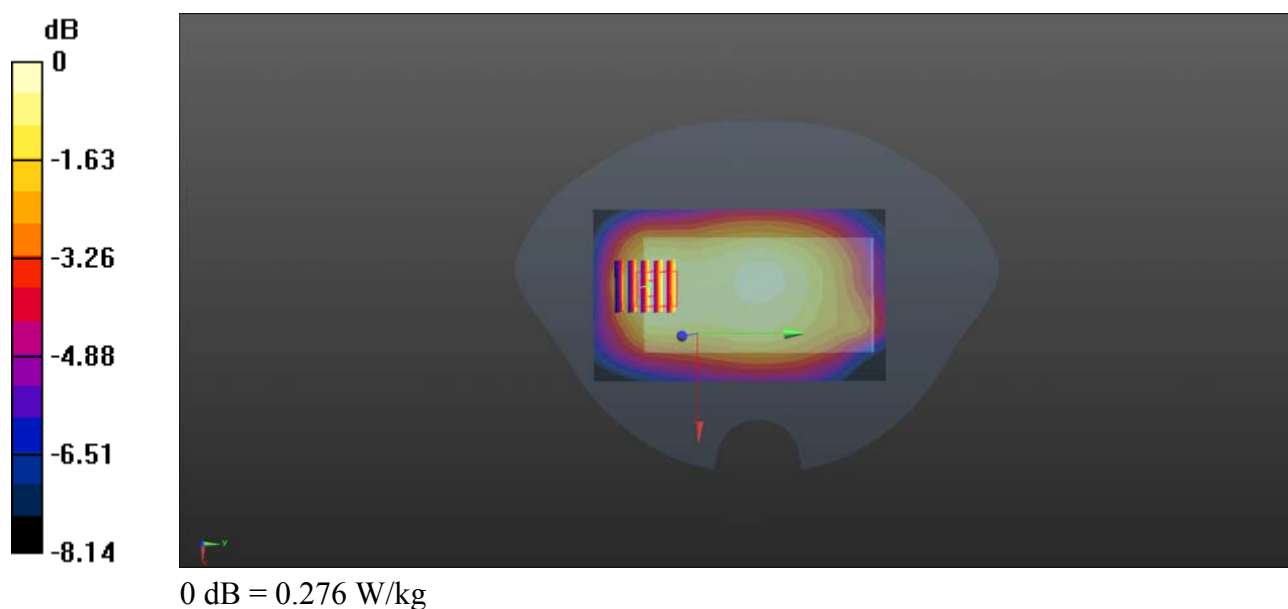

**LTE Band 2\_20MHz\_QPSK\_1RB\_49Offset\_Bottom Side\_10mm\_Ch18900**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.509$  S/m;  $\epsilon_r = 52.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.857 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.79 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.396 W/kg**

Maximum value of SAR (measured) = 0.833 W/kg

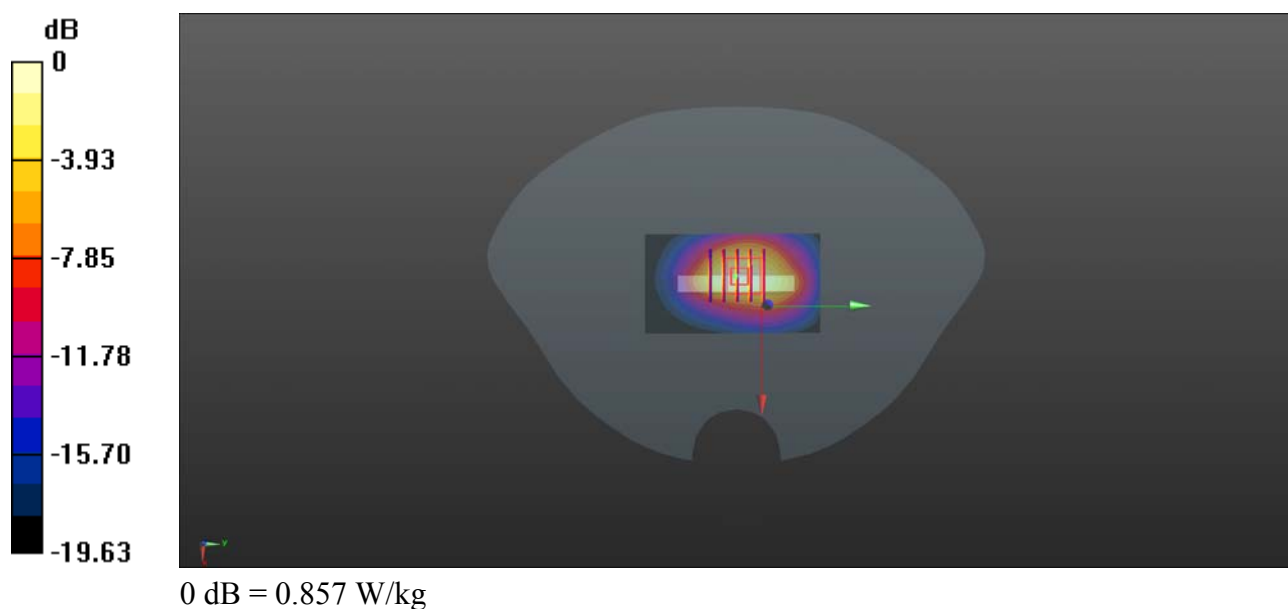

**LTE Band 4\_20MHz\_QPSK\_50RB\_0Offset\_Back Side\_10mm\_Ch20050**

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.458$  S/m;  $\epsilon_r = 54.195$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20050/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.735 W/kg


**Ch20050/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.860 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.398 W/kg**

Maximum value of SAR (measured) = 0.785 W/kg

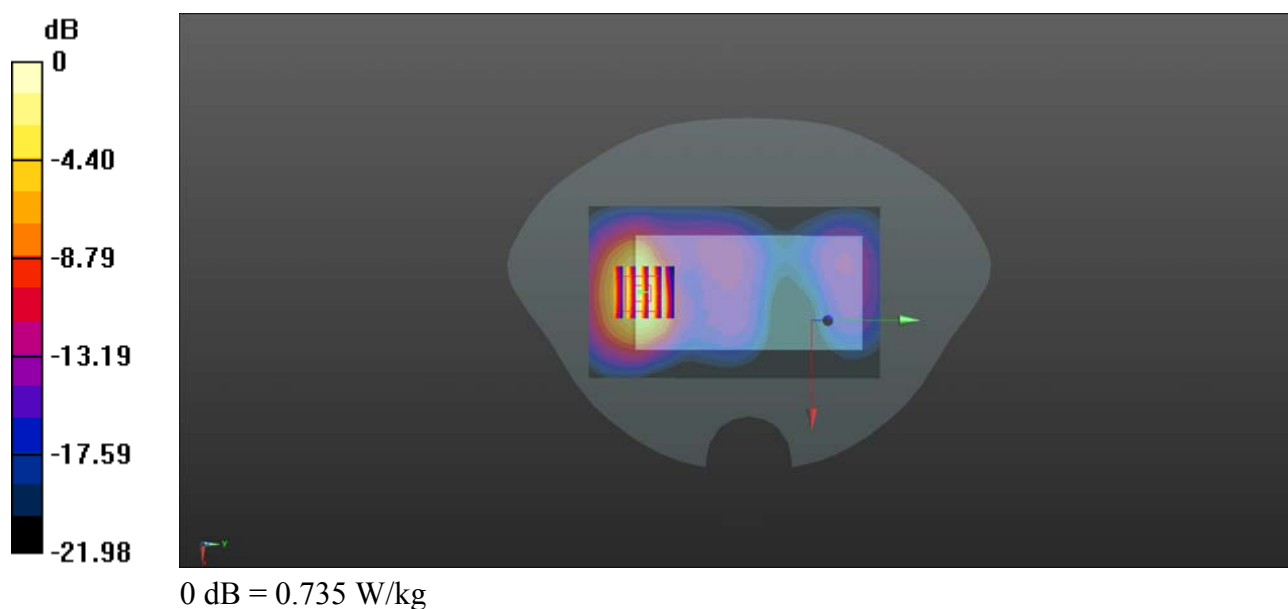

**LTE Band 7\_20MHz\_QPSK\_1RB\_0Offset\_Bottom Side\_10mm\_Ch21350**

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_180625 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.132$  S/m;  $\epsilon_r = 51.063$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.08, 4.08, 4.08); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21350/Area Scan (51x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.08 W/kg



**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.26 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.86 W/kg

**SAR(1 g) = 0.916 W/kg; SAR(10 g) = 0.432 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

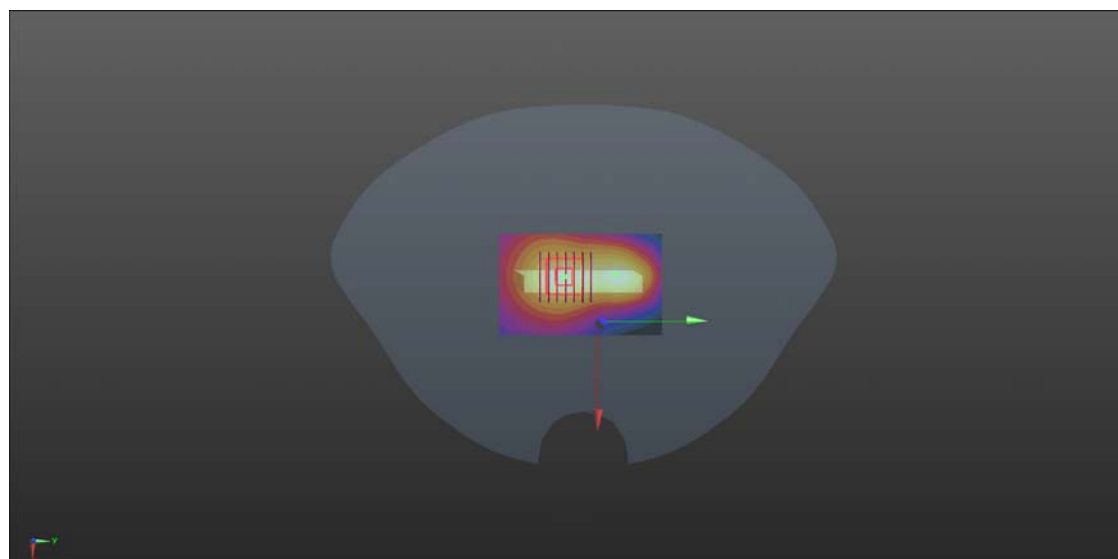

0 dB = 1.08 W/kg



**WLAN 2.4GHz\_802.11b 1Mbps\_Back Side\_10mm\_Ch6**

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_180706 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.019$  S/m;  $\epsilon_r = 50.692$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.28, 4.28, 4.28); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.266 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.054 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.466 W/kg

**SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.264 W/kg

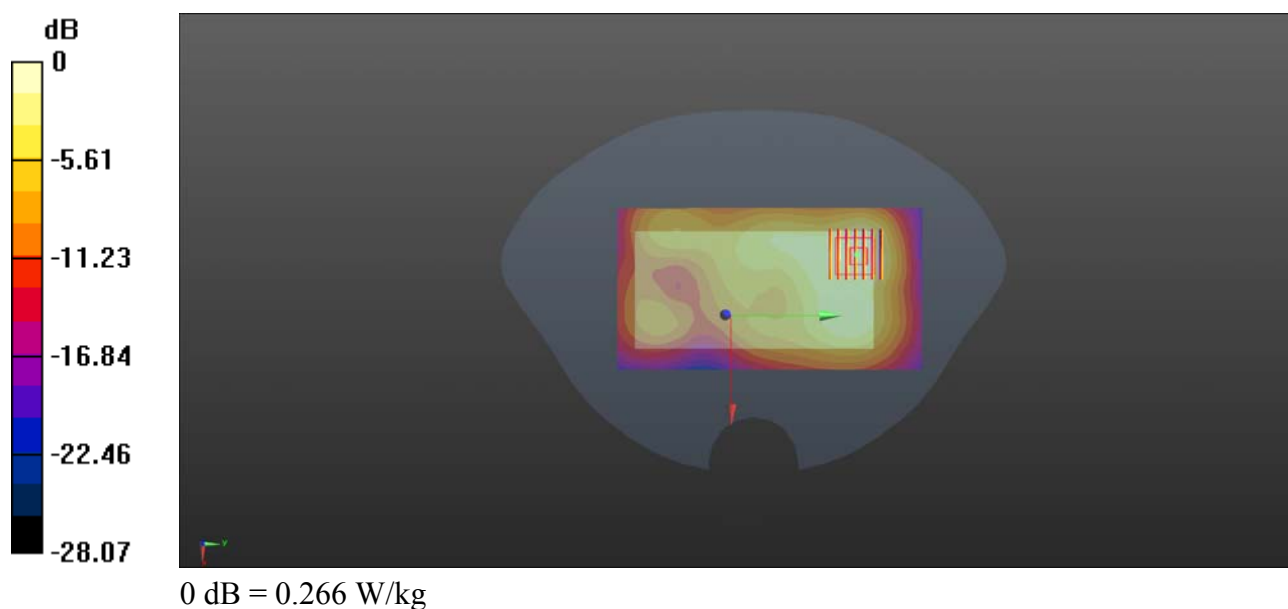

**GSM850\_GPRS(2 TX slots)\_Back Side\_15mm\_Ch128**

Communication System: UID 0, GSM850(class 10) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_180706 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 54.481$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(6.22, 6.22, 6.22); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.273 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.62 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.209 W/kg

**SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.276 W/kg

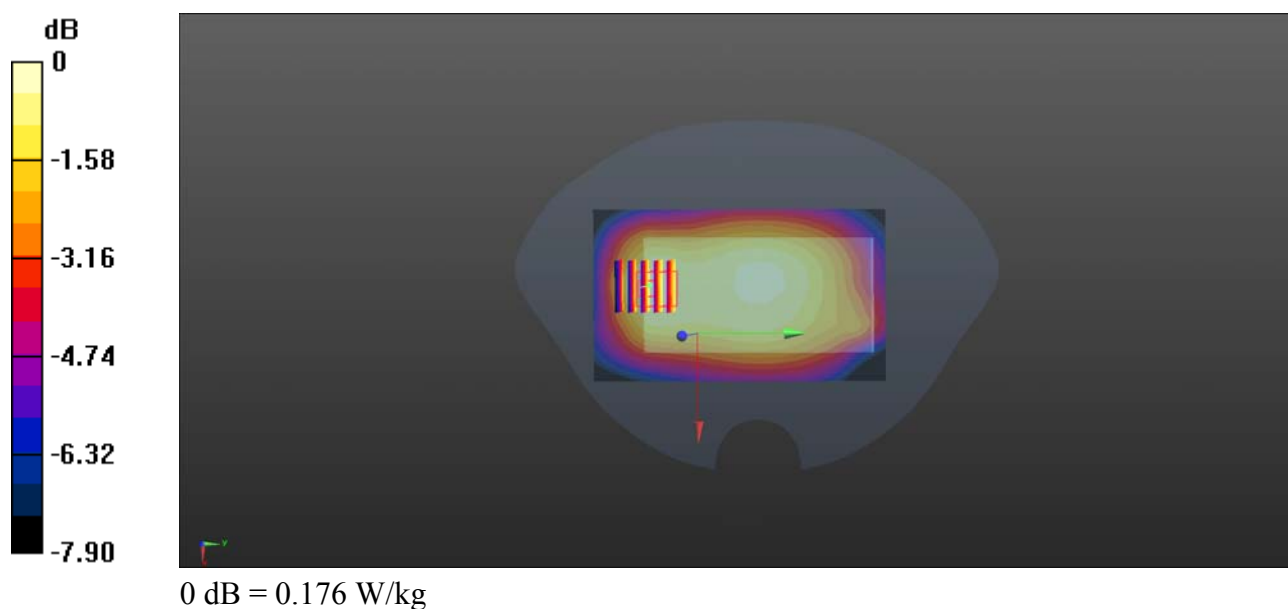

**GSM1900\_GPRS(3 TX slots)\_Back Side\_15mm\_Ch810**

Communication System: UID 0, PCS1900(class 11) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.543$  S/m;  $\epsilon_r = 52.372$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.664 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.706 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.338 W/kg**

Maximum value of SAR (measured) = 0.609 W/kg

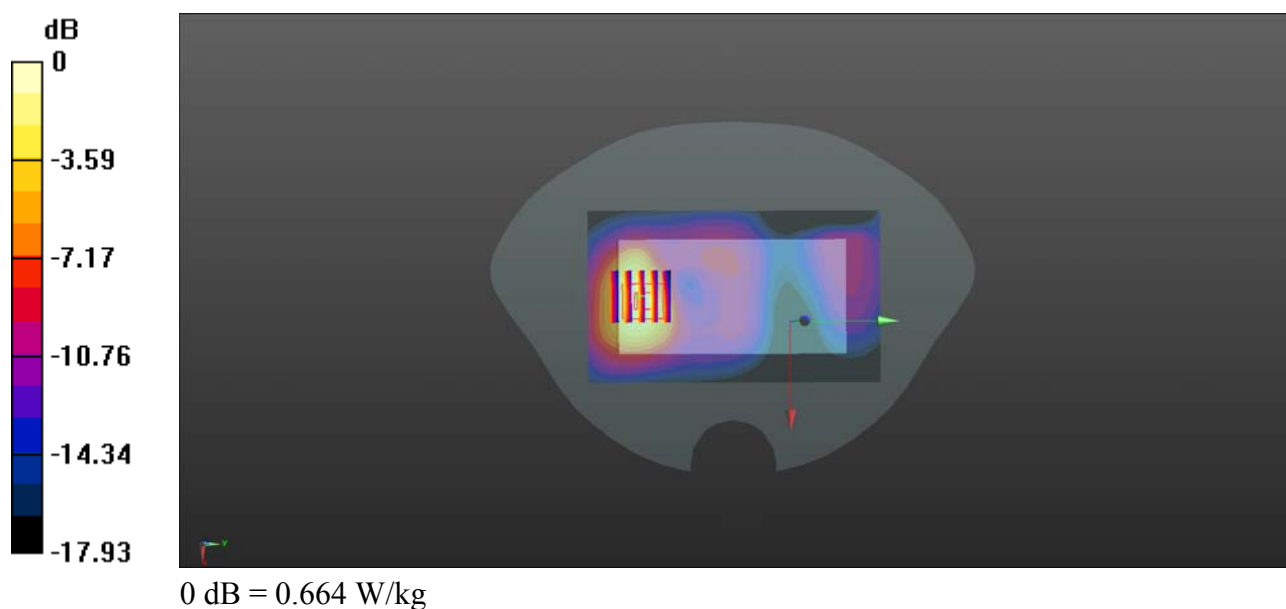

**WCDMA Band II\_RMC 12.2Kbps\_Back Side\_15mm\_Ch9262**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.478$  S/m;  $\epsilon_r = 52.57$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.159 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.557 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

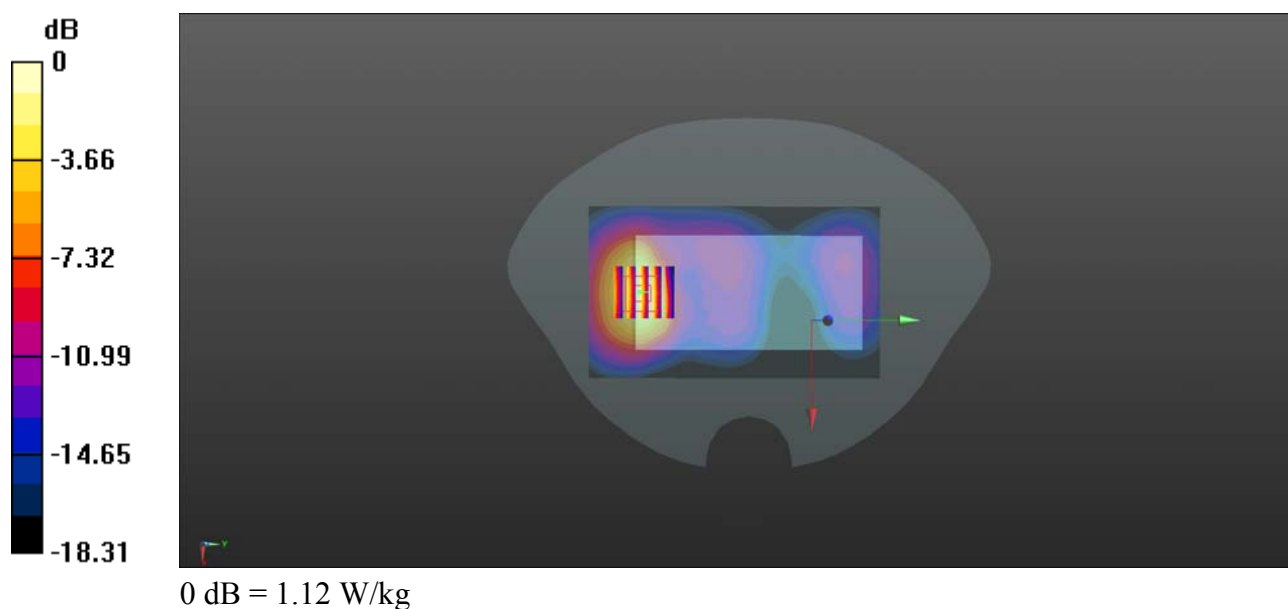

**WCDMA Band IV\_RMC 12.2Kbps\_Back Side\_15mm\_Ch1312**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.451$  S/m;  $\epsilon_r = 54.225$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1312/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.680 W/kg


**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.894 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.332 W/kg**

Maximum value of SAR (measured) = 0.666 W/kg

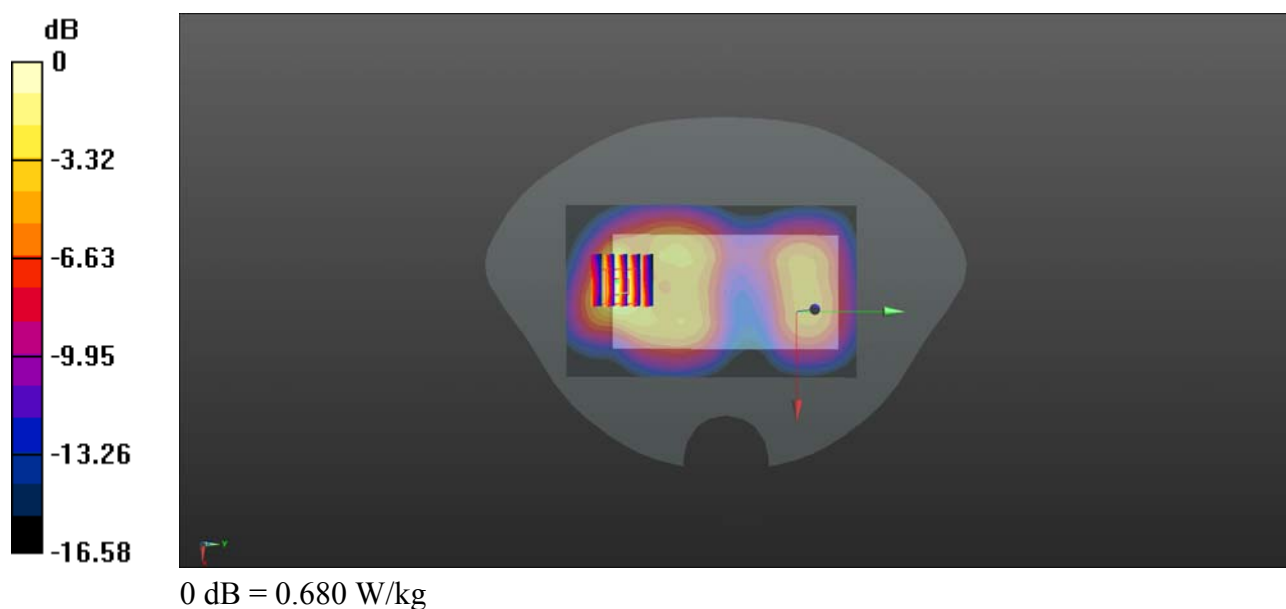

**WCDMA Band V\_RMC 12.2Kbps\_Back Side\_15mm\_Ch4182**

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_180706 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 54.317$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(6.22, 6.22, 6.22); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4182/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.235 W/kg


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.79 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.280 W/kg

**SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.233 W/kg

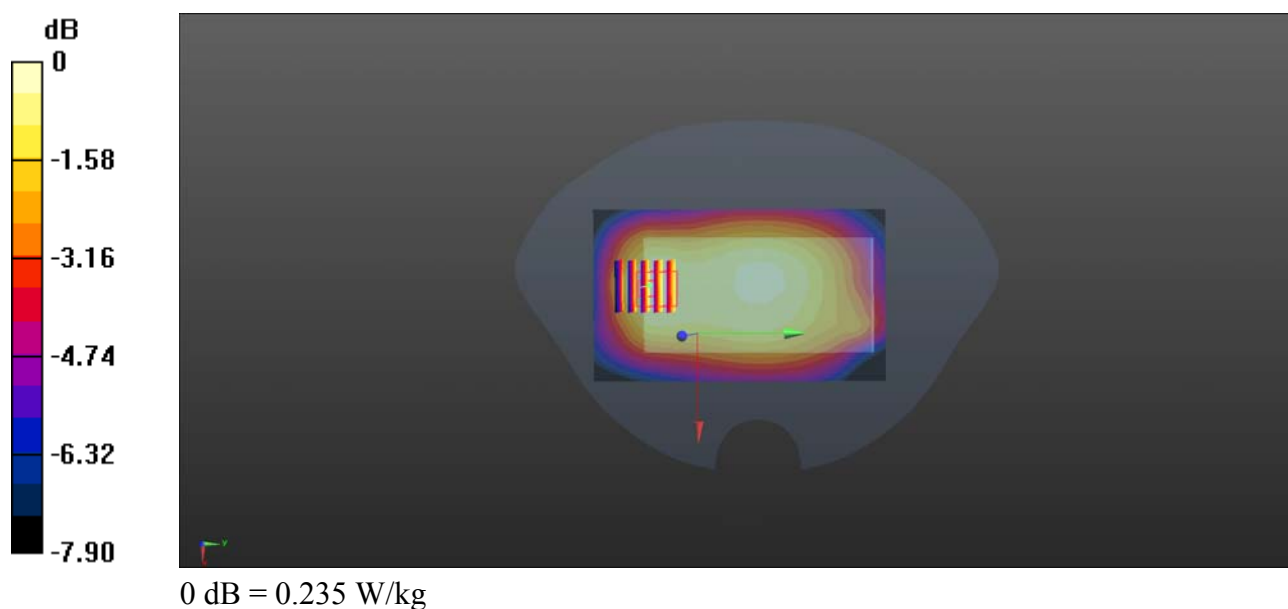

**LTE Band 2\_20MHz\_QPSK\_1RB\_49Offset\_Back Side\_15mm\_Ch18700**

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.486$  S/m;  $\epsilon_r = 52.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18700/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


**Ch18700/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.277 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.562 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

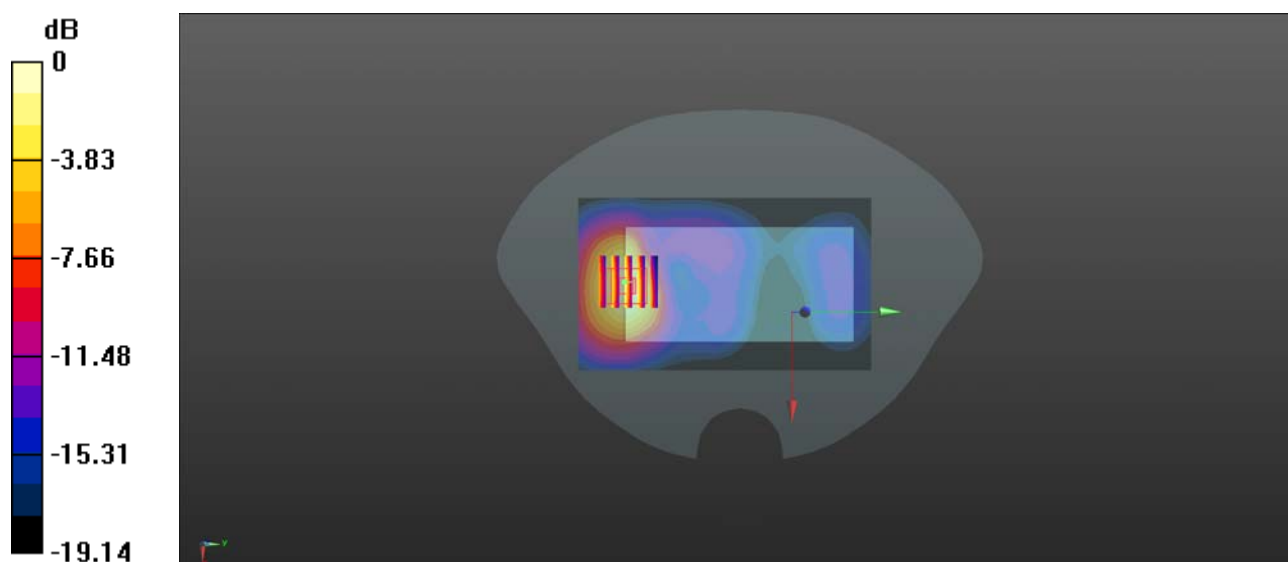

0 dB = 1.16 W/kg = 0.64 dBW/kg

**LTE Band 4\_20MHz\_QPSK\_1RB\_49Offset\_Back Side\_15mm\_Ch20175**

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.471$  S/m;  $\epsilon_r = 54.146$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.367 W/kg


**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.491 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.604 W/kg

**SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.202 W/kg**

Maximum value of SAR (measured) = 0.395 W/kg

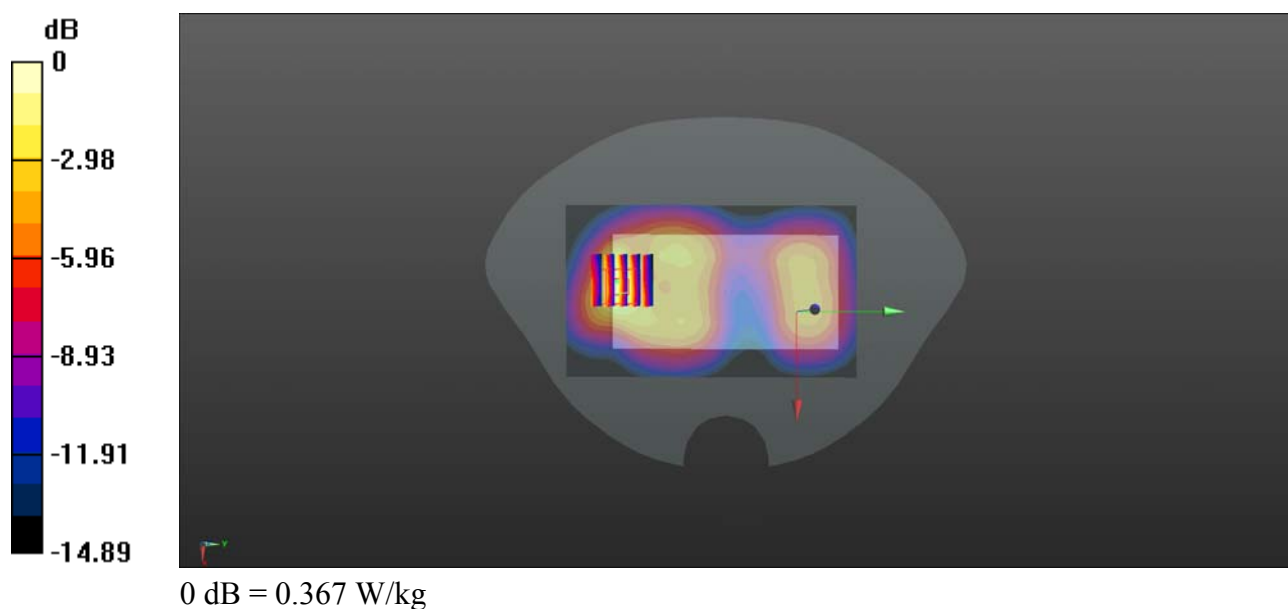



**LTE Band 7\_20MHz\_QPSK\_1RB\_0Offset\_Front Side\_15mm\_Ch21100**

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_180625 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.106$  S/m;  $\epsilon_r = 51.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.28, 4.28, 4.28); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21100/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.316 W/kg


**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.386 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.547 W/kg

**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.312 W/kg

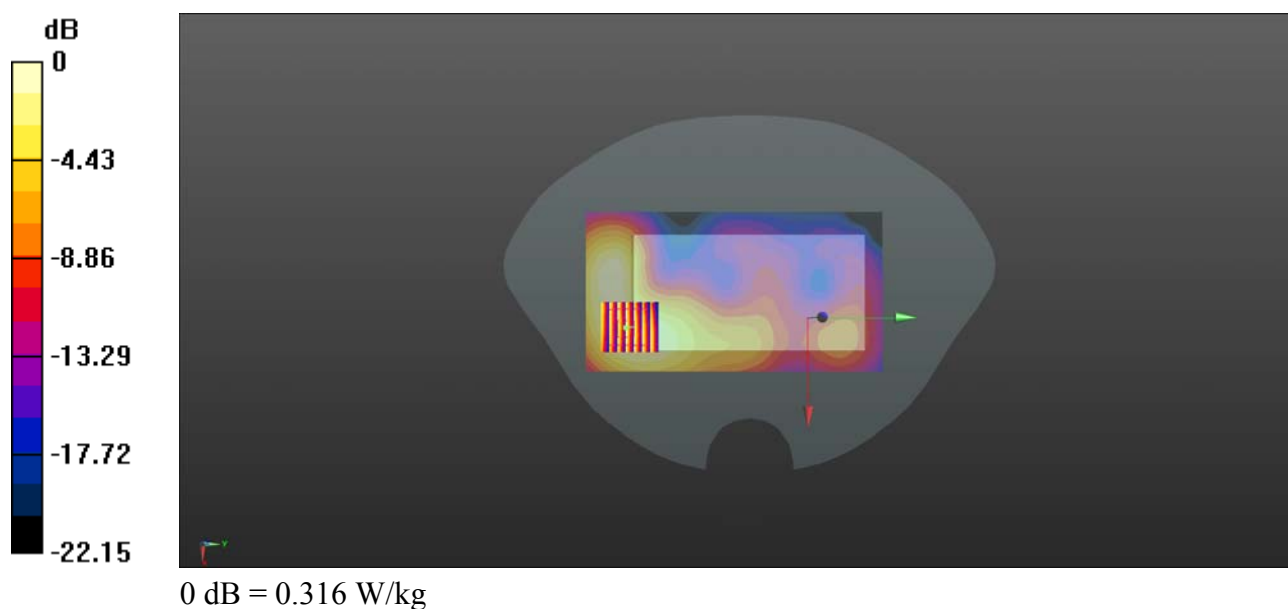

**WLAN 2.4GHz\_802.11b 1Mbps\_Back Side\_15mm\_Ch6**

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_180706 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 2.019$  S/m;  $\epsilon_r = 50.692$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.28, 4.28, 4.28); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.118 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.334 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.116 W/kg

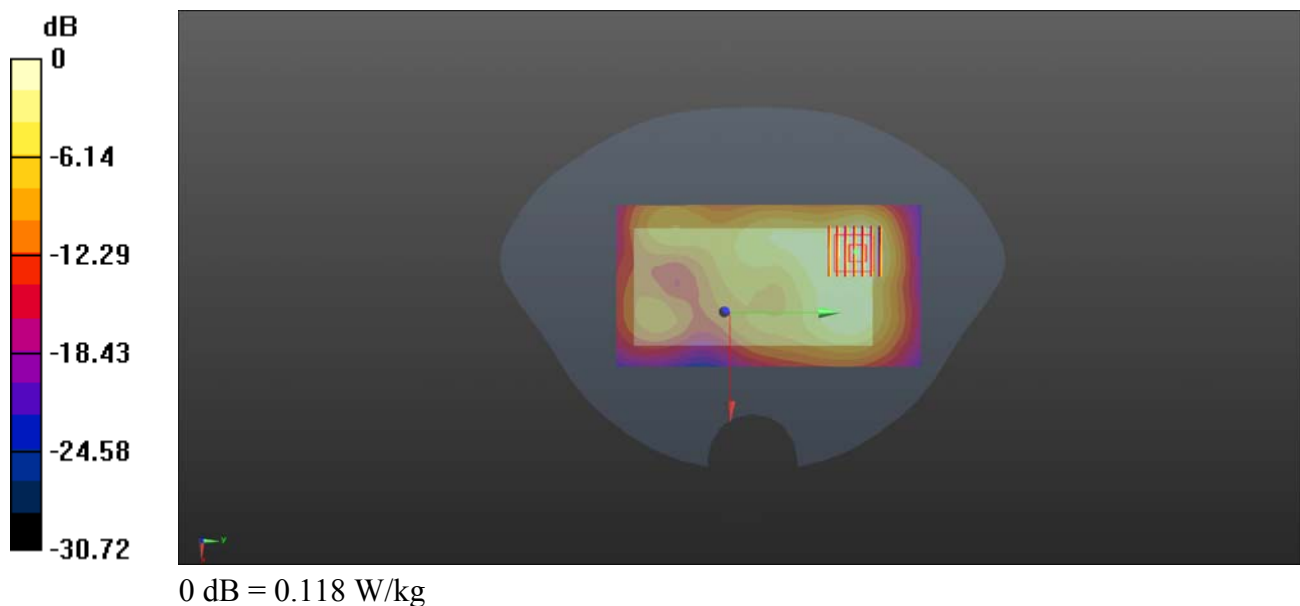

**GSM1900\_GPRS(3 TX slots)\_Back Side\_0mm\_Ch512**

Communication System: UID 0, PCS1900(class 11) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 52.577$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch512/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.15 W/kg


**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.153 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 10.2 W/kg

**SAR(1 g) = 3.39 W/kg; SAR(10 g) = 1.33 W/kg**

Maximum value of SAR (measured) = 3.10 W/kg

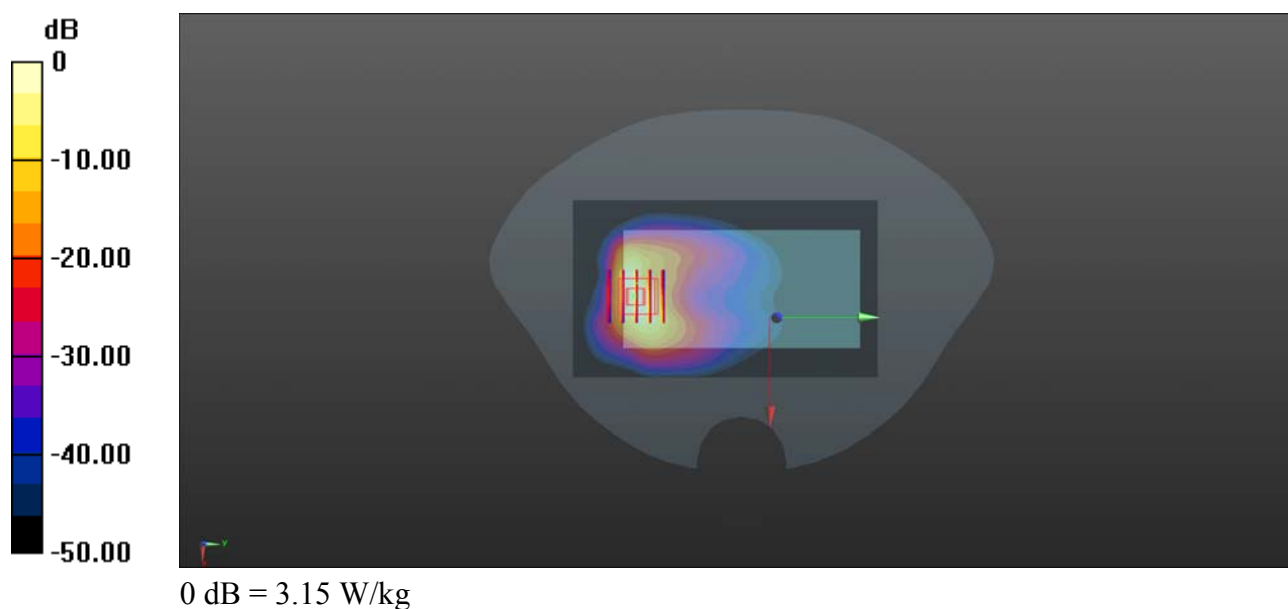

**GSM1900\_GPRS(3 TX slots)\_Back Side\_0mm\_Ch512\_Without device holder**

Communication System: UID 0, PCS1900(class 11) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 52.577$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch512/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.13 W/kg


**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.155 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 10.3 W/kg

**SAR(1 g) = 3.387 W/kg; SAR(10 g) = 1.328 W/kg**

Maximum value of SAR (measured) = 3.12 W/kg

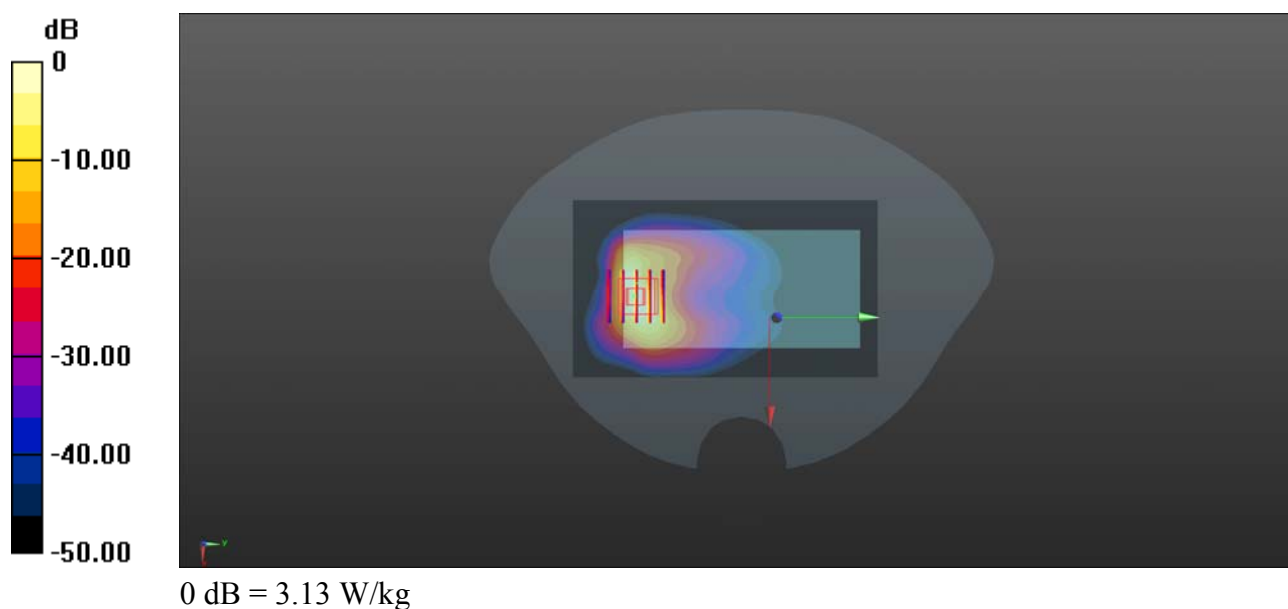

**WCDMA Band II\_RMC 12.2Kbps\_Back Side\_0mm\_Ch9262**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.478$  S/m;  $\epsilon_r = 52.57$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.30 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.591 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.47 W/kg

**SAR(1 g) = 2.58 W/kg; SAR(10 g) = 1.18 W/kg**

Maximum value of SAR (measured) = 3.13 W/kg

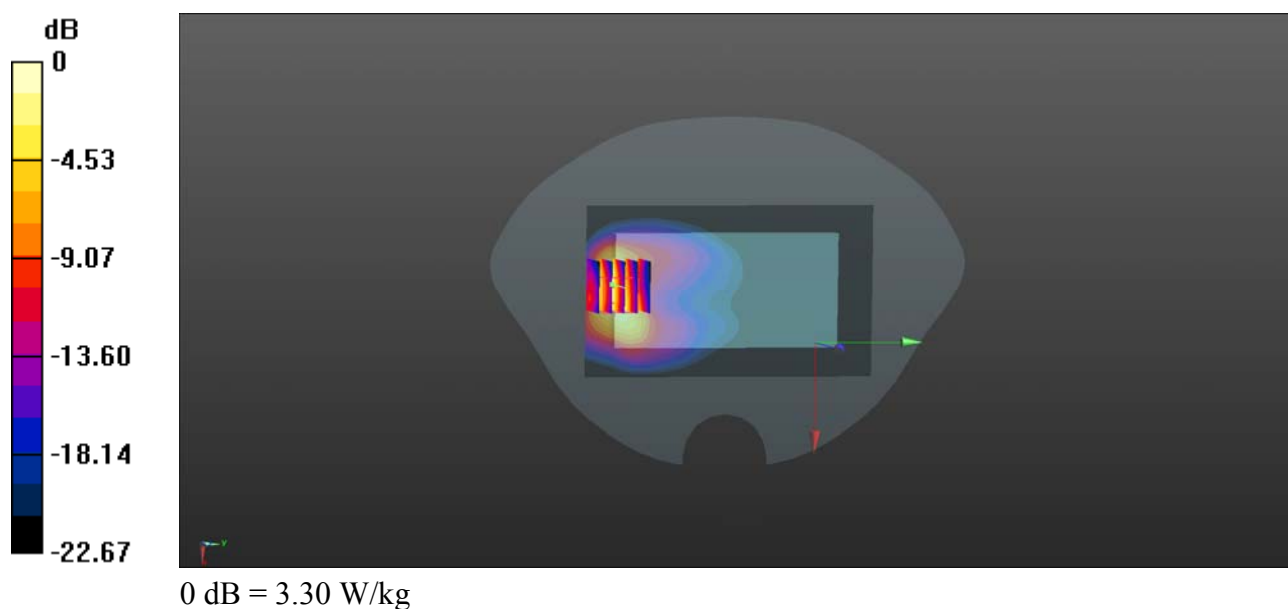

**LTE Band 2\_20MHz\_QPSK\_1RB\_49Offset\_Back Side\_0mm\_Ch18900**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.509$  S/m;  $\epsilon_r = 52.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.29 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.958 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.58 W/kg

**SAR(1 g) = 2.11 W/kg; SAR(10 g) = 0.984 W/kg**

Maximum value of SAR (measured) = 2.65 W/kg

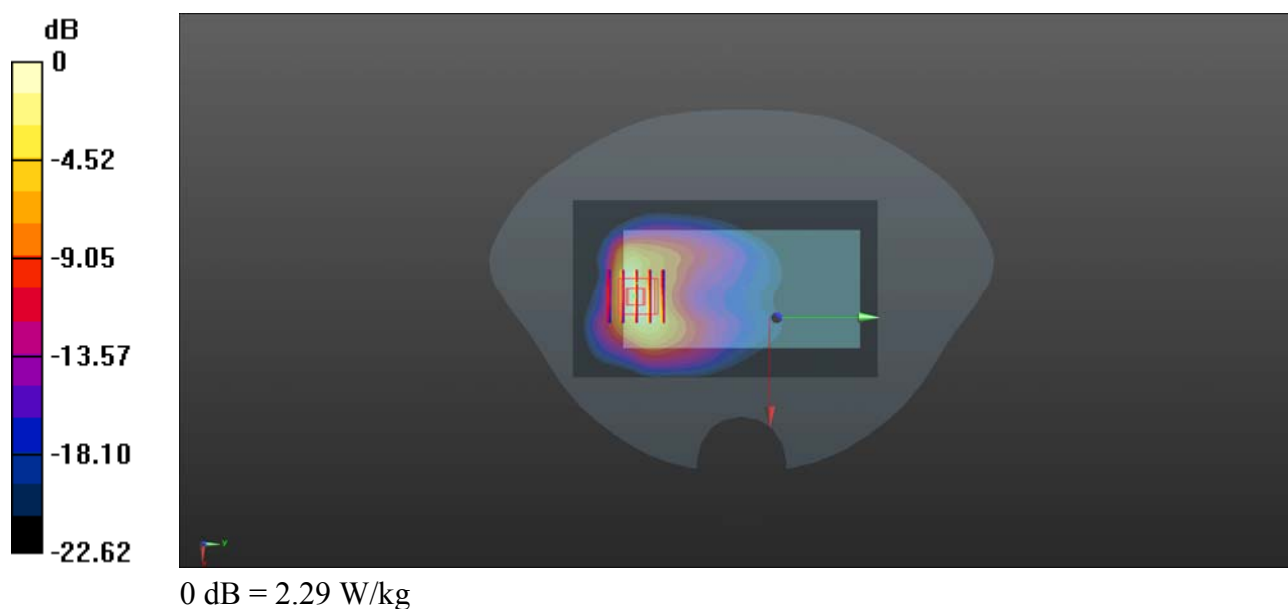

**GSM1900\_GPRS(3 TX slots)\_Bottom Side\_10mm\_Ch512\_Repeated**

Communication System: UID 0, PCS1900(class 11) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 52.577$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch512/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.427 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

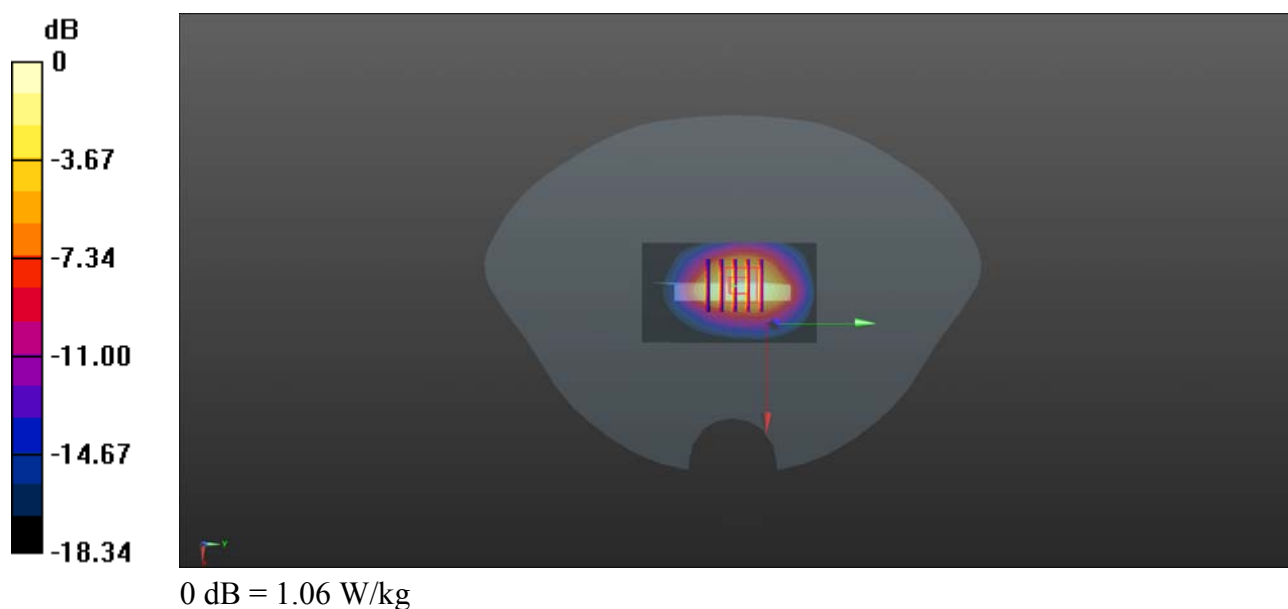

**WCDMA Band II\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch9262\_Repeated**


Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.478$  S/m;  $\epsilon_r = 52.57$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.14 W/kg

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.61 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.61 W/kg  
**SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.498 W/kg**  
Maximum value of SAR (measured) = 1.03 W/kg

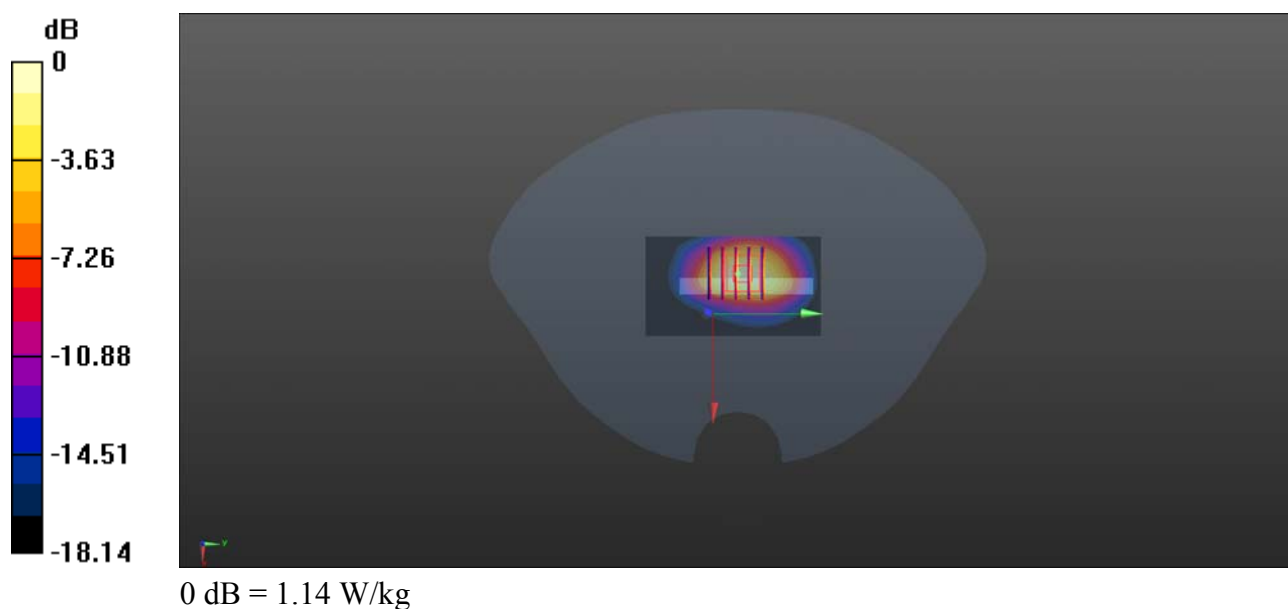



**WCDMA Band IV\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch1312 \_Repeated**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.451$  S/m;  $\epsilon_r = 54.225$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1312/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.885 W/kg



**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.25 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.422 W/kg**

Maximum value of SAR (measured) = 0.829 W/kg

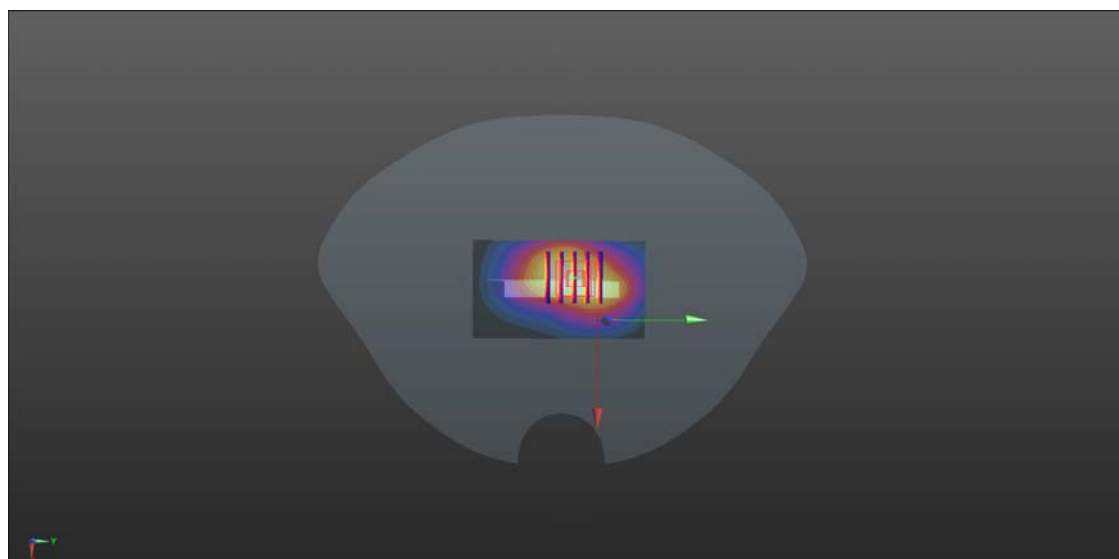

0 dB = 0.885 W/kg

**LTE Band 2\_20MHz\_QPSK\_1RB\_49Offset\_Bottom  
Side\_10mm\_Ch18900\_Repeated**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.509$  S/m;  $\epsilon_r = 52.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.746 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.95 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.362 W/kg**

Maximum value of SAR (measured) = 0.748 W/kg

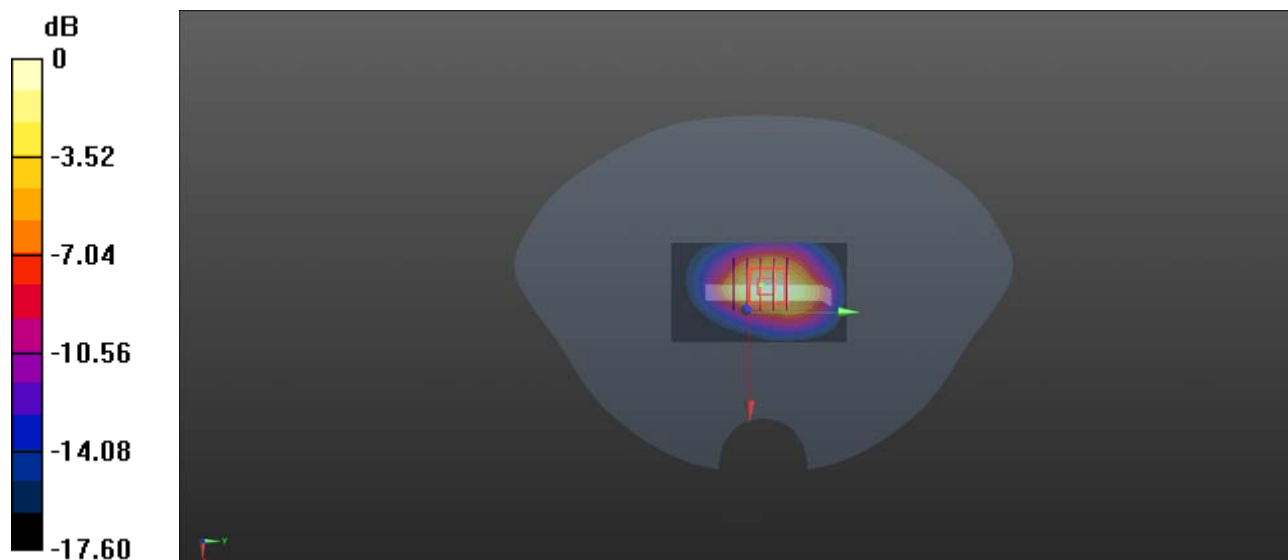

0 dB = 0.746 W/kg

**LTE Band 4\_20MHz\_QPSK\_50RB\_0Offset\_Bottom  
Side\_10mm\_Ch20050\_Repeated**

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.458$  S/m;  $\epsilon_r = 54.195$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20050/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.818 W/kg


**Ch20050/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.89 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.374 W/kg**

Maximum value of SAR (measured) = 0.738 W/kg

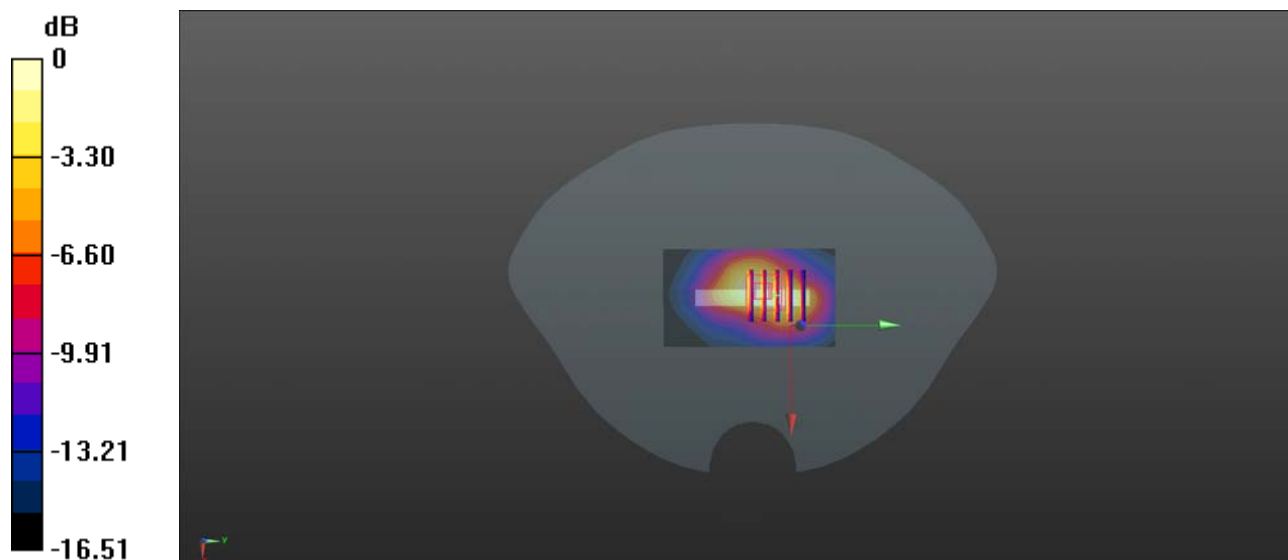

0 dB = 0.818 W/kg

**LTE Band 7\_20MHz\_QPSK\_1RB\_0Offset\_Bottom Side\_10mm\_Ch21350\_Repeated**

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_180625 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.132$  S/m;  $\epsilon_r = 51.063$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.08, 4.08, 4.08); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21350/Area Scan (51x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.66 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.96 W/kg

**SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.444 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

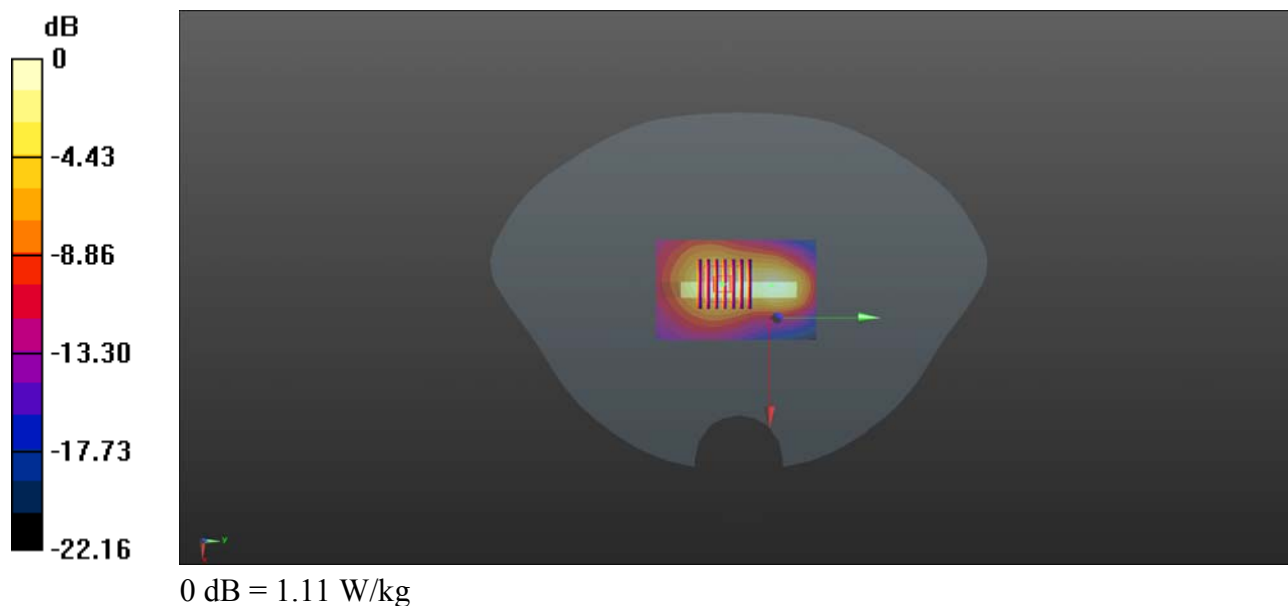

**WCDMA Band II\_RMC 12.2Kbps\_Back Side\_15mm\_Ch9262\_Repeated**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.478$  S/m;  $\epsilon_r = 52.57$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.159 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.552 W/kg**

Maximum value of SAR (measured) = 1.07 W/kg

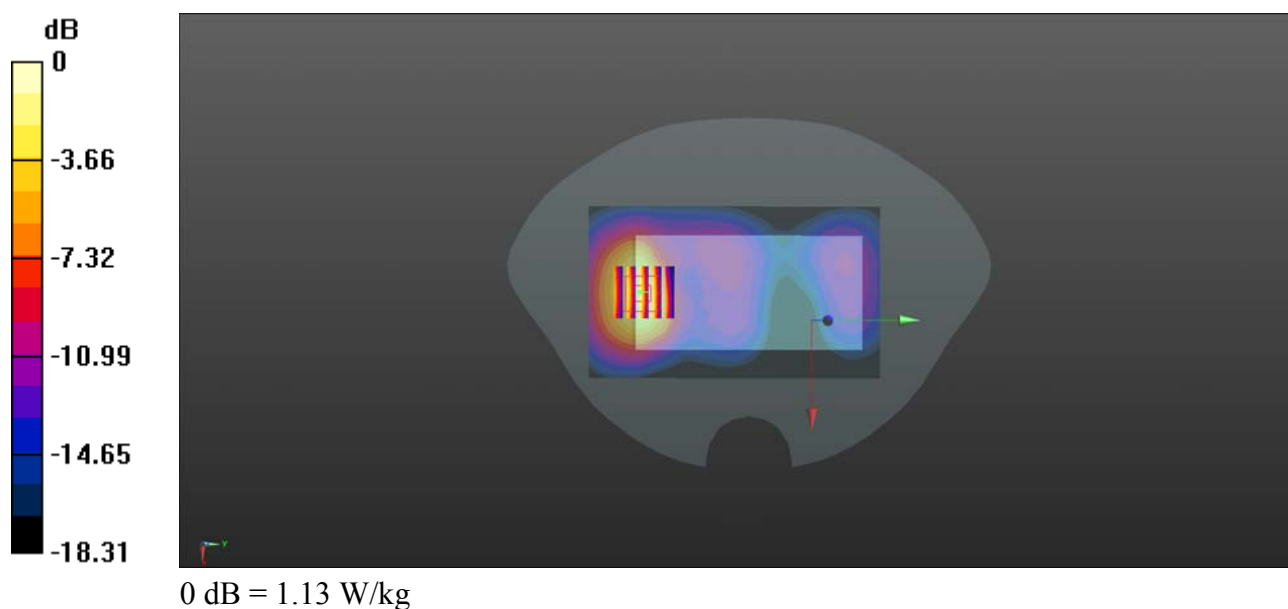

**WCDMA Band IV\_RMC 12.2Kbps\_Back Side\_15mm\_Ch1312\_Repeated**

Communication System: UID 0, UMTS-FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_1800\_180706 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.451$  S/m;  $\epsilon_r = 54.225$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3154; ConvF(4.91, 4.91, 4.91); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1312/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.705 W/kg


**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.387 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.952 W/kg

**SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.335 W/kg**

Maximum value of SAR (measured) = 0.630 W/kg

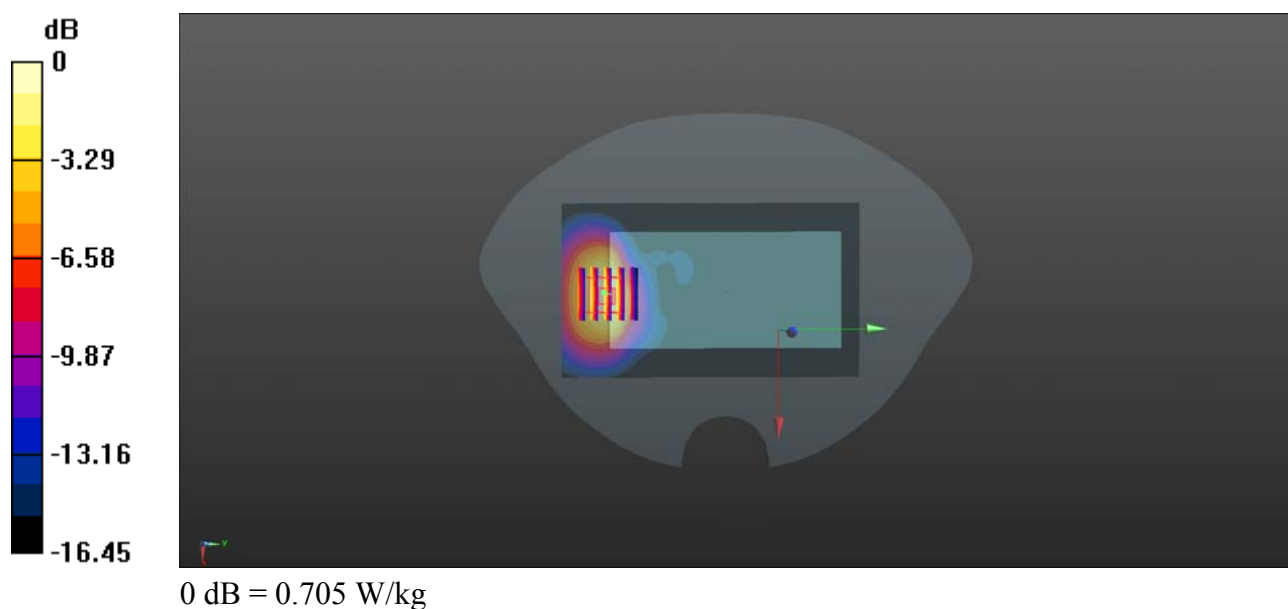

**LTE Band 2\_20MHz\_QPSK\_1RB\_49Offset\_Back Side\_15mm\_Ch18700\_Repeated**

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_180702 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.486$  S/m;  $\epsilon_r = 52.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3154; ConvF(4.71, 4.71, 4.71); Calibrated: 2017.10.30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2017.09.27
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1471
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18700/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


**Ch18700/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.277 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.966 W/kg; SAR(10 g) = 0.559 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

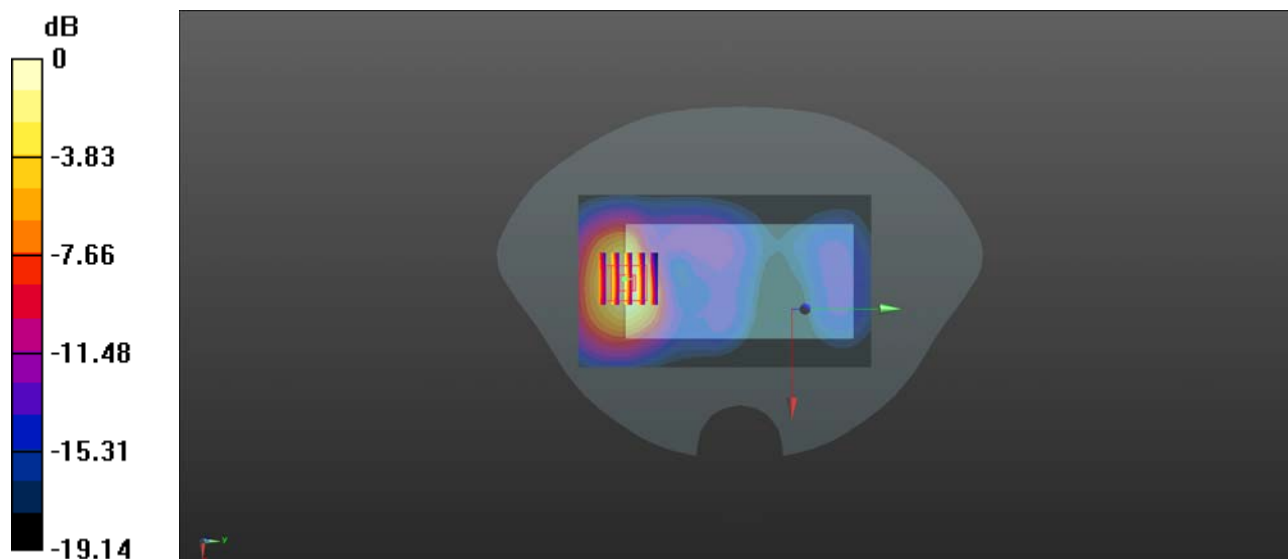

0 dB = 1.16 W/kg = 0.64 dBW/kg