



FCC Part 15.247

TEST REPORT

For

Serafim Technologies Inc.

5F., No. 6, Aly. 9, Ln. 45, Baoxing Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Report Type	Original Report
FCC Identity:	FCC ID: 2AOERSGC-S2A
Brand Name:	Serafim
Product Name	Serafim S2 Controller
Model Name	Serafim S2
Report Number	RXZ210420004-FRB
Report Date	2021/05/31
Reviewed By	Zeus Chen <i>Zeus Chen</i>
Prepared By:	Bay Area Compliance Laboratories Corp.(Linkou Laboratory) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.) Tel: +886 (3)3961072; Fax: +886 (3) 3961027 www.bacl.com.tw

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Revision History

Revision	Report Number	Issue Date	Description
1.0	RXZ210420004-FRB	2021/05/31	Original Report

TABLE OF CONTENTS

1 GENERAL INFORMATION 4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

1.2 OPERATION CONDITION OF EUT 4

1.3 OBJECTIVE AND TEST METHODOLOGY 5

1.4 MEASUREMENT UNCERTAINTY 5

1.5 ENVIRONMENTAL CONDITIONS AND TEST DATE 5

1.6 TEST FACILITY 5

2 SYSTEM TEST CONFIGURATION..... 6

2.1 TEST CHANNELS AND DESCRIPTION OF WORST TEST CONFIGURATION 6

2.2 SUPPORT EQUIPMENT LIST AND EXTERNAL CABLE LIST 6

2.3 BLOCK DIAGRAM OF TEST SETUP 7

2.4 DUTY CYCLE 7

3 SUMMARY OF TEST RESULTS 8

4 FCC§15.247(I), §1.1307, § 2.1093 – RF EXPOSURE 9

4.1 APPLICABLE STANDARD..... 9

4.2 RF EXPOSURE EVALUATION RESULT 9

5 FCC §15.203 - ANTENNA REQUIREMENTS10

5.1 APPLICABLE STANDARD..... 10

5.2 ANTENNA LIST AND DETAILS 10

6 FCC §15.207 - AC LINE CONDUCTED EMISSIONS.....11

6.1 APPLICABLE STANDARD..... 11

6.2 EUT SETUP AND TEST PROCEDURE 11

6.3 TEST EQUIPMENT LIST AND DETAILS 12

6.4 TEST RESULT..... 12

7 FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS13

7.1 APPLICABLE STANDARD..... 13

7.2 EUT SETUP AND TEST PROCEDURE 15

7.3 TEST EQUIPMENT LIST AND DETAILS 16

7.4 TEST RESULT..... 17

8 FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH22

8.1 APPLICABLE STANDARD..... 22

8.2 TEST PROCEDURE 22

8.3 TEST EQUIPMENT LIST AND DETAILS 22

8.4 TEST RESULTS 22

9 FCC §15.247(B) (3) – MAXIMUM OUTPUT POWER24

9.1 APPLICABLE STANDARD..... 24

9.2 TEST PROCEDURE 24

9.3 TEST EQUIPMENT LIST AND DETAILS 24

9.4 TEST RESULTS 24

10 FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE25

10.1 APPLICABLE STANDARD..... 25

10.2 TEST PROCEDURE 25

10.3 TEST EQUIPMENT LIST AND DETAILS 25

10.4 TEST RESULTS 26

11 FCC §15.247(E) – POWER SPECTRAL DENSITY27

11.1 APPLICABLE STANDARD..... 27

11.2 TEST PROCEDURE 27

11.3 TEST EQUIPMENT LIST AND DETAILS 27

11.4 TEST RESULTS 27

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Serafim Technologies Inc. 5F., No. 6, Aly. 9, Ln. 45, Baoxing Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
Manufacturer	Serafim Technologies Inc. 5F., No. 6, Aly. 9, Ln. 45, Baoxing Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
Brand Name	Serafim
Product (Equipment)	Serafim S2 Controller
Model Name	Serafim S2
Frequency Range	2402 - 2480 MHz
Number of Channels	40 Channels
Output Power	BLE-1Mbps: 4.93 dBm (0.0031 W) BLE-2Mbps: 4.93 dBm (0.0031 W)
Modulation Type	GFSK
Received Date	Apr. 29, 2021
Date of Test	May 07, 2021 - May 21, 2021

Note: All measurement and test data in this report was gathered from production sample serial number: 210420004. Assigned by Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

1.2 Operation Condition of EUT

Power Operation (Voltage Range)	<input type="checkbox"/> AC 120 V/60 Hz <input type="checkbox"/> Adapter <input type="checkbox"/> By Power Cord.
	<input checked="" type="checkbox"/> DC Type <input type="checkbox"/> DC Power Supply: DC 36V <input checked="" type="checkbox"/> Battery: 3.7V <input checked="" type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter
	<input type="checkbox"/> From Host System

1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the Serafim Technologies Inc., Appliance (Model(s): Serafim S2) to the requirements of the following Standards:

- Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.
- ANSI C63.10-2013 of the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Measurement Uncertainty

Parameter	Expanded Measurement uncertainty
RF output power with Power Meter	± 1.488 dB
Occupied Channel Bandwidth	± 453.927 Hz
RF Conducted test with Spectrum	± 2.77 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G	± 5.32 dB

The test results with statement of conformity, the decision rules are based on the specifications and standards. The test results will not take the measurement uncertainty into account.

1.5 Environmental Conditions and Test Date

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	Test Engineer
Radiated (966A)	May 13, 2021	23.5	60	Blake Wang
Conducted (TH-02)	May 20, 2021 – May 21, 2021	20.1-20.3	57-58	Blake Wang
Conduction (Con-01)	May 07, 2021	22.9	55	Blake Wang

1.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW3546. The Test Firm Registration No.: 181430.

2 System Test Configuration

2.1 Test Channels and Description of Worst Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer. No special accessory, No modification was made to the EUT and No special equipment used during test.

For BLE, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
3	2408	37	2476
--	--	38	2478
19	2440	39	2480

For BLE: Channel 0, 19 and 39 were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the Peak power and PSD across all data rates bandwidths, and modulations. Radiated below 1G had pretest battery mode and adapter mode, and the worst was were adapter mode with worst output power.


Modulation Used for Conformance Test			
Configuration	N _{TX}	Data Rate	Worst Data Rate
BLE-1Mbps	1	125 kbps-1 Mbps	1 Mbps
BLE-2	1	125 kbps-2 Mbps	2 Mbps

Worst Case of Power Setting v1.0.1.6				
EUT Exercise Software		nRF Connect v3.6.1		
Configuration	N _{TX}	Low CH	Mid CH	High CH
BLE-1Mbps	1	4	4	3
BLE-2Mbps	1	4	4	3

2.2 Support Equipment List and External Cable List

No.	Description	Manufacturer	Model Number	Serial Number
A	NoteBook	DELL	Latitude E6410	PP27LA001
B	Adapter	MYCEII	AC-B04	MY-AC-B040144


2.3 Block Diagram of Test Setup

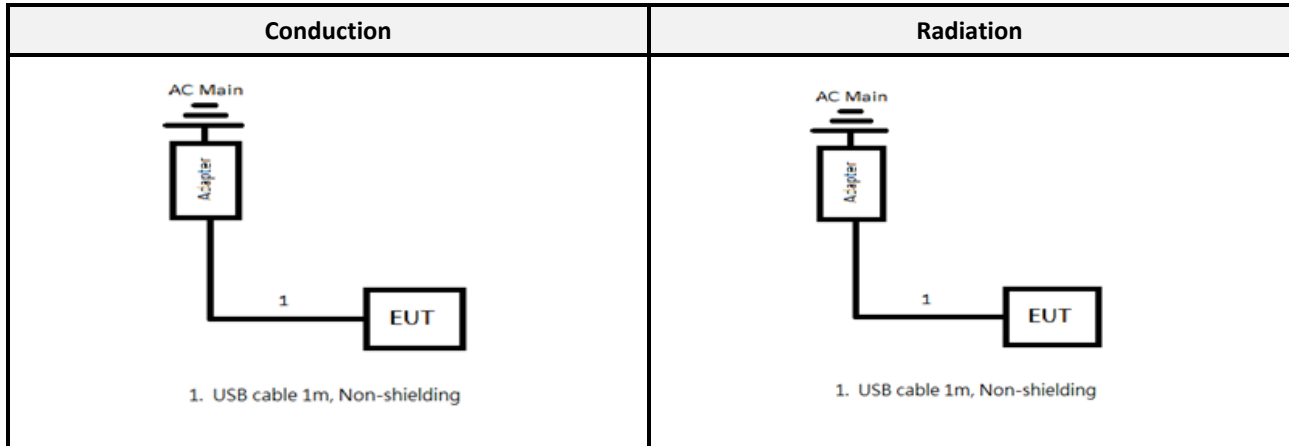

2.4 Duty Cycle

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Configuration	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE-1Mbps	0.41	0.62	65.13	1.86
BLE-2Mbps	0.22	0.63	35.63	4.48

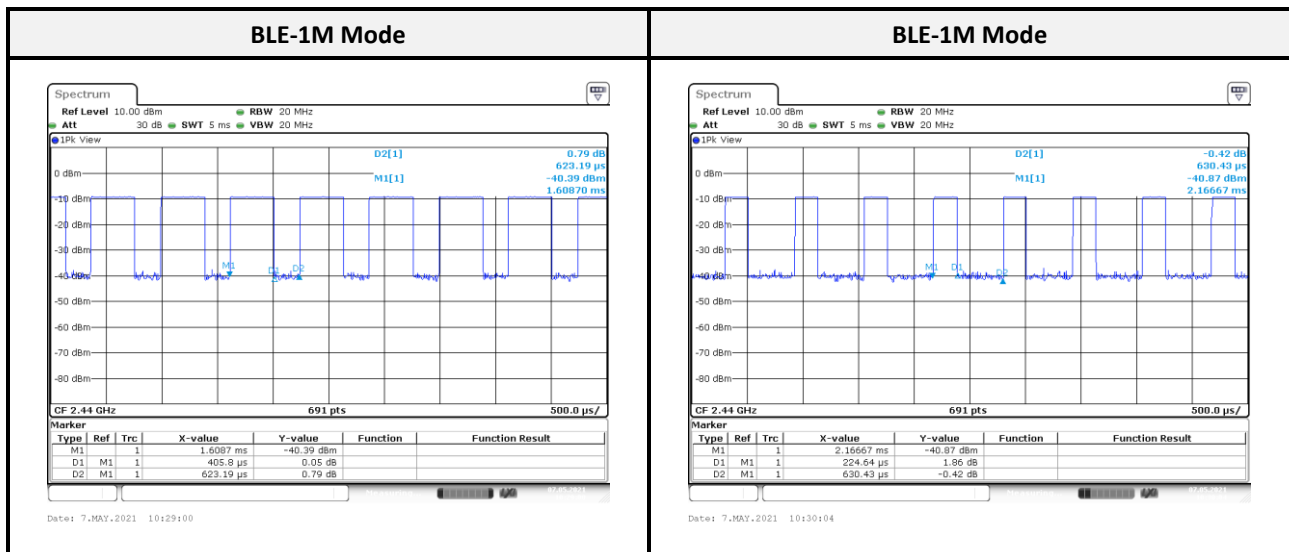

*Note: Duty Factor = 10*log (1/Duty cycle)

3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1307, § 2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 FCC§15.247(i), §1.1307, § 2.1093 – RF Exposure

4.1 Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$$

$$[\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.

4.2 RF Exposure Evaluation Result

RF Exposure Evaluation:

Frequency (MHz)	Turn-up Power		Evaluation Distance (mm)	SAR Exclusion Result	Extremity SAR Exclusion Limit (10g SAR)
	(dBm)	(mW)			
2402-2480	5.00	3.16	5	1.00	7.5

Result: SAR evaluation is not necessary.

5 FCC §15.203 - Antenna Requirements

5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

5.2 Antenna List and Details

Brand	Model	Antenna Type	Antenna Gain	Result
Serafim	Serafim S2	PCB Antenna	1.50 dBi	Compliance

The EUT has an internal antenna arrangement and fulfill the requirement of this section.

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standard


According to FCC §15.207,

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency. Note 2: A linear average detector is required

6.2 EUT Setup and Test Procedure

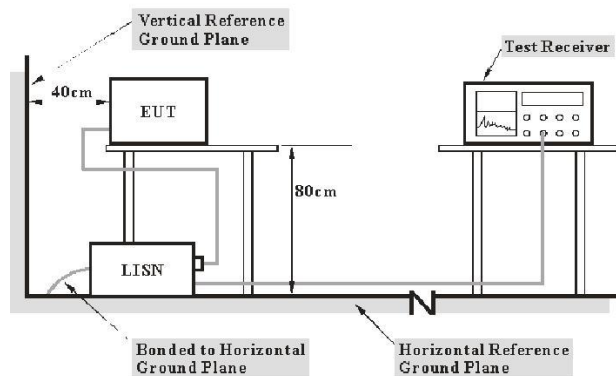

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits. The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz


During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
AC Line Conduction Room (Con-01)					
Two-Line V-Network	Rohde & Schwarz	ENV216	100010	2020/09/14	2021/09/13
Pulse Limiter	SCHWARZBECK	VSTD 9561-F	00432	2020/09/11	2021/09/10
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2021/05/05	2022/05/04
RF Cable	EMCI	EMCCFD300-BM-BM-8000	180526	2020/08/18	2021/08/17
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment’s listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

6.4 Test Result

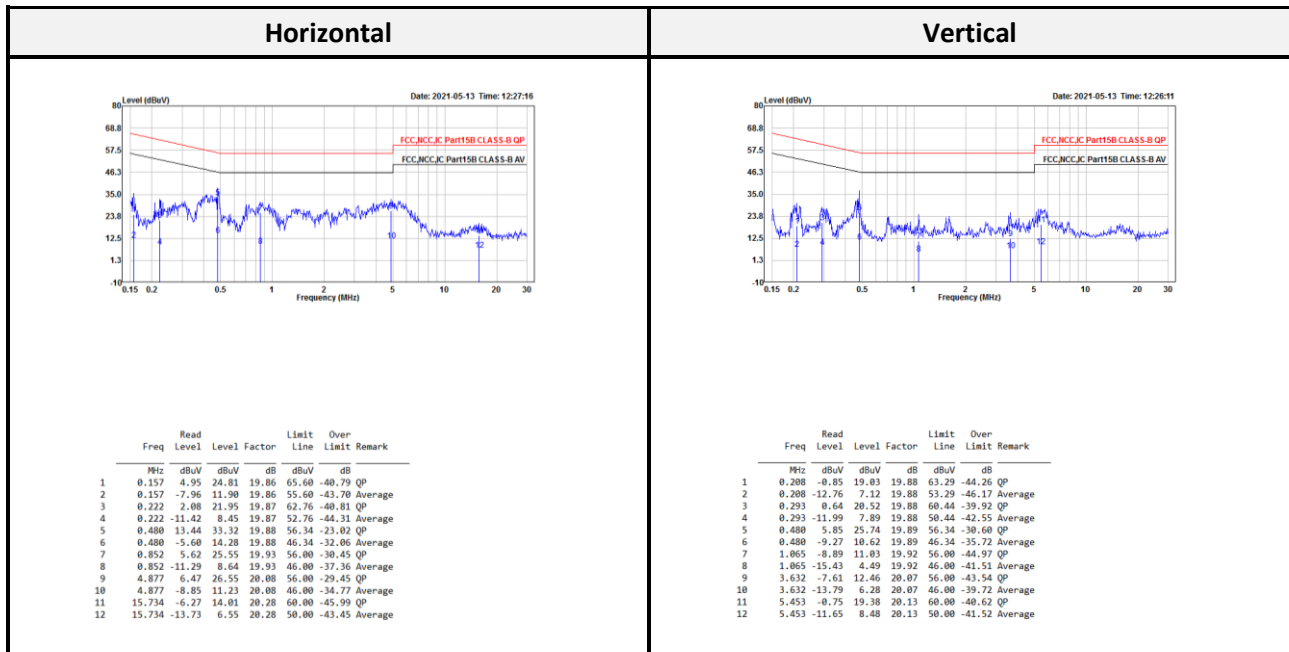

Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function.

Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6


As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 EUT Setup and Test Procedure

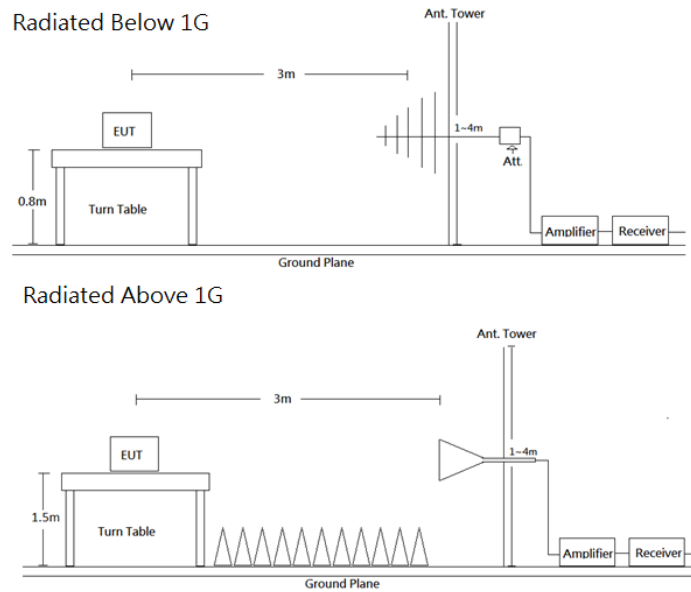

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	-	QP
Above 1 GHz	1 MHz	3 MHz	-	PK
	1 MHz	10 Hz	>98%	PK
	1 MHz	1/T	<98%	PK

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

7.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Radiation 3M Room (966A)					
Active Loop	EMCO	6502	0001-3322	2021/03/16	2022/03/15
Bilog Antenna & 6 dB Attenuator	SUNOL SCIENCES & EMCI	JB3 & N-6-06	A111513 & AT-N0668	2021/03/30	2022/03/29
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2021/05/12	2022/05/11
Horn Antenna	ETS-Lindgren	3115	00109141	2020/07/15	2021/07/14
Horn Antenna	ETS-Lindgren	3160-09	00123852	2020/07/07	2021/07/06
Preamplifier	A.H. Systems	PAM-1840VH	174	2021/03/22	2022/03/21
Preamplifier	A.H. Systems	PAM-0118P	478	2021/05/12	2022/05/11
Microflex Cable (1m)	EMCI	EMC102-KM-KM-1000	180524	2020/08/06	2021/08/05
Microflex Cable (2m)	EMCI	EMC106-SM-SM-2000	180516	2020/08/06	2021/08/05
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2020/08/06	2021/08/05
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
Conducted Room (TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102248	2020/09/16	2021/09/15
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

7.4 Test Result

Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Y axis)

Below 1G (30 MHz-1 GHz) test the worst power mode

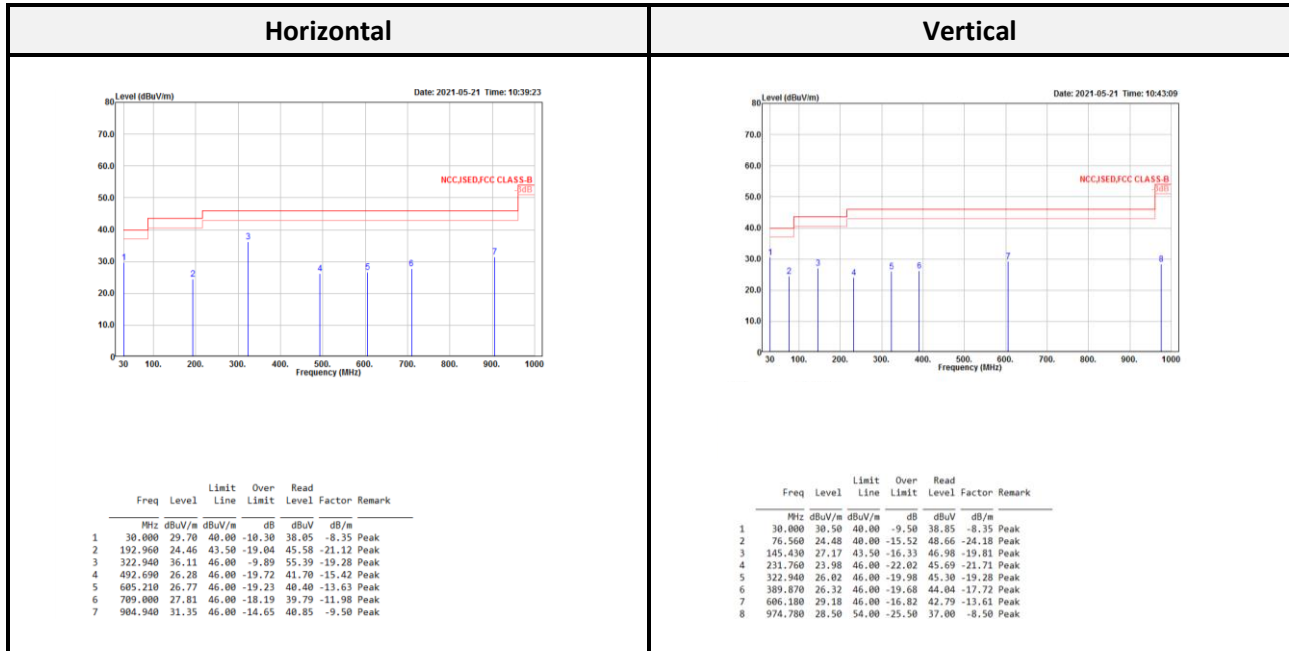

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Above 1G (1 GHz-26.5 GHz)

BLE-1Mbps Low CH Horizontal							BLE-1Mbps Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2311.300	38.62	54.00	-15.38	46.25	-7.63	Average	2387.200	39.03	54.00	-14.97	46.49	-7.46	Average
2311.300	52.33	74.00	-21.67	59.96	-7.63	Peak	2387.200	51.54	74.00	-22.46	59.00	-7.46	Peak
2401.900	86.55			93.97	-7.42	Average	2402.400	84.43			91.85	-7.42	Average
2401.900	88.16			95.58	-7.42	Peak	2402.400	86.08			93.50	-7.42	Peak
4804.000	46.59	54.00	-7.41	47.90	-1.31	Average	4804.000	50.84	54.00	-3.16	52.15	-1.31	Average
4804.000	48.42	74.00	-25.58	49.73	-1.31	Peak	4804.000	55.76	74.00	-18.24	57.07	-1.31	Peak
7206.000	47.74	54.00	-6.26	41.58	6.16	Average	7206.000	50.41	54.00	-3.59	44.25	6.16	Average
7206.000	55.69	74.00	-18.31	49.53	6.16	Peak	7206.000	61.70	74.00	-12.30	55.54	6.16	Peak

BLE-1Mbps Middle CH Horizontal							BLE-1Mbps Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2381.874	38.58	54.00	-15.42	46.05	-7.47	Average	2342.186	38.79	54.00	-15.21	46.38	-7.59	Average
2381.874	51.53	74.00	-22.47	59.00	-7.47	Peak	2342.186	51.23	74.00	-22.77	58.82	-7.59	Peak
2439.954	85.53			92.87	-7.34	Average	2440.438	85.49			92.83	-7.34	Average
2439.954	86.67			94.01	-7.34	Peak	2440.438	86.60			93.94	-7.34	Peak
2529.252	39.25	54.00	-14.75	46.41	-7.16	Average	2543.288	39.39	54.00	-14.61	46.49	-7.10	Average
2529.252	52.35	74.00	-21.65	59.51	-7.16	Peak	2543.288	51.86	74.00	-22.14	58.96	-7.10	Peak
4880.000	45.54	54.00	-8.46	46.70	-1.16	Average	4880.000	49.98	54.00	-4.02	51.14	-1.16	Average
4880.000	51.42	74.00	-22.58	52.58	-1.16	Peak	4880.000	55.32	74.00	-18.68	56.48	-1.16	Peak
7320.000	46.47	54.00	-7.53	40.83	5.64	Average	7320.000	46.08	54.00	-7.92	40.44	5.64	Average
7320.000	55.21	74.00	-18.79	49.57	5.64	Peak	7320.000	58.10	74.00	-15.90	52.46	5.64	Peak


BLE-1Mbps High CH Horizontal							BLE-1Mbps High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2480.332	82.89			90.18	-7.29	Average	2480.332	87.93			95.22	-7.29	Average
2480.332	83.96			91.25	-7.29	Peak	2480.332	88.95			96.24	-7.29	Peak
2549.786	39.10	54.00	-14.90	46.17	-7.07	Average	2545.358	39.42	54.00	-14.58	46.50	-7.08	Average
2549.786	52.25	74.00	-21.75	59.32	-7.07	Peak	2545.358	52.65	74.00	-21.35	59.73	-7.08	Peak
4960.000	49.90	54.00	-4.10	50.86	-0.96	Average	4960.000	52.21	54.00	-1.79	53.17	-0.96	Average
4960.000	54.87	74.00	-19.13	55.83	-0.96	Peak	4960.000	56.82	74.00	-17.18	57.78	-0.96	Peak
7440.000	45.93	54.00	-8.07	39.94	5.99	Average	7440.000	49.67	54.00	-4.33	43.68	5.99	Average
7440.000	55.21	74.00	-18.79	49.22	5.99	Peak	7440.000	58.11	74.00	-15.89	52.12	5.99	Peak

BLE-2Mbps Low CH Horizontal							BLE-2Mbps Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2377.700	38.54	54.00	-15.46	46.03	-7.49	Average	2341.600	38.62	54.00	-15.38	46.21	-7.59	Average
2377.700	51.48	74.00	-22.52	58.97	-7.49	Peak	2341.600	51.88	74.00	-22.12	59.47	-7.59	Peak
2401.700	85.53			92.95	-7.42	Average	2402.700	82.67			90.09	-7.42	Average
2401.700	89.24			96.66	-7.42	Peak	2402.700	86.35			93.77	-7.42	Peak
4804.000	42.06	54.00	-11.94	43.37	-1.31	Average	4804.000	46.36	54.00	-7.64	47.67	-1.31	Average
4804.000	51.93	74.00	-22.07	53.24	-1.31	Peak	4804.000	55.68	74.00	-18.32	56.99	-1.31	Peak
7206.000	47.15	54.00	-6.85	40.99	6.16	Average	7206.000	48.37	54.00	-5.63	42.21	6.16	Average
7206.000	56.72	74.00	-17.28	50.56	6.16	Peak	7206.000	57.75	74.00	-16.25	51.59	6.16	Peak

BLE-2Mbps Middle CH Horizontal							BLE-2Mbps Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2339.282	38.66	54.00	-15.34	46.25	-7.59	Average	2375.582	38.56	54.00	-15.44	46.05	-7.49	Average
2339.282	51.65	74.00	-22.35	59.24	-7.59	Peak	2375.582	51.76	74.00	-22.24	59.25	-7.49	Peak
2439.712	83.67			91.01	-7.34	Average	2440.680	84.37			91.71	-7.34	Average
2439.712	87.36			94.70	-7.34	Peak	2440.680	88.09			95.43	-7.34	Peak
2550.064	39.42	54.00	-14.58	46.49	-7.07	Average	2542.320	39.03	54.00	-14.97	46.13	-7.10	Average
2550.064	51.76	74.00	-22.24	58.83	-7.07	Peak	2542.320	52.47	74.00	-21.53	59.57	-7.10	Peak
4880.000	43.77	54.00	-10.23	44.93	-1.16	Average	4880.000	46.62	54.00	-7.38	47.78	-1.16	Average
4880.000	53.35	74.00	-20.65	54.51	-1.16	Peak	4880.000	55.62	74.00	-18.38	56.78	-1.16	Peak
7320.000	44.88	54.00	-9.12	39.24	5.64	Average	7320.000	45.30	54.00	-8.70	39.66	5.64	Average
7320.000	54.83	74.00	-19.17	49.19	5.64	Peak	7320.000	55.19	74.00	-18.81	49.55	5.64	Peak

BLE-2Mbps High CH Horizontal							BLE-2Mbps High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2480.578	82.44			89.73	-7.29	Average	2480.578	85.32			92.61	-7.29	Average
2480.578	86.21			93.50	-7.29	Peak	2480.578	89.10			96.39	-7.29	Peak
2516.904	39.51	54.00	-14.49	46.71	-7.20	Average	2520.266	39.61	54.00	-14.39	46.80	-7.19	Average
2516.904	52.62	74.00	-21.38	59.82	-7.20	Peak	2520.266	52.52	74.00	-21.48	59.71	-7.19	Peak
4960.000	43.56	54.00	-10.44	44.52	-0.96	Average	4960.000	45.87	54.00	-8.13	46.83	-0.96	Average
4960.000	53.40	74.00	-20.60	54.36	-0.96	Peak	4960.000	55.49	74.00	-18.51	56.45	-0.96	Peak
7440.000	43.78	54.00	-10.22	37.79	5.99	Average	7440.000	46.77	54.00	-7.23	40.78	5.99	Average
7440.000	54.62	74.00	-19.38	48.63	5.99	Peak	7440.000	56.51	74.00	-17.49	50.52	5.99	Peak

Above 1G (1 GHz-26.5 GHz): The worst mode is BLE-1Mbps High CH.

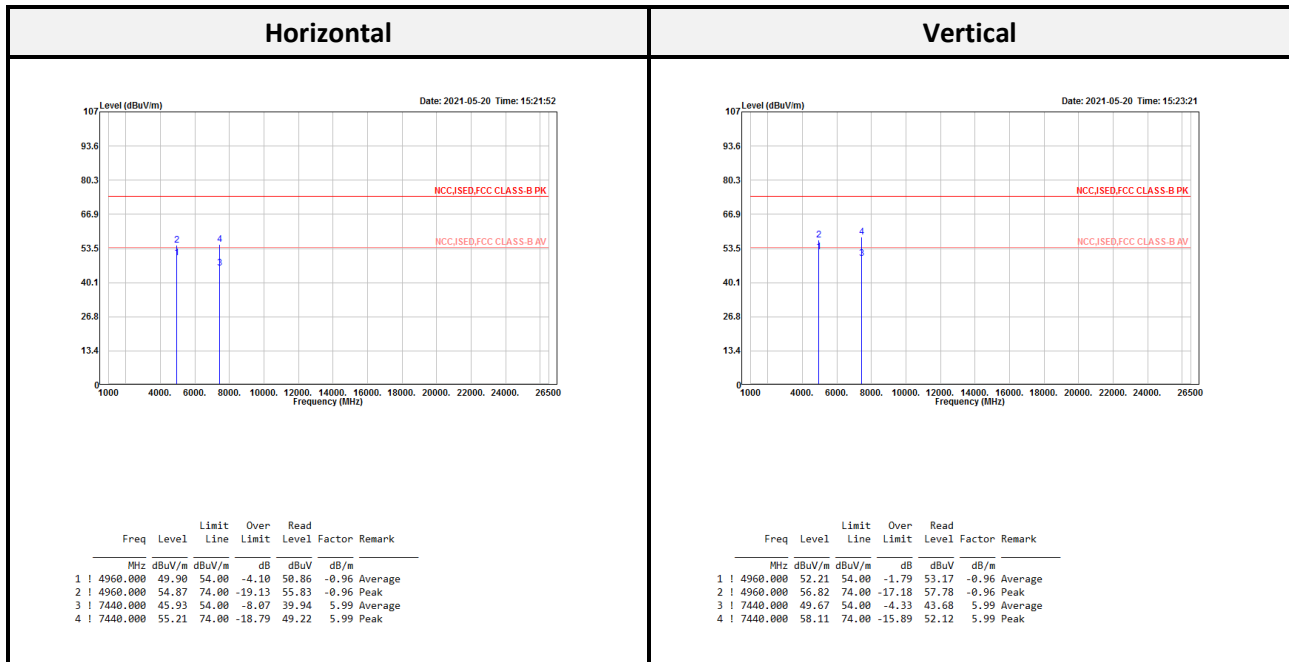

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Conducted Spurious Emissions:


Configuration	Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE-1Mbps	Low	2402	50.52	≥ 20	Compliance
	Middle	2440	51.59	≥ 20	Compliance
	High	2480	50.54	≥ 20	Compliance
BLE-2Mbps	Low	2402	46.84	≥ 20	Compliance
	Middle	2440	47.21	≥ 20	Compliance
	High	2480	48.94	≥ 20	Compliance

BLE-1Mbps Low CH

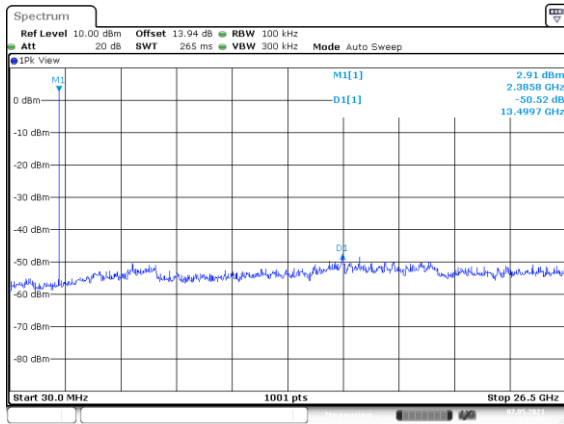


Date: 7.MAY.2021 10:05:47

BLE-1Mbps Middle CH

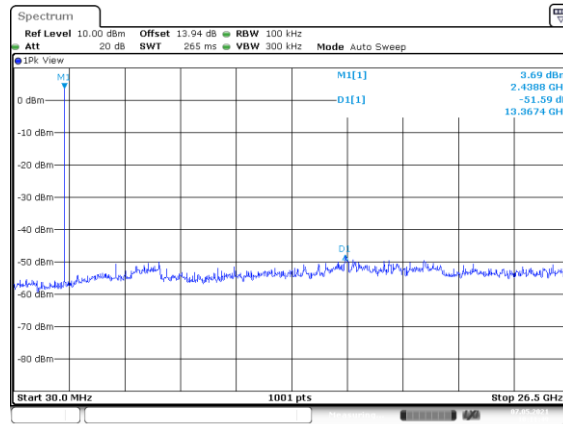


Date: 7.MAY.2021 10:11:50

BLE-1Mbps High CH

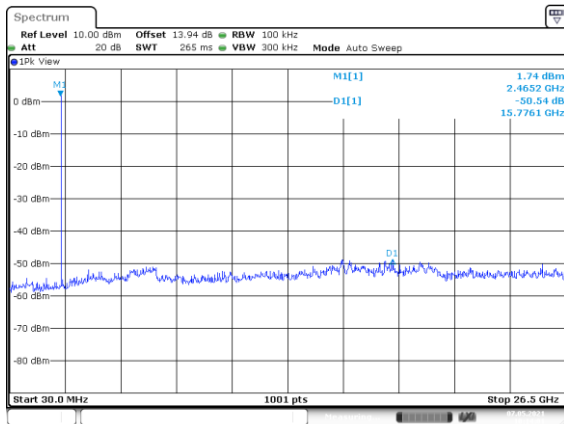


Date: 7.MAY.2021 10:14:01

BLE-2Mbps Low CH

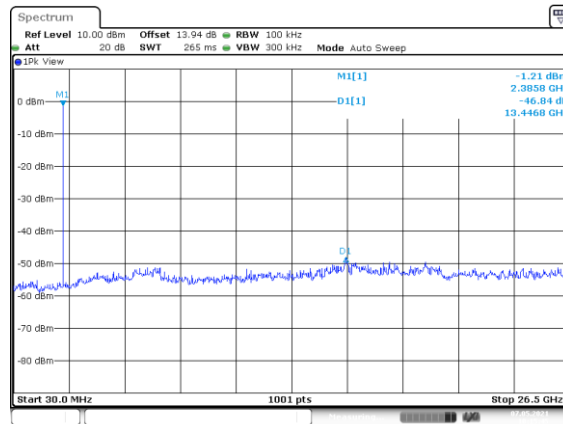


Date: 7.MAY.2021 10:15:45

BLE-2Mbps Middle CH

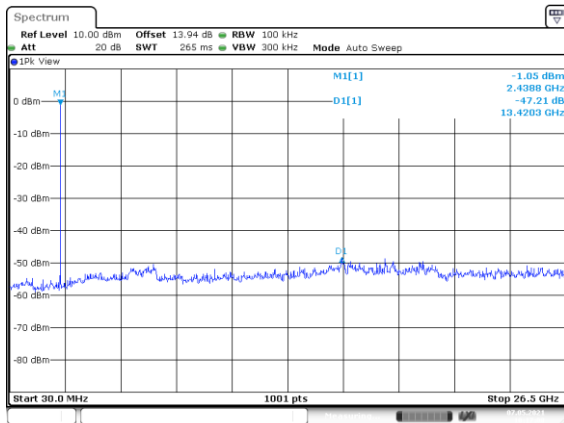

Date: 7.MAY.2021 10:17:08

BLE-2Mbps High CH

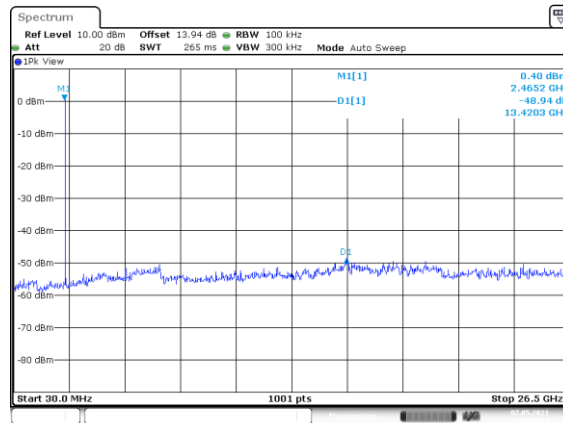

Date: 7.MAY.2021 10:20:03

8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a) (2),

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Test Procedure

According to ANSI C63.10-2013, the steps for the first option are as follows:

- (1) Set RBW = 100 kHz. (2) Set the VBW $\geq [3 \times \text{RBW}]$. (3) Detector = peak. (4) Trace mode = max hold.
- (5) Sweep = auto couple. (6) Allow the trace to stabilize. (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102248	2020/09/16	2021/09/15
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

8.4 Test Results


Configuration	Channel	Frequency (MHz)	6 dB BW (MHz)	6dB Limit (MHz)	Result
BLE-1Mbps	Low	2402	0.73	> 0.5	Compliance
	Middle	2440	0.73	> 0.5	Compliance
	High	2480	0.73	> 0.5	Compliance
BLE-2Mbps	Low	2402	1.15	> 0.5	Compliance
	Middle	2440	1.14	> 0.5	Compliance
	High	2480	1.15	> 0.5	Compliance

BLE-1Mbps Low CH

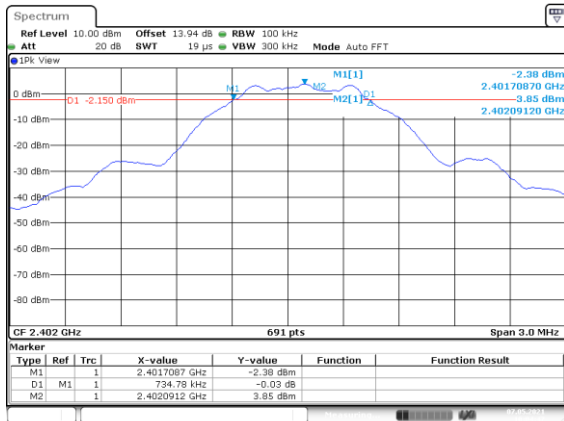


Date: 7.MAY.2021 10:04:47

BLE-1Mbps Middle CH

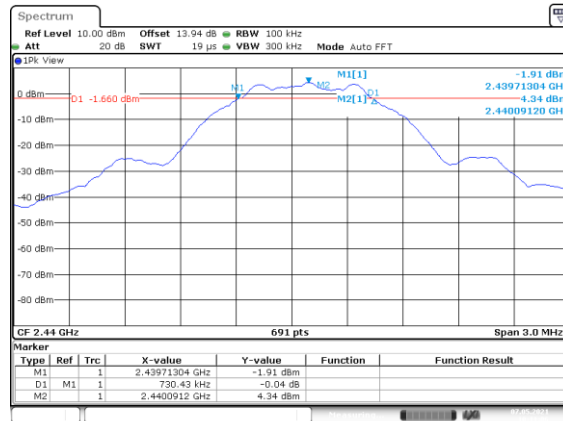


Date: 7.MAY.2021 10:11:06

BLE-1Mbps High CH

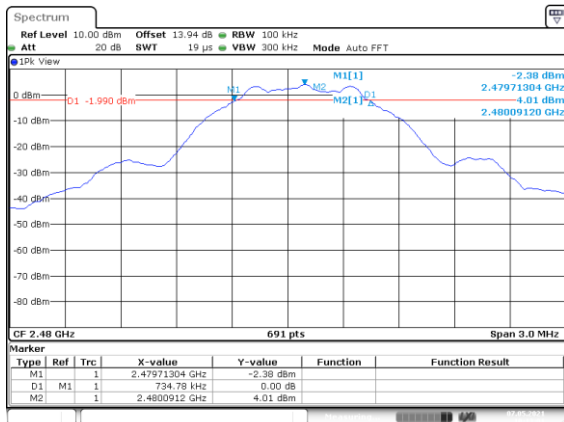


Date: 7.MAY.2021 10:13:01

BLE-2Mbps Low CH

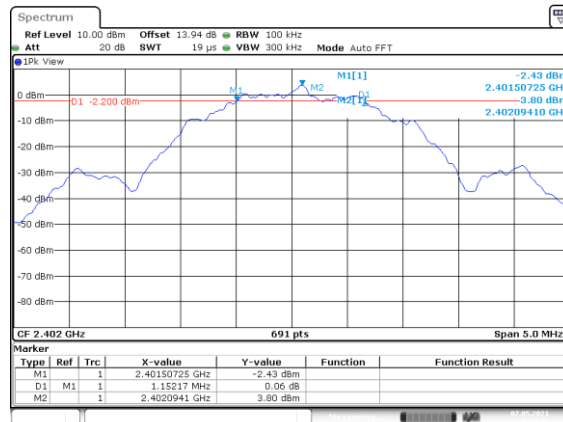


Date: 7.MAY.2021 10:14:45

BLE-2Mbps Middle CH

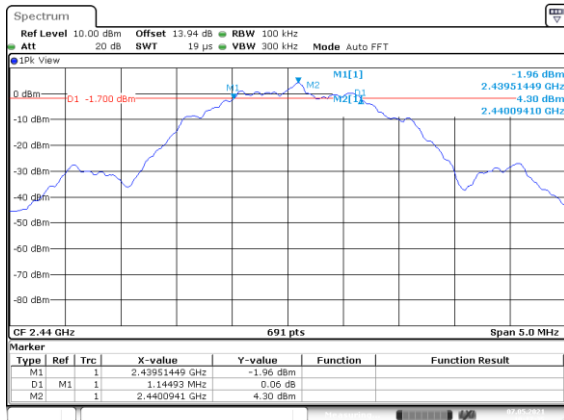

Date: 7.MAY.2021 10:17:35

BLE-2Mbps High CH

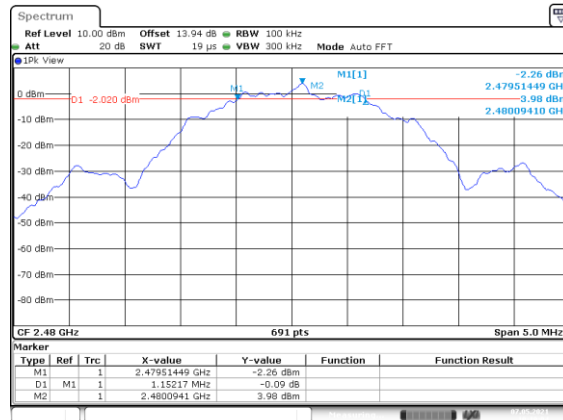

Date: 7.MAY.2021 10:19:04

9 FCC §15.247(b) (3) – Maximum Output Power

9.1 Applicable Standard

According to FCC §15.247(b) (3),

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

9.2 Test Procedure

- (1) Place the EUT on a bench and set it in transmitting mode.
- (2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.
- (3). Add a correction factor to the display.

9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
USB Wideband Power Sensor	AGILENT	U2021XA	MY56120026	2020/09/14	2021/09/13
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment’s listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

9.4 Test Results

Configuration	Channel	Frequency (MHz)	Maximum Peak Output Power		Limit (dBm)	Result
			(dBm)	(W)		
BLE-1Mbps	Low	2402	4.47	0.0028	30	Compliance
	Middle	2440	4.93	0.0031	30	Compliance
	High	2480	4.56	0.0029	30	Compliance
BLE-2Mbps	Low	2402	4.47	0.0028	30	Compliance
	Middle	2440	4.93	0.0031	30	Compliance
	High	2480	4.37	0.0027	30	Compliance

10 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

10.1 Applicable Standard

According to FCC §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

10.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- (3) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- (4) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.


10.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102248	2020/09/16	2021/09/15
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

10.4 Test Results

Configuration	Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE-1Mbps	Low	2402	51.69	≥ 20	Compliance
	High	2480	58.35	≥ 20	Compliance
BLE-2Mbps	Low	2402	34.34	≥ 20	Compliance
	High	2480	55.53	≥ 20	Compliance

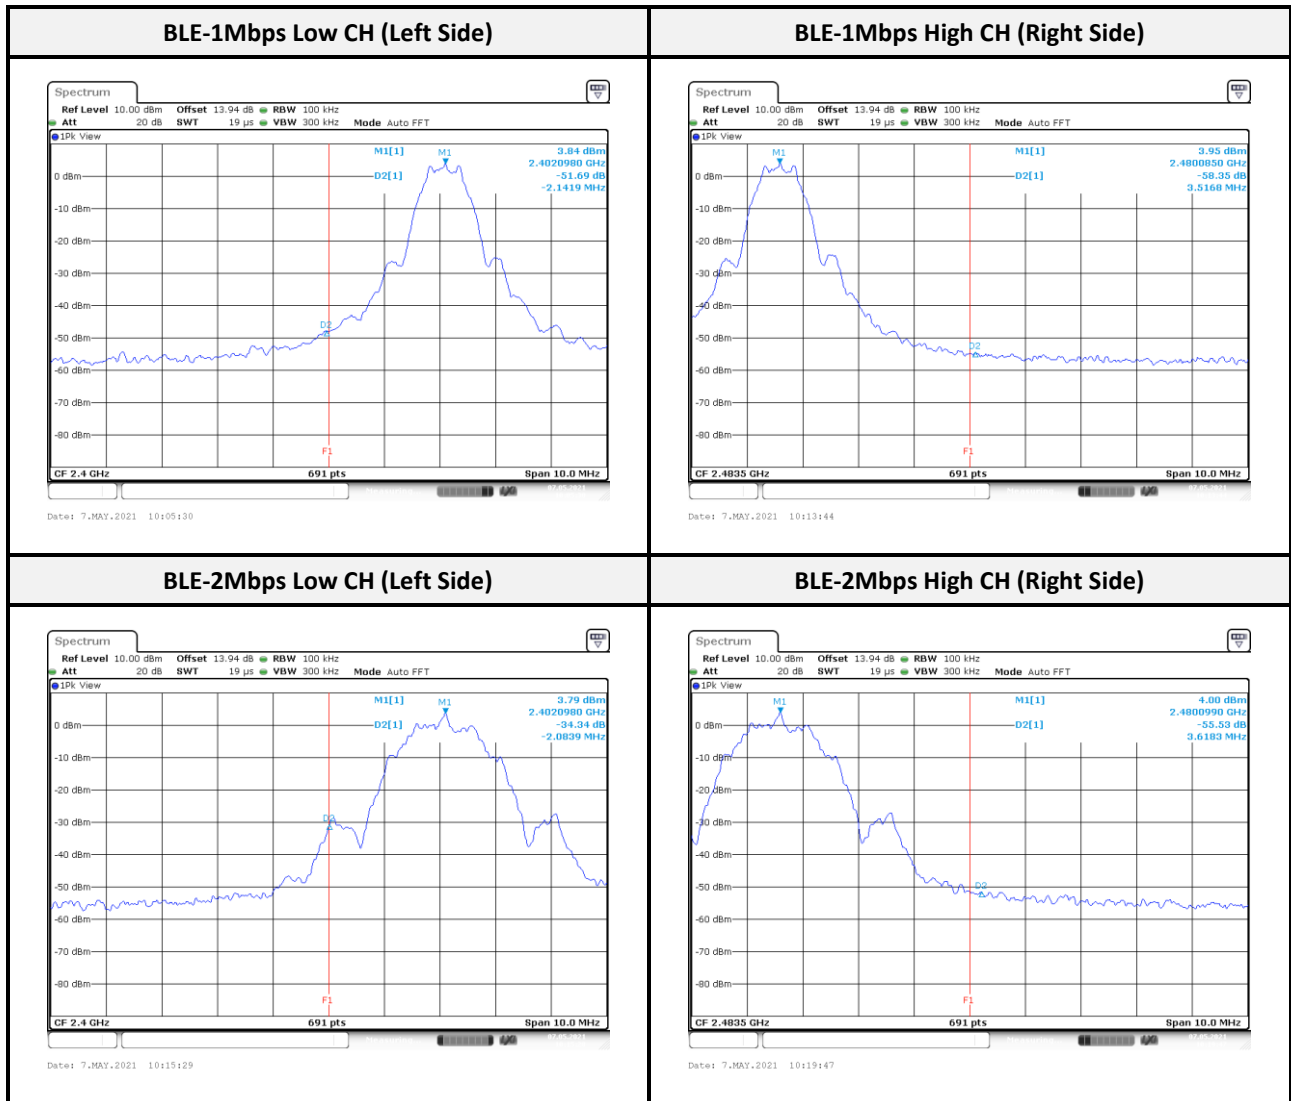

11 FCC §15.247(e) – Power Spectral Density

11.1 Applicable Standard

According to FCC §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Test Procedure

According to ANSI C63.10-2013,

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth. (3) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq [3 \times \text{RBW}]$. (5) Detector = peak. (6) Sweep time = auto couple.
- (7) Trace mode = max hold. (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- (10) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.







11.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102248	2020/09/16	2021/09/15
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

11.4 Test Results

Configuration	Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE-1Mbps	Low	2402	-11.64	8	Compliance
	Middle	2440	-11.12	8	Compliance
	High	2480	-11.54	8	Compliance
BLE-2Mbps	Low	2402	-14.36	8	Compliance
	Middle	2440	-13.82	8	Compliance
	High	2480	-14.11	8	Compliance

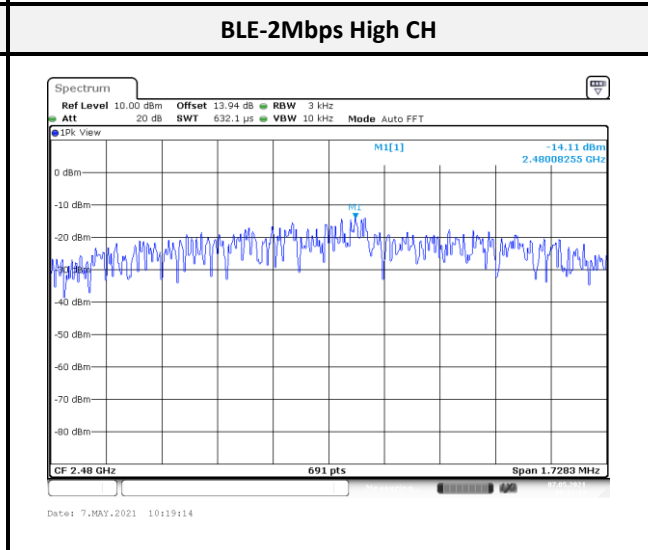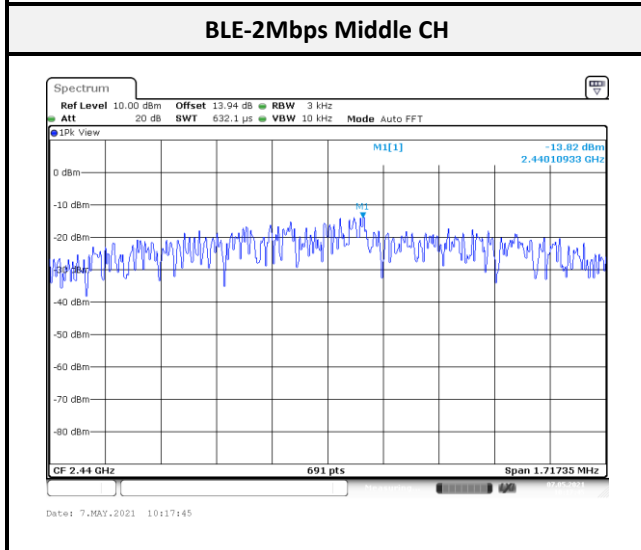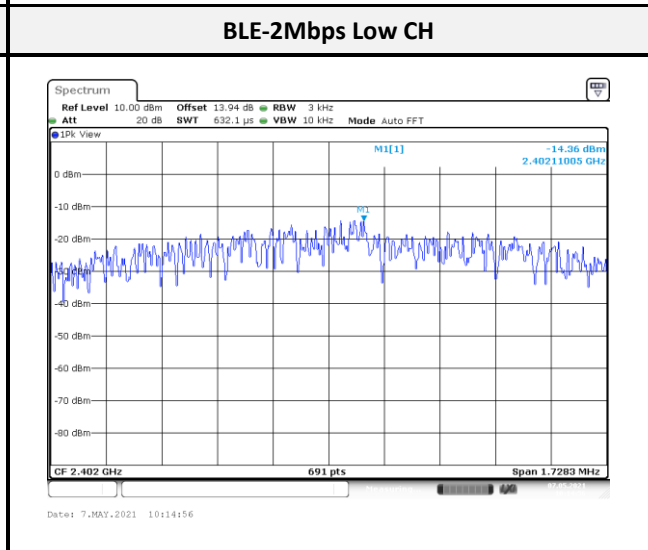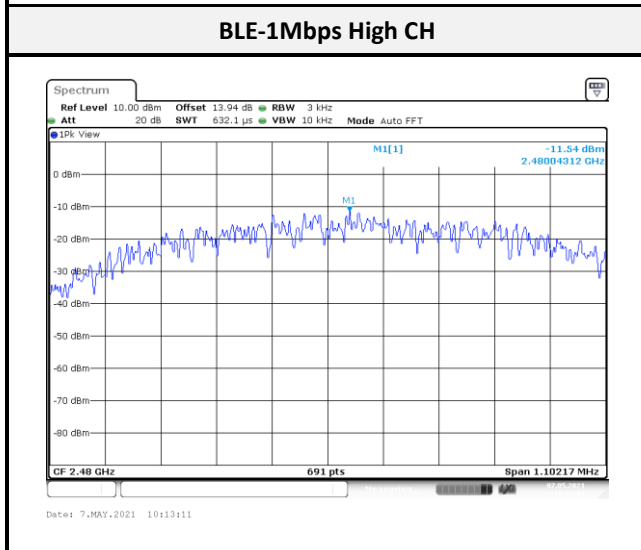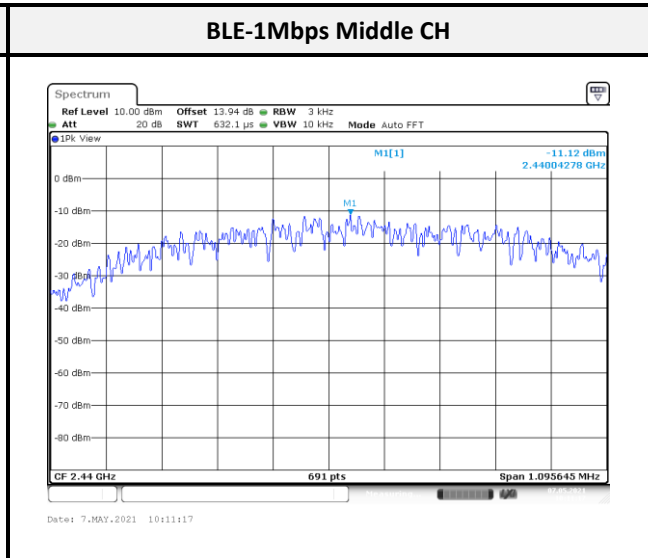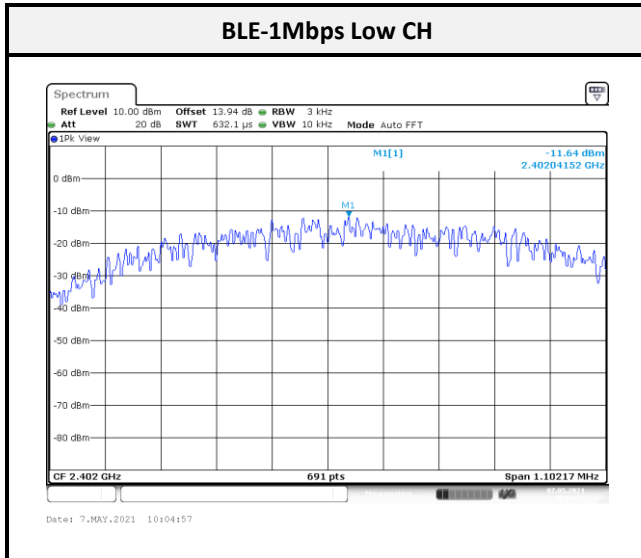

----- END OF REPORT -----