

---

# SAR Test Report

---

Report No.: AGC00940190102FH01

**FCC ID** : 2AOGVJAXMV50JM  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Smart phone  
**BRAND NAME** : Vonino  
**MODEL NAME** : JAX M  
**CLIENT** : VONINO ELECTRONICS LIMITED  
**DATE OF ISSUE** : Mar. 11,2019  
**STANDARD(S)** : IEEE Std. 1528:2013  
FCC 47 CFR Part 2§2.1093:2013  
IEEE C95.1TM:2005  
**REPORT VERSION** : V1.1

Attestation of Global Compliance(Shenzhen) Co., Ltd.

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.




### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 05,2019	Invalid	Initial Release
V1.1	1 <sup>st</sup>	Mar. 11,2019	Valid	Changed the reported 2G antenna gain

## Test Report

Applicant Name	VONINO ELECTRONICS LIMITED
Applicant Address	Vonino Electronics (HK) Limited #1109, 11/F, Kowloon Center 33 Ashley Road , Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer Name	VONINO ELECTRONICS LIMITED
Manufacturer Address	Vonino Electronics (HK) Limited #1109, 11/F, Kowloon Center 33 Ashley Road , Tsim Sha Tsui, Kowloon, Hong Kong
Factory Name	Guangdong Homecare High-Technology Co., Ltd
Factory Address	Guangdong Homecare High-Tech Industrial Park, Wuliting, Puzhai Town, Fengshun County, Meizhou City, Guangdong Province
Product Designation	Smart phone
Brand Name	Vonino
Model Name	JAX M
Different Description	N/A
EUT Voltage	DC3.7V by battery
Applicable Standard	IEEE Std. 1528:2013 FCC 47 CFR Part 2§2.1093:2013 IEEE C95.1TM:2005
Test Date	Feb. 28,2019 to Mar. 04,2019
Report Template	AGCRT-US-4G/SAR (2018-01-01)

Note: The results of testing in this report apply to the product/system which was tested only.



Tested By \_\_\_\_\_

Eric Zhou(Zhou Yongkang)

Mar. 04,2019



Checked By \_\_\_\_\_

Angela Li(Li Jiao)

Mar. 11,2019



Authorized By \_\_\_\_\_

Forrest Lei(Lei Yonggang)

Authorized Officer

Mar. 11,2019

## TABLE OF CONTENTS

<b>1. SUMMARY OF MAXIMUM SAR VALUE .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. EUT DESCRIPTION.....	6
<b>3. SAR MEASUREMENT SYSTEM.....</b>	<b>8</b>
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS.....	8
3.2. COMOSAR E-FIELD PROBE .....	9
3.3. ROBOT.....	9
3.4. VIDEO POSITIONING SYSTEM .....	10
3.5. DEVICE HOLDER .....	10
3.6. SAM TWIN PHANTOM.....	11
3.7. ELLI39 PHANTOM.....	11
<b>4. SAR MEASUREMENT PROCEDURE .....</b>	<b>12</b>
4.1. SPECIFIC ABSORPTION RATE (SAR) .....	12
4.2. SAR MEASUREMENT PROCEDURE .....	13
4.3. RF EXPOSURE CONDITIONS.....	15
<b>5. TISSUE SIMULATING LIQUID .....</b>	<b>17</b>
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID.....	17
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS.....	17
5.3. TISSUE CALIBRATION RESULT.....	18
<b>6. SAR SYSTEM CHECK PROCEDURE.....</b>	<b>21</b>
6.1. SAR SYSTEM CHECK PROCEDURES.....	21
6.2. SAR SYSTEM CHECK.....	22
<b>7. EUT TEST POSITION.....</b>	<b>24</b>
7.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET.....	24
7.2. CHEEK POSITION .....	25
7.3. TILT POSITION.....	25
7.4. BODY WORN POSITION.....	26
<b>8. SAR EXPOSURE LIMITS .....</b>	<b>27</b>
<b>9. TEST FACILITY .....</b>	<b>28</b>
<b>10. TEST EQUIPMENT LIST .....</b>	<b>29</b>
<b>11. MEASUREMENT UNCERTAINTY .....</b>	<b>30</b>
<b>12. CONDUCTED POWER MEASUREMENT .....</b>	<b>33</b>
<b>13. TEST RESULTS .....</b>	<b>57</b>
13.1. SAR TEST RESULTS SUMMARY .....	57
<b>APPENDIX A. SAR SYSTEM CHECK DATA .....</b>	<b>82</b>
<b>APPENDIX B. SAR MEASUREMENT DATA.....</b>	<b>102</b>
<b>APPENDIX C. TEST SETUP PHOTOGRAPHS .....</b>	<b>156</b>
<b>APPENDIX D. CALIBRATION DATA.....</b>	<b>164</b>

## 1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Frequency Band	Highest Reported 1g-SAR(W/Kg)		SAR Test Limit (W/Kg)
	Head	Body-worn	
GSM 850	0.310	0.522	1.6
PCS 1900	0.142	1.102	
UMTS Band II	0.236	1.235	
UMTS Band V	0.231	0.338	
LTE Band 2	0.197	1.127	
LTE Band 4	0.108	0.686	
LTE Band 5	0.375	0.503	
LTE Band 12	0.200	0.379	
LTE Band 13	0.334	0.515	
LTE Band 17	0.265	0.552	
WIFI 2.4G	0.259	0.267	
Simultaneous Reported SAR	0.856		
SAR Test Result	PASS		

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2005 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 648474 D04 Handset SAR v01r03
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 941225 D01 3G SAR Procedures v03r01
- KDB 941225 D06 Hotspot Mode v02r01
- KDB 248227 D01 802 11 Wi-Fi SAR v02r02
- KDB 941225 D05 SAR for LTE Devices v02r05

## 2. GENERAL INFORMATION

### 2.1. EUT Description


General Information	
Product Designation	Smart phone
Test Model	JAX M
Hardware Version	Y393B_MB_V2
Software Version	Y393B16.YBT.V51B10.EU.16+1.8.1.Go.V01.01.20181228
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GSM and GPRS & EGPRS	
Support Band	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800
GPRS & EGPRS Type	Class B
GPRS & EGPRS Class	Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)
TX Frequency Range	GSM 850 : 820-850MHz; PCS 1900: 1850-1910MHz;
RX Frequency Range	GSM 850 : 869~894MHz; PCS 1900: 1930~1990MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS
Antenna Gain	GSM850: 1.0dBi; PCS1900: 1.1dBi
Max. Average Power	GSM850: 34.43dBm; PCS1900: 31.23dBm
WCDMA	
Support Band	<input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band V <input type="checkbox"/> UMTS FDD Band IV <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band III <input type="checkbox"/> UMTS FDD Band VIII
HS Type	HSPA(HSUPA/HSDPA)
TX Frequency Range	FDD Band II: 1850-1910MHz; FDD Band V: 820-850MHz
RX Frequency Range	FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz
Release Version	Rel-6
Type of modulation	HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
Antenna Gain	Band II: 1.1dBi; Band V: 0.74dBi
Max. Average Power	Band II: 22.97dBm; Band V: 24.33dBm

### EUT Description( Continue)

<b>LTE</b>	
Support Band	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 5 <input type="checkbox"/> FDD Band 7 <input checked="" type="checkbox"/> FDD Band 12 <input checked="" type="checkbox"/> FDD Band 13 <input checked="" type="checkbox"/> FDD Band 17 <input type="checkbox"/> FDD Band 25 <input type="checkbox"/> FDD Band 26 <input type="checkbox"/> TDD Band 41 (U.S. Bands) <input type="checkbox"/> FDD Band 1 <input type="checkbox"/> FDD Band 3 <input type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 8 <input type="checkbox"/> FDD Band 20 <input type="checkbox"/> TDD Band 33 <input type="checkbox"/> TDD Band 34 <input type="checkbox"/> TDD Band 38 <input type="checkbox"/> FDD Band 40 <input type="checkbox"/> FDD Band 42 <input type="checkbox"/> FDD Band 43 (Non-U.S. Bands)
TX Frequency Range	Band 2:1850-1910MHz; Band 4:1710-1755MHz; Band 5:824-849MHz; Band 12:699-716MHz; Band 13:777-787MHz;Band 17: 704-716MHz;
RX Frequency Range	Band 2:1930-1990MHz Band 4:2110-2155MHz; Band 5:869-894MHz; Band 12: 729-746 MHz; Band 13: 746-756 MHz Band 17: 734-746 MHz;
Release Version	Rel-8
Type of modulation	QPSK, 16QAM
Antenna Gain	Band 2: 1.1dBi; Band 4: 1.5dBi; Band 5: 1.2dBi Band 12: 0.98dBi; Band 13: 1.14dBi;Band 17: 0.85dBi
Diversity Antenna gain:	Band 2: 1.0dBi; Band 4: 1.3dBi; Band 5:1.1dBi; Band 12:0.83dBi; Band 13:1.11dBi; Band 17: 0.79dBi
Max. Average Power	Band 2: 23.62dBm; Band 4: 23.88dBm; Band 5: 23.97dBm Band 12: 23.42dBm; Band 13: 24.35dBm; Band 17: 23.45dBm
<b>Bluetooth</b>	
Bluetooth Version	<input type="checkbox"/> V2.0 <input type="checkbox"/> V2.1 <input type="checkbox"/> V2.1+EDR <input checked="" type="checkbox"/> V3.0 <input type="checkbox"/> V3.0+HS <input checked="" type="checkbox"/> V4.0 <input type="checkbox"/> V4.1
Operation Frequency	2402~2480MHz
Type of modulation	<input checked="" type="checkbox"/> GFSK <input checked="" type="checkbox"/> II/4-DQPSK <input checked="" type="checkbox"/> 8-DPSK
Peak Power	1.036dBm
Antenna Gain	1.0dBi
<b>WIFI</b>	
WIFI Specification	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20) <input checked="" type="checkbox"/> 802.11n(40)
Operation Frequency	2412~2462MHz
Avg. Burst Power	11b: 13.65dBm,11g:11.28dBm,11n(20):11.28dBm,11n(40):8.89dBm
Antenna Gain	1.0dBi
<b>Accessories</b>	
Battery	Brand name: Vonino Model No. : V50JM Voltage and Capacitance: 3.7 V & 2150mAh
Adapter	Brand name: Vonino Model No. : TPA-97070070VM Input: AC 100-240V, 50/60Hz, 150mA   Output: DC 5V, 1000mA
Earphone	Brand name: N/A Model No. : N/A
Note:1.CMU200 can measure the average power and Peak power at the same time 2.The sample used for testing is end product.	
Product	Type <input checked="" type="checkbox"/> Production unit <input type="checkbox"/> Identical Prototype

### 3. SAR MEASUREMENT SYSTEM

#### 3.1. The SATIMO system used for performing compliance tests consists of following items

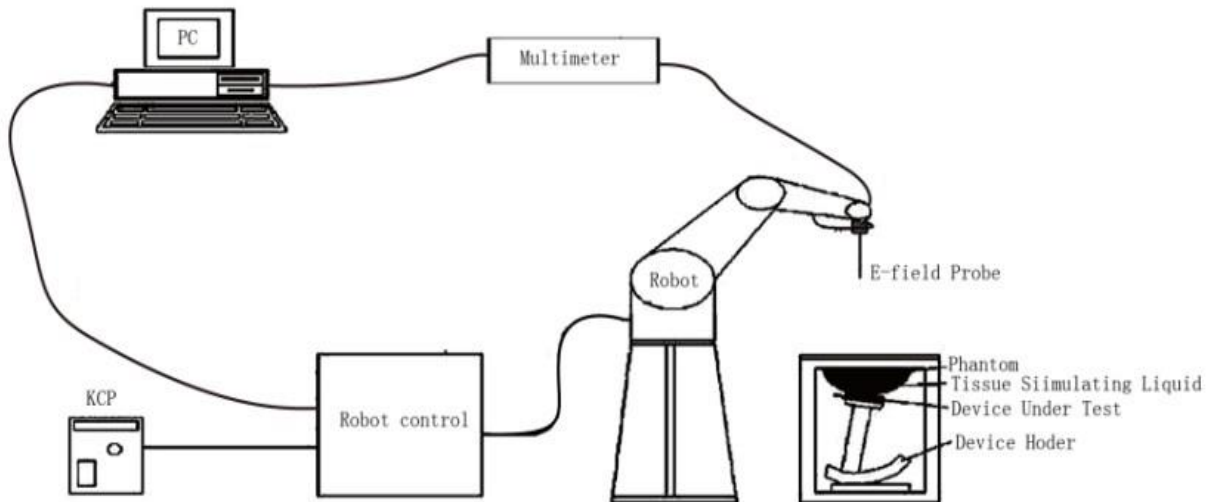

The COMOSAR system for performing compliance tests consists of the following items:


- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.




### 3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

#### Isotropic E-Field Probe Specification

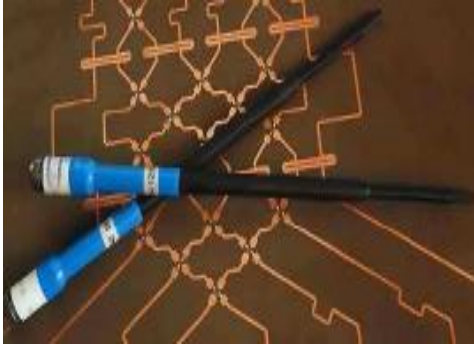
<b>Model</b>	SSE5	
<b>Manufacture</b>	MVG	
<b>Identification No.</b>	SN 22/12 EP159	
<b>Frequency</b>	0.45GHz-3GHz Linearity:±0.11dB(0.45GHz-3GHz)	
<b>Dynamic Range</b>	0.01W/Kg-100W/Kg Linearity:±0.11dB	
<b>Dimensions</b>	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm	
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precision of better 30%.	

### 3.3. Robot

<p>The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used. The XL robot series have many features that are important for our application:</p> <ul style="list-style-type: none"> <li><input type="checkbox"/> High precision (repeatability 0.02 mm)</li> <li><input type="checkbox"/> High reliability (industrial design)</li> <li><input type="checkbox"/> Jerk-free straight movements</li> <li><input type="checkbox"/> Low ELF interference (the closed metallic construction shields against motor control fields)</li> <li><input type="checkbox"/> 6-axis controller</li> </ul>	
--	---


### 3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

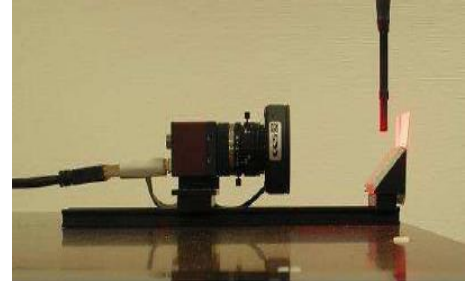

### 3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

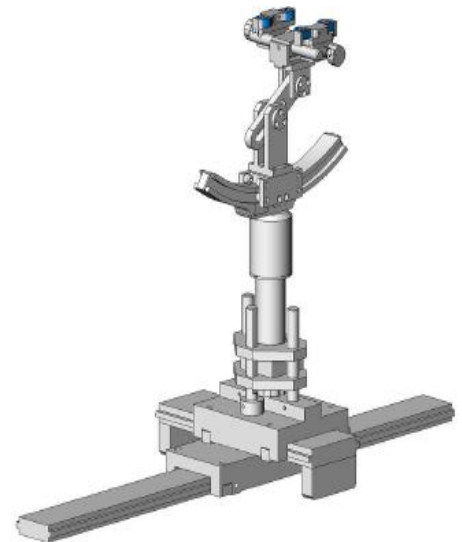

### 3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### 3.7. ELLI39 Phantom

The Flat phantom is a fiberglass shell phantom with 2mm $\pm$  0.2 mm shell thickness. It has only one measurement area for Flat phantom



## 4. SAR MEASUREMENT PROCEDURE

### 4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
c <sub>h</sub>	is the heat capacity of the tissue in joules per kilogram and Kelvin;

$\left. \frac{dT}{dt} \right|_{t=0}$  is the initial time derivative of temperature in the tissue in kelvins per second

## 4.2. SAR Measurement Procedure

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance os sensor calibration points to probe tip as `defined in the probe properties,

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 and IEC62209 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g abd 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### 4.3. RF Exposure Conditions


Test Configuration and setting:

The EUT is a model of GSM Portable Mobile Station (MS). It supports GSM/GPRS/EGPRS, WCDMA/HSPA, LTE, BT, WIFI, and support hot spot mode.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

For WLAN testing, the EUT is configured with the WLAN continuous TX tool through engineering command.

#### Antenna Location: (the back view)

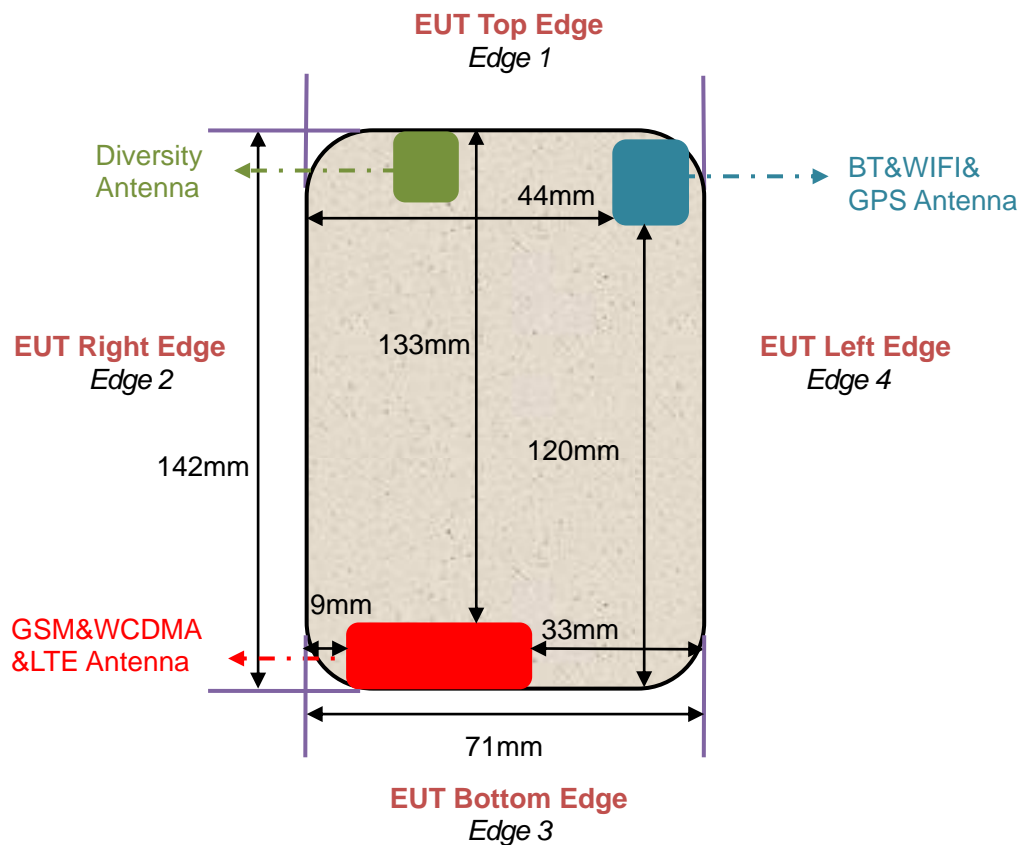

For WWAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	--
Left Tilt		Yes	--
Right Touch		Yes	--
Right Tilt		Yes	--
Body			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Hotspot			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Edge 1 (Top)	133mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 2 (Right)	9mm	Yes	--
Edge 3 (Bottom)	1mm	Yes	--
Edge 4 (Left)	33mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR

For WLAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	--
Left Tilt		Yes	--
Right Touch		Yes	--
Right Tilt		Yes	--
Body			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Hotspot			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Edge 1 (Top)	1mm	Yes	--
Edge 2 (Right)	44mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 3 (Bottom)	120mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 4 (Left)	1mm	Yes	--



## 5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

### 5.1. The composition of the tissue simulating liquid

Ingredient (% Weight) Frequency (MHz)	Water	Nacl	Polysorbate 20	DGBE	1,2 Propanediol	Triton X-100
750 Head	35	2	0.0	0.0	63	0.0
750 Body	55	1	0.0	0.0	44	0.0
835 Head	50.36	1.25	48.39	0.0	0.0	0.0
835 Body	54.00	1	0.0	15	0.0	30
1750 Head	52.64	0.36	0.0	47	0.0	0.0
1750 Body	70	1	0.0	9	0.0	20
1900 Head	54.9	0.18	0.0	44.92	0.0	0.0
1900 Body	70	1	0.0	9	0.0	20
2450 Head	71.88	0.16	0.0	7.99	0.0	19.97
2450 Body	70	1	0.0	9	0.0	20

### 5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE 1528.

Target Frequency (MHz)	head		body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
<b>750</b>	<b>41.9</b>	<b>0.89</b>	<b>55.5</b>	<b>0.96</b>
<b>835</b>	<b>41.5</b>	<b>0.90</b>	<b>55.2</b>	<b>0.97</b>
900	41.5	0.97	55.0	1.05
915	41.5	1.01	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
<b>1750</b>	<b>40.1</b>	<b>1.37</b>	<b>53.4</b>	<b>1.49</b>
<b>1800 – 2000</b>	<b>40.0</b>	<b>1.40</b>	<b>53.3</b>	<b>1.52</b>
<b>2450</b>	<b>39.2</b>	<b>1.80</b>	<b>52.7</b>	<b>1.95</b>
3000	38.5	2.40	52.0	2.73

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000$  kg/m<sup>3</sup>)

### 5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for 750MHz					
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [ $^{\circ}$ C]	Test time
		$\epsilon_r$ 41.9 (39.805-43.995)	$\delta$ [s/m] 0.89(0.8455-0.9345)		
Head	704	41.23	0.88	21.0	Feb. 28,2019
	707.5	41.08	0.89		
	710	41.01	0.89		
	711	40.86	0.90		
	750	40.56	0.91		
	782	40.32	0.91		
	Body	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		
		$\epsilon_r$ 55.5(52.725-58.275)	$\delta$ [s/m]0.96(0.912-1.008)		
704		56.42	0.92	21.2	Feb. 28,2019
707.5		55.38	0.94		
710		54.96	0.94		
711		54.27	0.95		
750		53.51	0.97		
782		53.08	0.98		

Tissue Stimulant Measurement for 835MHz					
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [ $^{\circ}$ C]	Test time
		$\epsilon_r$ 41.5 (39.425-43.575)	$\delta$ [s/m] 0.90(0.855-0.945)		
Head	824.2	42.36	0.89	20.6	Mar. 02,2019
	826.4	41.92	0.90		
	835	41.87	0.91		
	836.6	41.23	0.92		
	846.6	40.75	0.93		
	848.8	40.64	0.94		
	Body	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		
		$\epsilon_r$ 55.20(52.44-57-96)	$\delta$ [s/m]0.97(0.9215-1.0185)		
824.2		56.78	0.95	20.9	Mar. 02,2019
826.4		56.34	0.96		
835		56.12	0.97		
836.6		55.75	0.98		
846.6		55.57	0.99		
848.8	55.49	1.00			

Tissue Stimulant Measurement for 1750MHz					
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test time
		$\epsilon_r$ 40.1 (38.095-42.105)	$\delta$ [s/m]1.37(1.3015-1.439)		
Head	1720	41.68	1.37	20.3	Mar.03,2019
	1732.5	41.22	1.38		
	1745	40.86	1.39		
	1750	40.52	1.40		
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test time
		$\epsilon_r$ 53.4(50.73-56.07)	$\delta$ [s/m] 1.49(1.4155-1.5645)		
Body	1720	54.62	1.50	20.1	Mar.03,2019
	1732.5	54.31	1.51		
	1745	53.79	1.52		
	1750	53.54	1.53		

Tissue Stimulant Measurement for 1900MHz					
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test time
		$\epsilon_r$ 40.00(38.00-42.00)	$\delta$ [s/m]1.40(1.33-1.47)		
Head	1850.2	41.92	1.40	20.6	Mar. 04,2019
	1852.4	41.65	1.41		
	1860	41.52	1.41		
	1880	41.45	1.42		
	1900	40.96	1.43		
	1907.6	40.74	1.44		
	1909.8	40.43	1.45		
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test time
		$\epsilon_r$ 53.30(50.635-55.965)	$\delta$ [s/m]1.52(1.444-1.596)		
Body	1850.2	53.45	1.51	20.4	Mar. 04,2019
	1852.4	52.98	1.52		
	1860	52.66	1.53		
	1880	52.62	1.53		
	1900	51.50	1.54		
	1907.6	51.16	1.54		
	1909.8	51.08	1.55		

Tissue Stimulant Measurement for 2450MHz					
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test time
		$\epsilon_r$ 39.2(37.24-41.16)	$\delta$ [s/m]1.80(1.71-1.89)		
Head	2412	40.67	1.80	20.3	Mar. 01,2019
	2437	40.34	1.81		
	2450	39.10	1.82		
	2462	38.94	1.83		
	Fr. (MHz)	Dielectric Parameters ( $\pm 5\%$ )		Tissue Temp [°C]	Test time
		$\epsilon_r$ 52.7(50.065-55.335)	$\delta$ [s/m]1.95(1.8525-2.0475)		
Body	2412	53.68	1.95	20.5	Mar. 01,2019
	2437	53.26	1.96		
	2450	52.57	1.97		
	2462	52.31	1.98		


## 6. SAR SYSTEM CHECK PROCEDURE

### 6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.


Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

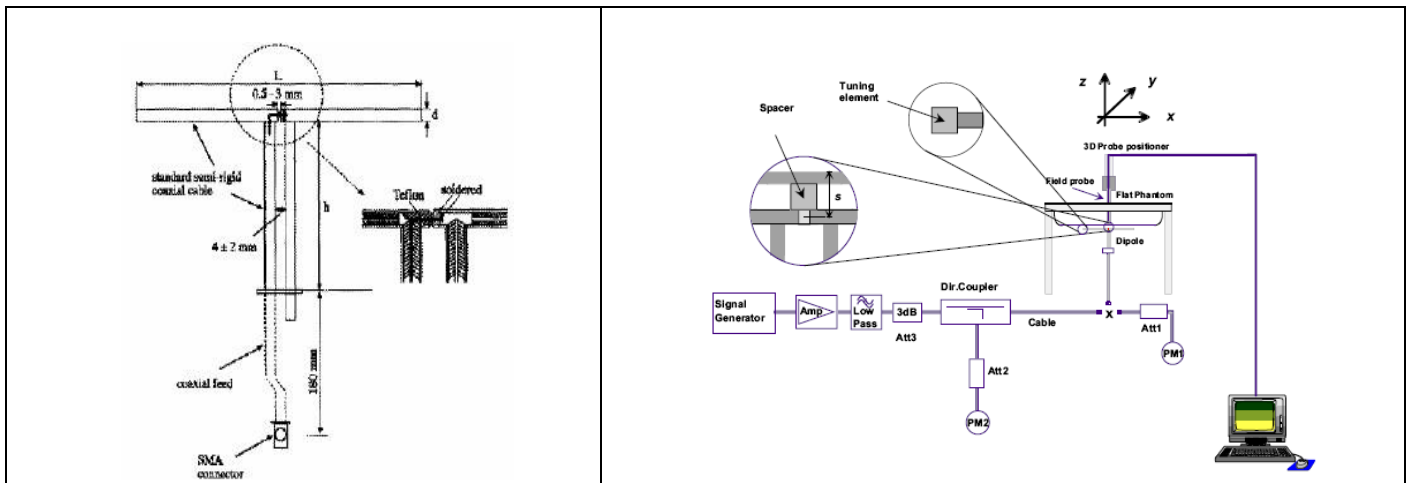

## 6.2. SAR System Check

### 6.2.1. Dipoles

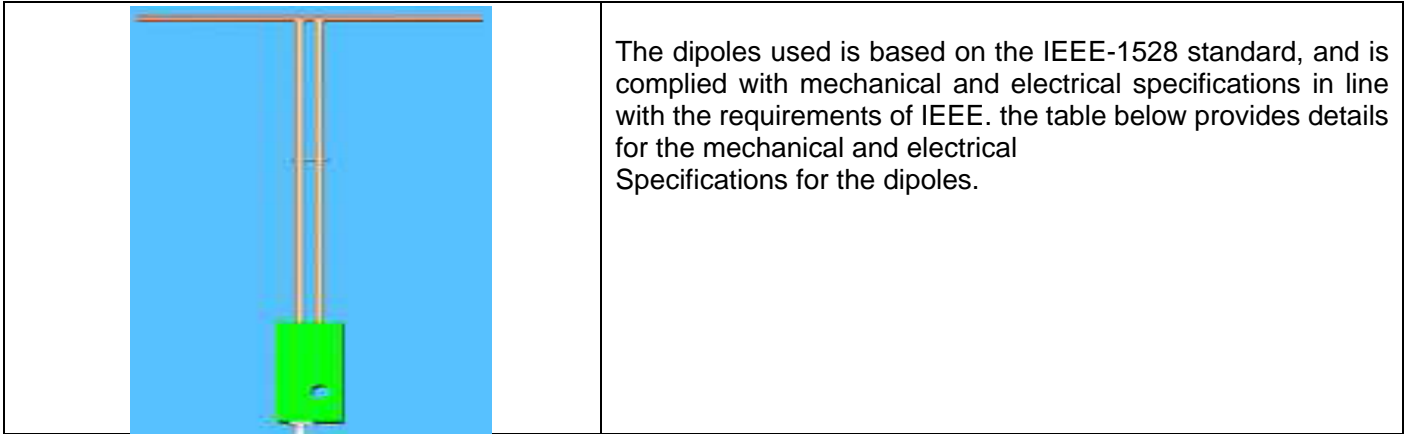

Frequency	L (mm)	h (mm)	d (mm)
750MHz	176	100	6.35
835MHz	161.0	89.8	3.6
1800MHz	71.6	41.7	3.6
1900MHz	68	39.5	3.6
2450MHz	51.5	30.4	3.6

### 6.2.2. System Check Result

System Performance Check at 750MHz&835MHz &1800MHz &1900MHz &2450MHz for Head								
Validation Kit: SN22/16 DIP 0G750-417& SN29/15 DIP 0G835-383& SN29/15 DIP 1G800-387&SN 29/15 DIP 1G900-389& SN 29/15DIP 2G450-393								
Frequency [MHz]	Target Value(W/Kg)		Reference Result ( $\pm 10\%$ )		Tested Value(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
750	8.65	5.68	7.785-9.515	5.112-6.248	9.39	5.88	21.0	Feb. 28,2019
835	10.04	6.43	9.036-11.044	5.787 -7.073	10.35	6.20	20.6	Mar. 02,2019
1800	37.43	19.88	33.687-41.173	17.892-21.868	39.16	20.62	20.3	Mar.03,2019
1900	41.44	21.33	37.296-45.584	19.197-23.463	40.40	21.25	20.6	Mar. 04,2019
2450	54.53	24.30	49.077-59.983	21.87-26.730	52.35	24.42	20.3	Mar. 01,2019
System Performance Check at 750MHz & 835MHz &1800MHz &1900MHz &2450MHz for Body								
Frequency [MHz]	Target Value(W/Kg)		Reference Result ( $\pm 10\%$ )		Tested Value(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
750	8.95	5.97	8.055-9.845	5.373-6.567	9.56	6.22	21.2	Feb. 28,2019
835	9.85	6.45	8.865-10.835	5.805-7.095	10.24	6.74	20.9	Mar. 02,2019
1800	36.53	19.80	32.877-40.183	17.82-21.780	37.73	19.97	20.1	Mar.03,2019
1900	39.38	20.86	35.442-43.318	18.774-22.946	42.05	18.88	20.4	Mar. 04,2019
2450	49.92	23.16	44.928-54.912	20.844-25.476	54.06	21.56	20.5	Mar. 01,2019

Note:



(1) We use a CW signal of 18dBm for system check, and then all SAR value are normalized to 1W forward power. The result must be within  $\pm 10\%$  of target value.

## 7. EUT TEST POSITION

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Body back, Body front and 4 edges.**

### 7.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

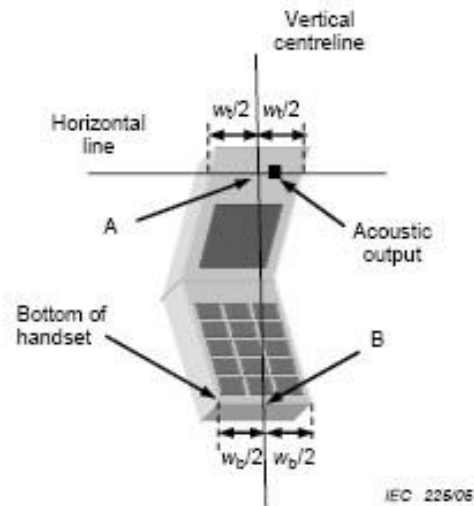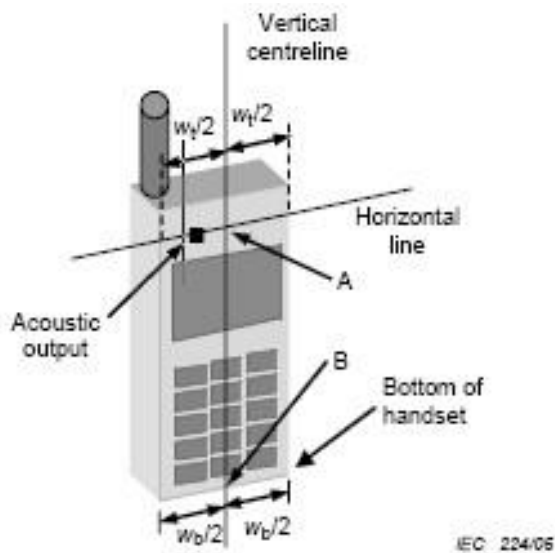



## 7.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost





## 7.3. Tilt Position

- (1) To position the device in the "cheek" position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.



#### 7.4. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **10mm**.

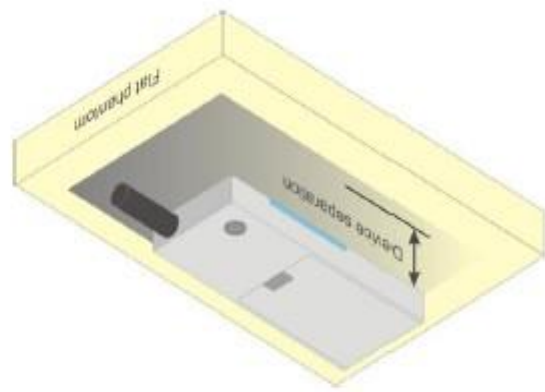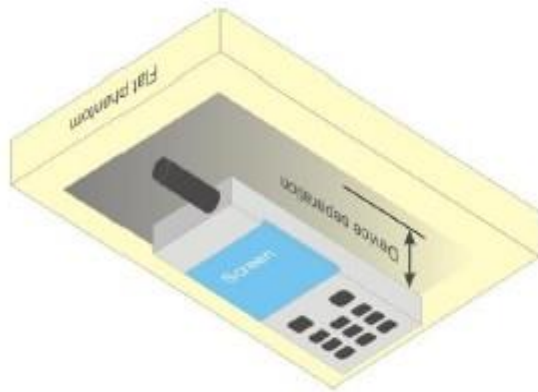

## 8. SAR EXPOSURE LIMITS

### Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (1g cube tissue for brain or body)	1.60
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.0

## 9. TEST FACILITY

<b>Test Site</b>	Attestation of Global Compliance (Shenzhen) Co., Ltd
<b>Location</b>	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
<b>Designation Number</b>	CN1259
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## 10. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	MVG	SN 22/12 EP159	Aug. 08,2018	Aug. 07,2019
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Phantom	SATIMO	ELLI39	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	Agilent-8960	GB46310822	Feb. 27,2019	Feb. 26,2020
Comm Tester	R&S- CMW500	S/N121209	Jul. 12,2018	Jul. 11,2019
Multimeter	Keithley 2000	4114939	Sep 20,2018	Sep 19,2019
Dipole	SATIMO SID750	SN22/16 DIP 0G750-417	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID835	SN29/15 DIP 0G835-383	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID1800	SN29/15 DIP 1G800-387	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID1900	SN 29/15 DIP 1G900-389	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID2450	SN29/15 DIP 2G450-393	Jul. 05,2016	Jul. 04,2019
Signal Generator	Agilent-E4438C	US41461365	Feb. 27,2019	Feb. 26,2020
Vector Analyzer	Agilent / E4440A	US41421290	Feb. 27,2019	Feb. 26,2020
Network Analyzer	Rhode & Schwarz ZVL6	SN100132	Feb. 27,2019	Feb. 26,2020
Attenuator	Warison /WATT-6SR1211	S/N:WRJ34AYM2F 1	June 12,2018	June 11, 2019
Attenuator	Mini-circuits / VAT-10+	31405	June 12,2018	June 11, 2019
Amplifier	EM30180	SN060552	Feb. 27,2019	Feb. 26,2020
Directional Couple	Werlatone/ C5571-10	SN99463	Jun. 12,2018	Jun. 19,2019
Directional Couple	Werlatone/ C6026-10	SN99482	Jun. 12,2018	Jun. 19,2019
Power Sensor	NRP-Z21	1137.6000.02	Sep. 20,2018	Sep. 19,2019
Power Sensor	NRP-Z23	US38261498	Feb. 27,2019	Feb. 26,2020
Power Viewer	R&S	V2.3.1.0	N/A	N/A

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

## 11. MEASUREMENT UNCERTAINTY

Measurement uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	e f(d,k)	f	g	h cx <sub>f</sub> /e	i cx <sub>g</sub> /e	k
Uncertainty Component	Sec.	Tol (± %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g U <sub>i</sub> (±%)	10g U <sub>i</sub> (±%)	v <sub>i</sub>
<b>Measurement System</b>									
Probe calibration	E.2.1	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	E.2.2	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	E.2.2	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
<b>Test sample Related</b>									
Test sample positioning	E.4.2	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	E.4.1	3	N	1	1	1	3	3	∞
Output power variation—SAR drift measurement	E.2.9	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	E.6.5	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
<b>Phantom and tissue parameters</b>									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)			K=2				19.58	19.18	

System check uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	<sup>e</sup> f(d,k)	f	g	<sup>h</sup> cxf/e	<sup>i</sup> cxg/e	k
Uncertainty Component	Sec.	Tol (± %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
<b>Measurement System</b>									
Probe calibration drift	E.2.1.3	0.5	N	1	1	1	0.50	0.50	∞
Axial Isotropy	E.2.2	0.695	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	E.2.4	0.685	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	0	0	0.00	0.00	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
<b>System check source (dipole)</b>									
Deviation of experimental dipoles	E.6.4	2	N	1	1	1	2	2	∞
Input power and SAR drift measurement	8,6.6.4	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
<b>Phantom and tissue parameters</b>									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				5.564	5.205	
Expanded Uncertainty (95% Confidence interval)			K=2				11.128	10.410	

System Validation uncertainty for Dipole averaged over 1 gram / 10 gram.									
a	b	c	d	<sup>e</sup> f(d,k)	f	g	<sup>h</sup> cxf/e	<sup>i</sup> cxg/e	k
Uncertainty Component	Sec.	Tol (±%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (±%)	10g Ui (±%)	vi
<b>Measurement System</b>									
Probe calibration	E.2.1	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	E.2.2	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	E.2.2	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
<b>System check source (dipole)</b>									
Deviation of experimental dipole from numerical dipole	E.6.4	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
<b>Phantom and tissue parameters</b>									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	4.0	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity measurement	E.3.3	5.0	N	1	0.23	0.26	1.15	1.30	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty			RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)			K=2				19.437	19.035	



## 12. CONDUCTED POWER MEASUREMENT GSM BAND

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
GSM 850	824.2	33.43	-9	24.43
	836.6	33.70	-9	24.70
	848.8	<b>34.43</b>	-9	25.43
GPRS 850 (1 Slot)	824.2	33.58	-9	24.58
	836.6	33.80	-9	24.80
	848.8	33.49	-9	24.49
GPRS 850 (2 Slot)	824.2	31.44	-6	25.44
	836.6	31.59	-6	25.59
	848.8	31.54	-6	25.54
GPRS 850 (3 Slot)	824.2	29.47	-4.26	25.21
	836.6	29.36	-4.26	25.10
	848.8	29.42	-4.26	25.16
GPRS 850 (4 Slot)	824.2	28.43	-3	25.43
	836.6	28.52	-3	25.52
	848.8	28.66	-3	<b>25.66</b>
EGPRS 850 (1 Slot)	824.2	27.82	-9	18.82
	836.6	27.67	-9	18.67
	848.8	28.41	-9	19.41
EGPRS 850 (2 Slot)	824.2	26.44	-6	20.44
	836.6	26.39	-6	20.39
	848.8	26.45	-6	20.45
EGPRS 850 (3 Slot)	824.2	25.78	-4.26	21.52
	836.6	25.58	-4.26	21.32
	848.8	26.77	-4.26	22.51
EGPRS 850 (4 Slot)	824.2	25.39	-3	22.39
	836.6	25.42	-3	22.42
	848.8	25.49	-3	22.49

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
GSM 850	824.2	33.31	-9	24.31
	836.6	33.58	-9	24.58
	848.8	34.35	-9	25.35
GPRS 850 (1 Slot)	824.2	33.46	-9	24.46
	836.6	33.67	-9	24.67
	848.8	33.35	-9	24.35
GPRS 850 (2 Slot)	824.2	31.32	-6	25.32
	836.6	31.44	-6	25.44
	848.8	31.42	-6	25.42
GPRS 850 (3 Slot)	824.2	29.35	-4.26	25.09
	836.6	29.24	-4.26	24.98
	848.8	29.33	-4.26	25.07
GPRS 850 (4 Slot)	824.2	28.31	-3	25.31
	836.6	28.46	-3	25.46
	848.8	28.54	-3	25.54

**GSM BAND CONTINUE**

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
PCS1900	1850.2	31.22	-9	22.22
	1880	<b>31.23</b>	-9	22.23
	1909.8	31.08	-9	22.08
GPRS1900 (1 Slot)	1850.2	30.27	-9	21.27
	1880	30.71	-9	21.71
	1909.8	30.81	-9	21.81
GPRS1900 (2 Slot)	1850.2	28.88	-6	22.88
	1880	28.73	-6	22.73
	1909.8	28.69	-6	22.69
GPRS1900 (3 Slot)	1850.2	27.25	-4.26	22.99
	1880	27.56	-4.26	<b>23.30</b>
	1909.8	27.44	-4.26	23.18
GPRS1900 (4 Slot)	1850.2	25.36	-3	22.36
	1880	25.33	-3	22.33
	1909.8	25.52	-3	22.52
EGPRS1900 (1 Slot)	1850.2	26.63	-9	17.63
	1880	26.03	-9	17.03
	1909.8	26.77	-9	17.77
EGPRS1900 (2 Slot)	1850.2	25.44	-6	19.44
	1880	25.36	-6	19.36
	1909.8	25.47	-6	19.47
EGPRS1900 (3 Slot)	1850.2	26.01	-4.26	21.75
	1880	26.00	-4.26	21.74
	1909.8	25.06	-4.26	20.80
EGPRS1900 (4 Slot)	1850.2	26.11	-3	23.11
	1880	25.23	-3	22.23
	1909.8	25.88	-3	22.88

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
PCS1900	1850.2	31.14	-9	22.14
	1880	31.11	-9	22.11
	1909.8	30.96	-9	21.96
GPRS1900 (1 Slot)	1850.2	30.15	-9	21.15
	1880	30.59	-9	21.59
	1909.8	30.67	-9	21.67
GPRS1900 (2 Slot)	1850.2	28.76	-6	22.76
	1880	28.62	-6	22.62
	1909.8	28.58	-6	22.58
GPRS1900 (3 Slot)	1850.2	27.16	-4.26	22.90
	1880	27.44	-4.26	23.18
	1909.8	27.32	-4.26	23.06
GPRS1900 (4 Slot)	1850.2	25.25	-3	22.25
	1880	25.21	-3	22.21
	1909.8	25.43	-3	22.43

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) – 6 dB

Frame Power = Max burst power (3 Up Slot) – 4.26 dB

Frame Power = Max burst power (4 Up Slot) – 3 dB

Note 2:

SAR is not required for GPRS (1 Slot) Mode because its output power is less than of Voice Mode

**UMTS BAND**

**HSDPA Setup Configuration:**

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Based Station with following setting:
  - (1) Set Gain Factors( $\beta_c$  and  $\beta_d$ ) parameters set according to each
  - (2) Set RMC 12.2Kbps+HSDPA mode.
  - (3) Set Cell Power=-86dBm
  - (4) Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - (5) Select HSDPA Uplink Parameters
  - (6) Set Delta ACK, Delta NACK and Delta CQI=8
  - (7) Set Ack - Nack Repetition Factor to 3
  - (8) Set CQI Feedback Cycle (k) to 4ms
  - (9) Set CQI Repetition Factor to 2
  - (10) Power Ctrl Mode=All Up bits
- The transmitted maximum output power was recorded.

Table C.10.2.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH

Sub-test	$\beta_c$ (Note5)	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15(Note 4)	15/15(Note 4)	64	12/15(Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta ACK, \Delta NACK$  and  $\Delta CQI = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta ACK$  and  $\Delta NACK = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta CQI = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $hs/c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $c/d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $c = 11/15$  and  $d = 15/15$ .

**HSUPA Setup Configuration:**

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting \* :
  - (1) Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - (2) Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - (3) Set Cell Power = -86 dBm
  - (4) Set Channel Type = 12.2k + HSPA
  - (5) Set UE Target Power
  - (6) Power Ctrl Mode= Alternating bits
  - (7) Set and observe the E-TFCI
  - (8) Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Code s)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TF CI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $hs/c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $c/d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $c = 10/15$  and  $d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**UMTS BAND II**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Avg. Burst Power (dBm)</b>
WCDMA 1900 RMC	1852.4	<b>22.97</b>
	1880	22.68
	1907.6	22.67
WCDMA 1900 AMR	1852.4	22.03
	1880	22.12
	1907.6	22.09
HSDPA Subtest 1	1852.4	21.52
	1880	21.35
	1907.6	21.32
HSDPA Subtest 2	1852.4	20.85
	1880	20.65
	1907.6	20.65
HSDPA Subtest 3	1852.4	20.83
	1880	20.71
	1907.6	20.56
HSDPA Subtest 4	1852.4	20.78
	1880	20.71
	1907.6	20.53
HSUPA Subtest 1	1852.4	19.50
	1880	19.14
	1907.6	19.13
HSUPA Subtest 2	1852.4	19.59
	1880	19.23
	1907.6	19.23
HSUPA Subtest 3	1852.4	20.49
	1880	20.13
	1907.6	20.11
HSUPA Subtest 4	1852.4	19.13
	1880	18.77
	1907.6	18.70
HSUPA Subtest 5	1852.4	19.72
	1880	19.49
	1907.6	19.32

**UMTS BAND V**

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Avg. Burst Power (dBm)</b>
WCDMA 850 RMC	826.4	23.42
	836.6	23.69
	846.6	<b>24.33</b>
WCDMA 850 AMR	826.4	22.44
	836.6	22.49
	846.6	22.35
HSDPA Subtest 1	826.4	22.35
	836.6	22.57
	846.6	23.32
HSDPA Subtest 2	826.4	21.61
	836.6	21.89
	846.6	22.62
HSDPA Subtest 3	826.4	21.66
	836.6	21.79
	846.6	22.56
HSDPA Subtest 4	826.4	21.61
	836.6	21.77
	846.6	22.53
HSUPA Subtest 1	826.4	20.32
	836.6	20.48
	846.6	21.28
HSUPA Subtest 2	826.4	20.26
	836.6	20.54
	846.6	21.34
HSUPA Subtest 3	826.4	21.25
	836.6	21.48
	846.6	22.25
HSUPA Subtest 4	826.4	19.73
	836.6	21.48
	846.6	22.25
HSUPA Subtest 5	826.4	20.54
	836.6	19.38
	846.6	21.69



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ .For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**LTE Band**

Conducted Power of LTE Band II(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					18607	18900	19193	
1.4MHz	QPSK	1	0	0	22.37	22.15	22.27	
			2	0	22.82	22.10	22.58	
			5	0	22.39	22.09	22.86	
		3	0	0	22.74	21.55	21.59	
			1	0	22.66	21.49	21.33	
			2	0	22.19	21.14	21.84	
	6	0	1	22.43	20.44	21.24		
	16QAM	1	0	1	21.27	22.40	21.49	
			2	1	21.90	22.58	21.36	
			5	1	21.31	22.40	22.23	
		3	0	1	22.37	22.11	22.03	
			1	1	22.33	22.52	22.22	
			2	1	22.18	22.03	22.09	
		6	0	2	22.24	22.25	22.48	
		Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel
						18615	18900	19185
3MHz	QPSK	1	0	0	22.92	21.97	22.41	
			8	0	22.47	21.88	22.58	
			14	0	22.75	21.87	22.68	
		8	0	1	22.33	21.43	22.33	
			4	1	22.19	21.48	22.40	
			8	1	22.20	21.33	22.13	
	15	0	1	21.29	21.28	21.32		
	16QAM	1	0	1	21.27	21.36	21.65	
			8	1	21.05	21.16	21.64	
			14	1	21.19	21.34	21.05	
		8	0	2	22.15	22.33	22.44	
			4	2	22.27	22.19	22.37	
			8	2	22.33	22.30	22.20	
		15	0	2	22.25	22.23	22.44	

Conducted Power of LTE Band II(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					18625	18900	19175	
5MHz	QPSK	1	0	0	22.82	22.81	22.54	
			12	0	22.33	22.00	22.55	
			24	0	22.52	22.66	22.63	
		12	0	1	21.52	22.16	22.59	
			6	1	21.23	22.49	22.49	
			13	1	21.66	22.88	22.86	
	25	0	1	22.73	22.92	22.08		
	16QAM	1	0	1	22.08	21.10	21.73	
			12	1	22.15	21.01	21.11	
			24	1	22.91	21.02	21.95	
		12	0	2	22.16	22.06	21.38	
			6	2	22.19	22.10	21.42	
			13	2	22.78	22.09	21.98	
		25	0	2	22.82	22.02	22.24	
		Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel
						18650	18900	19150
10MHz	QPSK	1	0	0	22.79	22.44	21.94	
			24	0	22.93	22.87	21.55	
			49	0	22.62	22.86	21.04	
		25	0	1	22.22	21.42	22.01	
			12	1	22.42	21.22	22.11	
			25	1	22.12	21.64	22.00	
	50	0	1	21.39	22.77	21.17		
	16QAM	1	0	1	21.69	22.87	22.19	
			24	1	21.88	22.51	22.52	
			49	1	22.89	21.38	22.42	
		25	0	2	22.13	22.33	22.13	
			12	2	22.22	22.15	22.03	
			25	2	22.22	22.73	22.11	
		50	0	2	22.49	22.90	22.33	

Conducted Power of LTE Band II(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					18675	18900	19125	
15MHz	QPSK	1	0	0	22.54	22.62	22.76	
			38	0	22.22	22.58	22.05	
			74	0	22.62	22.77	22.14	
		36	0	1	22.45	22.13	21.11	
			18	1	22.39	22.53	22.36	
			37	1	22.88	22.38	21.02	
		75	0	1	21.17	21.62	21.02	
		16QAM	1	0	1	21.82	21.02	22.99
				38	1	21.19	21.05	22.58
	74			1	22.00	21.14	22.52	
	36		0	2	21.55	22.52	22.23	
			18	2	21.79	22.34	22.27	
			37	2	21.96	22.50	22.14	
	75	0	2	22.26	22.74	22.16		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18700	18900	19100	
20MHz	QPSK	1	0	0	22.76	22.96	22.87	
			49	0	22.55	21.43	22.50	
			99	0	22.06	22.88	22.42	
		50	0	1	22.43	22.42	22.08	
			25	1	22.85	22.17	22.19	
			49	1	22.96	22.33	22.12	
		100	0	1	22.36	22.64	22.02	
		16QAM	1	0	1	22.62	<b>23.62</b>	23.60
				49	1	22.46	22.89	21.77
	99			1	22.43	22.99	21.43	
	50		0	2	22.02	22.46	21.05	
			25	2	22.12	22.58	22.42	
			49	2	22.16	22.99	22.16	
	100	0	2	22.54	22.88	22.54		

Conducted Power of LTE Band IV(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					19957	20175	20393	
1.4MHz	QPSK	1	0	0	23.44	21.23	21.40	
			2	0	23.53	21.16	21.39	
			5	0	23.28	21.03	21.38	
		3	0	0	22.66	22.00	22.36	
			1	0	22.58	22.13	22.58	
			2	0	22.07	22.10	22.42	
		6	0	1	22.15	22.26	23.10	
		16QAM	1	0	1	22.33	22.41	22.00
				2	1	22.46	22.46	22.06
	5			1	22.35	22.37	22.10	
	3		0	1	22.85	20.69	22.22	
			1	1	22.69	20.46	22.58	
			2	1	22.01	20.89	22.37	
	6	0	2	20.05	22.43	22.29		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19965	20175	20385	
3MHz	QPSK	1	0	0	23.11	22.24	21.89	
			7	0	23.18	22.59	21.75	
			14	0	23.27	22.86	21.56	
		8	0	1	22.55	21.99	21.85	
			4	1	22.46	21.67	21.74	
			7	1	22.66	21.70	21.39	
		15	0	1	21.12	22.25	22.03	
		16QAM	1	0	1	21.18	22.51	21.46
				7	1	21.20	22.55	21.53
	14			1	21.46	22.30	21.43	
	8		0	2	21.56	23.00	22.28	
			4	2	21.57	23.03	22.67	
			7	2	22.19	23.12	22.33	
	15	0	2	22.09	22.32	22.38		

Conducted Power of LTE Band IV(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					19975	20175	20375	
5MHz	QPSK	1	0	0	22.89	21.23	21.23	
			12	0	22.92	21.33	21.36	
			24	0	22.57	21.28	21.40	
		12	0	1	22.33	20.66	22.10	
			6	1	22.42	20.76	22.09	
			11	1	22.03	20.84	22.22	
		25	0	1	23.09	22.85	21.23	
		16QAM	1	0	1	21.45	22.25	21.42
				12	1	21.52	22.36	21.56
	24			1	21.58	22.17	21.50	
	12		0	2	22.10	22.00	22.52	
			6	2	22.04	22.07	22.58	
			11	2	22.12	22.02	22.38	
	25	0	2	22.14	21.94	22.30		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20000	20175	20350	
10MHz	QPSK	1	0	0	21.89	22.73	22.58	
			24	0	21.76	22.66	22.96	
			49	0	21.52	22.37	22.76	
		25	0	1	22.78	21.33	23.11	
			12	1	22.69	21.49	23.01	
			25	1	22.92	21.76	23.07	
		50	0	1	22.97	22.79	23.01	
		16QAM	1	0	1	22.03	22.06	21.85
				24	1	22.11	22.15	21.69
	49			1	22.17	22.05	21.14	
	25		0	2	21.33	21.86	19.55	
			12	2	21.46	21.69	19.39	
			25	2	21.97	21.82	19.15	
	50		0	2	22.02	21.89	22.11	

Conducted Power of LTE Band IV(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					20025	20175	20325	
15MHz	QPSK	1	0	0	23.26	21.86	22.50	
			37	0	23.10	21.48	22.66	
			74	0	23.19	20.42	22.81	
		36	0	1	22.46	22.44	22.58	
			16	1	22.55	22.43	22.69	
			35	1	22.84	22.71	22.96	
		75	0	1	22.89	22.74	22.90	
		16QAM	1	0	1	22.18	22.11	22.79
				37	1	22.55	22.14	22.77
	74			1	22.75	22.31	22.98	
	36		0	2	21.39	21.58	22.01	
			16	2	21.43	21.85	22.11	
			35	2	21.88	21.80	22.02	
	75	0	2	21.56	21.84	21.98		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20050	20175	20300	
20MHz	QPSK	1	0	0	22.20	<b>23.88</b>	22.66	
			49	0	23.79	22.64	22.59	
			99	0	23.64	22.20	22.82	
		50	0	1	22.49	22.64	22.56	
			25	1	22.47	22.70	22.77	
			50	1	22.73	22.31	22.85	
		100	0	1	22.20	22.75	21.49	
		16QAM	1	0	1	21.16	21.99	22.03
				49	1	21.86	21.76	21.98
	99			1	21.55	21.84	21.78	
	50		0	2	21.80	21.76	22.55	
			25	2	21.90	21.83	22.41	
			50	2	22.01	21.66	22.78	
	100		0	2	22.11	22.03	21.00	

Conducted Power of LTE Band V(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					20407	20525	20643	
1.4MHz	QPSK	1	0	0	23.40	22.67	21.41	
			2	0	23.43	22.68	21.61	
			5	0	23.38	22.41	21.57	
		3	0	0	22.53	21.58	22.05	
			1	0	22.72	21.71	22.35	
			2	0	22.33	21.34	22.82	
		6	0	1	21.67	22.87	22.21	
		16QAM	1	0	1	21.39	22.68	21.68
				2	1	21.86	22.52	21.80
	5			1	22.85	22.53	21.83	
	3		0	1	22.34	21.27	22.44	
			1	1	22.33	21.41	22.07	
			2	1	22.43	21.50	22.40	
	6	0	2	22.52	23.16	22.35		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
20415						20525	20635	
3MHz	QPSK	1	0	0	23.65	23.31	22.43	
			7	0	23.28	23.52	22.69	
			14	0	23.75	<b>23.97</b>	22.73	
		8	0	1	22.08	22.60	21.61	
			4	1	22.30	22.33	21.27	
			7	1	22.56	22.55	21.91	
		15	0	1	22.54	22.25	22.78	
		16QAM	1	0	1	22.51	21.60	22.55
				7	1	22.10	21.40	22.88
	14			1	22.62	21.37	22.98	
	8		0	2	22.77	22.47	21.64	
			4	2	22.43	22.24	21.70	
			7	2	22.55	22.92	21.73	
	15		0	2	23.13	22.62	22.65	



Conducted Power of LTE Band V(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					20425	20525	20625	
5MHz	QPSK	1	0	0	23.46	22.10	23.28	
			12	0	23.43	22.59	23.00	
			24	0	23.82	22.97	20.55	
		12	0	1	22.48	21.29	21.61	
			6	1	22.92	21.47	21.90	
			11	1	22.58	21.91	21.69	
		25	0	1	22.15	20.94	22.44	
		16QAM	1	0	1	21.05	20.77	22.58
				12	1	21.14	20.63	22.29
	24			1	21.33	20.68	22.12	
	12		0	2	22.57	22.09	22.22	
			6	2	22.13	22.17	22.61	
			11	2	22.69	22.28	22.56	
	25	0	2	22.21	23.10	22.95		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20450	20525	20600	
10MHz	QPSK	1	0	0	23.23	21.33	22.04	
			24	0	23.33	21.25	22.89	
			49	0	23.49	21.99	22.58	
		25	0	1	22.20	22.06	21.40	
			12	1	22.06	22.31	21.69	
			25	1	22.14	22.20	21.10	
		50	0	1	22.61	23.14	22.93	
		16QAM	1	0	1	22.30	22.57	21.55
				24	1	22.99	22.74	21.39
	49			1	22.05	22.27	21.69	
	25		0	2	22.85	21.99	22.42	
			12	2	22.74	21.21	22.89	
			25	2	22.45	21.68	22.09	
	50		0	2	22.85	22.21	22.86	

Conducted Power of LTE Band XII(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					23017	23095	23173	
1.4MHz	QPSK	1	0	0	23.03	21.37	22.79	
			2	0	23.11	21.34	22.86	
			5	0	23.05	21.37	22.66	
		3	0	0	22.84	21.69	22.44	
			1	0	22.76	21.58	22.34	
			2	0	22.95	21.44	22.78	
		6	0	1	21.91	22.39	21.84	
		16QAM	1	0	1	22.20	22.74	22.07
				2	1	22.14	22.84	21.89
	5			1	22.38	22.77	21.93	
	3		0	1	22.36	22.46	21.89	
			1	1	22.14	22.50	21.67	
			2	1	22.04	22.49	21.87	
	6	0	2	21.90	21.40	21.01		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
23025						23095	23165	
3MHz	QPSK	1	0	0	22.94	23.33	22.94	
			7	0	22.87	23.42	22.83	
			14	0	23.11	23.09	22.66	
		8	0	1	22.11	22.14	21.83	
			4	1	22.17	22.13	21.79	
			7	1	22.09	22.47	21.88	
		15	0	1	21.98	22.43	21.90	
		16QAM	1	0	1	22.21	22.75	22.22
				7	1	22.36	22.58	22.43
	14			1	22.41	22.58	21.91	
	8		0	2	21.43	21.46	22.69	
			4	2	21.55	21.43	22.66	
			7	2	21.17	21.45	22.88	
	15		0	2	20.97	21.48	22.98	

Conducted Power of LTE Band XII(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					23035	23095	23155	
5MHz	QPSK	1	0	0	23.13	22.43	22.28	
			12	0	<b>23.42</b>	22.67	22.85	
			24	0	23.27	22.70	22.79	
		12	0	1	21.58	21.78	22.01	
			6	1	21.66	21.83	22.00	
			13	1	21.96	21.77	22.03	
		25	0	1	21.79	22.07	22.07	
		16QAM	1	0	1	22.23	22.70	22.35
				12	1	22.46	22.66	22.43
	24			1	22.60	22.02	21.97	
	12		0	2	21.01	21.46	22.11	
			6	2	21.00	21.86	22.03	
			13	2	21.02	21.90	22.06	
	25	0	2	21.78	21.06	21.12		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23060	23095	23130	
10MHz	QPSK	1	0	0	23.21	22.21	21.39	
			24	0	23.15	22.25	21.43	
			49	0	23.06	22.53	21.79	
		25	0	1	22.16	21.55	22.01	
			12	1	22.33	21.43	22.03	
			25	1	22.11	21.59	22.00	
		50	0	1	22.21	22.13	22.10	
		16QAM	1	0	1	22.26	22.09	22.68
				24	1	22.28	22.24	22.13
	49			1	22.04	22.00	22.56	
	25		0	2	21.41	21.46	22.46	
			12	2	21.42	21.23	22.73	
			25	2	21.39	21.70	22.96	
	50		0	2	21.18	21.21	21.19	

Conducted Power of LTE Band XIII(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					23205	23230	23255	
5MHz	QPSK	1	0	0	22.52	23.84	22.74	
			12	0	22.22	22.28	23.50	
			24	0	22.90	22.39	22.58	
		12	0	1	22.73	23.54	23.90	
			6	1	22.59	22.92	23.06	
			13	1	22.66	22.92	22.88	
		25	0	1	23.11	22.91	23.32	
		16QAM	1	0	1	23.00	23.76	23.01
				12	1	22.00	23.96	21.88
	24			1	22.74	23.85	21.72	
	12		0	2	22.39	23.70	22.91	
			6	2	21.67	23.28	21.95	
			13	2	21.91	<b>24.35</b>	22.10	
	25	0	2	22.16	23.62	22.91		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel		
					23230			
10MHz	QPSK	1	0	0	22.82			
			24	0	22.90			
			49	0	22.10			
		25	0	1	22.61			
			12	1	22.68			
			25	1	23.00			
		50	0	1	22.89			
		16QAM	1	0	1	22.60		
				24	1	23.30		
	49			1	22.49			
	25		0	2	23.52			
			12	2	21.93			
			25	2	21.66			
	50	0	2	23.18				

Conducted Power of LTE Band XVII(dBm)								
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel	
					23755	23790	23825	
5MHz	QPSK	1	0	0	23.33	23.40	22.27	
			12	0	23.41	<b>23.45</b>	22.66	
			24	0	23.19	23.11	22.79	
		12	0	1	22.14	21.57	21.56	
			6	1	22.17	21.35	21.46	
			13	1	22.22	21.70	21.95	
		25	0	1	22.38	21.94	22.02	
		16QAM	1	0	1	22.64	22.68	22.51
				12	1	22.37	22.48	22.49
	24			1	22.50	22.44	22.67	
	12		0	2	21.12	22.58	21.47	
			6	2	21.39	22.47	21.39	
			13	2	21.26	22.87	21.03	
	25	0	2	21.44	22.99	21.15		
	Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
23780						23790	23800	
10MHz	QPSK	1	0	0	23.27	21.31	22.40	
			24	0	23.45	21.36	22.49	
			49	0	23.38	21.85	22.79	
		25	0	1	21.36	22.36	21.45	
			12	1	21.49	22.42	21.53	
			25	1	21.66	22.84	21.06	
		50	0	1	22.19	22.20	22.19	
		16QAM	1	0	1	22.61	22.78	22.66
				24	1	22.36	22.45	22.34
	49			1	22.32	22.38	22.10	
	25		0	2	22.49	21.42	21.49	
			12	2	22.47	21.36	21.36	
			25	2	22.73	21.90	21.15	
	50		0	2	21.21	21.26	21.25	

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

**Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3**

Modulation	Maximum Power Reduction (MPR) for Power[RB]						MPR(dB)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	>5	>4	>8	>12	>16	>18	≤1
16QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤1
16QAM	>5	>4	>8	>12	>16	>18	≤2

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".3

**Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements**

Network Signaling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
NS_03	6.6.2.2.3.1	2,4,10, 23, 25,35,36	3	>5	$\leq 1$
			5	>6	$\leq 1$
			10	>6	$\leq 1$
			15	>8	$\leq 1$
			20	>10	$\leq 1$
NS_04	6.6.2.2.3.2	41	5	>6	$\leq 1$
			10, 15, 20	Table 6.2.4.3-4	
NS_05	6.6.3.3.3.1	1	10,15,20	$\geq 50$	$\leq 1$
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.4.2-1	N/A
NS_07	6.6.2.2.3.3 6.6.3.3.3.2	13	10	Table 6.2.4.3-2	Table 6.2.4.3-2
NS_08	6.6.3.3.3.3	19	10, 15	> 44	$\leq 3$
NS_09	6.6.3.3.3.4	21	10, 15	> 40	$\leq 1$
				> 55	$\leq 2$
NS_10		20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_11	6.6.2.2.1 6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-9 Table 6.2.4.3-10	Table 6.2.4.3-9, Table 6.2.4.3-10
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4.3-11, Table 6.2.4.3-12, Table 6.2.4.3-13	
NS_17	6.6.3.3.10 6.6.3.3.11	28 28	5, 10	Table 5.4.2-1	N/A
			5	$\geq 2$	$\leq 1$
NS_18			10, 15, 20	$\geq 1$	$\leq 4$
NS_19			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_20			5, 10, 15, 20	Table 6.2.4.3-14	Table 6.2.4.3-14
...					
NS_20	-	-	-	-	-

**WIFI**

Mode	Data Rate (Mbps)	Channel	Frequency(MHz)	Avg. Burst Power(dBm)
802.11b	1	01	2412	<b>13.65</b>
		06	2437	13.62
		11	2462	13.59
802.11g	6	01	2412	9.44
		06	2437	11.26
		11	2462	11.28
802.11n(20)	6.5	01	2412	9.40
		06	2437	11.28
		11	2462	11.23
802.11n(40)	13.5	03	2422	8.69
		06	2437	8.84
		09	2452	8.89

**Bluetooth\_V3.0**

Modulation	Channel	Frequency(MHz)	Avg. Burst Power (dBm)
GFSK	0	2402	0.909
	39	2441	1.013
	78	2480	<b>1.036</b>
$\pi/4$ -DQPSK	0	2402	0.080
	39	2441	0.063
	78	2480	-0.167
8-DPSK	0	2402	-0.078
	39	2441	-0.101
	78	2480	-0.356

**Bluetooth\_V4.0**

Modulation	Channel	Frequency(MHz)	Peak Power (dBm)
GFSK	0	2402	0.908
	19	2440	<b>1.026</b>
	39	2480	1.023



## 13. TEST RESULTS

### 13.1. SAR Test Results Summary

#### 13.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE 1528-2013, Body-worn SAR was performed with the device 10mm from the phantom, and 4 Edges SAR was performed with the device 10mm from the phantom.

#### 13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is  $\geq 0.8$ W/Kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
  - (1) When the original highest measured SAR is  $\geq 0.8$ W/Kg, repeat that measurement once.
  - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $>1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/Kg.
  - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is  $\geq 1.5$  W/Kg and ratio of largest to smallest SAR for the original, first and second measurement is  $\geq 1.20$ .
3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
4. Per KDB 648474 D04 v01r03,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$ W/Kg, SAR testing with a headset connected is not required.
5. Per KDB 248227 D01v02r02,for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$ W/kg.
6. Per KDB 941225 D06 V02r01, When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations.
7. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:  
Maximum Scaling SAR =tested SAR (Max.)  $\times$  [maximum turn-up power (mw)/ maximum measurement output power(mw) ]
8. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
9. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
10. Per KDB 941125 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.

11. Per KDB 941125 D05v02r03. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1RB allocation and the highest reported SAR is  $>1.45$  W/Kg, the remaining required test channels must also be tested.
12. Per KDB 941125 D05v02r03. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$ W/Kg, Per KDB 941225 D05v02r02, 16QAM SAR testing is not required.
13. Per KDB 941125 D05v02r03. Smaller bandwidth output power for each RB allocation configuration is  $>$ not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$ W/Kg. Per KDB 941125 D05v02r03, smaller bandwidth SAR testing is not required.

### 13.1.3. Test Result

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 60.1				
Product: Smart phone									
Test Mode: GSM850 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<math>\pm 5\%</math>)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
<b>SIM 1 Card</b>									
Left Cheek	voice	190	836.6	-1.23	0.221	34.50	33.70	0.266	1.6
Left Tilt	voice	190	836.6	1.26	0.245	34.50	33.70	0.295	1.6
Right Cheek	voice	190	836.6	-1.21	<b>0.258</b>	34.50	33.70	<b>0.310</b>	1.6
Right Tilt	voice	190	836.6	1.19	0.200	34.50	33.70	0.240	1.6
Body back	voice	190	836.6	-1.15	<b>0.386</b>	34.50	33.70	<b>0.464</b>	1.6
Body front	voice	190	836.6	1.16	0.316	34.50	33.70	0.380	1.6
Body back	GPRS-4 slot	190	836.6	-1.20	<b>0.501</b>	28.70	28.52	<b>0.522</b>	1.6
Body front	GPRS-4 slot	190	836.6	1.24	0.414	28.70	28.52	0.432	1.6
Edge 2(Right)	GPRS-4slot	190	836.6	-1.26	0.182	28.70	28.52	0.190	1.6
Edge 3(Bottom)	GPRS-4 slot	190	836.6	1.18	0.293	28.70	28.52	0.305	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 51.2				
Product: Smart phone									
Test Mode: PCS1900 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
<b>SIM 1 Card</b>									
Left Cheek	voice	661	1880.0	1.06	0.088	31.30	31.23	0.089	1.6
Left Tilt	voice	661	1880.0	-1.15	0.046	31.30	31.23	0.047	1.6
Right Cheek	voice	661	1880.0	1.02	<b>0.140</b>	31.30	31.23	<b>0.142</b>	1.6
Right Tilt	voice	661	1880.0	-1.03	0.046	31.30	31.23	0.047	1.6
Body back	voice	661	1880.0	1.08	<b>0.345</b>	31.30	31.23	<b>0.351</b>	1.6
Body front	voice	661	1880.0	-1.09	0.219	31.30	31.23	0.223	1.6
Body back	GPRS-3 slot	661	1880	1.12	0.500	27.60	27.56	0.505	1.6
Body front	GPRS-3 slot	661	1880.0	-1.05	0.331	27.60	27.56	0.334	1.6
Edge 2(Right)	GPRS-3 slot	661	1880.0	1.16	0.105	27.60	27.56	0.106	1.6
Edge 3(Bottom)	GPRS-3 slot	512	1850.2	-1.14	0.951	27.60	27.25	1.031	1.6
Edge 3(Bottom)	GPRS-3 slot	661	1880	1.10	0.960	27.60	27.56	0.969	1.6
Edge 3(Bottom)	GPRS-3 slot	810	1909.8	-1.13	<b>1.062</b>	27.60	27.44	<b>1.102</b>	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 51.2				
Product: Smart phone									
Test Mode: WCDMA Band II with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	9400	1880	1.36	0.181	23.00	22.68	0.195	1.6
Left Tilt	RMC 12.2kbps	9400	1880	1.35	0.054	23.00	22.68	0.058	1.6
Right Cheek	RMC 12.2kbps	9400	1880	-1.32	<b>0.219</b>	23.00	22.68	<b>0.236</b>	1.6
Right Tilt	RMC 12.2kbps	9400	1880	1.41	0.062	23.00	22.68	0.067	1.6
Body back	RMC 12.2kbps	9400	1880	-1.40	0.547	23.00	22.68	0.589	1.6
Body front	RMC 12.2kbps	9400	1880	1.31	0.291	23.00	22.68	0.313	1.6
Edge 2(Right)	RMC 12.2kbps	9400	1880	-1.39	0.085	23.00	22.68	0.091	1.6
Edge 3(Bottom)	RMC 12.2kbps	9262	1852.4	1.38	1.064	23.00	22.97	1.071	1.6
Edge 3(Bottom)	RMC 12.2kbps	9400	1880	-1.36	<b>1.147</b>	23.00	22.68	<b>1.235</b>	1.6
Edge 3(Bottom)	RMC 12.2kbps	9538	1907.6	1.32	1.085	23.00	22.67	1.171	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 60.1				
Product: Smart phone									
Test Mode: WCDMA Band V with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	4183	836.6	1.45	0.182	24.40	23.69	0.214	1.6
Left Tilt	RMC 12.2kbps	4183	836.6	-1.36	0.168	24.40	23.69	0.198	1.6
Right Cheek	RMC 12.2kbps	4183	836.6	1.39	<b>0.196</b>	24.40	23.69	<b>0.231</b>	1.6
Right Tilt	RMC 12.2kbps	4183	836.6	-1.31	0.147	24.40	23.69	0.173	1.6
Body back	RMC 12.2kbps	4183	836.6	1.34	<b>0.287</b>	24.40	23.69	<b>0.338</b>	1.6
Body front	RMC 12.2kbps	4183	836.6	-1.40	0.243	24.40	23.69	0.286	1.6
Edge 2(Right)	RMC 12.2kbps	4183	836.6	1.42	0.119	24.40	23.69	0.140	1.6
Edge 3(Bottom)	RMC 12.2kbps	4183	836.6	-1.38	0.161	24.40	23.69	0.190	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 51.2						
Product: Smart phone												
Test Mode: LTE Band II												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	18900	1880	-1.12	0.086	23.62	22.96	0.100	1.6
		Left Tilt	1	0	18900	1880	1.13	0.058	23.62	22.96	0.068	1.6
		Right Cheek	1	0	18900	1880	-1.15	<b>0.169</b>	23.62	22.96	<b>0.197</b>	1.6
		Right Tilt	1	0	18900	1880	1.20	0.054	23.62	22.96	0.063	1.6
		Body back	1	0	18900	1880	-1.16	0.382	23.62	22.96	0.445	1.6
		Body front	1	0	18900	1880	1.24	0.269	23.62	22.96	0.313	1.6
		Edge 2(Right)	1	0	18900	1880	-1.23	0.092	23.62	22.96	0.107	1.6
		Edge 3(Bottom)	1	0	18700	1860	1.27	0.743	23.62	22.76	0.906	1.6
		Edge 3(Bottom)	1	0	18900	1880	-1.23	<b>0.968</b>	23.62	22.96	<b>1.127</b>	1.6
		Edge 3(Bottom)	1	0	19100	1900	1.16	0.947	23.62	22.87	1.126	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 54.2						
Product: Smart phone												
Test Mode: LTE Band IV												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	20175	1732.5	-1.28	<b>0.108</b>	23.88	23.88	<b>0.108</b>	1.6
		Left Tilt	1	0	20175	1732.5	1.26	0.058	23.88	23.88	0.058	1.6
		Right Cheek	1	0	20175	1732.5	-1.24	0.049	23.88	23.88	0.049	1.6
		Right Tilt	1	0	20175	1732.5	-1.25	0.021	23.88	23.88	0.021	1.6
		Body back	1	0	20175	1732.5	1.20	0.385	23.88	23.88	0.385	1.6
		Body front	1	0	20175	1732.5	-1.23	0.288	23.88	23.88	0.288	1.6
		Edge 2(Right)	1	0	20175	1732.5	1.21	0.073	23.88	23.88	0.073	1.6
		Edge 3(Bottom)	1	0	20175	1732.5	1.27	<b>0.686</b>	23.88	23.88	<b>0.686</b>	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 60.1						
Product: Smart phone												
Test Mode: LTE Band V												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	20525	836.5	1.10	0.182	23.97	21.33	0.334	1.6
		Left Tilt	1	0	20525	836.5	-1.16	0.132	23.97	21.33	0.242	1.6
		Right Cheek	1	0	20525	836.5	1.18	<b>0.204</b>	23.97	21.33	<b>0.375</b>	1.6
		Right Tilt	1	0	20525	836.5	-1.13	0.170	23.97	21.33	0.312	1.6
		Body back	1	0	20525	836.5	1.14	<b>0.274</b>	23.97	21.33	<b>0.503</b>	1.6
		Body front	1	0	20525	836.5	-1.19	0.231	23.97	21.33	0.424	1.6
		Edge 2(Right)	1	0	20525	836.5	-1.16	0.098	23.97	21.33	0.180	1.6
		Edge 3(Bottom)	1	0	20525	836.5	1.15	0.133	23.97	21.33	0.244	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 59.4						
Product: Smart phone												
Test Mode: LTE Band XII												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	23095	707.5	1.23	0.129	23.42	22.21	0.170	1.6
		Left Tilt	1	0	23095	707.5	-1.25	0.110	23.42	22.21	0.145	1.6
		Right Cheek	1	0	23095	707.5	-1.21	<b>0.151</b>	23.42	22.21	<b>0.200</b>	1.6
		Right Tilt	1	0	23095	707.5	1.20	0.104	23.42	22.21	0.137	1.6
		Body back	1	0	23095	707.5	1.26	0.260	23.42	22.21	0.344	1.6
		Body front	1	0	23095	707.5	-1.24	0.163	23.42	22.21	0.215	1.6
		Edge 2(Right)	1	0	23095	707.5	1.28	<b>0.287</b>	23.42	22.21	<b>0.379</b>	1.6
		Edge 3(Bottom)	1	0	23095	707.5	-1.2	0.026	23.42	22.21	0.034	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 59.4						
Product: Smart phone												
Test Mode: LTE Band XIII												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	23230	782	-1.02	0.225	24.35	22.82	0.320	1.6
		Left Tilt	1	0	23230	782	-1.05	0.161	24.35	22.82	0.229	1.6
		Right Cheek	1	0	23230	782	1.06	<b>0.235</b>	24.35	22.82	<b>0.334</b>	1.6
		Right Tilt	1	0	23230	782	-1.03	0.184	24.35	22.82	0.262	1.6
		Body back	1	0	23230	782	1.07	<b>0.362</b>	24.35	22.82	<b>0.515</b>	1.6
		Body front	1	0	23230	782	-1.09	0.284	24.35	22.82	0.404	1.6
		Edge 2(Right)	1	0	23230	782	1.05	0.310	24.35	22.82	0.441	1.6
		Edge 3(Bottom)	1	0	23230	782	-1.01	0.086	24.35	22.82	0.122	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 59.4						
Product: Smart phone												
Test Mode: LTE Band XVII												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	23790	710	1.16	0.147	23.45	21.31	0.241	1.6
		Left Tilt	1	0	23790	710	-1.12	0.106	23.45	21.31	0.174	1.6
		Right Cheek	1	0	23790	710	1.10	<b>0.162</b>	23.45	21.31	<b>0.265</b>	1.6
		Right Tilt	1	0	23790	710	1.13	0.097	23.45	21.31	0.159	1.6
		Body back	1	0	23790	710	1.17	<b>0.337</b>	23.45	21.31	<b>0.552</b>	1.6
		Body front	1	0	23790	710	-1.19	0.193	23.45	21.31	0.316	1.6
		Edge 2(Right)	1	0	23790	710	-1.15	0.287	23.45	21.31	0.470	1.6
		Edge 3(Bottom)	1	0	23790	710	1.11	0.143	23.45	21.31	0.234	1.6

Note:

- When the 1-g Reported SAR is  $\leq 0.8$  W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 58.4				
Product: Smart phone									
Test Mode:802.11b									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	DTS	6	2437	1.06	0.129	13.70	13.62	0.131	1.6
Left Tilt	DTS	6	2437	-1.03	0.101	13.70	13.62	0.103	1.6
Right Cheek	DTS	6	2437	1.08	<b>0.254</b>	13.70	13.62	<b>0.259</b>	1.6
Right Tilt	DTS	6	2437	-1.01	0.177	13.70	13.62	0.180	1.6
Body back	DTS	6	2437	1.07	<b>0.262</b>	13.70	13.62	<b>0.267</b>	1.6
Body front	DTS	6	2437	-1.09	0.076	13.70	13.62	0.077	1.6
Edge 1 (Top)	DTS	6	2437	1.05	0.111	13.70	13.62	0.113	1.6
Edge 4(Left)	DTS	6	2437	1.04	0.042	13.70	13.62	0.043	1.6

Note:

- According to KDB248227, SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.
- All of above "DTS" means data transmitters.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Repeated SAR										
Product: Smart Phone										
Test Mode: PCS1900 with GMSK modulation										
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	Once SAR (1g) (W/kg)	Power Drift (<±5%)	Twice SAR (1g) (W/kg)	Power Drift (<±5%)	Third SAR (1g) (W/kg)	Limit W/kg
Edge 3(Bottom)	GPRS-3 slot	810	1909.8	1.09	1.024	--	--	--	--	1.6

Repeated SAR										
Product: Smart Phone										
Test Mode: WCDMA Band II with QPSK modulation										
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	Once SAR (1g) (W/kg)	Power Drift (<±5%)	Twice SAR (1g) (W/kg)	Power Drift (<±5%)	Third SAR (1g) (W/kg)	Limit W/kg
Edge 3(Bottom)	RMC 12.2kbps	9400	1880	-1.34	1.158	--	--	--	--	1.6

Repeated SAR													
Product: Smart Phone													
Test Mode: LTE Band II													
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	Once SAR (1g) (W/kg)	Power Drift (<±5%)	Twice SAR (1g) (W/kg)	Power Drift (<±5%)	Third SAR (1g) (W/kg)	Limit W/kg
			UL RB Allocation	UL RB START									
20	QPSK	Edge3(Bottom)	1	0	18900	1880	1.19	0.867	--	--	--	--	1.6

**Simultaneous Multi-band Transmission Evaluation:**  
**Application Simultaneous Transmission information:**

NO	Simultaneous state	Portable Handset		
		Head	Body-worn	Hotspot
1	GSM(voice)+ WLAN 2.4GHz (data)	Yes	Yes	-
2	GSM(voice)+ Bluetooth(data)	-	Yes	-
3	GSM (Data) + WLAN 2.4GHz (data)	-	Yes	Yes
4	GSM (Data) + Bluetooth(data)	-	Yes	Yes
5	WCDMA+ WLAN 2.4GHz (data)	Yes	Yes	Yes
6	WCDMA+ Bluetooth(data)	-	Yes	Yes
7	LTE + WLAN 2.4GHz (data)	Yes	Yes	Yes
8	LTE + Bluetooth(data)	--	Yes	Yes

NOTE:

1. WIFI and BT share the same antenna, and cannot transmit simultaneously.
2. Simultaneous with every transmitter must be the same test position.
3. KDB 447498 D01, BT SAR is excluded as below table.
4. KDB 447498 D01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR and 10mm for body-worn SAR.
5. According to KDB 447498 D01 4.3.1, Standalone SAR test exclusion is as follow:  
For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR, and  $\leq 7.5$  for 10-g extremity SAR<sup>30</sup>, where
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation<sup>31</sup>
  - The result is rounded to one decimal place for comparison
  - The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below
The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.
6. If the test separation distance is  $< 5$ mm, 5mm is used for excluded SAR calculation.
7. According to KDB 447498 D01 4.3.2, simultaneous transmission SAR test exclusion is as follow:
  - (1) Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.
  - (2) Any transmitters and antennas should be considered when calculating simultaneous mode.
  - (3) For mobile phone and PC, it's the sum of all transmitters and antennas at the same mode with same position in each applicable exposure condition
  - (4) When the standalone SAR test exclusion of section 4.3.2 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to det
$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$$
for test separation distances  $\leq 50$  mm;  
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

8. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by  $(SAR1 + SAR2)1.5/R_i$ , rounded to two decimal digits, and must be  $\leq 0.04$  for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Estimated SAR		Max Power including Tune-up Tolerance		Separation Distance (mm)	Estimated SAR (W/kg)
		dBm	mW		
<b>BT</b>	Head	2	1.585	0	0.067
	Body	2	1.585	10	0.033

**Sum of the SAR for GSM 850 & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		GSM 850	Wi-Fi DTS Band	Bluetooth		
Head (voice)	Left Touch	0.266	0.131		0.397	No
	Left Tilt	0.295	0.103		0.398	No
	Right Touch	0.310	0.259		0.569	No
	Right Tilt	0.240	0.180		0.420	No
Body-worn (voice)	Rear	0.464	0.267		0.731	No
		0.464		0.033	0.497	No
	Front	0.380	0.077		0.457	No
		0.380		0.033	0.413	No
Body-worn (Data)	Rear	0.522		0.033	0.555	No
		0.522	0.267		0.789	No
	Front	0.432		0.033	0.465	No
		0.432	0.077		0.497	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "



**Sum of the SAR for GSM 1900 & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		PCS 1900	Wi-Fi DTS Band	Bluetooth		
Head (voice)	Left Touch	0.089	0.131		0.220	No
	Left Tilt	0.047	0.103		0.150	No
	Right Touch	0.142	0.259		0.401	No
	Right Tilt	0.047	0.180		0.227	No
Body-worn (voice)	Rear	0.351	0.267		0.618	No
		0.351		0.033	0.384	No
	Front	0.223	0.077		0.300	No
		0.223		0.033	0.256	No
Body-worn (Data)	Rear	0.505		0.033	0.538	No
		0.505	0.267		0.772	No
	Front	0.334		0.033	0.367	No
		0.334	0.077		0.411	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

**Sum of the SAR for WCDMA Band II & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			$\Sigma$ 1-g SAR (W/Kg)	SPLSR (Yes/No)
		WCDMA Band II	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.195	0.131		0.326	No
	Left Tilt	0.058	0.103		0.161	No
	Right Touch	0.236	0.259		0.495	No
	Right Tilt	0.067	0.180		0.247	No
Body-worn	Rear	0.589	0.267		<b>0.856</b>	No
	Front	0.313	0.077		0.390	No
	Rear	0.589		0.033	0.622	No
	Front	0.313		0.033	0.346	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

**Sum of the SAR for WCDMA Band V & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		WCDMA Band V	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.214	0.131		0.345	No
	Left Tilt	0.198	0.103		0.301	No
	Right Touch	0.231	0.259		0.490	No
	Right Tilt	0.173	0.180		0.353	No
Body-worn	Rear	0.338	0.267		0.605	No
	Front	0.286	0.077		0.363	No
	Rear	0.338		0.033	0.371	No
	Front	0.286		0.033	0.319	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

**Sum of the SAR for LTE Band II & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band II	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.100	0.131		0.231	No
	Left Tilt	0.068	0.103		0.171	No
	Right Touch	0.197	0.259		0.456	No
	Right Tilt	0.063	0.180		0.243	No
Body-worn	Rear	0.445	0.267		0.712	No
	Front	0.313	0.077		0.390	No
	Rear	0.445		0.033	0.478	No
	Front	0.313		0.033	0.346	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

**Sum of the SAR for LTE Band IV & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band IV	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.108	0.131		0.239	No
	Left Tilt	0.058	0.103		0.161	No
	Right Touch	0.049	0.259		0.308	No
	Right Tilt	0.021	0.180		0.201	No
Body-worn	Rear	0.385	0.267		0.652	No
	Front	0.288	0.077		0.365	No
	Rear	0.385		0.033	0.418	No
	Front	0.288		0.033	0.321	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

**Sum of the SAR for LTE Band V & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band V	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.334	0.131		0.465	No
	Left Tilt	0.242	0.103		0.345	No
	Right Touch	0.375	0.259		0.634	No
	Right Tilt	0.312	0.180		0.492	No
Body-worn	Rear	0.503	0.267		0.770	No
	Front	0.424	0.077		0.501	No
	Rear	0.503		0.033	0.536	No
	Front	0.424		0.033	0.457	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

**Sum of the SAR for LTE Band XII & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band XII	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.170	0.131		0.301	No
	Left Tilt	0.145	0.103		0.248	No
	Right Touch	0.200	0.259		0.459	No
	Right Tilt	0.137	0.180		0.317	No
Body-worn	Rear	0.344	0.267		0.611	No
	Front	0.215	0.077		0.292	No
	Rear	0.344		0.033	0.377	No
	Front	0.215		0.033	0.248	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

**Sum of the SAR for LTE Band XIII & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band XII	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.320	0.131		0.451	No
	Left Tilt	0.229	0.103		0.332	No
	Right Touch	0.334	0.259		0.593	No
	Right Tilt	0.262	0.180		0.442	No
Body-worn	Rear	0.515	0.267		0.782	No
	Front	0.404	0.077		0.481	No
	Rear	0.515		0.033	0.548	No
	Front	0.404		0.033	0.437	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “



**Sum of the SAR for LTE Band XVII & Wi-Fi & BT:**

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/Kg)	SPLSR (Yes/No)
		LTE Band XVII	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.241	0.131		0.372	No
	Left Tilt	0.174	0.103		0.277	No
	Right Touch	0.265	0.259		0.524	No
	Right Tilt	0.159	0.180		0.339	No
Body-worn	Rear	0.552	0.267		0.819	No
	Front	0.316	0.077		0.393	No
	Rear	0.552		0.033	0.585	No
	Front	0.316		0.033	0.349	No

**Note:**

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/Kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

## APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Feb. 28,2019

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=5.20

Frequency: 750 MHz; Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 40.56$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):21.7, Liquid temperature (°C): 21.0

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

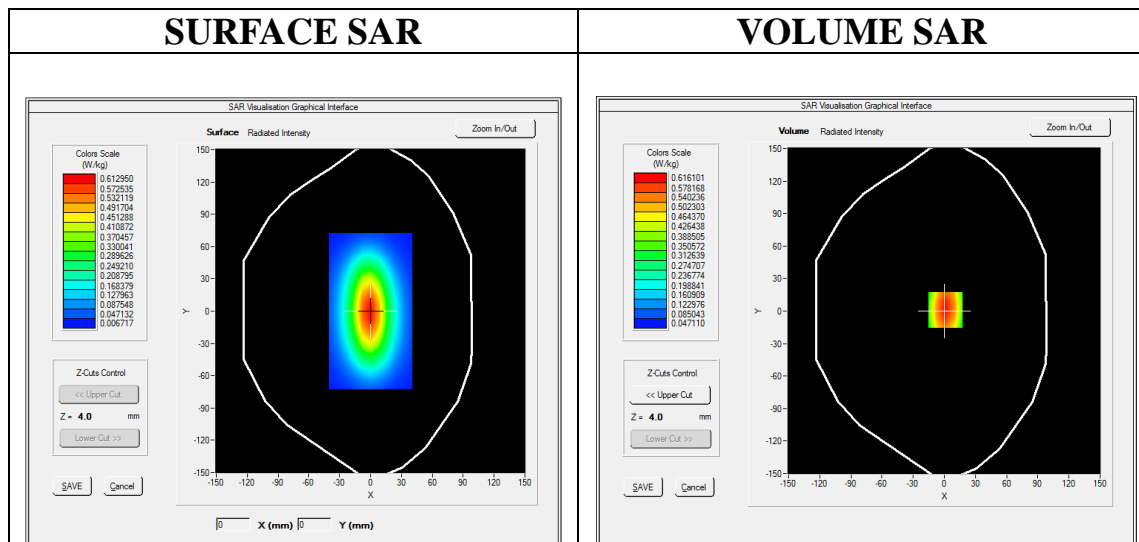


Maximum location: X=1.00, Y=1.00

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.371025
SAR 1g (W/Kg)	0.592607

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.8675	0.6126	0.4057	0.2713	0.1889	0.1263	0.0910

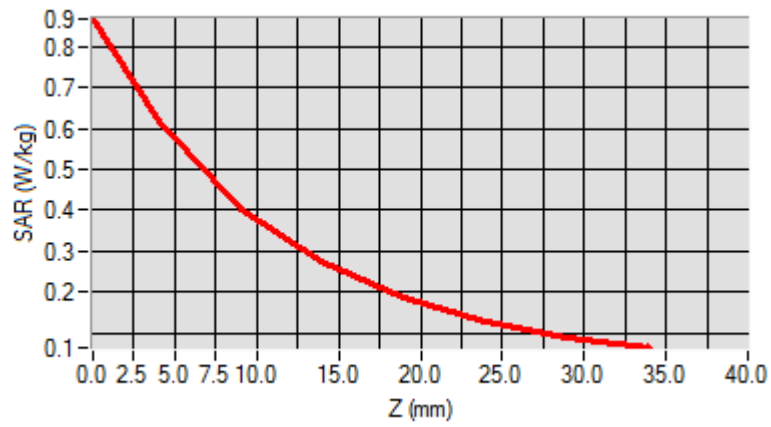

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey, rectangular device. A small rectangular area on the top surface is highlighted with a color-coded heatmap, showing a central red/orange region (high SAR) transitioning to yellow, green, and blue (lower SAR) towards the edges.</p>	<p>A 2D heatmap showing a vertical oval shape. The center is a bright red/orange color, indicating the highest SAR value, surrounded by concentric rings of yellow, green, and blue, representing decreasing SAR values.</p>

**Test Laboratory: AGC Lab**  
**System Check Body 750 MHz**

**Date: Feb. 28,2019**

**DUT: Dipole 750 MHz Type: SID 750**


Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=5.40  
Frequency: 750 MHz; Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 53.51$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.7, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 750MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm**

**Configuration/System Check 750MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm**


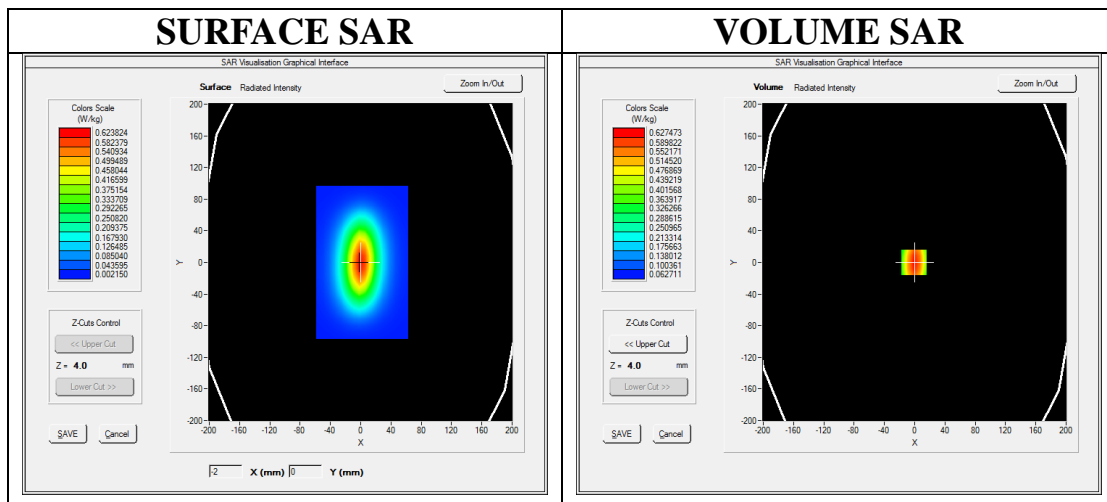


**Maximum location: X=-1.00, Y=0.00**

**SAR Peak: 0.86 W/kg**

<b>SAR 10g (W/Kg)</b>	0.392604
<b>SAR 1g (W/Kg)</b>	0.602930

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.8512	0.6285	0.4278	0.2996	0.2112	0.1502	0.1104

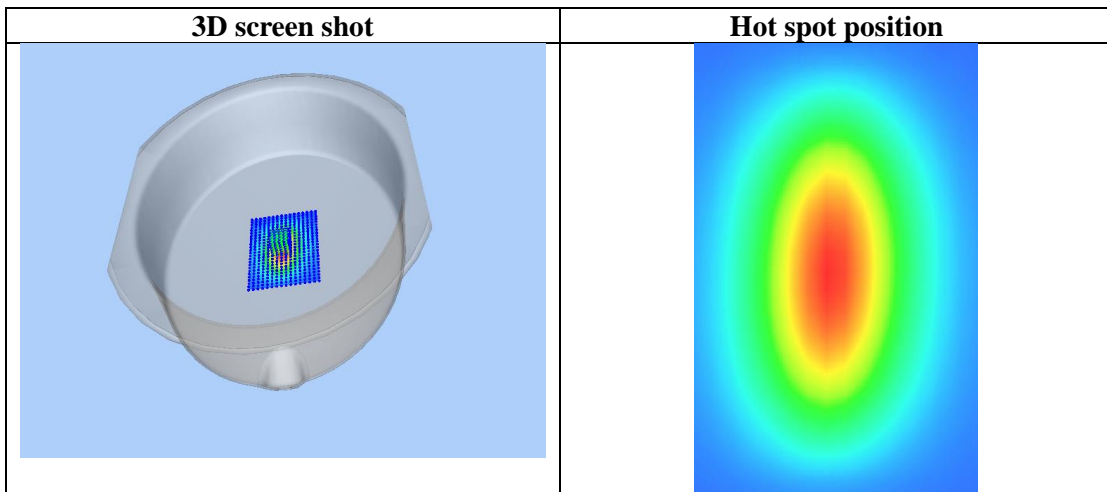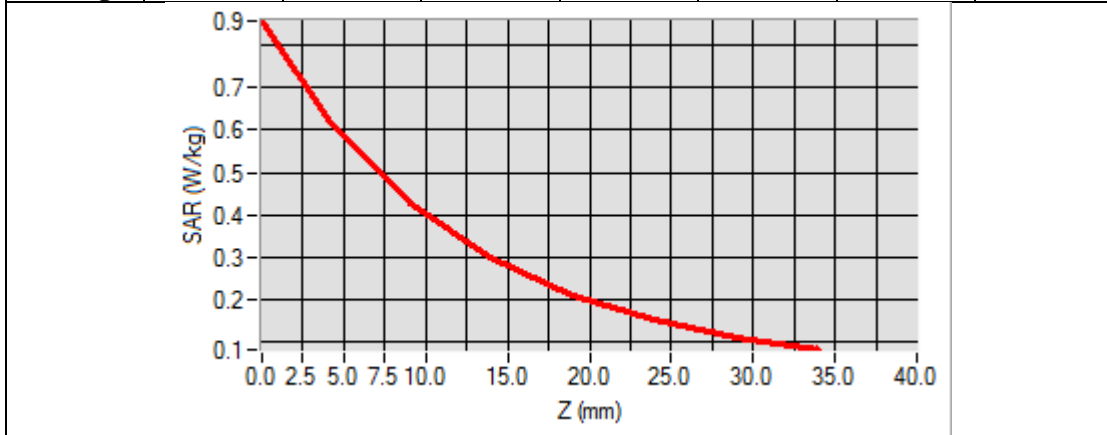

**Test Laboratory: AGC Lab**  
**System Check Head 835 MHz**

**Date: Mar. 02,2019**

**DUT: Dipole 835 MHz Type: SID 835**


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.29  
Frequency: 835 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 41.87$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.7, Liquid temperature (°C): 20.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm**



**Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm**

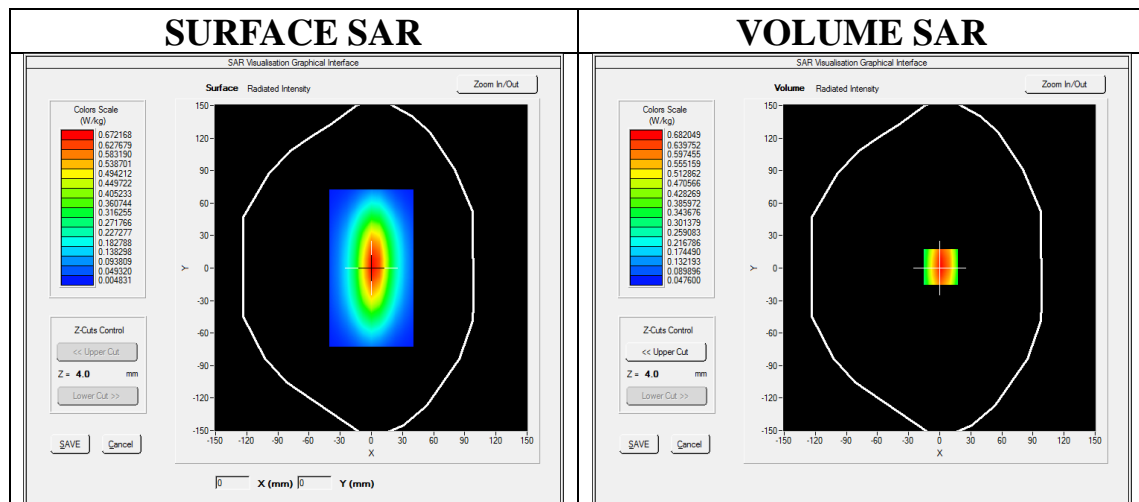

**Maximum location: X=1.00, Y=1.00**

**SAR Peak: 1.00 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.391027</b>
<b>SAR 1g (W/Kg)</b>	<b>0.652966</b>

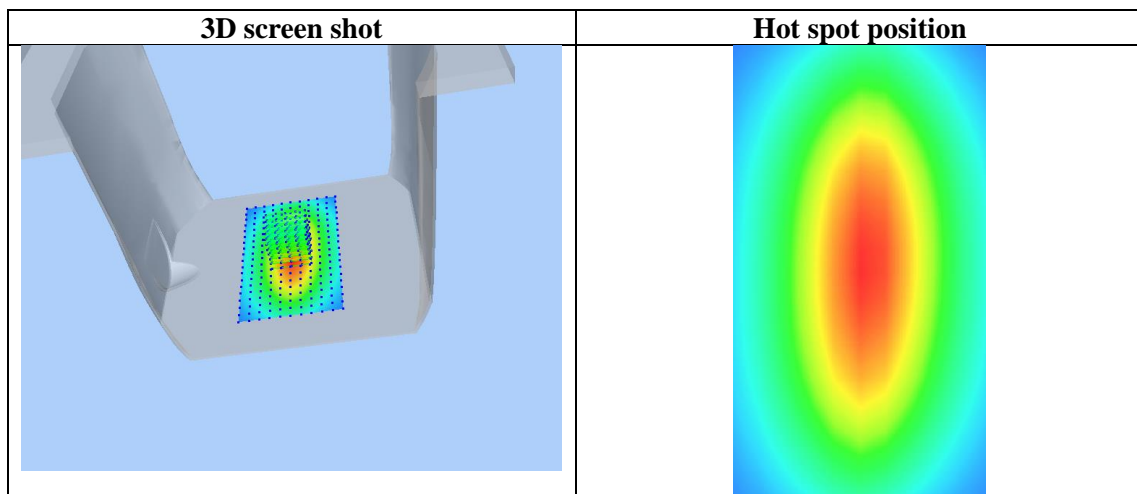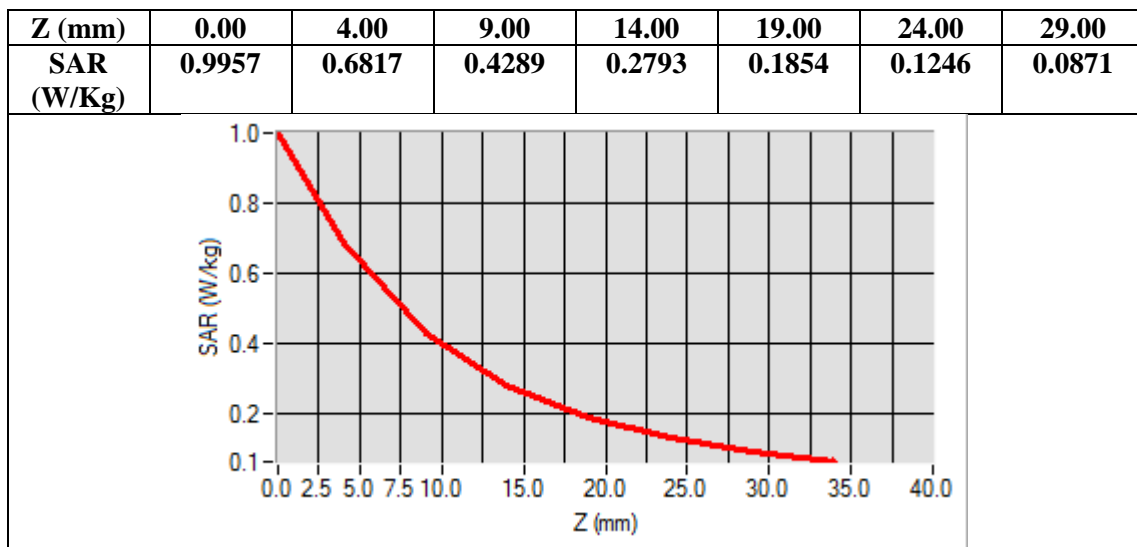

**Test Laboratory: AGC Lab**  
**System Check Body 835 MHz**

**Date: Mar. 02,2019**

**DUT: Dipole 835 MHz Type: SID 835**


Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.49  
Frequency: 835 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 56.12$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.7, Liquid temperature (°C): 20.9

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 835MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm**

**Configuration/System Check 835MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm**

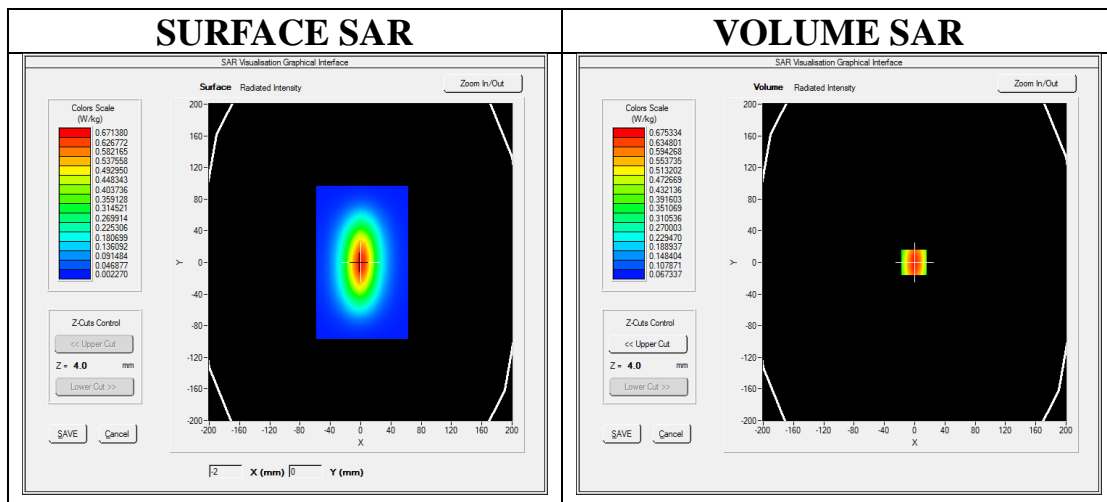



**Maximum location: X=-1.00, Y=0.00**

**SAR Peak: 0.92 W/kg**

<b>SAR 10g (W/Kg)</b>	0.425021
<b>SAR 1g (W/Kg)</b>	0.646391



<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.9225</b>	<b>0.6763</b>	<b>0.4610</b>	<b>0.3238</b>	<b>0.2285</b>	<b>0.1646</b>	<b>0.1185</b>

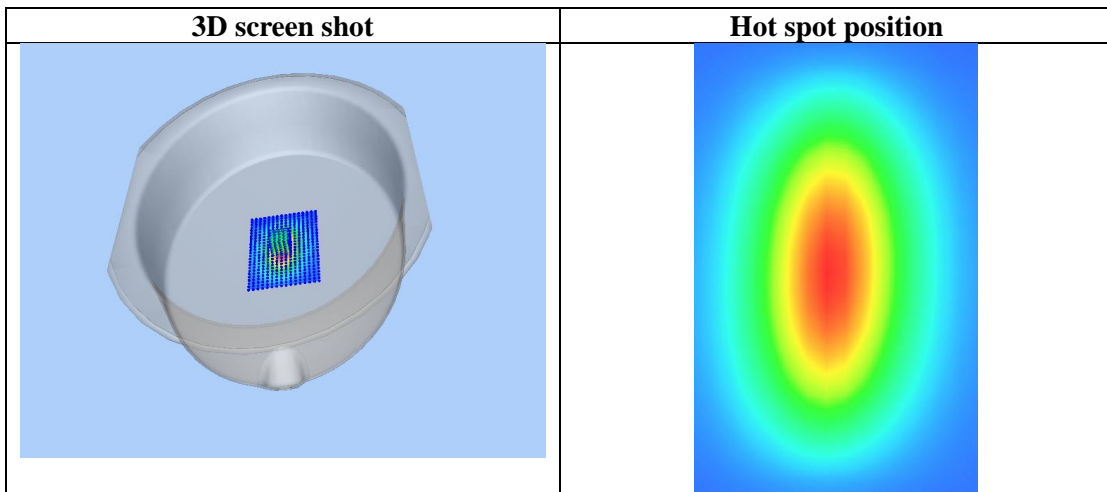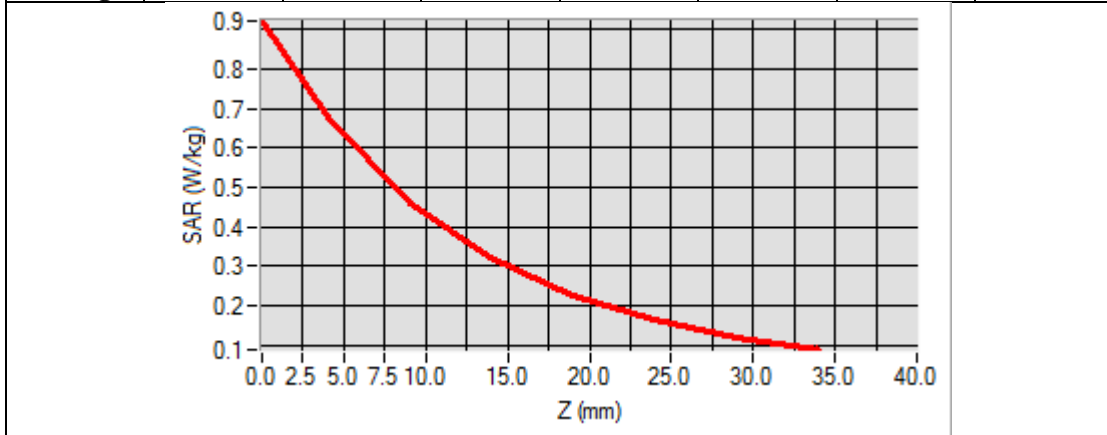

**Test Laboratory: AGC Lab**  
**System Check Head 1750MHz**

**Date: Mar.03,2019**

**DUT: Dipole 1800 MHz; Type: SID 1800**

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.71  
Frequency: 1750 MHz; Medium parameters used:  $f = 1750\text{MHz}$ ;  $\sigma = 1.40 \text{ mho/m}$ ;  $\epsilon_r = 40.52$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 21.4, Liquid temperature ( $^{\circ}\text{C}$ ): 20.3


SATIMO Configuration:

Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1750MHz Head/Area Scan:** Measurement grid: dx=8mm,dy=8mm

**Configuration/System Check 1750MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm


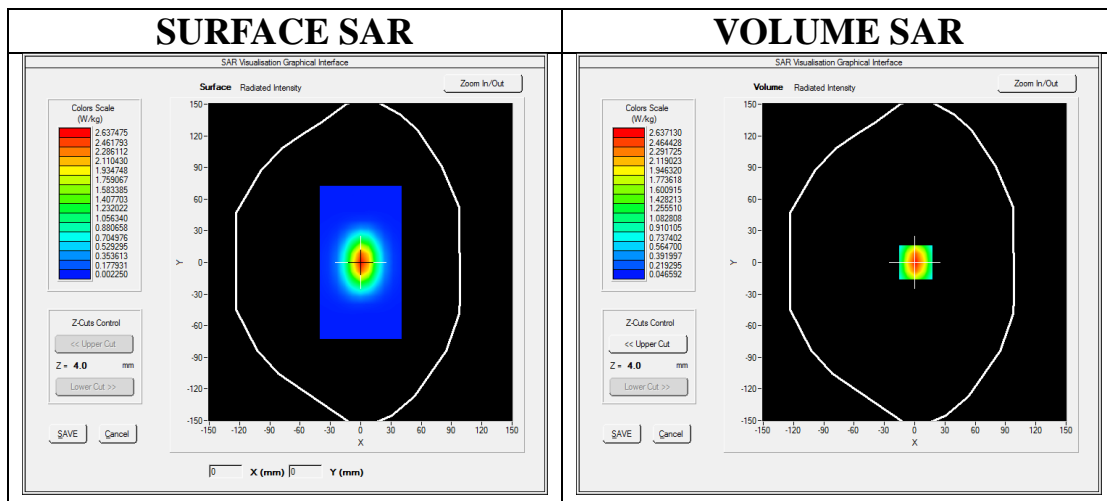


**Maximum location: X=1.00, Y=0.00**

**SAR Peak: 4.07 W/kg**

<b>SAR 10g (W/Kg)</b>	1.301025
<b>SAR 1g (W/Kg)</b>	2.470592

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.0957	2.6389	1.4863	0.8624	0.5012	0.2932	0.1710

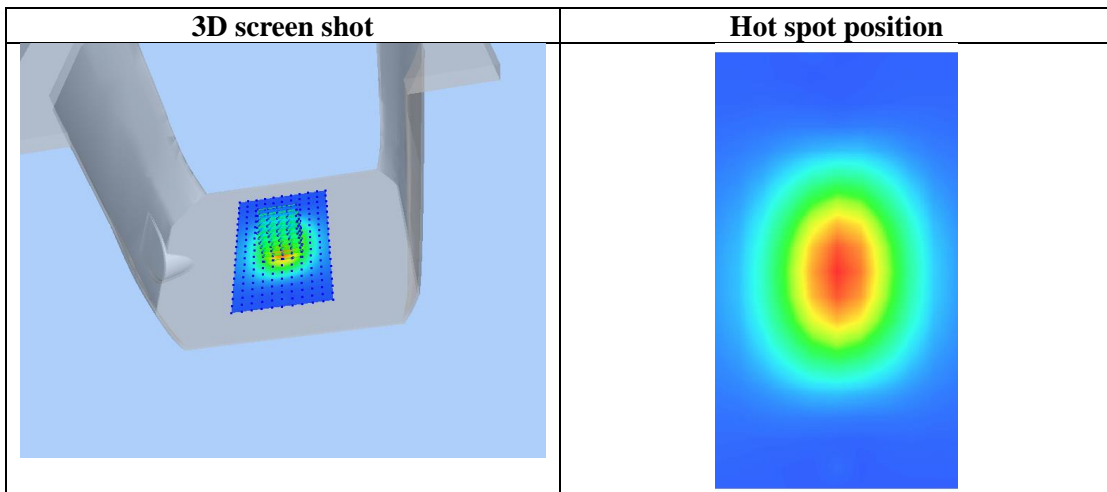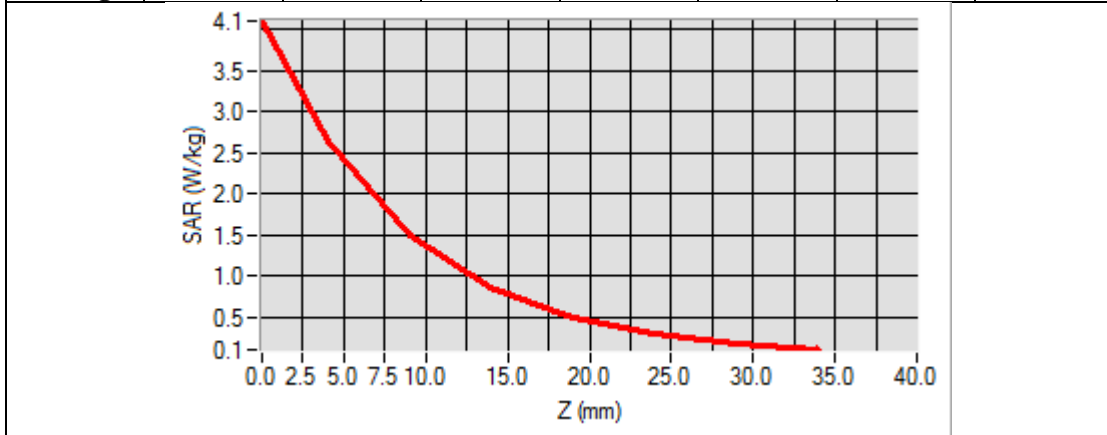

**Test Laboratory: AGC Lab**  
**System Check Body 1750MHz**

**Date: Mar.03,2019**

**DUT: Dipole 1800 MHz; Type: SID 1800**

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.81  
Frequency: 1750MHz; Medium parameters used:  $f = 1750\text{MHz}$ ;  $\sigma = 1.53 \text{ mho/m}$ ;  $\epsilon_r = 53.54$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature ( $^{\circ}\text{C}$ ): 21.4, Liquid temperature ( $^{\circ}\text{C}$ ): 20.1


SATIMO Configuration:

Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35



**Configuration/System Check 1750MHz Body/Area Scan: Measurement grid: dx=8mm,dy=8mm**

**Configuration/System Check 1750MHz Body/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm**

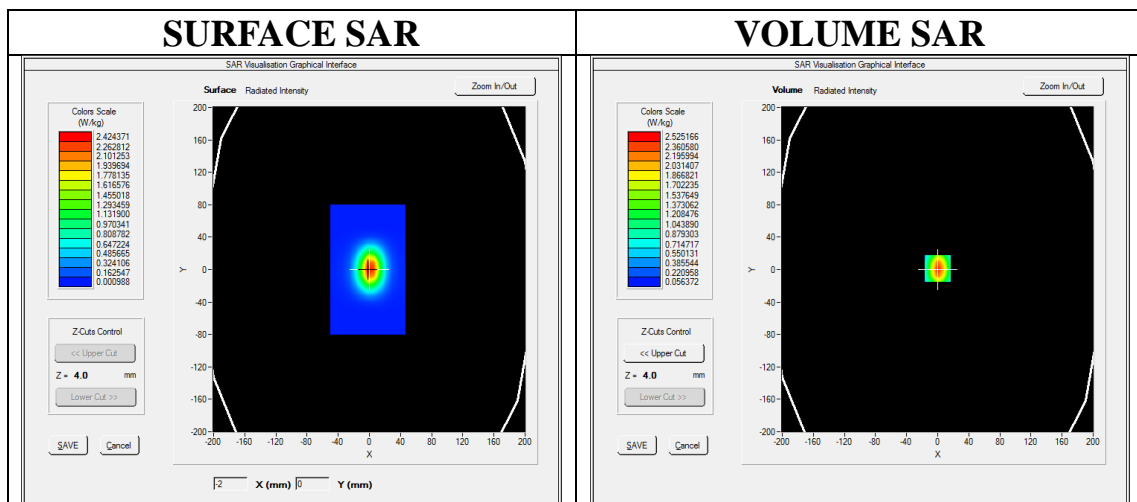

**Maximum location: X=0.00, Y=1.00**  
**SAR Peak: 3.93 W/kg**

<b>SAR 10g (W/Kg)</b>	1.260011
<b>SAR 1g (W/Kg)</b>	2.380539

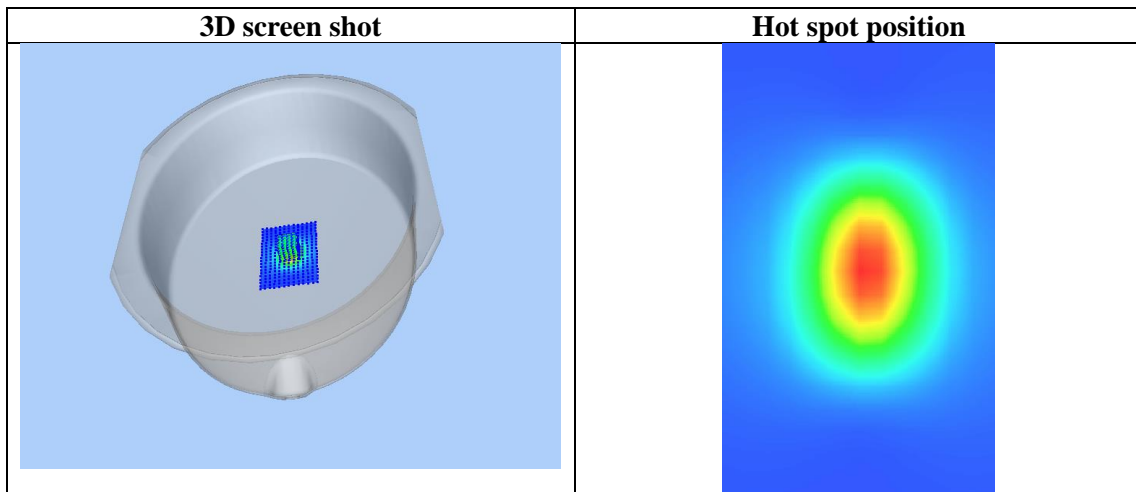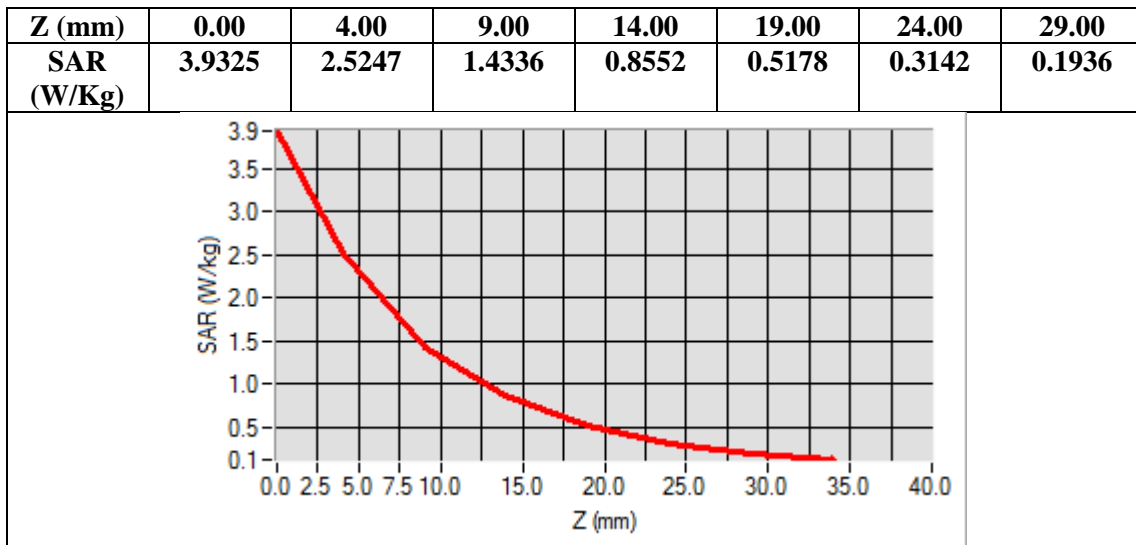

**Test Laboratory: AGC Lab**  
**System Check Head 1900MHz**

**Date: Mar. 04,2019**

**DUT: Dipole 1900 MHz; Type: SID 1900**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=5.24  
Frequency: 1900 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.96$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.5, Liquid temperature (°C): 20.6


SATIMO Configuration:

Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1900MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 1900MHz Head/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm


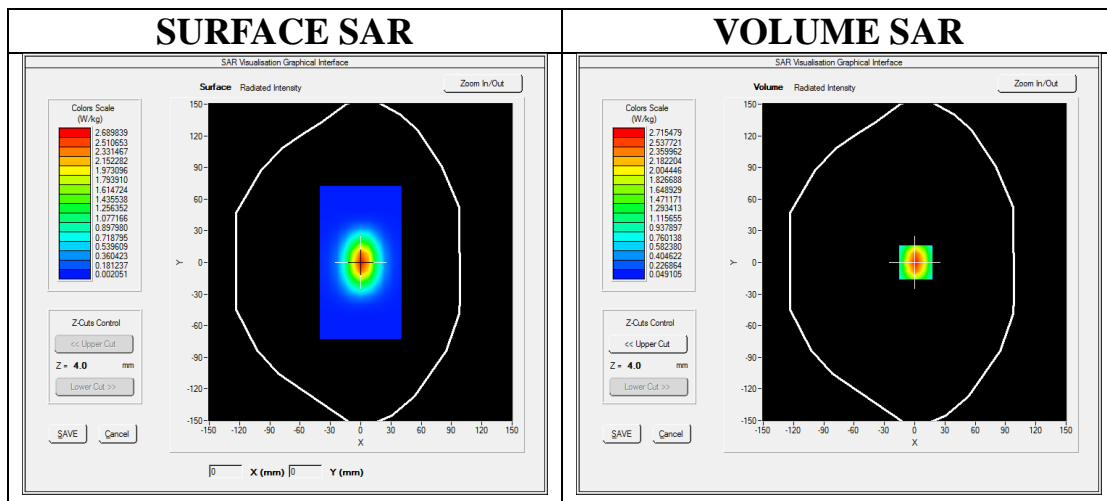


**Maximum location: X=1.00, Y=0.00**

**SAR Peak: 4.20 W/kg**

<b>SAR 10g (W/Kg)</b>	1.341027
<b>SAR 1g (W/Kg)</b>	2.549305

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.2412	2.7163	1.5212	0.8820	0.5157	0.3014	0.1746

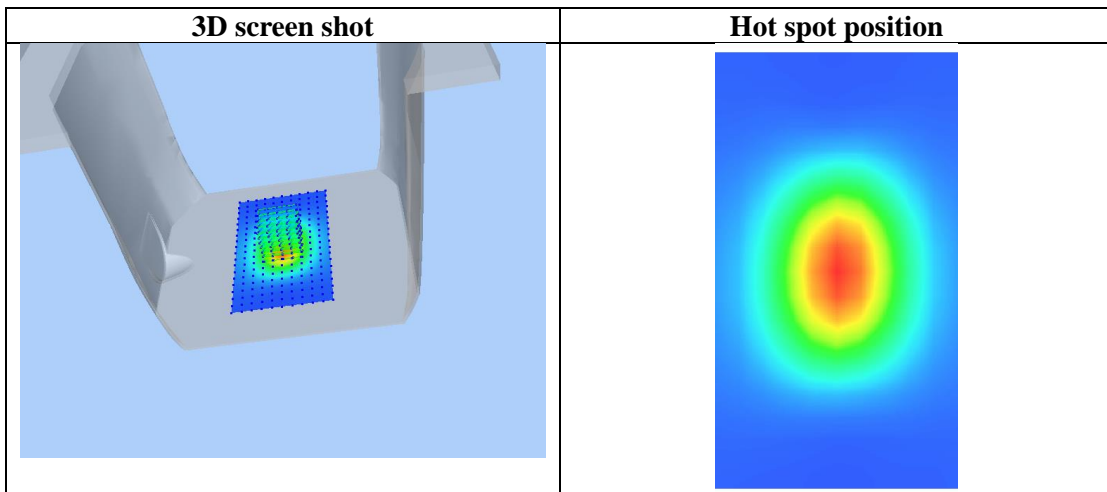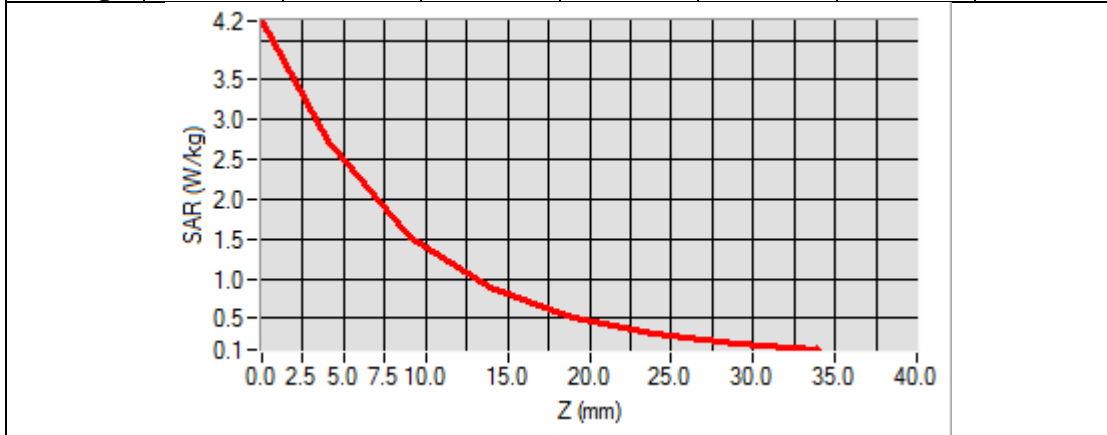

**Test Laboratory: AGC Lab**  
**System Check Body 1900MHz**

**Date: Mar. 04,2019**

**DUT: Dipole 1900 MHz; Type: SID 1900**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=5.39  
Frequency: 1900 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 51.50$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.5, Liquid temperature (°C): 20.4


SATIMO Configuration:

Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 1900MHz Body/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 1900MHz Body/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm

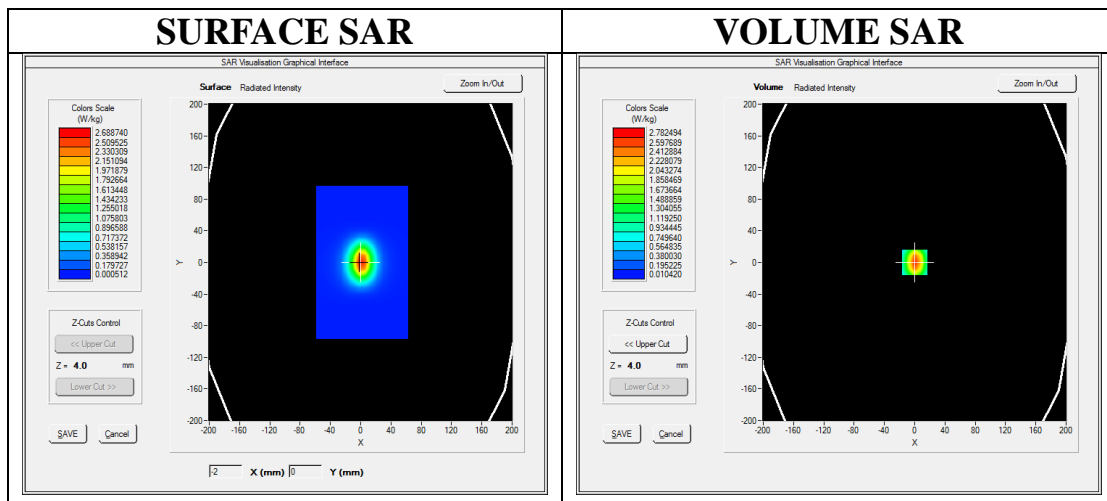


**Maximum location: X=0.00, Y=0.00**  
**SAR Peak: 5.05 W/kg**

<b>SAR 10g (W/Kg)</b>	1.191047
<b>SAR 1g (W/Kg)</b>	2.653025



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	5.1114	2.7822	1.1738	0.5120	0.2278	0.1032	0.0478

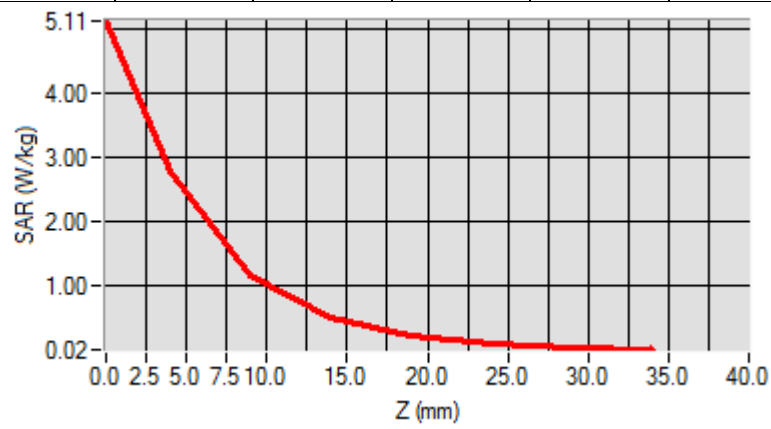

3D screen shot	Hot spot position

**Test Laboratory: AGC Lab**  
**System Check Head 2450 MHz**

**Date: Mar. 01,2019**

**DUT: Dipole 2450 MHz Type: SID 2450**


Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.90  
Frequency: 2450 MHz; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.82$  mho/m;  $\epsilon_r = 39.10$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.2, Liquid temperature (°C): 20.3

**SATIMO Configuration**

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 2450MHz Head/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/System Check 2450MHz Head/Zoom Scan:** Measurement grid: dx=5mm,dy=5mm, dz=5mm


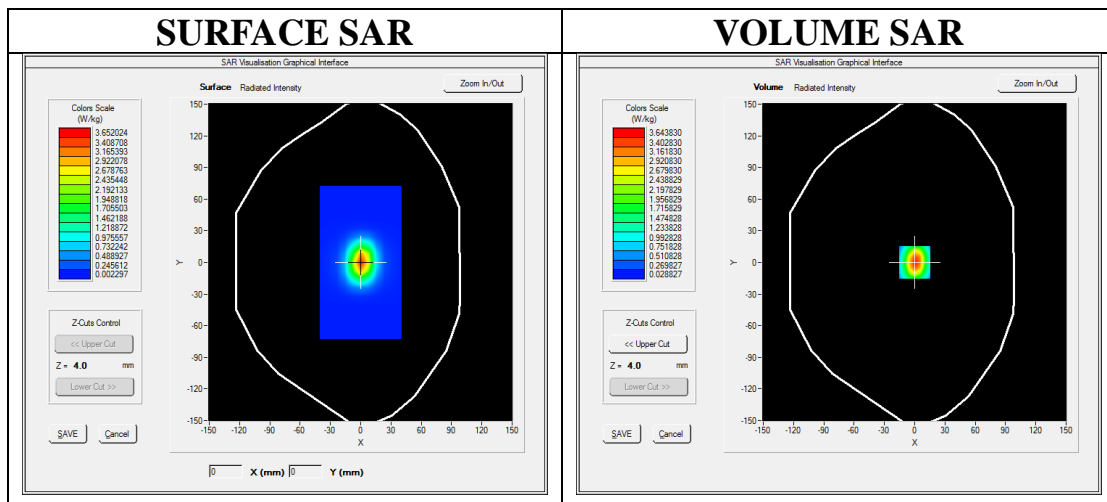


**Maximum location: X=0.00, Y=0.00**

**SAR Peak: 5.92 W/kg**

<b>SAR 10g (W/Kg)</b>	1.541025
<b>SAR 1g (W/Kg)</b>	3.303073

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	5.9675	3.6435	1.8831	0.9787	0.5222	0.2797	0.1512

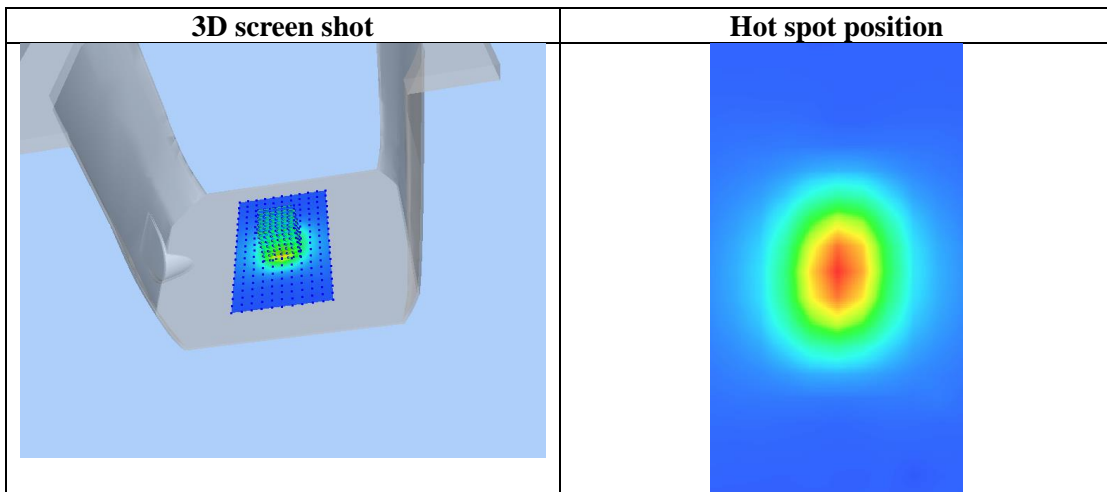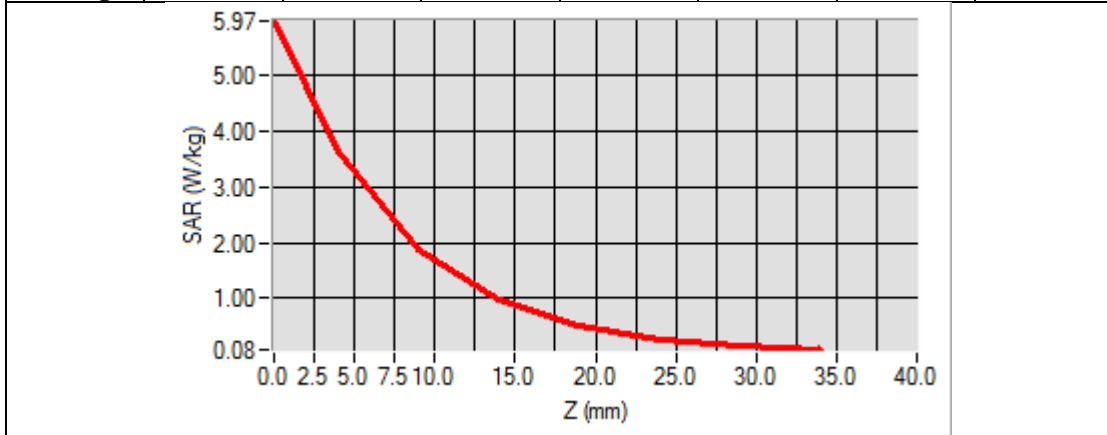

**Test Laboratory: AGC Lab**  
**System Check Body 2450 MHz**

**Date: Mar. 01,2019**

**DUT: Dipole 2450 MHz Type: SID 2450**


Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=5.04  
Frequency: 2450 MHz; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.97$  mho/m;  $\epsilon_r = 52.57$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section; Input Power=18dBm  
Ambient temperature (°C):21.2, Liquid temperature (°C): 20.5

**SATIMO Configuration**

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/System Check 2450MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm**


**Configuration/System Check 2450MHz Body/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm**

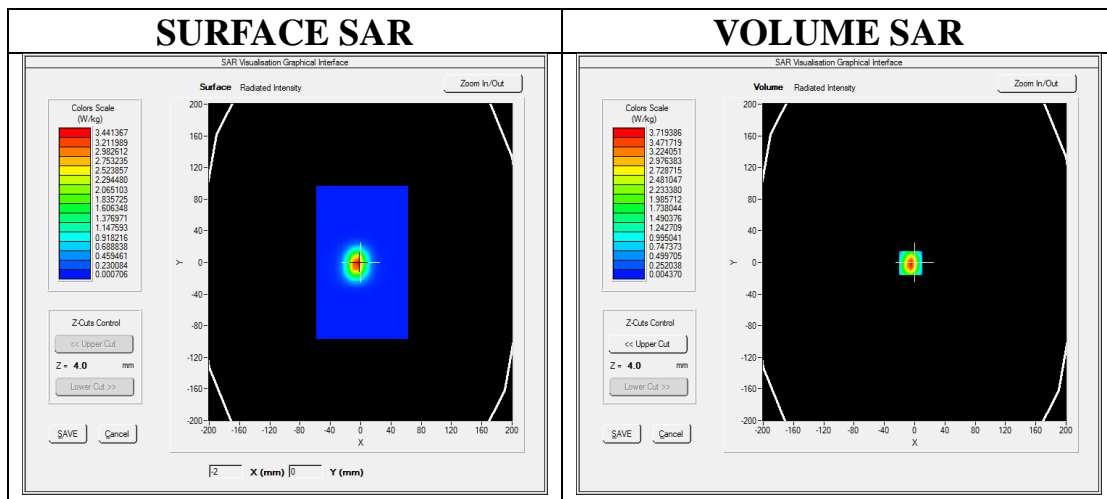

**Maximum location: X=-5.00, Y=-1.00**  
**SAR Peak: 7.59 W/kg**

<b>SAR 10g (W/Kg)</b>	1.360281
<b>SAR 1g (W/Kg)</b>	3.411056

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	7.7657	3.7174	1.1546	0.3713	0.1246	0.0457	0.0172

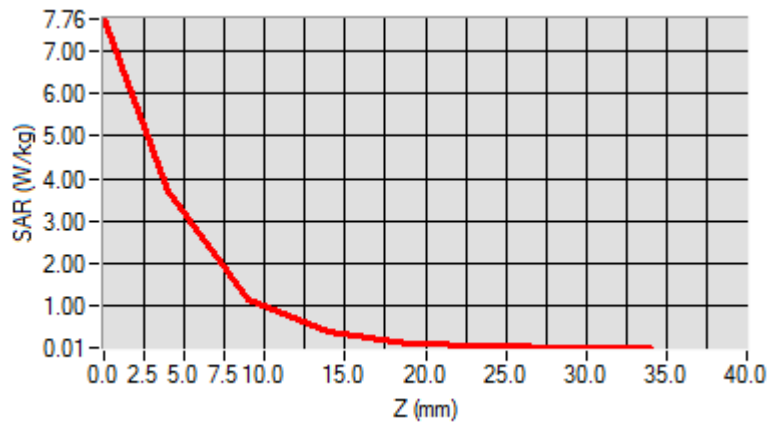

3D screen shot	Hot spot position

## APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab  
GSM 850 Mid- Touch-Right <SIM 1>  
DUT: Smart phone; Type: JAX M

Date: Mar. 02,2019


Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.29;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.23$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C): 21.7, Liquid temperature (°C): 20.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

Configuration/GSM 850 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm  
Configuration/GSM 850 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>ZoomScan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM 850
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

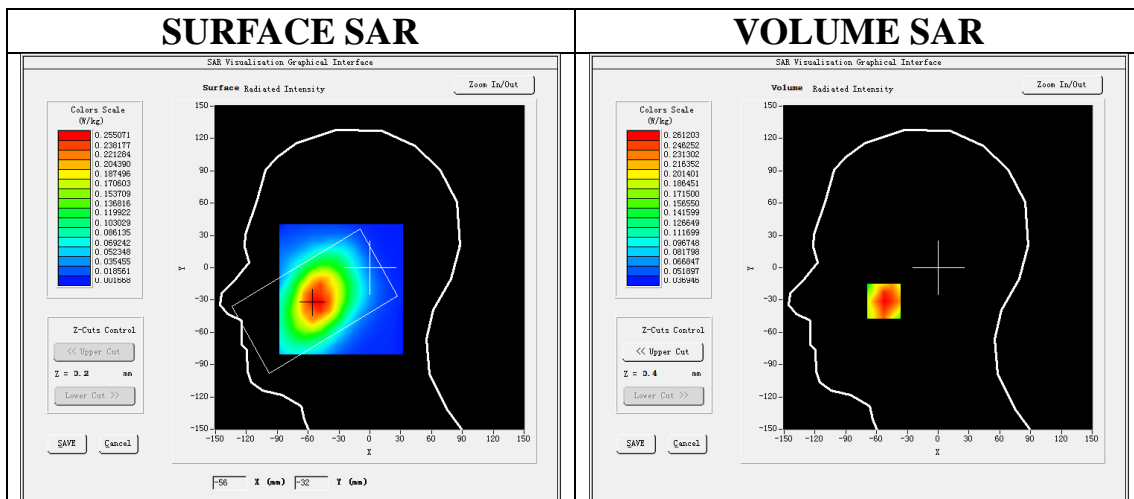

**Maximum location: X=-53.00, Y=-31.00**

**SAR Peak: 0.34 W/kg**

<b>SAR 10g (W/Kg)</b>	0.192005
<b>SAR 1g (W/Kg)</b>	0.258042

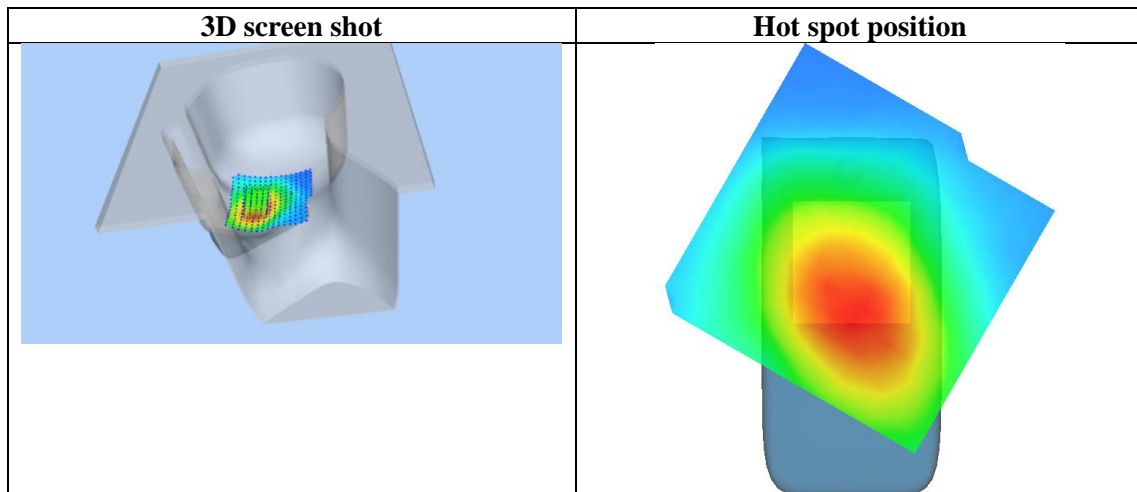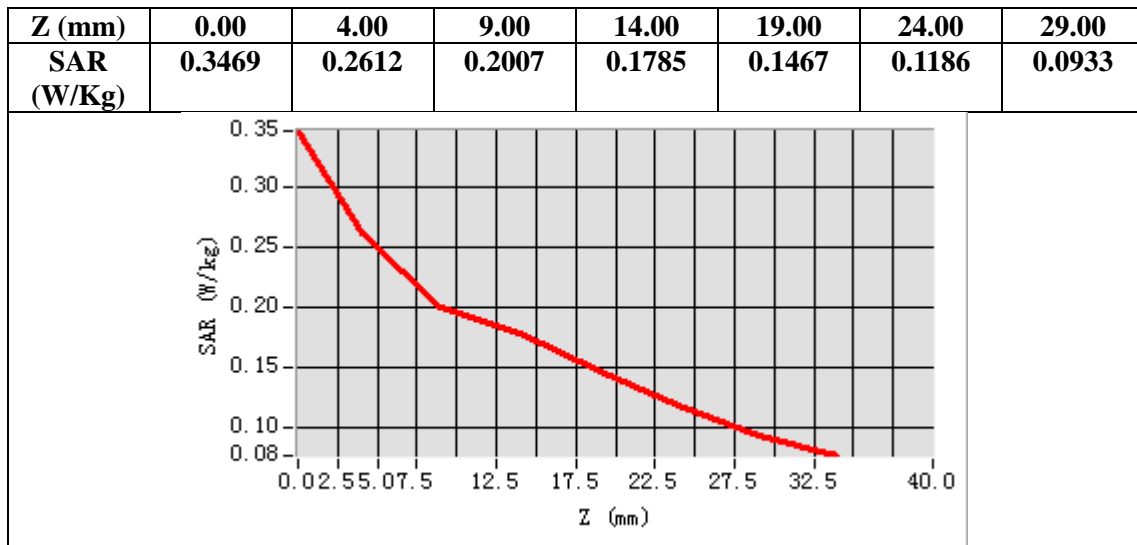

**Test Laboratory: AGC Lab**  
**GSM 850 Mid- Body- Back (MS)<SIM 1>**  
**DUT: Smart phone; Type: JAX M**

**Date: Mar. 02,2019**


Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=5.49;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon r = 55.75$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.7, Liquid temperature (°C): 20.9

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/GSM 850 Mid-Body-Back/Area Scan:** Measurement grid: dx=8mm, dy=8mm  
**Configuration/GSM 850 Mid-Body-Back/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;



<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>ZoomScan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	ELLI
<b>Device Position</b>	Body Back
<b>Band</b>	GSM 850
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

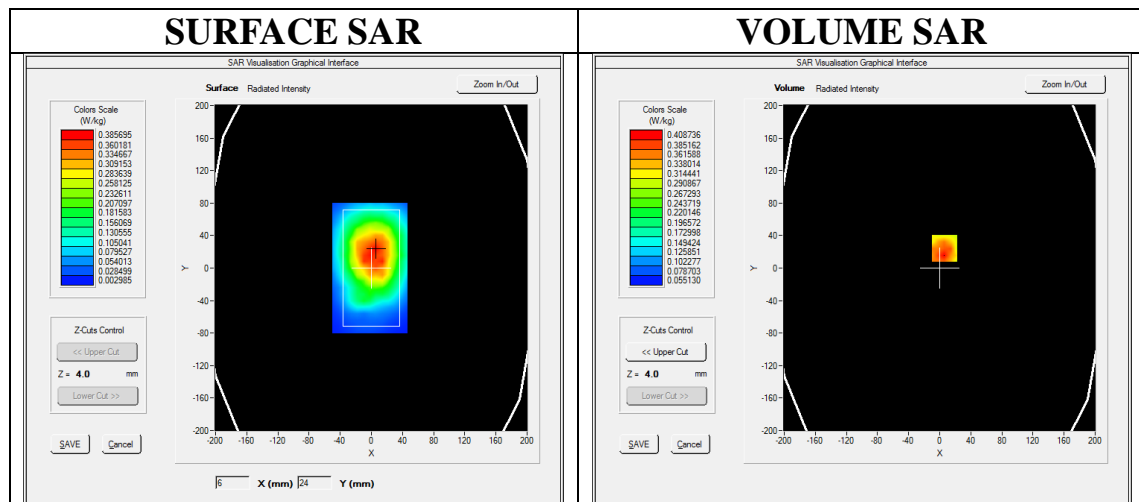

**Maximum location: X=6.00, Y=24.00**  
**SAR Peak: 0.53 W/kg**

<b>SAR 10g (W/Kg)</b>	0.278185
<b>SAR 1g (W/Kg)</b>	0.385568



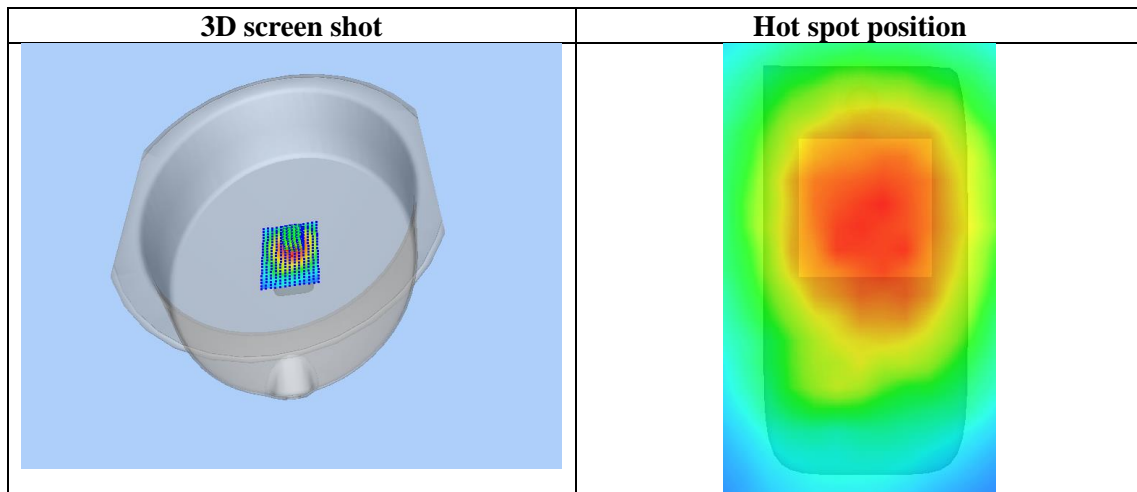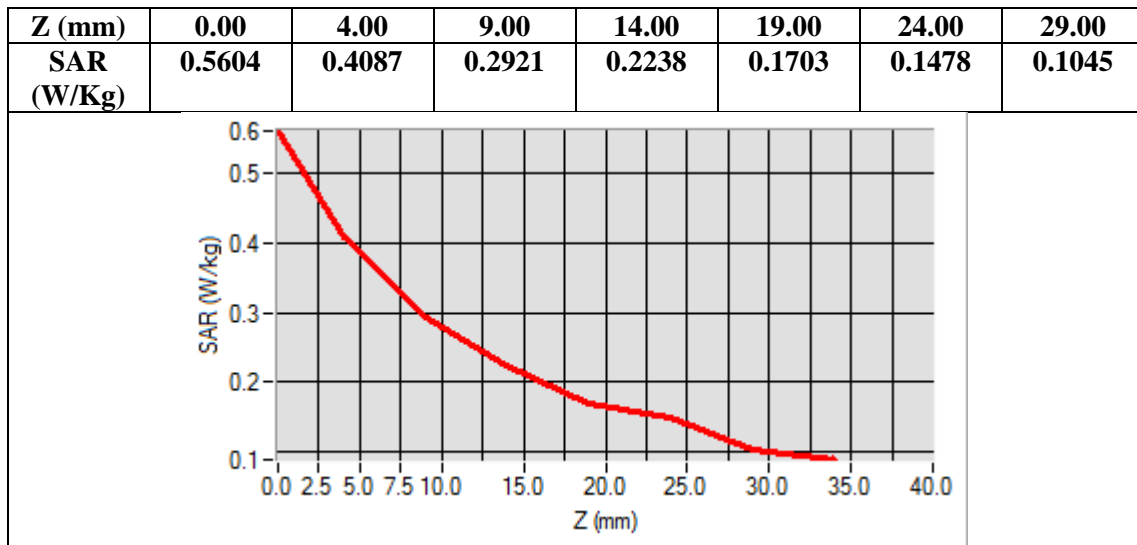

**Test Laboratory: AGC Lab**  
**GPRS 850 Mid- Body- Back (4up)**  
**DUT: Smart phone; Type: JAX M**

**Date: Mar. 02,2019**

Communication System: GPRS-4Slot; Communication System Band: GSM 850; Duty Cycle: 1:2.1; Conv.F=5.49;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.75$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.7, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/GPRS 850 Mid-Body-Back/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/GPRS 850 Mid-Body-Back/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;



<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>Zoom Scan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	ELLI
<b>Device Position</b>	Body Back
<b>Band</b>	GSM 850
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 2.0)

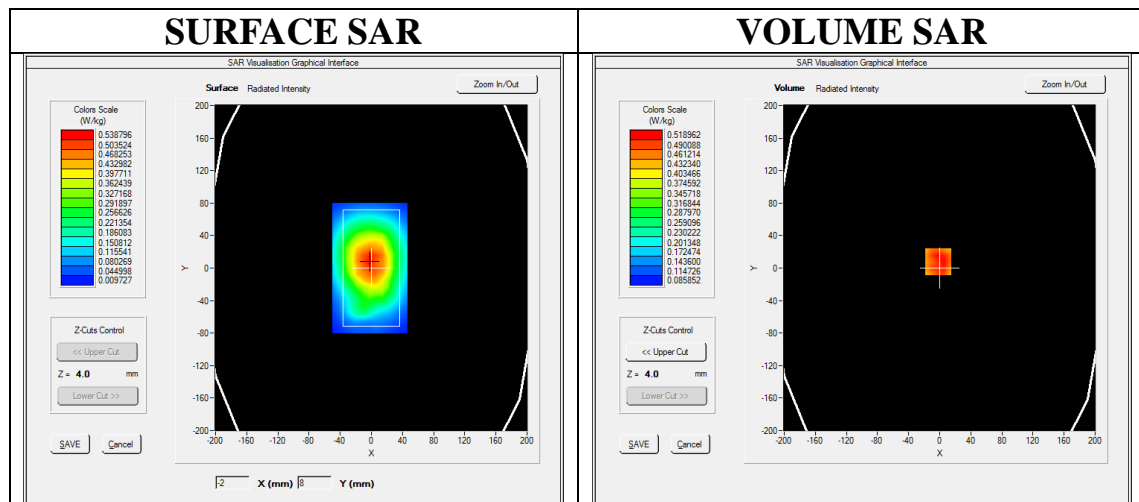

**Maximum location: X=-2.00, Y=8.00**

**SAR Peak: 0.66 W/kg**

<b>SAR 10g (W/Kg)</b>	0.375579
<b>SAR 1g (W/Kg)</b>	0.500784

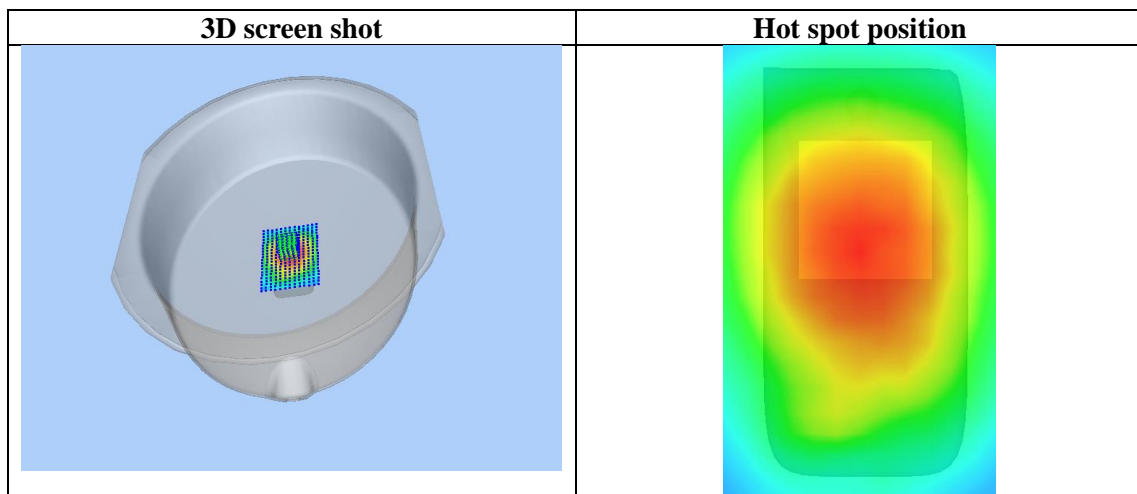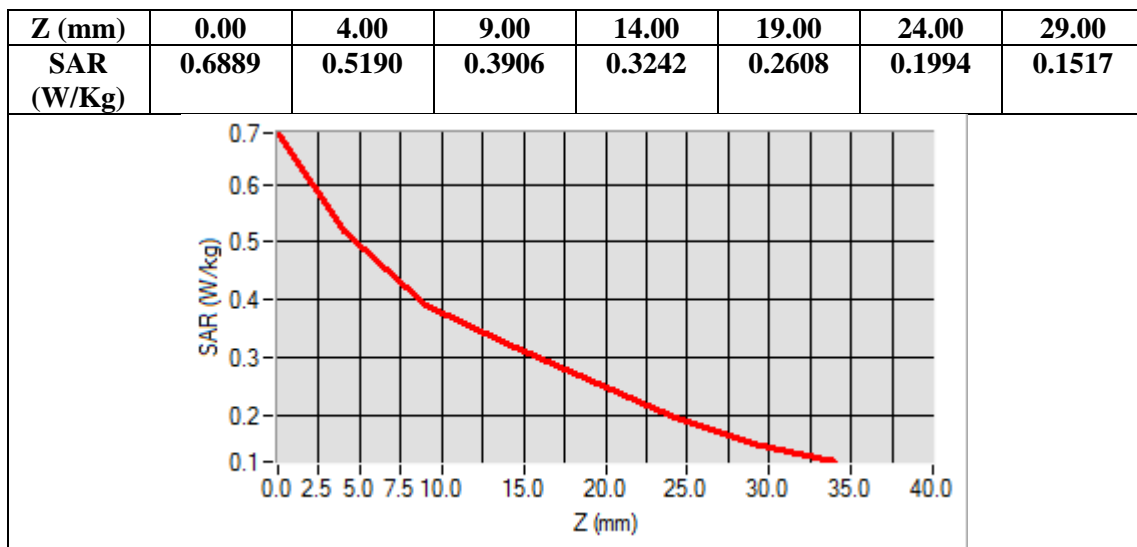

Test Laboratory: AGC Lab  
PCS 1900 Mid-Touch-Right <SIM 1>  
DUT: Smart phone; Type: JAX M

Date: Mar. 04,2019

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=5.24;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 41.45$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C): 21.5, Liquid temperature (°C): 20.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

Configuration/PCS1900 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/PCS1900 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;



<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>ZoomScan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	PCS 1900
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

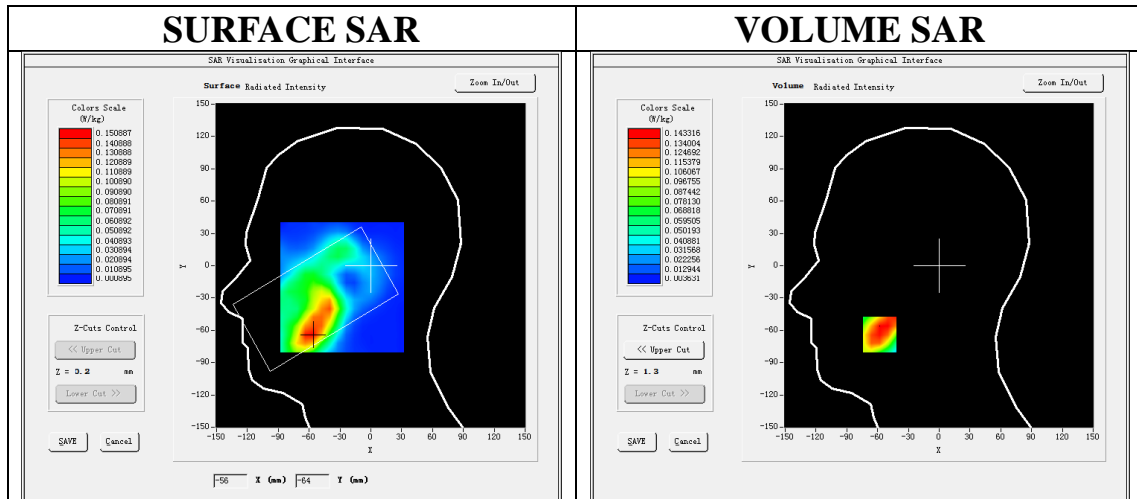

**Maximum location: X=-58.00, Y=-64.00**

**SAR Peak: 0.21 W/kg**

<b>SAR 10g (W/Kg)</b>	0.085451
<b>SAR 1g (W/Kg)</b>	0.139776

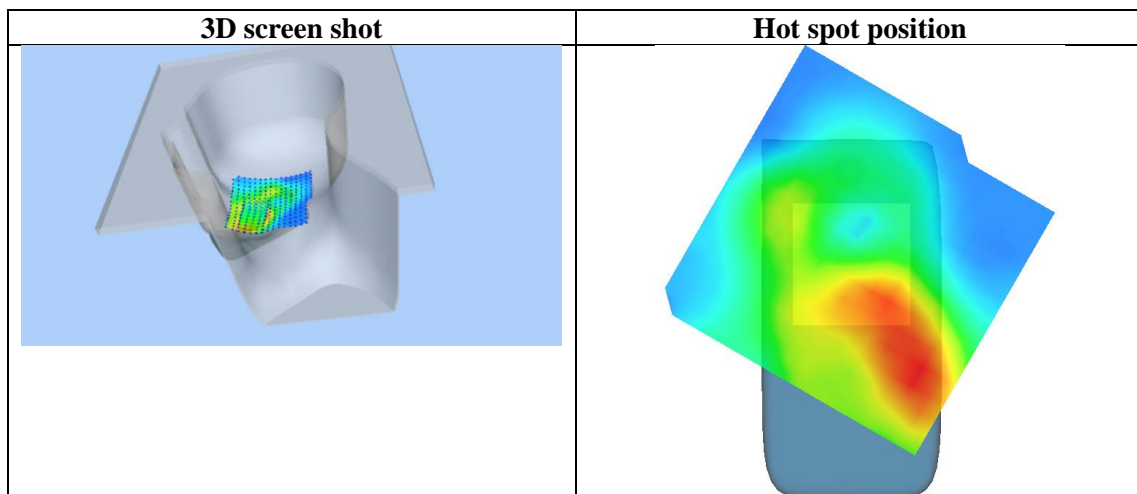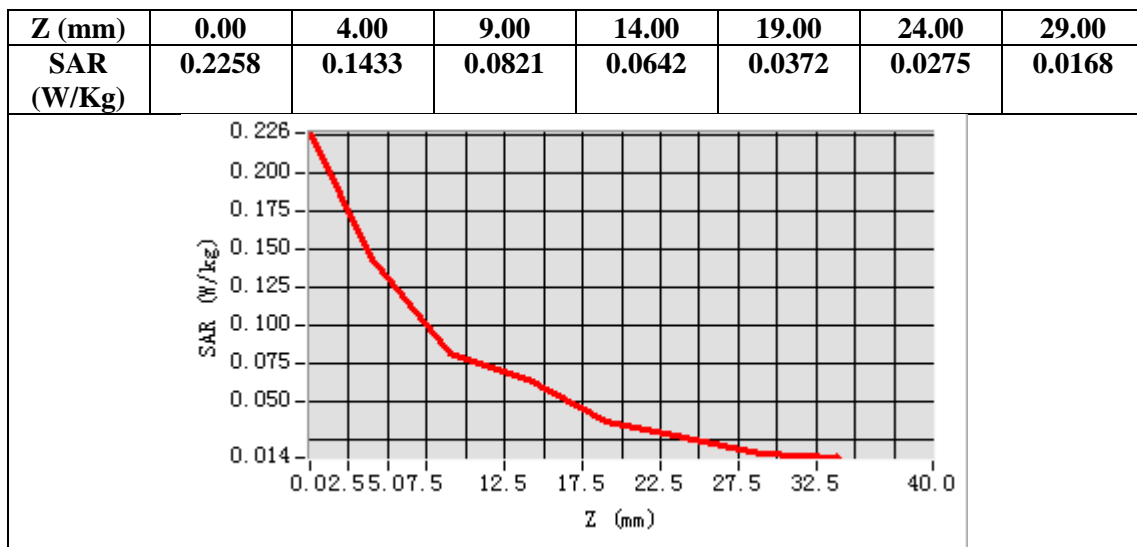

**Test Laboratory: AGC Lab**  
**PCS 1900 Mid-Body-Back (MS)<SIM 1>**  
**DUT: Smart phone; Type: JAX M**

**Date: Mar. 04,2019**

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=5.39;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.62$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.5, Liquid temperature (°C): 20.4


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/PCS1900 Mid-Body-Back/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/PCS1900 Mid-Body-Back/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;



<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>ZoomScan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	ELLI
<b>Device Position</b>	Body Back
<b>Band</b>	PCS 1900
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

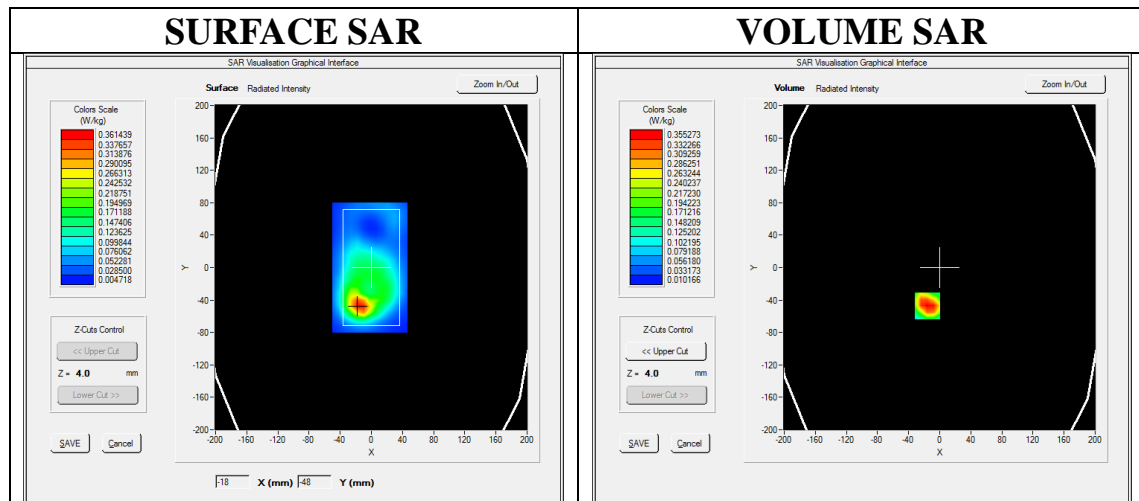

**Maximum location: X=-16.00, Y=-47.00**

**SAR Peak: 0.54 W/kg**

<b>SAR 10g (W/Kg)</b>	0.196451
<b>SAR 1g (W/Kg)</b>	0.345188

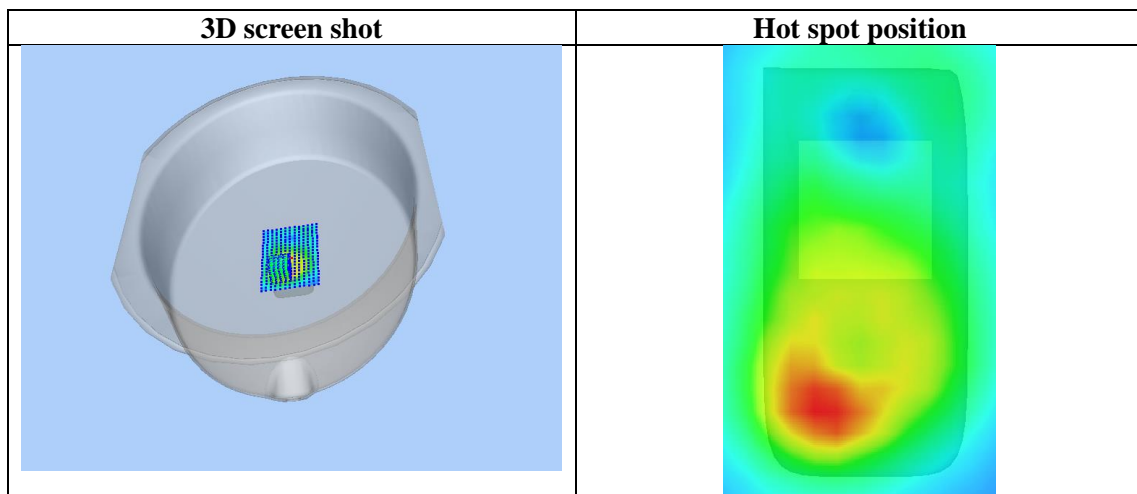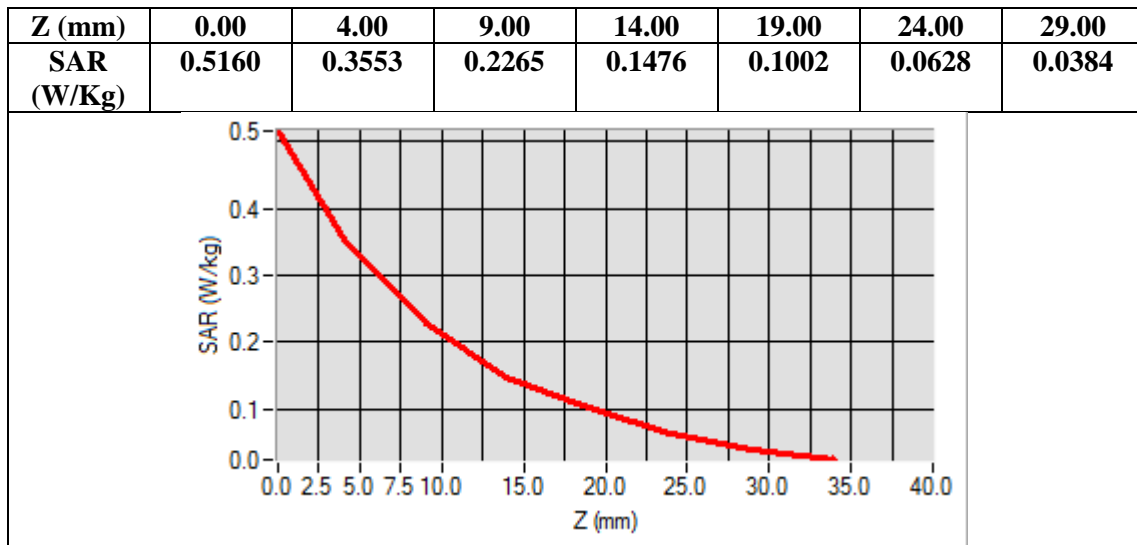

**Test Laboratory: AGC Lab**  
**GPRS 1900 High-Edge 3(3up)**  
**DUT: Smart phone; Type: JAX M**

**Date: Mar. 04,2019**

Communication System: GPRS-3Slot; Communication System Band: PCS 1900; Duty Cycle: 1:2.7; Conv.F=5.39;  
Frequency: 1909.8 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.08$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.5, Liquid temperature (°C): 20.4


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35

**Configuration/GPRS1900 High-Edge 3/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/GPRS1900 High-Edge 3/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;

<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>Zoom Scan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	ELLI
<b>Device Position</b>	Edge 3
<b>Band</b>	PCS 1900
<b>Channels</b>	High
<b>Signal</b>	TDMA (Crest factor: 2.7)


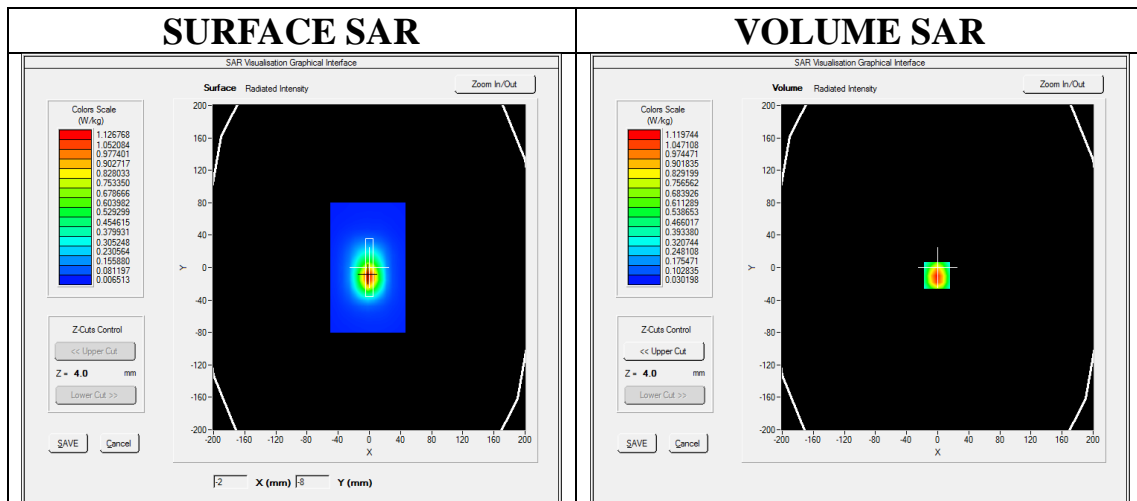


**Maximum location: X=-1.00, Y=-10.00**

**SAR Peak: 1.61 W/kg**

<b>SAR 10g (W/Kg)</b>	0.595530
<b>SAR 1g (W/Kg)</b>	1.061666



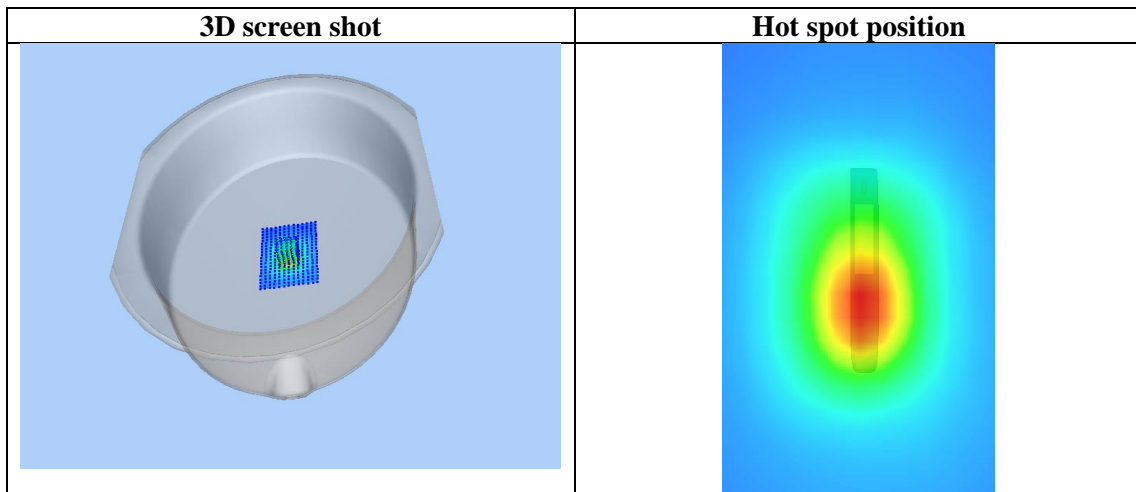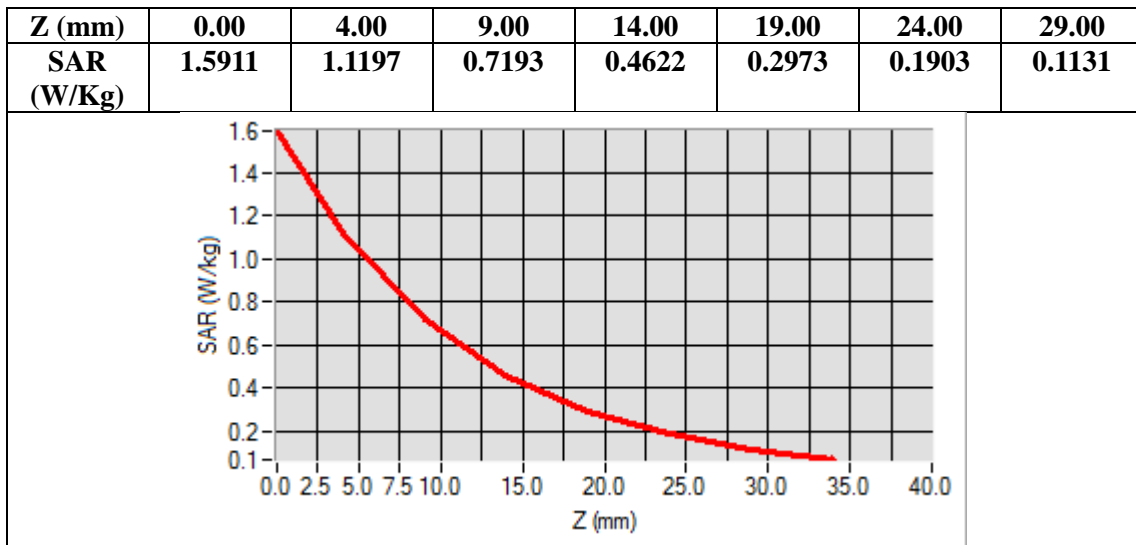

**Test Laboratory: AGC Lab**  
**WCDMA Band II Mid-Touch-Right (RMC)**  
**DUT: Smart phone; Type: JAX M**

**Date: Mar. 04,2019**


Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=5.24;  
Frequency: 1880 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon r = 41.45$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section  
Ambient temperature (°C): 21.5, Liquid temperature (°C): 20.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35



**Configuration/WCDMA band II Mid-Touch-Right/Area Scan:** Measurement grid: dx=8mm, dy=8mm  
**Configuration/WCDMA band II Mid-Touch-Right/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;

<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>ZoomScan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA band II
<b>Channels</b>	Middle
<b>Signal</b>	CDMA (Crest factor: 1.0)

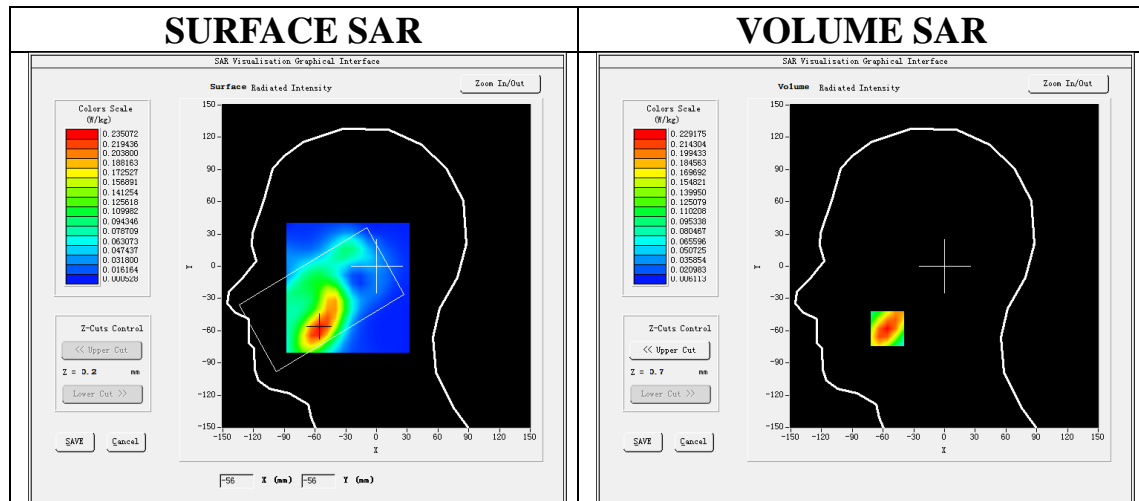

**Maximum location: X=-56.00, Y=-58.00**  
**SAR Peak: 0.33 W/kg**

<b>SAR 10g (W/Kg)</b>	0.129826
<b>SAR 1g (W/Kg)</b>	0.218795

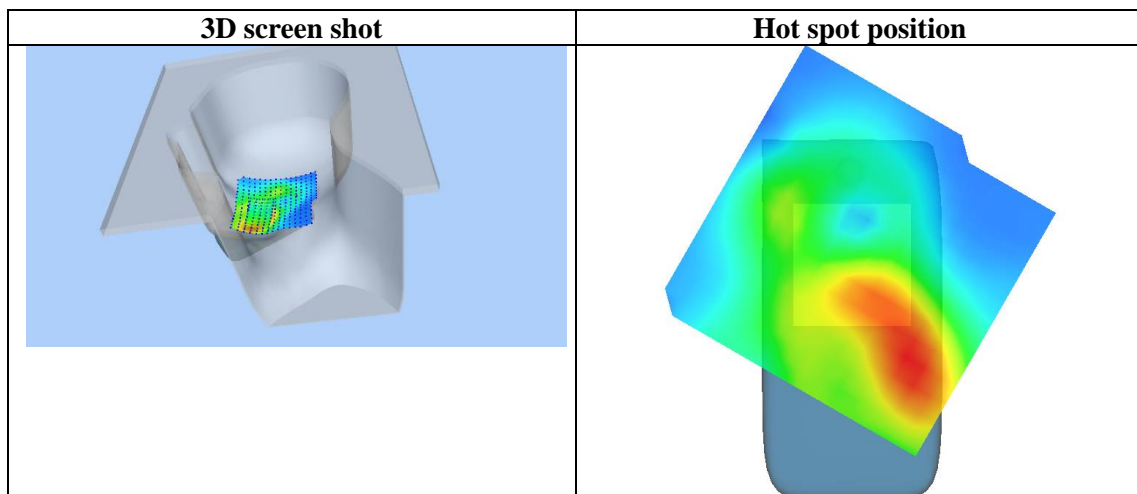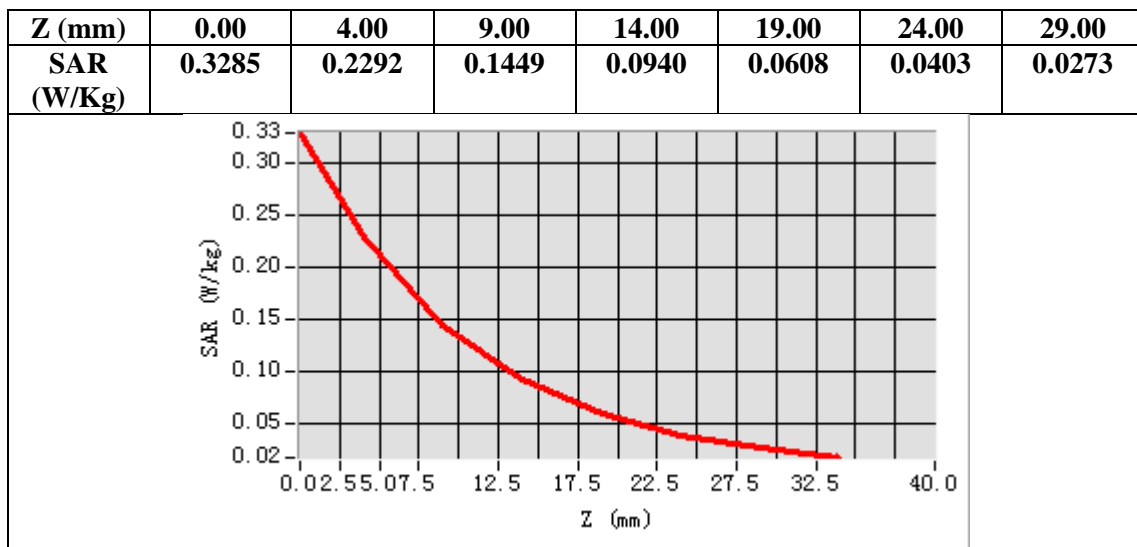

**Test Laboratory: AGC Lab**  
**WCDMA Band II Mid-Edge 3(RMC)**  
**DUT: Smart phone; Type: JAX M**

**Date: Mar. 04,2019**


Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=5.39  
Frequency: 1880 MHz; Medium parameters used:  $f = 1850$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon r = 52.62$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section  
Ambient temperature (°C): 21.5, Liquid temperature (°C): 20.4

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4\_02\_35



**Configuration/ WCDMA band II Mid-Edge 3/Area Scan:** Measurement grid: dx=8mm, dy=8mm  
**Configuration/ WCDMA band II Mid-Edge 3/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5mm;

<b>Area Scan</b>	dx=8mm dy=8mm, h= 5.00 mm
<b>Zoom Scan</b>	5x5x7,dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	ELLI
<b>Device Position</b>	Edge 3
<b>Band</b>	WCDMA band II
<b>Channels</b>	Middle
<b>Signal</b>	CDMA (Crest factor: 1.0)

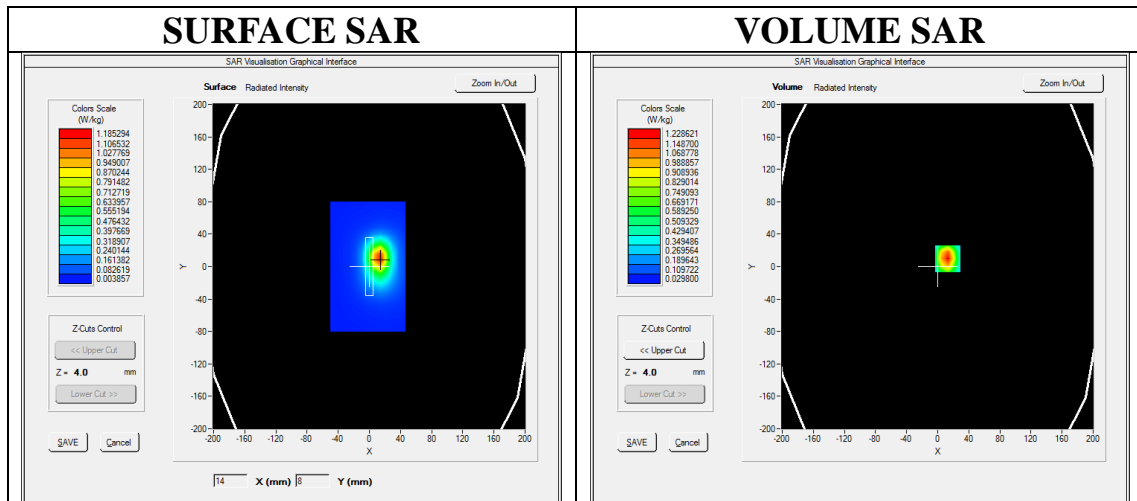

**Maximum location: X=13.00, Y=10.00**  
**SAR Peak: 1.79 W/kg**

<b>SAR 10g (W/Kg)</b>	0.627943
<b>SAR 1g (W/Kg)</b>	1.147209

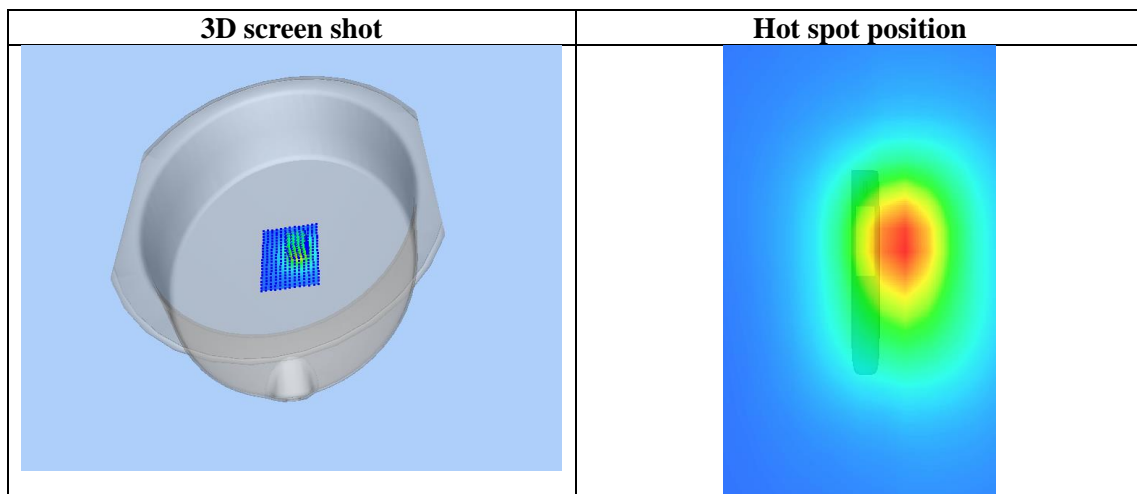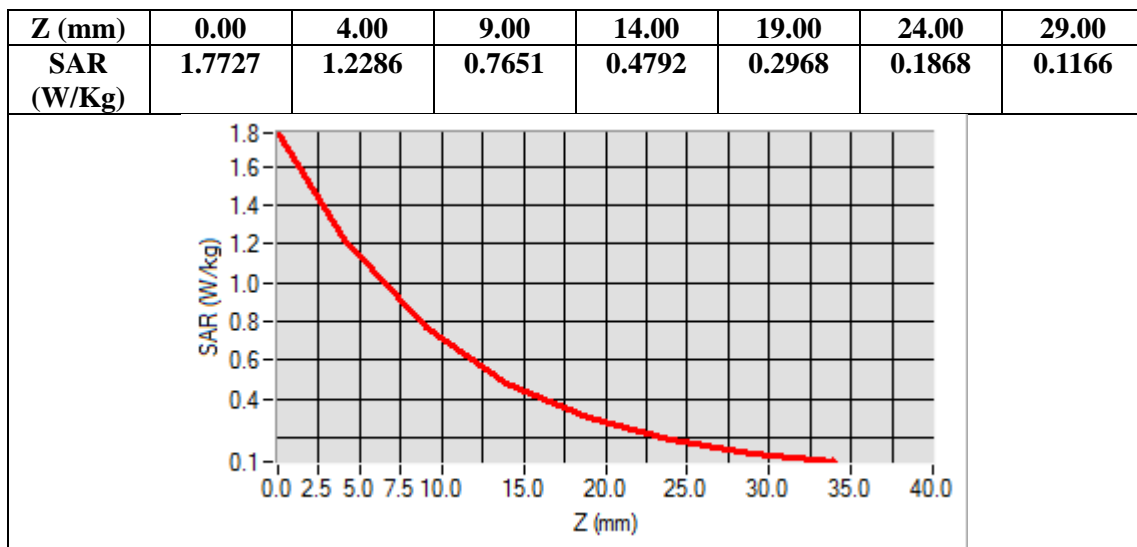

Test Laboratory: AGC Lab

Date: Mar. 02,2019

WCDMA Band V Mid-Touch-Right (RMC)

DUT: Smart phone; Type: JAX M

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD ; Duty Cycle:1: 1; Conv.F=5.29;  
Frequency: 836.6 MHz; Medium parameters used:  $f = 835\text{MHz}$ ;  $\sigma = 0.92 \text{ mho/m}$ ;  $\epsilon_r = 41.23$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section  
Ambient temperature ( $^{\circ}\text{C}$ ): 21.7, Liquid temperature ( $^{\circ}\text{C}$ ): 20.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4\_02\_35

Configuration/ WCDMA Band V Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ WCDMA Band V Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

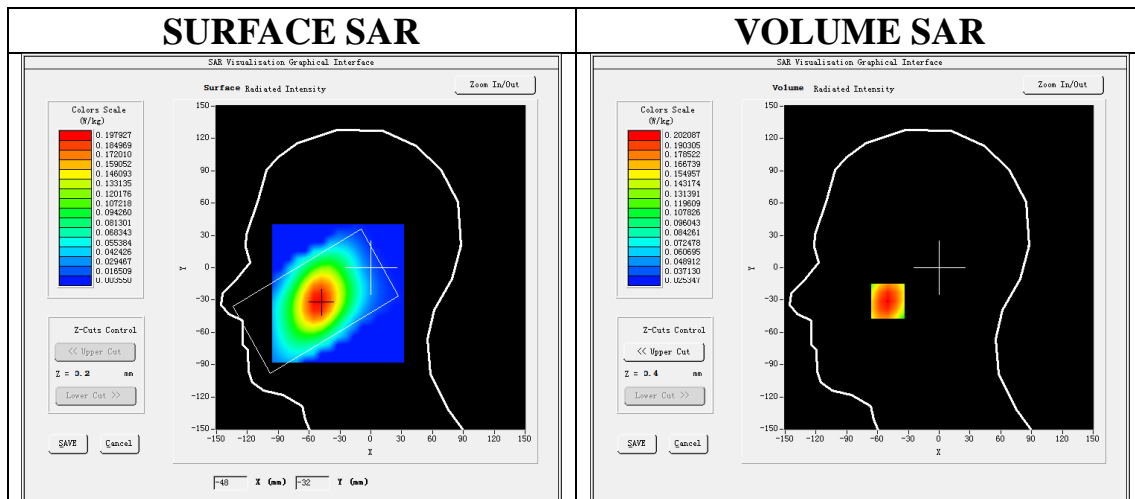

Maximum location: X=-50.00, Y=-31.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.151709
SAR 1g (W/Kg)	0.196413

