

FCC/ISED - TEST REPORT

Report Number : **6895025110701** Date of Issue: **2025-08-26**

Model/HVIN : **A1783**

Product Type : **Anker SOLIX C2000 Gen 2 Portable Power Station**

Applicant : **Anker Innovations Limited**

Address : **Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road,**
Central and Western District, HONG KONG

Manufacturer : **Anker Innovations Limited**
Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road,

Address : **Central and Western District, HONG KONG**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **61**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration	10
9	Technical Requirement	11
9.1	Conducted Emission	11
9.2	Conducted Output Power & EIRP	14
9.3	Power Spectral Density	19
9.4	6 dB Bandwidth and 99% Occupied Bandwidth	23
9.5	Spurious RF Conducted Emissions	31
9.6	Band Edge	39
9.7	Spurious Radiated Emissions for Transmitter	43
10	Test Equipment List	58
11	System Measurement Uncertainty	60

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park, Guankou Erlu, Nantou,
Nanshan District, Shenzhen City, 518052, P. R. China
Telephone: 86 755 8828 6998
Fax: 86 755 828 5299

FCC Registration No.: 514049

FCC Designation No.: CN5009

IC Registration No.: 10320A

ISED CAB identifier: CN0077

3 Description of the Equipment Under Test

Product:	Anker SOLIX C2000 Gen 2 Portable Power Station
Model no.:	A1783
FCC ID:	2AOKB-A1783
IC:	23451-A1783
PMN:	Anker SOLIX C2000 Gen 2 Portable Power Station
HVIN:	A1783
FVIN:	V1.0
Rating:	See below label for details
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	FPC Antenna
Antenna Gain:	3.53dBi
S/N	N/A
Description of the EUT:	The Equipment Under Test (EUT) is a Anker SOLIX C2000 Gen 2 Portable Power Station supports Bluetooth Low Energy / Wi-Fi functions
Remark:	1)This report is only for Bluetooth Low Energy. 2)For conducted Emission test, 120VAC/60Hz input was evaluated. 3)For RF test, all the tests were evaluated powered by internal rated battery 51.2VDC.
Label:	

Anker SOLIX C2000 Gen 2 Portable Power Station
 Model: A1783 | Rated Battery Capacity: 51.2Vdc/40000mAh/2048Wh
 AC Input Power (Charging): 120V~15A Max, 1800W Max, 12A (continuous), 60Hz, L+N+PE
 AC Input/Output Port (Bypass Mode): 120V~15A Max, 1800W Max, 60Hz, (3) hours when current exceeds 12A; L+N+PE
 XT-60 Input: 11V~20V~8.2A, 28V~20V~7.7A Max, (800W Max)
 Car Charger Output: 12V~10A
 USB-A1 Output: 5V~2.4A (12W Max)
 USB-C1 Output: 5V~3A (15W Max)
 USB-C2 Output: 5V~3A / 9V~3A / 12V~3A / 15V~3A / 20V~5A / 28V~5A (140W Max)
 USB-C3 Output: 5V~3A / 9V~3A / 12V~3A / 15V~3A / 20V~5A / 28V~5A (140W Max)
 USB-A4 and USB-C4 total output: 5V~4A (20W Max)
 AC Output (Inverter Mode): 120V~20A, 60Hz, 2400W Max, L+N+PE
 AC Output (TT-30): 120V~20A Max, 60Hz, 2400W Max
 AC output power (total): 2400W Max
 Expansion Battery Port: 58A Vdc, Max, 58A Max, 77A Max
 Charging Temperature: -77° to 104°F / -20°C to 40°C
 For use with Anker SOLIX C2000 Portable Power Station Expansion Battery (2048Wh)
 and Anker SOLIX F3000 Portable Power Station Expansion Battery (3072Wh) only
 FCC ID: 2AOKB-A1783 | CAN ICESB/NMB(B) IC: 2345-A1783
 Anker Innovations Limited | Made in China
 Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
 FCC statement: The device complies with part 15 of the FCC Rules. Operation is
 subject to the following two conditions: (1) this device may not cause harmful
 interference, and (2) this device must accept any interferences received, including
 interference that may cause undesired operation.

WARNING- Do not overcharge the internal battery. See Instruction Manual. Do not
 make, strike a match, or cause a spark in the vicinity of the power pack.
WARNING- Risk of Electric Shock and Risk of Fire. Install in a temperature and humidity
 controlled indoor area relatively free of conductive contaminants. This
 device contains energy higher than 1 kWh. Suitable for Use in Residential Non-Habitable Spaces.
CAUTION- Risk of Injury to Persons. Do not use this product if the power cord or the
 battery cables are damaged in any way.
CAUTION- This device is not intended for use in a commercial repair facility.
CAUTION! Risk of Electric Shock. Connect only to properly grounded outlets.
DANGER! This device is not waterproof. Use indoors if it is raining or the ground is
 wet outside.
AVERTISSEMENT- Ne pas surcharger la batterie interne. Consulter le manuel
 d'utilisation. Il ne faut pas fumer, allumer une allumette ou
 produire des étincelles à proximité du bloc d'alimentation. Charger la batterie uniquement
 dans un endroit bien aéré.
AVERTISSEMENT: Risque de choc électrique et risque d'incendie. Installer dans
 une zone intérieure contrôlée par la température et l'humidité
 relativement exempte de contaminants conducteurs. Cet appareil contient une énergie
 supérieure à 1 kWh. Convient pour une utilisation dans des espaces résidentiels non habitables.
MISE EN GARDE: Risque de blessure aux personnes. Ne pas utiliser ce produit si
 les câbles d'alimentation ou les câbles de batterie sont
 endommagés de quelque façon.
MISE EN GARDE: Le dispositif n'est pas destiné à être utilisé dans un atelier de
 réparation commerciale.
MISE EN GARDE: Risque de décharge électrique. Brancher l'unité uniquement
 à des prises de courant correctement mises à la masse.
DANGER! Cet appareil n'est pas étanche. Utilisez-le à l'intérieur s'il pleut ou si le sol est
 humide à l'extérieur.

ALWAYS HERE TO HELP
<http://support.anker.com>
support@anker.com
support.us@anker.com
EU@anker.com
la.support@anker.com

(US/CA) +1 (800) 988-5644 English only
 (State/Univ/Canada) +1 (800) 988-5644 Anglais seulement
 (UK) +44 (0) 161 056 301
 (DE) +49 (800) 000 2522
 (ES) +34 93 4655 7823

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2024 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE- LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C/ RSS-247 Issue 3/RSS-Gen Issue 5			
Test Condition		Test Site	Test Result
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	Site 1	Pass
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	Pass
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	Pass
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	Pass
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	Pass
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	Pass
§15.247(d) & RSS-247 5.5	Band edge	Site 1	Pass
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	Pass
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Internal Integrated FPC Antenna, which gain is 3.53dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AOKB-A1783, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C.

This submittal(s) (test report) is intended for IC: 23451-A1783, complies with RSS-247, RSS-GEN.

The Model: A1783 supports Bluetooth Low Energy/Wi-Fi functions, power by 24VDC.
The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHz Wi-Fi.

This report is for the Bluetooth Low Energy part.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - Not Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2025-07-15

Testing Start Date: 2025-07-18

Testing End Date: 2025-07-20

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

Prepared by:


Tested by:



John Zhi
Project Manager




Grace Gao
Project Engineer




Carry Cai
Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

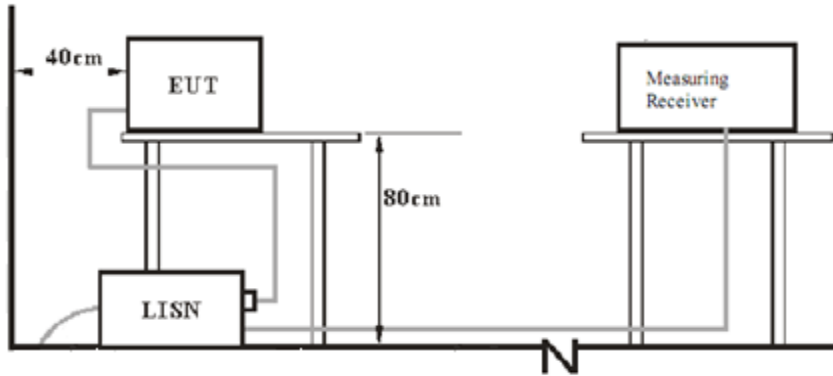


7.2 Radiated test setups 9KHz - 30MHz

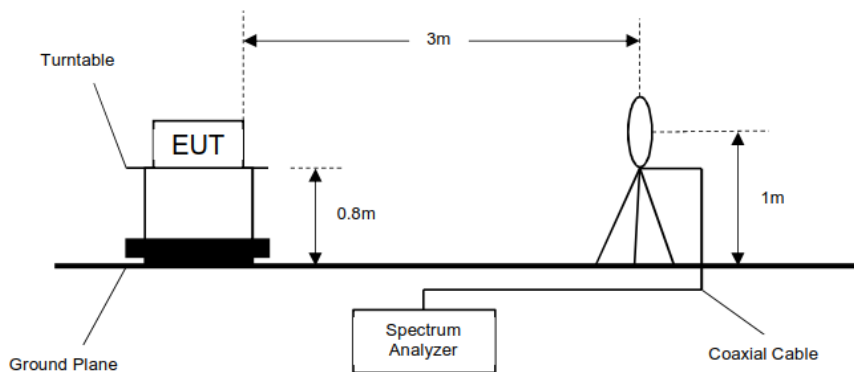


30MHz - 1GHz

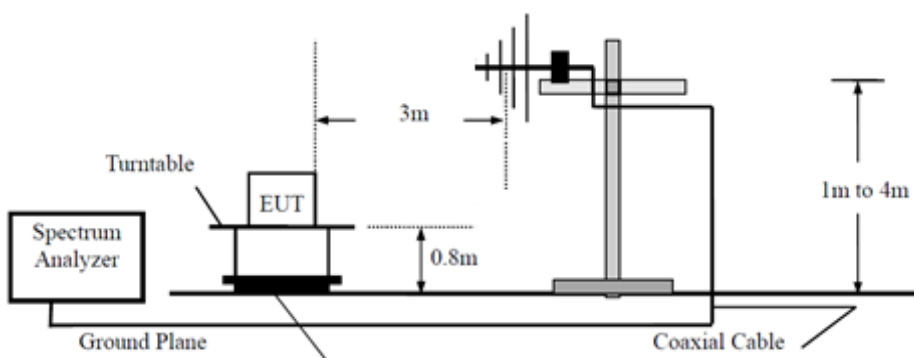

Above 1GHz

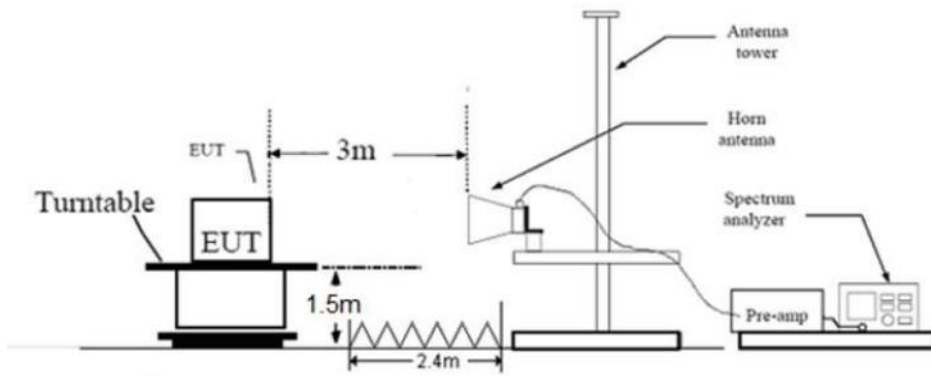

7.3 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Laptop	HP Inc	HP ProBook 445 G10	/

Test software information:

Test Software Version	EspRFTTestTool_v3.6	
Frequency	Modulation	Setting TX Power
2402-2480MHz	GFSK	4dBm

The system was configured to non-hopping mode, testing channel 0, 19, 39.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Anker SOLIX C2000 Gen 2 Portable Power Station
 M/N : A1783
 Operating Condition : Transmitting
 Test Specification : Line
 Comment : AC 120V/60Hz

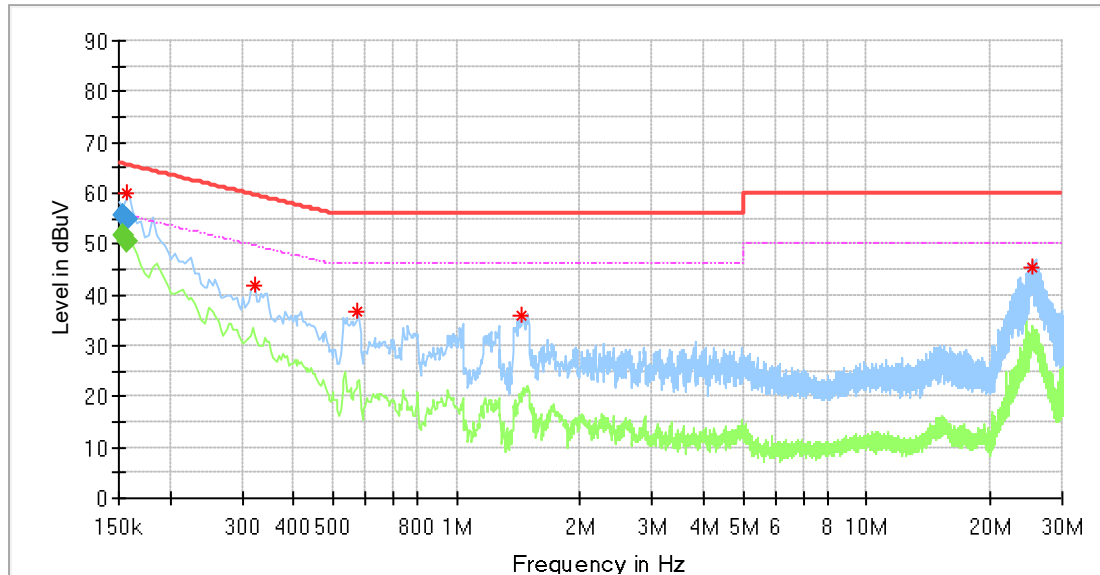

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.154000	---	51.76	56.00	4.24	L1	10.05
0.157500	60.16	---	65.57	5.41	L1	10.04
0.322000	41.71	---	59.66	17.95	L1	10.03
0.574000	36.76	---	56.00	19.24	L1	10.04
1.446000	35.81	---	56.00	20.19	L1	10.04
25.302000	45.40	---	60.00	14.60	L1	10.88

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.154000	---	51.57	55.78	4.21	L1	10.04
0.154000	55.67	---	65.78	10.11	L1	10.04
0.157500	---	50.37	55.59	5.22	L1	10.04
0.157500	54.78	---	65.59	10.81	L1	10.04

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Anker SOLIX C2000 Gen 2 Portable Power Station
 M/N : A1783
 Operating Condition : Transmitting
 Test Specification : Neutral
 Comment : AC 120V/60Hz

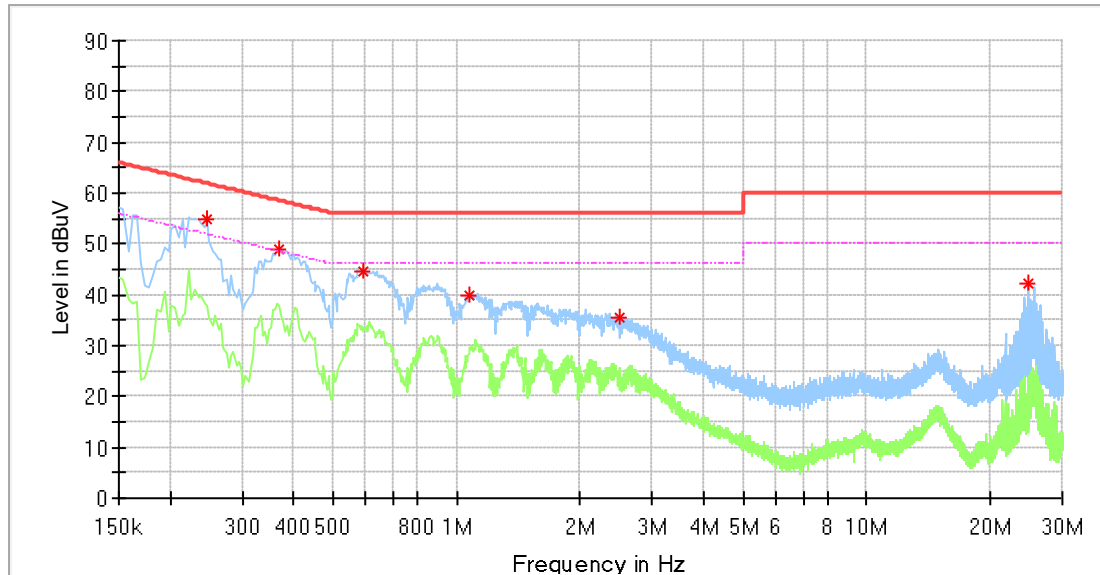

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.246000	55.02	---	61.89	6.87	N	10.06
0.370000	49.03	---	58.50	9.48	N	10.05
0.594000	44.47	---	56.00	11.53	N	10.05
1.078000	39.74	---	56.00	16.26	N	10.06
2.486000	35.60	---	56.00	20.40	N	10.11
24.770000	42.39	---	60.00	17.61	N	10.99

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---		---

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Output Power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 4	≤ 36

Conducted Output Power & EIRP


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	4.23	<=30	Pass
		2440	4.71	<=30	Pass
		2480	3.61	<=30	Pass
2M	SISO	2402	3.95	<=30	Pass
		2440	4.38	<=30	Pass
		2480	3.26	<=30	Pass

Mode	TX Type	Frequency (MHz)	EIRP (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	7.76	<=36	Pass
		2440	8.24	<=36	Pass
		2480	7.14	<=36	Pass
2M	SISO	2402	7.48	<=36	Pass
		2440	7.91	<=36	Pass
		2480	6.79	<=36	Pass


Note1: Antenna Gain: Ant1: 3.53dB




1M_LCH_2402MHz_Ant1_NTNV

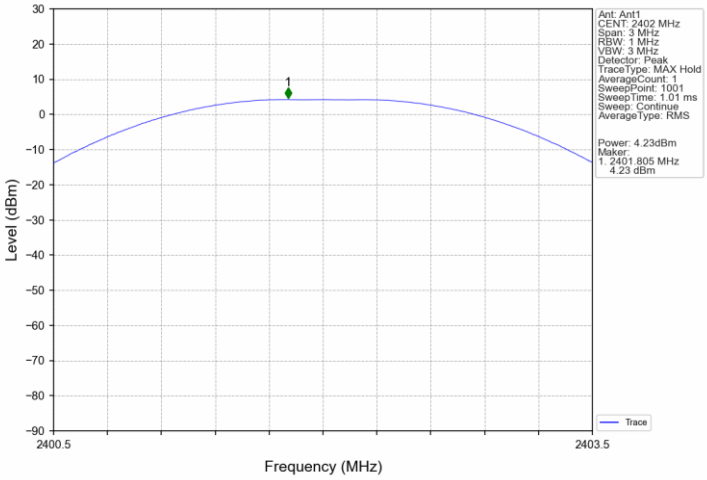


1M_MCH_2440MHz_Ant1_NTNV

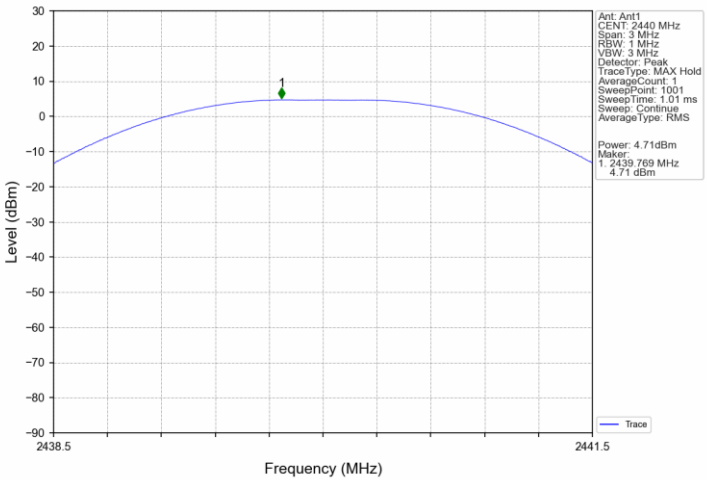

1M_HCH_2480MHz_Ant1_NTNV

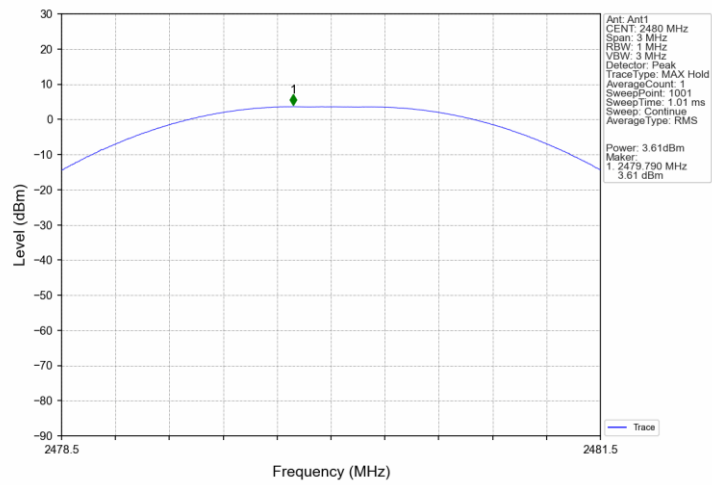


2M_LCH_2402MHz_Ant1_NTNV

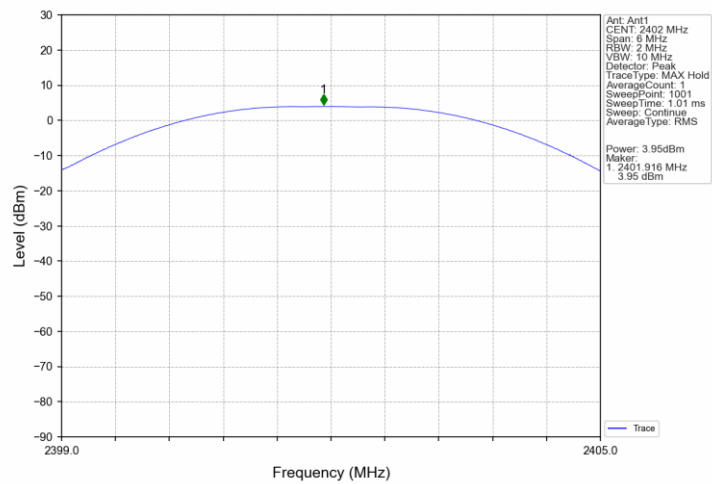




2M_MCH_2440MHz_Ant1_NTNV

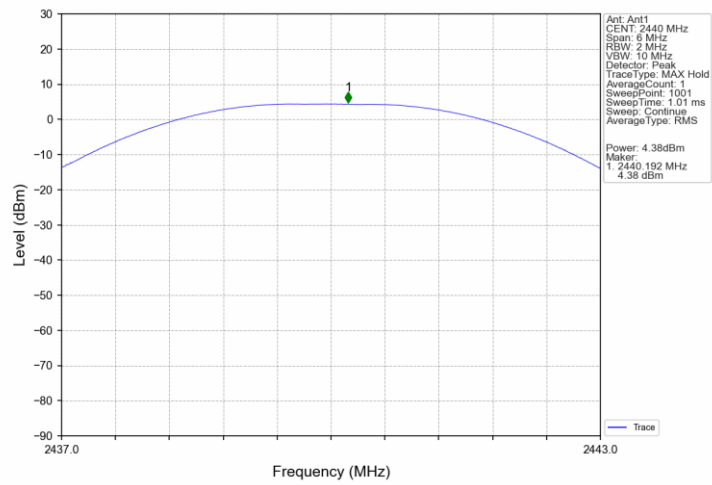

2M_HCH_2480MHz_Ant1_NTNV

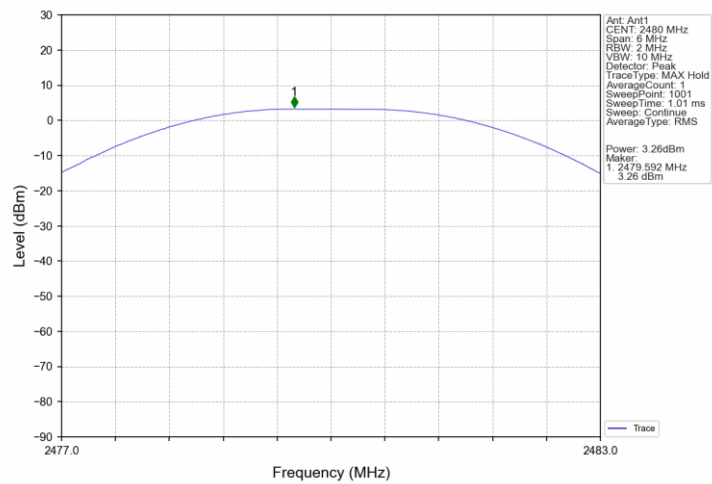

9.3 Power Spectral Density

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤8


Test result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-10.19	<=8	Pass
		2440	-9.87	<=8	Pass
		2480	-9.94	<=8	Pass
2M	SISO	2402	-11.93	<=8	Pass
		2440	-11.61	<=8	Pass
		2480	-11.58	<=8	Pass
Note1: Antenna Gain: Ant1: 3.53dBi					


1M_LCH_2402MHz_Ant1_NTNV

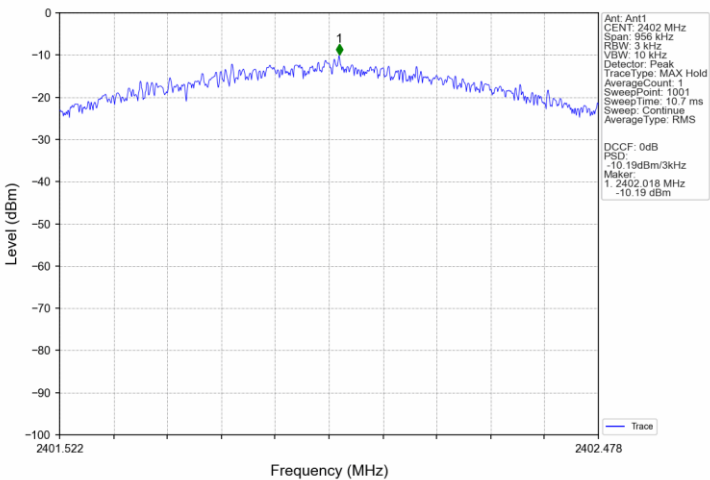


1M_MCH_2440MHz_Ant1_NTNV

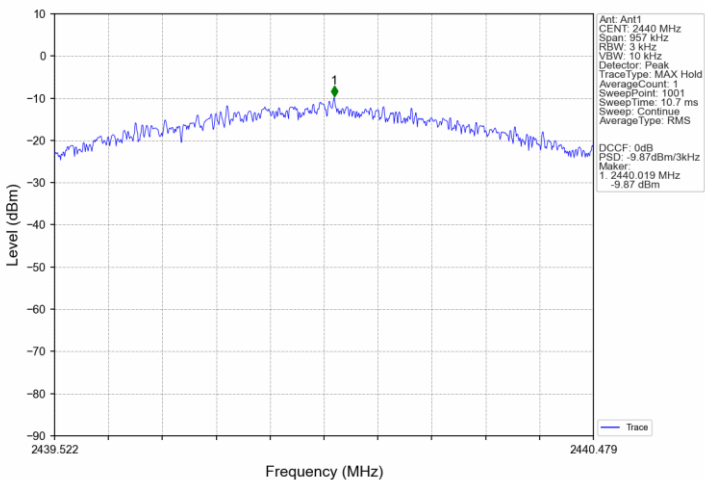


1M_HCH_2480MHz_Ant1_NTNV

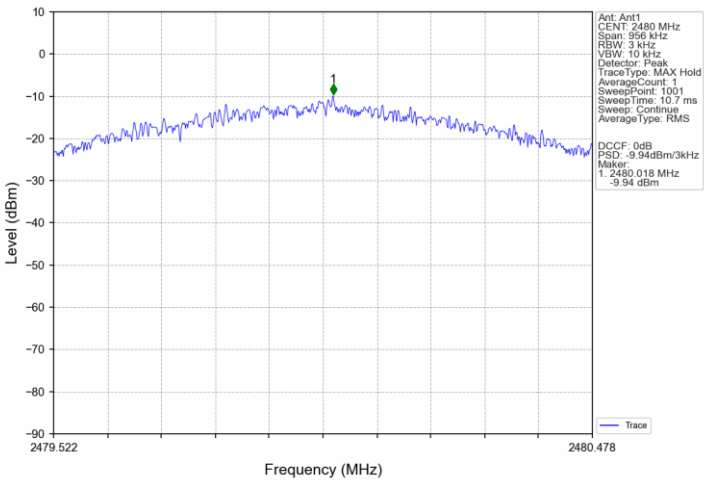


2M_LCH_2402MHz_Ant1_NTNV

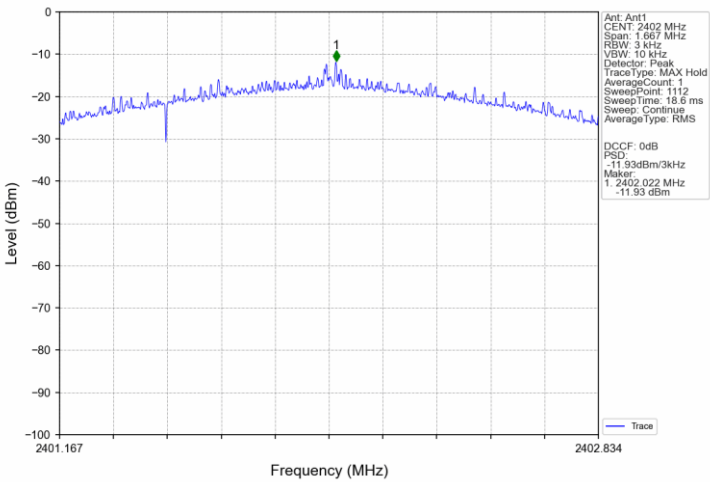

2M_MCH_2440MHz_Ant1_NTNV

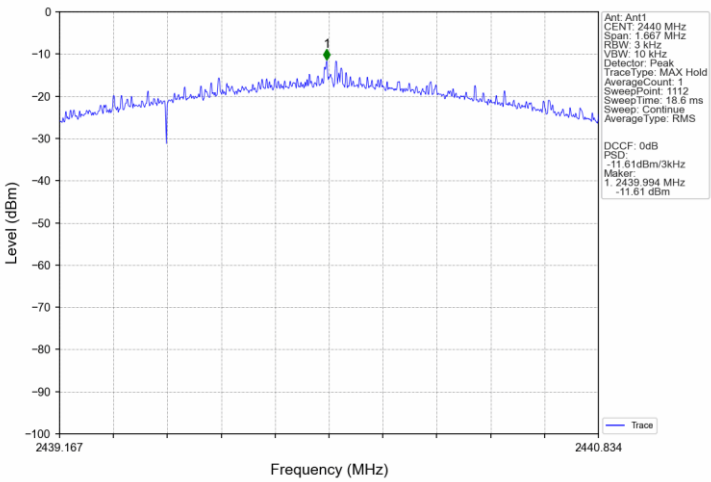

2M_HCH_2480MHz_Ant1_NTNV

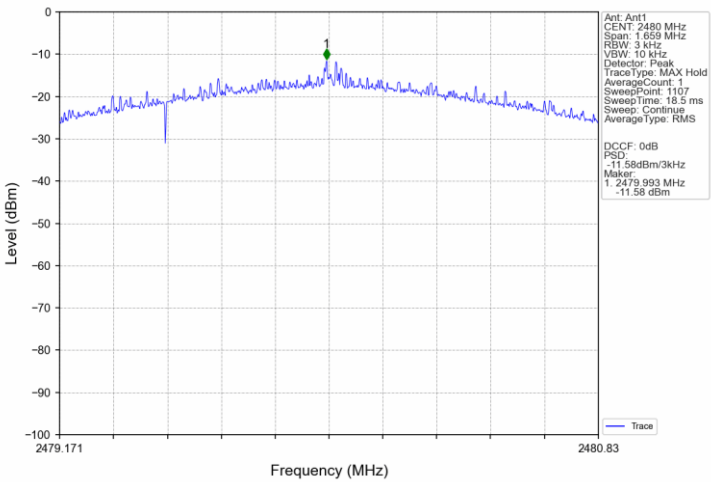

9.4 6 dB Bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the occupied bandwidth but not less than 100kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

Limit [kHz]

≥500

Test Method for 99 % Bandwidth

1. Set center frequency to the nominal EUT channel center frequency
2. Set span = 1.5 times to 5.0 times the OBW. Set RBW = 1 % to 5 % of the OBW
Set VBW $\geq$ 3 RBW Trace mode = max hold. Sweep = auto couple.
Allow the trace to stabilize.
3. Use the 99 % power bandwidth function of the instrument.
4. Record the results in the test report.

Limit


Limit [kHz]

Test result


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.071	/	Pass
		2440	1	1.070	/	Pass
		2480	1	1.072	/	Pass
2M	SISO	2402	1	2.085	/	Pass
		2440	1	2.085	/	Pass
		2480	1	2.087	/	Pass

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.637	≥ 0.5	Pass
		2440	1	0.638	≥ 0.5	Pass
		2480	1	0.637	≥ 0.5	Pass
2M	SISO	2402	1	1.111	≥ 0.5	Pass
		2440	1	1.111	≥ 0.5	Pass
		2480	1	1.106	≥ 0.5	Pass


99% Bandwidth

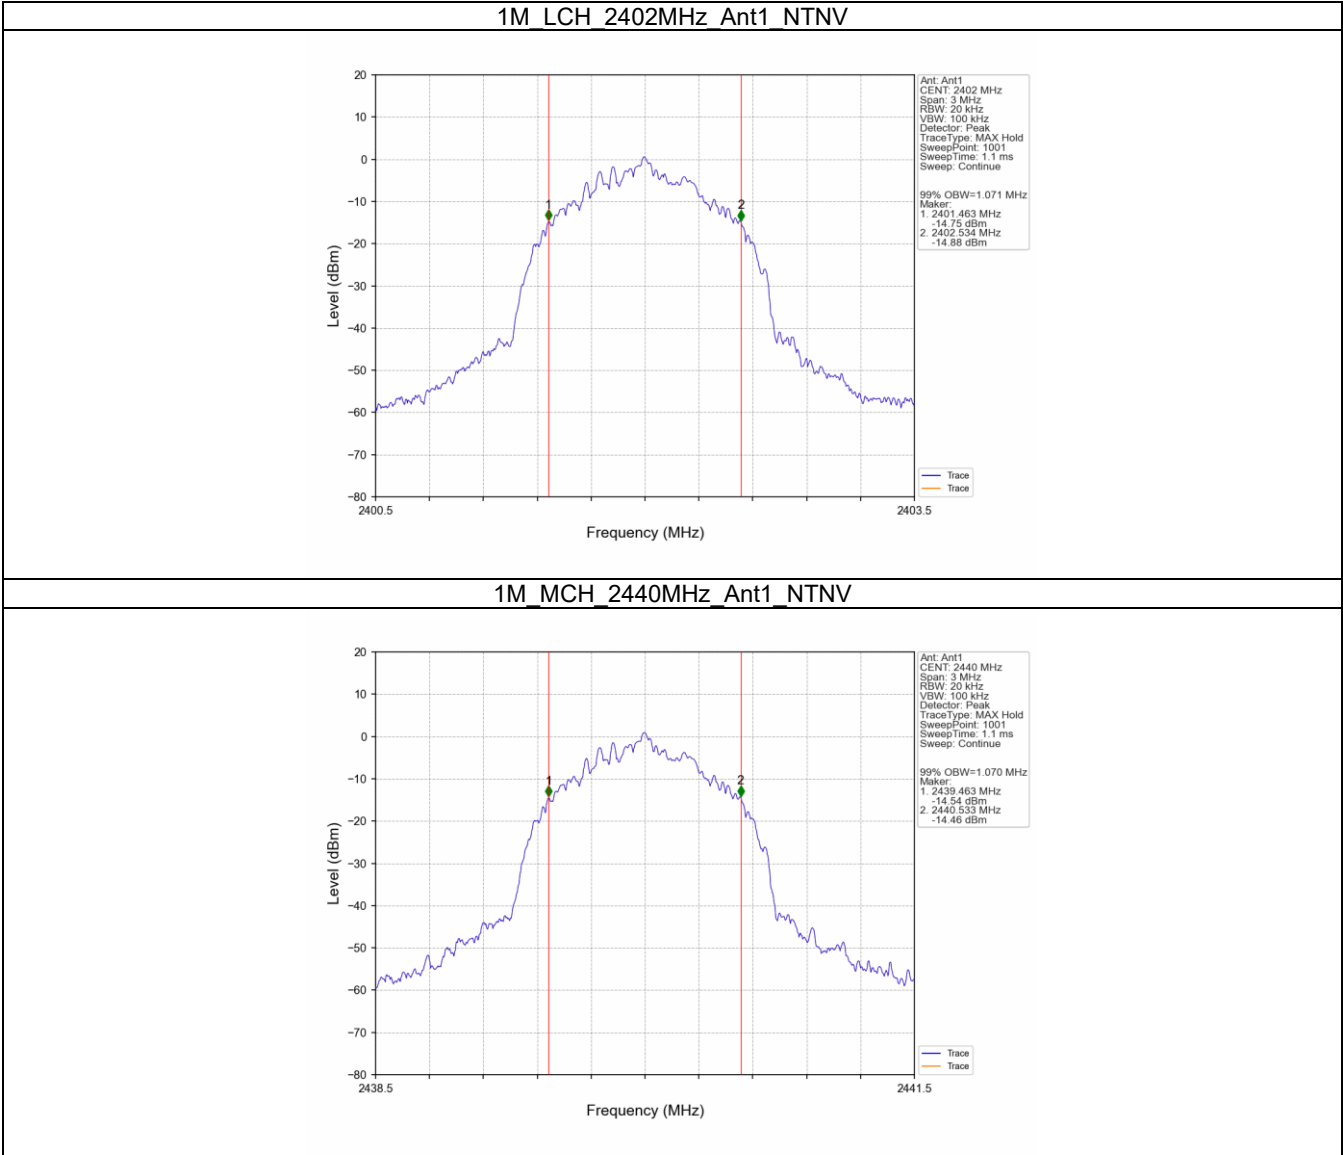


1M_HCH_2480MHz_Ant1_NTNV

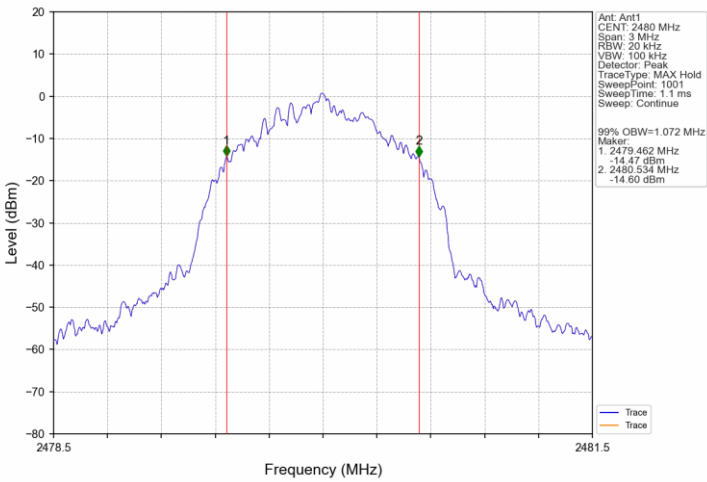


2M_LCH_2402MHz_Ant1_NTNV

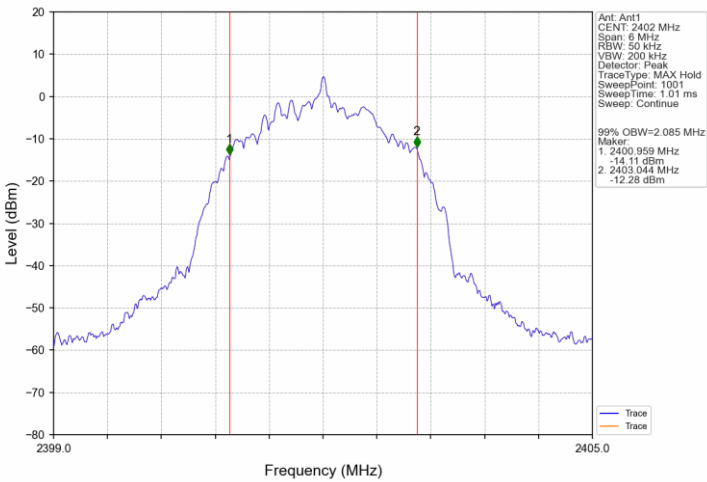

2M_MCH_2440MHz_Ant1_NTNV

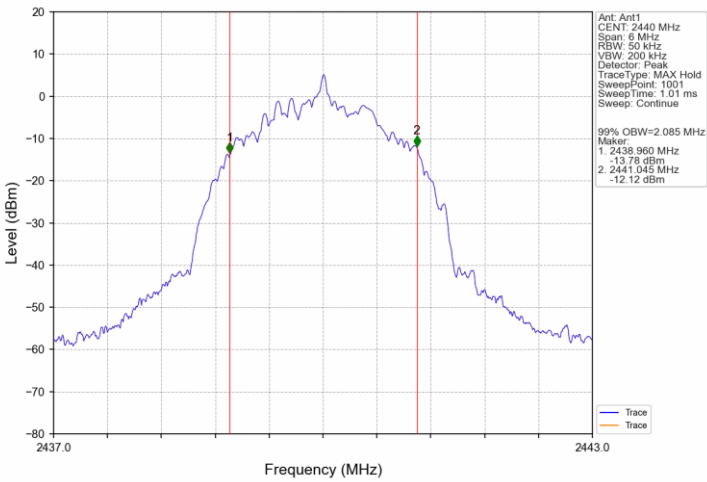


2M_HCH_2480MHz_Ant1_NTNV

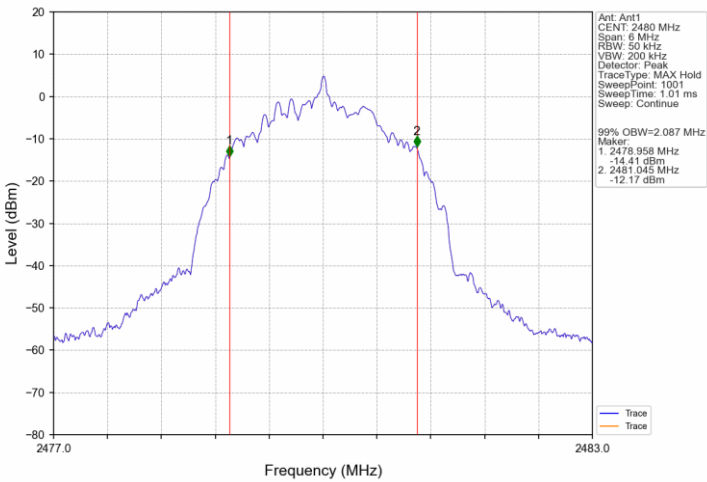


6dB Bandwidth


1M_LCH_2402MHz_Ant1_NTNV

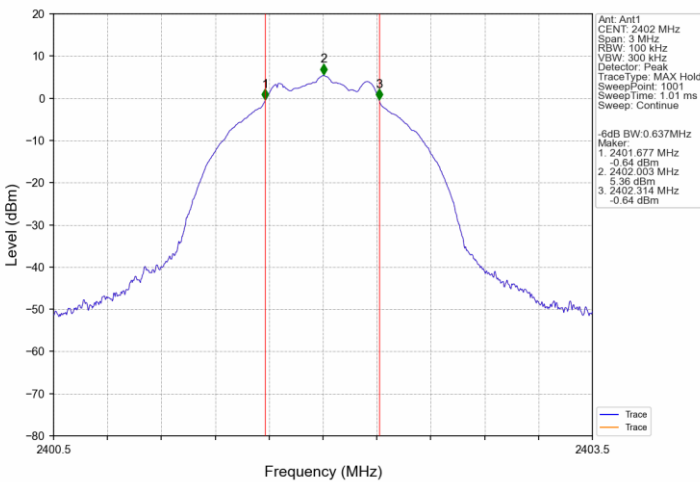


1M_MCH_2440MHz_Ant1_NTNV

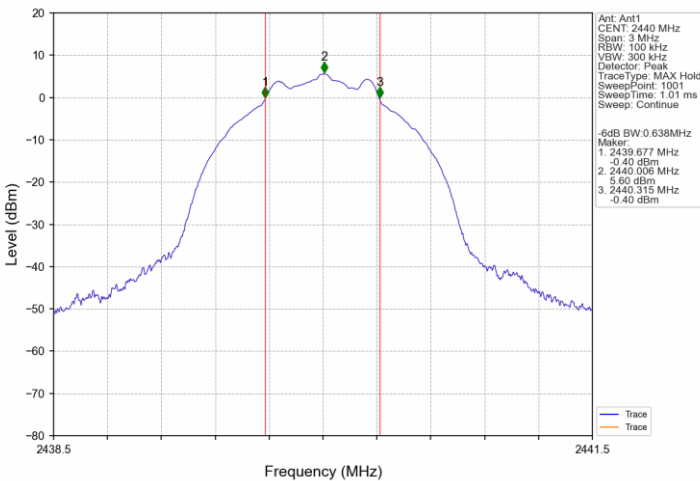


1M_HCH_2480MHz_Ant1_NTNV

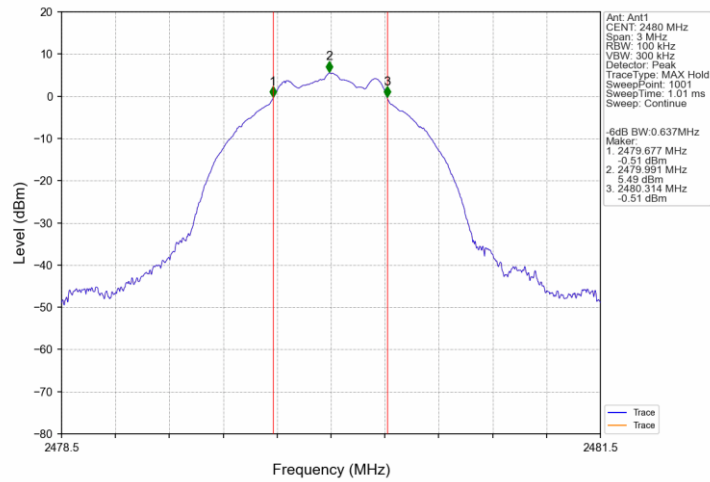


2M_LCH_2402MHz_Ant1_NTNV

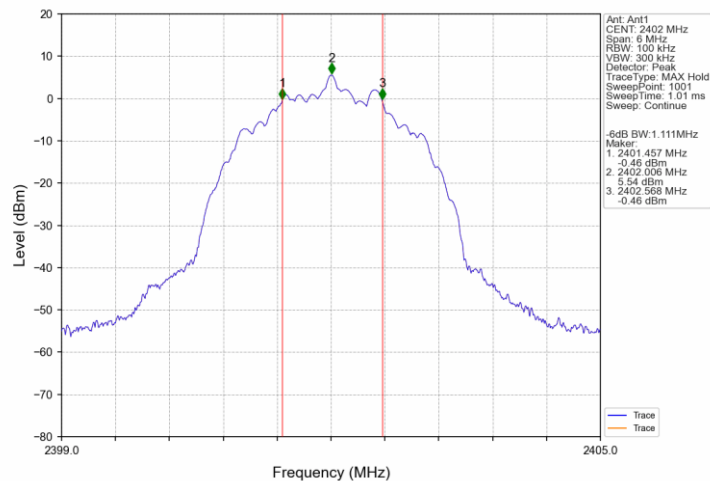

2M_MCH_2440MHz_Ant1_NTNV

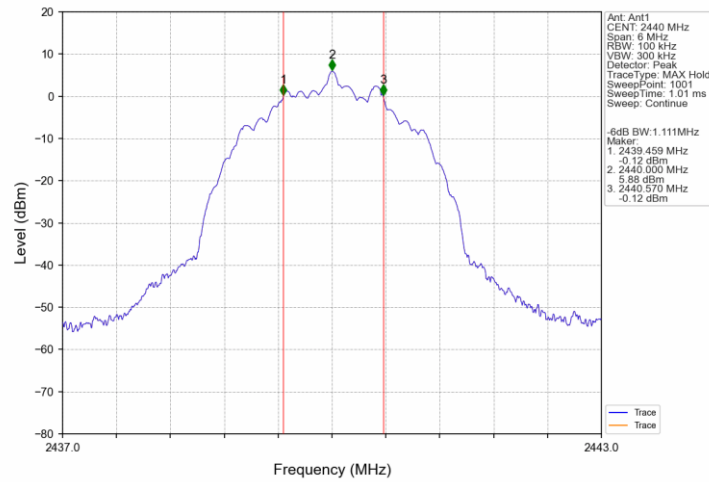

2M_HCH_2480MHz_Ant1_NTNV

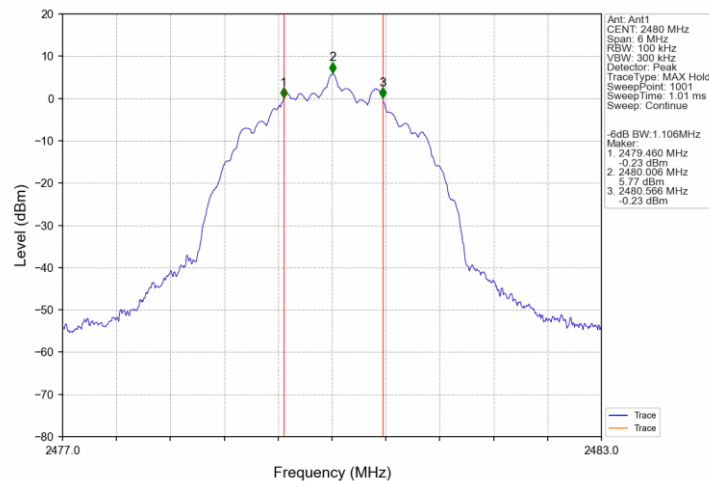

9.5 Spurious RF Conducted Emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	5.29	-24.71	Pass
		2440	1	5.66	-24.34	Pass
		2480	1	5.54	-24.46	Pass
2M	SISO	2402	1	5.45	-24.55	Pass
		2440	1	5.82	-24.18	Pass
		2480	1	5.73	-24.27	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


1M_LCH_2402MHz_Ant1_NTNV

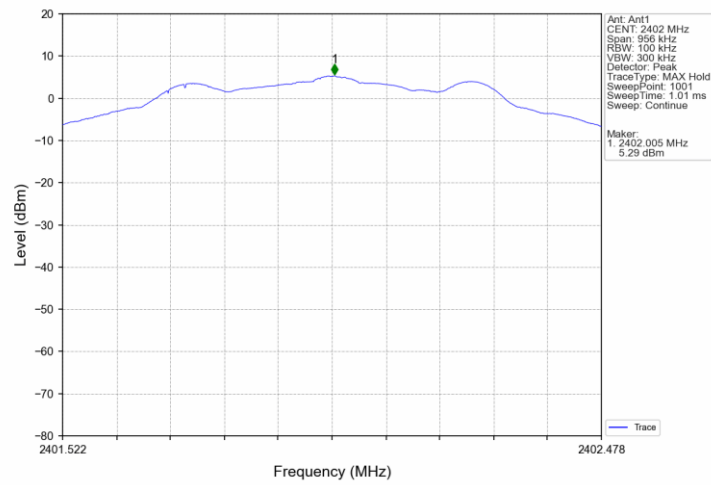


1M_MCH_2440MHz_Ant1_NTNV

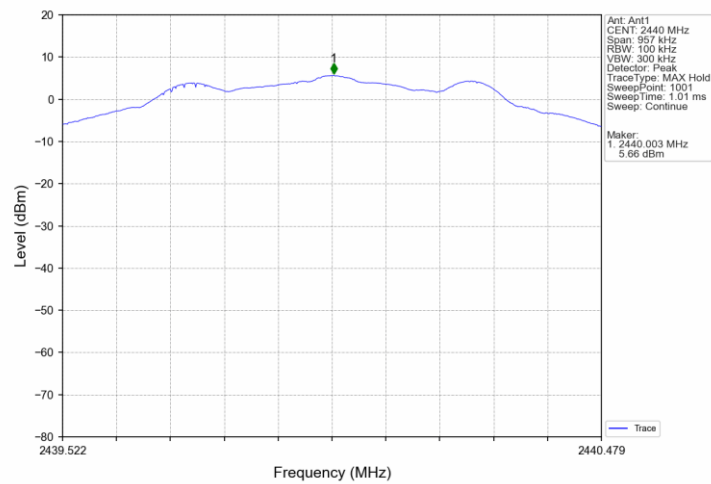


1M_HCH_2480MHz_Ant1_NTNV

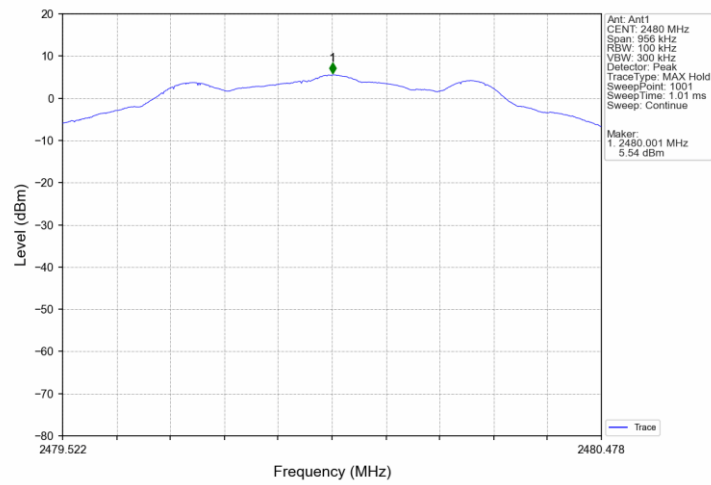


2M_LCH_2402MHz_Ant1_NTNV

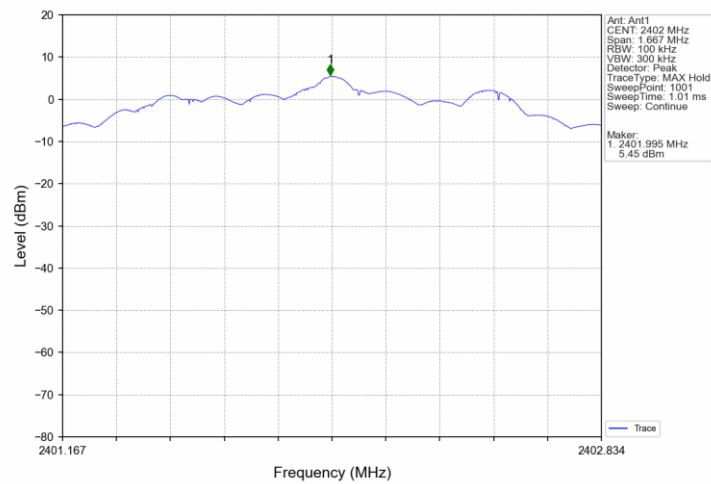


2M_MCH_2440MHz_Ant1_NTNV

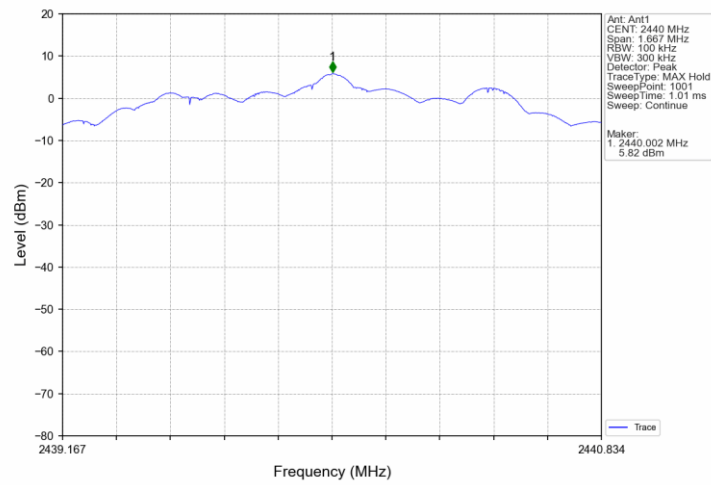


2M_HCH_2480MHz_Ant1_NTNV

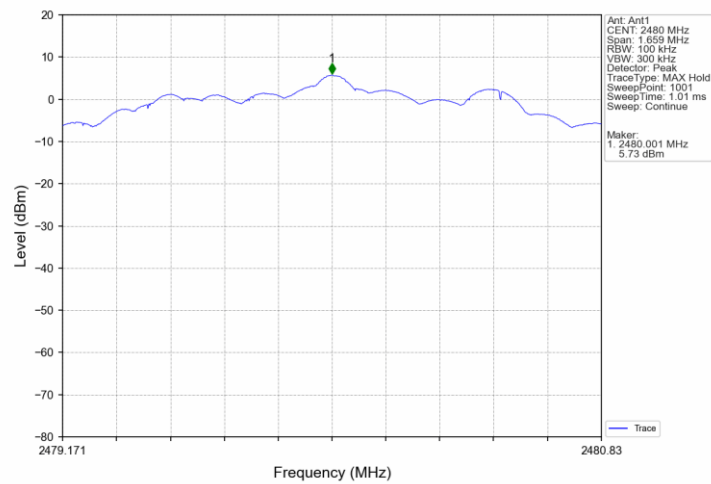


1M_LCH_2402MHz_Ant1_NTNV

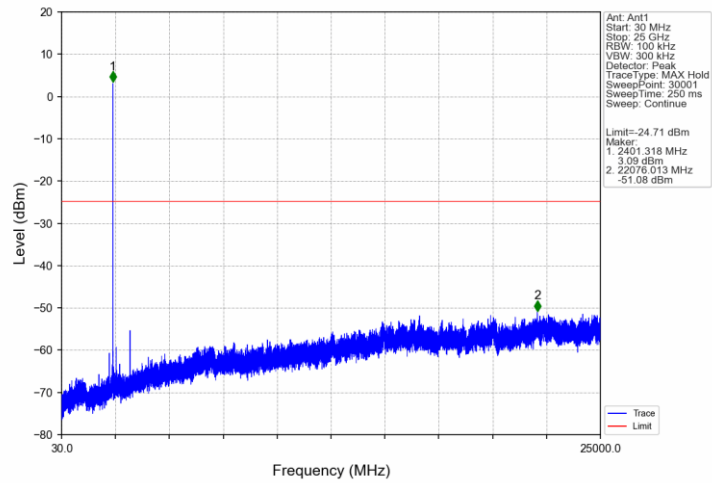


1M_MCH_2440MHz_Ant1_NTNV

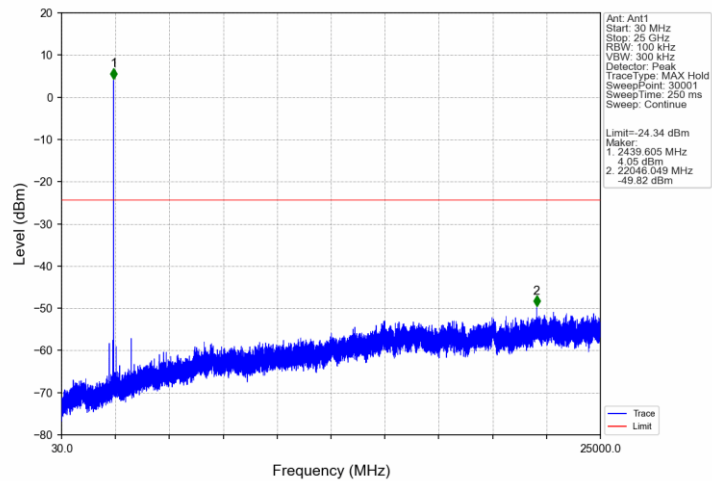


1M_HCH_2480MHz_Ant1_NTNV

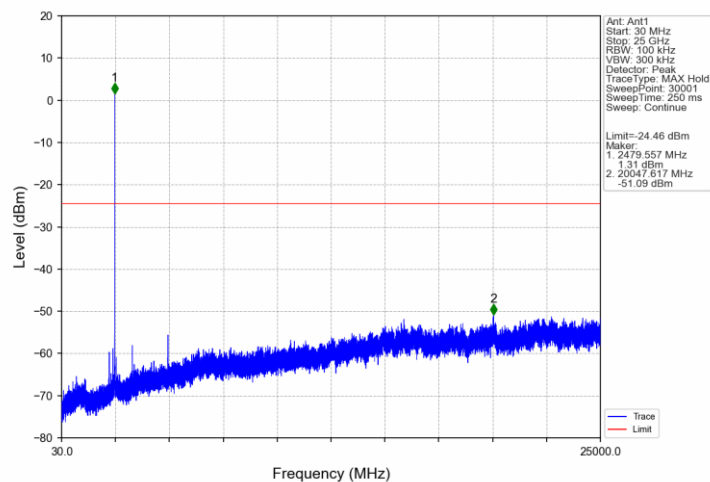


2M_LCH_2402MHz_Ant1_NTNV

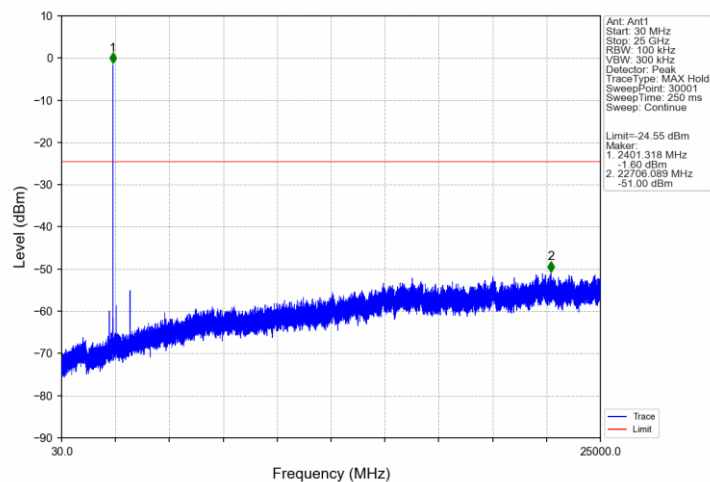

2M_MCH_2440MHz_Ant1_NTNV

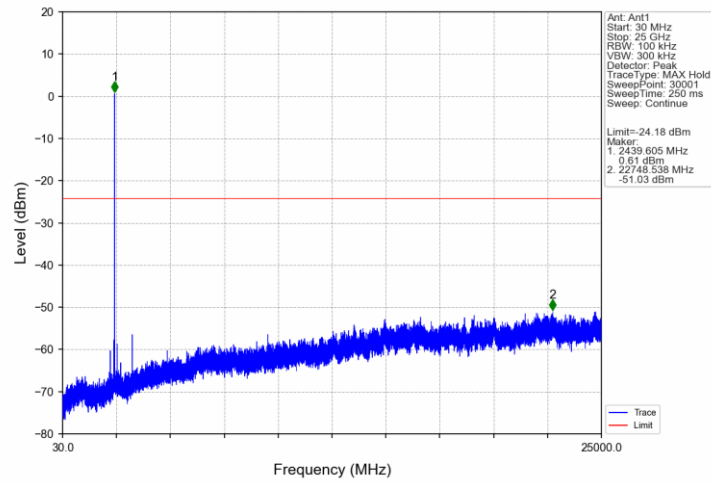

2M_HCH_2480MHz_Ant1_NTNV

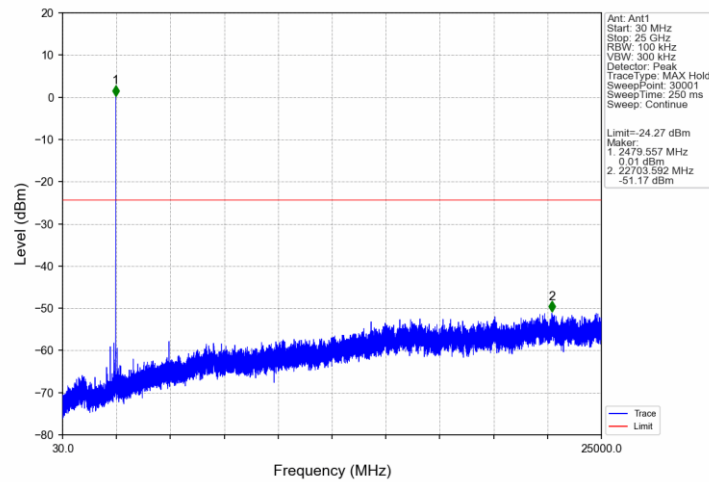

9.6 Band Edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20


Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	5.29	-24.71	Pass
		2440	1	5.66	-24.34	Pass
		2480	1	5.54	-24.46	Pass
2M	SISO	2402	1	5.45	-24.55	Pass
		2440	1	5.82	-24.18	Pass
		2480	1	5.73	-24.27	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

Band edge testing


1M_LCH_2402MHz_Ant1_NTNV

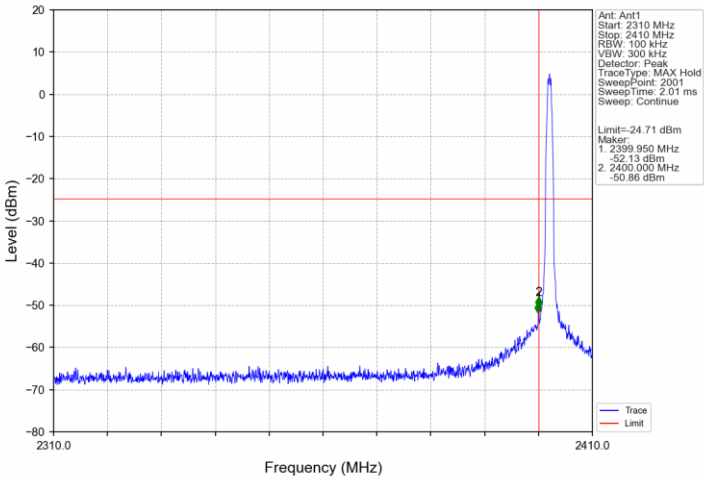


1M_HCH_2480MHz_Ant1_NTNV

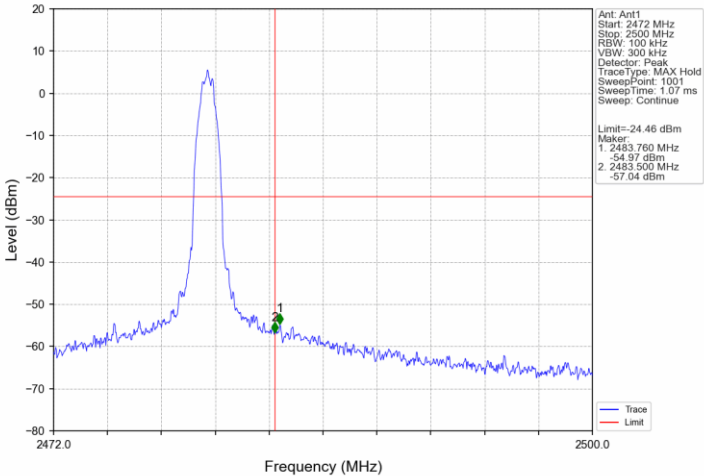

2M_LCH_2402MHz_Ant1_NTNV

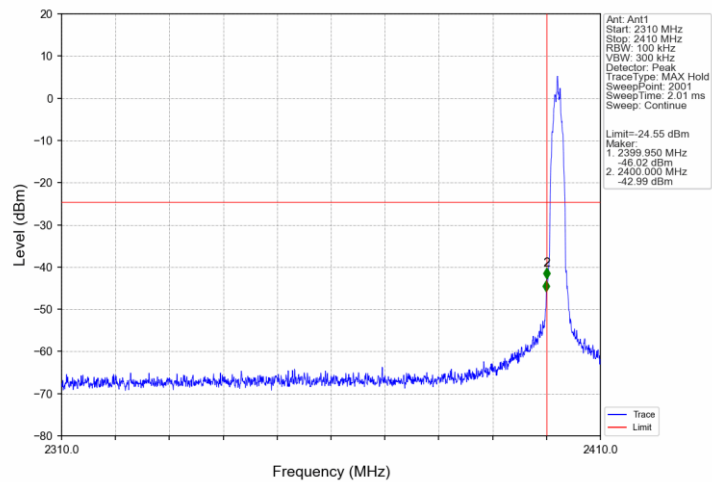

2M_HCH_2480MHz_Ant1_NTNV

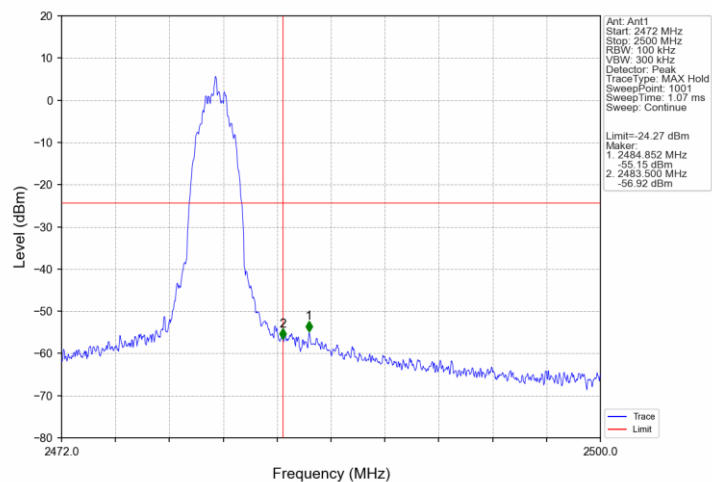

9.7 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW = $[3 \times \text{RBW}]$.

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty

cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

RSS-Gen section 8.9 General field strength limits at frequencies below 30 MHz:

Frequency MHz	Magnetic field strength (H-Field) (μA/m)	Measurement distance
	μV/m	meters
0.009-0.490	6.37/F (F in kHz)	300
0.490-1.705	63.7/F (F in kHz)	30
1.705-30	0.08	30

When the limit is in terms of magnetic field, the following equation applies:

$$H[\text{dB}(\mu\text{A/m})] = V[\text{dB}(\mu\text{V})] + L_c [\text{dB}] - \text{GPA} [\text{dB}] + \text{AFE} [\text{dB(m-1)}] - 51.5 [\text{dB}\Omega]$$

When the limit is in terms of electric field, the following equation applies:

$$E[\text{dB}(\mu\text{V/m})] = V[\text{dB}(\mu\text{V})] + L_c [\text{dB}] - \text{GPA} [\text{dB}] + \text{AFE} [\text{dB(m-1)}]$$

The magnetic field limit is converted to the electric field limit by the equation:

$$E_{\text{limit}}[\text{dB}(\mu\text{V/m})] = H_{\text{limit}} [\text{dB}(\mu\text{A/m})] + 51.5 [\text{dB}\Omega]$$

where

H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer.

L_c is the cable loss.

GPA is the gain of the preamplifier (if used), and AFH is the magnetic antenna factor.

FCC&ISED general limit:

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3\text{m(dB}\mu\text{V/m)} = \text{Limit } 300\text{m(dB}\mu\text{V/m)} + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)

Note 2: Limit $3\text{m(dB}\mu\text{V/m)} = \text{Limit } 30\text{m(dB}\mu\text{V/m)} + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Spurious radiated emissions for transmitter

Only the worst case (BLE_2Mbps) test result is listed in the report.


Transmitting spurious emission test result as below:

BLE_2Mbps_2402_(9kHz-30MHz)

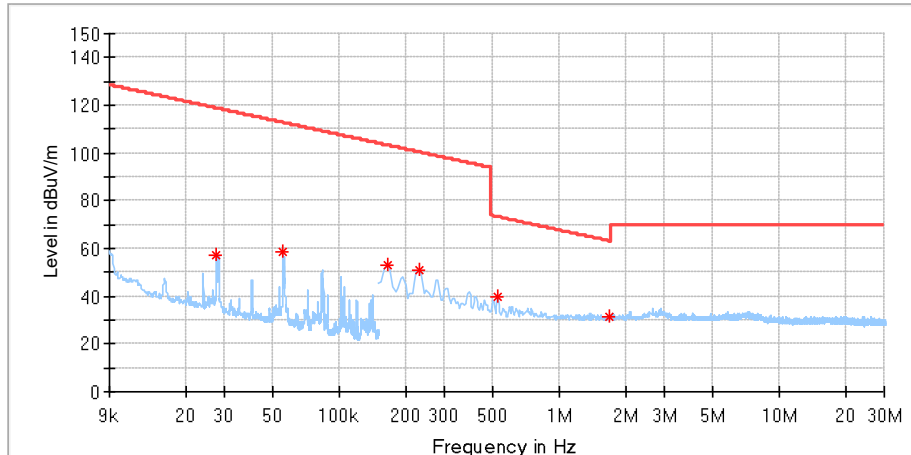

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027706	57.14	118.74	61.60	H	147.0	19.88
0.055624	58.53	112.69	54.16	H	169.0	19.92
0.164925	53.26	103.25	50.00	H	63.0	19.89
0.229600	50.70	100.38	49.68	H	151.0	19.88
0.523125	40.04	73.23	33.19	H	131.0	19.89
1.682300	31.70	63.12	31.41	H	5.0	20.02

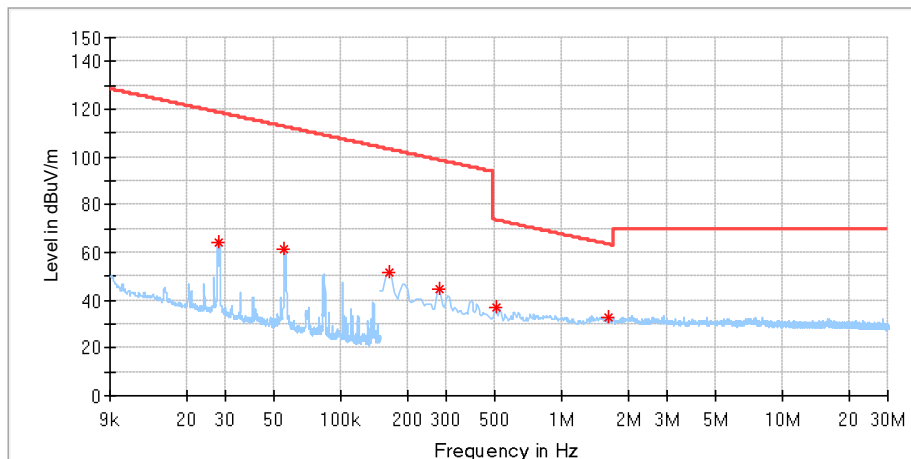

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.028176	63.97	118.59	54.62	V	351.0	19.88
0.055530	61.54	112.70	51.16	V	176.0	19.92
0.164925	51.82	103.25	51.44	V	122.0	19.89
0.279350	44.89	98.68	53.78	V	230.0	19.90
0.503225	36.67	73.57	36.90	V	152.0	19.89
1.632550	32.97	63.38	30.40	V	308.0	20.01

BLE_2Mbps_2402_(30MHz-1GHz)

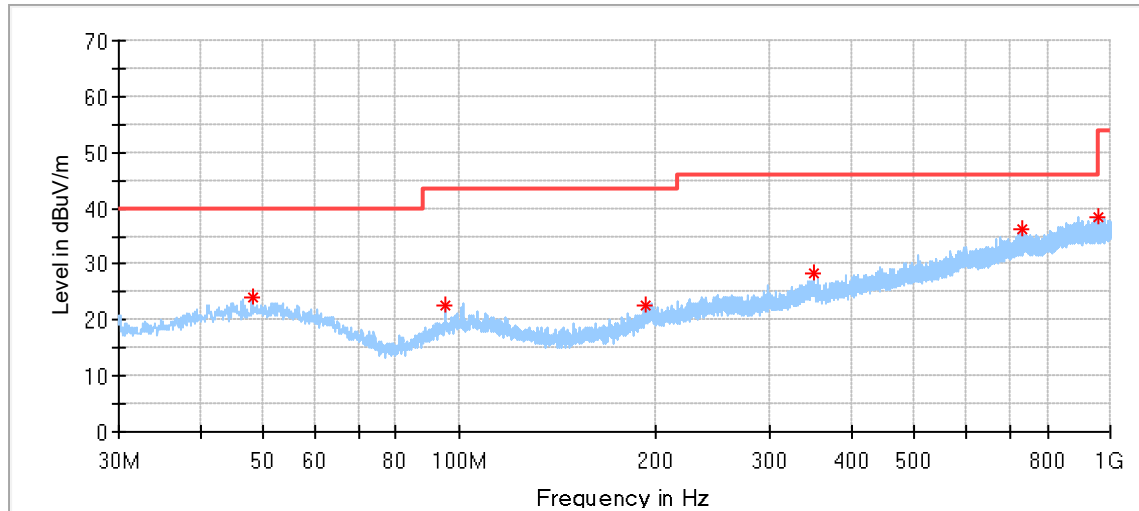

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.052778	24.22	40.00	15.78	200.0	H	46.0	18.21
95.259444	22.63	43.50	20.87	200.0	H	1.0	15.07
193.067778	22.58	43.50	20.92	200.0	H	230.0	15.77
350.153889	28.23	46.00	17.77	200.0	H	308.0	20.32
731.956667	36.19	46.00	9.81	200.0	H	56.0	27.23
955.703333	38.42	46.00	7.58	200.0	H	338.0	29.72

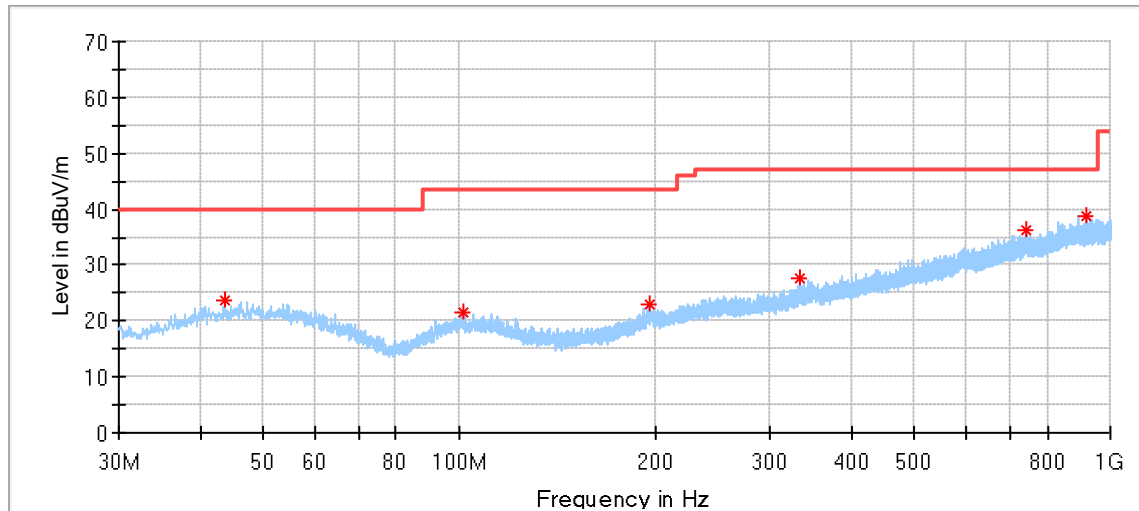

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.580000	23.83	40.00	16.17	100.0	V	147.0	17.80
101.780000	21.45	43.50	22.05	100.0	V	189.0	15.68
195.438889	23.04	43.50	20.46	100.0	V	199.0	16.27
334.580000	27.69	47.00	19.31	100.0	V	105.0	19.66
743.596667	36.27	47.00	10.73	100.0	V	157.0	27.81
917.603889	38.72	47.00	8.28	100.0	V	157.0	29.70

BLE_2Mbps_2402_(1GHz -18GHz)

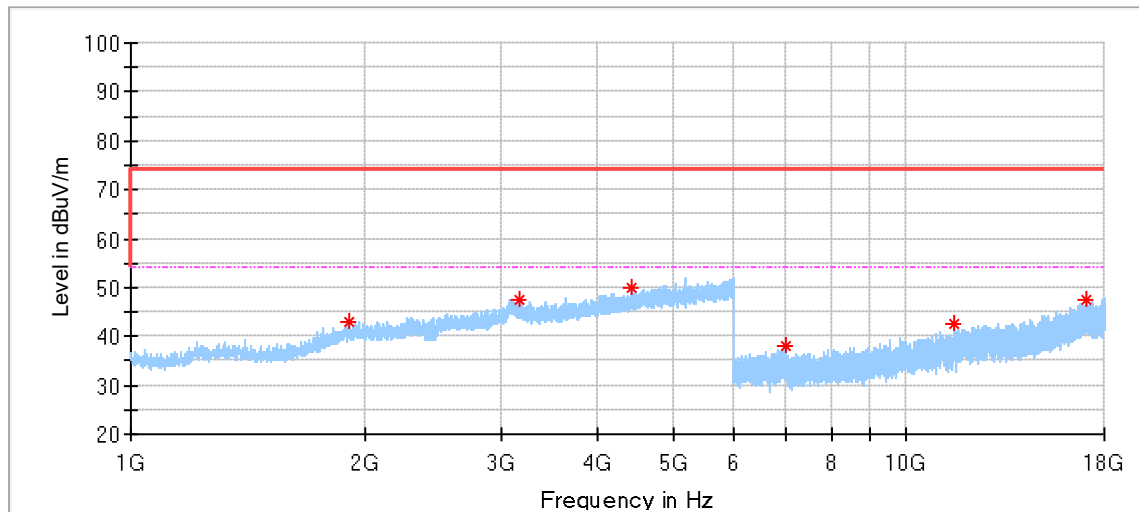

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1907.500000	43.14	74.00	30.86	150.0	H	87.0	-3.15
3171.500000	47.58	74.00	26.42	150.0	H	243.0	1.46
4412.000000	49.89	74.00	24.11	150.0	H	51.0	4.26
6999.500000	38.08	74.00	35.92	150.0	H	108.0	9.20
11512.000000	42.73	74.00	31.27	150.0	H	304.0	15.25
17016.000000	47.67	74.00	26.33	150.0	H	84.0	24.52

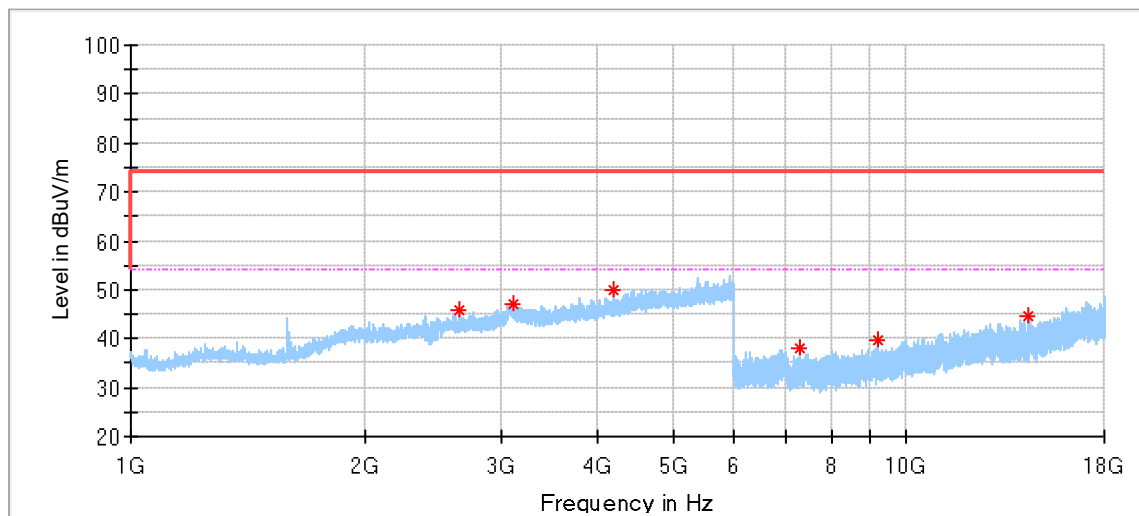

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2657.000000	45.93	74.00	28.07	150.0	V	281.0	-0.73
3112.000000	47.22	74.00	26.78	150.0	V	38.0	2.39
4197.000000	49.89	74.00	24.11	150.0	V	186.0	3.41
7295.000000	38.12	74.00	35.88	150.0	V	130.0	9.44
9214.500000	39.79	74.00	34.21	150.0	V	279.0	12.05
14363.500000	44.50	74.00	29.50	150.0	V	181.0	17.22

BLE_2Mbps_2402_(18GHz -40GHz)

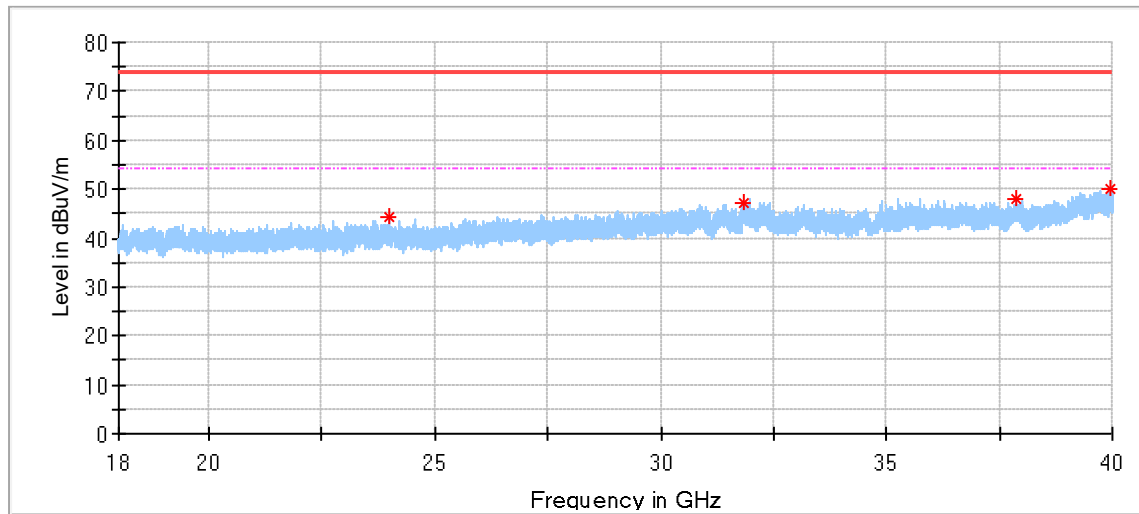

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24007.375000	44.13	74.00	29.87	150.0	H	207.0	0.69
31847.625000	47.18	74.00	26.82	150.0	H	114.0	2.33
37860.500000	47.99	74.00	26.01	150.0	H	260.0	2.88
39964.250000	49.98	74.00	24.02	150.0	H	0.0	7.33

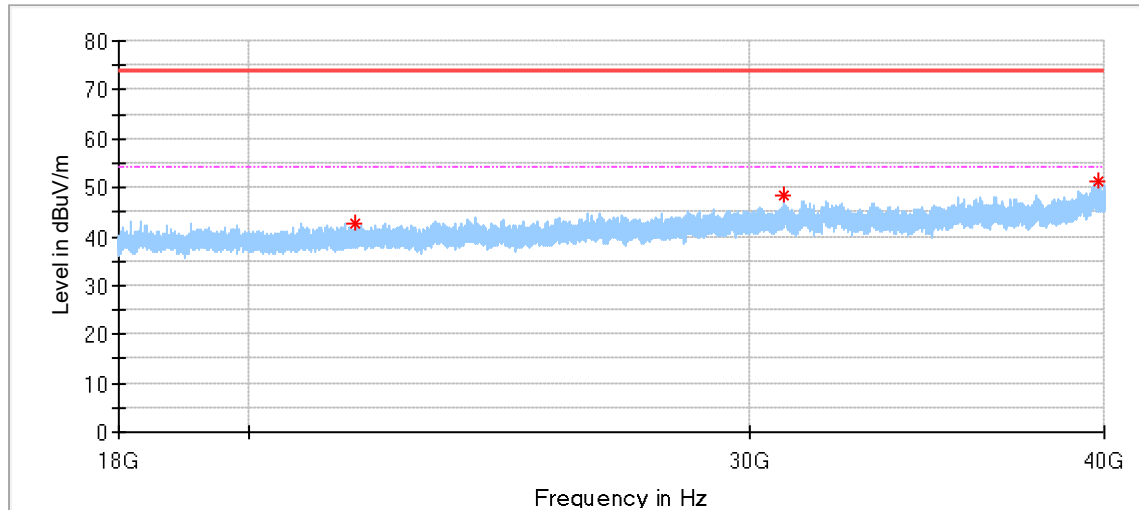

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21810.812500	42.86	74.00	31.14	150.0	V	0.0	-0.83
30831.500000	48.26	74.00	25.74	150.0	V	211.0	2.01
39806.125000	51.15	74.00	22.85	150.0	V	344.0	6.83

BLE_2Mbps_2440_(1GHz -18GHz)

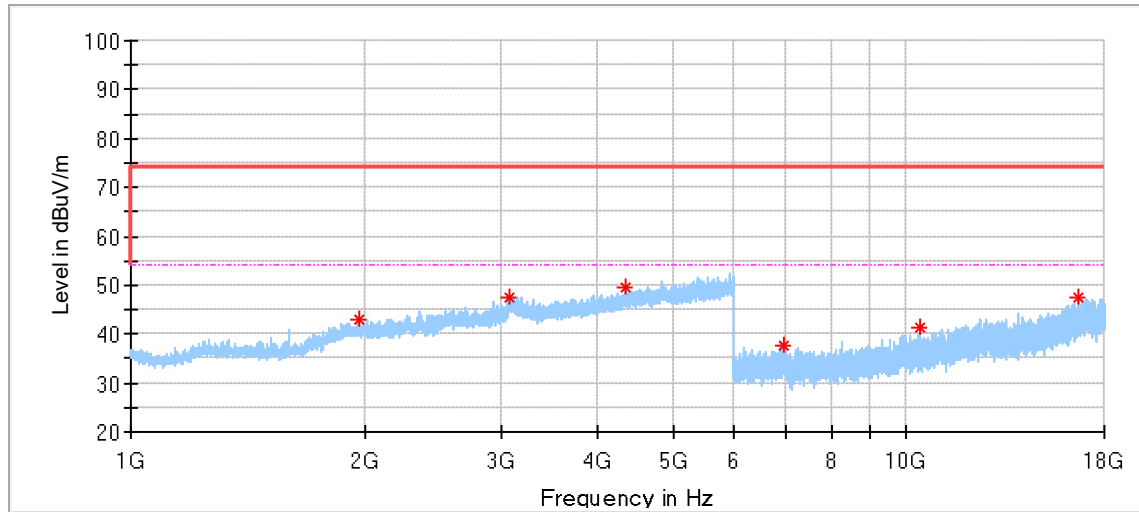

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1967.500000	43.11	74.00	30.89	150.0	H	0.0	-2.57
3084.500000	47.47	74.00	26.53	150.0	H	207.0	2.36
4335.500000	49.66	74.00	24.34	150.0	H	0.0	4.14
6932.500000	37.60	74.00	36.40	150.0	H	230.0	9.52
10401.500000	41.22	74.00	32.78	150.0	H	255.0	13.36
16628.500000	47.56	74.00	26.44	150.0	H	157.0	23.23

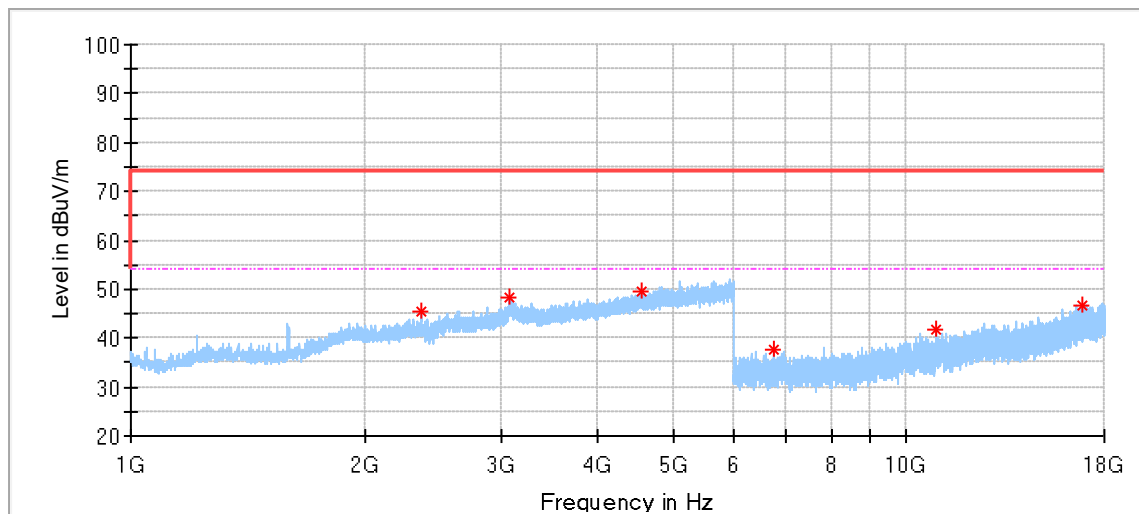

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2372.500000	45.40	74.00	28.60	150.0	V	65.0	-1.71
3081.000000	48.30	74.00	25.70	150.0	V	65.0	2.27
4569.000000	49.70	74.00	24.30	150.0	V	53.0	5.09
6752.500000	37.54	74.00	36.46	150.0	V	11.0	8.68
10908.500000	41.92	74.00	32.08	150.0	V	230.0	13.75
16882.000000	46.66	74.00	27.34	150.0	V	59.0	23.86

BLE_2Mbps_2440_(18GHz -40GHz)

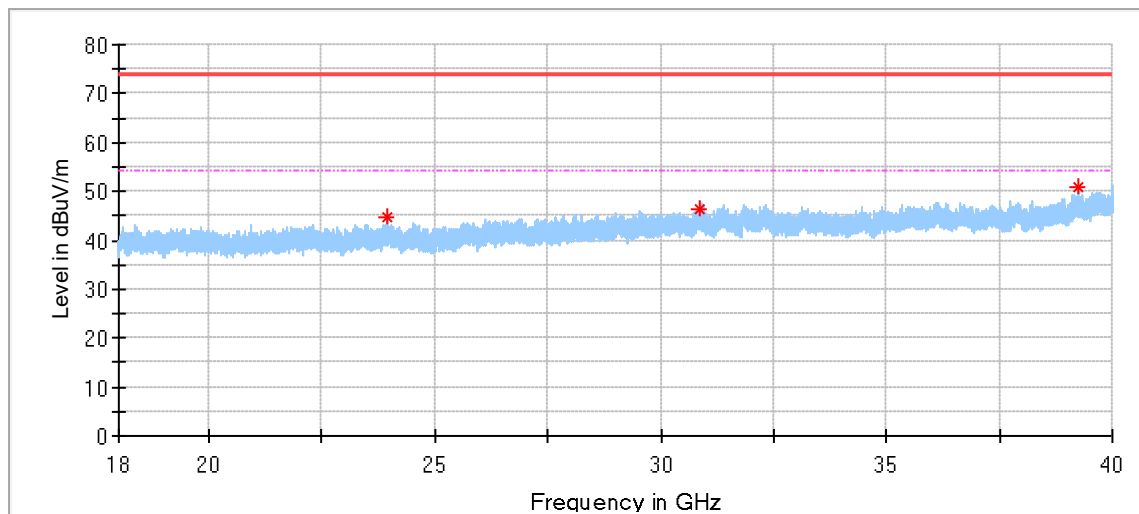

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23954.437500	44.57	74.00	29.43	150.0	H	304.0	0.68
30852.812500	46.46	74.00	27.54	150.0	H	277.0	2.01
39264.375000	50.91	74.00	23.09	150.0	H	30.0	5.28

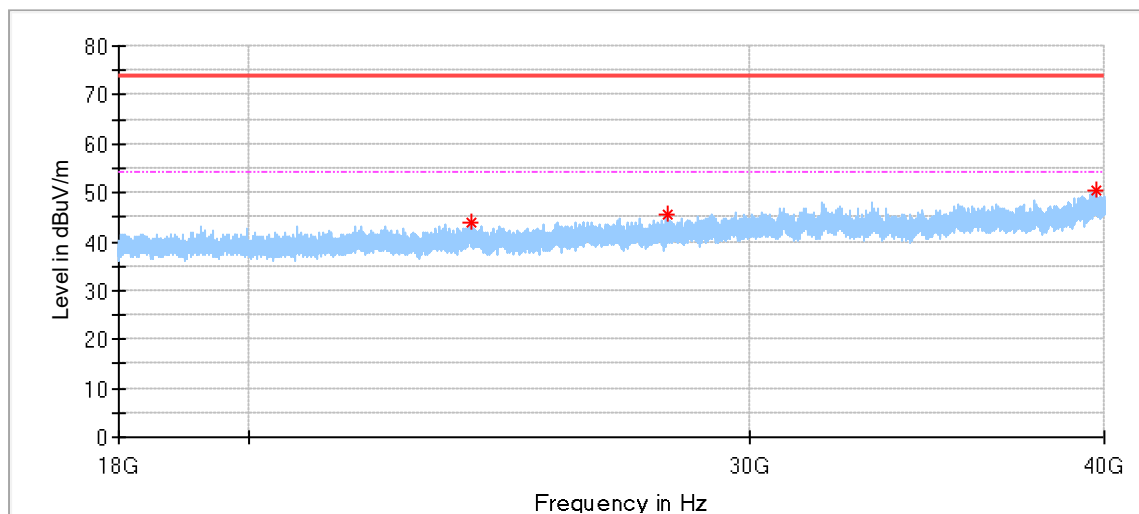

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23935.875000	43.86	74.00	30.14	150.0	V	315.0	0.67
28065.687500	45.68	74.00	28.32	150.0	V	0.0	1.94
39762.812500	50.32	74.00	23.68	150.0	V	19.0	6.67

BLE_2Mbps_2480_(1GHz -18GHz)

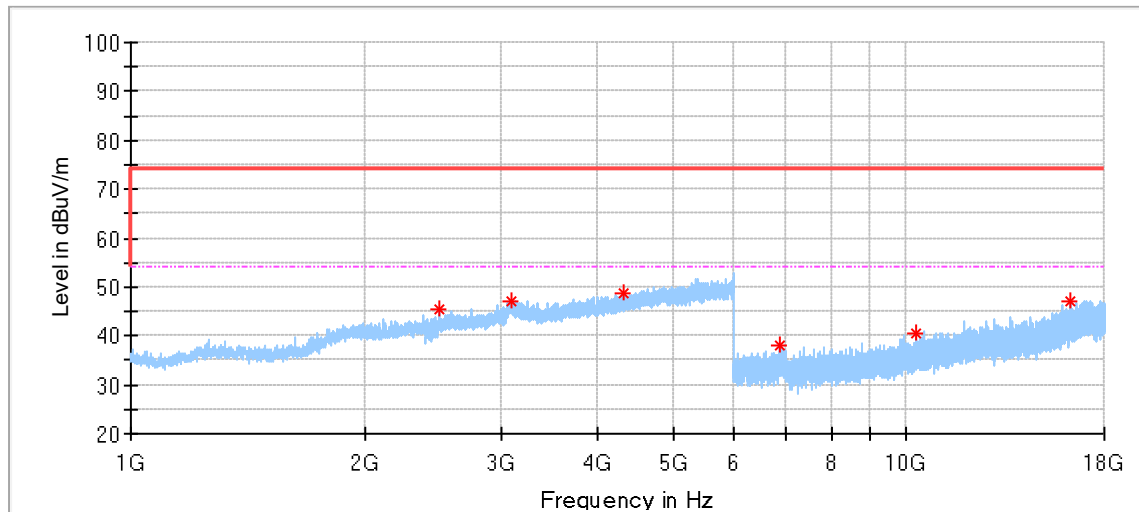

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2493.500000	45.36	74.00	28.64	150.0	H	41.0	-0.92
3091.000000	47.15	74.00	26.85	150.0	H	0.0	2.53
4321.000000	48.65	74.00	25.35	150.0	H	41.0	4.17
6875.500000	38.07	74.00	35.93	150.0	H	202.0	9.37
10262.500000	40.68	74.00	33.32	150.0	H	80.0	13.47
16274.500000	47.25	74.00	26.75	150.0	H	253.0	21.77

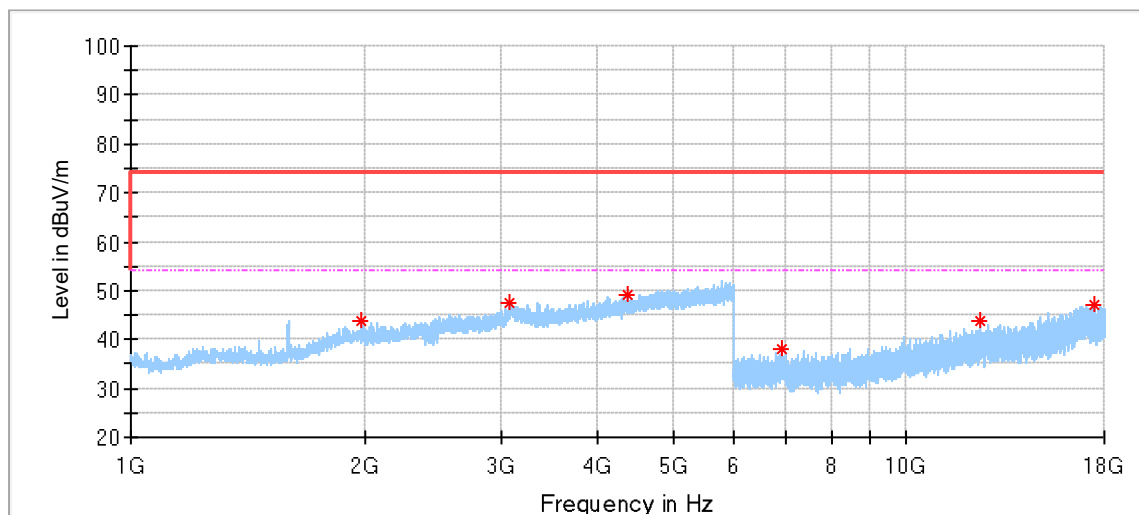

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1979.000000	43.80	74.00	30.20	150.0	V	39.0	-2.54
3081.000000	47.58	74.00	26.42	150.0	V	99.0	2.27
4362.000000	48.99	74.00	25.01	150.0	V	0.0	4.09
6910.500000	37.94	74.00	36.06	150.0	V	356.0	9.47
12423.000000	43.74	74.00	30.26	150.0	V	157.0	16.33
17494.000000	47.07	74.00	26.93	150.0	V	279.0	24.51

BLE_2Mbps_2480_(18GHz -40GHz)

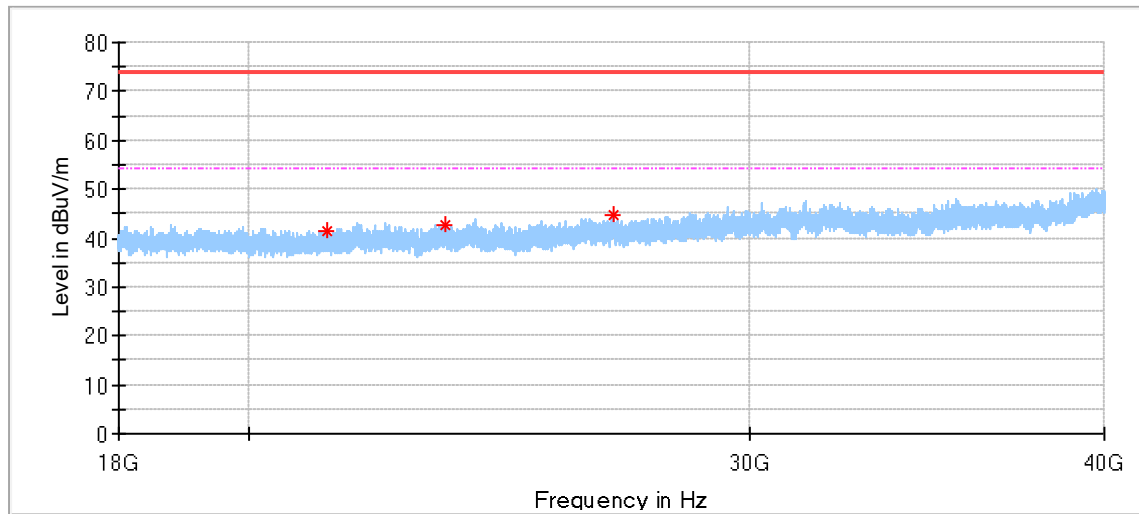

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
21315.812500	41.50758	74	32.492	150	H	177	-1.56	---
23462.187500	42.99369	74	31.006	150	H	320	0.25	---
26870.812500	44.97319	74	29.026	150	H	248	1.93	---

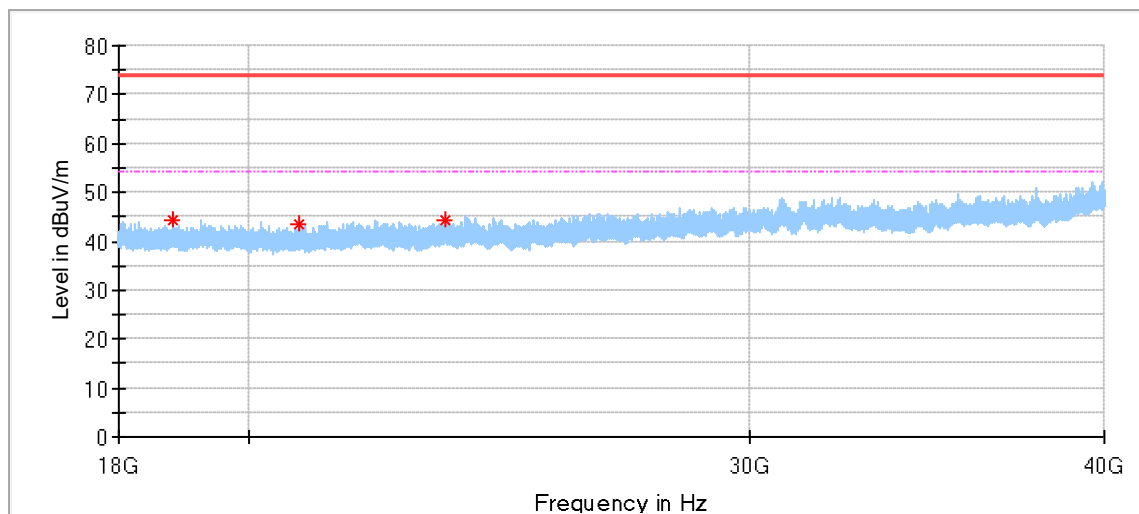


Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
18806.437500	44.5	74	29.5	150	V	281	-4.43	---
20835.250000	43.6	74	30.4	150	V	320	-2.08	---
23461.500000	44.3	74	29.7	150	V	270	0.25	---


Restricted-band band-edge

BLE_1Mbps_2402

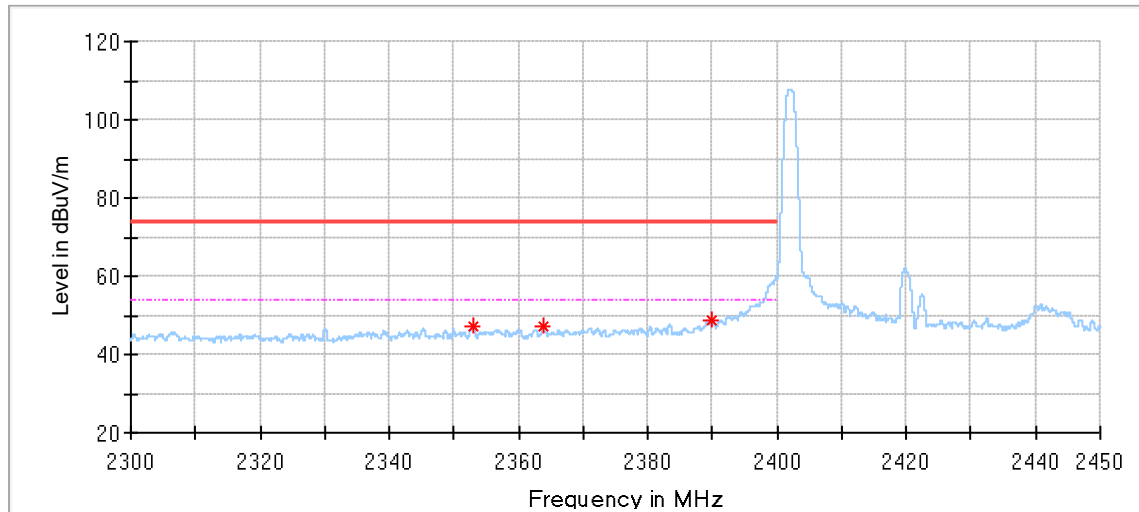

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.935000	46.97	74.00	27.03	150.0	H	342.0	-2.43
2363.915000	47.40	74.00	26.60	150.0	H	342.0	-2.30
2390.015000	48.82	74.00	25.18	150.0	H	342.0	-1.92

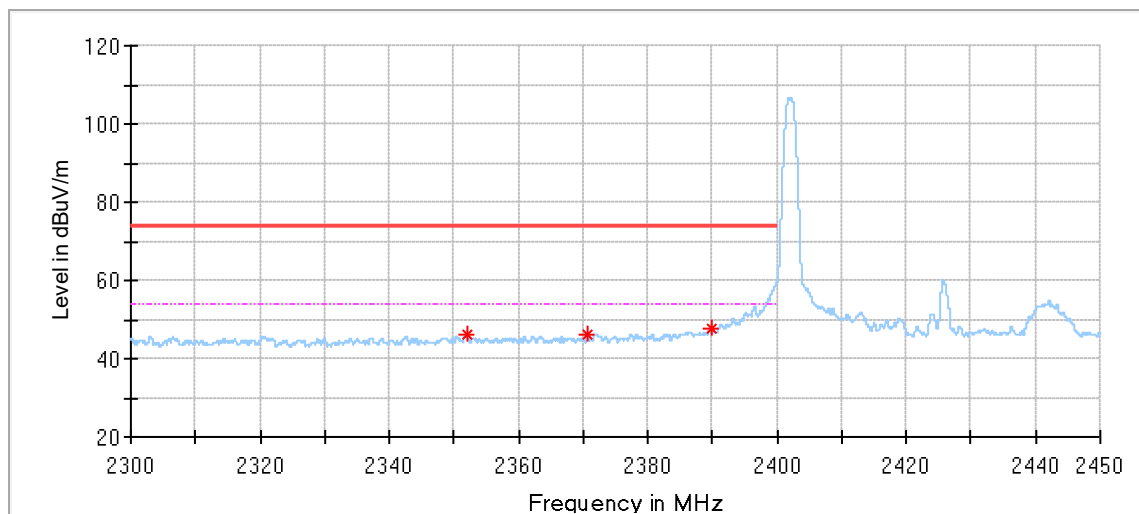

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.960000	46.09	74.00	27.91	150.0	V	108.0	-2.43
2370.695000	46.17	74.00	27.83	150.0	V	96.0	-2.21
2390.015000	47.46	74.00	26.54	150.0	V	145.0	-1.92

BLE_1Mbps_2480

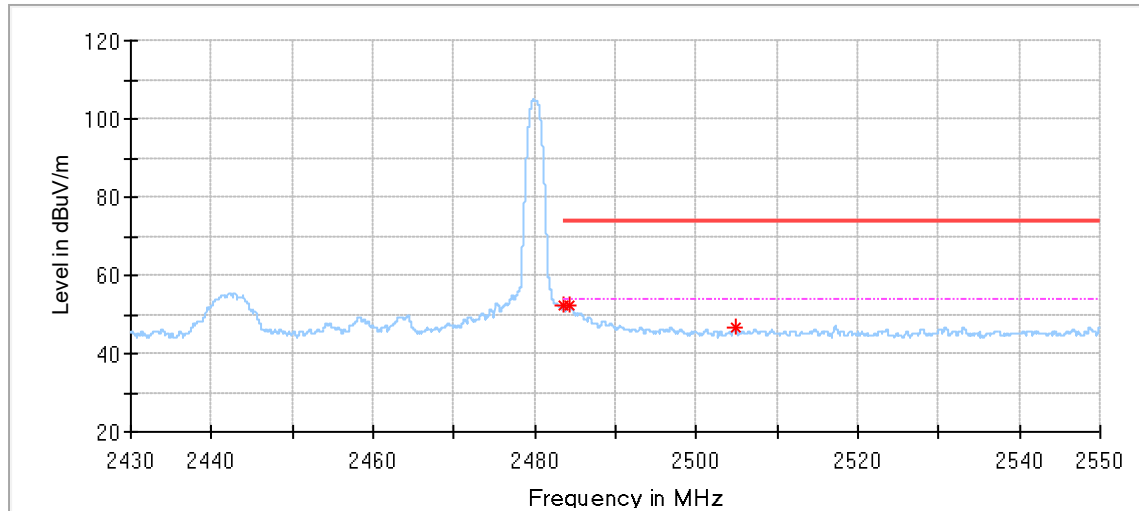

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.532000	52.05	74.00	21.95	150.0	H	337.0	-1.45
2484.216000	52.20	74.00	21.80	150.0	H	337.0	-1.45
2504.796000	46.45	74.00	27.55	150.0	H	204.0	-1.47

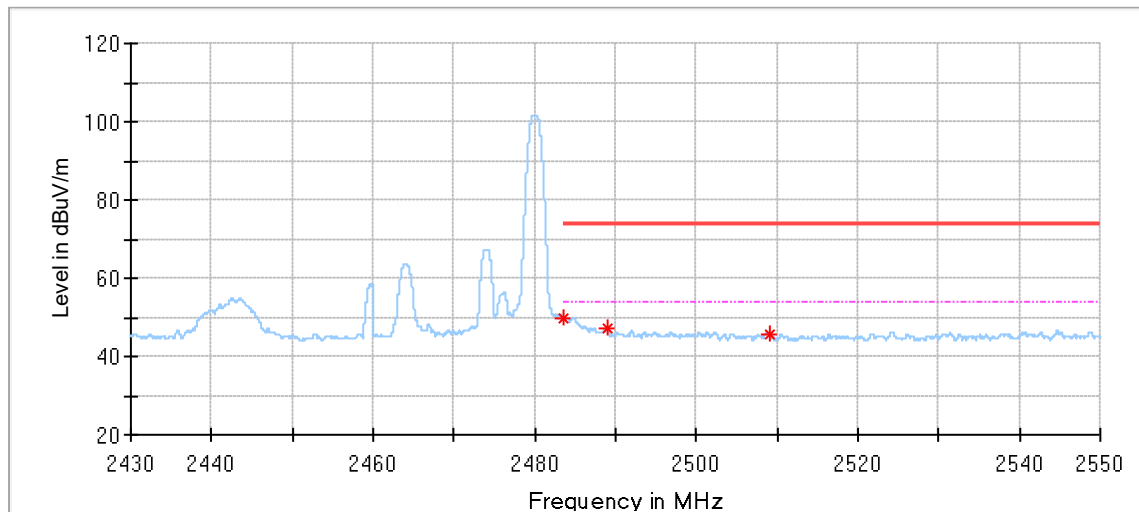

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.604000	49.99	74.00	24.01	150.0	V	106.0	-1.45
2489.016000	47.07	74.00	26.93	150.0	V	106.0	-1.46
2509.032000	45.80	74.00	28.20	150.0	V	106.0	-1.46

BLE_2Mbps_2402

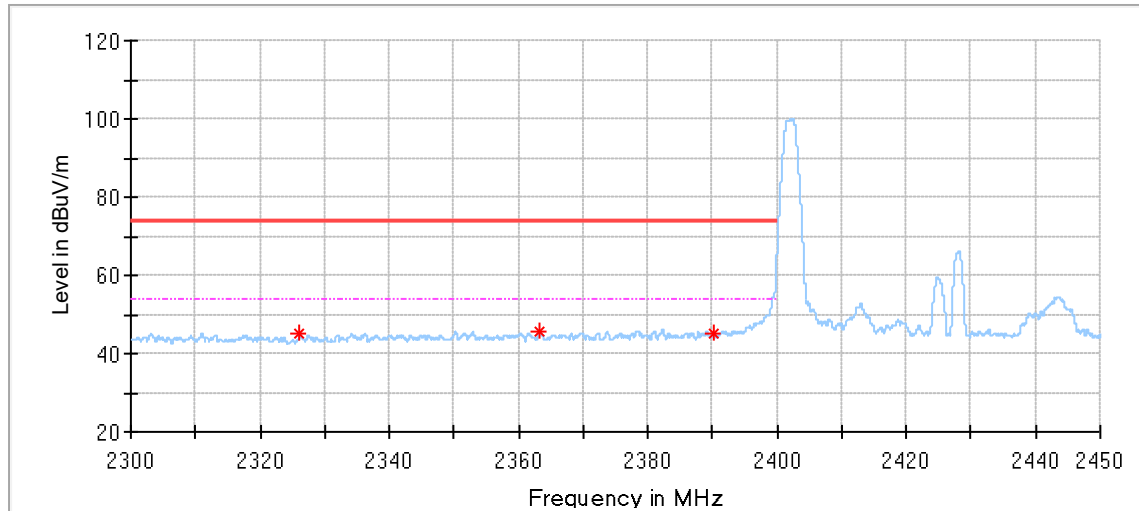

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2326.160000	44.93	74.00	29.07	150.0	H	96.0	-2.31
2363.180000	45.54	74.00	28.46	150.0	H	121.0	-2.31
2390.180000	45.23	74.00	28.77	150.0	H	217.0	-1.92

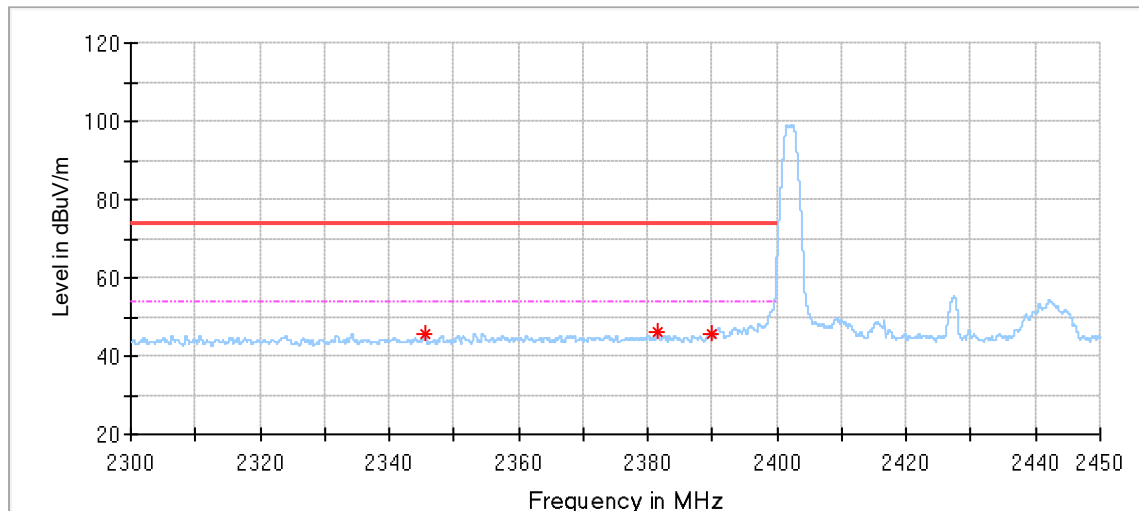

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2345.420000	45.59	74.00	28.41	150.0	V	106.0	-2.41
2381.525000	46.36	74.00	27.64	150.0	V	354.0	-2.06
2390.000000	45.47	74.00	28.53	150.0	V	354.0	-1.92

BLE_2Mbps_2480

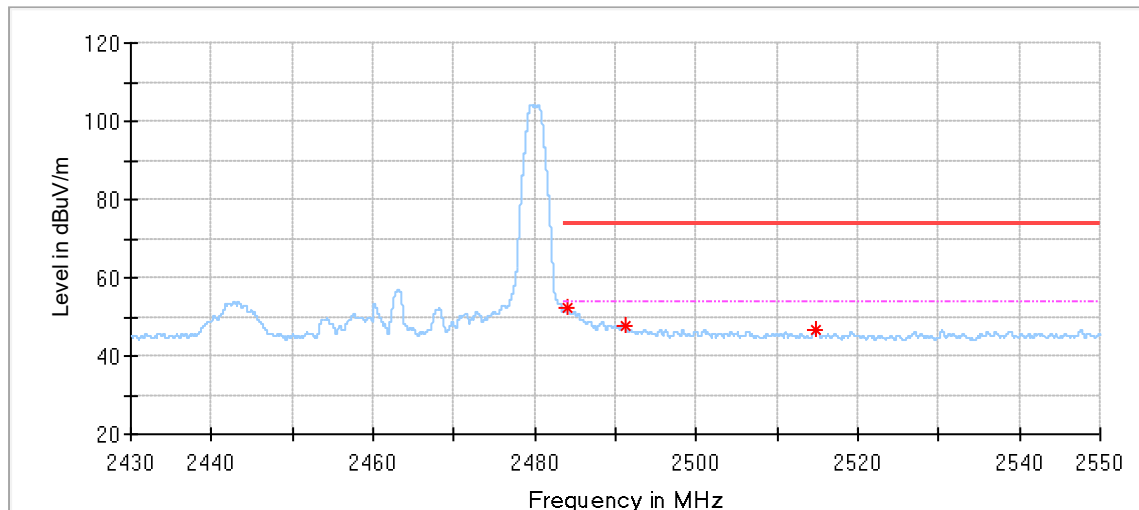

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.988000	52.43	74.00	21.57	150.0	H	337.0	-1.45
2491.188000	47.74	74.00	26.26	150.0	H	311.0	-1.47
2514.852000	46.80	74.00	27.20	150.0	H	299.0	-1.44

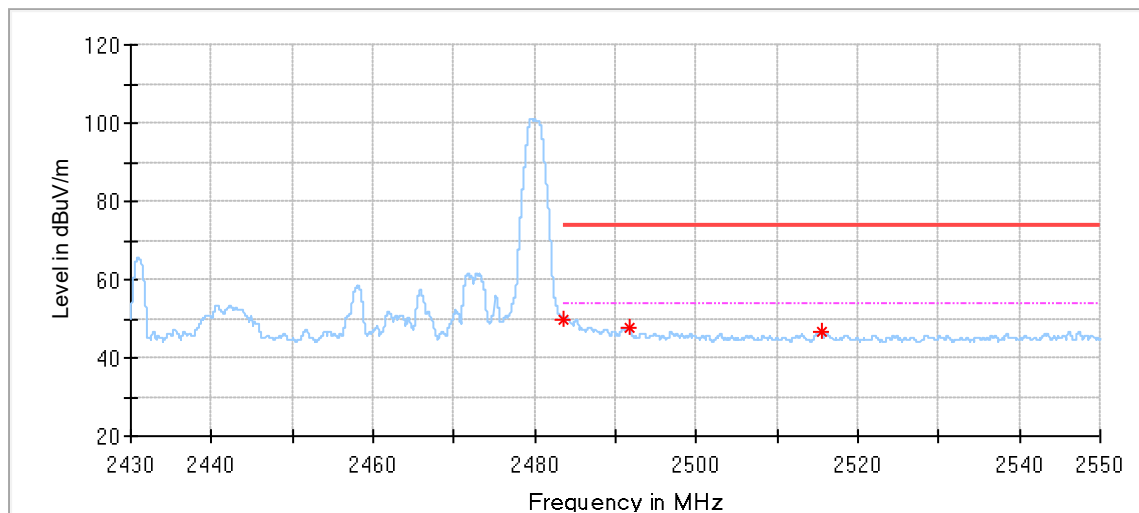

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.508000	49.72	74.00	24.28	150.0	V	119.0	-1.45
2491.776000	47.50	74.00	26.50	150.0	V	119.0	-1.47
2515.440000	46.64	74.00	27.36	150.0	V	82.0	-1.44

Remark:

- (1) Level= Reading Level + Correction Factor
- (2) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Conducted Emission 2# Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-14-001	101782	1	2026-4-25
LISN	Rohde & Schwarz	ENV432	68-4-87-16-001	101318	1	2026-4-25
LISN	Rohde & Schwarz	ENV4200	68-4-87-14-001	100249	1	2026-4-25
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2026-4-19
Cable	OUQIAO	RG142	68-4-90-19-005-A20	----	----	----
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

Radiated Emission Test (9kHz-30MHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2026-4-25
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2026-7-17
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (30MHz-1GHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2026-4-25
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	68-4-80-14-002	707	1	2026-6-10
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-001	15542	1	2026-4-19
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A20	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (1GHz-40G) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2026-4-25
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2026-3-10
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2026-6-19
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2026-4-19
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-003	100747	1	2026-4-19
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2025-7-17
Cable	OUQIAO	18DLB5-NMMN-7000	68-4-90-19-006-A22	----	----	----
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2026-4-18
RF Meas. and Switch Matrix Unit	TST PASS	TSCB3023R2	68-4-93-23-001	2811685c	1	2026-4-18
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A21	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A22	----	----	----
Test software	TST PASS	TST PASS	68-4-93-23-001-A03	Version 2.0	N/A	N/A
Test software	Tonscend	JS1120-3	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission in new shielding room (68-4-90-19-005) 150kHz-30MHz (for test using AMN ENV216)	3.15dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001)9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001)30MHz-1000MHz	Horizontal: 4.63dB; Vertical: 4.78dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006)1000MHz-18000MHz	Horizontal: 5.38dB; Vertical: 5.38dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 18GHz-40GHz	Horizontal: 5.29dB; Vertical: 5.29dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4

---THE END OF REPORT---