



Test Report No.:  
**FCC2022-0012-RF2**

# RF Test Report

**EUT** : WIFI Module

**MODEL** : WF-U21DS-SSA1,WF-U21DS-SSA2

**BRAND NAME** : N/A

**CLIENT** : Sichuan AI-Link Technology Co.,Ltd.

**Classification Of Test** : N/A

**CVC Testing Technology Co., Ltd.**



# CVC Testing Technology Co., Ltd.

Test Report No.:FCC2022-0012-RF2

Page 2 of 92

<b>Client</b>		Name : Sichuan AI-Link Technology Co.,Ltd. Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C	
<b>Manufacturer</b>		Name : Sichuan AI-Link Technology Co.,Ltd. Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C	
<b>Equipment Under Test</b>		Name : WIFI Module Model/Type: WF-U21DS-SSA1,WF-U21DS-SSA2 Trade mark : N/A Serial NO.:N/A Sample NO.:2-1,2-2	
Date of Receipt.	2022.02.21	Date of Testing	2022.02.21~2022.08.17
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247		PASS	
<b>Evaluation of Test Result</b>		The equipment under test was found to comply with the requirements of the standards applied.	
		Issue Date: 2022.08.22	
Tested by:   Xu ZhenFei Name      Signature	Reviewed by:   Liu YongHai Name      Signature	Approved by:   Chen HuaWen Name      Signature	
<b>Other Aspects:</b> NONE.			
Abbreviations:OK, Pass= passed      Fail = failed      N/A= not applicable      EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



## TABLE OF CONTENTS

<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS .....	7
1.2 MEASUREMENT UNCERTAINTY .....	8
1.3 TEST LOCATION .....	8
<b>2 GENERAL INFORMATION .....</b>	<b>9</b>
2.1 GENERAL PRODUCT INFORMATION .....	9
2.2 OTHER INFORMATION .....	10
2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	11
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	13
2.5 DESCRIPTION OF SUPPORT UNITS .....	13
<b>3 TEST TYPES AND RESULTS.....</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	14
3.1.1 <i>Limit</i> .....	14
3.1.2 <i>Measurement procedure</i> .....	14
3.1.3 <i>Test setup</i> .....	14
3.1.4 <i>Test results</i> .....	15
3.2 RADIATED EMISSIONS .....	17
3.2.1 <i>Limits</i> .....	17
3.2.2 <i>Measurement procedure</i> .....	17
3.2.3 <i>Test setup</i> .....	19
3.2.4 <i>Test results</i> .....	21
3.3 NUMBER OF HOPPING FREQUENCY USED .....	43
3.3.1 <i>Limits</i> .....	43
3.3.2 <i>Measurement procedure</i> .....	43
3.3.3 <i>Test setup</i> .....	43
3.3.4 <i>Test result</i> .....	43
3.4 DWELL TIME ON EACH CHANNEL .....	44
3.4.1 <i>Limits</i> .....	44
3.4.2 <i>Measurement procedure</i> .....	44
3.4.3 <i>Test setup</i> .....	44
3.4.4 <i>Test result</i> .....	44
3.5 20dB EMISSION BANDWIDTH .....	45
3.5.1 <i>Limits</i> .....	45
3.5.2 <i>Measurement procedure</i> .....	45
3.5.3 <i>Test setup</i> .....	45
3.5.4 <i>Test result</i> .....	45
3.6 HOPPING CHANNEL SEPARATION .....	46
3.6.1 <i>Limits</i> .....	46
3.6.2 <i>Measurement procedure</i> .....	46
3.6.3 <i>Test setup</i> .....	46
3.6.4 <i>Test result</i> .....	46
3.7 CONDUCTED OUTPUT POWER .....	47
3.7.1 <i>Limits(FCC)</i> .....	47
3.7.2 <i>Limits(IC)</i> .....	47
3.7.3 <i>Measurement procedure</i> .....	47
3.7.4 <i>Test setup</i> .....	47
3.7.5 <i>Test result</i> .....	47
3.8 OUT OF BAND EMISSION MEASUREMENT .....	48
3.8.1 <i>Limits</i> .....	48
3.8.2 <i>Measurement procedure</i> .....	48



3.8.3 <i>Test setup</i> .....	48
3.8.4 <i>Test result</i> .....	48
3.9 OCCUPIED BANDWIDTH MEASUREMENT.....	49
3.9.1 <i>Measurement procedure</i> .....	49
3.9.2 <i>TEST SETUP</i> .....	49
3.9.3 <i>Test result</i> .....	49
<b>4 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>50</b>
<b>5 PHOTOGRAPHS OF THE EUT .....</b>	<b>51</b>
<b>6 APPENDIX A .....</b>	<b>52</b>
6.1 20dB EMISSION BANDWIDTH .....	52
6.1.1 <i>Test Result</i> .....	52
6.1.2 <i>Test Graphs</i> .....	53
6.2 CONDUCTED OUTPUT POWER.....	57
6.2.1 <i>Test Result Peak</i> .....	57
6.3 HOPPING CHANNEL SEPARATION .....	58
6.3.1 <i>Test Result</i> .....	58
6.3.2 <i>Test Graphs</i> .....	59
6.4 DELL TIME OF EACH CHANNEL .....	61
6.4.1 <i>Test Result</i> .....	61
6.4.1 <i>Test Graphs</i> .....	62
6.5 NUMBER OF HOPPING CHANNELS .....	66
6.5.1 <i>Test Result</i> .....	66
6.5.2 <i>Test Graphs</i> .....	67
6.6 BAND EDGE MEASUREMENTS.....	69
6.6.1 <i>Test Result</i> .....	69
6.6.2 <i>Test Graphs</i> .....	70
6.7 OUT OF BAND EMISSION MEASUREMENT .....	75
6.7.1 <i>Test Result</i> .....	75
6.7.1 <i>Test Graphs</i> .....	76
6.8 OCCUPIED CHANNEL BANDWIDTH .....	87
6.8.1 <i>Test Result</i> .....	87
6.8.2 <i>Test Graphs</i> .....	88



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2022-0012-RF2	Original release	2022.08.22



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
FCC STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Power form battery
15.247(a)(1)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)	Hopping Channel Separation	PASS	Meet the requirement of limit.
15.247(a)(1)	Dell Time of Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	20dB EMISSION BANDWIDTH	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(d), 15.209,15.205	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203 14.247(b)	Antenna Requirement	PASS	No antenna connector is used.



## 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
WIFI & Bluetooth Test System 1					/
Communication Shielded Room 1	4m*3m*3m	CRTDSWKS44301	VGDS-0699	CRT	2024/04/24
Spectrum Analyzer	FSV30	104337	DZ-000235	R&S	2022/11/03
Comprehensive Test Instrument	CMW500	137779	DZ-000220	R&S	2023/07/10
Comprehensive Test Instrument	CMW500	169888	DZ-000342	R&S	2022/12/01
LTE Comprehensive Test Instrument	E7515A	MY58010639	DZ-000173	KEYSIGHT	2023/04/07
Analog Signal Generator	SMA100B	103663	DZ-000239-2	R&S	2023/07/10
Vector Signal Generator	SMBV100B	101757	DZ-000239-1	R&S	2023/06/22
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2023/04/21
Radiation Spurious Test System					/
3m Semi-Anechoic Chamber	FACT-4	ST08035	WKNA-0024	ETS	2024/12/12
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2023/03/02
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2023/03/02
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2023/06/25
Waveguide Horn Antenna	HF906	360306/008	WKNA-0024-8	R&S	2023/03/04
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWARZBECK	2023/07/31
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2023/06/05
5G Bandstop Filters	WRCJV12-4900-5100-5900-6100-50EE	1	DZ-000186	WI	2022/12/20
Comprehensive tester	CMW500	159000	DZ-000240-2	R&S	2022/12/20
Conducted emission					/
EMI Test Receiver	ESCI	100857	WKNB-0081	R&S	2022-12-08
EMI Test Receiver	ESR3	102394	VGDY-0705	R&S	2023-03-04
LISN	NSLK 8127	8127644	VGDY-0150	SCHWARZBECK	2022-09-01
DC LISN	PVDC8301-017	PVDC8301#17	VGDY-0692	SCHWARZBECK	2022-10-09
LISN	NSLK 8129	8129-268	EM-000388	SCHWARZBECK	2023-03-03
Plus Limiter (#1)	VTSD 9561 F-N	00515	VGDY-0808	SCHWARZBECK	2023-03-04
Impedance Stabilization Network	ISN T800	27095	WKNE-0195	TESEQ	2022-09-01
Impedance Stabilization Network	NTFM8158	8158-0092	VGDY-0356	SCHWARZBECK	2023-06-07
Impedance Stabilization Network	NTFM8131	#184	EM-000498	SCHWARZBECK	2023-06-07
Voltage Probe	TK9420	9420-499	VGDY-0128	SCHWARZBECK	2023-03-04
Power Divider	4901.17.B	22643830	DB-0016	HUBER+SUHNER	2023-09-01
Video Signal Generator	GV-798+	151064920001	VGDS-0215	PROMAX	2023-05-30
Audio Signal Generator	GAG-810	EK871591	EM-000309	GW	2022-12-08
Shielding Room(#1)	GP1A	001	WKNF-0001	LEINING	2024-08-08



## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	ITEM	FREQUENCY	UNCERTAINTY
1	Conducted Emissions	9kHz~30MHz	±2.66dB
2	Radiated Spurious Emissions	9KHz ~ 30MHz	±0.769dB
		30MHz ~ 1GHz	±0.877dB
		1GHz ~ 18GHz	±0.777dB
		18GHz ~ 40GHz	±1.315dB

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

## 1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: [office@cvc.org.cn](mailto:office@cvc.org.cn)



## 2 GENERAL INFORMATION

### 2.1 GENERAL PRODUCT INFORMATION

<b>PRODUCT</b>	WIFI Module
<b>BRAND</b>	N/A
<b>MODEL</b>	WF-U21DS-SSA1
<b>ADDITIONAL MODEL</b>	WF-U21DS-SSA2
<b>FCC ID</b>	2AOIK-AL5621D
<b>POWER SUPPLY</b>	DC 3.3V
<b>MODULATION TYPE</b>	GFSK, π/4 DQPSK, 8DPSK
<b>OPERATING FREQUENCY</b>	2402MHz~2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>PEAK OUTPUT POWER</b>	13.4dBm (Max. Measured)
<b>ANTENNA TYPE (Remark 5)</b>	External Antenna, with 3.46dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

Remark:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to the report (Report NO.: FCC2022-0012-E).
4. Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
5. The EUT have SISO function, provides 1 completed transmitter and 1 receiver.



## 2.2 OTHER INFORMATION

Operation frequency each of channel.

Operation Frequency Each of Channel							
For BT (GFSK, π/4 DQPSK, 8 DPSK)							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	<b>2402</b>	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	<b>78</b>	<b>2480</b>
19	2421	<b>39</b>	<b>2441</b>	59	2461		

1. The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore only the data of the test channels were recorded in this report.
2. By means of test software which provided by manufacture, the power levels during the tests were set according to the following codes:

GFSK		π/4-DQPSK		8DPSK	
CHANNEL	POWER SETTING	CHANNEL	POWER SETTING	CHANNEL	POWER SETTING
0	DEFAULT	0	DEFAULT	0	DEFAULT
39	DEFAULT	39	DEFAULT	39	DEFAULT
78	DEFAULT	78	DEFAULT	78	DEFAULT



## 2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

The worst case was found when positioned on xaxis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RSE<1G	RSE≥1G	PLC	APCM	
A	√	√	√	√	BT LINK

Where **RSE<1G**: Radiated Emission below 1GHz.

**RSE≥1G**: Radiated Emission above 1GHz.

**PLC**: Power Line Conducted Emission.

**APCM**: Antenna Port Conducted Measurement.

### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0	FHSS	GFSK	DH5

### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0, 39, 78	FHSS	GFSK	DH5
A	0, 39, 78	FHSS	π/4 DQPSK	2DH5
A	0, 39, 78	FHSS	8DPSK	3DH5



### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	BT Link

### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0, 39, 78	FHSS	GFSK	DH5
A	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5
A	0, 39, 78	FHSS	8DPSK	3DH5

### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RSE<1G	24deg. C, 55%RH	DC 3.3V from USB host unit	Liu ShiWei
RSE≥1G	24deg. C, 55%RH	DC 3.3V from USB host unit	Liu ShiWei
PLC	24deg. C, 55%RH	DC 3.3V from USB host unit	Liu ShiWei
APCM	25deg. C, 58%RH	DC 3.3V from USB host unit	Liu ShiWei



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

**FCC PART 15, Subpart C. Section 15.247**  
**KDB 558074 D01 15.247 Meas Guidance v05r02**  
**ANSI C63.10-2020**

All test items have been performed and recorded as per the above standards

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
1	Latop	Lenovo	V14	PFNXB1628023	Lab
Support Cable					
NO	Description	Quantity (Number)	Length (m)	Detachable (Yes/ No)	Shielded (Yes/ No)
1	N/A	N/A	N/A	N/A	N/A

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 Limit


Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


##### 3.1.2 Measurement procedure

- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

##### 3.1.3 Test setup

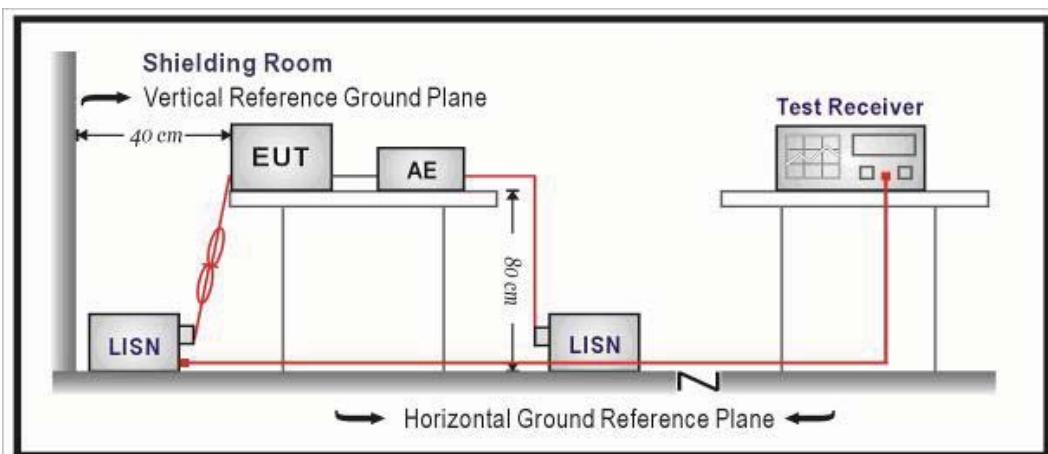

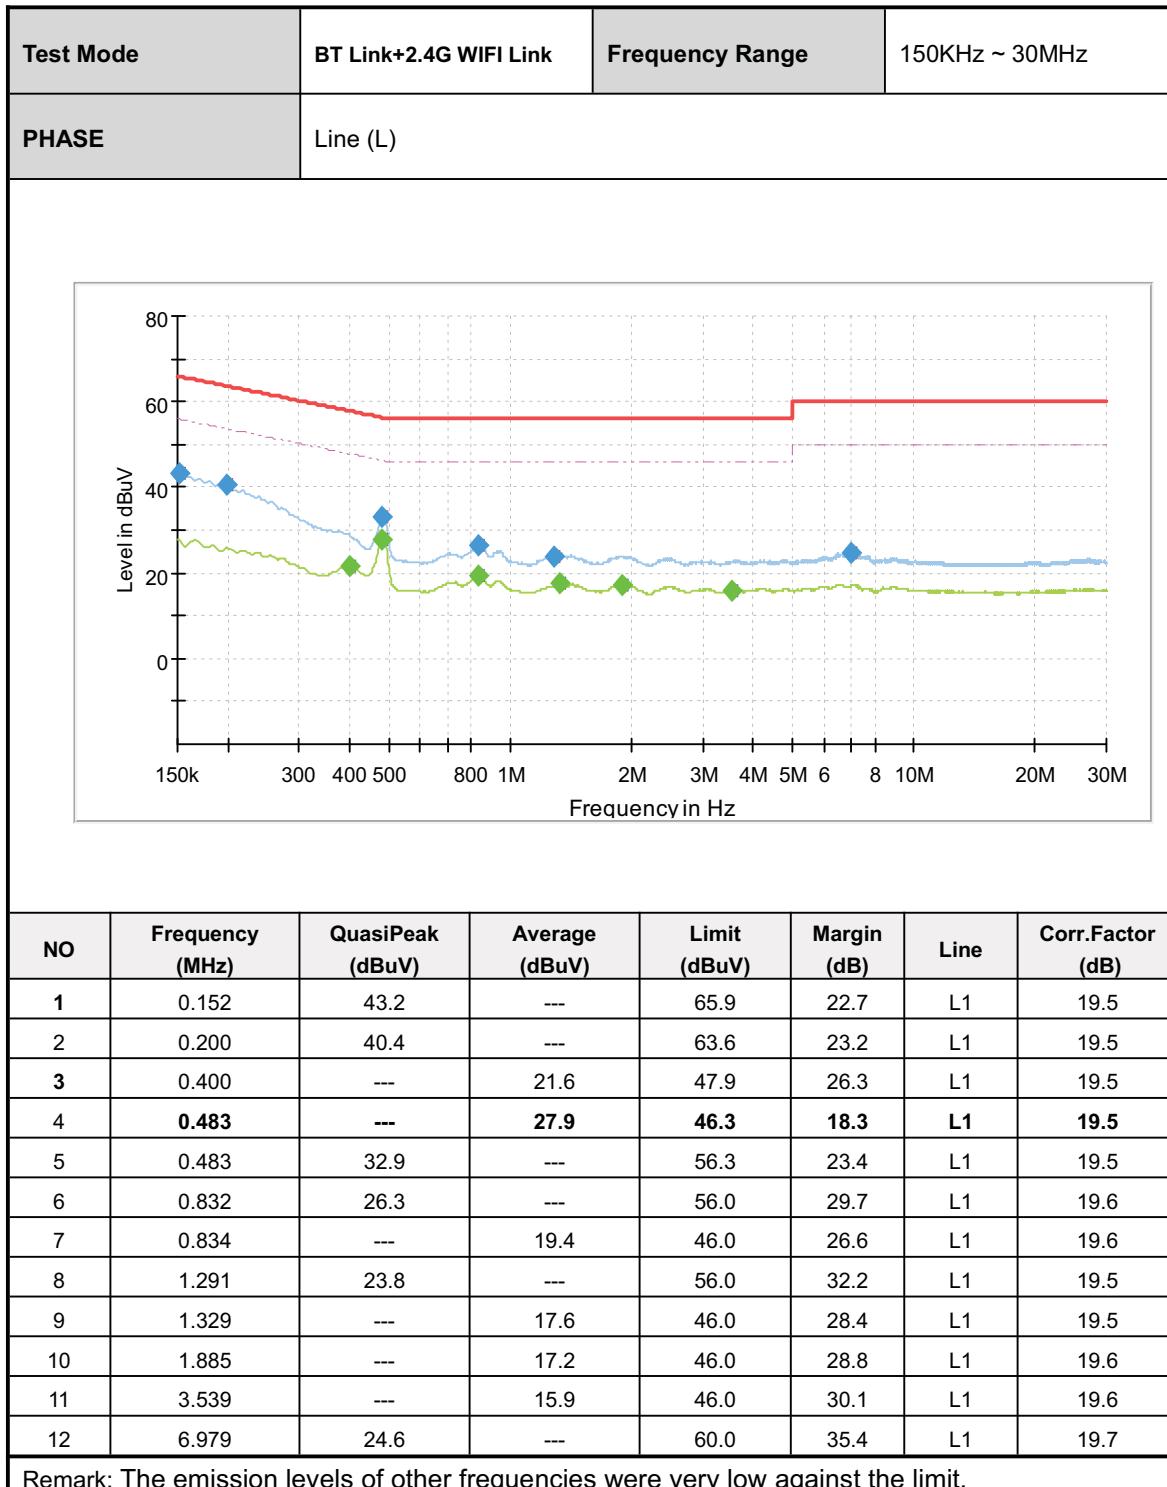**3.1.4 Test results**

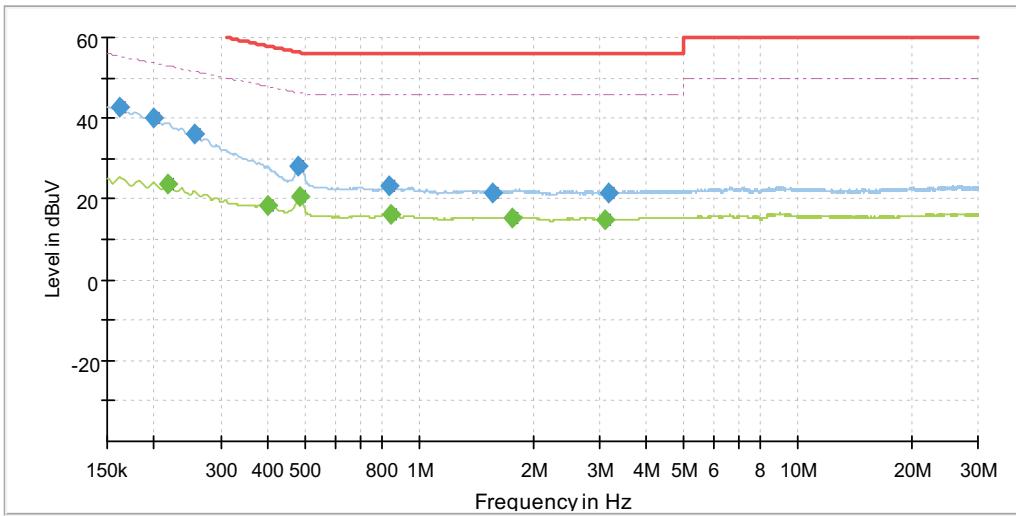Test Mode	BT Link+2.4G WIFI Link	Frequency Range	150KHz ~ 30MHz																																																																																																								
PHASE	Line (N)																																																																																																										
																																																																																																											
<table border="1"><thead><tr><th>NO</th><th>Frequency (MHz)</th><th>QuasiPeak (dBuV)</th><th>Average (dBuV)</th><th>Limit (dBuV)</th><th>Margin (dB)</th><th>Line</th><th>Corr.Factor (dB)</th></tr></thead><tbody><tr><td>1</td><td>0.161</td><td>42.6</td><td>---</td><td>65.4</td><td>22.8</td><td>N</td><td>19.5</td></tr><tr><td>2</td><td>0.200</td><td>40.2</td><td>---</td><td>63.6</td><td>23.5</td><td>N</td><td>19.5</td></tr><tr><td>3</td><td>0.218</td><td>---</td><td>23.5</td><td>52.9</td><td>29.4</td><td>N</td><td>19.5</td></tr><tr><td>4</td><td>0.256</td><td>36.0</td><td>---</td><td>61.6</td><td>25.5</td><td>N</td><td>19.6</td></tr><tr><td>5</td><td>0.400</td><td>---</td><td>18.3</td><td>47.9</td><td>29.5</td><td>N</td><td>19.6</td></tr><tr><td>6</td><td>0.479</td><td>28.3</td><td>---</td><td>56.4</td><td>28.1</td><td>N</td><td>19.6</td></tr><tr><td>7</td><td>0.485</td><td>---</td><td>20.5</td><td>46.2</td><td>25.7</td><td>N</td><td>19.6</td></tr><tr><td>8</td><td>0.836</td><td>23.4</td><td>---</td><td>56.0</td><td>32.6</td><td>N</td><td>19.6</td></tr><tr><td>9</td><td>0.841</td><td>---</td><td>16.3</td><td>46.0</td><td>29.7</td><td>N</td><td>19.6</td></tr><tr><td>10</td><td>1.561</td><td>21.7</td><td>---</td><td>56.0</td><td>34.3</td><td>N</td><td>19.6</td></tr><tr><td>11</td><td>1.754</td><td>---</td><td>15.1</td><td>46.0</td><td>30.9</td><td>N</td><td>19.6</td></tr><tr><td>12</td><td>3.104</td><td>---</td><td>14.9</td><td>46.0</td><td>31.1</td><td>N</td><td>19.6</td></tr></tbody></table>				NO	Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr.Factor (dB)	1	0.161	42.6	---	65.4	22.8	N	19.5	2	0.200	40.2	---	63.6	23.5	N	19.5	3	0.218	---	23.5	52.9	29.4	N	19.5	4	0.256	36.0	---	61.6	25.5	N	19.6	5	0.400	---	18.3	47.9	29.5	N	19.6	6	0.479	28.3	---	56.4	28.1	N	19.6	7	0.485	---	20.5	46.2	25.7	N	19.6	8	0.836	23.4	---	56.0	32.6	N	19.6	9	0.841	---	16.3	46.0	29.7	N	19.6	10	1.561	21.7	---	56.0	34.3	N	19.6	11	1.754	---	15.1	46.0	30.9	N	19.6	12	3.104	---	14.9	46.0	31.1	N	19.6
NO	Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr.Factor (dB)																																																																																																				
1	0.161	42.6	---	65.4	22.8	N	19.5																																																																																																				
2	0.200	40.2	---	63.6	23.5	N	19.5																																																																																																				
3	0.218	---	23.5	52.9	29.4	N	19.5																																																																																																				
4	0.256	36.0	---	61.6	25.5	N	19.6																																																																																																				
5	0.400	---	18.3	47.9	29.5	N	19.6																																																																																																				
6	0.479	28.3	---	56.4	28.1	N	19.6																																																																																																				
7	0.485	---	20.5	46.2	25.7	N	19.6																																																																																																				
8	0.836	23.4	---	56.0	32.6	N	19.6																																																																																																				
9	0.841	---	16.3	46.0	29.7	N	19.6																																																																																																				
10	1.561	21.7	---	56.0	34.3	N	19.6																																																																																																				
11	1.754	---	15.1	46.0	30.9	N	19.6																																																																																																				
12	3.104	---	14.9	46.0	31.1	N	19.6																																																																																																				

Remark: The emission levels of other frequencies were very low against the limit.



## 3.2 RADIATED EMISSIONS

### 3.2.1 Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. Emission level (dB<sub>V</sub>/m) = 20 log Emission level (uV/m).  
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 3.2.2 Measurement procedure

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.




**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

### 3.2.3 Test setup


Below 30MHz Test Setup:

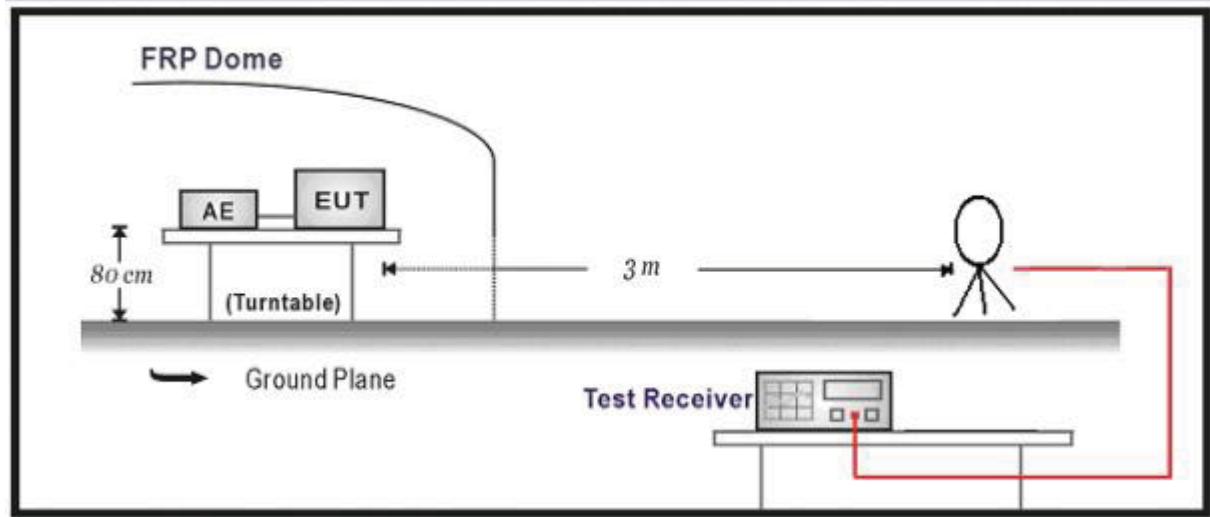

Below 1GHz Test Setup:

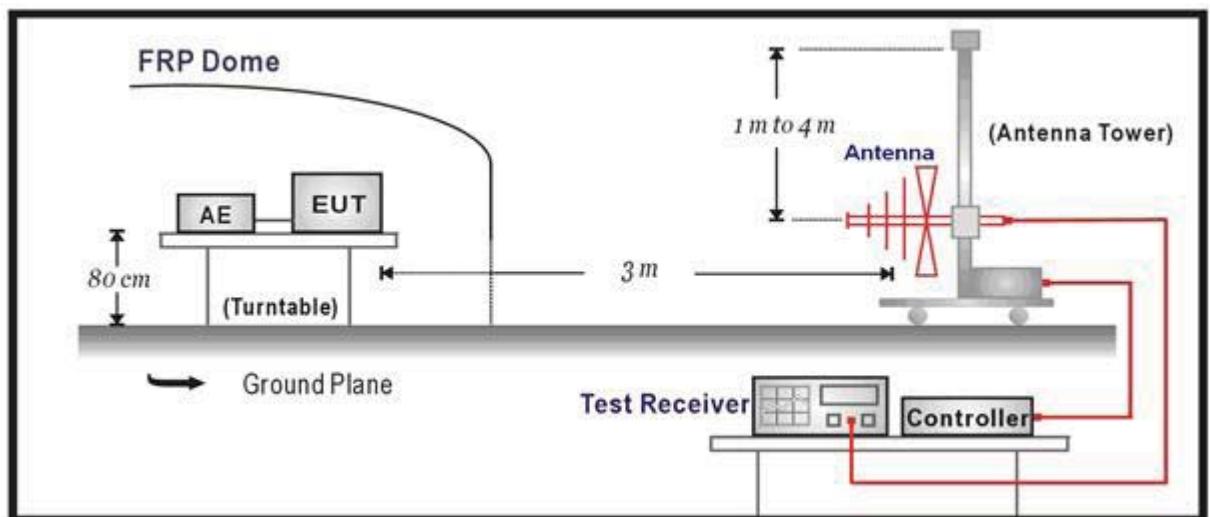


Above 1GHz Test Setup:

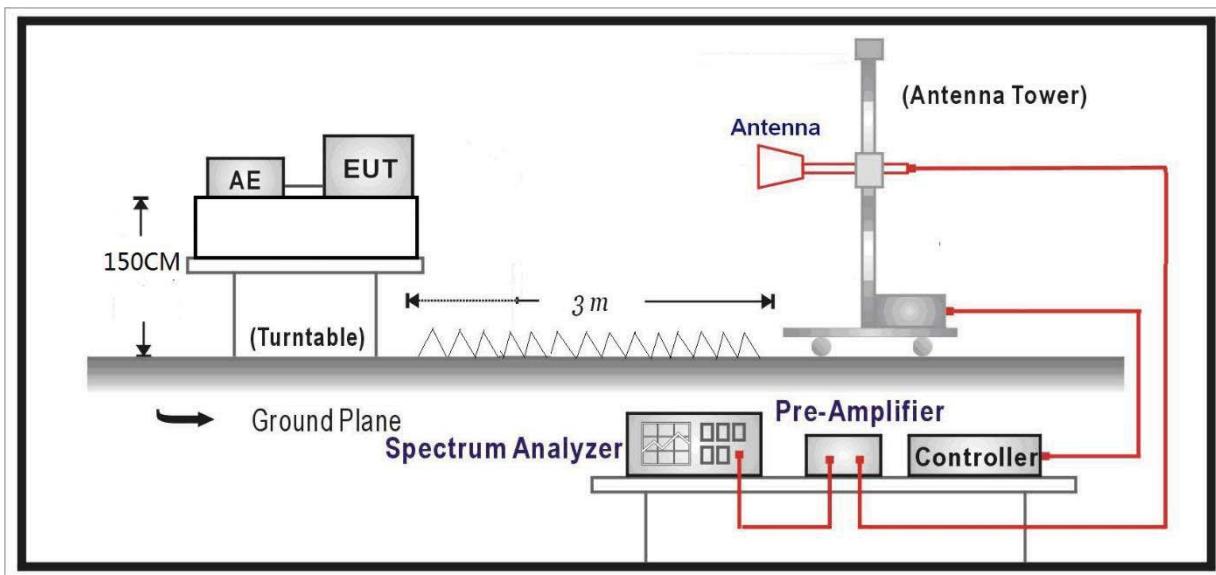


### 3.2.4 Test results

MODEL:WF-U21DS-SSA1

BELOW 1GHz WORST-CASE DATA:

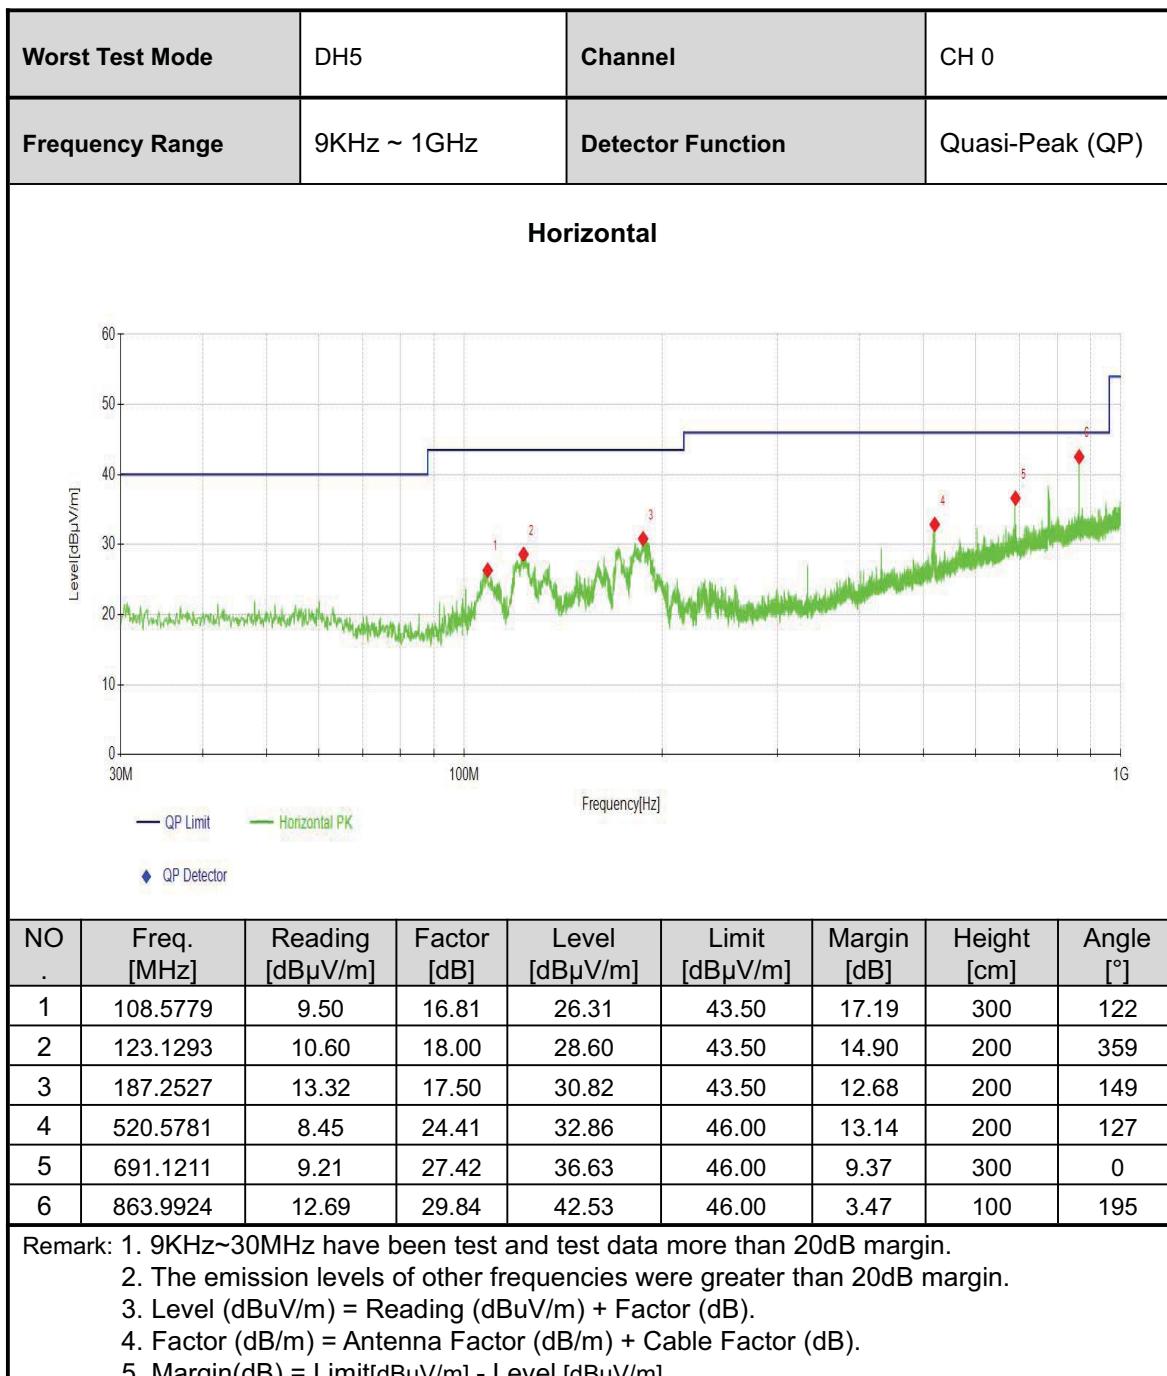

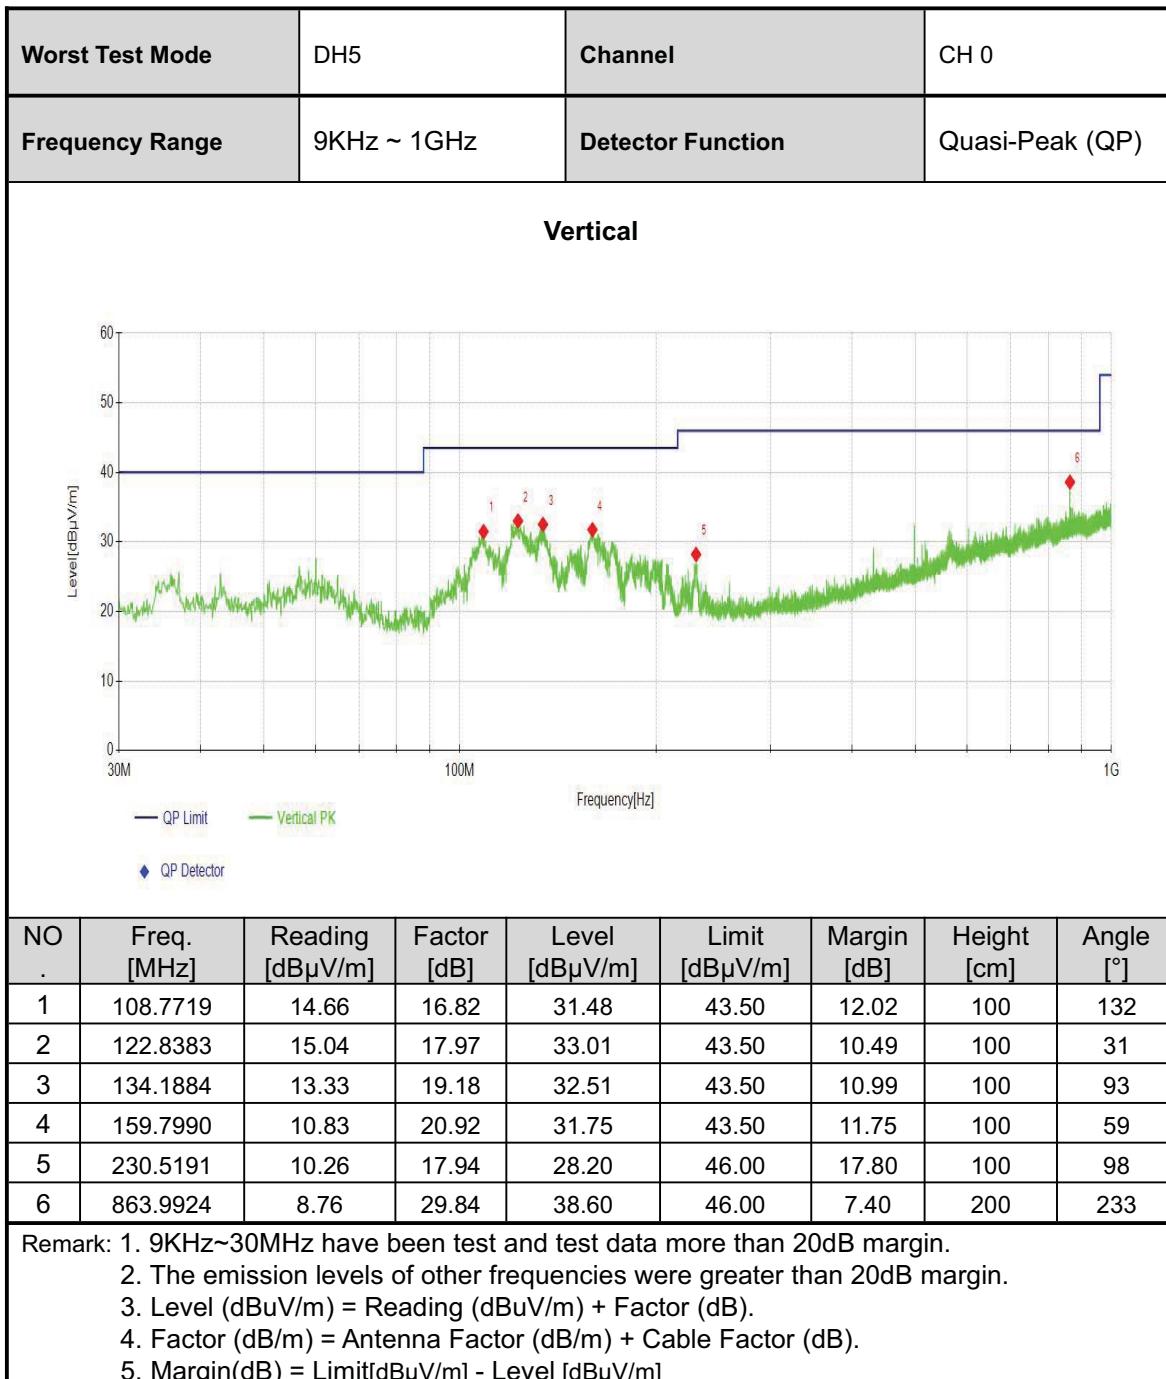



## ABOVE 1GHz DATA

## DH5-CH 0

Channel		CH 0		Frequency		2402MHz			
Frequency Range		Above 1G		Detector Function		PK/AV			
<b>Horizontal</b>									
NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.56	-0.15	36.41	54.00	17.59	150	111	AV
2	2390	44.16	-0.15	44.01	74.00	29.99	150	189	PK
3	2401	101.34	-0.03	101.31			150	242	PK
4	2401	101.26	-0.03	101.23			150	242	RMS
5	4731	44.74	9.36	54.10	74.00	19.90	150	291	PK
6	4803	38.67	9.27	47.94	54.00	6.06	150	128	RMS
7	7204	35.67	12.83	48.50	74.00	25.50	150	41	PK
8	7204	30.32	12.83	43.15	54.00	10.85	150	41	RMS
9	9929	29.40	13.78	43.18	74.00	30.82	150	350	PK
10	9933	20.16	13.78	33.94	54.00	20.06	150	134	RMS
<b>Vertical</b>									
NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.66	-0.15	36.51	54.00	17.49	150	268	AV
2	2390	44.13	-0.15	43.98	74.00	30.02	150	357	PK
3	2401	97.09	-0.03	97.06			150	137	PK
4	2401	97.02	-0.03	96.99			150	137	RMS
5	4803	45.48	9.27	54.75	74.00	19.25	150	209	PK
6	4803	39.27	9.27	48.54	54.00	5.46	150	209	RMS
7	7204	29.91	12.83	42.74	54.00	11.26	150	123	RMS
8	7205	36.21	12.82	49.03	74.00	24.97	150	123	PK
9	9850	29.59	13.24	42.83	74.00	31.17	150	78	PK
10	9970	20.90	13.74	34.64	54.00	19.36	150	14	RMS
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]									

**DH5-CH 39**

Channel	CH 39	Frequency	2441MHz
Frequency Range	Above 1G	Detector Function	PK/AV

**Horizontal**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4851	44.72	9.94	54.66	74.00	19.34	150	206	PK
2	4903	35.72	10.10	45.82	54.00	8.18	150	0	RMS
3	7321	25.93	11.00	36.93	54.00	17.07	150	30	RMS
4	7321	33.19	11.00	44.19	74.00	29.81	150	30	PK
5	9859	29.41	13.33	42.74	74.00	31.26	150	355	PK
6	10079	19.69	14.63	34.32	54.00	19.68	150	173	RMS

**Vertical**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4845	44.98	9.96	54.94	74.00	19.06	150	84	PK
2	4897	35.69	10.08	45.77	54.00	8.23	150	158	RMS
3	7321	31.95	11.00	42.95	74.00	31.05	150	57	PK
4	7321	25.29	11.00	36.29	54.00	17.71	150	57	RMS
5	9929	29.15	13.78	42.93	74.00	31.07	150	81	PK
6	9988	20.33	13.89	34.22	54.00	19.78	150	76	RMS

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

**DH5-CH 78**

Channel	CH 78	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

**Horizontal**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	98.53	0.32	98.85			150	239	RMS
2	2479	98.60	0.32	98.92			150	239	PK
3	2483	37.37	0.46	37.83	54.00	16.17	150	211	AV
4	2483	44.52	0.46	44.98	74.00	29.02	150	126	PK
5	4960	42.17	10.69	52.86	74.00	21.14	391	328	PK
6	4960	34.06	10.69	44.75	54.00	9.25	310	61	AV
7	7440	20.91	9.75	30.66	54.00	23.34	299	1	AV
8	7440	28.59	9.75	38.34	74.00	35.66	284	340	PK
9	9920	27.62	13.83	41.45	74.00	32.55	381	159	PK
10	9920	18.81	13.83	32.64	54.00	21.36	183	79	AV

**Vertical**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	93.14	0.31	93.45			150	125	PK
2	2480	92.85	0.31	93.16			150	131	RMS
3	2483	36.77	0.46	37.23	54.00	16.77	150	38	AV
4	2483	44.84	0.46	45.30	74.00	28.70	150	309	PK
5	4831	36.26	9.80	46.06	54.00	7.94	150	354	RMS
6	4886	45.13	9.92	55.05	74.00	18.95	150	265	PK
7	7567	31.13	11.46	42.59	74.00	31.41	150	159	PK
8	7576	22.12	11.60	33.72	54.00	20.28	150	316	RMS
9	9901	29.42	13.61	43.03	74.00	30.97	150	138	PK
10	9915	20.32	13.75	34.07	54.00	19.93	150	358	RMS

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 2DH5-CH 0

Channel	CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.16	-0.15	36.01	54.00	17.99	329	39	AV
2	2390	44.40	-0.15	44.25	74.00	29.75	195	274	PK
3	2402	93.84	-0.03	93.81			334	46	PK
4	2402	92.82	-0.03	92.79			345	46	RMS
5	4700	44.60	9.17	53.77	74.00	20.23	150	100	PK
6	4715	36.11	9.05	45.16	54.00	8.84	150	348	RMS
7	7205	27.45	12.82	40.27	54.00	13.73	150	19	RMS
8	7205	33.41	12.82	46.23	74.00	27.77	150	127	PK
9	9827	20.66	13.13	33.79	54.00	20.21	150	132	RMS
10	9905	29.97	13.63	43.60	74.00	30.40	150	48	PK

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.02	-0.15	35.87	54.00	18.13	262	0	AV
2	2390	43.40	-0.15	43.25	74.00	30.75	113	72	PK
3	2402	92.00	-0.03	91.97			186	166	AV
4	2402	92.88	-0.03	92.85			153	172	PK
5	4687	46.09	8.67	54.76	74.00	19.24	150	211	PK
6	4719	36.18	9.21	45.39	54.00	8.61	150	77	RMS
7	7205	25.93	12.82	38.75	54.00	15.25	150	126	RMS
8	7205	32.59	12.82	45.41	74.00	28.59	150	130	PK
9	9910	29.15	13.67	42.82	74.00	31.18	150	86	PK
10	9923	20.05	13.81	33.86	54.00	20.14	150	130	RMS

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

**2DH5-CH 39**

Channel	CH 39	Frequency	2441MHz
Frequency Range	Above 1G	Detector Function	PK/AV

**Horizontal**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	42.74	9.84	52.58	74.00	21.42	150	298	PK
2	4882	34.46	9.84	44.30	54.00	9.70	150	253	AV
3	7323	21.53	10.96	32.49	54.00	21.51	150	357	AV
4	7323	30.22	10.96	41.18	74.00	32.82	150	259	PK
5	9764	26.96	13.23	40.19	74.00	33.81	150	83	PK
6	9764	19.33	13.23	32.56	54.00	21.44	150	359	AV

**Vertical**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	42.59	9.84	52.43	74.00	21.57	150	93	PK
2	4882	34.58	9.84	44.42	54.00	9.58	150	64	AV
3	7323	21.74	10.96	32.70	54.00	21.30	150	56	AV
4	7323	29.61	10.96	40.57	74.00	33.43	150	42	PK
5	9764	27.90	13.23	41.13	74.00	32.87	150	112	PK
6	9764	19.55	13.23	32.78	54.00	21.22	150	106	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 2DH5-CH 78

Channel	CH 78	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480	95.53	0.32	95.85			150	236	PK
2	2480	95.45	0.32	95.77			150	236	RMS
3	2483	37.68	0.46	38.14	54.00	15.86	150	243	AV
4	2483	45.64	0.46	46.10	74.00	27.90	150	71	PK
5	4960	42.35	10.69	53.04	74.00	20.96	150	41	PK
6	4960	34.22	10.69	44.91	54.00	9.09	150	60	AV
7	7440	21.33	9.75	31.08	54.00	22.92	150	177	AV
8	7440	28.99	9.75	38.74	74.00	35.26	150	340	PK
9	9920	27.92	13.83	41.75	74.00	32.25	150	345	PK
10	9920	19.80	13.83	33.63	54.00	20.37	150	236	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480	90.24	0.32	90.56			150	131	PK
2	2480	90.13	0.32	90.45			150	131	RMS
3	2483	36.51	0.46	36.97	54.00	17.03	150	39	AV
4	2483	44.20	0.46	44.66	74.00	29.34	150	178	PK
5	4960	42.46	10.69	53.15	74.00	20.85	150	165	PK
6	4960	34.74	10.69	45.43	54.00	8.57	150	66	AV
7	7440	22.07	9.75	31.82	54.00	22.18	150	3	AV
8	7440	29.41	9.75	39.16	74.00	34.84	150	6	PK
9	9920	27.25	13.83	41.08	74.00	32.92	150	335	PK
10	9920	19.27	13.83	33.10	54.00	20.90	150	316	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3DH5-CH 0

Channel	CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.32	-0.15	36.17	54.00	17.83	150	58	AV
2	2390	45.55	-0.15	45.40	74.00	28.60	150	6	PK
3	2402	96.68	-0.03	96.65			150	295	RMS
4	2402	97.07	-0.03	97.04			150	295	PK
5	4804	43.00	9.29	52.29	74.00	21.71	150	1	PK
6	4804	35.37	9.29	44.66	54.00	9.34	150	46	AV
7	7205	27.27	12.82	40.09	54.00	13.91	150	11	RMS
8	7206	29.18	12.81	41.99	74.00	32.01	150	205	PK
9	9608	19.77	13.32	33.09	54.00	20.91	150	116	AV
10	9608	28.61	13.32	41.93	74.00	32.07	150	210	PK

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.63	-0.15	36.48	54.00	17.52	150	126	AV
2	2390	44.62	-0.15	44.47	74.00	29.53	150	65	PK
3	2402	93.94	-0.03	93.91			150	146	RMS
4	2402	94.60	-0.03	94.57			150	146	PK
5	4804	43.72	9.29	53.01	74.00	20.99	150	50	PK
6	4804	35.91	9.29	45.20	54.00	8.80	150	25	AV
7	7205	27.33	12.82	40.15	54.00	13.85	150	135	RMS
8	7205	32.23	12.82	45.05	74.00	28.95	150	135	PK
9	9608	27.47	13.32	40.79	74.00	33.21	150	205	PK
10	9608	20.12	13.32	33.44	54.00	20.56	150	349	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3DH5-CH 39

Channel	CH 39	Frequency	2441MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882.0000	34.58	9.84	44.42	54.00	9.58	150	360	AV
2	4882.0000	43.40	9.84	53.24	74.00	20.76	150	166	PK
3	7323.0000	30.34	10.96	41.30	74.00	32.70	150	144	PK
4	7323.0000	21.41	10.96	32.37	54.00	21.63	150	144	AV
5	9764.0000	19.57	13.23	32.80	54.00	21.20	150	153	AV
6	9764.0000	26.86	13.23	40.09	74.00	33.91	150	173	PK

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882.0000	35.22	9.84	45.06	54.00	8.94	150	35	AV
2	4882.0000	43.00	9.84	52.84	74.00	21.16	150	348	PK
3	7323.0000	29.34	10.96	40.30	74.00	33.70	150	311	PK
4	7323.0000	21.78	10.96	32.74	54.00	21.26	150	336	AV
5	9764.0000	19.74	13.23	32.97	54.00	21.03	150	282	AV
6	9764.0000	27.42	13.23	40.65	74.00	33.35	150	282	PK

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3DH5-CH 78

Channel	CH 78	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480	93.47	0.32	93.79			150	236	RMS
2	2480	94.34	0.32	94.66			150	236	PK
3	2483	37.63	0.46	38.09	54.00	15.91	150	69	AV
4	2483	44.69	0.46	45.15	74.00	28.85	150	359	PK
5	4960	43.88	10.69	54.57	74.00	19.43	150	1	PK
6	4960	34.58	10.69	45.27	54.00	8.73	150	1	AV
7	7440	21.74	9.75	31.49	54.00	22.51	150	36	AV
8	7440	30.40	9.75	40.15	74.00	33.85	150	86	PK
9	9920	28.09	13.83	41.92	74.00	32.08	150	26	PK
10	9920	19.83	13.83	33.66	54.00	20.34	150	95	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	90.95	0.31	91.26			150	145	RMS
2	2480	91.42	0.32	91.74			150	145	PK
3	2483	36.26	0.46	36.72	54.00	17.28	150	79	AV
4	2483	45.96	0.46	46.42	74.00	27.58	150	192	PK
5	4960	42.52	10.69	53.21	74.00	20.79	150	288	PK
6	4960	34.39	10.69	45.08	54.00	8.92	150	88	AV
7	7440	22.30	9.75	32.05	54.00	21.95	150	3	AV
8	7440	29.59	9.75	39.34	74.00	34.66	150	305	PK
9	9920	28.30	13.83	42.13	74.00	31.87	150	26	PK
10	9920	19.55	13.83	33.38	54.00	20.62	150	1	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).


3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

MODEL:WF-U21DS-SSA2  
BELOW 1GHz WORST-CASE DATA:


<b>Worst Test Mode</b>	DH5	<b>Channel</b>	CH 0
<b>Frequency Range</b>	9KHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)

### Horizontal

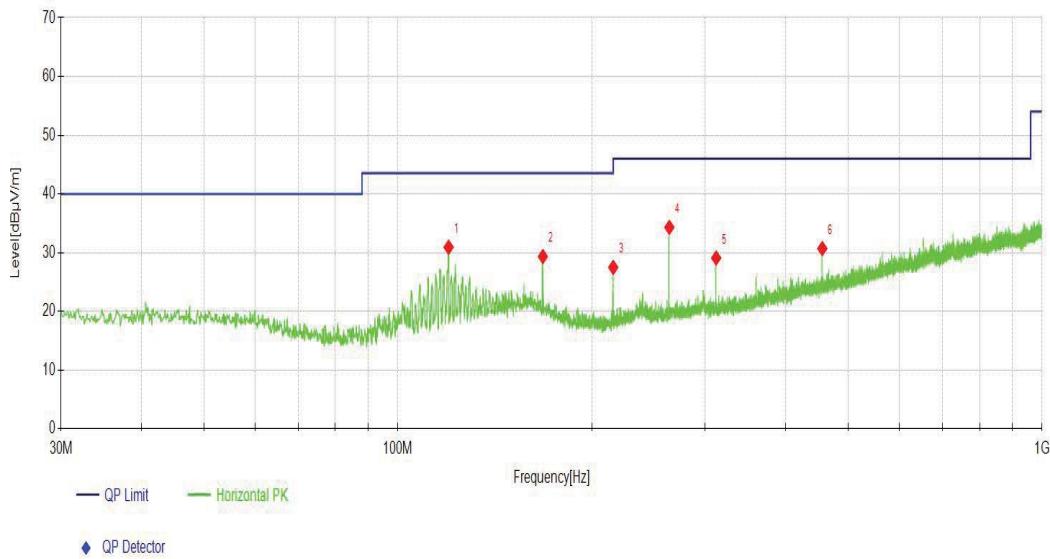

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]
1	119.9280	13.30	17.60	30.90	43.50	12.60	300	74
2	167.9478	9.09	20.23	29.32	43.50	14.18	200	37
3	215.9676	10.25	17.22	27.47	43.50	16.03	100	345
4	263.9874	15.71	18.59	34.30	46.00	11.70	100	300
5	312.0072	8.94	20.13	29.07	46.00	16.93	100	311
6	455.9696	7.39	23.29	30.68	46.00	15.32	200	252

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.  
 2. The emission levels of other frequencies were greater than 20dB margin.  
 3. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).  
 4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
 5. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

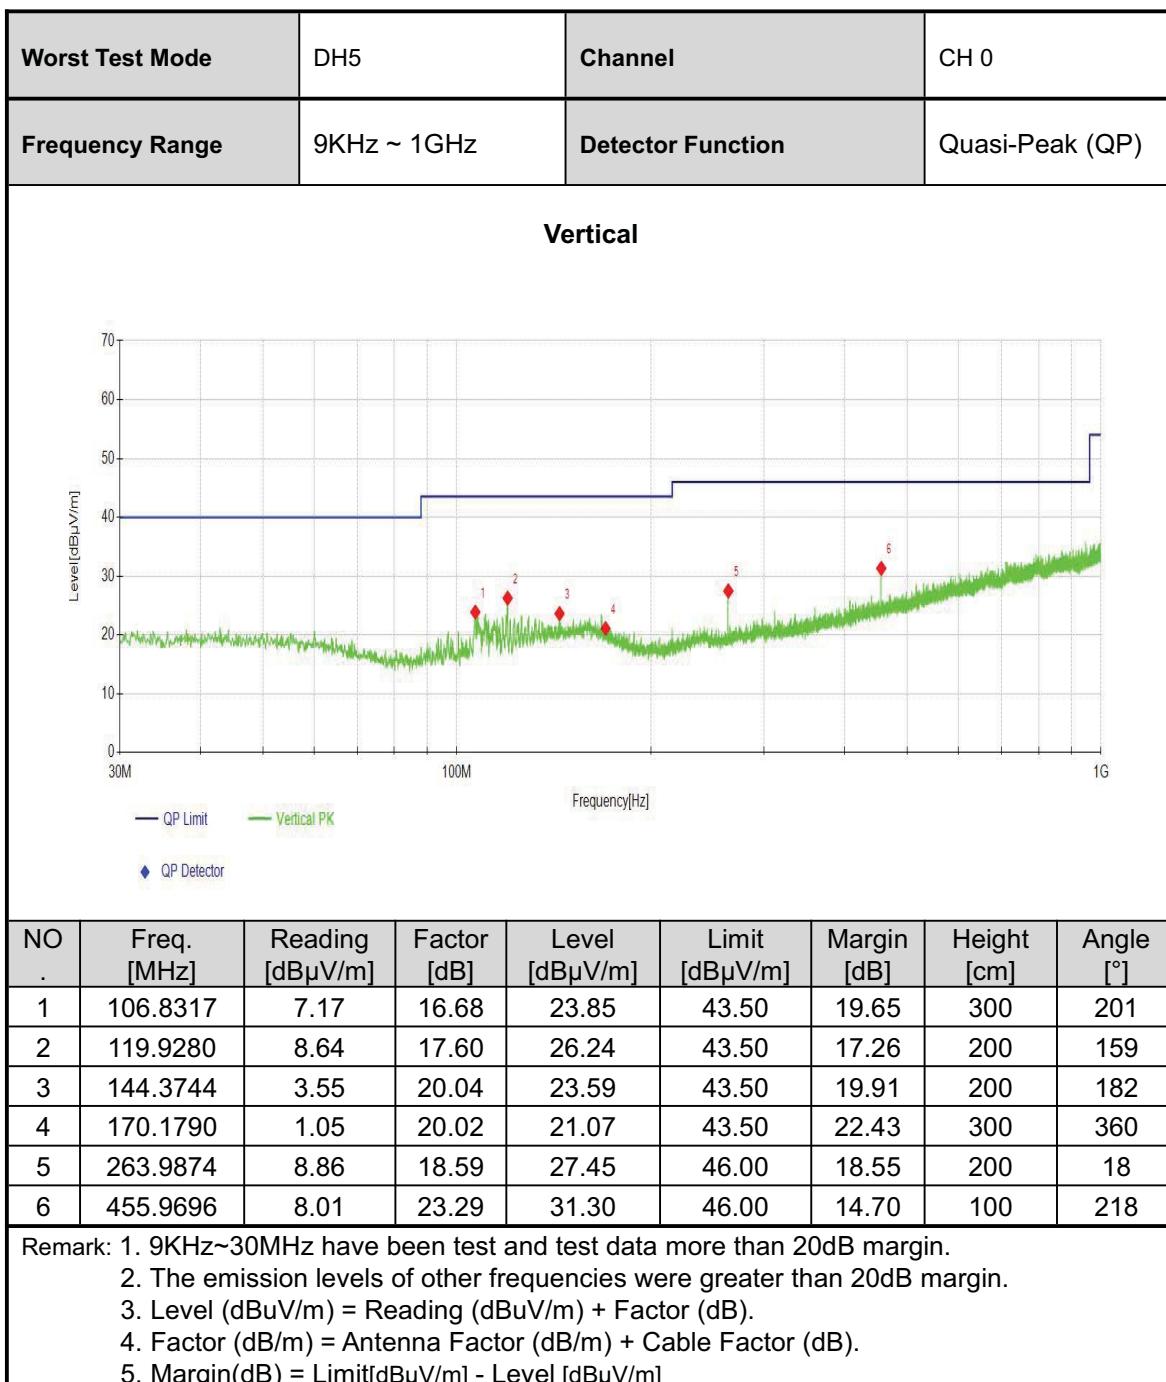



## ABOVE 1GHz DATA

## DH5-CH 0

Channel	CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.49	-0.15	36.34	54.00	17.66	370	38	AV
2	2390	44.54	-0.15	44.39	74.00	29.61	323	110	PK
3	2401	91.06	-0.03	91.03			159	117	PK
4	2401	91.04	-0.03	91.01			102	124	RMS
5	4804	42.59	9.29	51.88	74.00	22.12	209	205	PK
6	4804	34.61	9.29	43.90	54.00	10.10	195	200	AV
7	7206	19.72	12.81	32.53	54.00	21.47	101	37	AV
8	7206	27.37	12.81	40.18	74.00	33.82	290	255	PK
9	9608	26.91	13.32	40.23	74.00	33.77	225	255	PK
10	9608	19.13	13.32	32.45	54.00	21.55	162	240	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.19	-0.15	36.04	54.00	17.96	231	65	AV
2	2390	44.85	-0.15	44.70	74.00	29.30	219	317	PK
3	2401	87.98	-0.03	87.95			205	98	RMS
4	2401	89.30	-0.03	89.27			208	98	PK
5	4804	42.59	9.29	51.88	74.00	22.12	307	160	PK
6	4804	34.02	9.29	43.31	54.00	10.69	252	144	AV
7	7206	19.99	12.81	32.80	54.00	21.20	200	96	AV
8	7206	28.41	12.81	41.22	74.00	32.78	328	358	PK
9	9608	26.93	13.32	40.25	74.00	33.75	250	335	PK
10	9608	19.58	13.32	32.90	54.00	21.10	251	81	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

**DH5-CH 39**

Channel	CH 39	Frequency	2441MHz
Frequency Range	Above 1G	Detector Function	PK/AV

**Horizontal**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	43.44	9.84	53.28	74.00	20.72	137	215	PK
2	4882	34.01	9.84	43.85	54.00	10.15	195	349	AV
3	7323	20.92	10.96	31.88	54.00	22.12	245	359	AV
4	7323	29.51	10.96	40.47	74.00	33.53	351	154	PK
5	9764	26.76	13.23	39.99	74.00	34.01	100	139	PK
6	9764	19.32	13.23	32.55	54.00	21.45	370	144	AV

**Vertical**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	42.61	9.84	52.45	74.00	21.55	349	2	PK
2	4882	34.36	9.84	44.20	54.00	9.80	153	160	AV
3	7323	20.88	10.96	31.84	54.00	22.16	394	202	AV
4	7323	28.66	10.96	39.62	74.00	34.38	375	347	PK
5	9764	27.23	13.23	40.46	74.00	33.54	262	287	PK
6	9764	18.82	13.23	32.05	54.00	21.95	290	327	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## DH5-CH 78

Channel	CH 78	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	85.61	0.33	85.94			122	115	PK
2	2480	83.79	0.32	84.11			157	108	RMS
3	2483	36.34	0.46	36.80	54.00	17.20	106	88	AV
4	2483	43.68	0.46	44.14	74.00	29.86	327	82	PK
5	4960	42.88	10.69	53.57	74.00	20.43	346	290	PK
6	4960	33.99	10.69	44.68	54.00	9.32	206	21	AV
7	7440	20.89	9.75	30.64	54.00	23.36	260	31	AV
8	7440	29.66	9.75	39.41	74.00	34.59	276	144	PK
9	9920	26.77	13.83	40.60	74.00	33.40	299	239	PK
10	9920	18.69	13.83	32.52	54.00	21.48	132	294	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	83.89	0.33	84.22			262	92	PK
2	2480	82.82	0.32	83.14			259	99	RMS
3	2483	35.89	0.46	36.35	54.00	17.65	263	178	AV
4	2483	43.89	0.46	44.35	74.00	29.65	338	46	PK
5	4960	42.56	10.69	53.25	74.00	20.75	163	75	PK
6	4960	34.67	10.69	45.36	54.00	8.64	319	209	AV
7	7440	20.68	9.75	30.43	54.00	23.57	200	121	AV
8	7440	27.70	9.75	37.45	74.00	36.55	148	339	PK
9	9920	27.83	13.83	41.66	74.00	32.34	198	110	PK
10	9920	19.37	13.83	33.20	54.00	20.80	213	110	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

**2DH5-CH 0**

Channel	CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

**Horizontal**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.17	-0.15	36.02	54.00	17.98	189	244	AV
2	2390	44.75	-0.15	44.60	74.00	29.40	321	116	PK
3	2402	91.64	-0.03	91.61			123	116	PK
4	2402	90.98	-0.03	90.95			300	124	RMS
5	4804	42.51	9.29	51.80	74.00	22.20	120	266	PK
6	4804	34.71	9.29	44.00	54.00	10.00	287	167	AV
7	7206	19.66	12.81	32.47	54.00	21.53	102	289	AV
8	7206	27.91	12.81	40.72	74.00	33.28	153	289	PK
9	9608	27.06	13.32	40.38	74.00	33.62	246	142	PK
10	9608	18.96	13.32	32.28	54.00	21.72	221	238	AV

**Vertical**

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.27	-0.15	36.12	54.00	17.88	287	210	AV
2	2390	43.49	-0.15	43.34	74.00	30.66	296	323	PK
3	2402	88.07	-0.03	88.04			102	97	RMS
4	2402	88.24	-0.03	88.21			266	97	PK
5	4804	43.17	9.29	52.46	74.00	21.54	263	22	PK
6	4804	35.39	9.29	44.68	54.00	9.32	397	41	AV
7	7206	19.50	12.81	32.31	54.00	21.69	262	319	AV
8	7206	28.87	12.81	41.68	74.00	32.32	217	125	PK
9	9608	27.49	13.32	40.81	74.00	33.19	177	214	PK
10	9608	19.29	13.32	32.61	54.00	21.39	393	259	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 2DH5-CH 39

Channel	CH 39	Frequency	2441MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	43.08	9.84	52.92	74.00	21.08	332	134	PK
2	4882	34.35	9.84	44.19	54.00	9.81	279	203	AV
3	7323	20.77	10.96	31.73	54.00	22.27	338	201	AV
4	7323	29.24	10.96	40.20	74.00	33.80	137	48	PK
5	9764	26.83	13.23	40.06	74.00	33.94	186	287	PK
6	9764	18.72	13.23	31.95	54.00	22.05	154	175	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	42.79	9.84	52.63	74.00	21.37	348	180	PK
2	4882	34.99	9.84	44.83	54.00	9.17	383	334	AV
3	7323	20.76	10.96	31.72	54.00	22.28	234	170	AV
4	7323	28.62	10.96	39.58	74.00	34.42	160	106	PK
5	9764	27.40	13.23	40.63	74.00	33.37	213	145	PK
6	9764	19.12	13.23	32.35	54.00	21.65	247	320	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 2DH5-CH 78

Channel	CH 78	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	85.59	0.33	85.92			165	112	PK
2	2480	83.73	0.32	84.05			172	112	RMS
3	2483	35.80	0.46	36.26	54.00	17.74	308	125	AV
4	2483	43.27	0.46	43.73	74.00	30.27	304	119	PK
5	4960	42.24	10.69	52.93	74.00	21.07	300	112	PK
6	4960	34.10	10.69	44.79	54.00	9.21	342	106	AV
7	7440	20.45	9.75	30.20	54.00	23.80	118	186	AV
8	7440	28.71	9.75	38.46	74.00	35.54	184	285	PK
9	9920	27.17	13.83	41.00	74.00	33.00	101	22	PK
10	9920	19.77	13.83	33.60	54.00	20.40	399	200	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	83.44	0.32	83.76			391	112	PK
2	2480	82.77	0.32	83.09			289	98	RMS
3	2483	36.20	0.46	36.66	54.00	17.34	175	296	AV
4	2483	45.78	0.46	46.24	74.00	27.76	309	191	PK
5	4960	42.92	10.69	53.61	74.00	20.39	230	151	PK
6	4960	33.99	10.69	44.68	54.00	9.32	302	126	AV
7	7440	20.97	9.75	30.72	54.00	23.28	184	194	AV
8	7440	29.32	9.75	39.07	74.00	34.93	307	194	PK
9	9920	27.32	13.83	41.15	74.00	32.85	267	100	PK
10	9920	19.25	13.83	33.08	54.00	20.92	152	96	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3DH5-CH 0

Channel	CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	36.41	-0.15	36.26	54.00	17.74	131	308	AV
2	2390	44.91	-0.15	44.76	74.00	29.24	311	308	PK
3	2401	94.18	-0.03	94.15			272	119	PK
4	2401	94.00	-0.03	93.97			192	119	RMS
5	4804	42.56	9.29	51.85	74.00	22.15	204	115	PK
6	4804	34.81	9.29	44.10	54.00	9.90	176	17	AV
7	7204	23.56	12.83	36.39	54.00	17.61	254	58	RMS
8	7205	31.17	12.82	43.99	74.00	30.01	274	52	PK
9	9608	27.33	13.32	40.65	74.00	33.35	212	112	PK
10	9608	19.29	13.32	32.61	54.00	21.39	354	240	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390	35.84	-0.15	35.69	54.00	18.31	102	3	AV
2	2390	44.15	-0.15	44.00	74.00	30.00	271	345	PK
3	2401	91.07	-0.03	91.04			168	96	RMS
4	2401	91.24	-0.03	91.21			229	96	PK
5	4804	34.62	9.29	43.91	54.00	10.09	384	124	AV
6	4804	43.34	9.29	52.63	74.00	21.37	333	129	PK
7	7204	26.62	12.83	39.45	54.00	14.55	188	190	RMS
8	7205	33.45	12.82	46.27	74.00	27.73	343	190	PK
9	9608	19.32	13.32	32.64	54.00	21.36	221	185	AV
10	9608	27.84	13.32	41.16	74.00	32.84	153	97	PK

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3DH5-CH 39

Channel	CH 39	Frequency	2441MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	42.09	9.84	51.93	74.00	22.07	304	177	PK
2	4882	35.14	9.84	44.98	54.00	9.02	257	177	AV
3	7321	32.72	11.00	43.72	74.00	30.28	325	152	PK
4	7322	25.02	10.98	36.00	54.00	18.00	226	186	RMS
5	9764	26.61	13.23	39.84	74.00	34.16	195	186	PK
6	9764	18.69	13.23	31.92	54.00	22.08	378	107	AV

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882	43.02	9.84	52.86	74.00	21.14	254	305	PK
2	4882	34.41	9.84	44.25	54.00	9.75	308	305	AV
3	7322	28.54	10.98	39.52	54.00	14.48	142	172	RMS
4	7323	32.40	10.96	43.36	74.00	30.64	330	84	PK
5	9764	18.91	13.23	32.14	54.00	21.86	229	320	AV
6	9764	27.02	13.23	40.25	74.00	33.75	229	236	PK

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3DH5-CH 78

Channel	CH 78	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

## Horizontal

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2479	87.25	0.32	87.57			172	112	RMS
2	2479	87.39	0.32	87.71			146	112	PK
3	2483	36.31	0.46	36.77	54.00	17.23	240	11	AV
4	2483	43.41	0.46	43.87	74.00	30.13	101	152	PK
5	4960	34.84	10.69	45.53	54.00	8.47	227	309	AV
6	4960	42.59	10.69	53.28	74.00	20.72	155	259	PK
7	7440	28.57	9.75	38.32	74.00	35.68	150	116	PK
8	7440	20.96	9.75	30.71	54.00	23.29	284	126	AV
9	9920	18.82	13.83	32.65	54.00	21.35	377	278	AV
10	9920	27.45	13.83	41.28	74.00	32.72	180	40	PK

## Vertical

NO .	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480	85.79	0.32	86.11			116	95	PK
2	2480	85.38	0.32	85.70			126	95	RMS
3	2483	36.72	0.46	37.18	54.00	16.82	286	102	AV
4	2483	44.04	0.46	44.50	74.00	29.50	353	293	PK
5	4960	42.24	10.69	52.93	74.00	21.07	302	240	PK
6	4960	34.39	10.69	45.08	54.00	8.92	345	240	AV
7	7440	21.31	9.75	31.06	54.00	22.94	143	351	AV
8	7440	28.80	9.75	38.55	74.00	35.45	278	115	PK
9	9920	26.72	13.83	40.55	74.00	33.45	246	169	PK
10	9920	18.61	13.83	32.44	54.00	21.56	145	263	AV

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

### 3.3 NUMBER OF HOPPING FREQUENCY USED

#### 3.3.1 Limits

At least 15 channels frequencies, and should be equally spaced.

#### 3.3.2 Measurement procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

#### 3.3.3 Test setup



#### 3.3.4 Test result

Refer to Appendix A.

## 3.4 DWELL TIME ON EACH CHANNEL


### 3.4.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 3.4.2 Measurement procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

### 3.4.3 Test setup

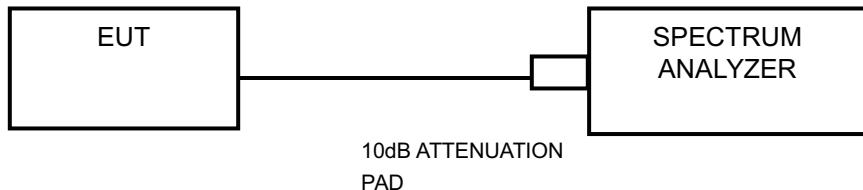

### 3.4.4 Test result

Refer to Appendix A.

## 3.5 20dB EMISSION BANDWIDTH

### 3.5.1 Limits

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation

### 3.5.2 Measurement procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 3.5.3 Test setup



### 3.5.4 Test result

Refer to Appendix A.

## 3.6 HOPPING CHANNEL SEPARATION

### 3.6.1 Limits

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 3.6.2 Measurement procedure

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

### 3.6.3 Test setup



### 3.6.4 Test result

Refer to Appendix A.

## 3.7 CONDUCTED OUTPUT POWER

### 3.7.1 Limits(FCC)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


### 3.7.2 Limits(IC)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W

### 3.7.3 Measurement procedure

- a. A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- b. An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

### 3.7.4 Test setup

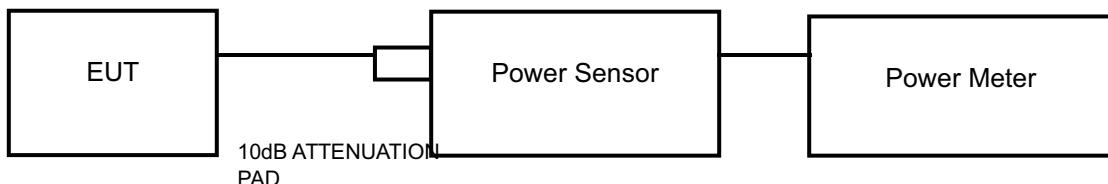

### 3.7.5 Test result

Refer to Appendix A.

### 3.8 OUT OF BAND EMISSION MEASUREMENT

#### 3.8.1 Limits

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

#### 3.8.2 Measurement procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

#### 3.8.3 Test setup



#### 3.8.4 Test result

Refer to Appendix A.

## 3.9 OCCUPIED BANDWIDTH MEASUREMENT

### 3.9.1 Measurement procedure

The transmitter antenna output was connected to the spectrum analyzer through an attenuator. The resolution bandwidth shall be set to the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth. below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 3.9.2 TEST SETUP



### 3.9.3 Test result

Please refer Annex A.



## 4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Photos).



## 5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).



## 6 Appendix A


### 6.1 20dB Emission Bandwidth


#### 6.1.1 Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.86	2401.55	2402.41	---	---
		2441	0.86	2440.55	2441.41	---	---
		2480	0.86	2479.55	2480.41	---	---
2DH5	Ant1	2402	1.25	2401.37	2402.62	---	---
		2441	1.25	2440.37	2441.62	---	---
		2480	1.25	2479.37	2480.63	---	---
3DH5	Ant1	2402	1.25	2401.37	2402.62	---	---
		2441	1.25	2440.37	2441.62	---	---
		2480	1.25	2479.37	2480.62	---	---

### 6.1.2 Test Graphs



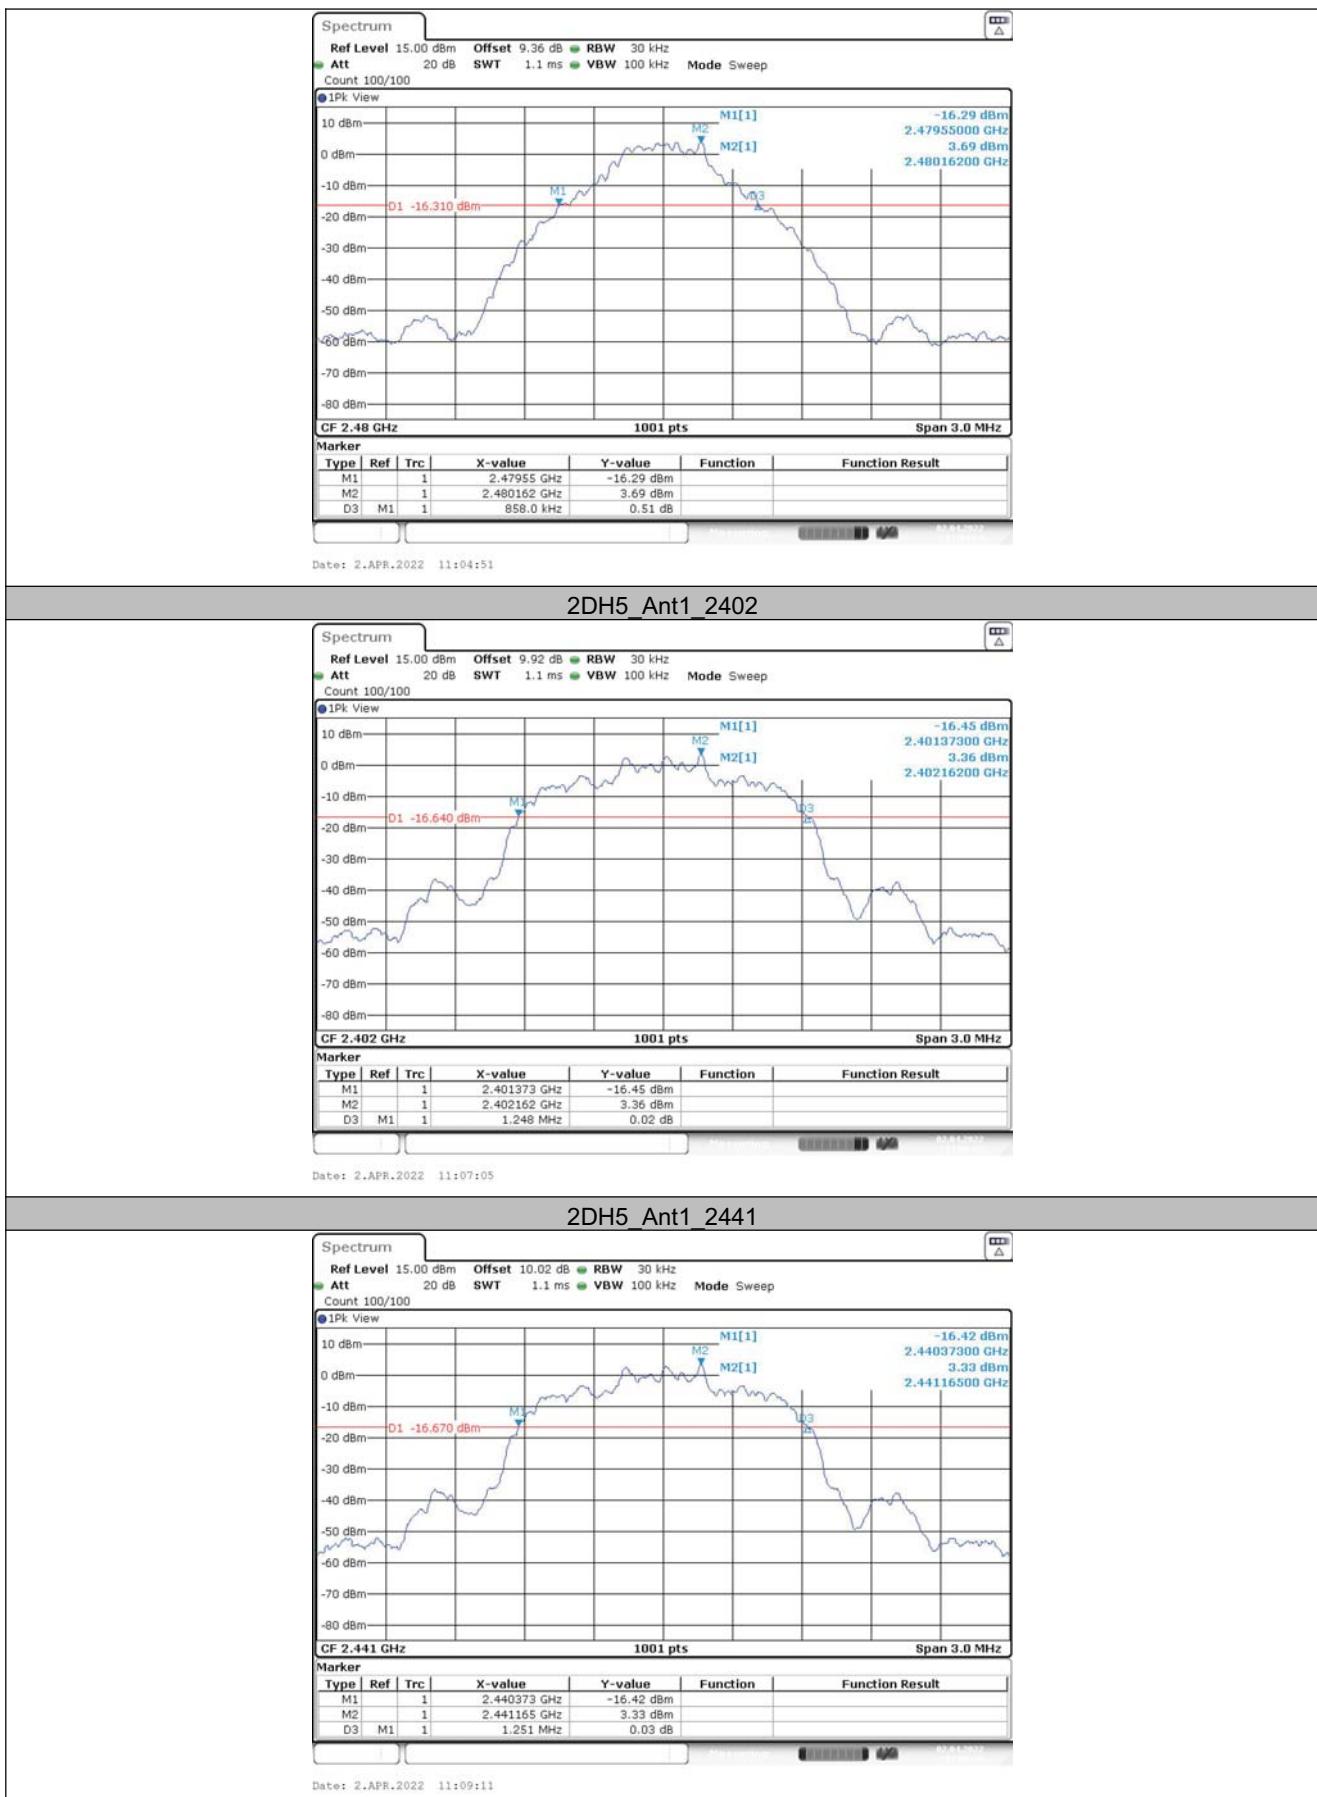

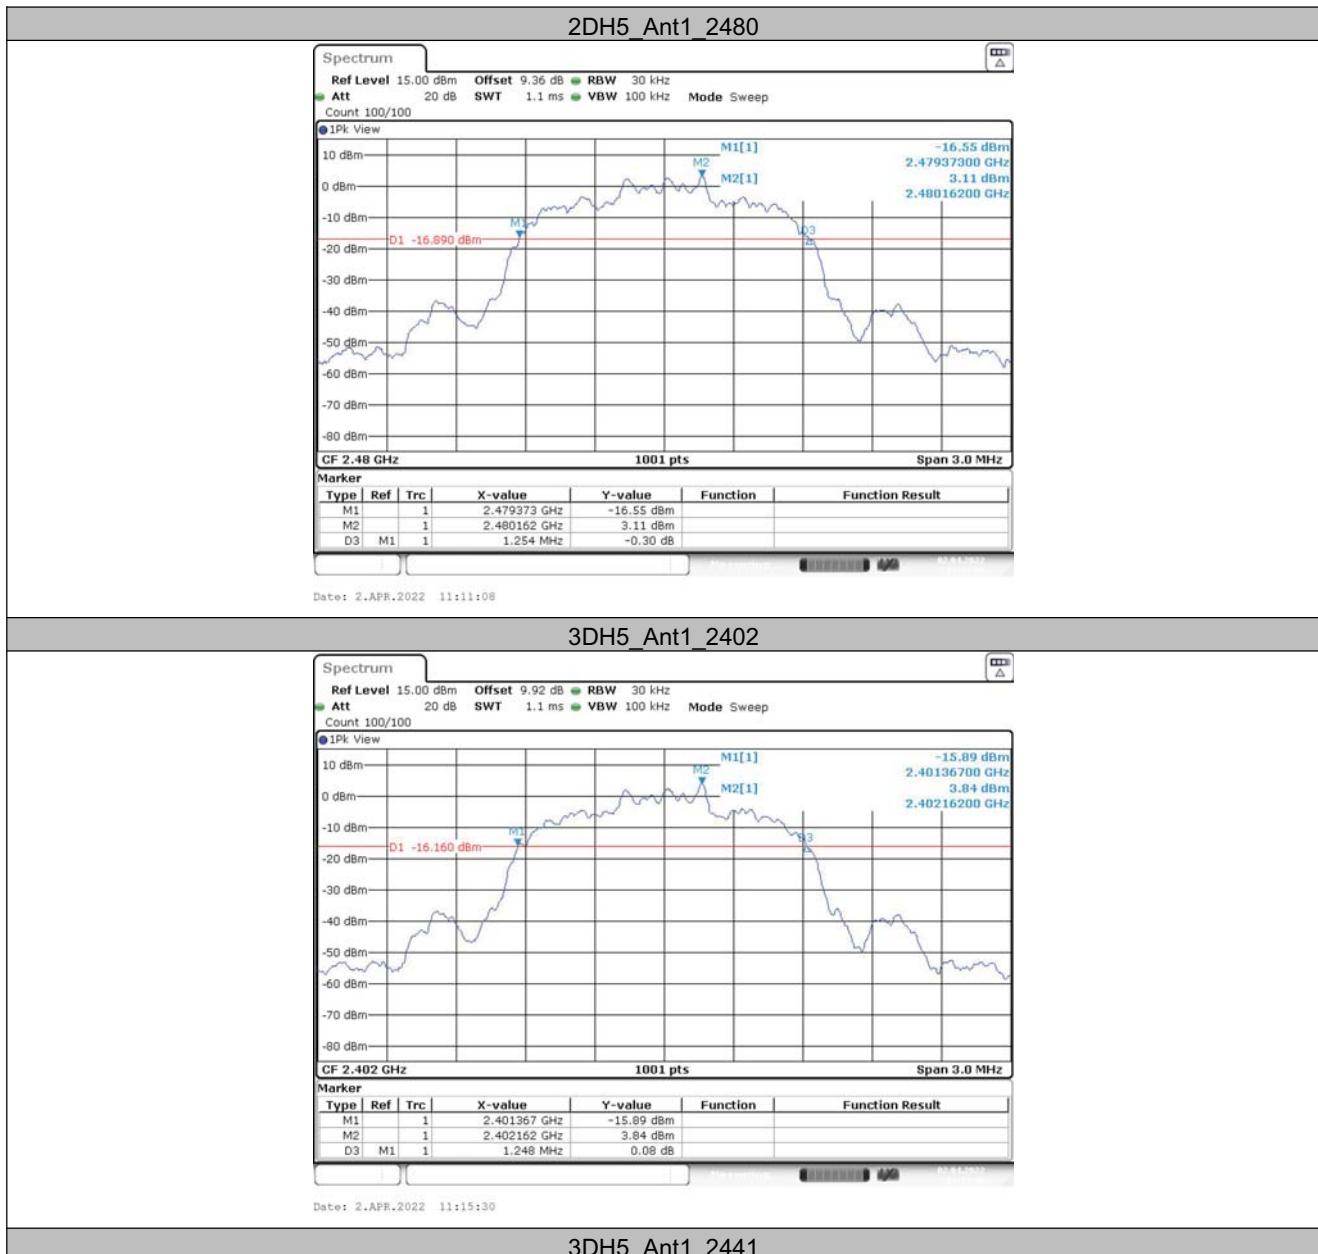





## 6.2 Conducted Output Power

### 6.2.1 Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	12.21	≤20.97	PASS
		2441	12.58	≤20.97	PASS
		2480	11.84	≤20.97	PASS
2DH5	Ant1	2402	12.68	≤20.97	PASS
		2441	13.06	≤20.97	PASS
		2480	12.34	≤20.97	PASS
3DH5	Ant1	2402	13.04	≤20.97	PASS
		2441	13.4	≤20.97	PASS
		2480	12.7	≤20.97	PASS




## 6.3 Hopping Channel Separation

### 6.3.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.333	≥1.030	PASS
2DH5	Ant1	Hop	1.003	≥0.867	PASS
3DH5	Ant1	Hop	1.003	≥0.867	PASS

### 6.3.2 Test Graphs



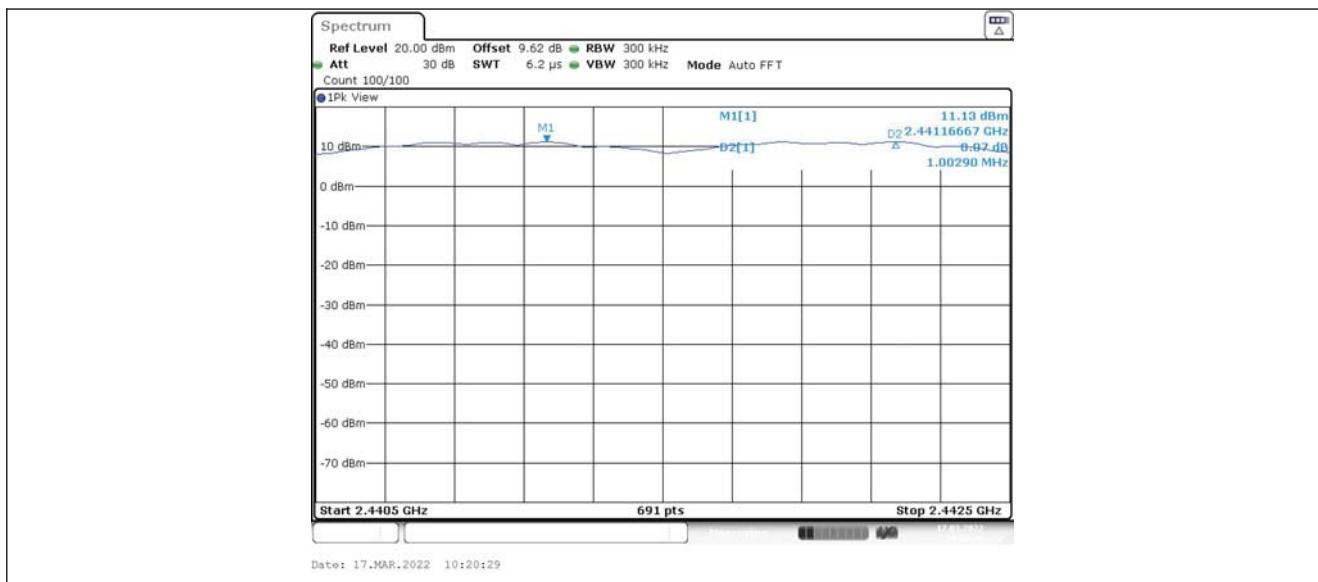





## 6.4 Dell Time of Each Channel


### 6.4.1 Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.40	320	0.128	≤0.4	PASS
DH3	Ant1	Hop	1.65	160	0.264	≤0.4	PASS
DH5	Ant1	Hop	2.89	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.30	320	0.097	≤0.4	PASS
2DH3	Ant1	Hop	1.60	160	0.255	≤0.4	PASS
2DH5	Ant1	Hop	2.79	106.67	0.297	≤0.4	PASS
3DH1	Ant1	Hop	0.29	320	0.093	≤0.4	PASS
3DH3	Ant1	Hop	1.59	160	0.255	≤0.4	PASS
3DH5	Ant1	Hop	2.79	106.67	0.297	≤0.4	PASS

### 6.4.1 Test Graphs

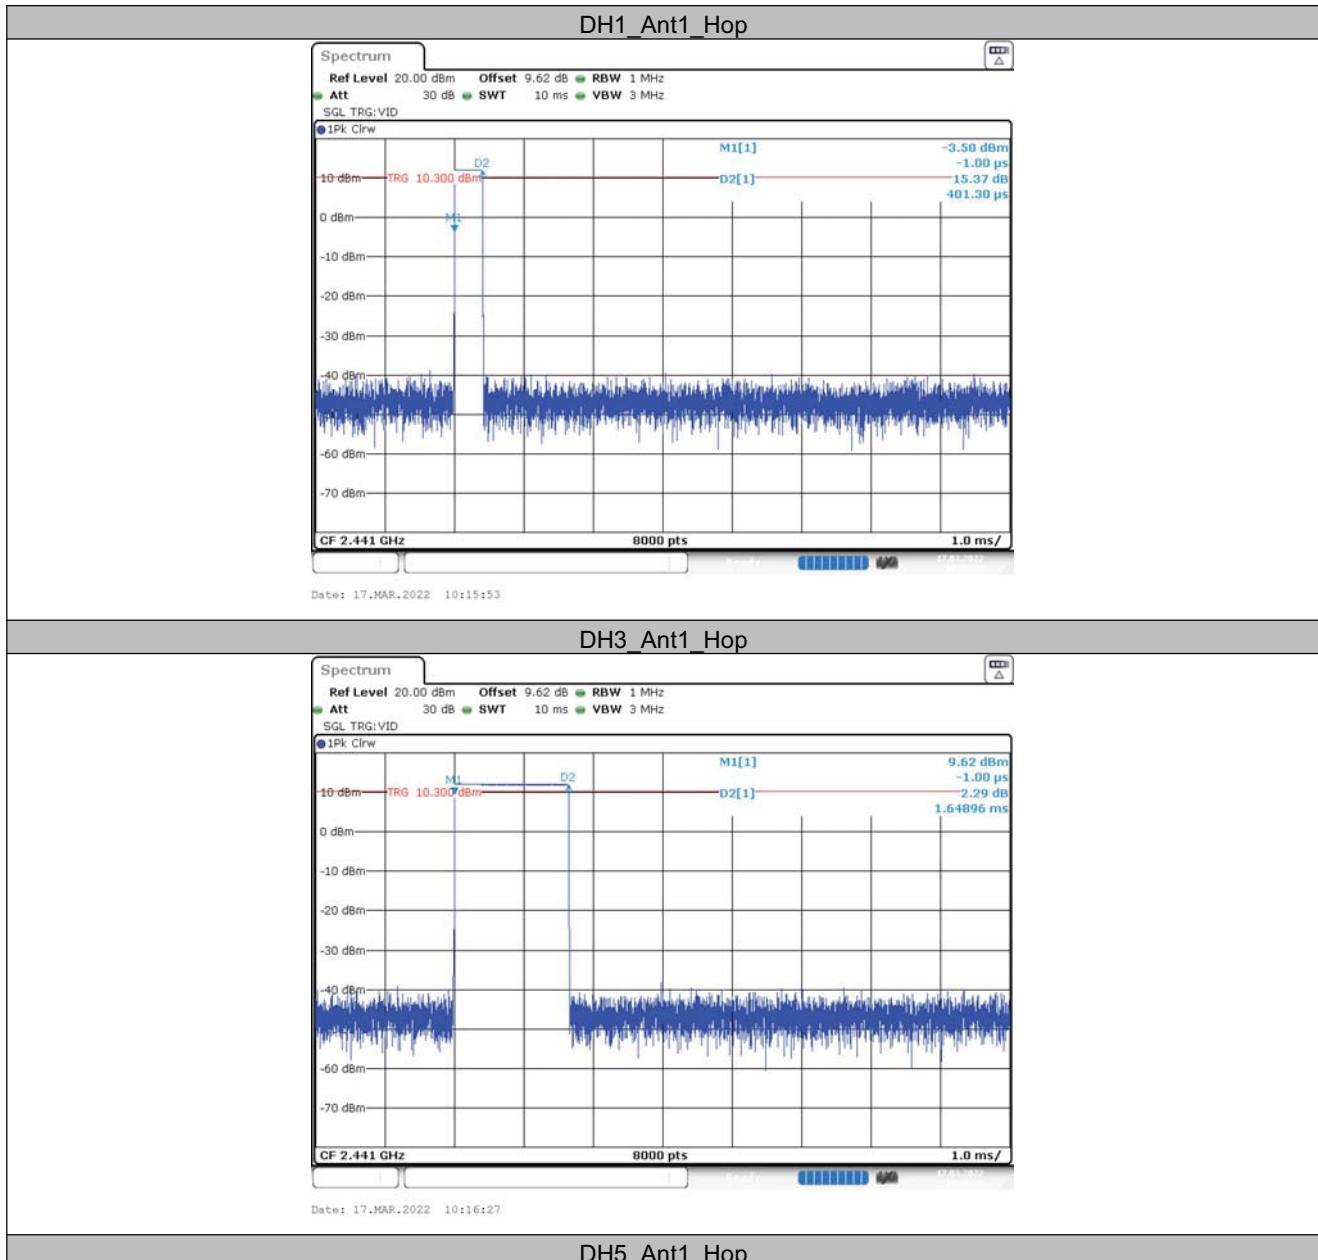

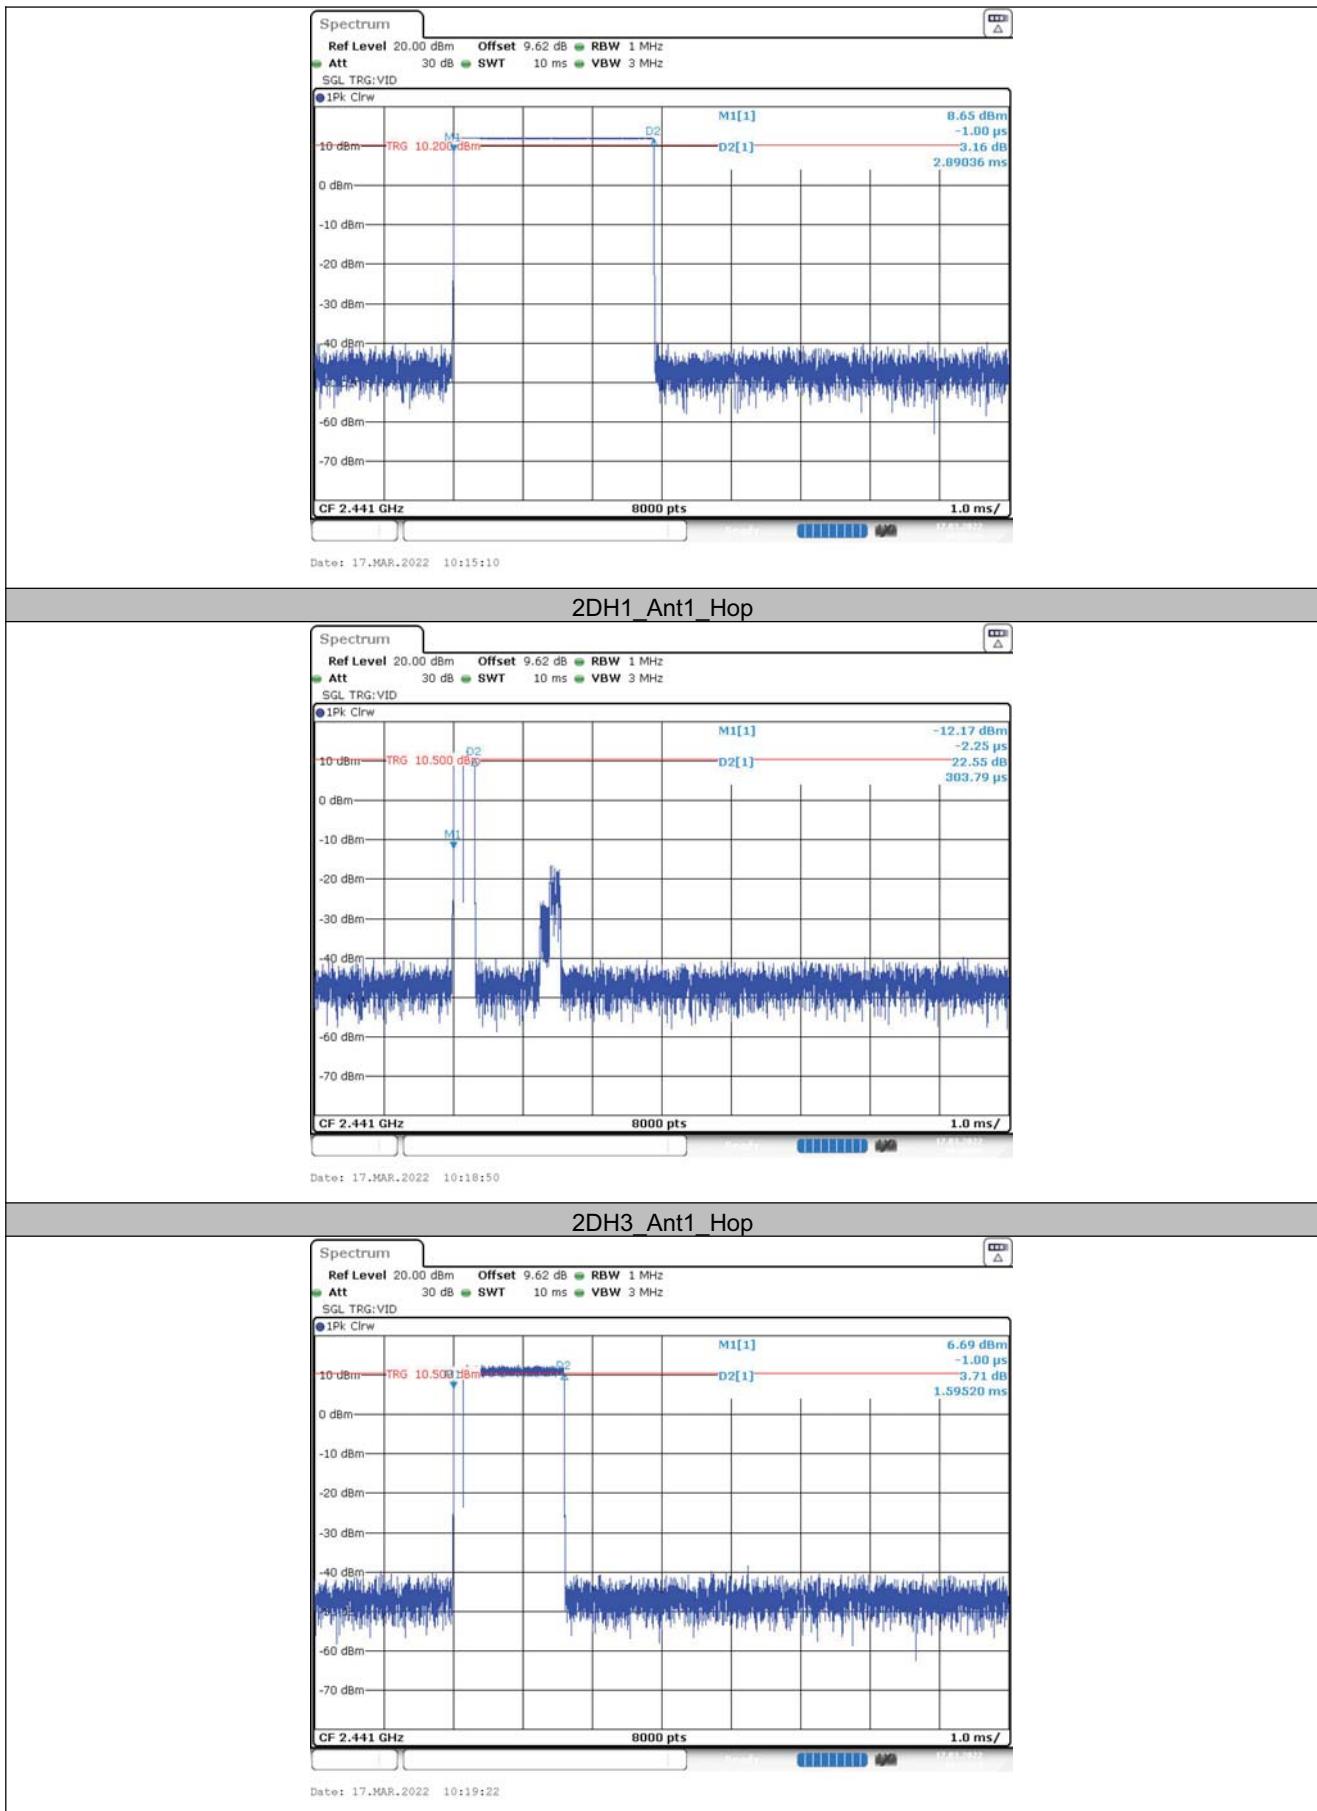

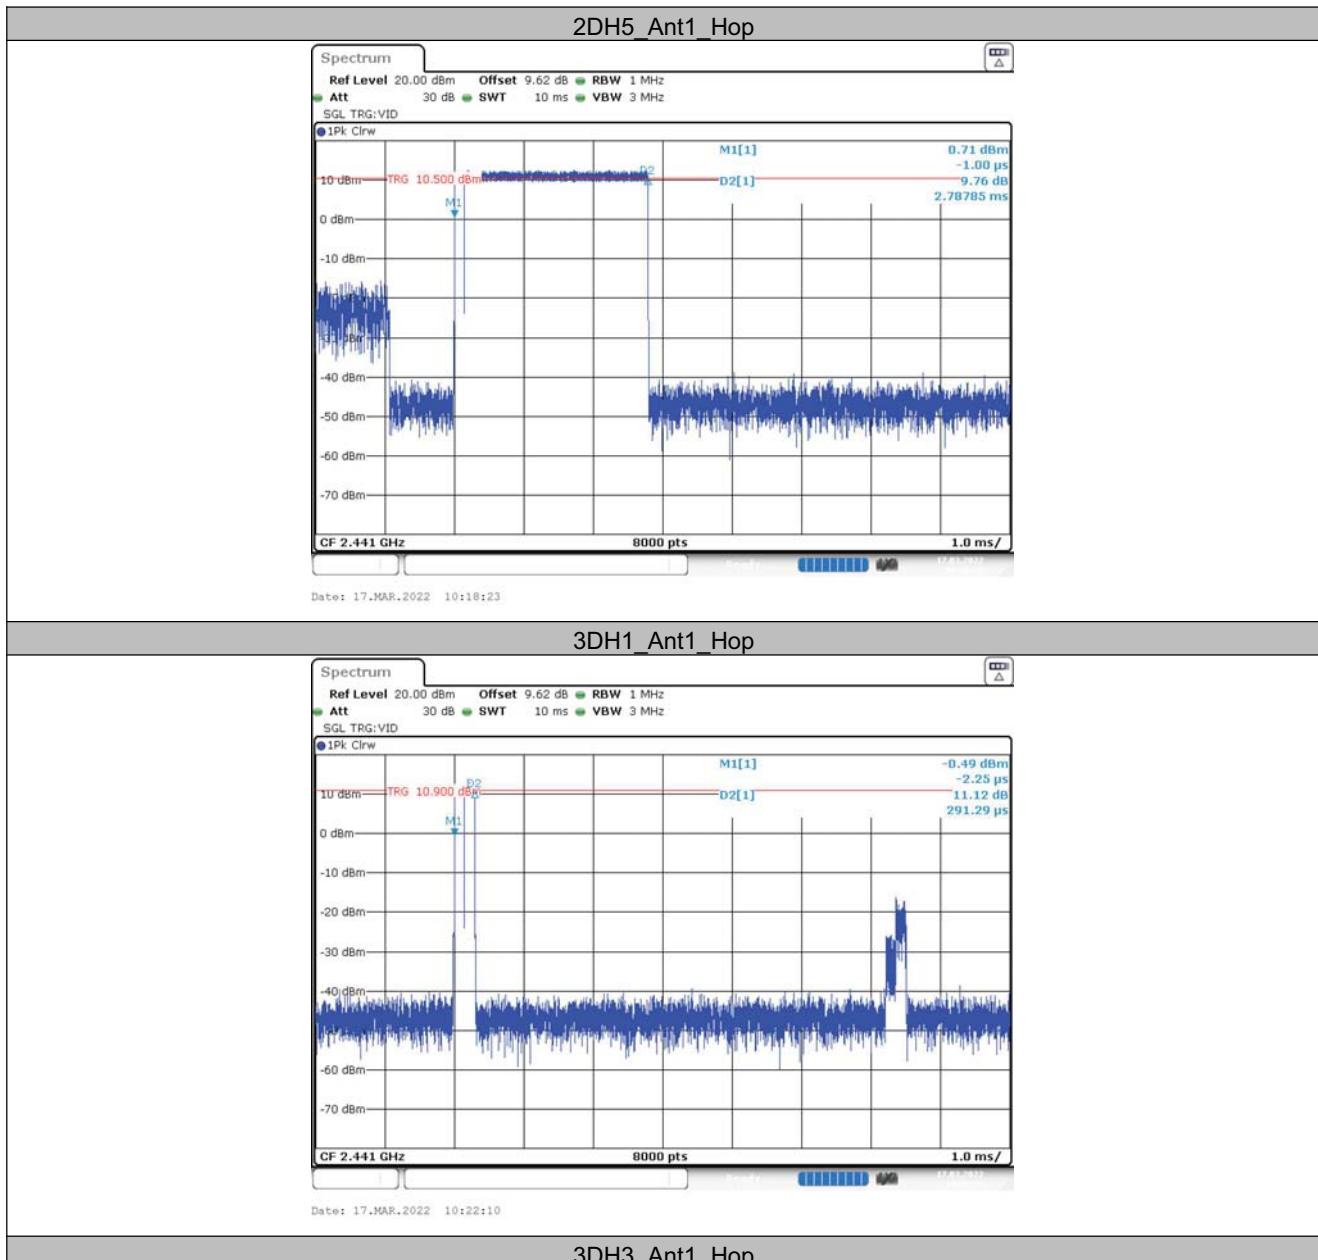

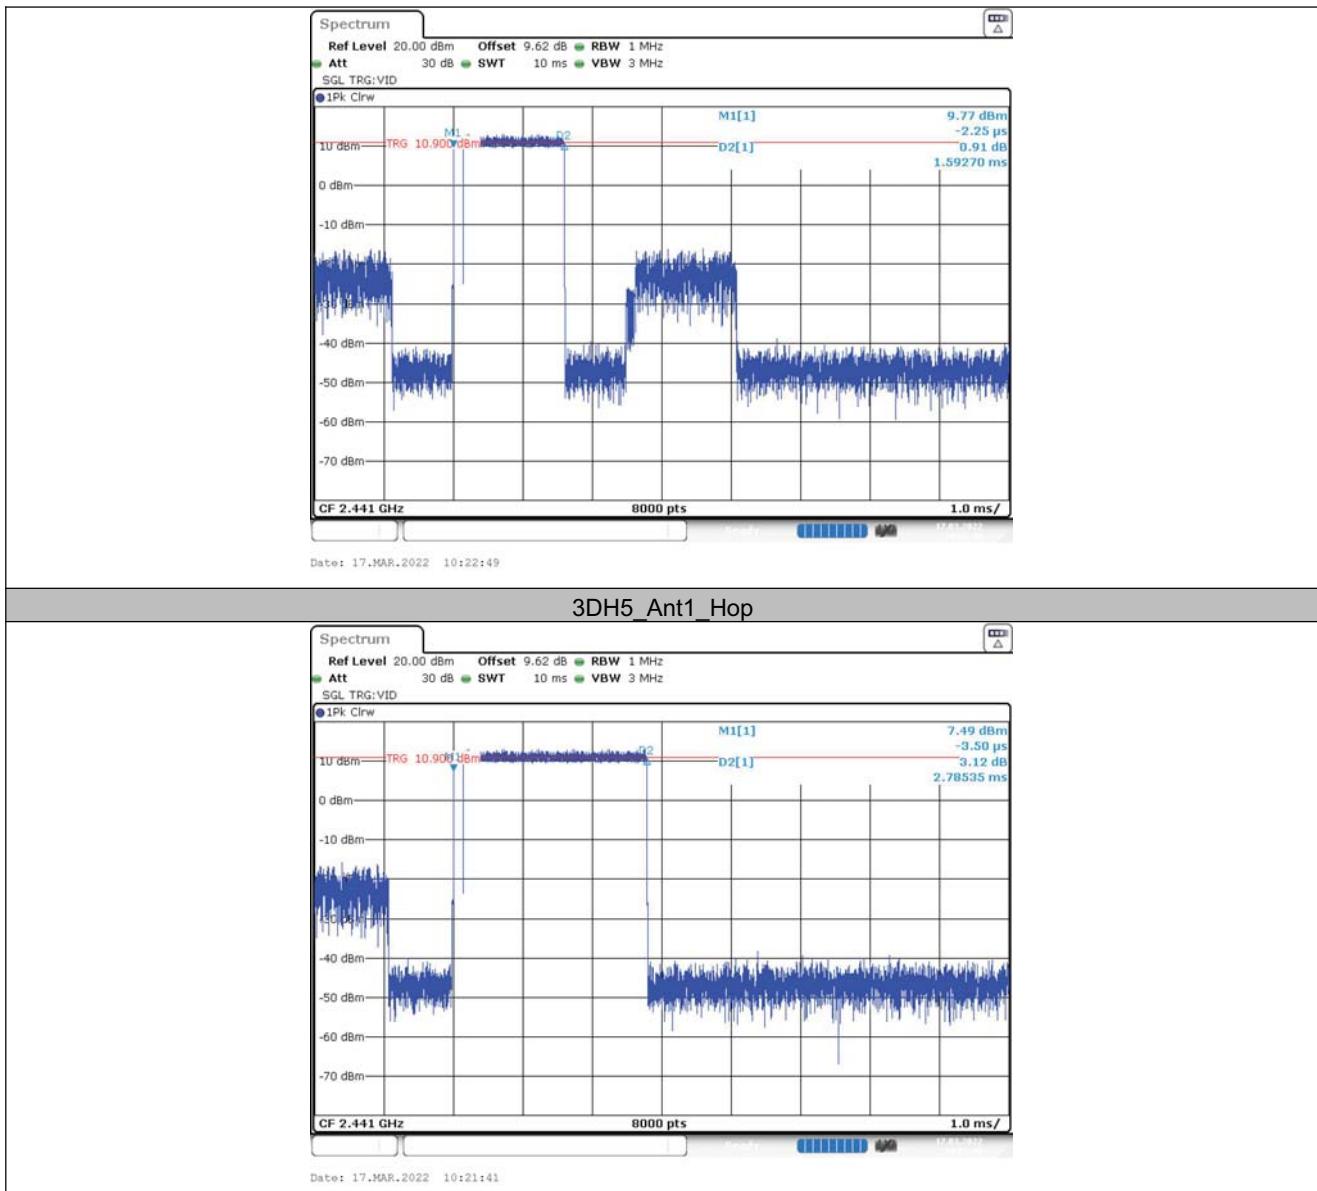




## 6.5 Number of hopping channels

### 6.5.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

### 6.5.2 Test Graphs



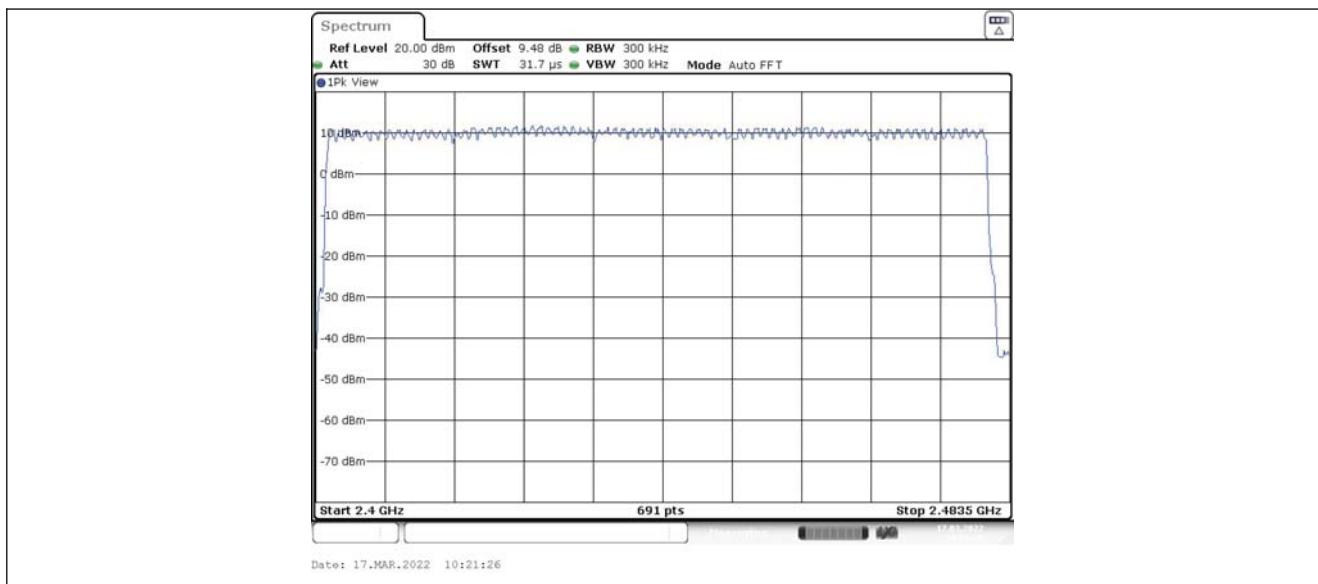



## 6.6 Band edge measurements

### 6.6.1 Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	10.13	-48.6	≤-9.87	PASS
		High	2480	10.49	-48.08	≤-9.51	PASS
		Low	Hop_2402	11.53	-48.24	≤-8.47	PASS
		High	Hop_2480	11.48	-47.61	≤-8.52	PASS
2DH5	Ant1	Low	2402	8.92	-48.47	≤-11.08	PASS
		High	2480	9.44	-47.87	≤-10.56	PASS
		Low	Hop_2402	10.31	-46.98	≤-9.69	PASS
		High	Hop_2480	10.42	-47.03	≤-9.58	PASS
3DH5	Ant1	Low	2402	9.10	-48.97	≤-10.9	PASS
		High	2480	9.59	-47.48	≤-10.41	PASS
		Low	Hop_2402	9.69	-47.74	≤-10.31	PASS

### 6.6.2 Test Graphs







# CVC Testing Technology Co., Ltd.


Test Report No.:FCC2022-0012-RF2

Page 71 of 92

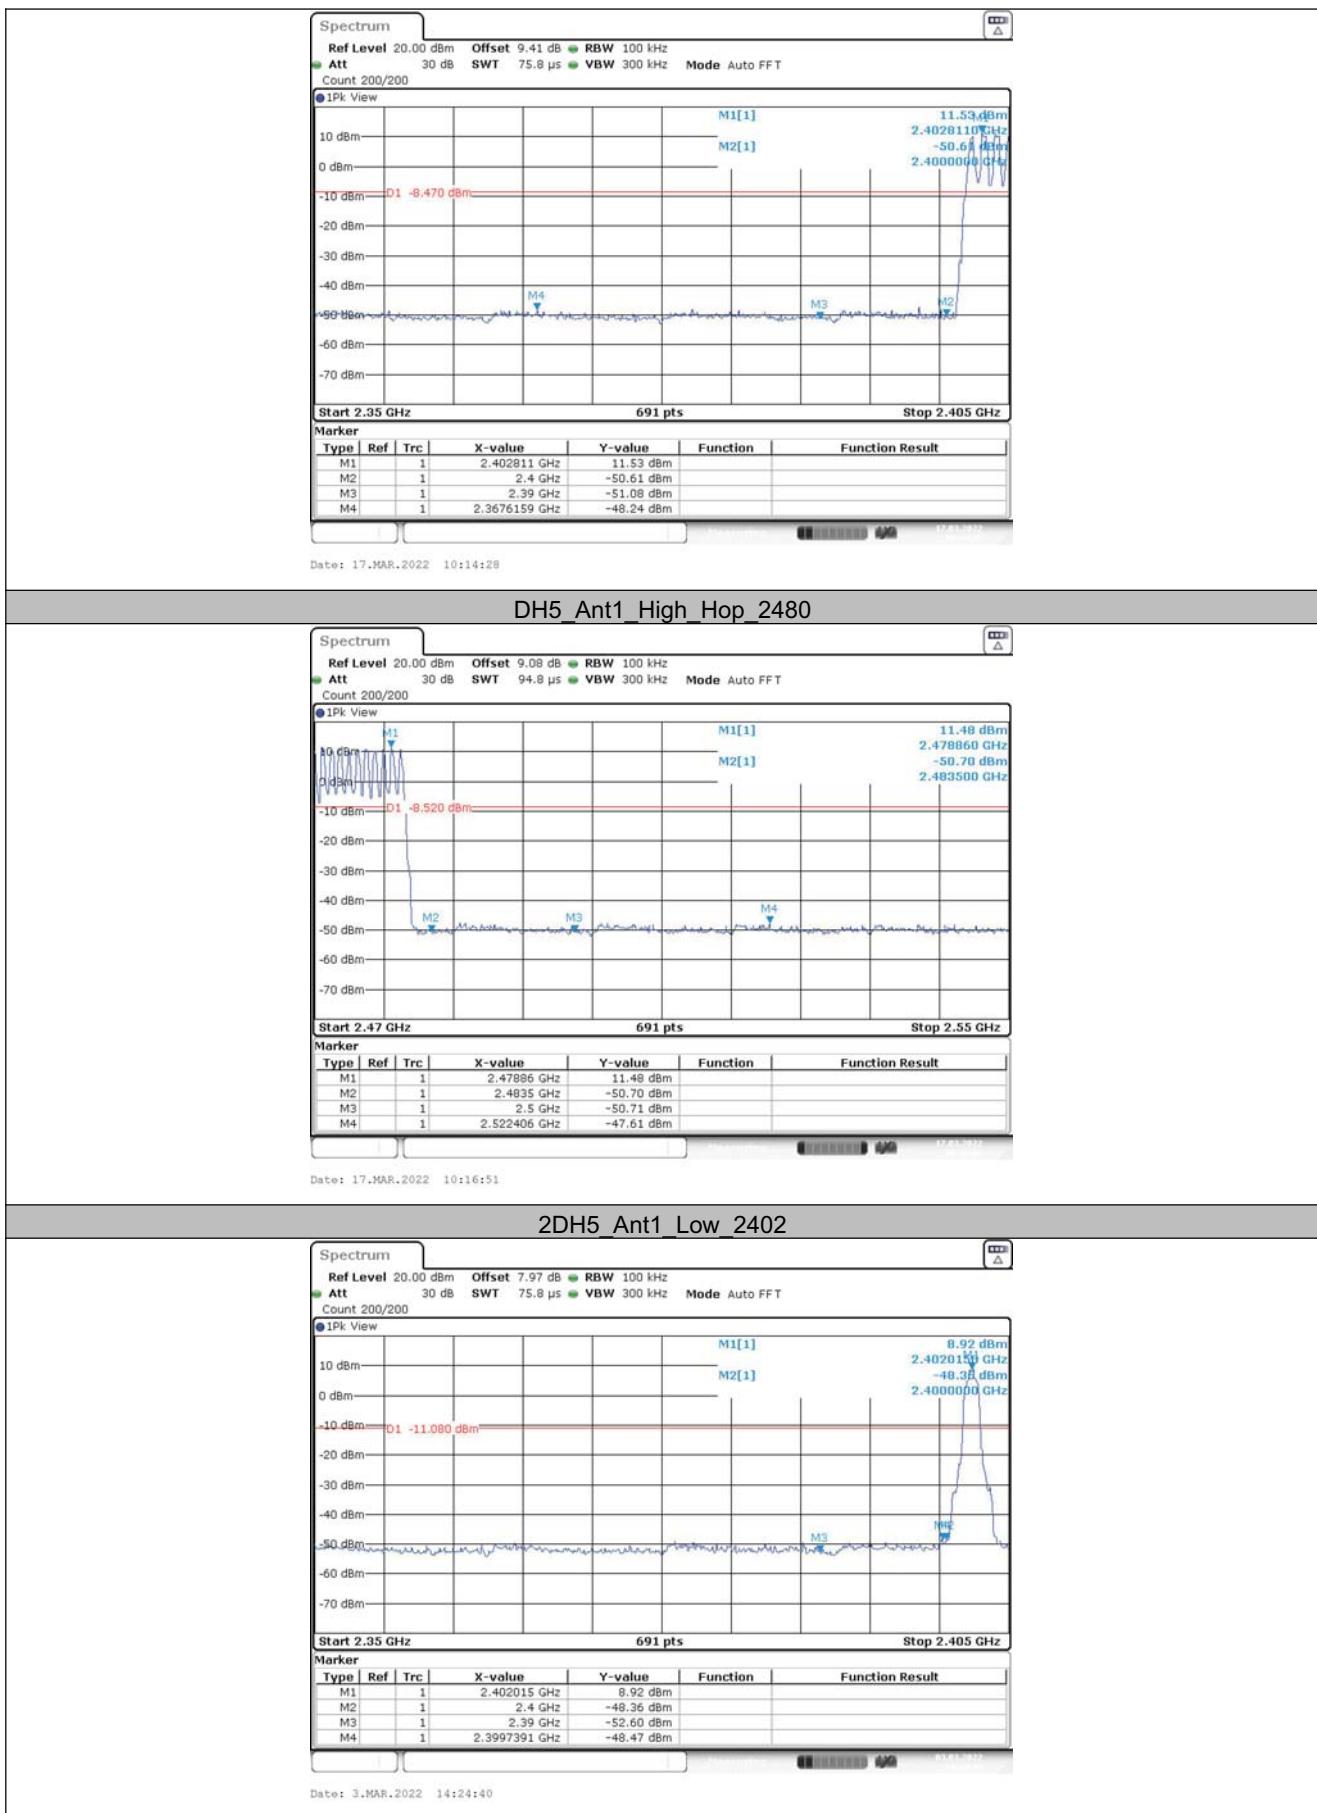



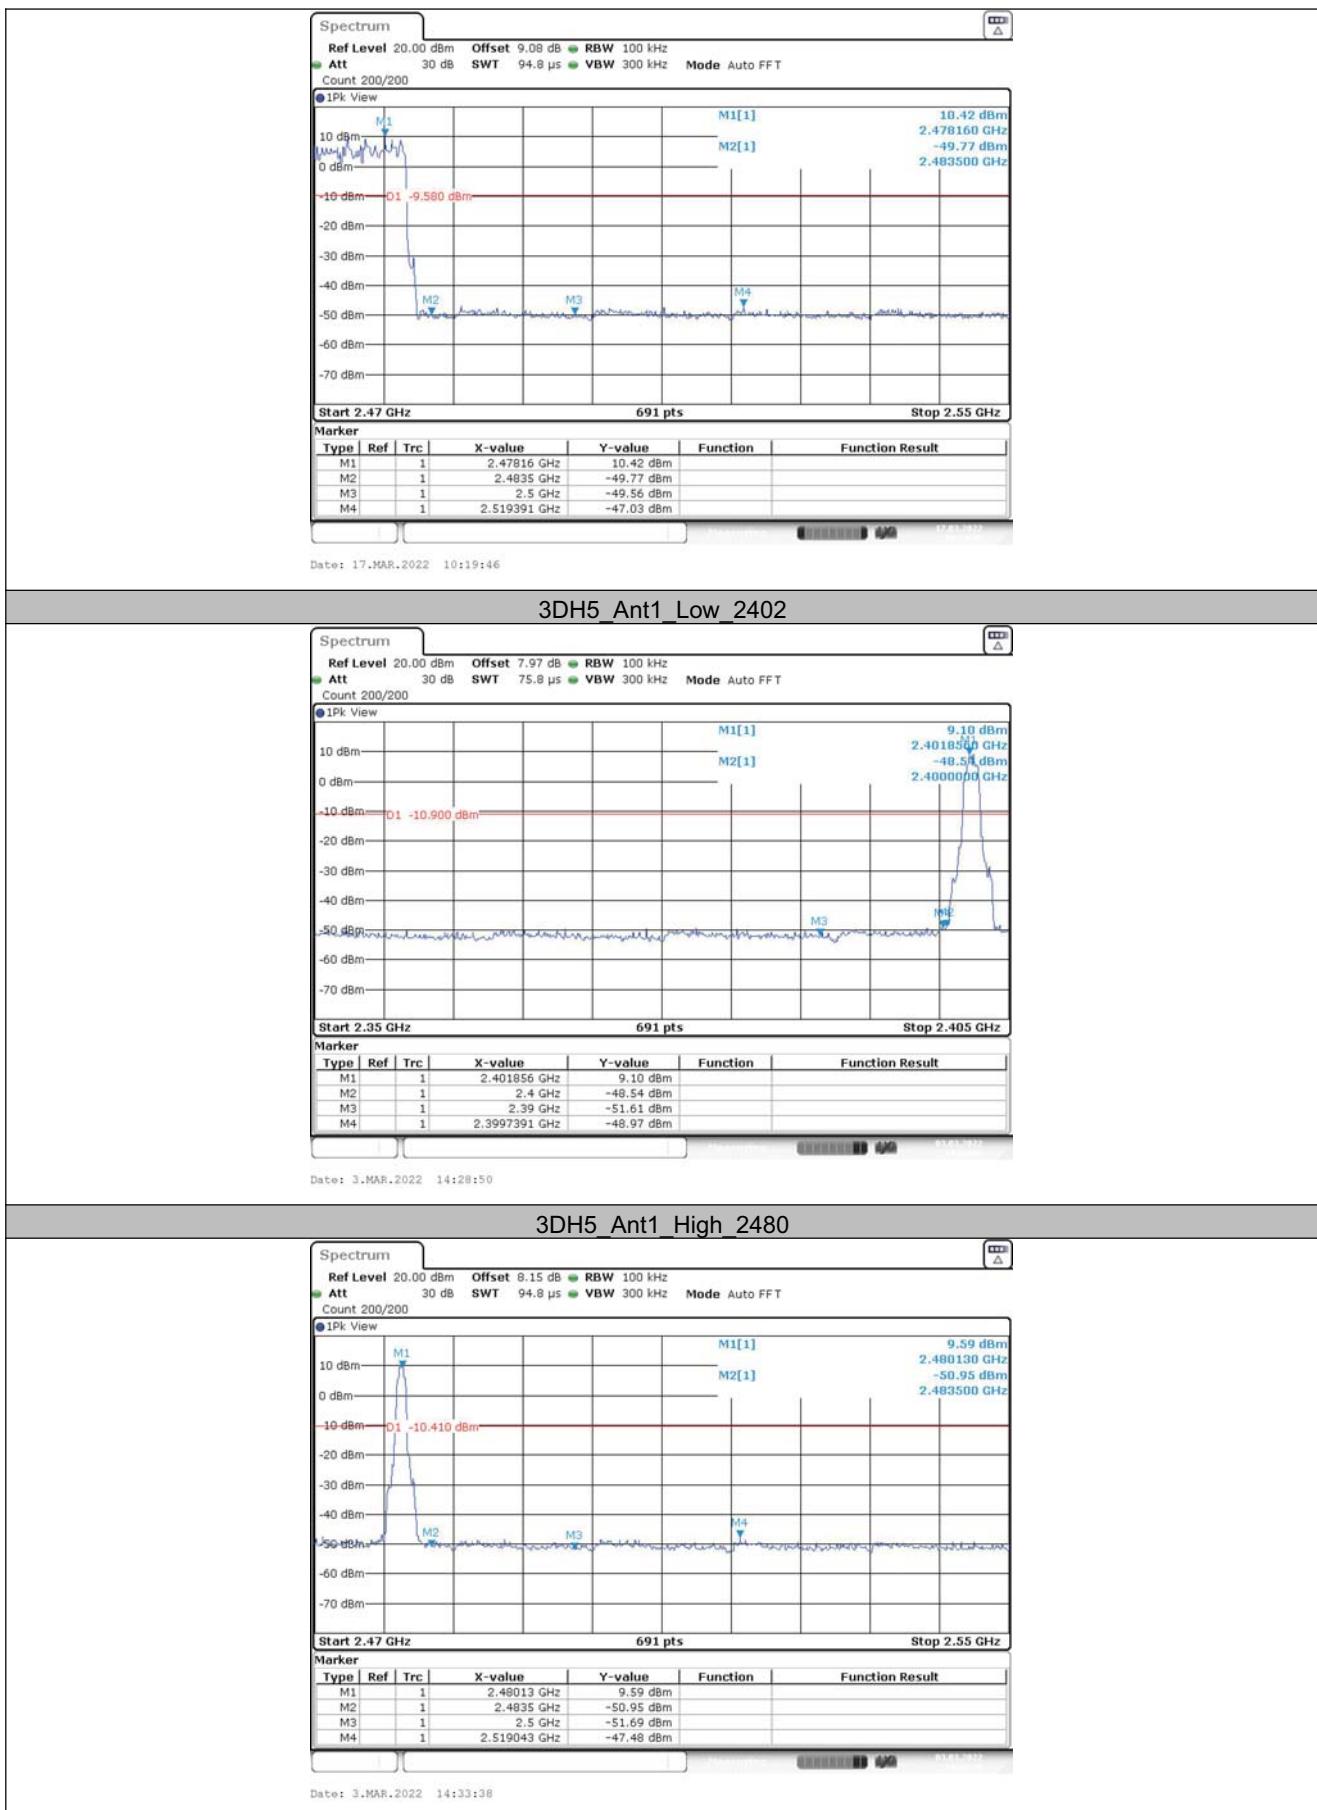

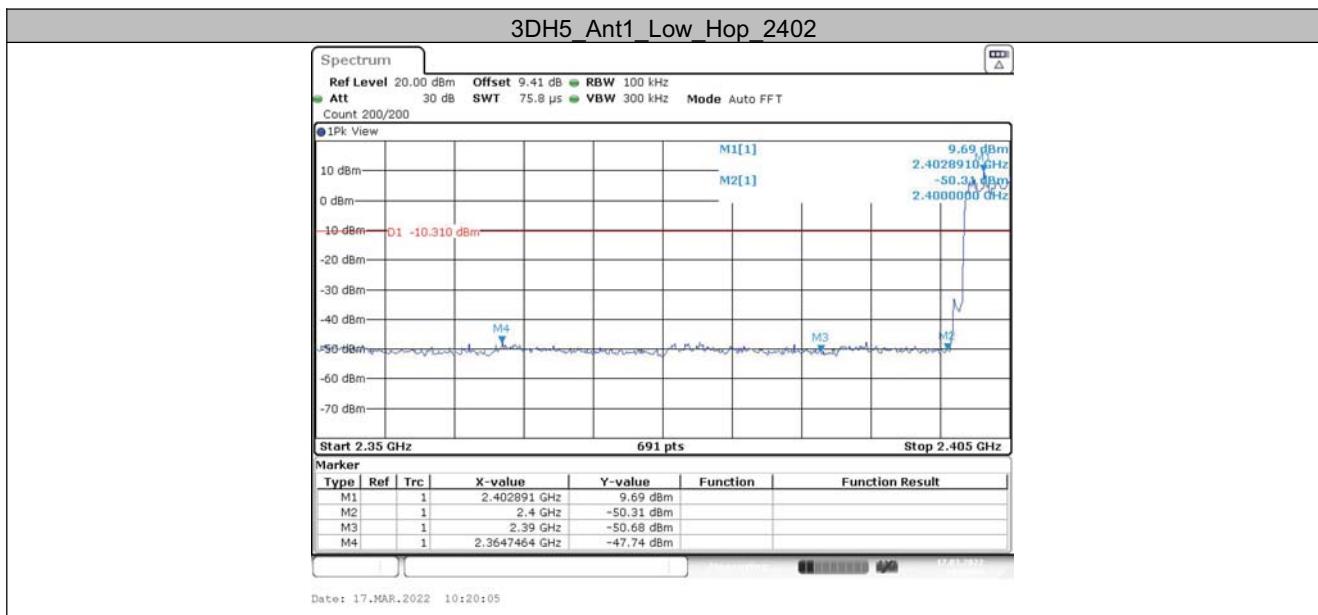





## 6.7 Out of band Emission Measurement


### 6.7.1 Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	11.65	11.65	---	PASS
			30~1000	11.65	-57.75	≤-8.35	PASS
			1000~26500	11.65	-38.84	≤-8.35	PASS
		2441	Reference	11.95	11.95	---	PASS
			30~1000	11.95	-56.66	≤-8.05	PASS
			1000~26500	11.95	-39.08	≤-8.05	PASS
		2480	Reference	11.23	11.23	---	PASS
			30~1000	11.23	-58.47	≤-8.77	PASS
			1000~26500	11.23	-39.06	≤-8.77	PASS
2DH5	Ant1	2402	Reference	10.56	10.56	---	PASS
			30~1000	10.56	-57.75	≤-9.44	PASS
			1000~26500	10.56	-41.13	≤-9.44	PASS
		2441	Reference	10.98	10.98	---	PASS
			30~1000	10.98	-57.45	≤-9.02	PASS
			1000~26500	10.98	-41.1	≤-9.02	PASS
		2480	Reference	10.26	10.26	---	PASS
			30~1000	10.26	-58.37	≤-9.74	PASS
			1000~26500	10.26	-41.05	≤-9.74	PASS
3DH5	Ant1	2402	Reference	10.59	10.59	---	PASS
			30~1000	10.59	-57.46	≤-9.41	PASS
			1000~26500	10.59	-41.38	≤-9.41	PASS
		2441	Reference	11.02	11.02	---	PASS
			30~1000	11.02	-57.78	≤-8.98	PASS
			1000~26500	11.02	-40.87	≤-8.98	PASS
		2480	Reference	10.28	10.28	---	PASS
			30~1000	10.28	-58.76	≤-9.72	PASS
			1000~26500	10.28	-42.14	≤-9.72	PASS


### 6.7.1 Test Graphs

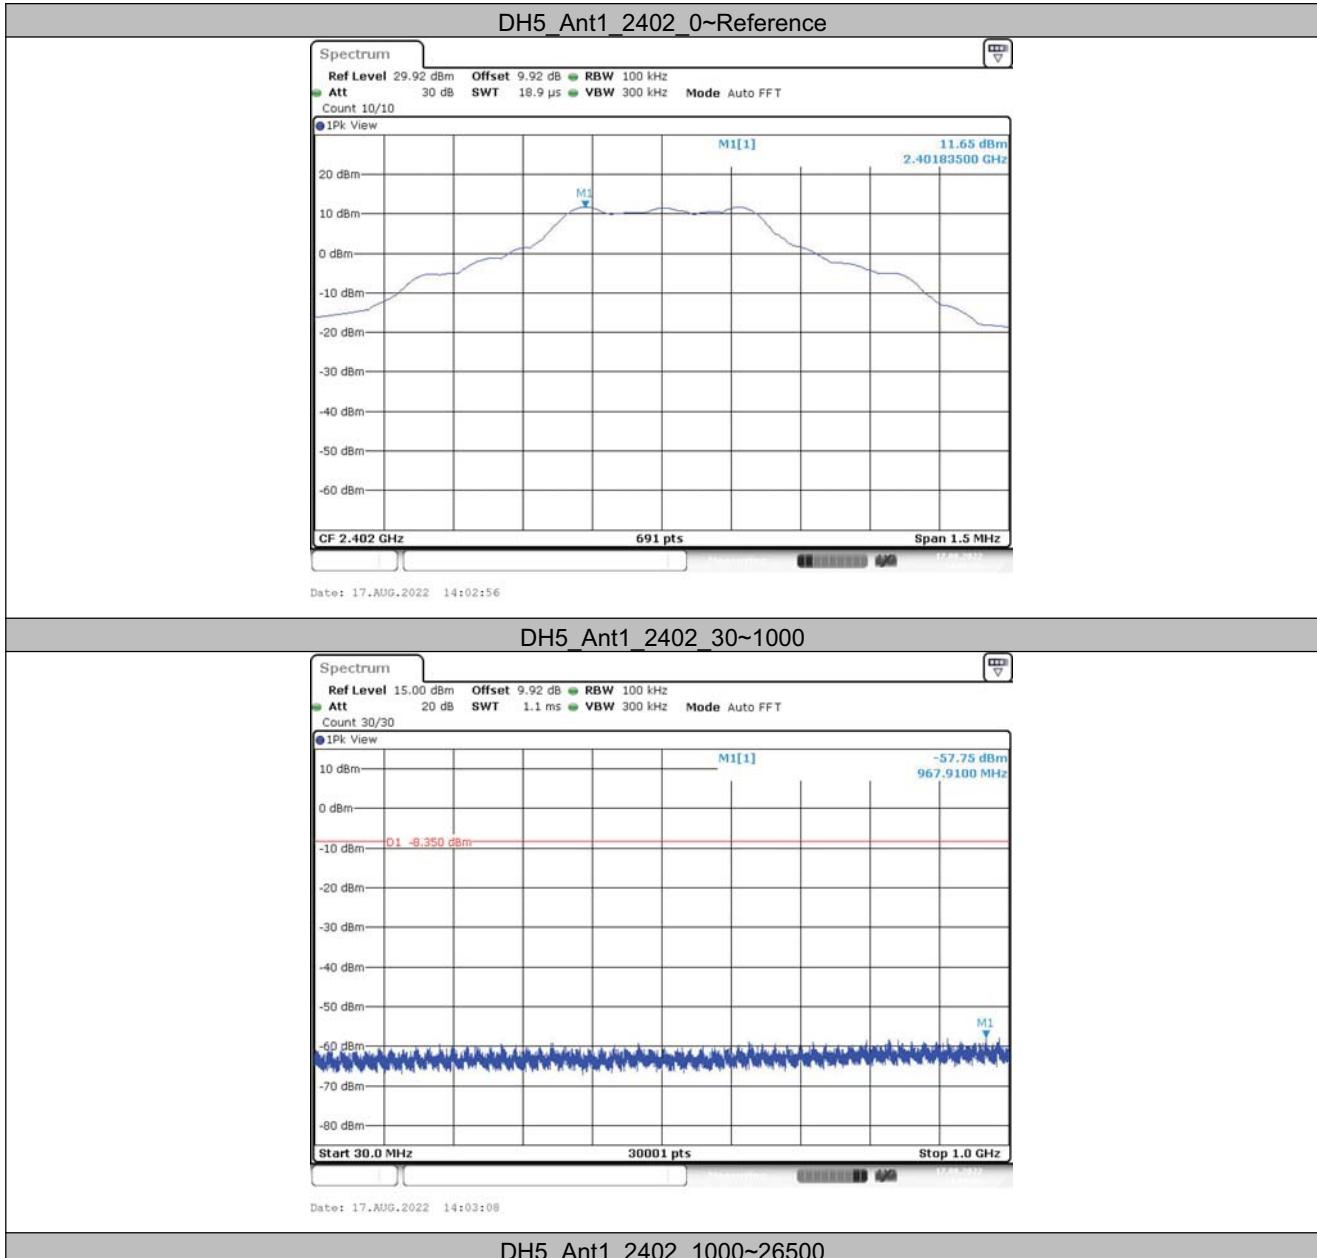


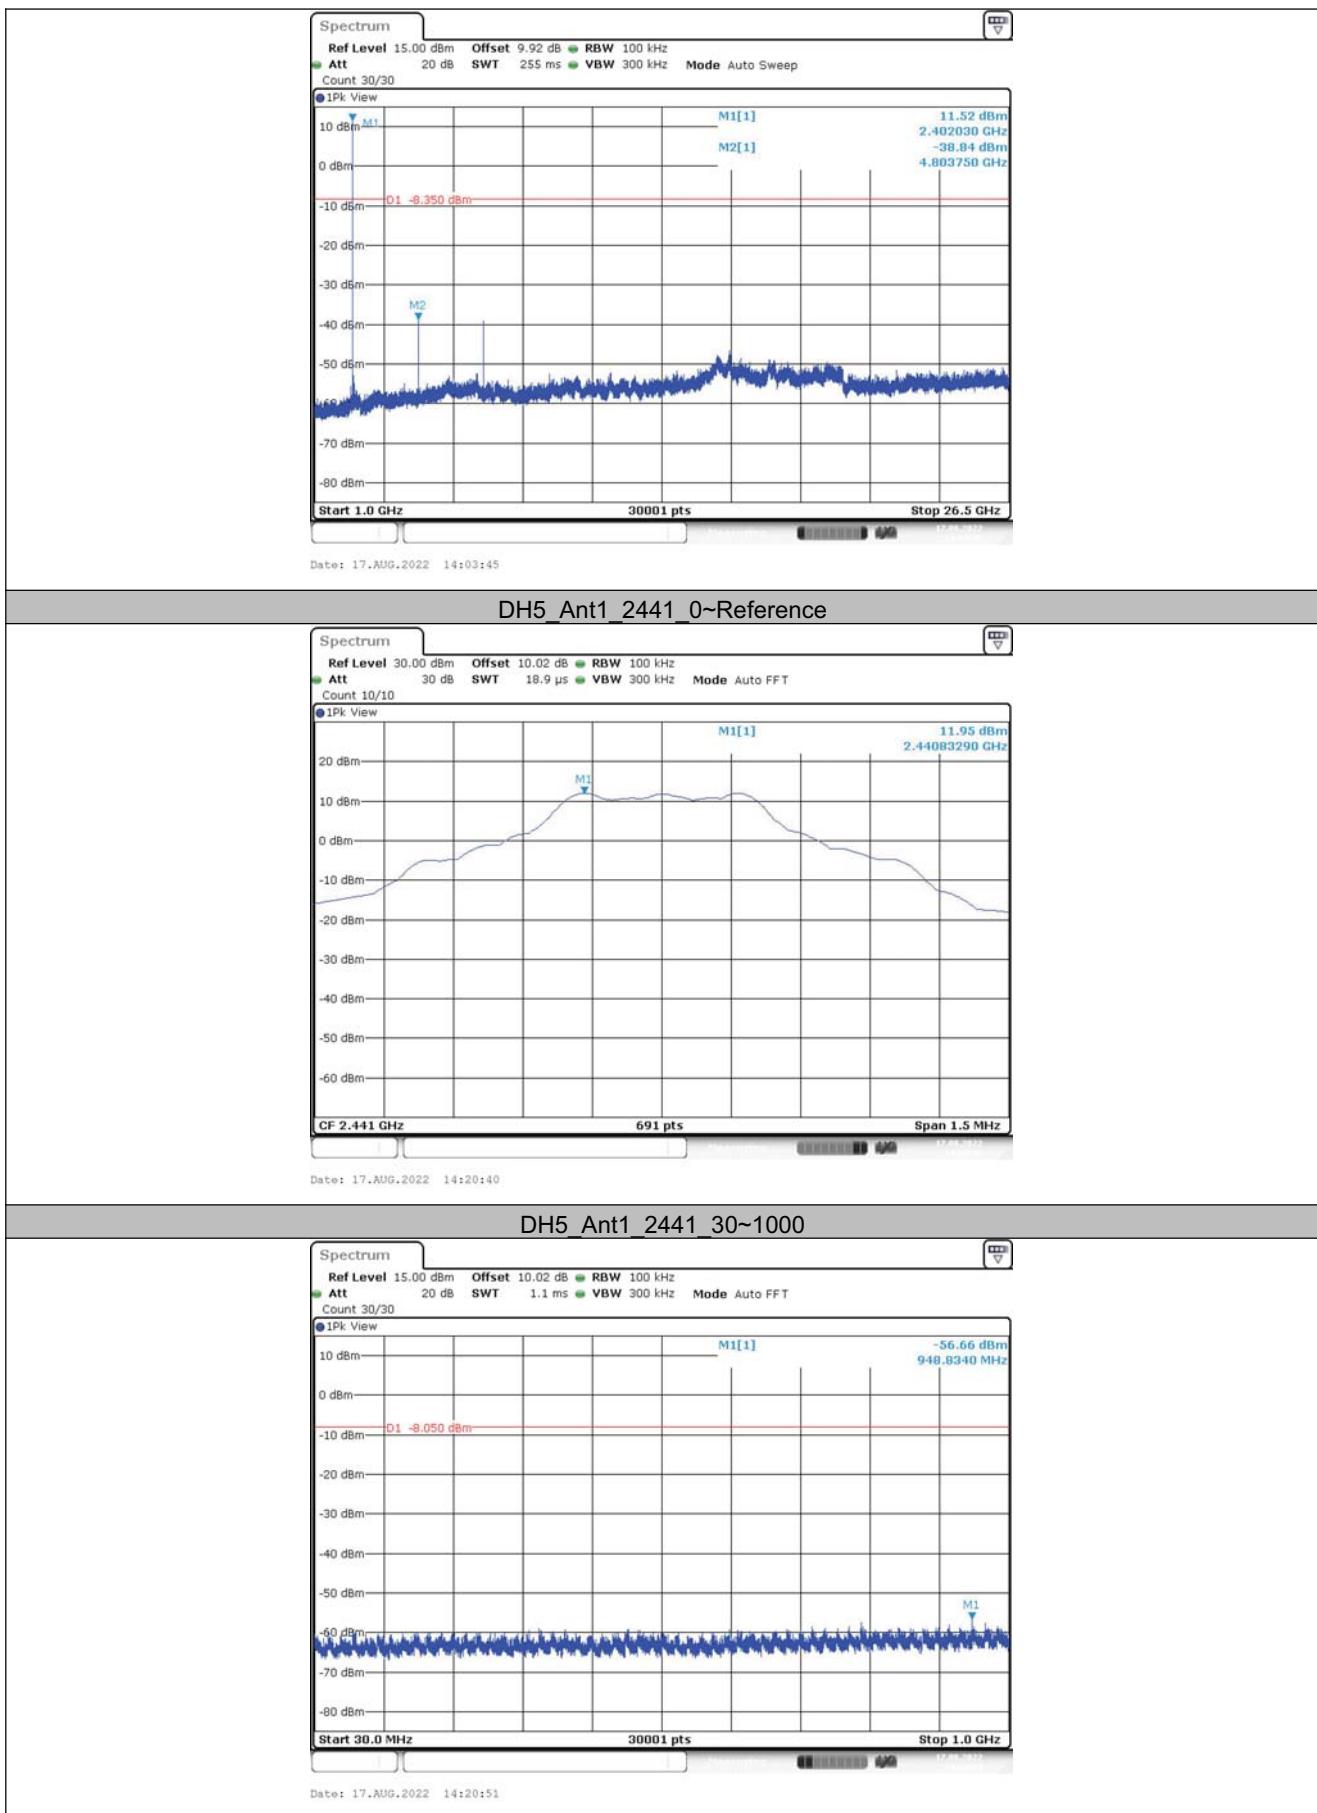


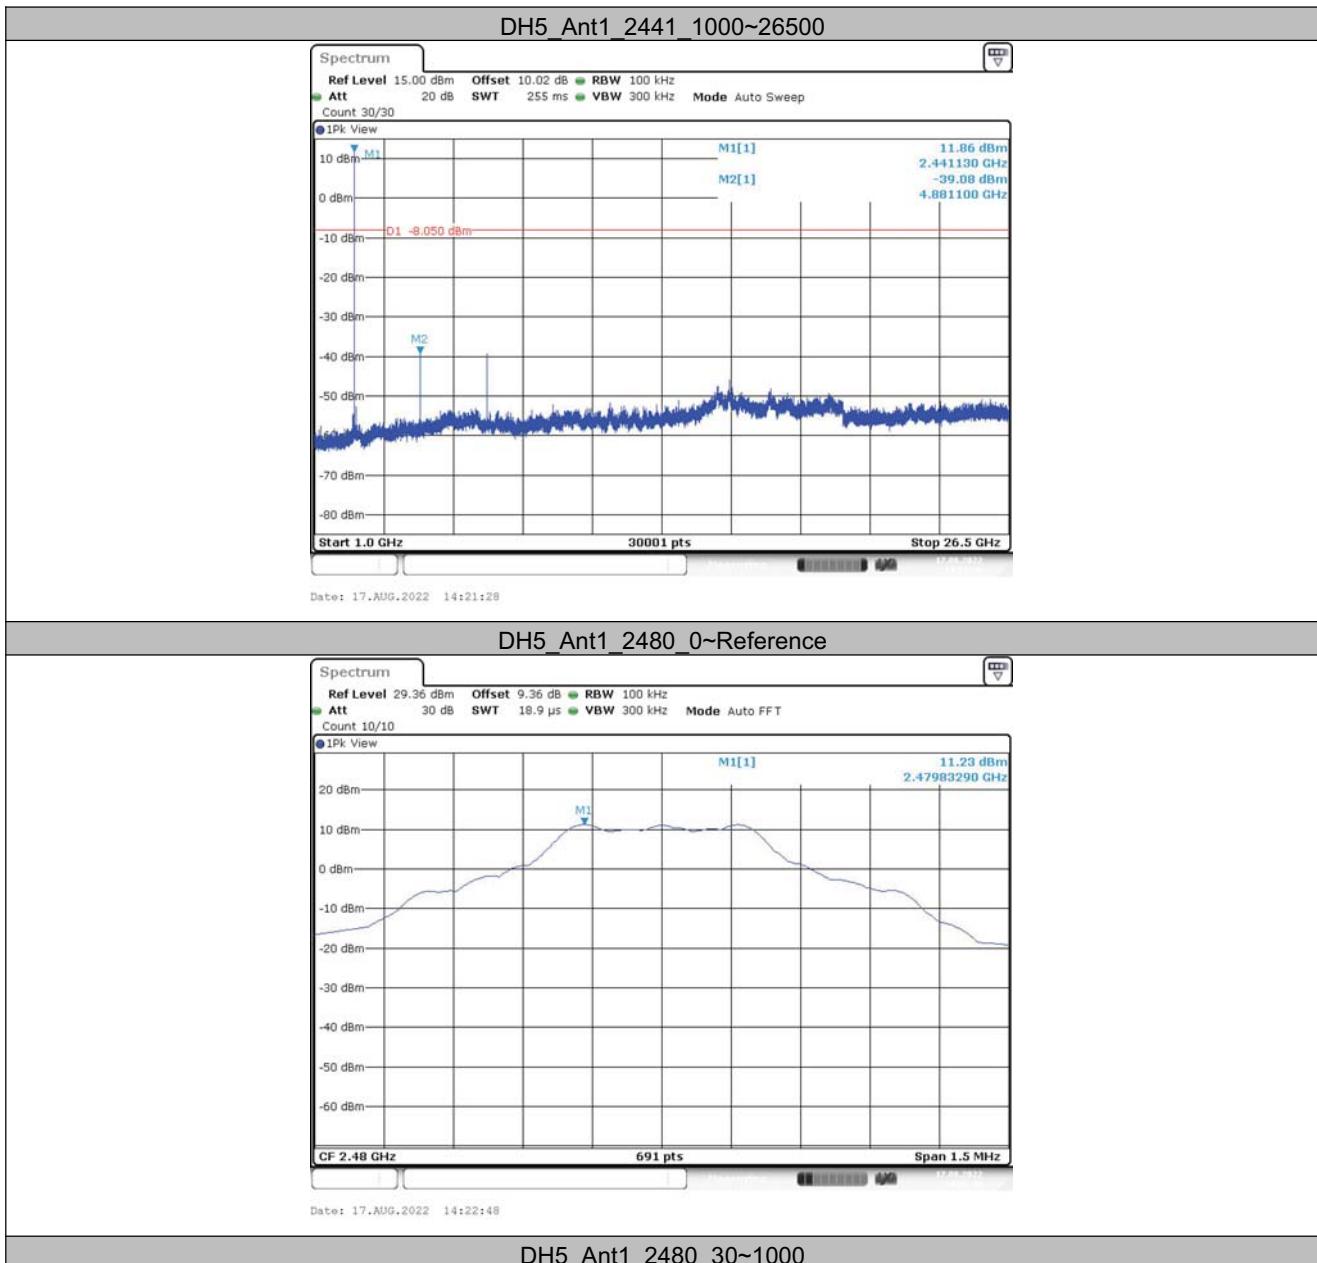


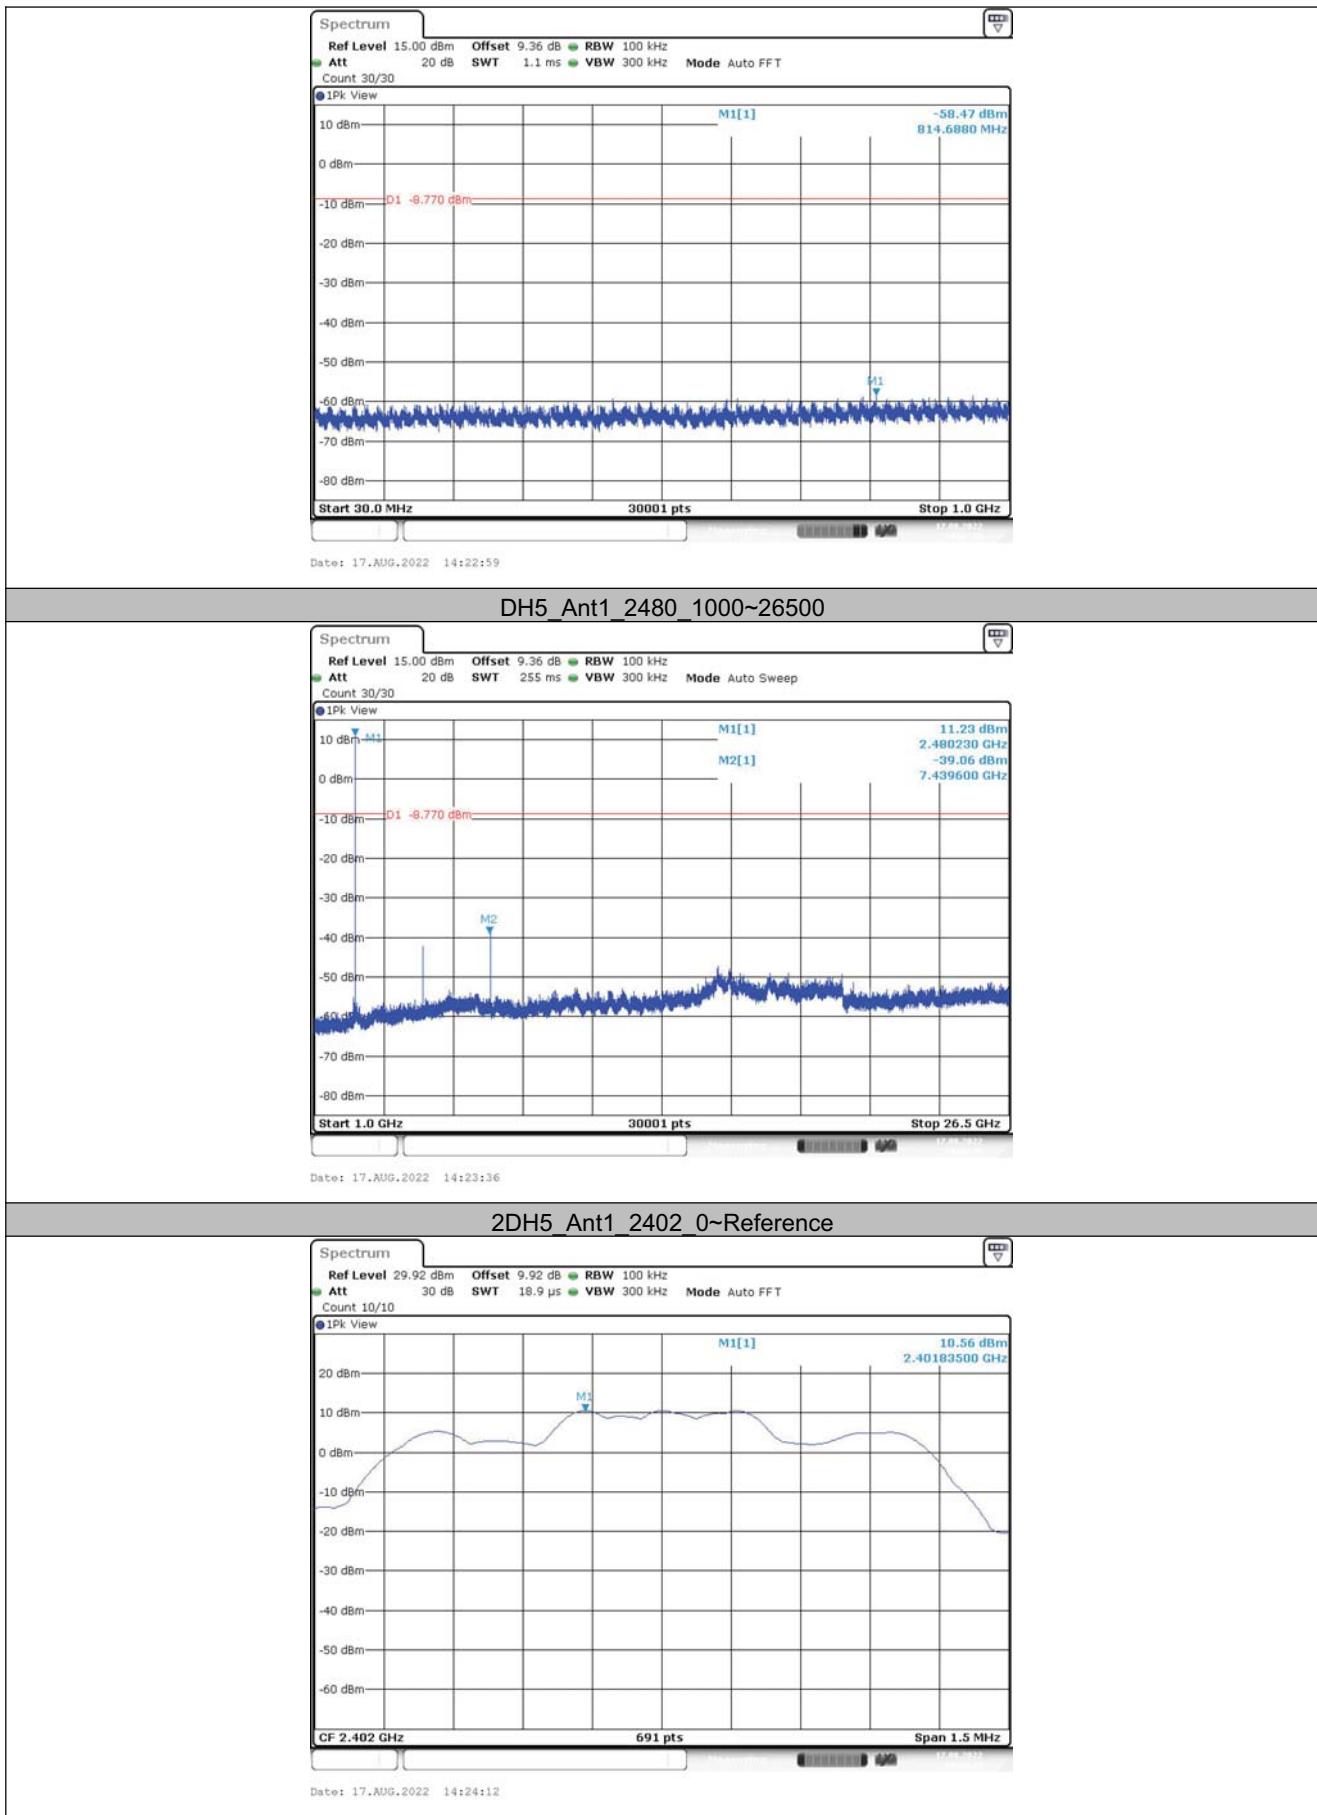


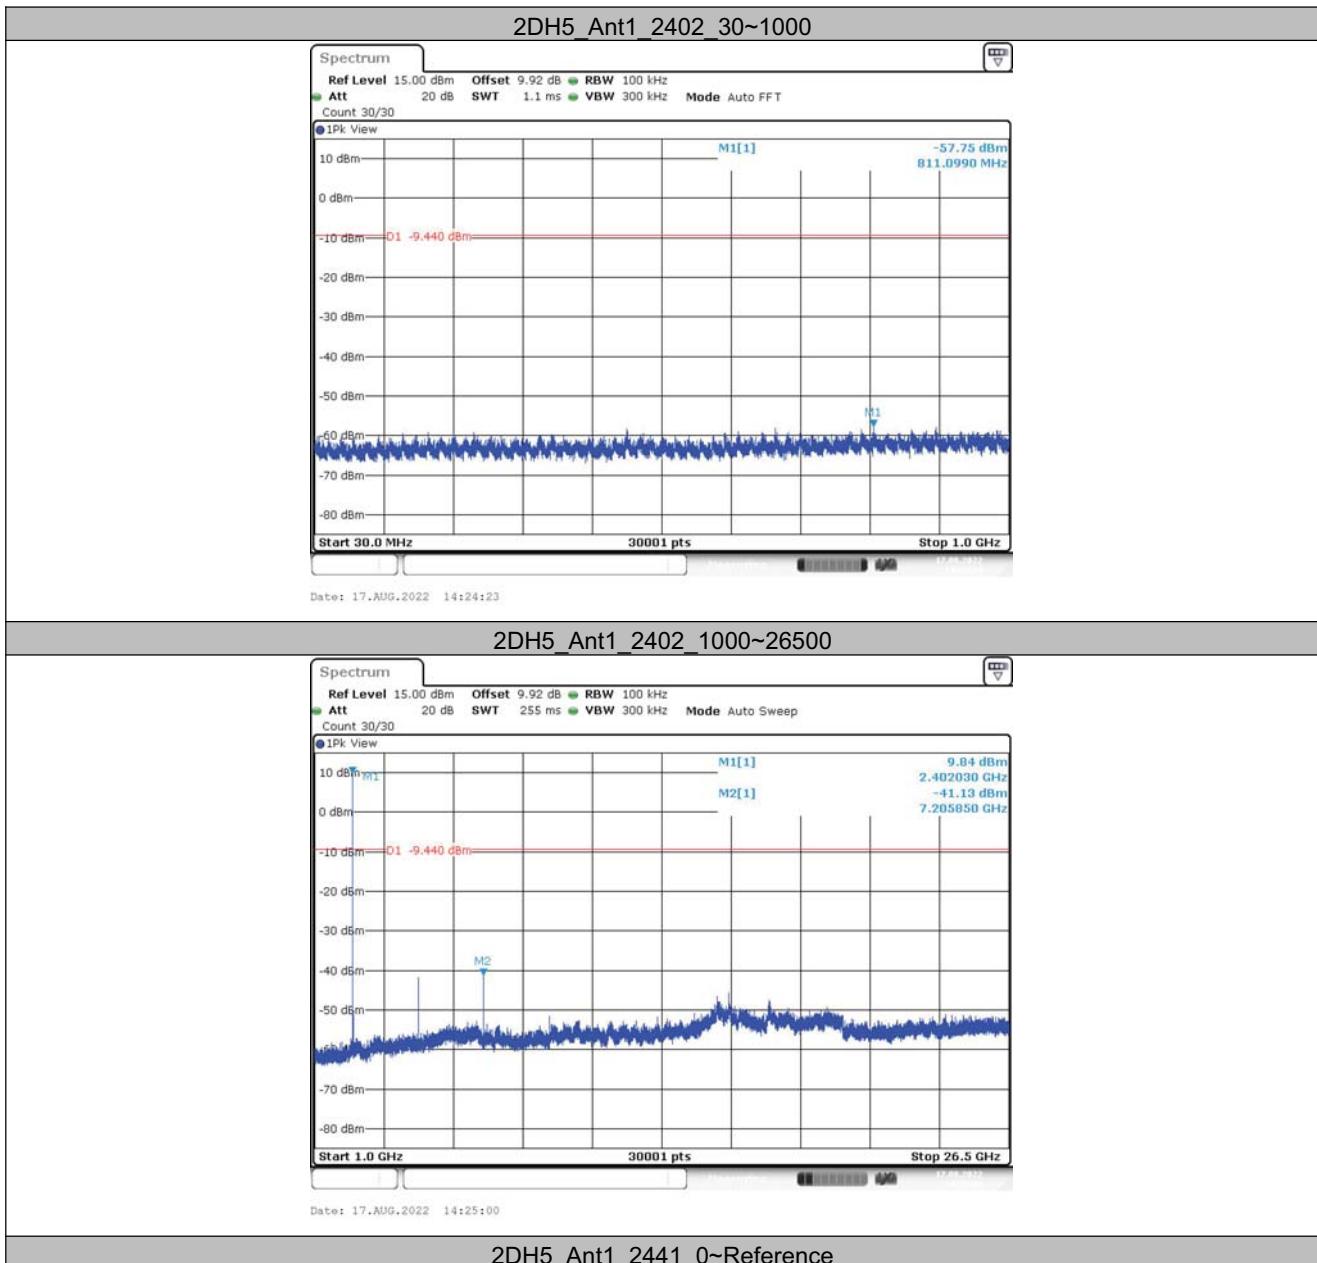


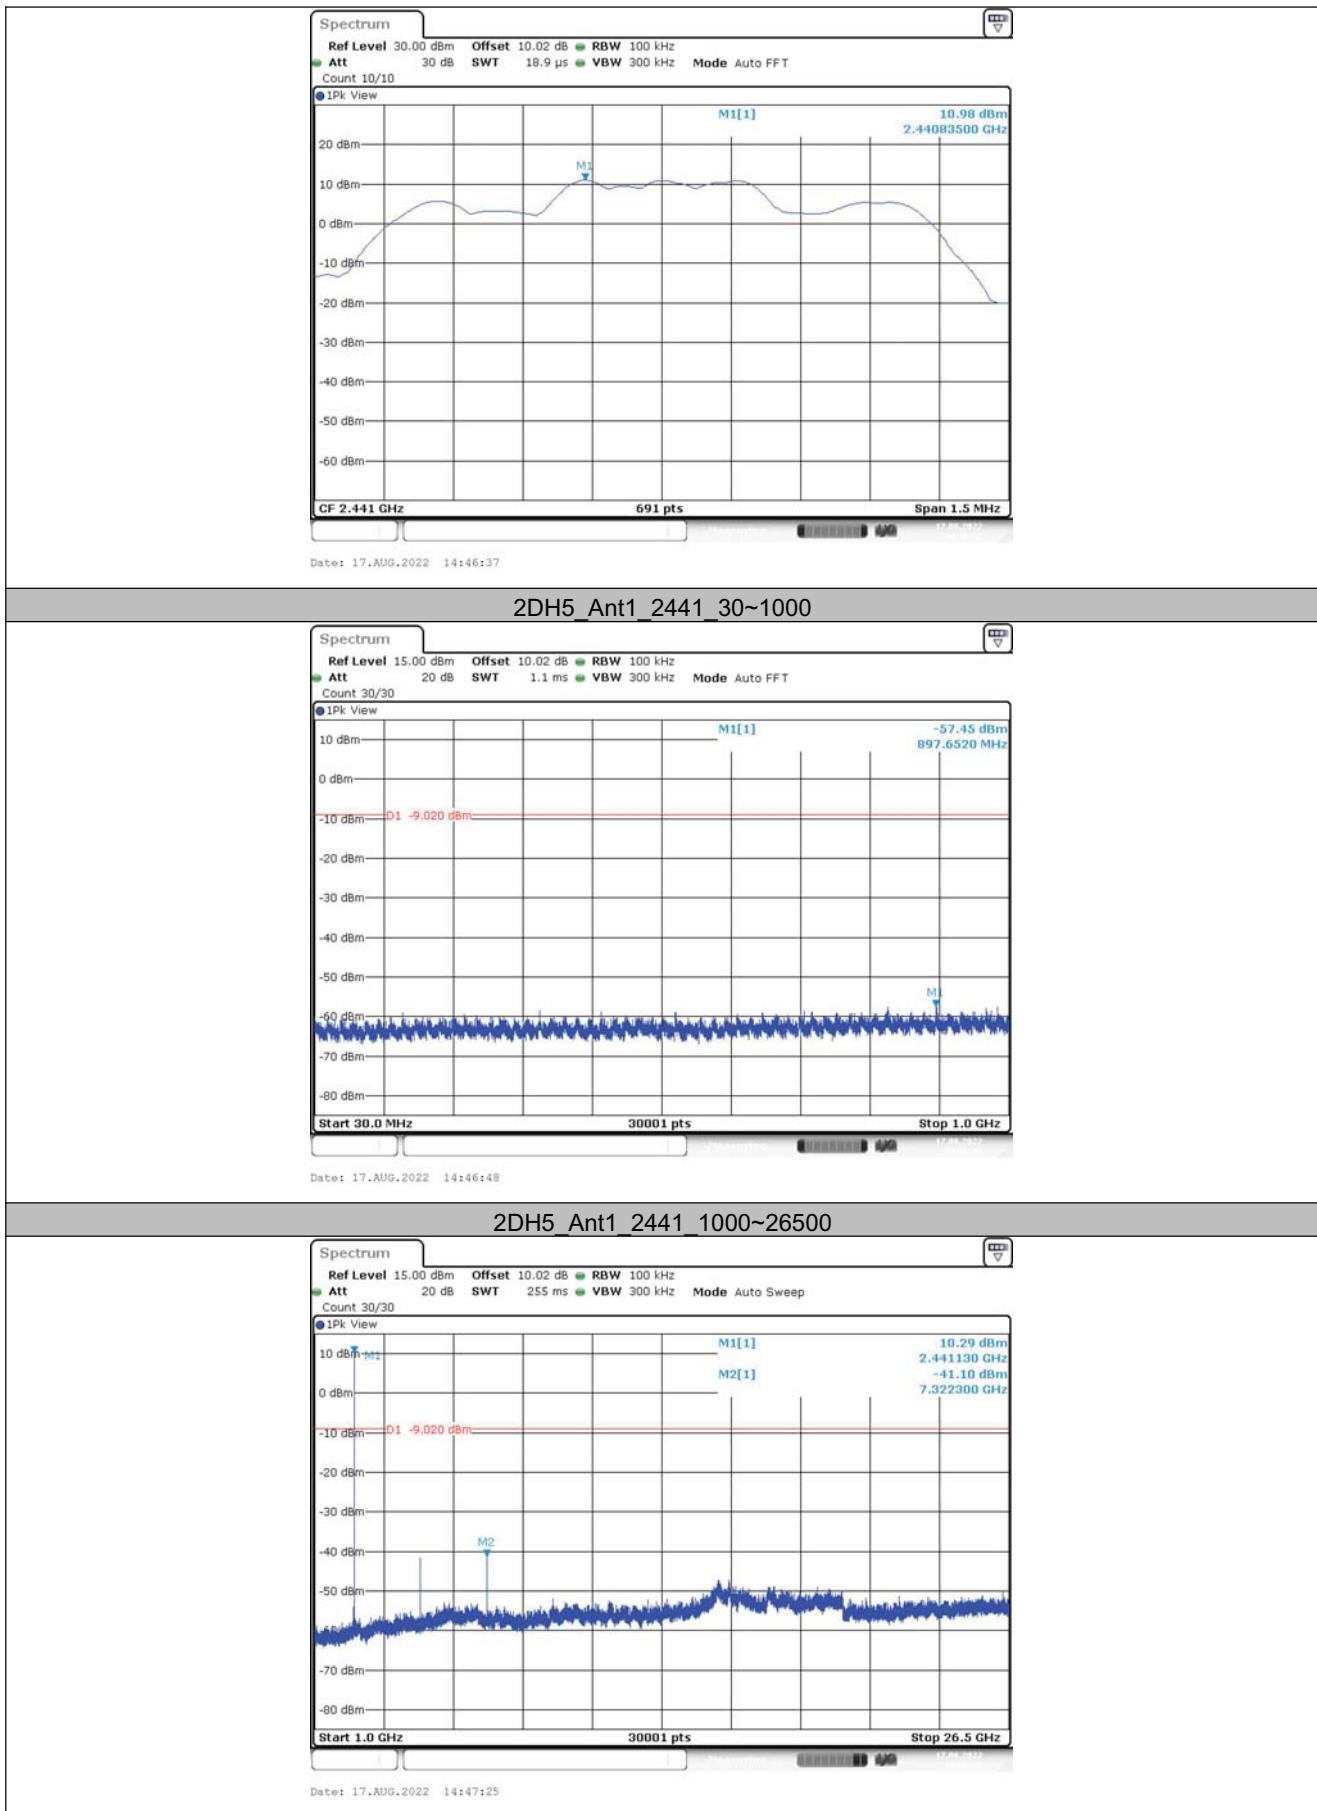


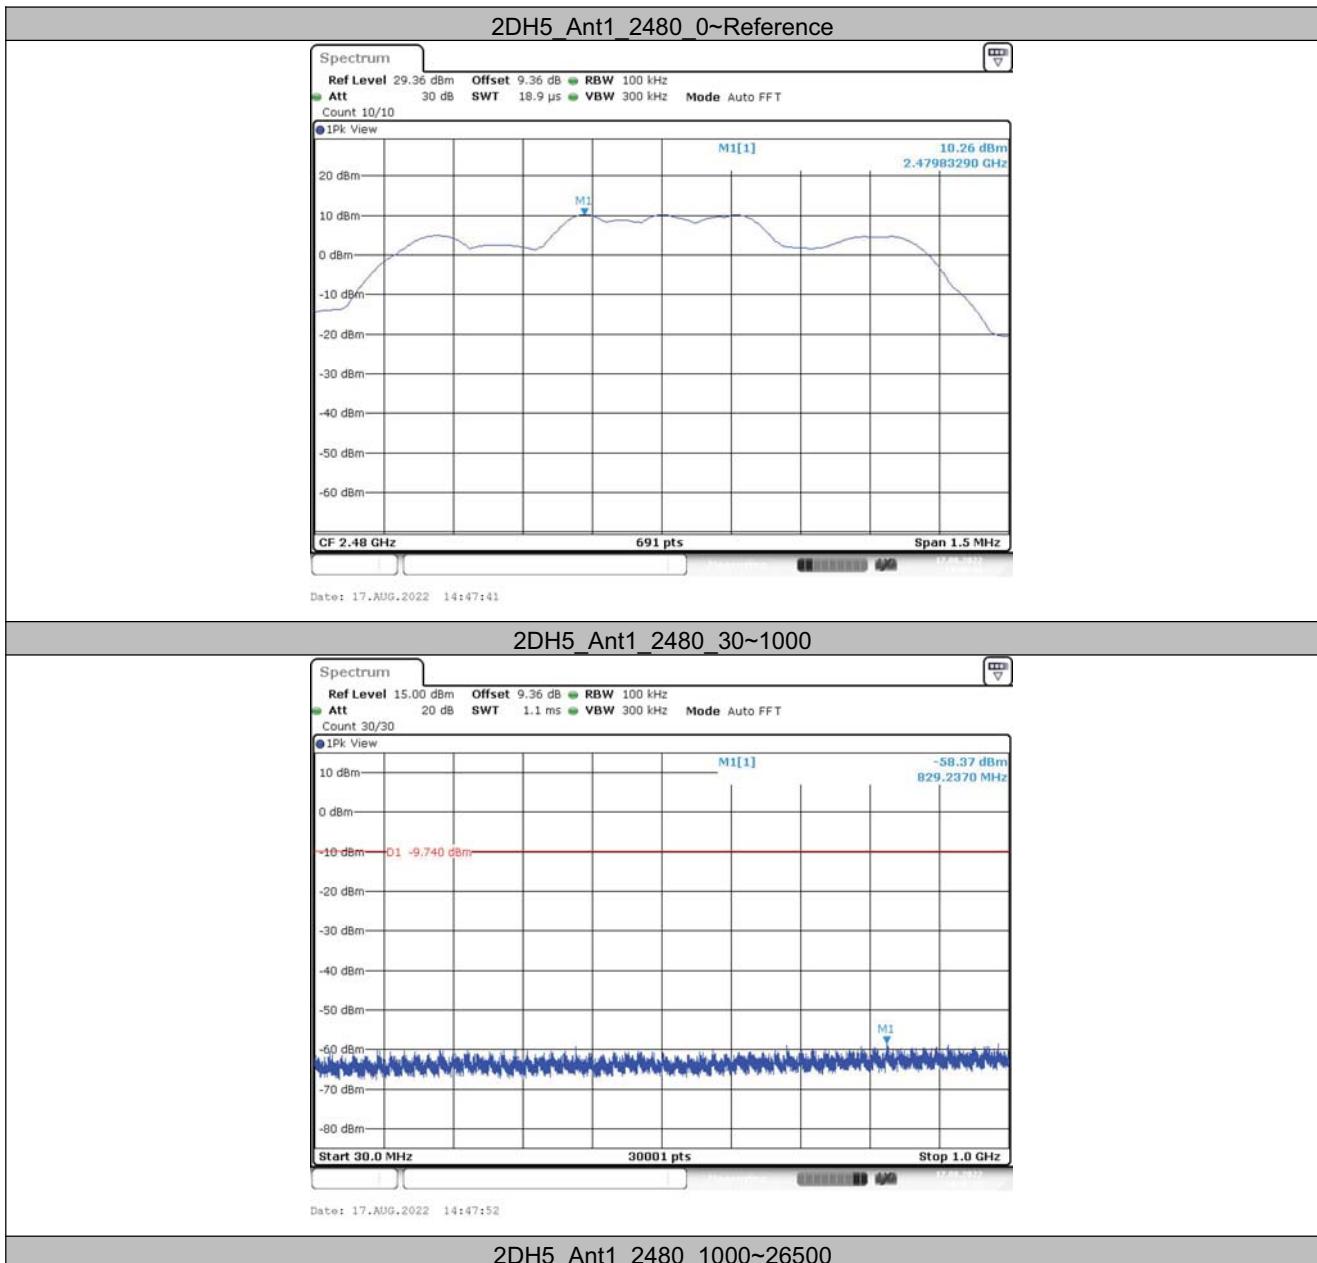

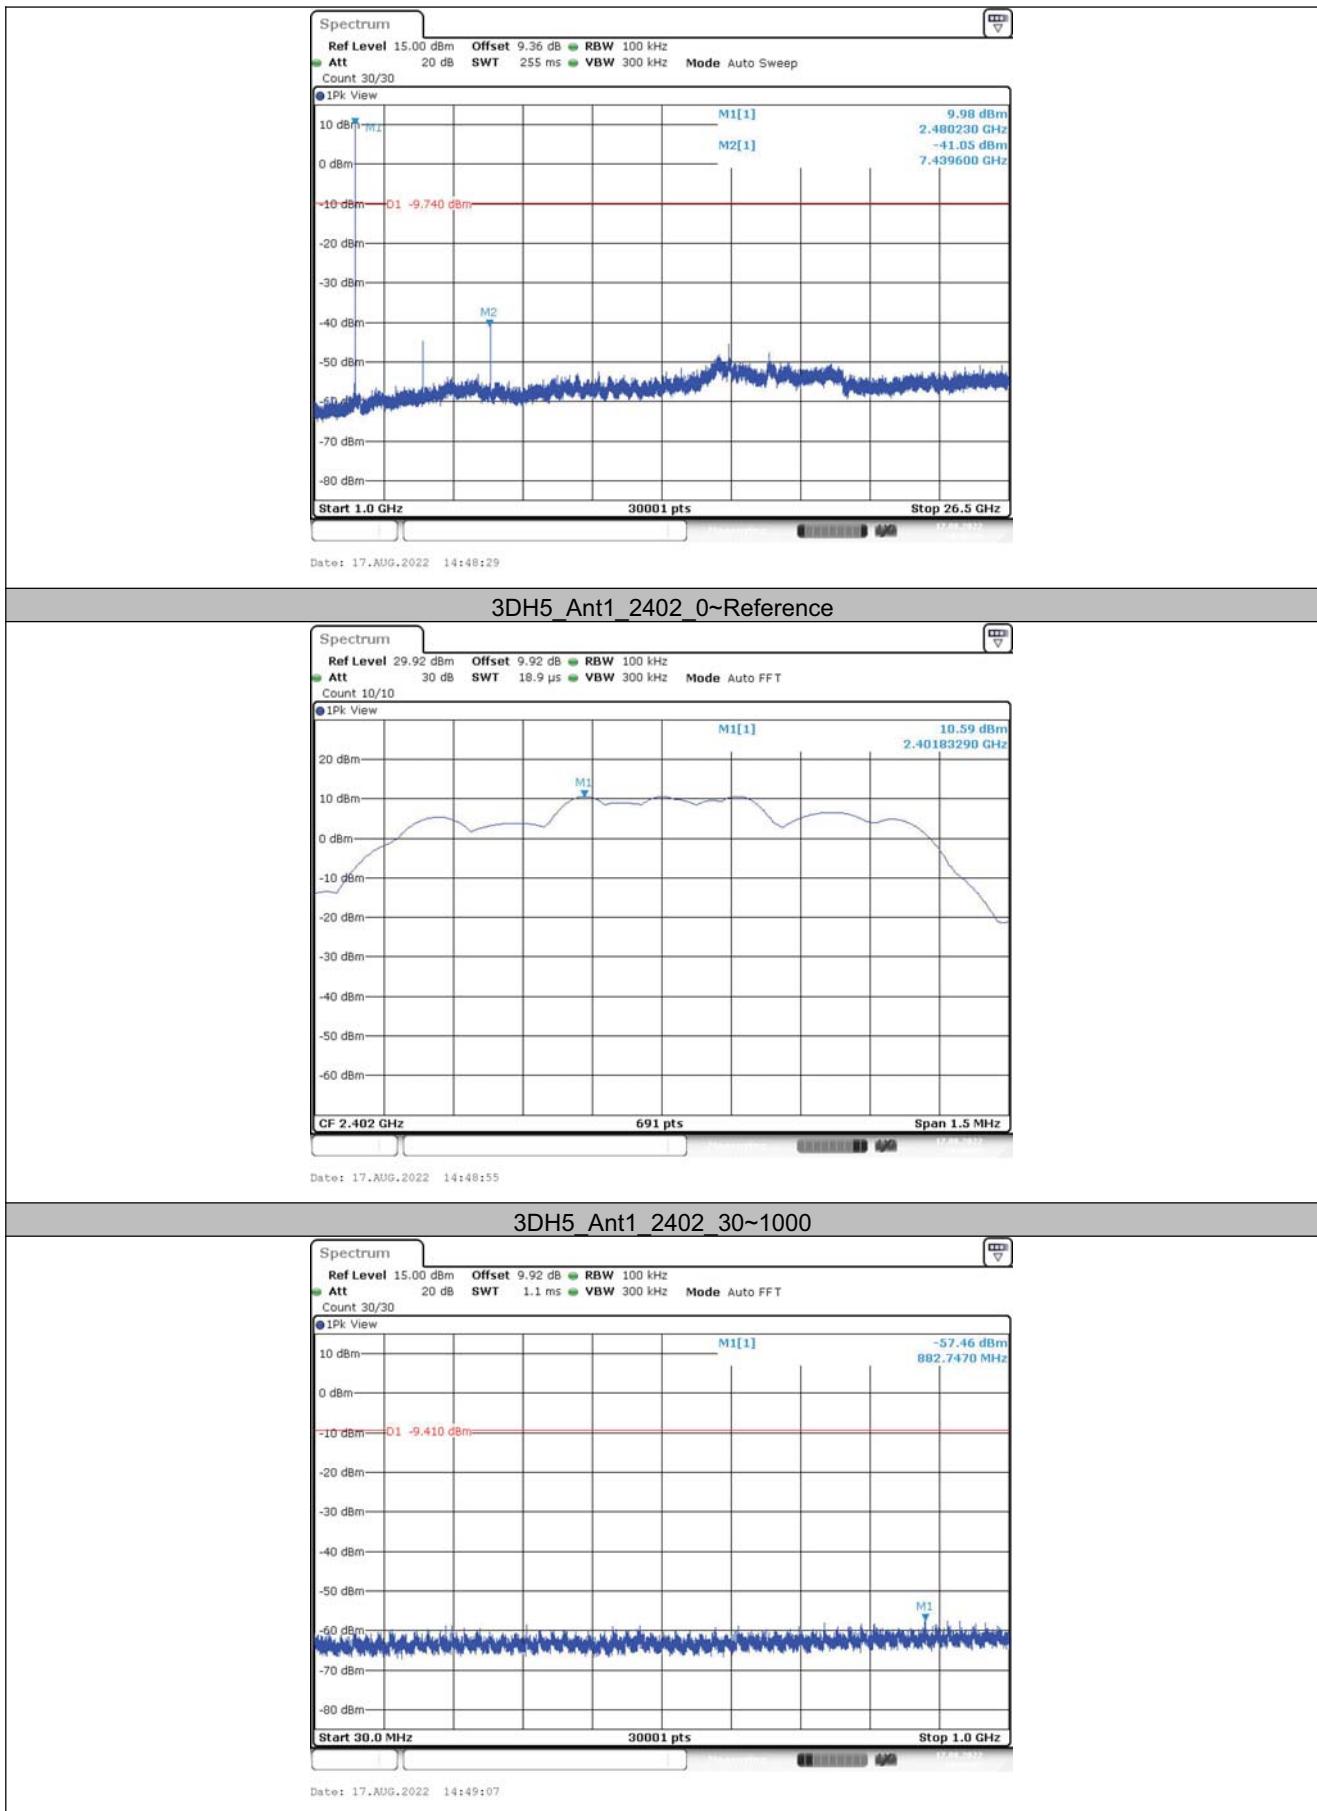

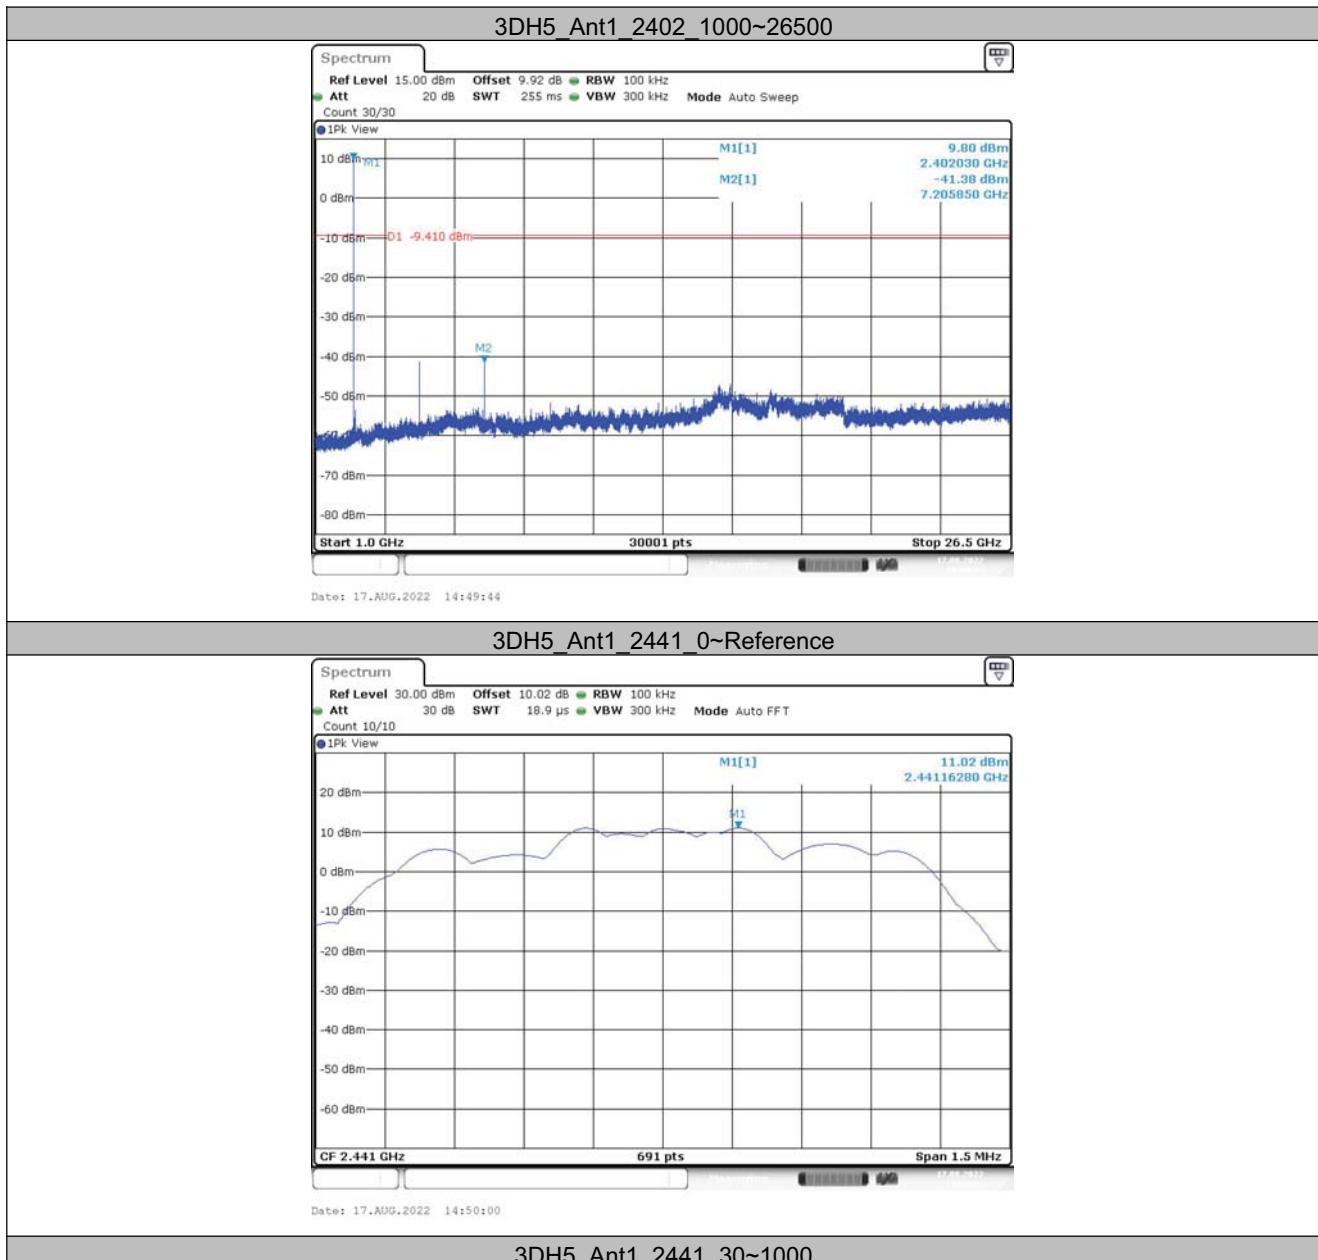

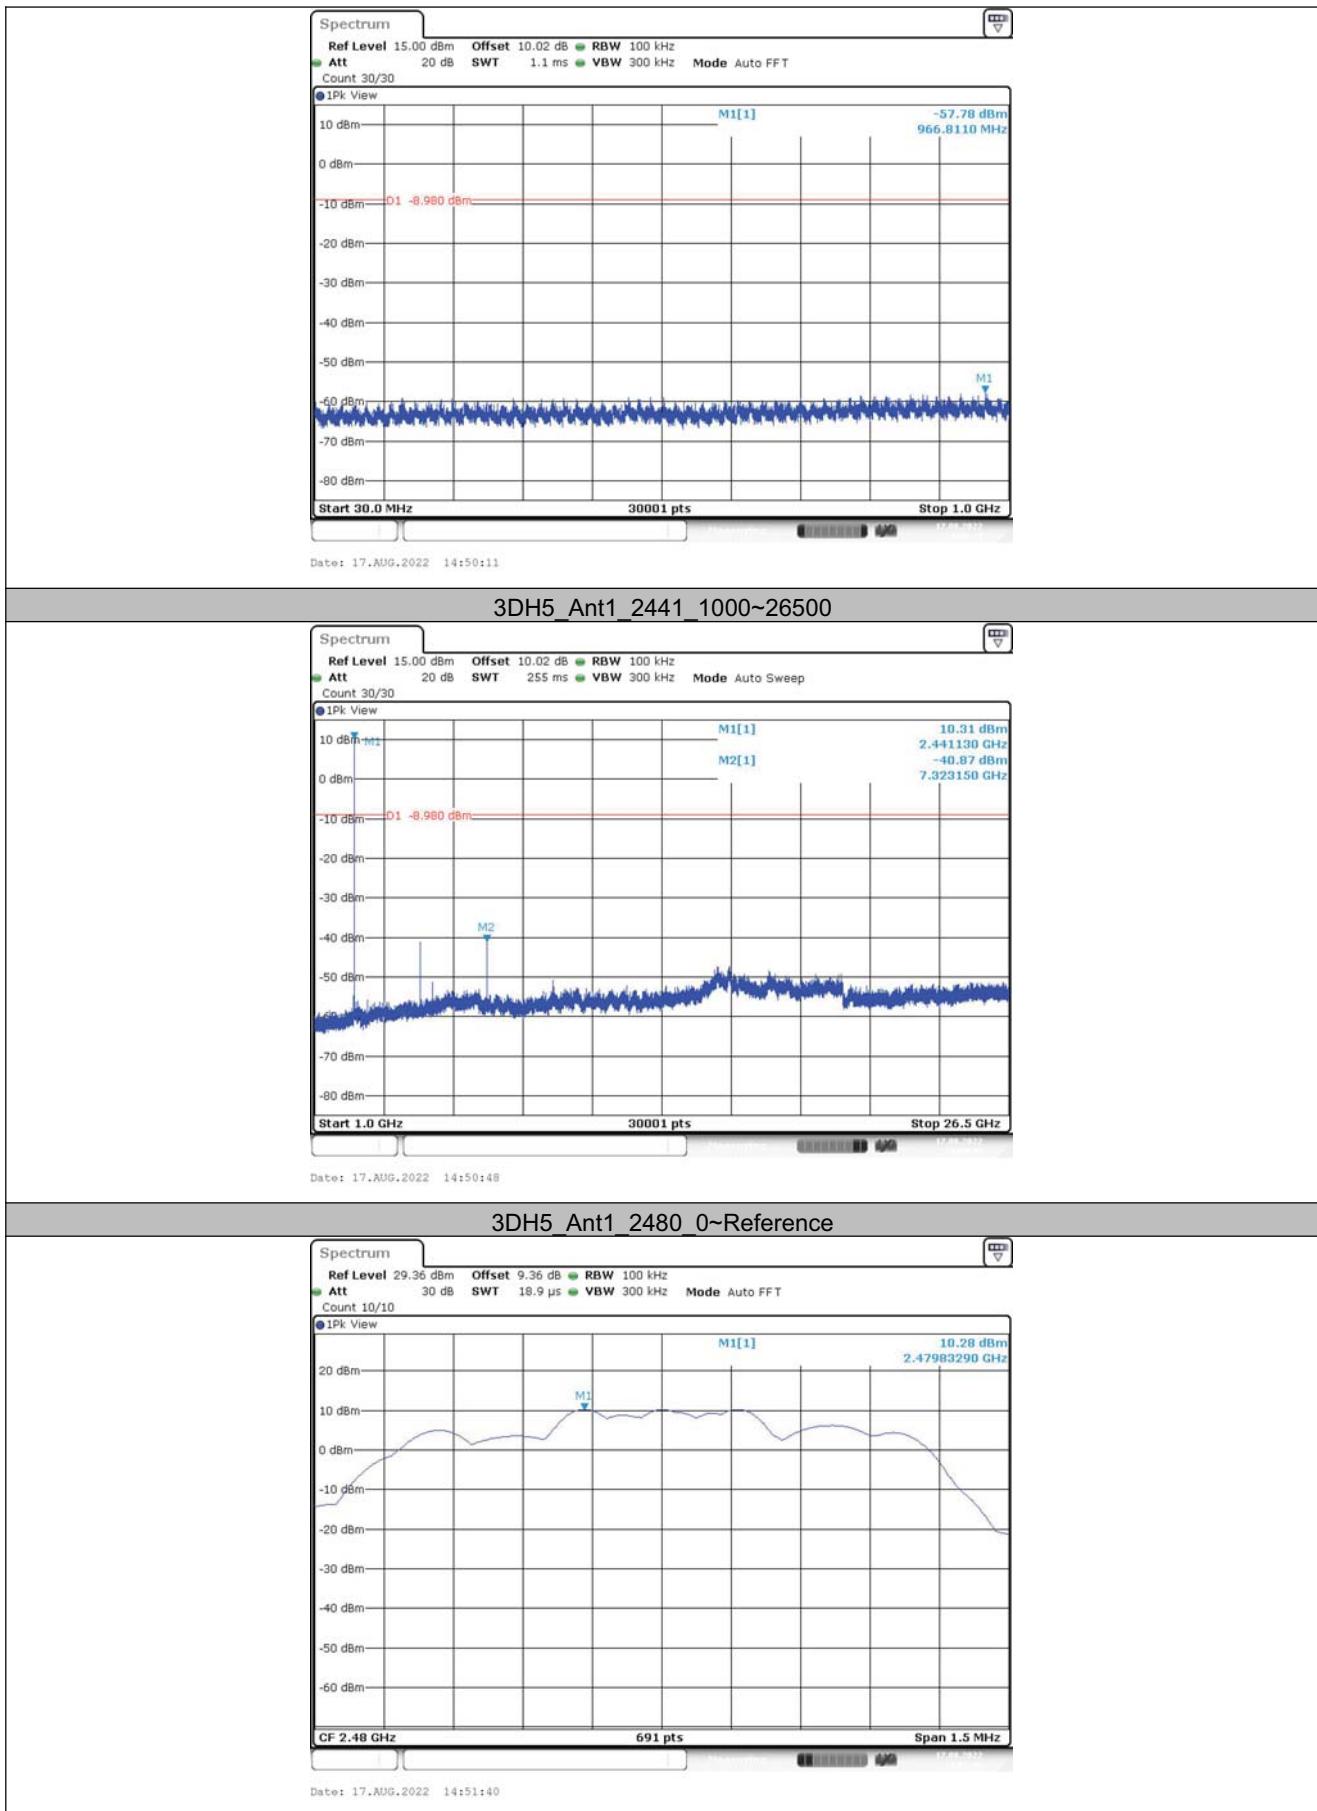

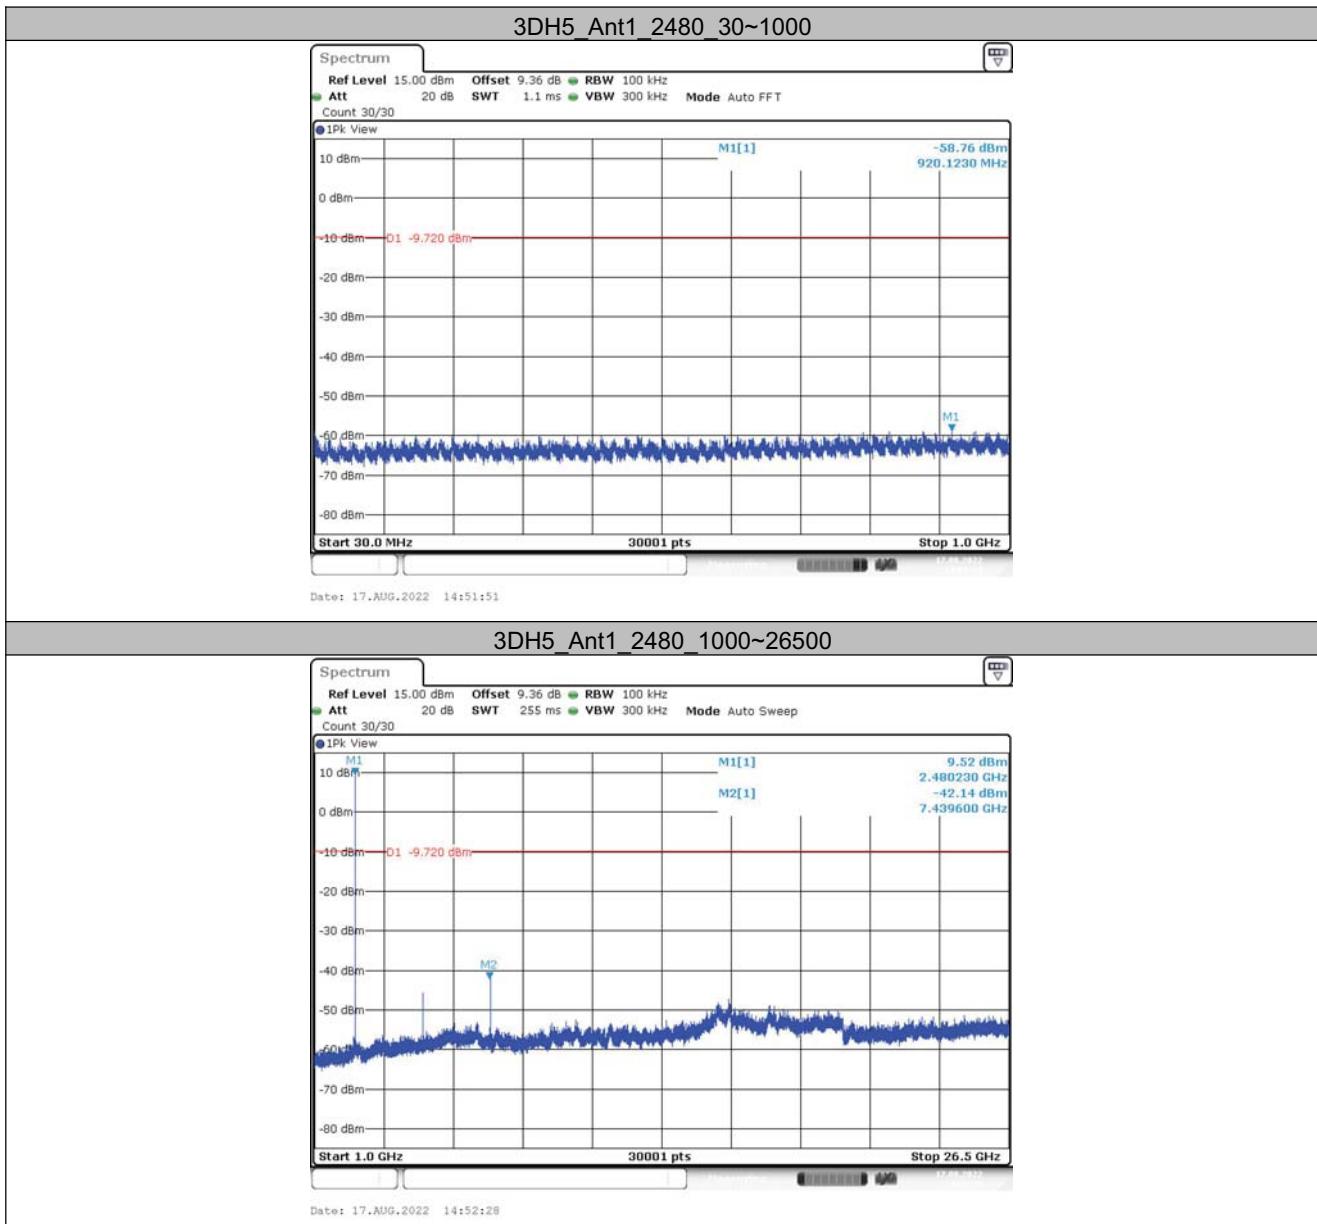



## 6.8 Occupied Channel Bandwidth

### 6.8.1 Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.893	2401.559	2402.453	---	PASS
		2441	0.899	2440.556	2441.456	---	PASS
		2480	0.896	2479.559	2480.456	---	PASS
2DH5	Ant1	2402	1.175	2401.416	2402.590	---	PASS
		2441	1.175	2440.416	2441.590	---	PASS
		2480	1.175	2479.416	2480.590	---	PASS
3DH5	Ant1	2402	1.172	2401.422	2402.593	---	PASS
		2441	1.172	2440.422	2441.593	---	PASS
		2480	1.172	2479.422	2480.593	---	PASS

### 6.8.2 Test Graphs











## Important

- (1) The test report is valid with the official seal of the laboratory and the signatures of Test engineer, Author and Reviewer simultaneously.
- (2) The test report is invalid if altered.
- (3) Any photocopies or part photocopies in the test report are forbidden without the written permission from the laboratory.
- (4) Objections to the test report must be submitted to the laboratory within 15 days.
- (5) Generally, commission test is responsible for the tested samples only.
- (6) Any photocopies or part photocopies of the test report are forbidden without the written permission from CVC;

## Address of the laboratory:

CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663      Tel: 020-32293888

FAX: 020-32293889      E-mail: office@cvc.org.cn