

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Rugged Smart Phone

ISSUED TO
Shenzhen UniStrong Science & Technology Co., Ltd.

B,4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen,
China



Tested by: Heng Aiping
Heng Aiping
(Engineer)

Date: Mar. 15, 2019

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: Mar. 15, 2019

Report No.: BL-EC1930222-501
EUT Name: Rugged Smart Phone
Model Name: UT12
Brand Name: UniStrong
Test Standard: 47 CFR Part 2 (10-1-17 Edition)
RSS-Gen (Issue 5, April 2018)
(Others refer to chapter 3.1)

FCC ID: 2AOPD-UT10
ISED Number: 11546A-UT10

Test Conclusion: Pass
Test Date: Mar. 11, 2019
Date of Issue: Mar. 15, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Mar. 15, 2019</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	4
1.1	Identification of the Testing Laboratory.....	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce.....	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information.....	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment.....	7
2.6	Technical Information	8
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards.....	10
3.2	Test Verdict.....	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List.....	12
4.3	Test Configurations	14
4.4	Test Setup.....	17
5	TEST ITEMS	19
5.1	Field Strength of Spurious Radiation	19
ANNEX A	TEST RESULTS.....	23
A.1	Field Strength of Spurious Radiation	23
ANNEX B	TEST SETUP PHOTOS	24

ANNEX C	EUT EXTERNAL PHOTOS	24
ANNEX D	EUT INTERNAL PHOTOS.....	24

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China.
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China.
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as an accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025. The accreditation certificate number is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20 °C to 35 °C
Ambient Relative Humidity	30 % to 60 %
Ambient Pressure	98 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v1.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B,4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B,4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Rugged Smart Phone
Model Name Under Test	UT12
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA7800
	Serial No.	N/A
	Capacity	8000 mAh
	Rated Voltage	3.8 V
	Limit Charge Voltage	4.35 V
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	ASUC71W
	Serial No.	N/A
	Rated Input	100-240 V~, 0.7 A, 50/60 Hz
	Rated Output	5 V= 3 A
Ancillary Equipment 3	USB Cable	
	Model No.	N/A
	Length (Approx.)	1.0 m

2.6 Technical Information

All Network and Wireless connectivity for EUT	GSM/GPRS/EGPRS 850/900/1800/1900 MHz; CDMA Band Class 0; EVDO Rel. 0/Rev. A Band Class 0; WCDMA/HSDPA/HSUPA Band 1/2/5/8; LTE FDD Band 1/2/3/4/5/7/8/17/20/28; LTE TDD Band 38/40/41; Bluetooth, GPS, GLONASS, NFC, BDS
About the Product	The equipment is Smart Phone, intended for used with information technology equipment.
Note 1: The EUT is a smart phone, supporting dual SIM card slots under the same transceiver. Both SIM card slots support GSM, WCDMA and LTE. And both SIM card slots share the same transceiver, so only SIM1 is tested in this report.	

The requirement for the following technical information of the EUT was tested in this report:

Operating Bands	GSM/GPRS/EGPRS 850/1900 CDMA Band Class 0 EVDO Rel. 0/Rev. A Band Class 0 WCDMA/HSDPA/HSUPA Band 2/5 LTE FDD Band 2/4/5/7/17 LTE TDD Band 41	
Modulation Type	GSM/GPRS	GMSK
	EGPRS	8PSK
	CDMA 1x	O-QPSK, H-PSK, QPSK
	EVDO	QPSK, 8PSK, 16-QAM
	WCDMA	QPSK
	HSDPA	QPSK
	/HSUPA	16QAM
	LTE	QPSK 16QAM
TX Frequency Range	GSM/GPRS/EGPRS 850: 824 MHz ~ 849 MHz GSM/GPRS/EGPRS 1900: 1850 MHz ~ 1910 MHz CDMA/EVDO BC 0: 824.025 MHz ~ 848.985 MHz WCDMA/HSDPA/HSUPA Band 2: 1850 MHz ~ 1910 MHz WCDMA/HSDPA/HSUPA Band 5: 824 MHz ~ 849 MHz FDD LTE Band 2: 1850 MHz ~ 1910 MHz FDD LTE Band 4: 1710 MHz ~ 1755 MHz FDD LTE Band 5: 824 MHz ~ 849 MHz FDD LTE Band 7: 2500 MHz ~ 2570 MHz FDD LTE Band 17: 704 MHz ~ 716 MHz TDD LTE Band 41: 2555 MHz - 2655 MHz	
Rx Frequency Range	GSM/GPRS/EGPRS 850: 869 MHz ~ 894 MHz	

	GSM/GPRS/EGPRS 1900: 1930 MHz ~ 1990 MHz CDMA/EVDO BC 0: 869.025 MHz ~ 893.985 MHz WCDMA/HSDPA/HSUPA Band 2: 1930 MHz ~ 1990 MHz WCDMA/HSDPA/HSUPA Band 5: 869 MHz ~ 894 MHz FDD LTE Band 2: 1930 MHz ~ 1990 MHz FDD LTE Band 4: 2110 MHz ~ 2155 MHz FDD LTE Band 5: 869 MHz ~ 894 MHz FDD LTE Band 7: 2620 MHz ~ 2690 MHz FDD LTE Band 17: 734 MHz ~ 746 MHz TDD LTE Band 41: 2555 MHz - 2655 MHz
Power Class	GSM/GPRS 850: 4 GSM/GPRS 1900: 1 EGPRS 850/1900: E2 CDMA/EVDO BC 0: 3 WCDMA/HSDPA/HSUPA Band 2: 3 WCDMA/HSDPA/HSUPA Band 5: 3 FDD LTE Band 2: 3 FDD LTE Band 4: 3 FDD LTE Band 5: 3 FDD LTE Band 7: 3 FDD LTE Band 17: 3 TDD LTE Band 41: 3
Multislot Class	GPRS/EGPRS: 12
Antenna Type	PIFA Antenna
Antenna Gain	GSM/GPRS/EGPRS 850: -1.4 dBi GSM/GPRS/EGPRS 1900: 0.13 dBi CDMA/EVDO BC0: -0.89 dBi WCDMA/HSDPA/HSUPA Band 2: 0.13 dBi WCDMA/HSDPA/HSUPA Band 5: -1.4 dBi FDD LTE Band 2: -0.17 dBi FDD LTE Band 4: -0.12 dBi FDD LTE Band 5: -0.16 dBi FDD LTE Band 7: -0.45 dBi FDD LTE Band 17: -1.23 dBi TDD LTE Band 41: 0.42 dBi

Note 1: The EUT information are declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-17 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 Subpart H (10-1-17 Edition)	Cellular Radiotelephone Service
3	47 CFR Part 24 Subpart E (10-1-17 Edition)	Broadband PCS
4	47 CFR Part 27 (10-1-17 Edition)	Miscellaneous Wireless Communications Services
5	RSS-Gen Issue5 (April 2018)	General Requirements and Information for the Certification of Radio Apparatus
6	RSS-130 Issue2 (February 2019)	Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz
7	RSS-132 Issue3 (January 2013)	Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
8	RSS-133 Issue6 (January 2018)	2 GHz Personal Communications Services
9	RSS-139 Issue3 (July 2015)	Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz
10	RSS-199 Issue3 (December 2016)	Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz
11	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
12	KDB 971168 D01 v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Test Result	Verdict
1	Field Strength of Spurious Radiation	2.1053 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.7 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	ANNEX A.1	Pass

Note 1: FCC Class II Permissive Change

New Model: Turn off the WIFI function of 2.4GHz and 5GHz by blocking the software and remove the underlying WIFI driver of android. The other transmitter module itself has not changed.

Note 2: Only the worst test mode were recorded in this report.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Test Voltage of the EUT	NV (Normal Voltage)	3.8 V
	LV (Low Voltage)	3.7 V
	HV (High Voltage)	4.35 V
Test Temperature of the EUT	NT (Normal Temperature)	+25 °C
	LT (Low Temperature)	-20 °C
	HT (High Temperature)	+45 °C

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Software /Firmware Version	Cal. Date	Cal. Due
Conducted Test System						
Test Software 1	R&S	CMUgo	N/A	V2.0.1	N/A	N/A
Test Software 2	R&S	CMWRun	N/A	V1.8.9	N/A	N/A
Test Software 3	BALUN	BL410R	N/A	V2.1.1.38 4	N/A	N/A
Universal Radio Communication Tester	R&S	CMU 200	119280	V5.13	2019.02.28	2020.02.27
Wideband Radio Communication Tester	R&S	CMW 500	127794	V3.5.137	2018.06.15	2019.06.14
Wideband Radio Communication Tester	R&S	CMW 500	120598	V3.5.137	2019.02.28	2020.02.27
Spectrum Analyzer	R&S	FSV-30	103118	2.30.SP1	2018.06.15	2019.06.14
Spectrum Analyzer	Agilent	E4440A	MY45304434	A.11.21	2018.11.01	2019.10.31
Spectrum Analyzer	Agilent	E4440A	MY46181663	A.11.21	2018.11.01	2019.10.31
Temperature Chamber	AHK	SP20	1412	N/A	2018.06.15	2019.06.14
DC Power Supply	ITECH	IT6863A	6000140106 87210020	N/A	2018.06.14	2019.06.13
Power Sensor	Agilent	E9304A H18	MY41497164	N/A	2018.11.01	2019.10.31
Power Splitter	KMW	DCPD- LDC	1305003215	N/A	N/A	N/A
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	N/A	N/A	N/A
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	N/A	N/A	N/A

Description	Manufacturer	Model	Serial No.	Software /Firmware Version	Cal. Date	Cal. Due
Radiated Test System						
Test Software	BALUN	BL410_E	N/A	V16.921	N/A	N/A
Test Antenna- Bi-Log (30 MHz-3 GHz)	Schwarzbeck	VULB 9163	9163-624	N/A	2017.07.22	2019.07.21
Test Antenna- Horn(1-18 GHz)	Schwarzbeck	BBHA 9120D	9120D-1600	N/A	2018.07.11	2020.07.10
Test Antenna- Horn(18-40 GHz)	A-INFO	LB- 180400KF	J211060273	N/A	2019.01.05	2021.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	N/A	2017.02.21	2020.02.20
Shielded Enclosure	ChangNing	CN- 130701	130703	N/A	N/A	N/A
EMI Receiver	KEYSIGHT	N9038A	MY53220118	A.14.16	2018.11.07	2019.11.06
Spectrum Analyzer	R&S	FSV-30	103118	2.30.SP1	2018.06.15	2019.06.14
Wideband Radio Communication Tester	R&S	CMW 500	121551	V3.2.73	2018.05.07	2019.05.06

4.3 Test Configurations

Test Items	Test Mode	Test Channel		
		LCH	MCH	HCH
Field Strength of Spurious Radiation	GSM 850	v	--	--
	GSM 1900	--	--	v
	CDMA BC 0	v	--	--
	WCDMA Band 5	--	v	--
Note 1: The mark “v” means that this configuration is chosen for testing.				

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
GSM/GPRS/EGPRS 850	Low Channel	128	824.2
	Middle Channel	190	836.6
	High Channel	251	848.8
GSM/GPRS/EGPRS 1900	Low Channel	512	1850.2
	Middle Channel	661	1880.0
	High Channel	810	1909.8
CDMA/EVDO BC 0	Low Channel	1013	824.70
	Middle Channel	384	836.52
	High Channel	777	848.31
WCDMA Band 2	Low Channel	9262	1852.4
	Middle Channel	9400	1880.0
	High Channel	9538	1907.6
WCDMA Band 5	Low Channel	4132	826.4
	Middle Channel	4182	836.4
	High Channel	4233	846.6


LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MCH	HCH
Field Strength of Spurious Radiation														
7	n	n	v	--	--	--	v	--	v	--	--	v	--	--
Note 1: The mark “v” means that this configuration is chosen for testing.														
Note 2: The mark “n” means that this bandwidth is not supported.														

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 2	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
LTE Band 5	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844
LTE Band 7	Low Range	5	23755	706.5
		10	23780	709
	Middle Range	5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711
LTE Band 17	Low Range	5	23755	706.5
		10	23780	709

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
	Middle Range	5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711
LTE Band 41	Low Range	5	40265	2557.5
		10	40290	2560
		15	40315	2562.5
		20	40340	2565
	Middle Range	5/10/15/20	40740	2605
	High Range	5	41215	2652.5
		10	41190	2650
		15	41165	2647.5
		20	41140	2645


4.4 Test Setup

4.4.1 For Antenna Port Test

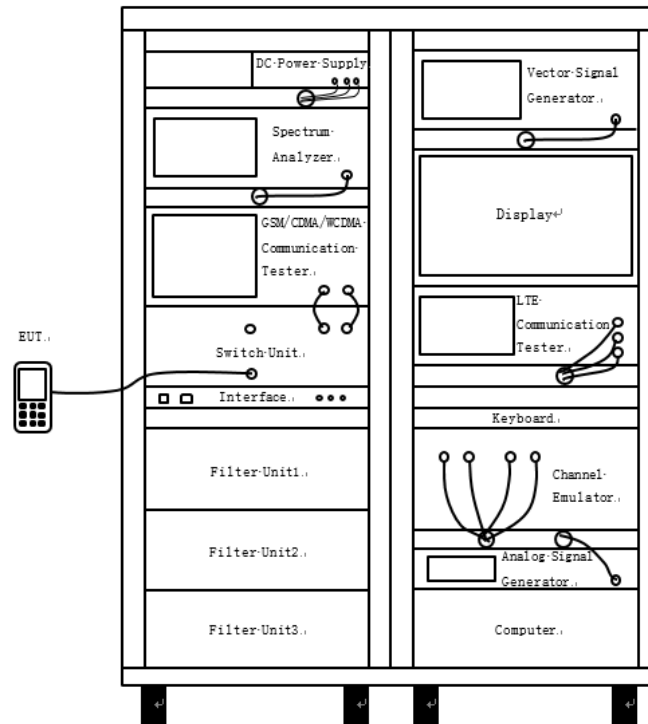


(Diagram 1)

4.4.2 For Frequency Stability Test

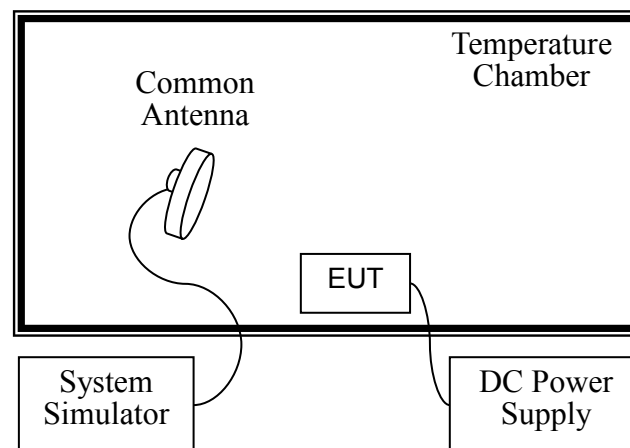


(Diagram 2)

4.4.3 For Radiated Test (30 MHz ~ 1 GHz)

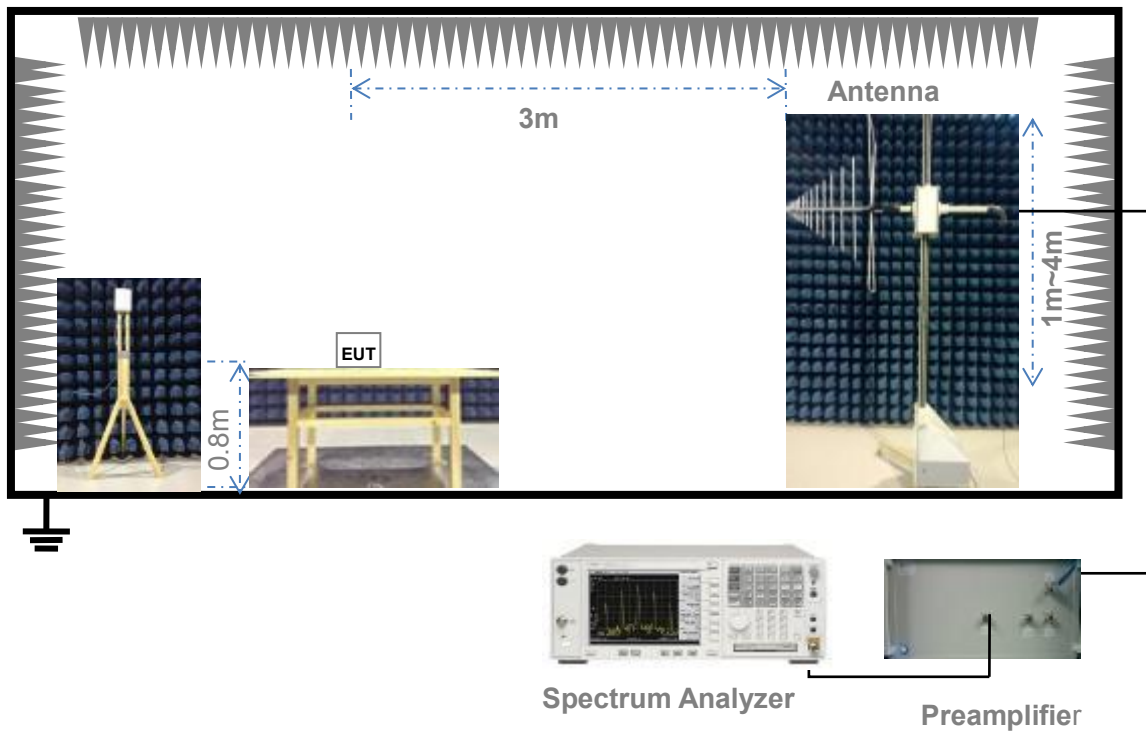

(Diagram 3)

4.4.4 For Radiated Test (Above 1 GHz)

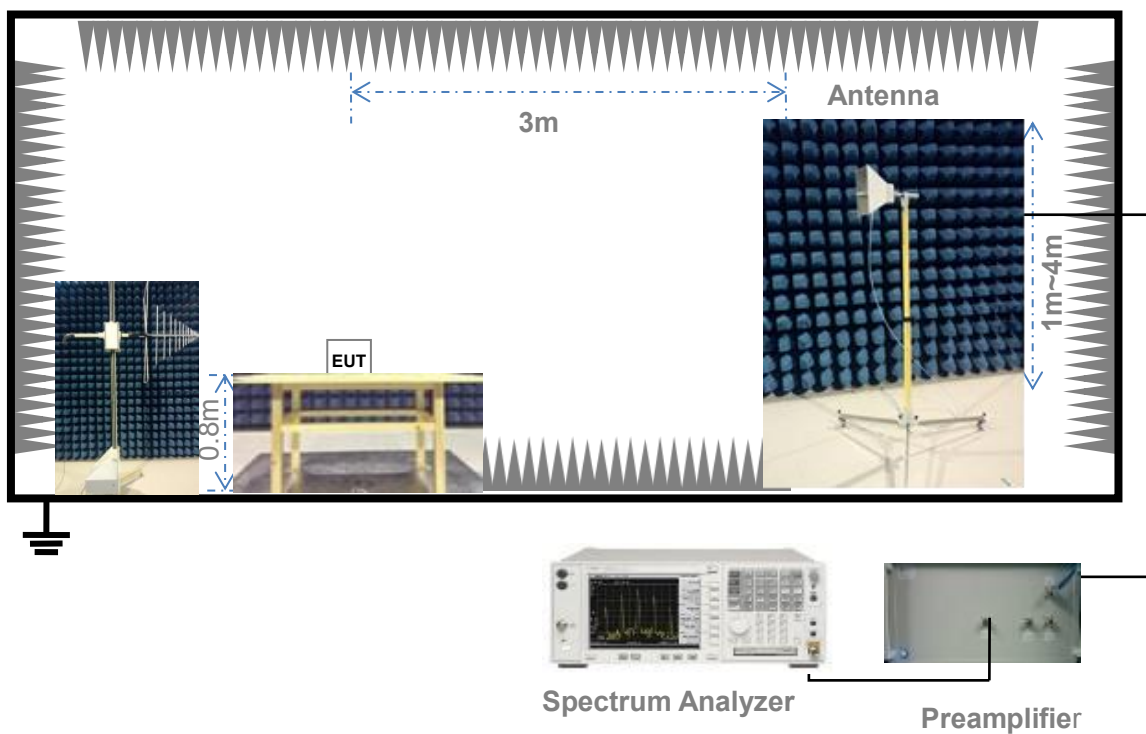

(Diagram 4)

5 TEST ITEMS

5.1 Field Strength of Spurious Radiation

5.1.1 Limit

FCC § 2.1053 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-Gen § 6.13 & RSS-130 § 4.7 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6 & RSS-199 § 4.5

FCC § 22.917(a) & 24.238(a) & RSS-132 § 5.5 & RSS-133 § 6.5

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1) & RSS-139 § 6.6

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

FCC § 27.53(m) (4) & RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40 + 10 \log P$ dB (–10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43 + 10 \log P$ dB (–13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55 + 10 \log P$ dB (–25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

RSS-130 § 4.7

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10}(P)$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

5.1.2 Test Setup

The section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used

for the measurement.

4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Final measurement calculation as below:

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

5.1.4 Test Result

Please refer to ANNEX A.1.

ANNEX A TEST RESULTS

A.1 Field Strength of Spurious Radiation

Note 1: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 2: When measurement frequency is above 18GHz, there is only noise floor of test system existing.

So that frequency above 18GHz is not tested, and there is no test data above 18GHz in the report.

Note 3: Test plots please refer to the document "Annex No.: BL-EC1930222-501 Data Part 1.pdf".

GSM, CDMA and WCDMA Mode Test Verdict

Test Band	Test Channel	Refer to Plot ^{Note3}	Verdict
GSM 850	LCH	1.1	Pass
GSM 1900	HCH	2.1	Pass
CDMA BC0	LCH	3.1	Pass
WCDMA Band 5	MCH	4.1	Pass

LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to Plot ^{Note3}	Verdict
Band 7	5 MHz	LCH	QPSK	RB1#0	5.1	Pass

ANNEX B TEST SETUP PHOTOS

Please refer to the document "BL-EC1930222-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer to the document "BL-EC1930222-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer to the document "BL-EC1930222-AI.PDF".

--END OF REPORT--