



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Cube speaker 2.1

Model: Cube speaker 2.1

Brand: SOUNDGIL

Test Report Number:

C170613Z01-RP1-1

Issued for

Technicsgroup Electronic Co., Ltd.

7F, No.85, Chou Zhi Street, Nai Hou District Taipei City 114, Taiwan

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: November 15, 2017



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 15, 2017	Initial Issue	ALL	Sinphy Xie



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	9
6.1 20DB BANDWIDTH	9
6.2 ANTENNA GAIN	13
6.3 PEAK POWER	14
6.4 PEAK POWER SPECTRAL DENSITY	16
6.5 BAND EDGES MEASUREMENT	17
6.6 FREQUENCY SEPARATION	27
6.7 NUMBER OF HOPPING FREQUENCY	30
6.8 TIME OF OCCUPANCY (DWEIL TIME)	32
6.9 SPURIOUS EMISSIONS	33
6.10 POWERLINE CONDUCTED EMISSIONS	63



1. TEST RESULT CERTIFICATION

Product	Cube speaker 2.1
Model	Cube speaker 2.1
Brand	SOUNDGIL
Tested	October 25~November 6, 2017
Applicant	Technicsgroup Electronic Co., Ltd. 7F, No.85, Chou Zhi Street, Nai Hou District Taipei City 114, Taiwan
Manufacturer	Technicsgroup Electronic Co., Ltd. 7F, No.85, Chou Zhi Street, Nai Hou District Taipei City 114, Taiwan

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Eve Wang
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen)
Inc.

Reviewed by:

Nancy Fu
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen)
Inc.



2. EUT DESCRIPTION

Product	Cube speaker 2.1
Model Number	Cube speaker 2.1
Brand	SOUNDGIL
Model Discrepancy	N/A
Identify Number	C170613Z01-RP1-1
Received Date	June 13, 2017
Power Supply	DC24V Power supplied by the adapter
Adapter Specification	TS601G250-2401D Input: AC100-240V~50/60Hz 1.5A MAX Output: DC24V 2.5A DC Cable: Unshielded 1.80m AC Cable: Unshielded 1.50m
AUDIO IN Cable	Shielded, 1.80m
Speaker Output Cable	Unshielded, 0.10m; Unshielded, 0.25m
Optical Cable	Shielded, 1.80m
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK: 1.03dBm $\pi/4$ -DQPSK: 2.38dBm 8DPSK: 2.82dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	PCB Antenna with 2dBi gain (Max)
Temperature Range	0°C ~ +40°C
Hardware Version	V1.5
Software Version	V1.0

Note: This submittal(s) (test report) is intended for FCC ID: 2AOVOCUBESPEAKER filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Use "Bluetooth MP Tool" to control the EUT for staying in continuous transmitting and receiving mode.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: AUX IN Play Music (120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 2: AUX IN Play Music (240V/50Hz)	<input checked="" type="checkbox"/>
Radiated Emission	Mode 4: Continuously Transmitting	<input checked="" type="checkbox"/>

Note:

1. Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK, $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.
2. Radiated band edges were tested with both fixed and hopping mode; the fixed mode was the worse case and recorded in the report.
3. For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worst case 8-DPSK and GFSK.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccscsz.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Ipod	A1285	YM91546Y3QY	DoC	Apple	Unshielded 1.90m	N/A
2	DVD	DV-410V	1HKD004627CN	N/A	Pioneer	Unshielded 1.90m	Unshielded 1.80m (AC cable)
3	USB 2.0	N/A	N/A	N/A	Kingston	N/A	N/A
4	Notebook	MS2392	NXMPGCN015503 11F8C6600	N/A	Acer	Shielded 1.50m	Unshielded 1.00m (AC Cable) Shielded 1.80m (DC Cable)

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH


No limits

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30 kHz, VBW=100 kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS


No non-compliance noted



Test plot

GFSK

20dB Bandwidth(CH Low)

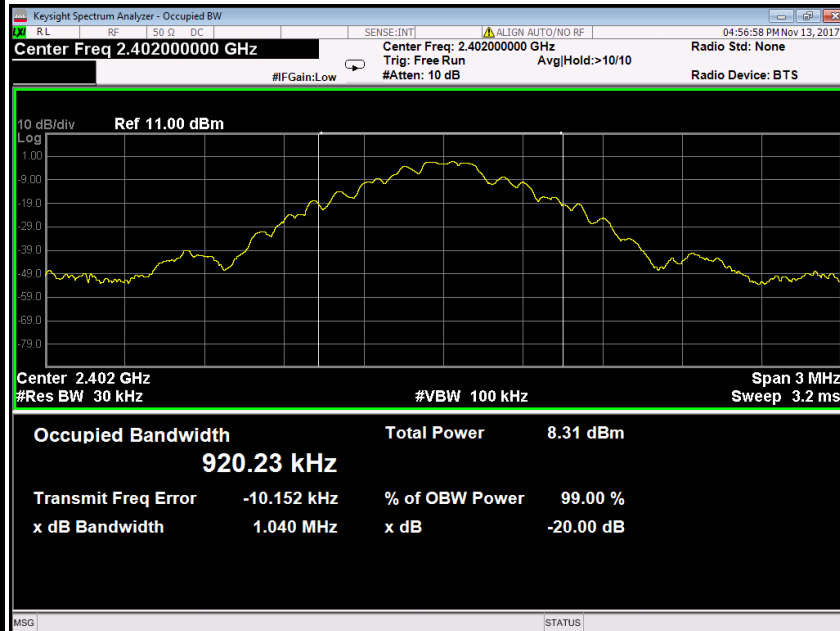


20dB Bandwidth (CH Mid)






20dB Bandwidth (CH High)

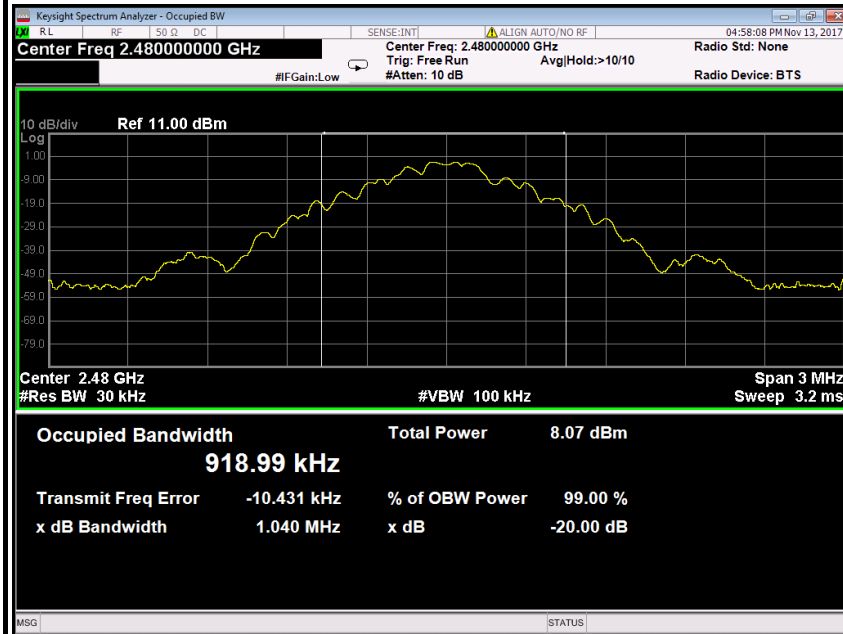


8DPSK

20dB Bandwidth (CH Low)

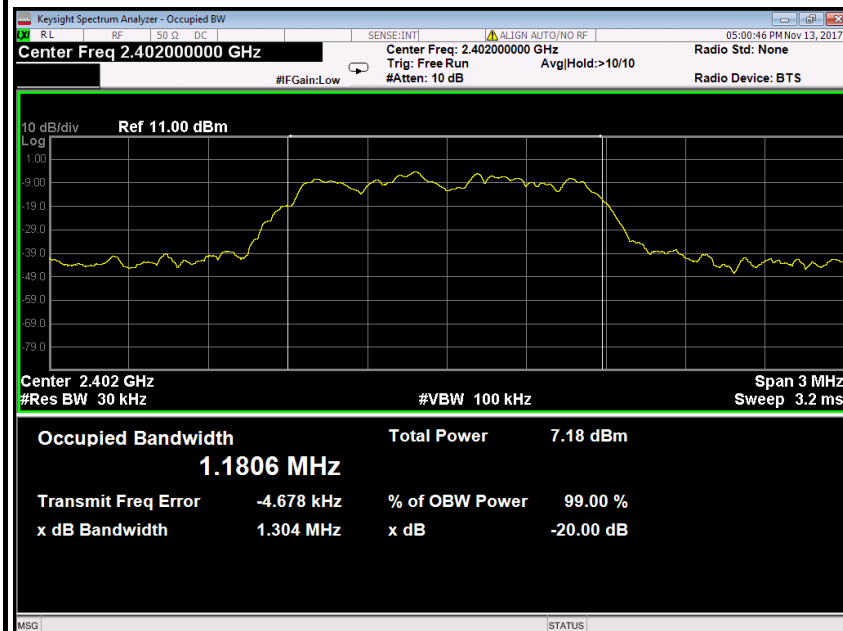




20dB Bandwidth (CH Mid)

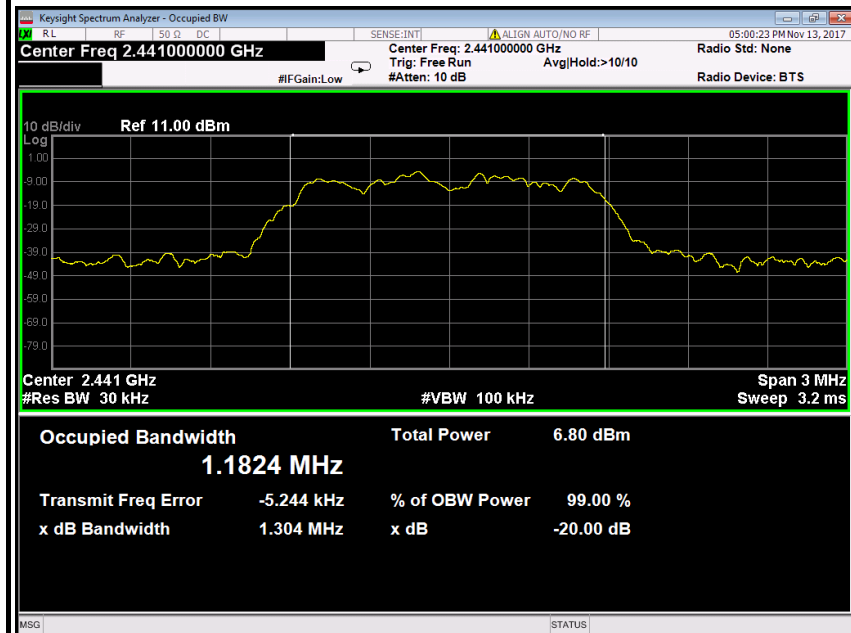

20dB Bandwidth (CH High)

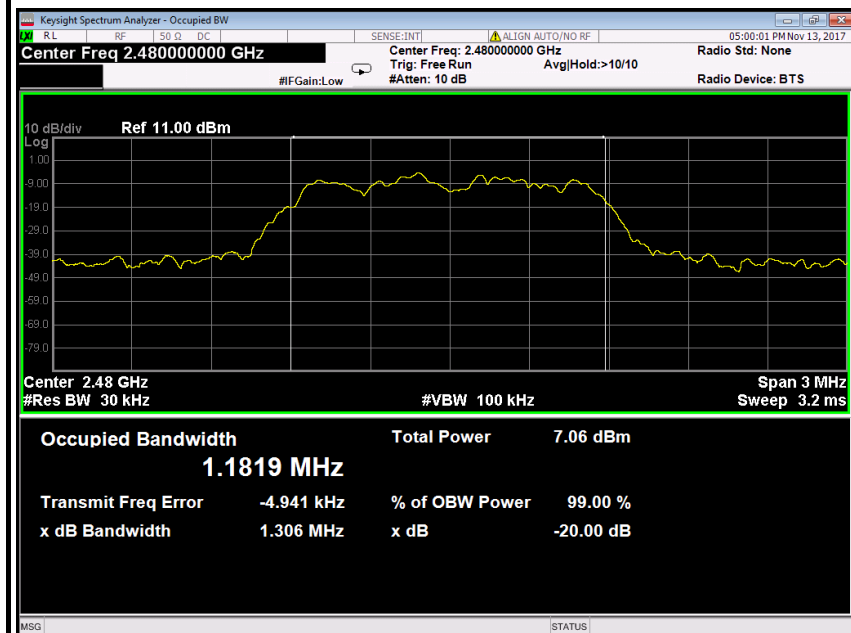



6.2 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

GFSK

T _{nom}	V _{nom}	Lowest channel 2402Hz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with GFSK modulation		0.98	1.03	0.34
Radiated power [dBm] Measured with GFSK modulation		2.03	1.74	1.45
Gain [dBi] Calculated		1.05	0.71	1.11
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



6.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-2.52	3.50	0.98	0.00125	0.125	peak	PASS
Mid	2441	-2.47	3.50	1.03	0.00127			PASS
High	2480	-3.16	3.50	0.34	0.00108			PASS
Low	2402	-3.04	3.50	0.46	0.00111	0.125	AVG	PASS
Mid	2441	-2.96	3.50	0.54	0.00113			PASS
High	2480	-3.73	3.50	-0.23	0.00095			PASS

$\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-1.17	3.50	2.33	0.00171	0.125	peak	PASS
Mid	2441	-1.12	3.50	2.38	0.00173			PASS
High	2480	-1.89	3.50	1.61	0.00145			PASS
Low	2402	-3.21	3.50	0.29	0.00107	0.125	AVG	PASS
Mid	2441	-3.19	3.50	0.31	0.00107			PASS
High	2480	-3.98	3.50	-0.48	0.00090			PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-0.75	3.50	2.75	0.00188	0.125	peak	PASS
Mid	2441	-0.68	3.50	2.82	0.00191			PASS
High	2480	-1.40	3.50	2.10	0.00162			PASS
Low	2402	-3.27	3.50	0.23	0.00105	0.125	AVG	PASS
Mid	2441	-3.19	3.50	0.31	0.00107			PASS
High	2480	-3.95	3.50	-0.45	0.00090			PASS



6.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.5 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2017	09/24/2018
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			



TEST CONFIGURATION

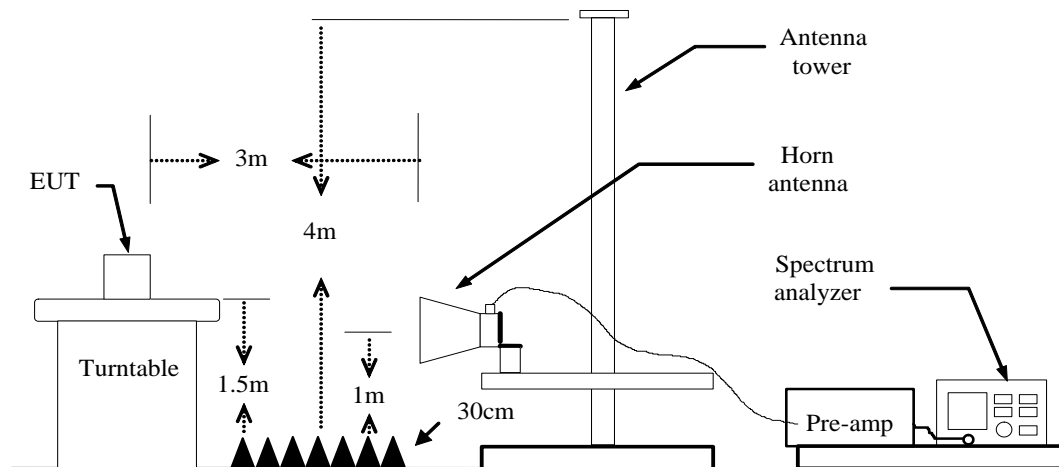

TEST PROCEDURE


1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS



Refer to attach spectrum analyzer data chart.



Test Data (GFSK)
Band Edges (CH Low)

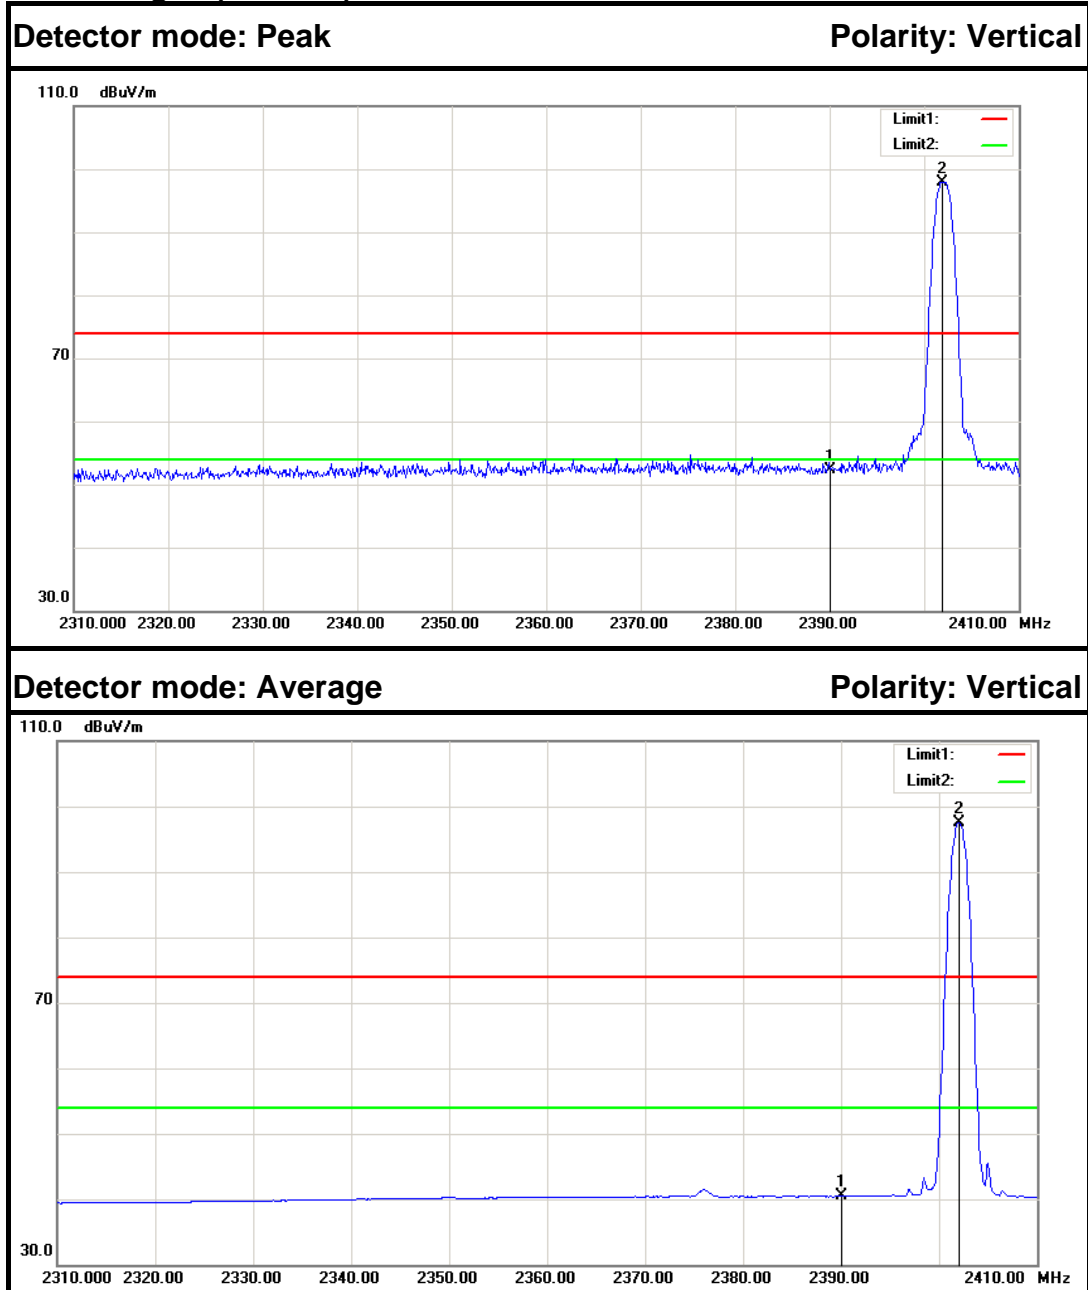

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	55.12	-2.86	52.26	74.00	-21.74	Peak	Vertical
2	2401.900	100.75	-2.80	97.95	---	---	Peak	Vertical
1	2390.000	43.29	-2.86	40.43	54.00	-13.57	Average	Vertical
2	2402.000	100.31	-2.80	97.51	---	---	Average	Vertical

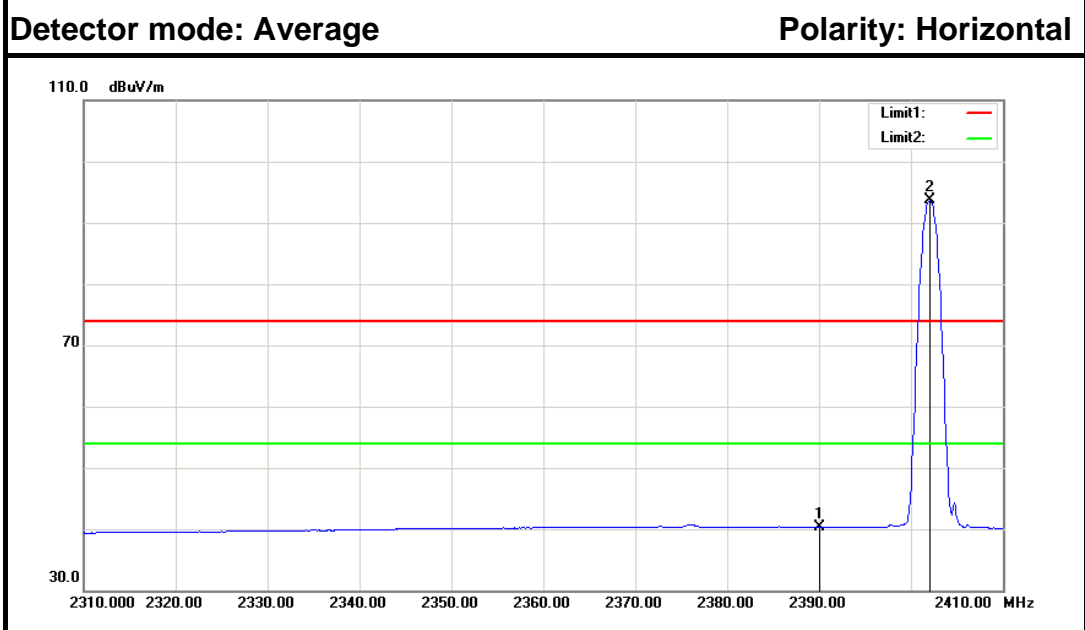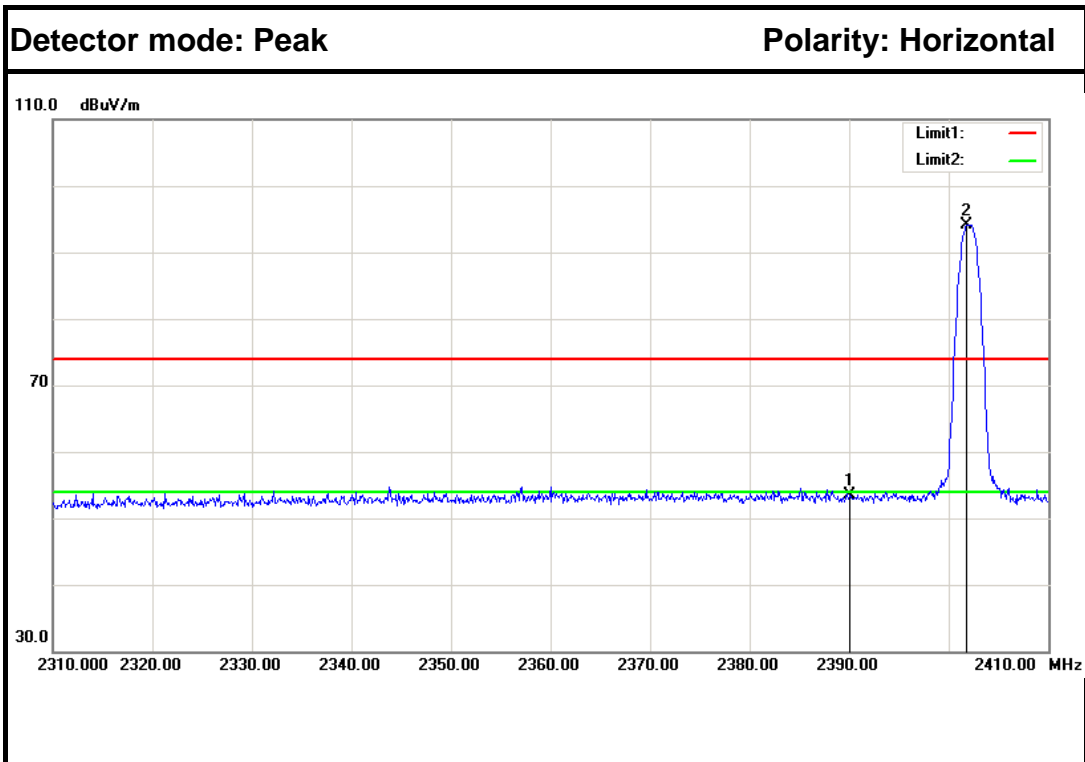


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	56.39	-2.86	53.53	74.00	-20.47	Peak	Horizontal
2	2401.800	96.93	-2.80	94.13	---	---	Peak	Horizontal
1	2390.000	43.21	-2.86	40.35	54.00	-13.65	Average	Horizontal
2	2402.000	96.48	-2.80	93.68	---	---	Average	Horizontal



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

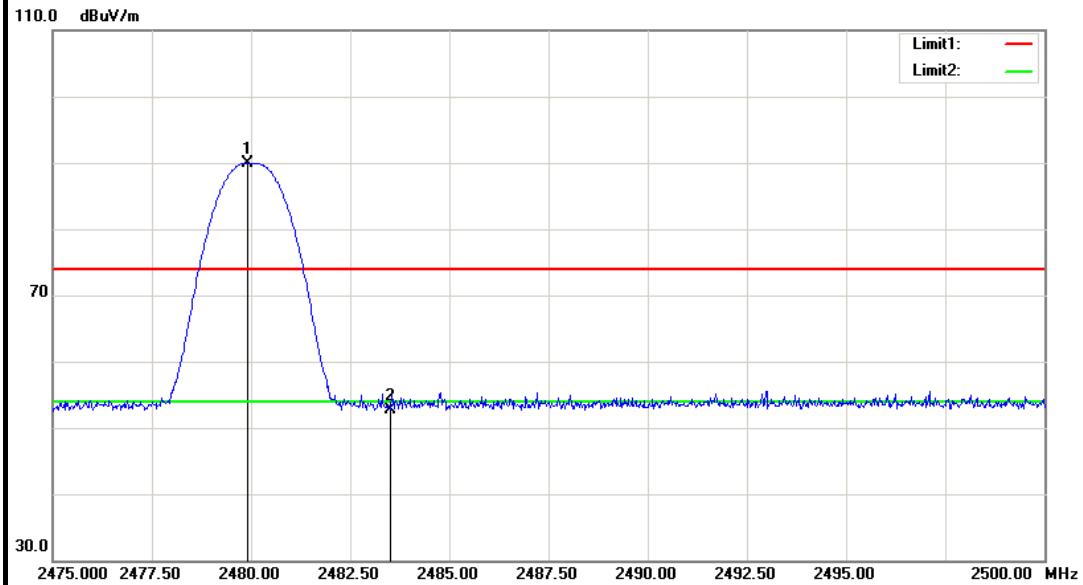


Detector mode: Average

Polarity: Vertical

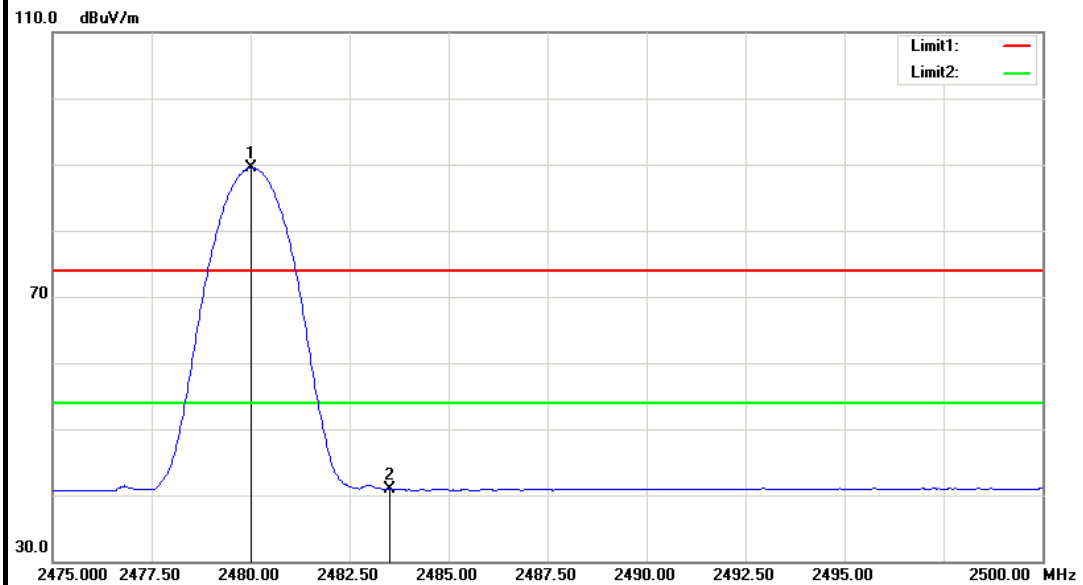

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2479.925	92.32	-2.37	89.95	---	---	Peak	Vertical
2	2483.500	55.11	-2.35	52.76	74.00	-21.24	Peak	Vertical
1	2480.025	91.84	-2.37	89.47	---	---	Average	Vertical
2	2483.500	43.31	-2.35	40.96	54.00	-13.04	Average	Vertical

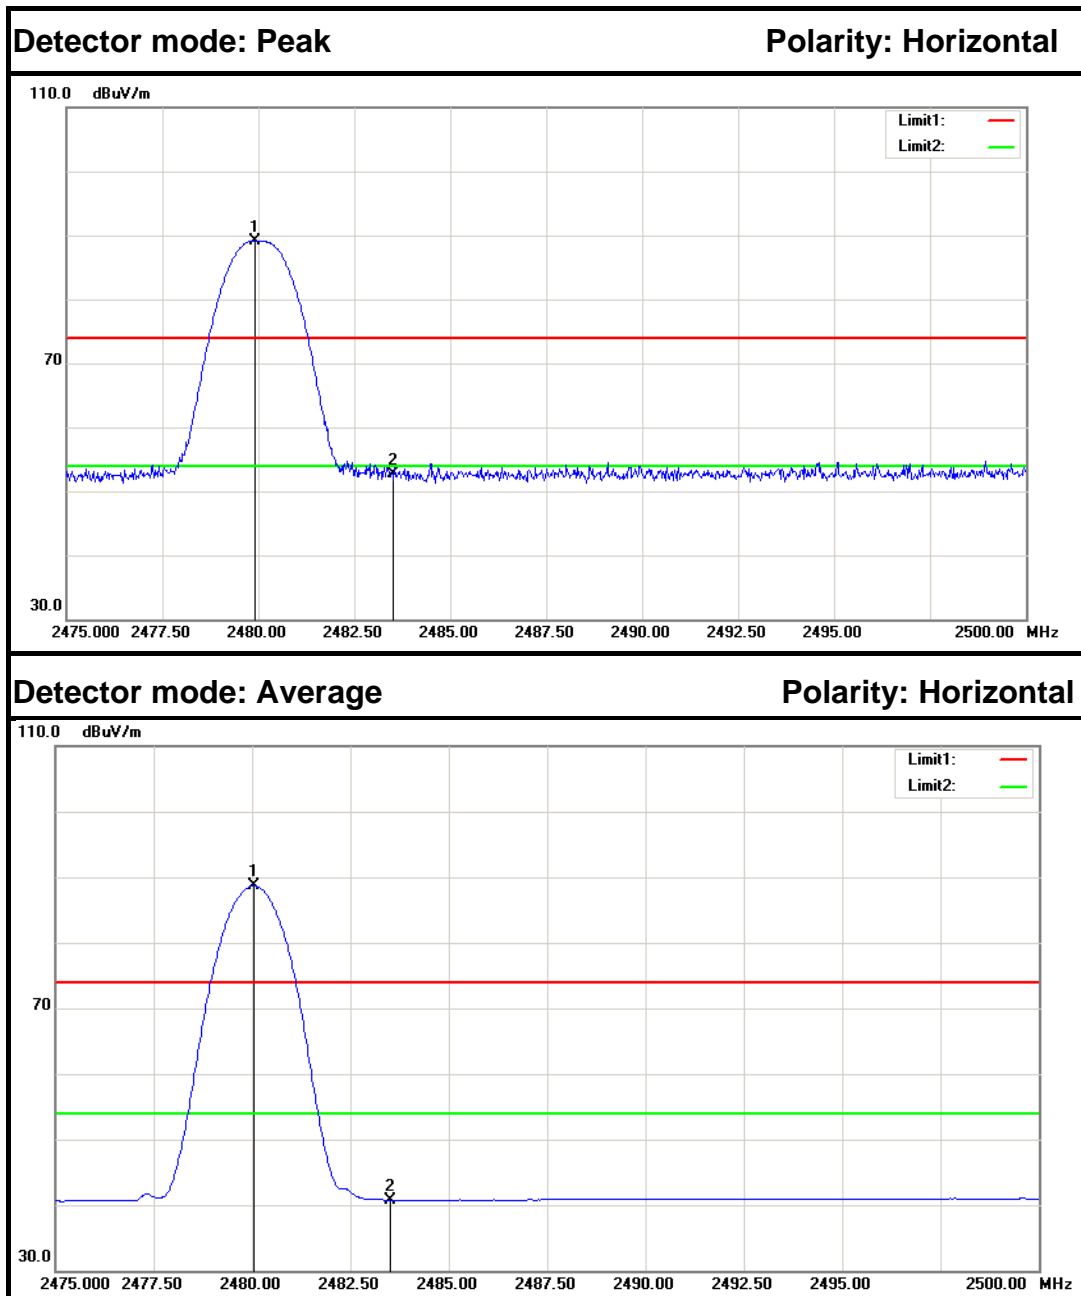

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2479.925	91.51	-2.37	89.14	---	---	Peak	Horizontal
2	2483.500	54.97	-2.35	52.62	74.00	-21.38	Peak	Horizontal
1	2480.050	91.02	-2.37	88.65	---	---	Average	Horizontal
2	2483.500	43.09	-2.35	40.74	54.00	-13.26	Average	Horizontal




8DPSK

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical


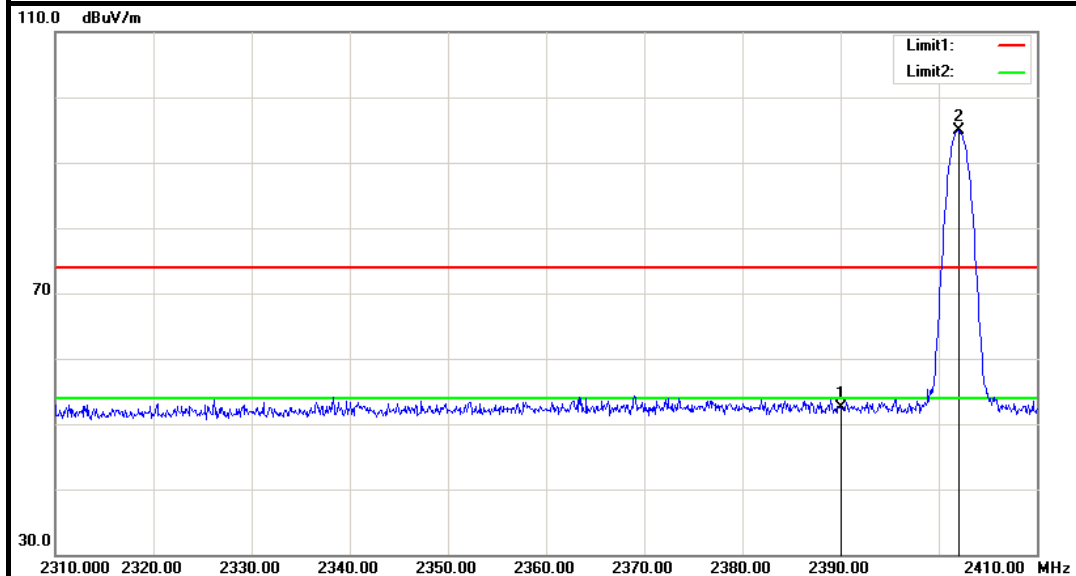


Detector mode: Average

Polarity: Vertical

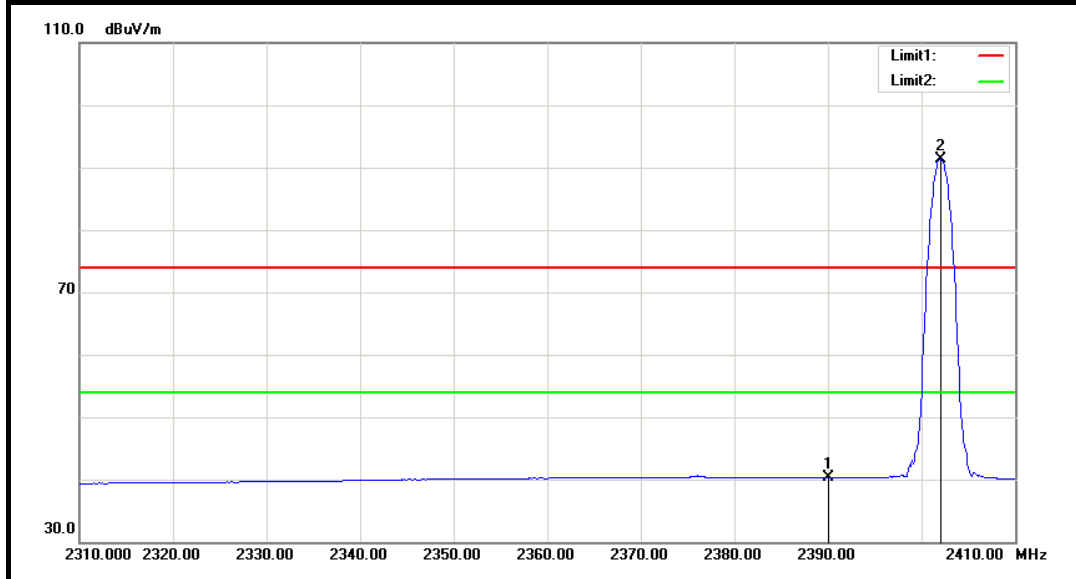

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	55.29	-2.86	52.43	74.00	-21.57	Peak	Vertical
2	2402.000	97.73	-2.80	94.93	---	---	Peak	Vertical
1	2390.000	43.14	-2.86	40.28	54.00	-13.72	Average	Vertical
2	2402.000	94.14	-2.80	91.34	---	---	Average	Vertical

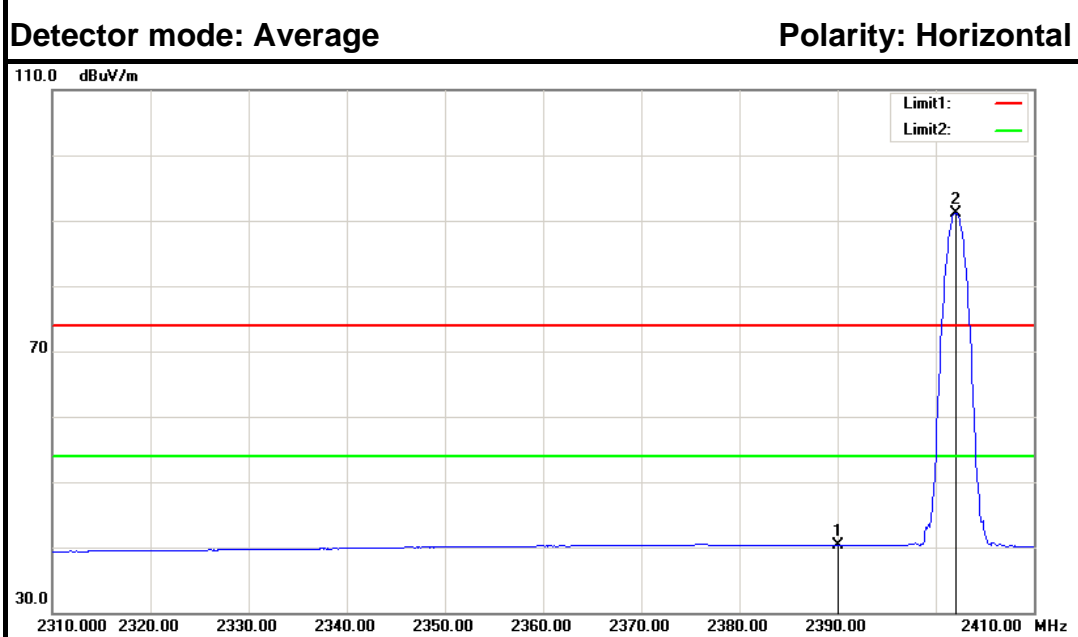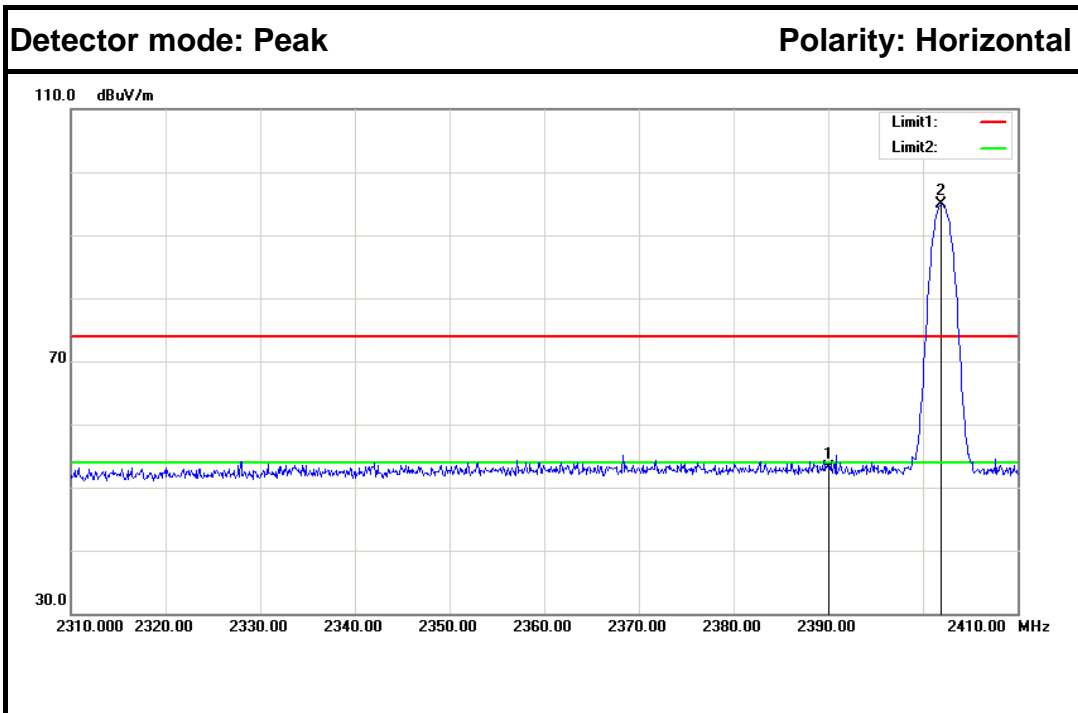


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	55.99	-2.86	53.13	74.00	-20.87	Peak	Horizontal
2	2401.900	97.77	-2.80	94.97	---	---	Peak	Horizontal
1	2390.000	43.14	-2.86	40.28	54.00	-13.72	Average	Horizontal
2	2402.000	93.91	-2.80	91.11	54.00	37.11	Average	Horizontal



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

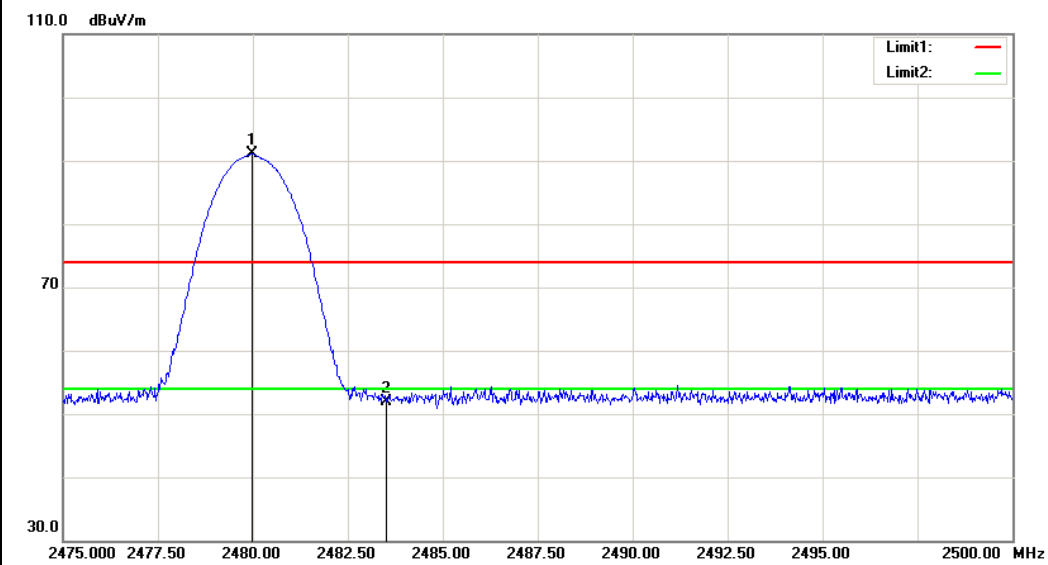


Detector mode: Average

Polarity: Vertical

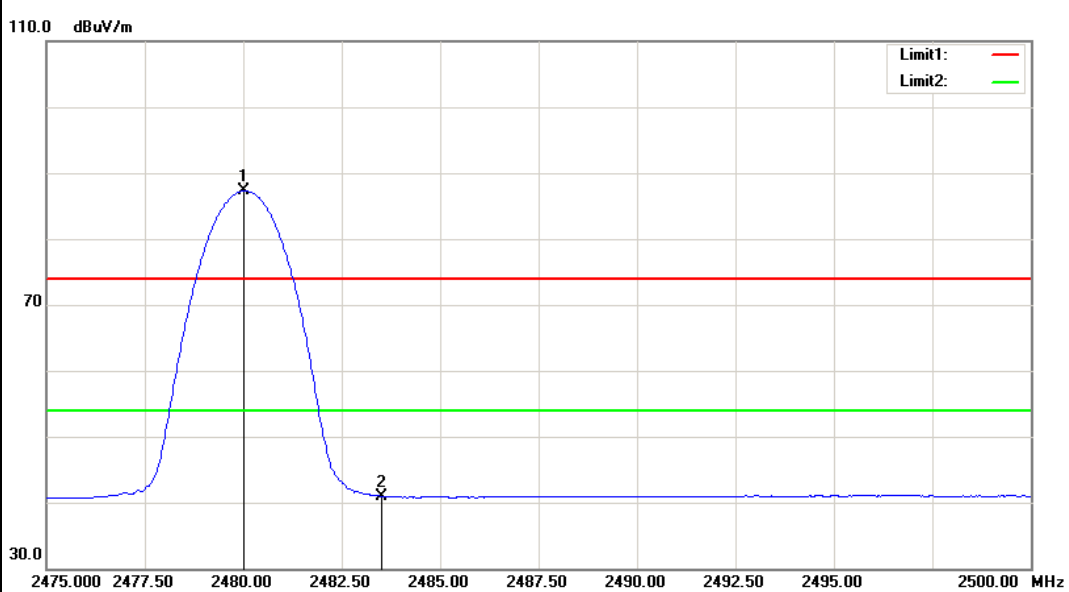

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2479.975	93.42	-2.37	91.05	---	---	Peak	Vertical
2	2483.500	54.29	-2.35	51.94	74.00	-22.06	Peak	Vertical
1	2480.025	89.65	-2.37	87.28	---	---	Average	Vertical
2	2483.500	43.32	-2.35	40.97	54.00	-13.03	Average	Vertical

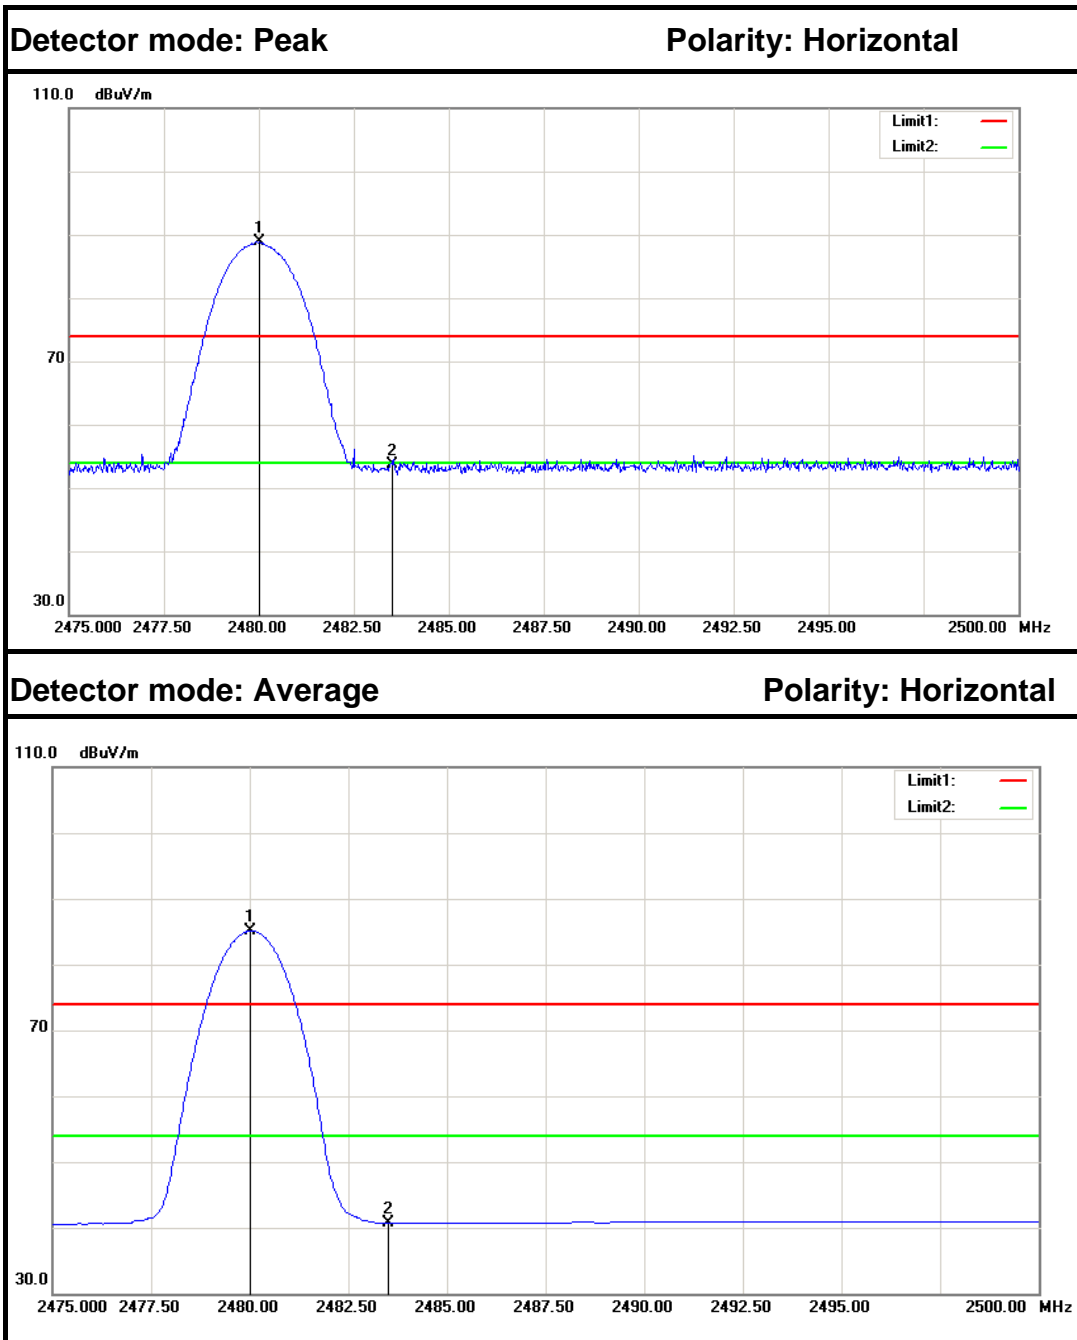

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2480.000	91.20	-2.37	88.83	---	---	Peak	Horizontal
2	2483.500	55.98	-2.35	53.63	74.00	-20.37	Peak	Horizontal
1	2480.025	87.46	-2.37	85.09	---	---	Average	Horizontal
2	2483.500	43.12	-2.35	40.77	54.00	-13.23	Average	Horizontal



6.6 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	693.333	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	870.667	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK

Test Plot

Measurement of Channel Separation

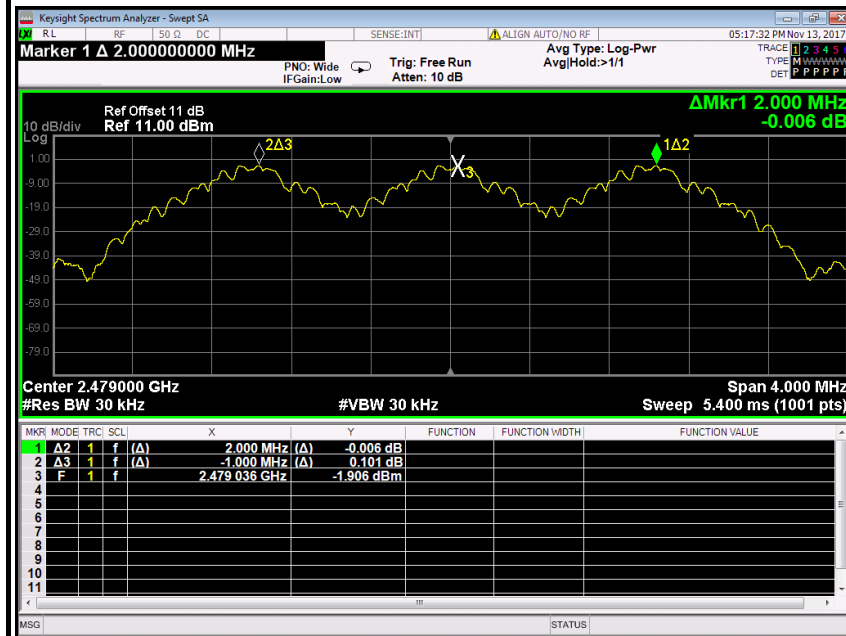

20 dB bandwidth(CH High)

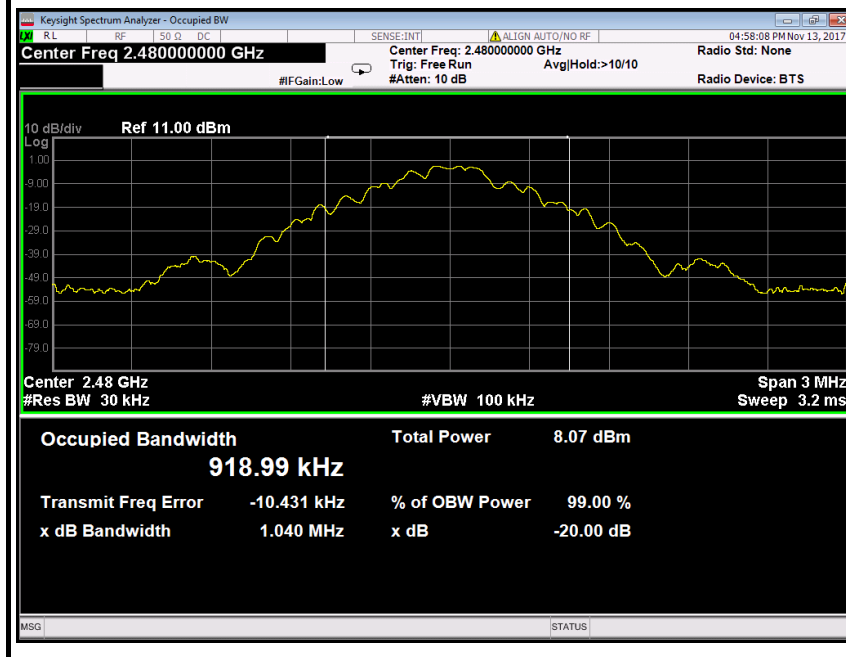





8DPSK

Test Plot

Measurement of Channel Separation

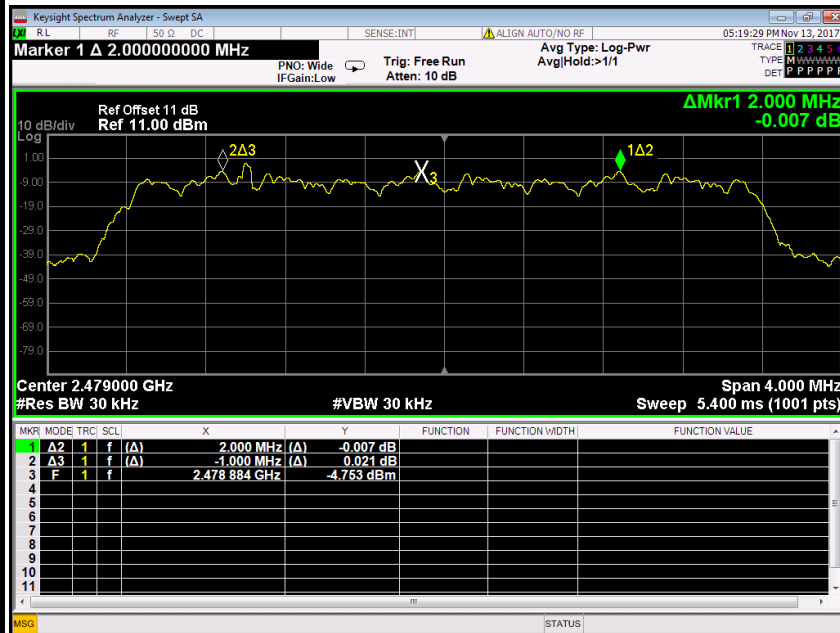

20 dB bandwidth(CH High)

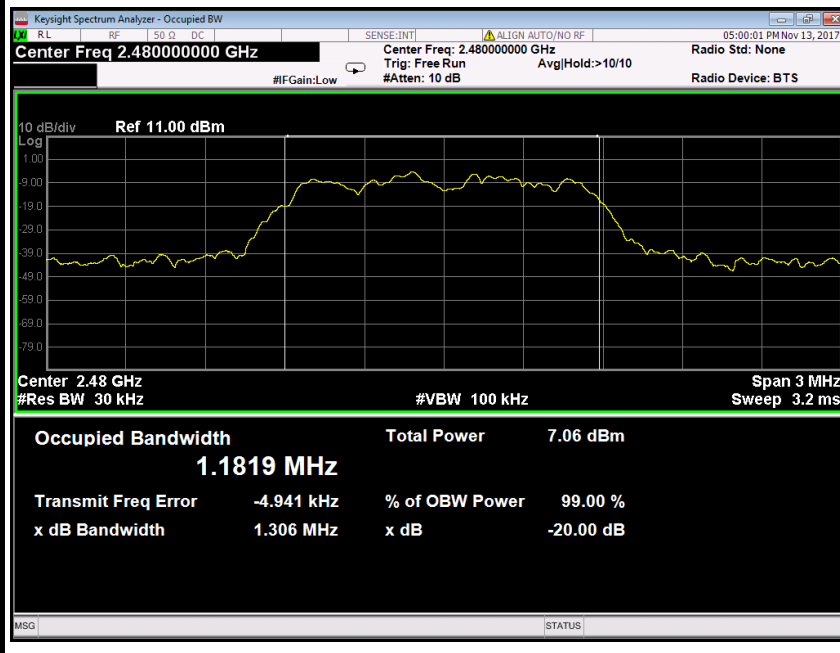



6.7 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot

Channel Number


GFSK

2.400 GHz – 2.4835 GHz

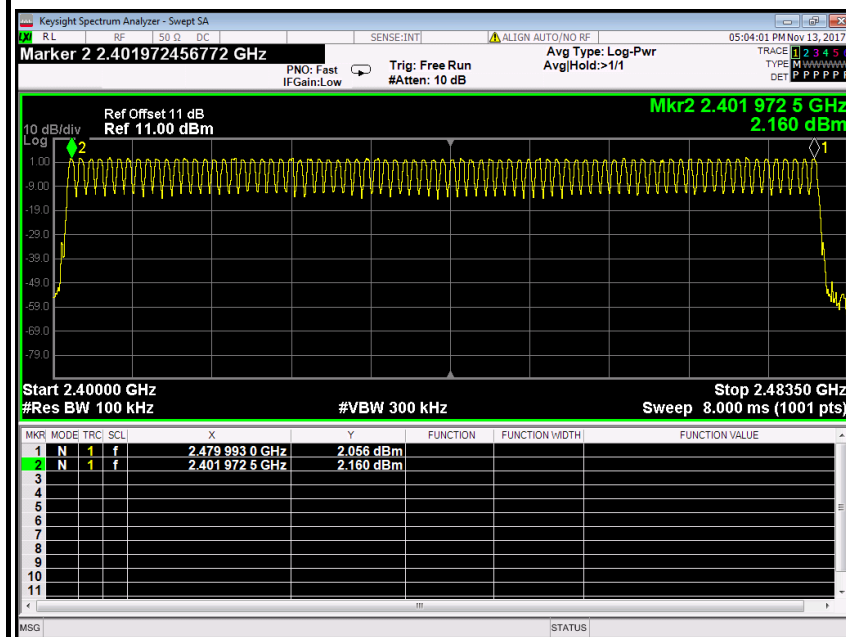

8DPSK

2.400 GHz – 2.4835 GHz

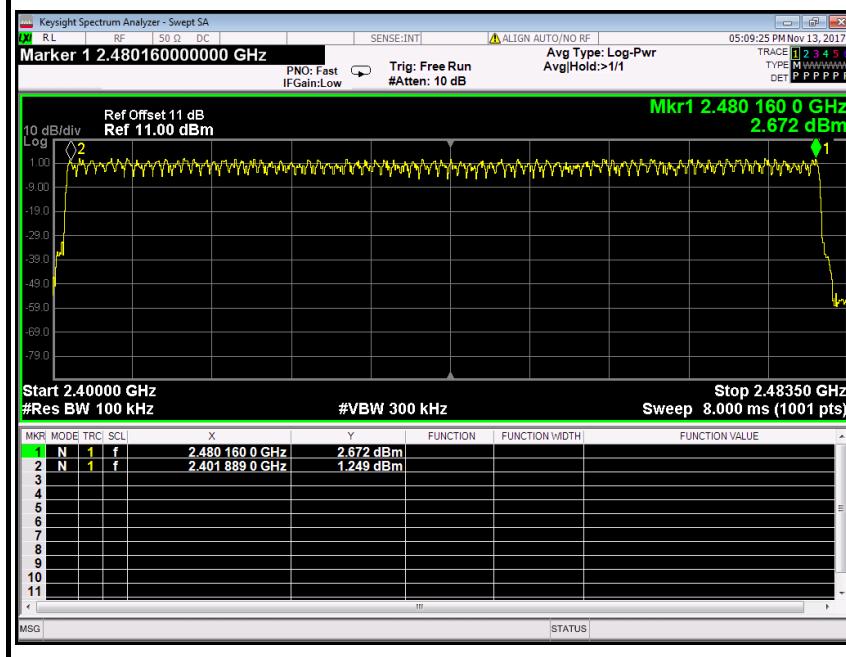



6.8 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Mid: $0.412 * (1600/2)/79 * 31.6 = 131.840(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.412	131.840	31.60	400.00	PASS

DH 3

CH Mid: $1.665 * (1600/4)/79 * 31.6 = 266.400 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.665	266.400	31.60	400.00	PASS

DH 5

CH Mid: $2.925 * (1600/6)/79 * 31.6 = 312.000 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.925	312.000	31.60	400.00	PASS

**8DPSK****3DH 1**CH Mid: $0.418 * (1600/2)/79 * 31.6 = 133.760 \text{ (ms)}$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.418	133.760	31.60	400.00	PASS

3DH 3CH Mid: $1.677 * (1600/4)/79 * 31.6 = 268.320 \text{ (ms)}$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.677	268.320	31.60	400.00	PASS

3DH 5CH Mid: $2.935 * (1600/6)/79 * 31.6 = 313.067 \text{ (ms)}$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	2.935	313.067	31.60	400.00	PASS




Test Plot

GFSK


DH 1


CH Mid

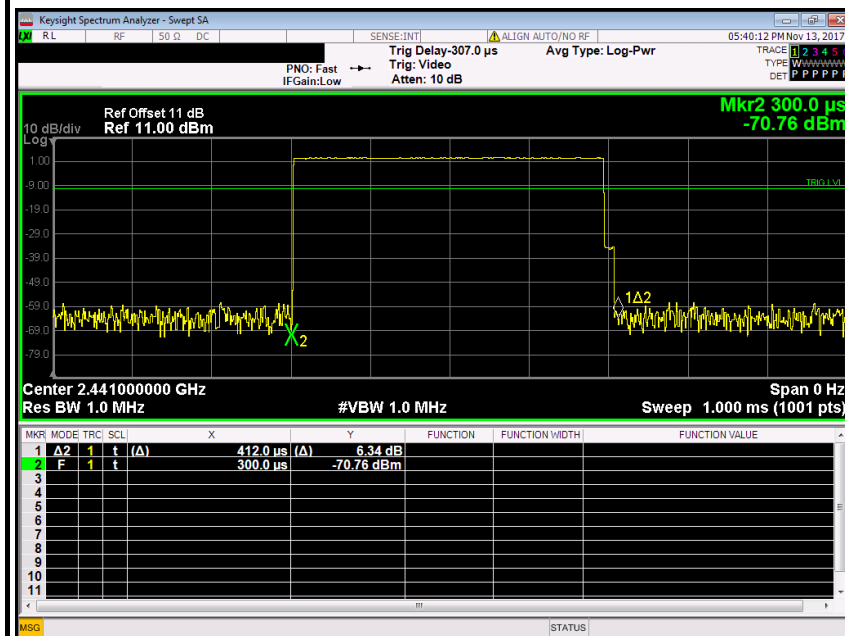

DH 3

CH Mid

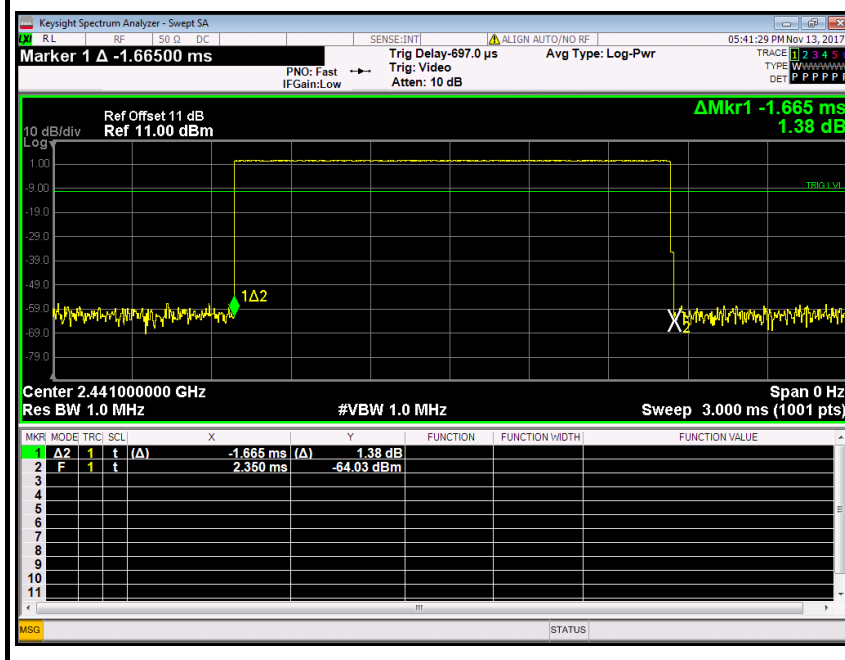

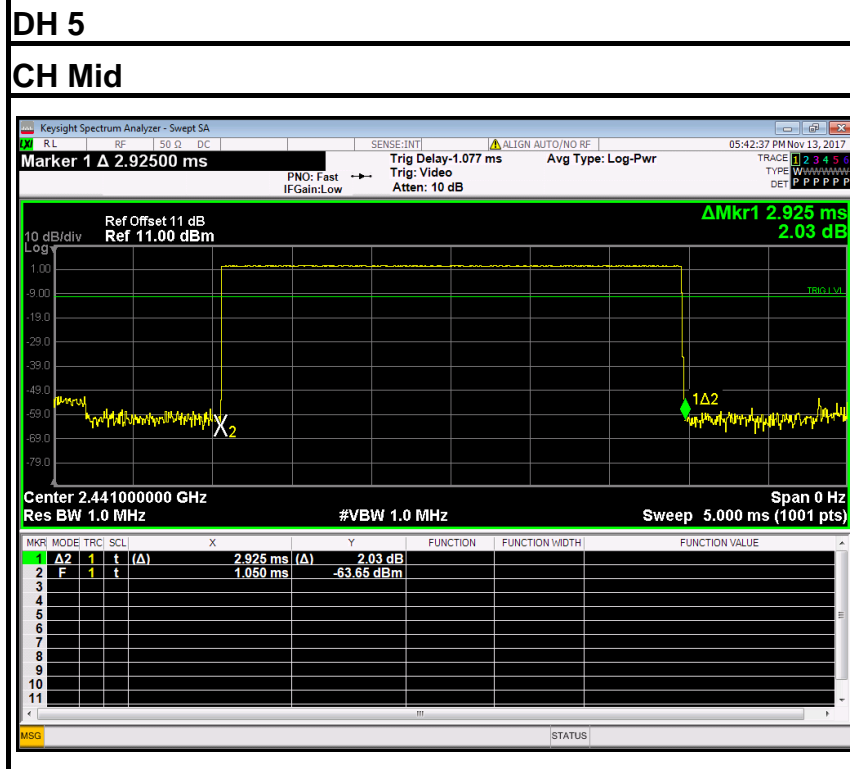




8DPSK


3DH 1


CH Mid

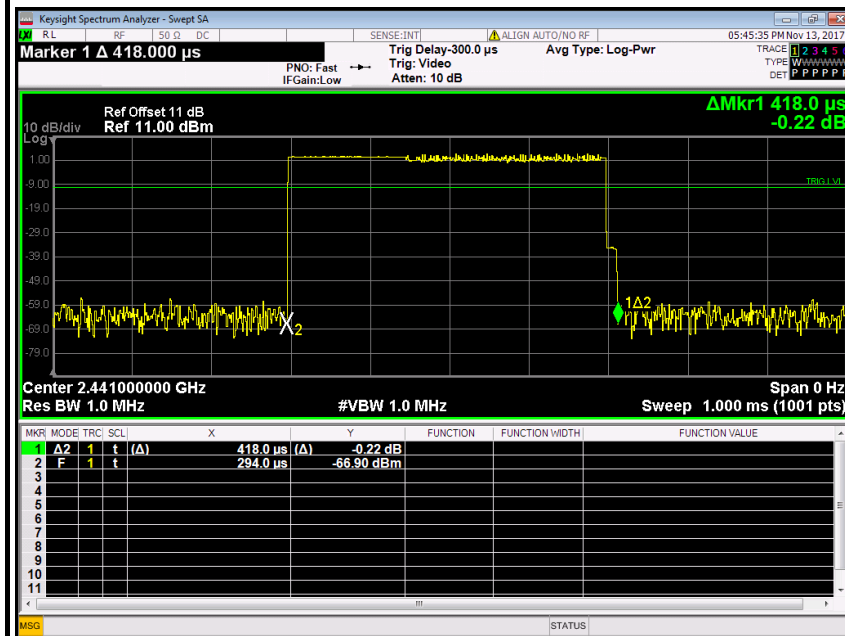

3DH 3

CH Mid

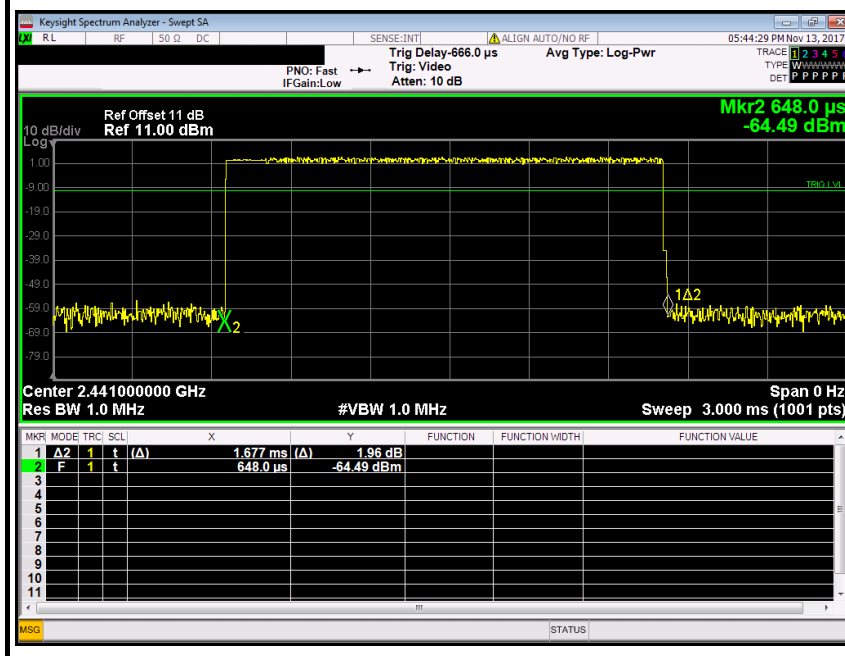

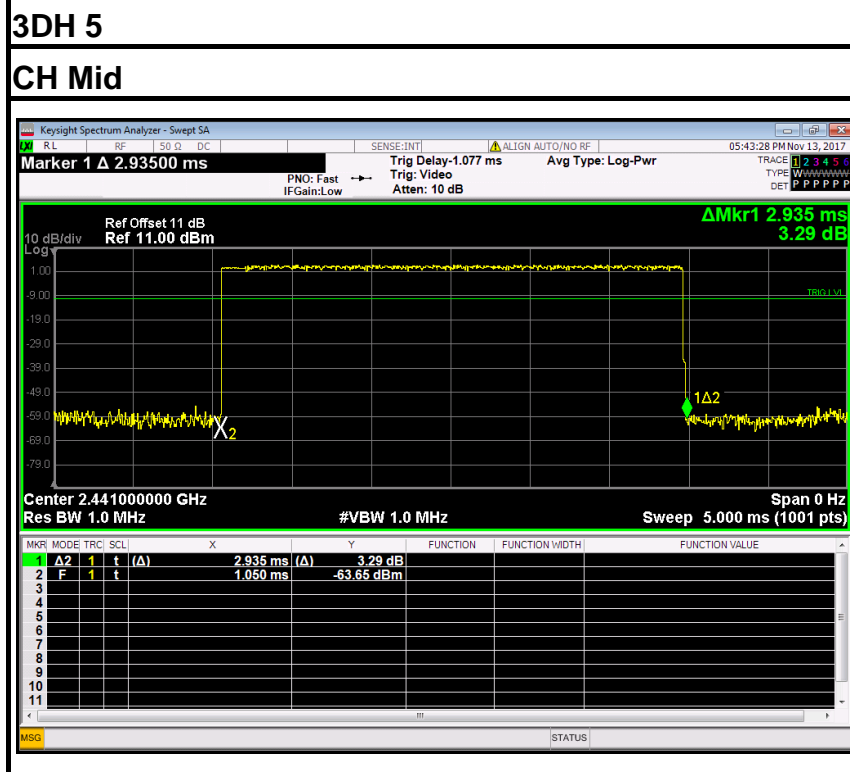



6.9 SPURIOUS EMISSIONS

6.9.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 9 kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.

TEST RESULTS


No non-compliance noted

Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




**Hopping Off
Test Plot (GFSK)**

CH Low (10MHz ~26.5GHz)


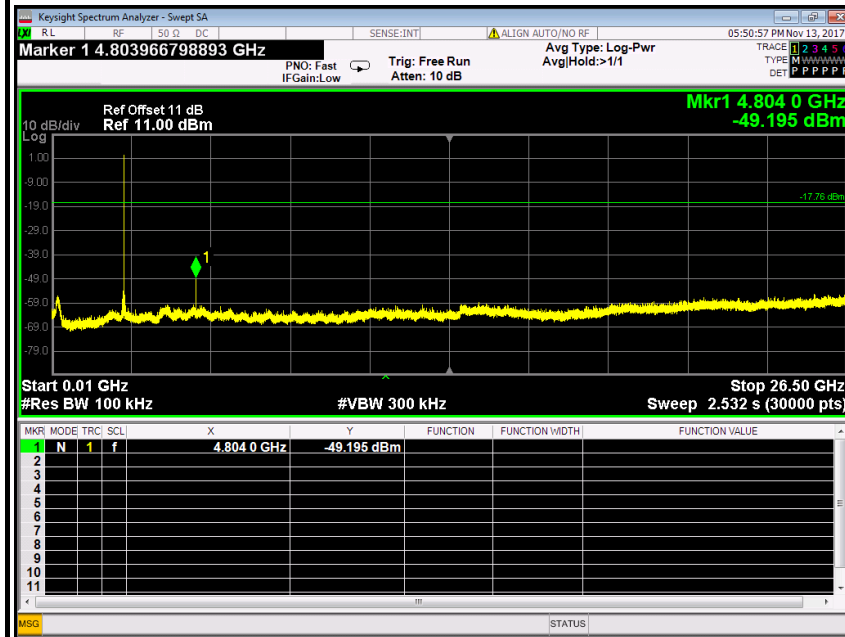


CH Low (2.31GHz ~2.41GHz)

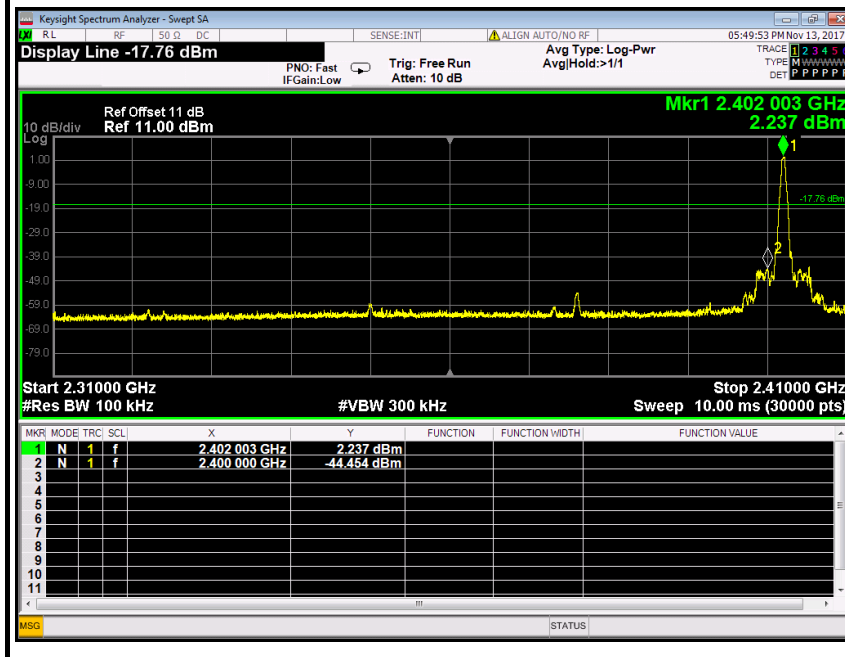




CH Mid (10MHz ~26.5GHz)

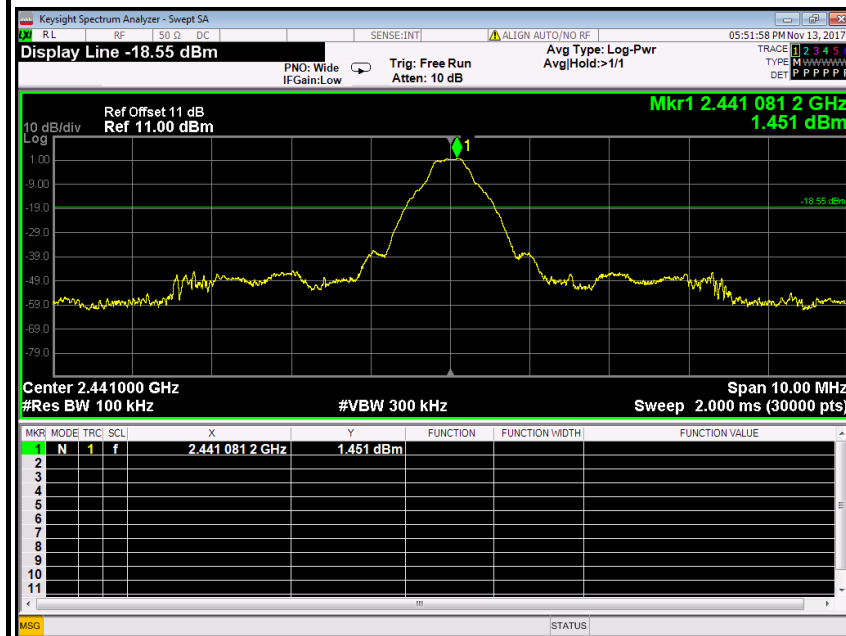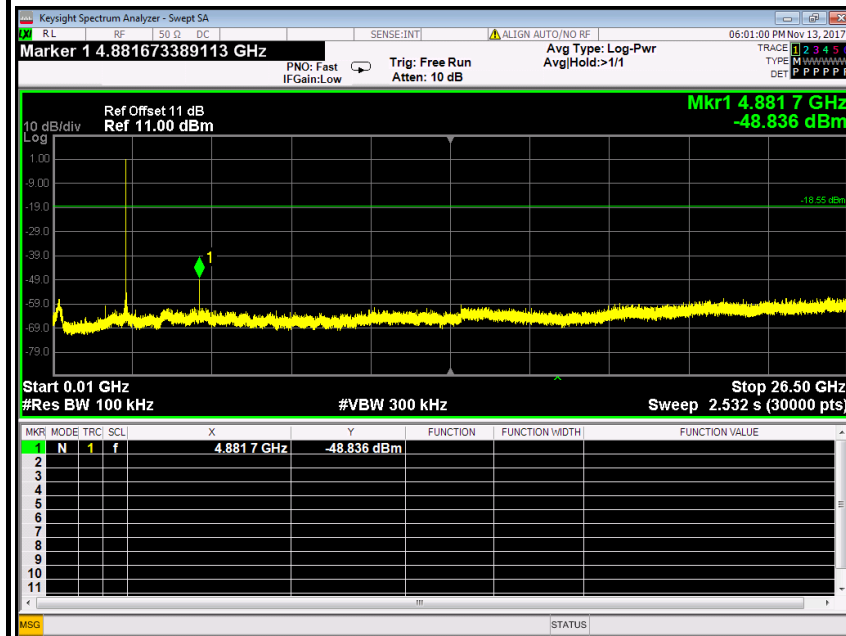




CH High (10MHz ~26.5GHz)

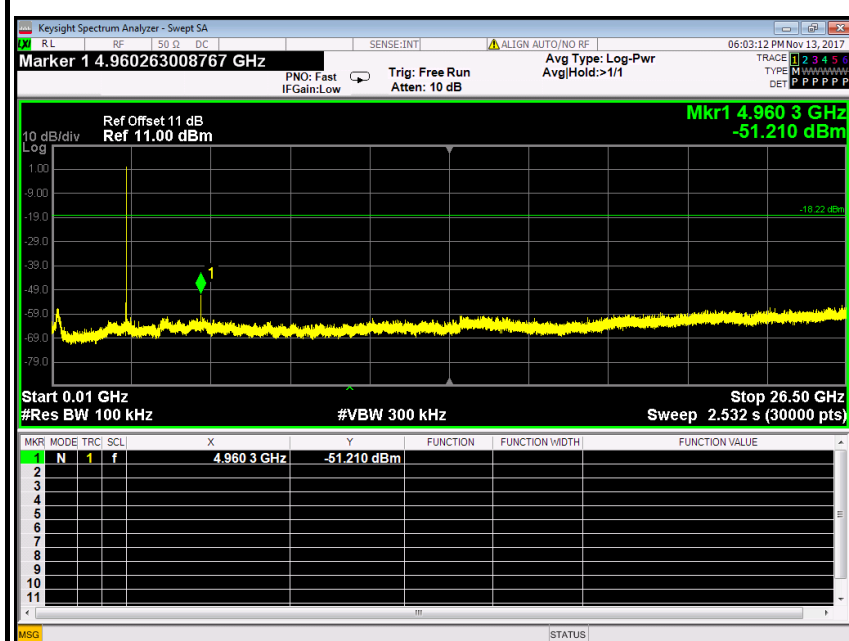


CH High (2.475GHz ~ 2.5GHz)

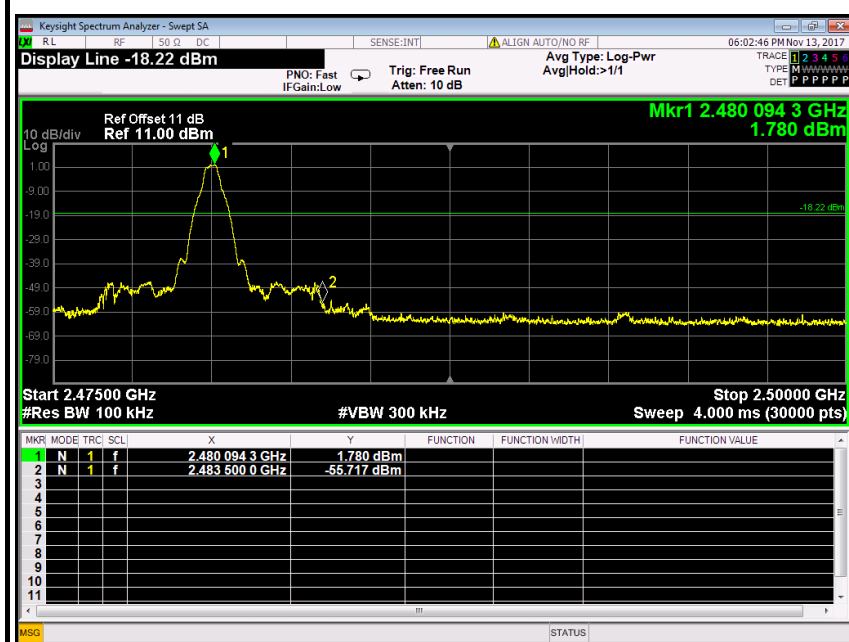




Test Plot (8DPSK)

CH Low (10MHz ~26.5GHz)


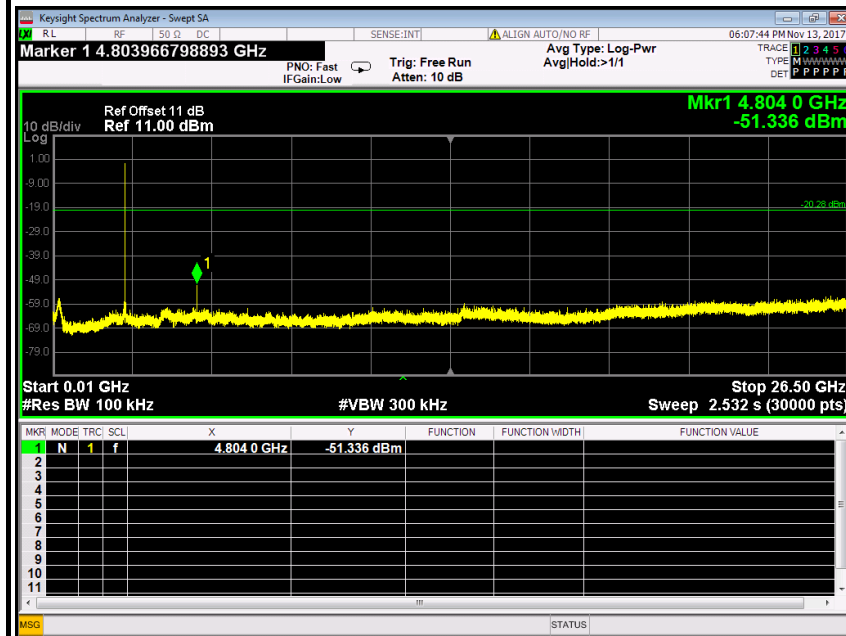


CH Low (2.31GHz ~2.41GHz)

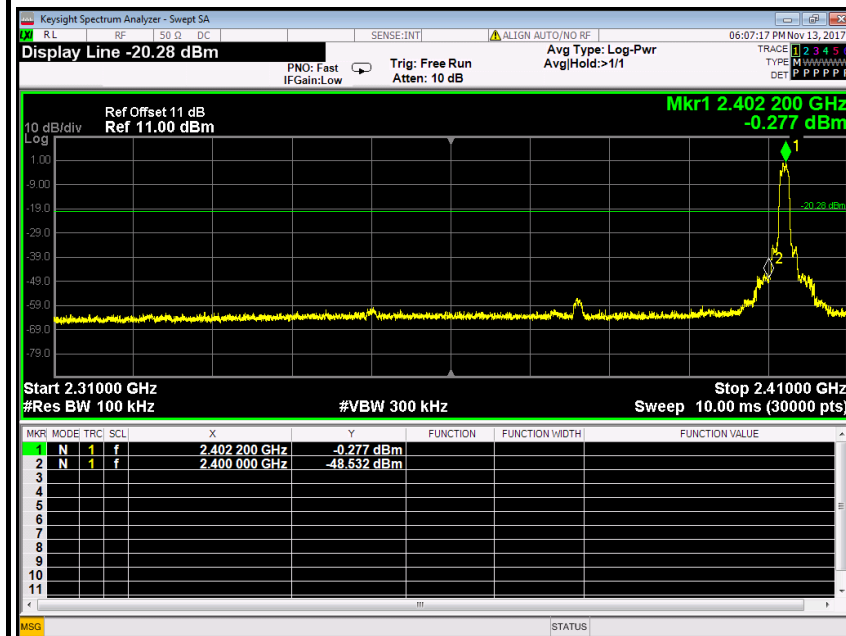




CH Mid (10MHz ~26.5GHz)

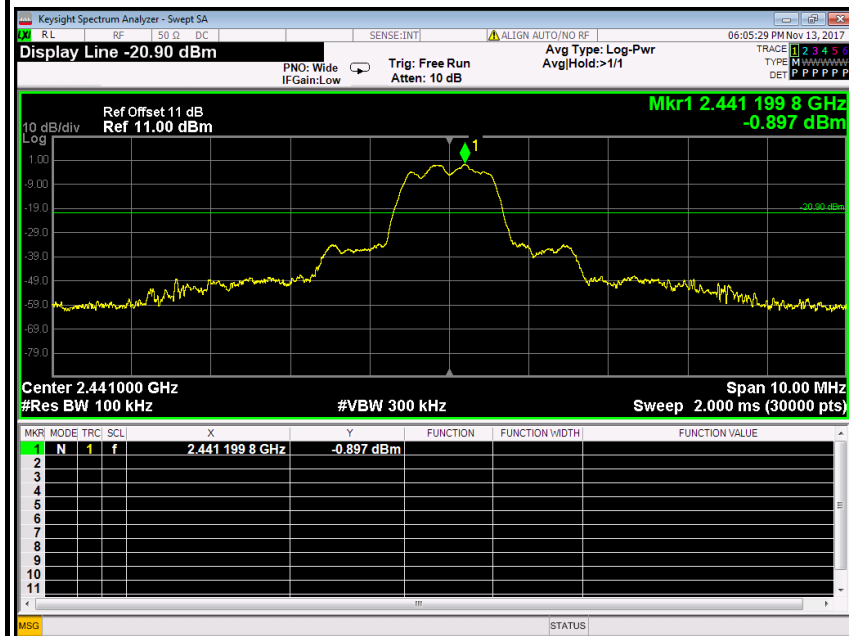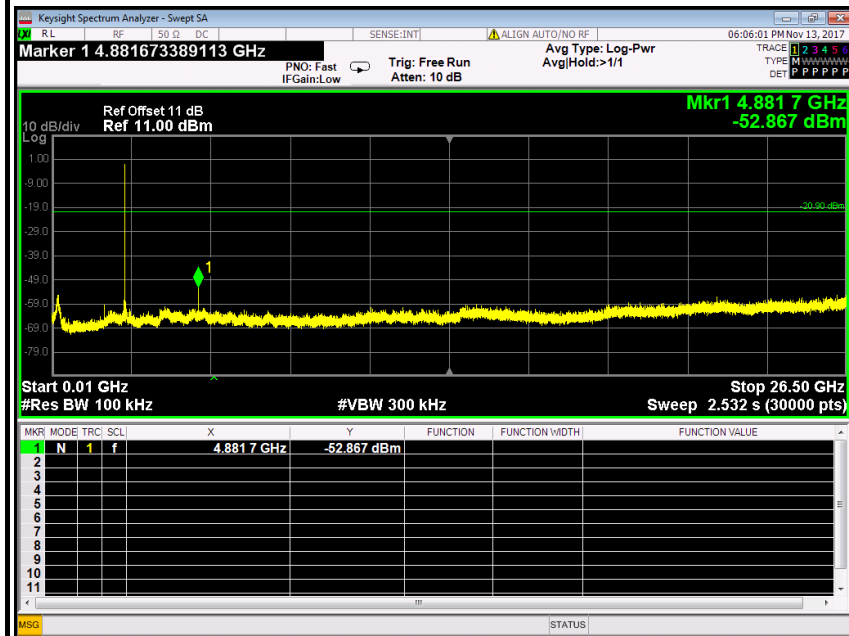




CH High (10MHz ~26.5GHz)

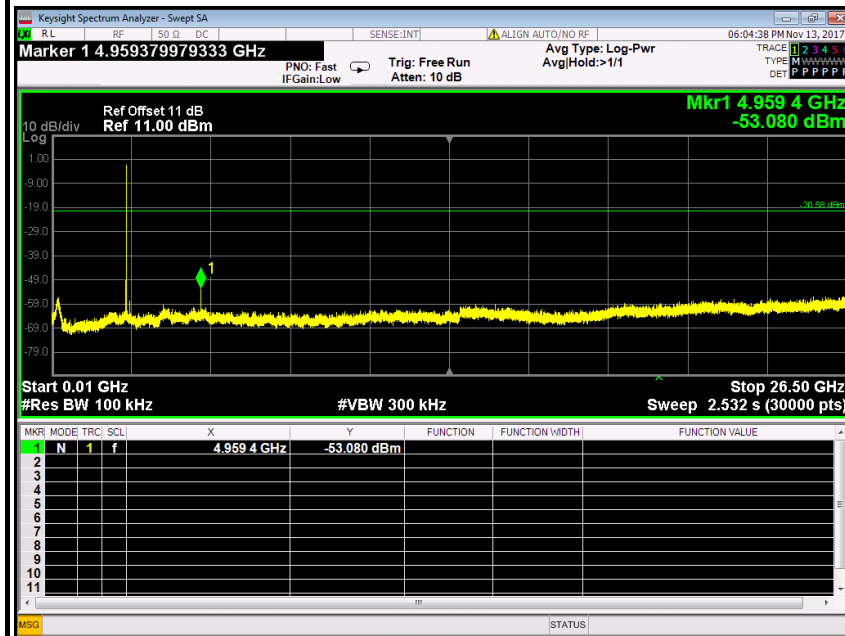

CH High (2.475GHz ~ 2.5GHz)

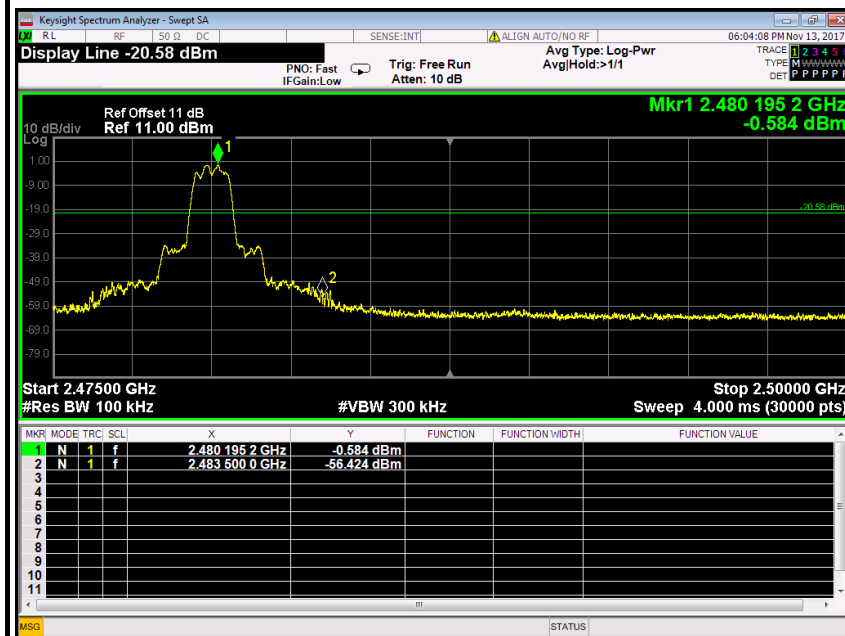




Hopping On


Test Data (GFSK)

CH Low (2.31GHz ~2.5GHz)

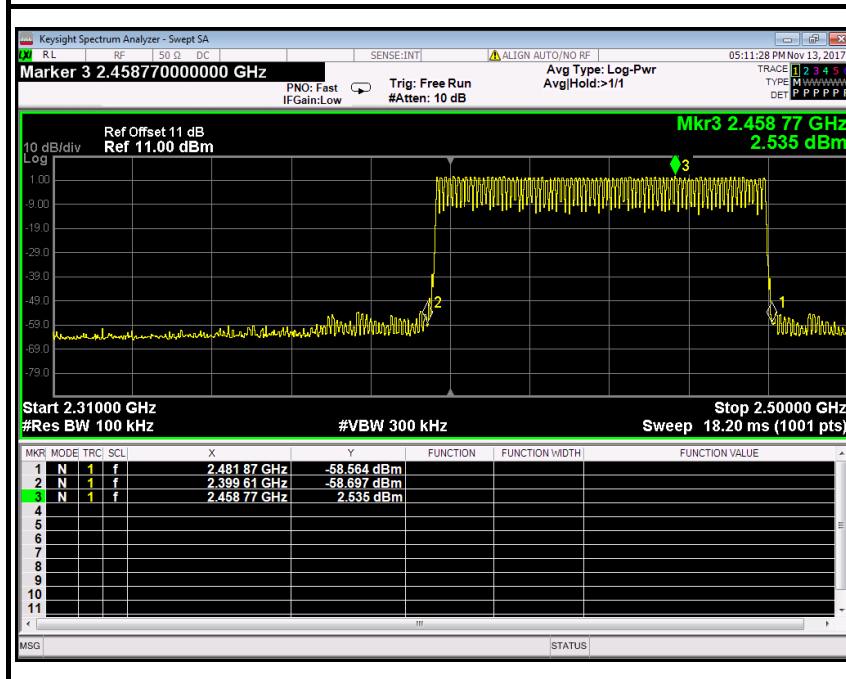

Test Data (8DPSK)

CH Low (2.31GHz ~2.5GHz)

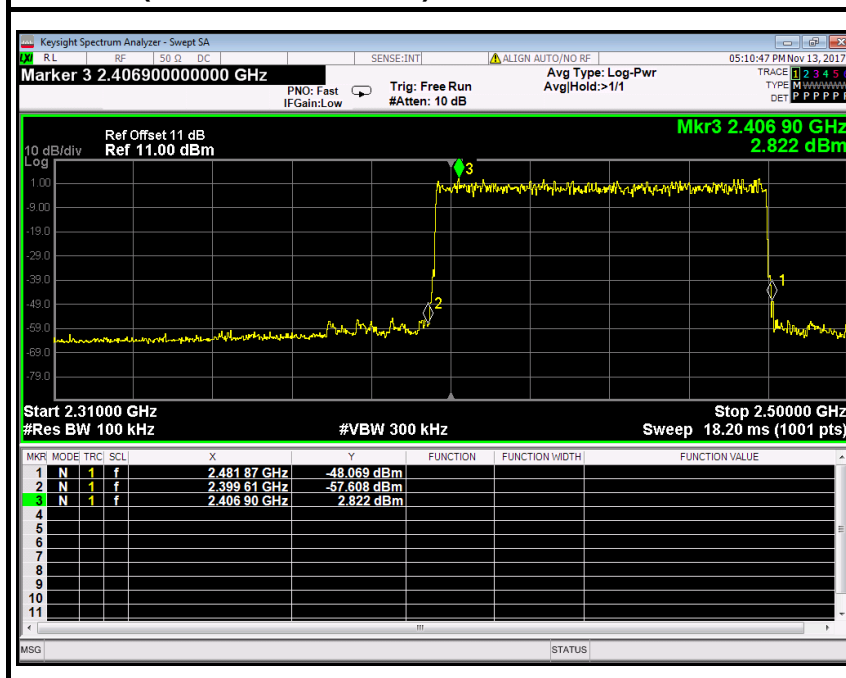



6.9.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**MEASUREMENT EQUIPMENT USED**


Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2017	09/24/2018
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.




Test Configuration

Below 30MHz

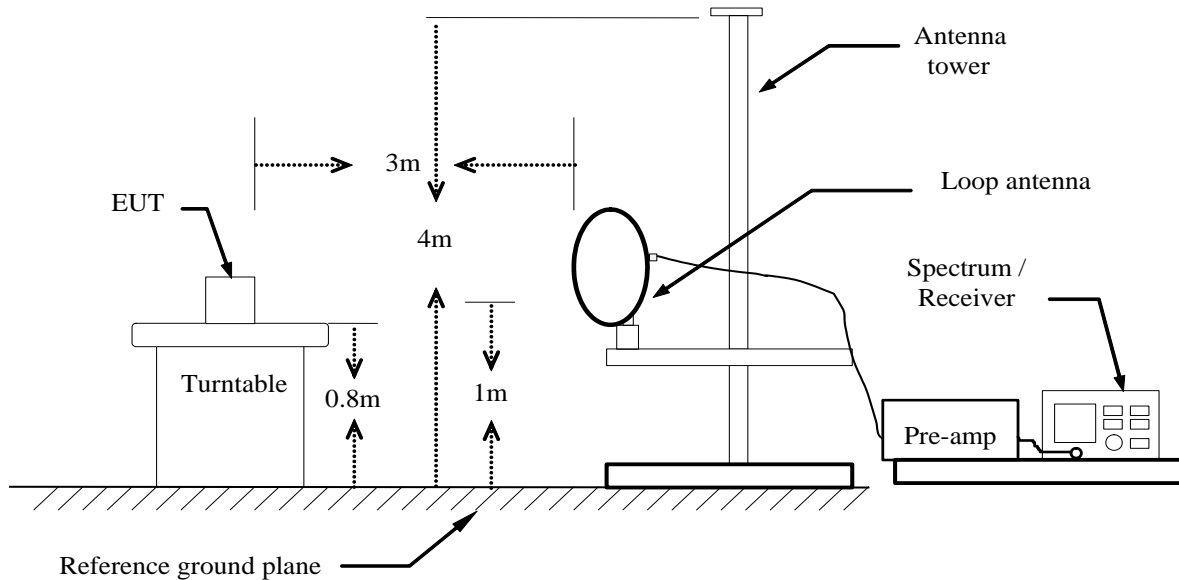


Below 1 GHz

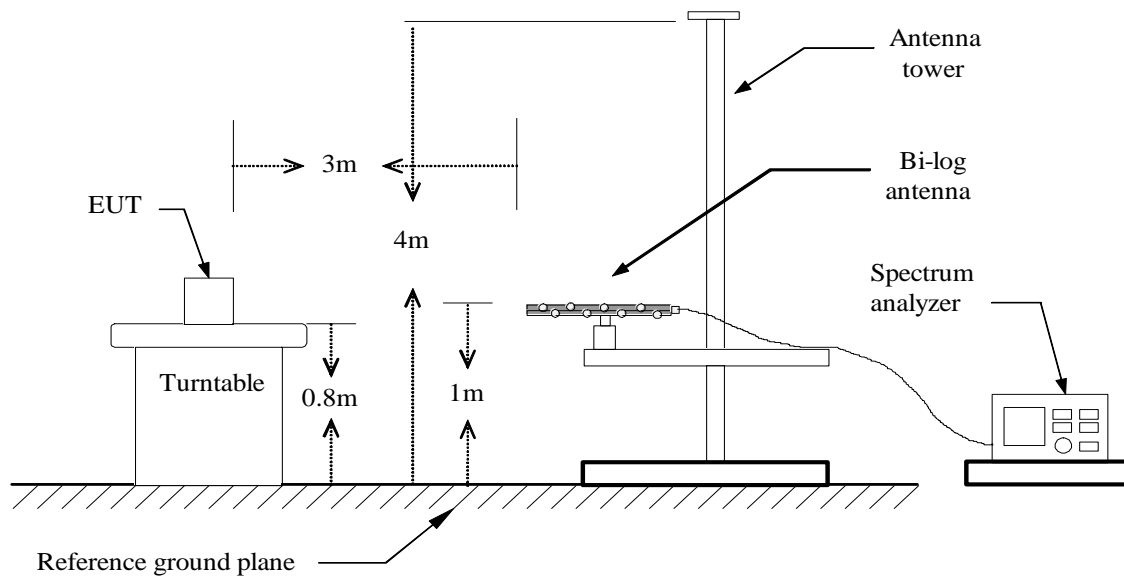



Above 1 GHz

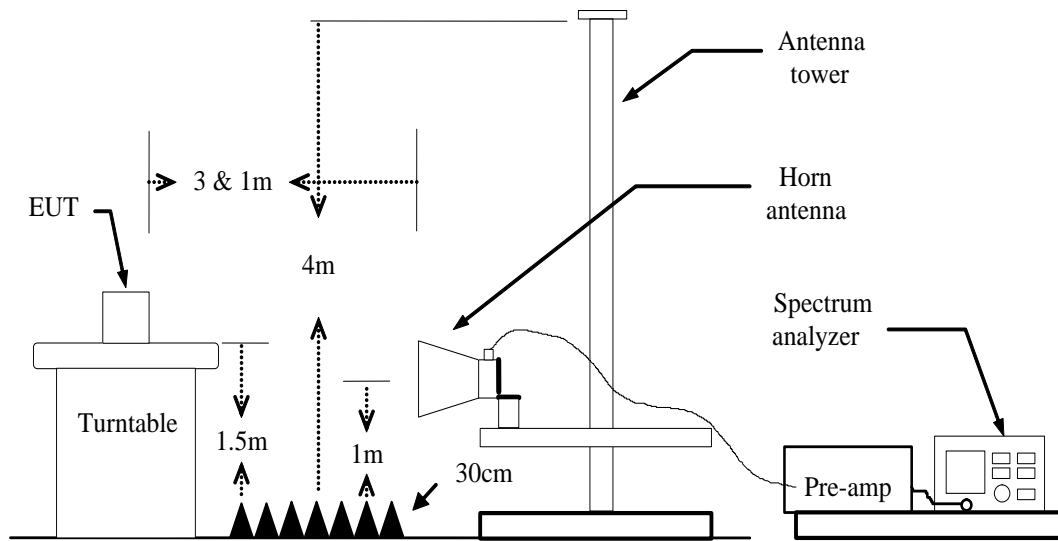



MEASURING SETTING

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

TEST PROCEDURE

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the



maximum of all emissions

Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

**TEST RESULTS****Below 1 GHz****Test Mode:** TX / 8DFSK(CH Low)**Tested by:** Fade Zhong**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
51.3400	40.61	-21.56	19.05	40.00	-20.95	V	QP
126.0300	49.16	-20.90	28.26	43.50	-15.24	V	QP
222.0600	38.34	-20.66	17.68	46.00	-28.32	V	QP
289.9600	42.68	-20.47	22.21	46.00	-23.79	V	QP
353.9800	41.87	-17.56	24.31	46.00	-21.69	V	QP
391.8100	39.74	-16.37	23.37	46.00	-22.63	V	QP
42.6100	41.82	-17.93	23.89	40.00	-16.11	H	QP
127.0000	52.29	-20.87	31.42	43.50	-12.08	H	QP
203.6300	49.72	-22.29	27.43	43.50	-16.07	H	QP
343.3100	42.42	-17.99	24.43	46.00	-21.57	H	QP
390.8400	39.18	-16.40	22.78	46.00	-23.22	H	QP
433.5200	39.82	-15.62	24.20	46.00	-21.80	H	QP

****Remark:** 1. No emission found between lowest internal used/generated frequency to 30MHz.

2. Pre-scan all mode and recorded the worst case results in this report (TX-Low Channel(1Mbps)).


Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5.


Frequency (MHz).	= Emission frequency in MHz
Reading (dBuV)	= Receiver reading
Correction Factor(dB/m)	= Antenna factor + Cable loss – Amplifier gain
Actual FS (dBuV/m)	= Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin(dB)	= Measured (dBuV/m) – Limits (dBuV/m)
Antenna Pole(V/H)	= Current carrying line of reading



Vertical

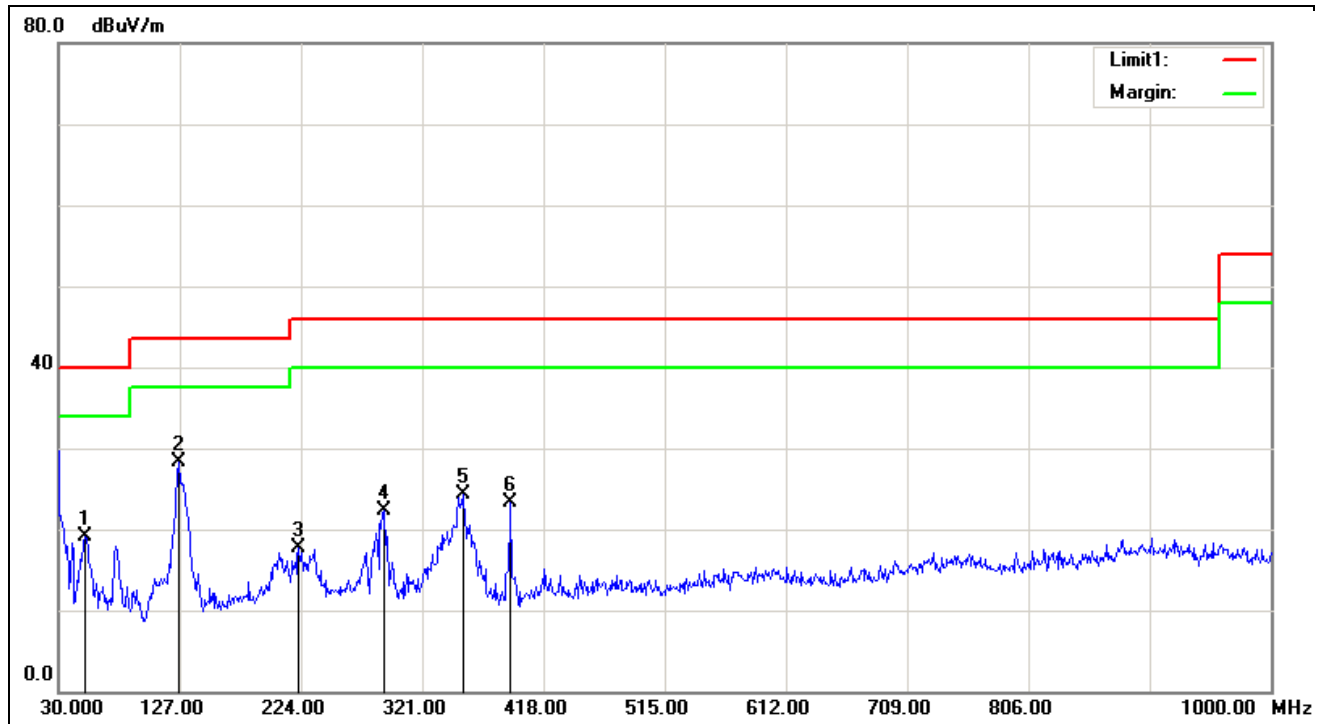

Horizontal

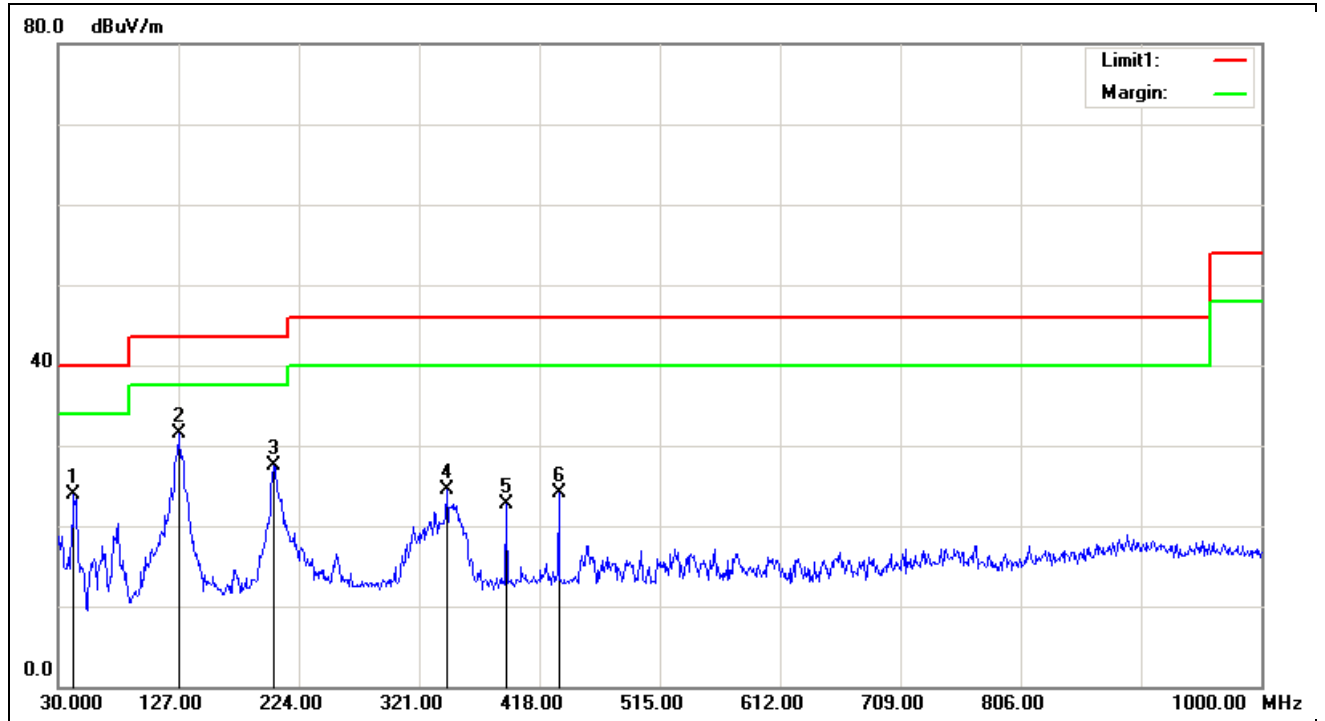

**Above 1 GHz****GFSK****Test Mode:** TX(CH Low)**Tested by:** Fade Zhong**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1594.000	63.29	-6.71	56.58	74.00	-17.42	V	peak
1594.000	50.28	-6.71	43.57	54.00	-10.43	V	peak
2998.000	51.63	-1.36	50.27	74.00	-23.73	V	peak
3736.000	42.37	0.48	42.85	74.00	-31.15	V	peak
4807.000	49.69	4.35	54.04	74.00	-19.96	V	peak
4807.000	46.36	4.35	50.71	54.00	-3.29	V	AVG
6967.000	40.68	7.65	48.33	74.00	-25.67	V	peak
1594.000	53.24	-6.71	46.53	74.00	-27.47	H	Peak
2989.000	48.18	-1.38	46.80	74.00	-27.20	H	Peak
4366.000	42.17	2.88	45.05	74.00	-28.95	H	Peak
4807.000	50.49	4.35	54.84	74.00	-19.16	H	peak
4807.000	45.51	4.35	49.86	54.00	-4.14	H	AVG
6148.000	40.30	6.32	46.62	74.00	-27.38	H	peak
6724.000	41.34	7.25	48.59	74.00	-25.41	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Fade ZhongAmbient temperature: 24°C Relative humidity: 52% RH Date: November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1603.000	61.23	-6.69	54.54	74.00	-19.46	V	peak
1603.000	53.24	-6.69	46.55	54.00	-7.45	V	peak
2989.000	53.91	-1.38	52.53	74.00	-21.47	V	peak
2989.000	46.58	-1.38	45.20	54.00	-8.80	V	AVG
3988.000	42.19	1.54	43.73	74.00	-30.27	V	peak
4357.000	41.79	2.85	44.64	74.00	-29.36	V	peak
4879.000	46.24	4.59	50.83	74.00	-23.17	H	peak
6004.000	40.75	6.09	46.84	74.00	-27.16	H	peak
1603.000	52.47	-6.69	45.78	74.00	-28.22	H	Peak
2989.000	48.31	-1.38	46.93	74.00	-27.07	H	Peak
3925.000	42.04	1.27	43.31	74.00	-30.69	H	Peak
4879.000	47.88	4.59	52.47	74.00	-21.53	H	peak
4879.000	42.99	4.59	47.58	54.00	-6.42	H	AVG
5266.000	42.16	5.45	47.61	74.00	-26.39	H	peak
6598.000	41.12	7.05	48.17	74.00	-25.83	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Fade ZhongAmbient temperature: 24°C Relative humidity: 52% RH Date: November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1387.000	54.12	-7.11	47.01	74.00	-26.99	V	peak
2989.000	53.14	-1.38	51.76	74.00	-22.24	V	peak
3970.000	41.67	1.46	43.13	74.00	-30.87	V	peak
4600.000	42.86	3.68	46.54	74.00	-27.46	V	peak
4960.000	44.49	4.85	49.34	74.00	-24.66	V	peak
6661.000	41.54	7.15	48.69	74.00	-25.31	V	peak
1603.000	55.44	-6.69	48.75	74.00	-25.25	H	Peak
2530.000	45.79	-2.21	43.58	74.00	-30.42	H	Peak
2998.000	48.59	-1.36	47.23	74.00	-26.77	H	Peak
4285.000	41.78	2.59	44.37	74.00	-29.63	H	peak
5149.000	42.14	5.25	47.39	74.00	-26.61	H	peak
6886.000	41.63	7.52	49.15	74.00	-24.85	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

**8DPSK****Test Mode:** TX(CH Low)**Tested by:** Fade Zhong**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1594.000	58.85	-6.71	52.14	74.00	-21.86	V	peak
1594.000	53.28	-6.71	46.57	54.00	-7.43	V	AVG
1747.000	58.67	-6.38	52.29	74.00	-21.71	V	peak
1747.000	47.68	-6.38	41.30	54.00	-12.70	V	AVG
2170.000	45.87	-4.07	41.80	74.00	-32.20	V	peak
2557.000	44.90	-2.16	42.74	74.00	-31.26	V	peak
2989.000	50.00	-1.38	48.62	74.00	-25.38	V	peak
4429.000	41.91	3.10	45.01	74.00	-28.99	V	peak
4807.000	50.67	4.35	55.02	74.00	-18.98	V	peak
4807.000	45.28	4.35	49.63	54.00	-4.37	V	AVG
1594.000	61.05	-6.71	54.34	74.00	-19.66	H	Peak
1594.000	54.07	-6.71	47.36	54.00	-6.64	H	Peak
1747.000	54.76	-6.38	48.38	74.00	-25.62	H	Peak
2521.000	45.71	-2.22	43.49	74.00	-30.51	H	peak
2998.000	44.55	-1.36	43.19	74.00	-30.81	H	peak
3862.000	42.22	1.01	43.23	74.00	-30.77	H	peak
4807.000	50.08	4.35	54.43	74.00	-19.57	H	peak
4807.000	44.30	4.35	48.65	54.00	-5.35	H	AVG

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)

Pk = Peak Reading

AV = Average Reading

Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH Mid)Tested by: Fade ZhongAmbient temperature: 24°C Relative humidity: 52% RH Date: November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1324.000	50.45	-7.34	43.11	74.00	-30.89	V	peak
1738.000	60.63	-6.40	54.23	74.00	-19.77	V	peak
1738.000	49.97	-6.40	43.57	54.00	-10.43	V	AVG
2998.000	50.77	-1.36	49.41	74.00	-24.59	V	peak
4393.000	42.44	2.97	45.41	74.00	-28.59	V	peak
4879.000	46.52	4.59	51.11	74.00	-22.89	V	peak
5491.000	42.16	5.85	48.01	74.00	-25.99	V	peak
1603.000	61.40	-6.69	54.71	74.00	-19.29	H	Peak
1603.000	53.01	-6.69	46.32	54.00	-7.68	H	AVG
2539.000	44.74	-2.19	42.55	74.00	-31.45	H	Peak
2998.000	44.28	-1.36	42.92	74.00	-31.08	H	peak
4213.000	42.32	2.34	44.66	74.00	-29.34	H	peak
4879.000	46.46	4.59	51.05	74.00	-22.95	H	peak
5617.000	41.41	5.92	47.33	74.00	-26.67	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Fade ZhongAmbient temperature: 24°C Relative humidity: 52% RH Date: November 11, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1603.000	56.68	-6.69	49.99	74.00	-24.01	V	peak
1747.000	61.01	-6.38	54.63	74.00	-19.37	V	peak
1747.000	51.74	-6.38	45.36	54.00	-8.64	V	AVG
2989.000	49.45	-1.38	48.07	74.00	-25.93	V	peak
3772.000	42.85	0.63	43.48	74.00	-30.52	V	peak
4420.000	42.56	3.07	45.63	74.00	-28.37	V	peak
5554.000	42.35	5.89	48.24	74.00	-25.76	V	peak
1594.000	60.10	-6.71	53.39	74.00	-20.61	H	Peak
1594.000	52.07	-6.71	45.36	54.00	-8.64	H	AVG
2242.000	45.58	-3.67	41.91	74.00	-32.09	H	Peak
2989.000	45.13	-1.38	43.75	74.00	-30.25	H	Peak
3988.000	41.96	1.54	43.50	74.00	-30.50	H	peak
4402.000	41.96	3.01	44.97	74.00	-29.03	H	peak
5005.000	42.41	4.99	47.40	74.00	-26.60	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m) - Limit (dBμV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.10 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/21/2017	02/20/2018
LISN	EMCO	3825/2	8901-1459	02/21/2017	02/20/2018
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST CONFIGURATION

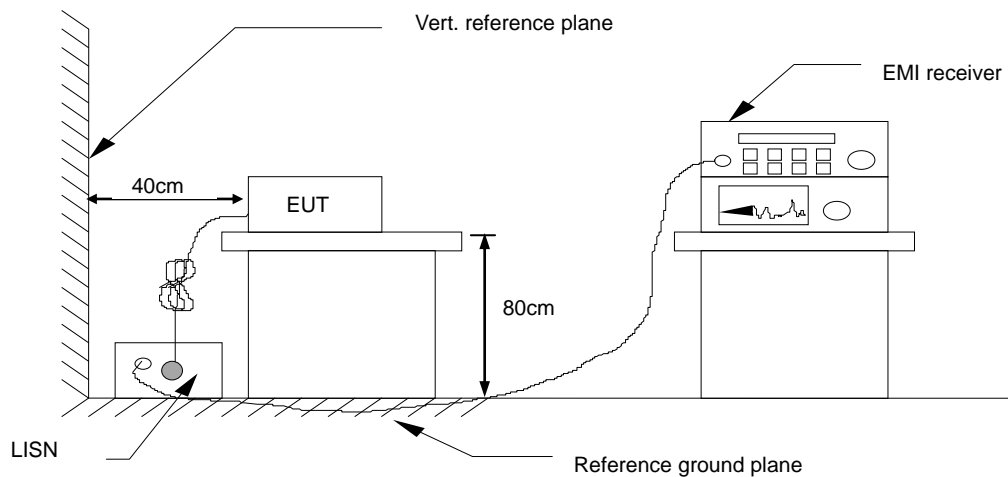

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Test Data

Model No.	Cube speaker 2.1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Karl Li	Line	L1
Test Date	October 16, 2017	Test Voltage	AC120V/60Hz

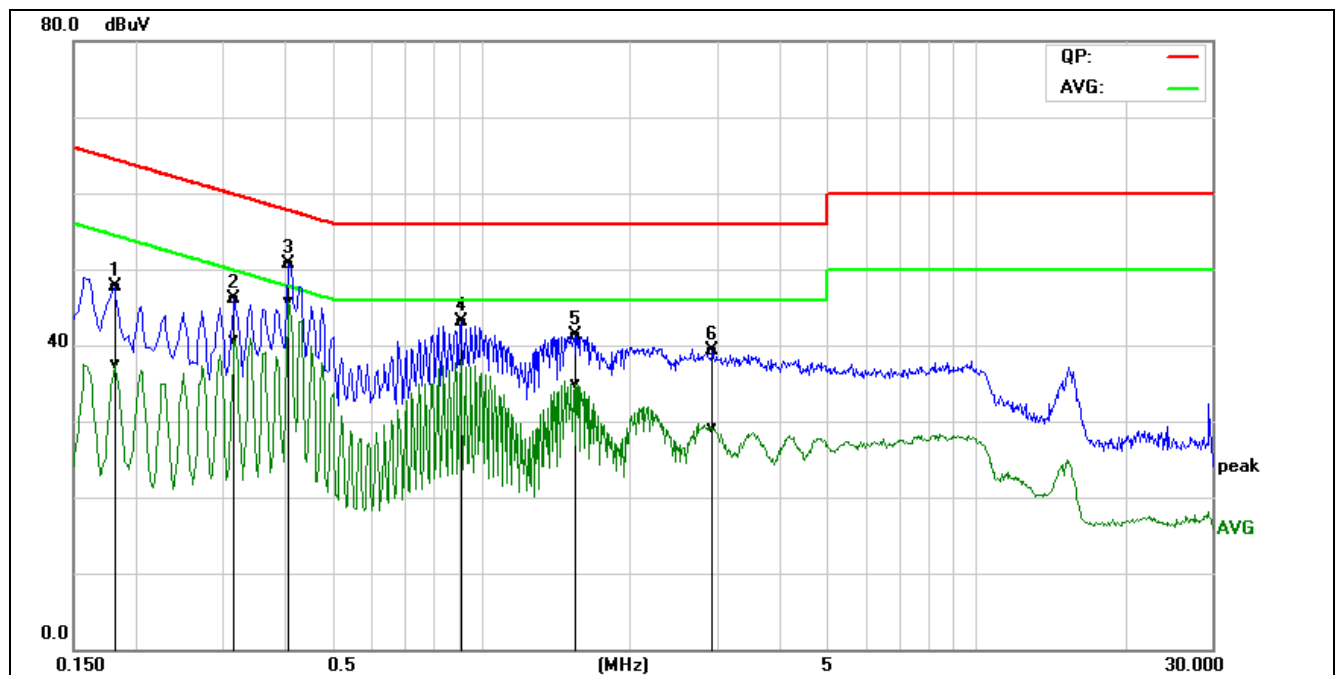


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1819	27.99	17.78	19.63	47.62	37.41	64.39	54.40	-16.77	-16.99	Pass	L1
0.3180	26.47	21.05	19.60	46.07	40.65	59.76	49.76	-13.69	-9.11	Pass	L1
0.4100	31.19	26.16	19.56	50.75	45.72	57.65	47.65	-6.90	-1.93	Pass	L1
0.9100	23.47	18.33	19.57	43.04	37.90	56.00	46.00	-12.96	-8.10	Pass	L1
1.5460	21.57	15.26	19.64	41.21	34.90	56.00	46.00	-14.79	-11.10	Pass	L1
2.9340	19.50	9.43	19.72	39.22	29.15	56.00	46.00	-16.78	-16.85	Pass	L1

REMARKS: L1 = Line One (Live Line)



Model No.	Cube speaker 2.1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Karl Li	Line	L2
Test Date	October 16, 2017	Test Voltage	AC120V/60Hz

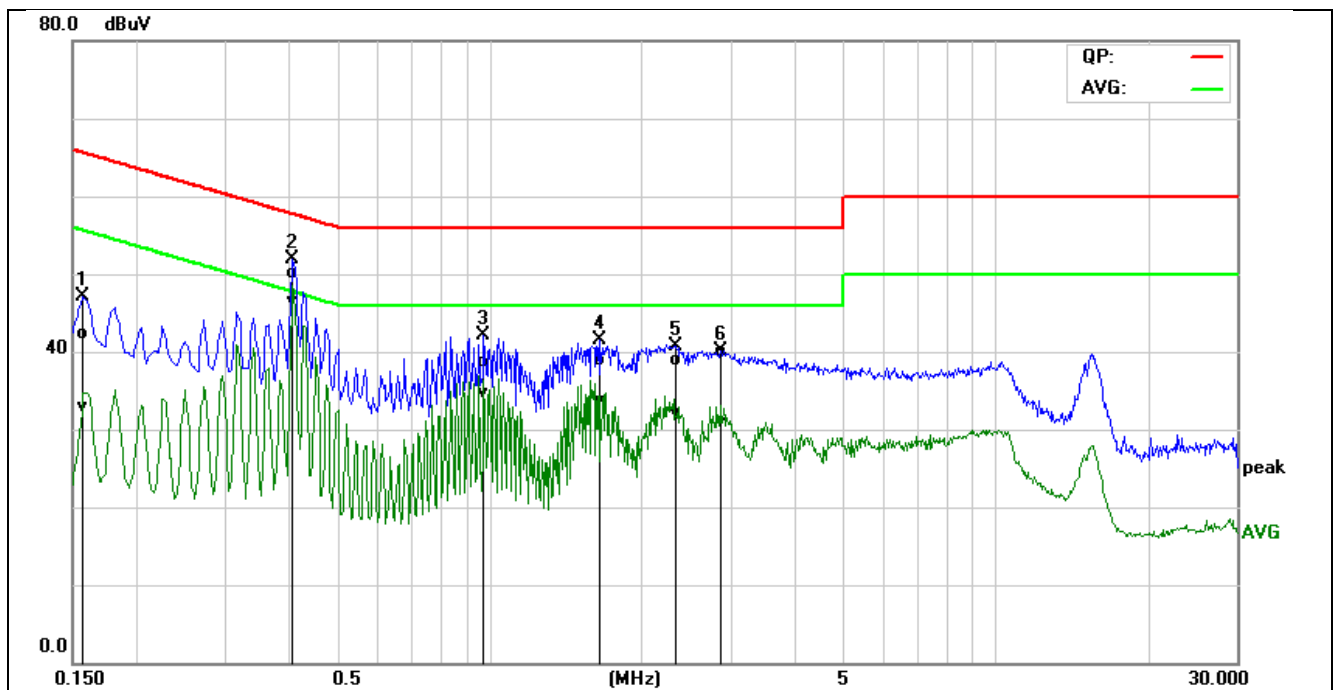


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1561	22.77	13.44	19.52	42.29	32.96	65.66	55.67	-23.37	-22.71	Pass	L2
0.4112	30.51	27.00	19.53	50.04	46.53	57.62	47.62	-7.58	-1.09	Pass	L2
0.9745	19.24	15.22	19.56	38.80	34.78	56.00	46.00	-17.20	-11.22	Pass	L2
1.6334	19.33	14.02	19.65	38.98	33.67	56.00	46.00	-17.02	-12.33	Pass	L2
2.3162	19.24	12.40	19.73	38.97	32.13	56.00	46.00	-17.03	-13.87	Pass	L2
2.8820	20.42	11.25	19.75	40.17	31.00	56.00	46.00	-15.83	-15.00	Pass	L2

REMARKS: L2 = Line Two (Neutral Line)



Model No.	Cube speaker 2.1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Karl Li	Line	L1
Test Date	October 10, 2017	Test Voltage	AC240V/50Hz

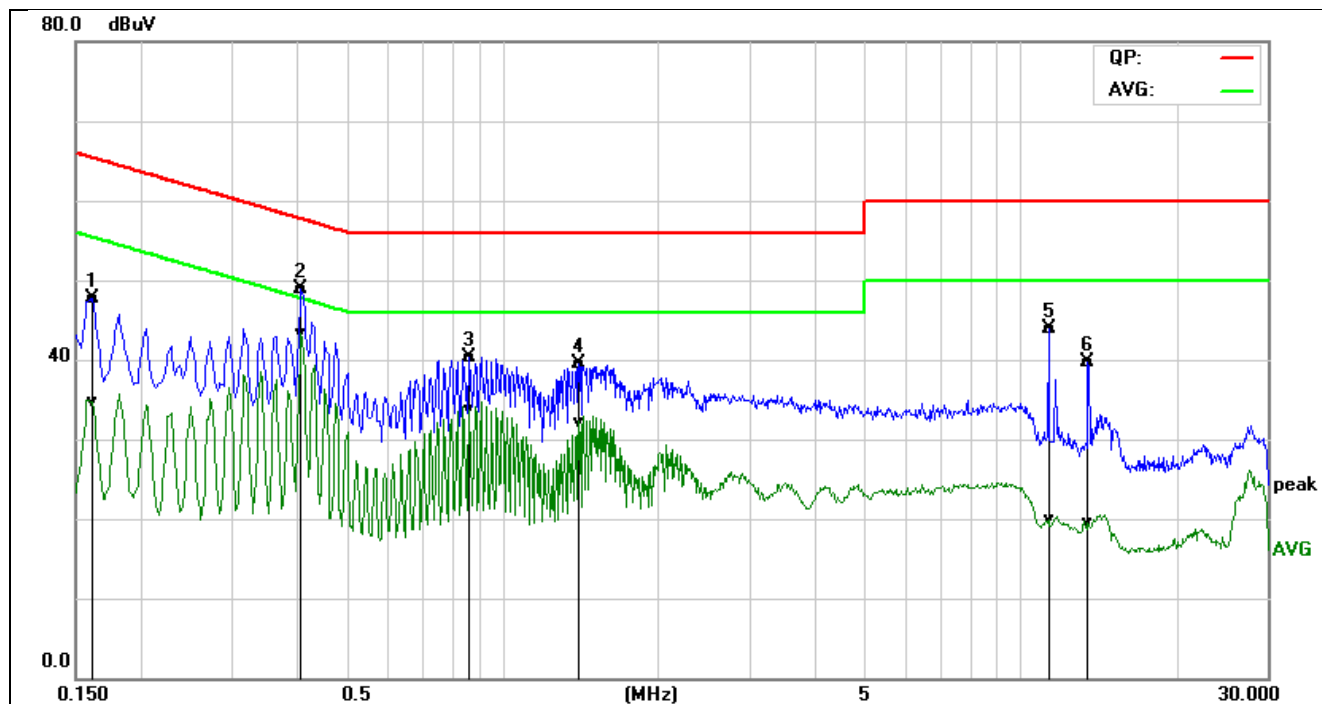


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1620	28.15	14.99	19.62	47.77	34.61	65.36	55.36	-17.59	-20.75	Pass	L1
0.4100	29.32	23.72	19.56	48.88	43.28	57.65	47.65	-8.77	-4.37	Pass	L1
0.8660	20.74	14.09	19.58	40.32	33.67	56.00	46.00	-15.68	-12.33	Pass	L1
1.4100	19.80	12.58	19.62	39.42	32.20	56.00	46.00	-16.58	-13.80	Pass	L1
11.3260	23.73	-0.26	20.12	43.85	19.86	60.00	50.00	-16.15	-30.14	Pass	L1
13.5420	19.70	-0.64	20.05	39.75	19.41	60.00	50.00	-20.25	-30.59	Pass	L1

REMARKS: L1 = Line One (Live Line)



Model No.	Cube speaker 2.1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Karl Li	Line	L2
Test Date	October 10, 2017	Test Voltage	AC240V/50Hz

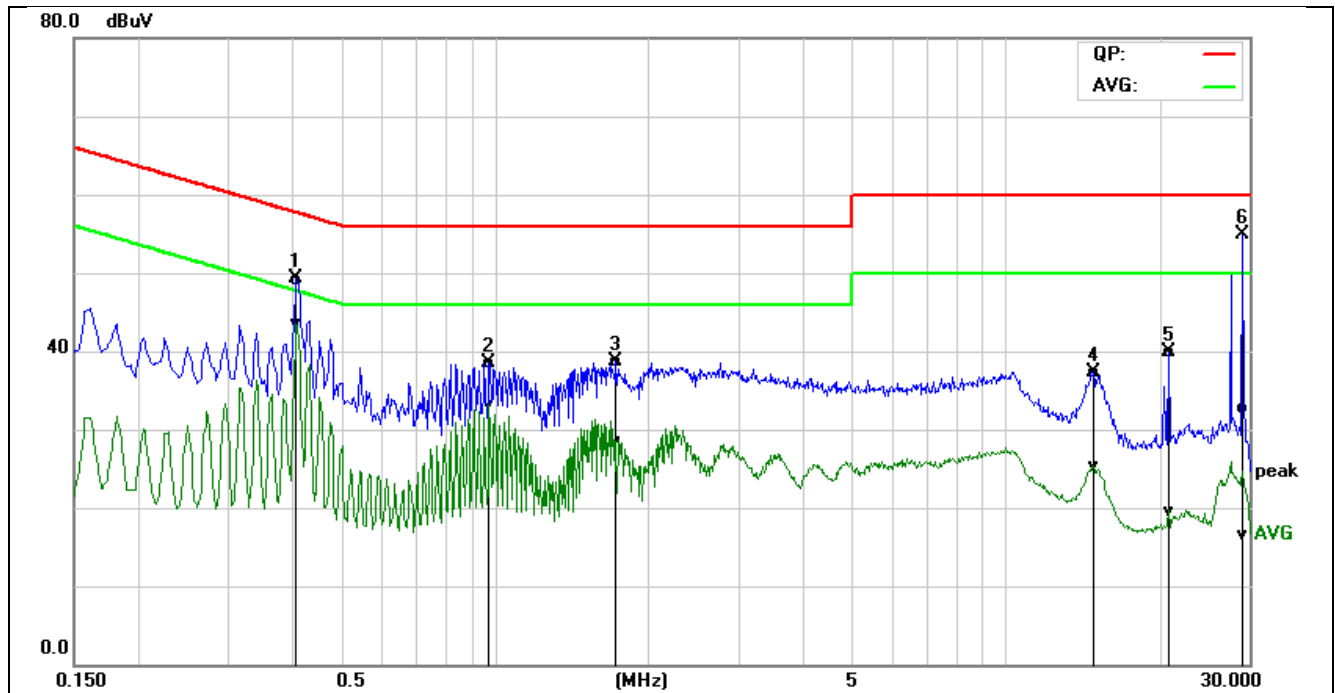

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.4100	29.67	24.06	19.53	49.20	43.59	57.65	47.65	-8.45	-4.06	Pass	L2
0.9780	18.99	13.52	19.55	38.54	33.07	56.00	46.00	-17.46	-12.93	Pass	L2
1.7300	18.95	8.80	19.67	38.62	28.47	56.00	46.00	-17.38	-17.53	Pass	L2
14.8700	17.22	5.27	20.02	37.24	25.29	60.00	50.00	-22.76	-24.71	Pass	L2
20.8180	19.59	-0.69	20.29	39.88	19.60	60.00	50.00	-20.12	-30.40	Pass	L2
29.1660	12.19	-4.01	20.61	32.80	16.60	60.00	50.00	-27.20	-33.40	Pass	L2

REMARKS: L2 = Line Two (Neutral Line)