


Appendix D. SAR Test Setup Photos

Body-worn Exposure Condition




Front, Test Separation 15 mm

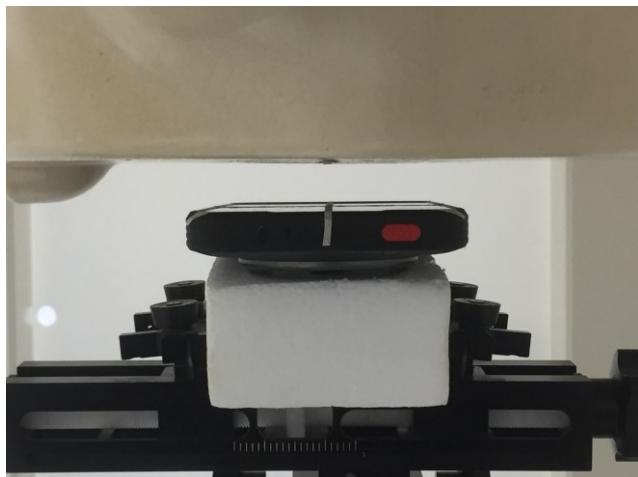

Back, Test Separation 15 mm

Product Specific 10g SAR

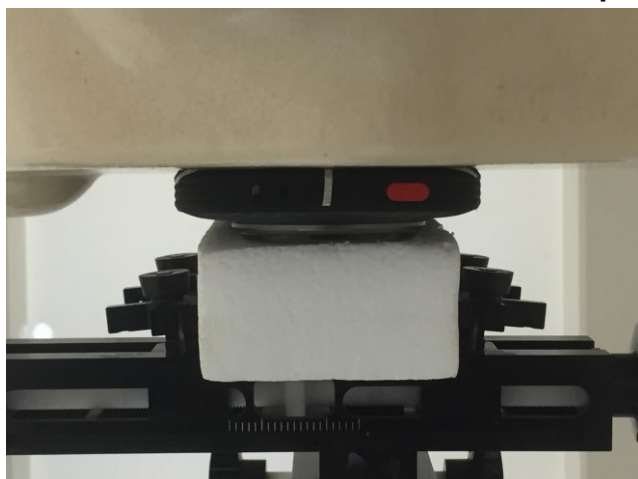

Front, Test Separation 0 mm



Back, Test Separation 0 mm



Left Side, Test Separation 0 mm



Right Side, Test Separation 0 mm



Top Side, Test Separation 0 mm




Bottom Side, Test Separation 0 mm

Sensor off



Front, Test Separation 10 mm

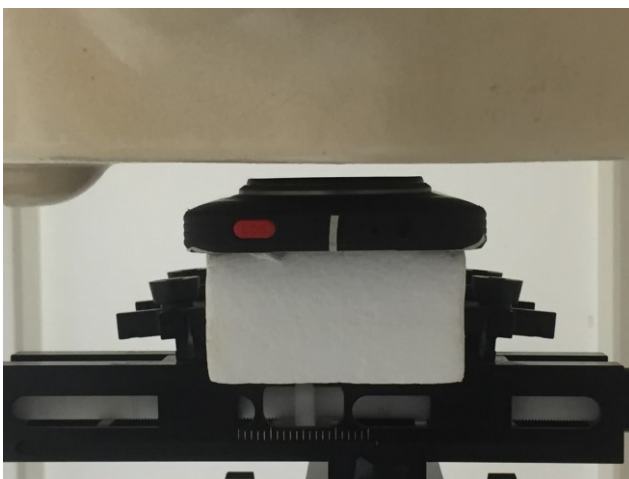

Back, Test Separation 11 mm




Left Side, Test Separation 10 mm



Top Side, Test Separation 11 mm

Antenna Location

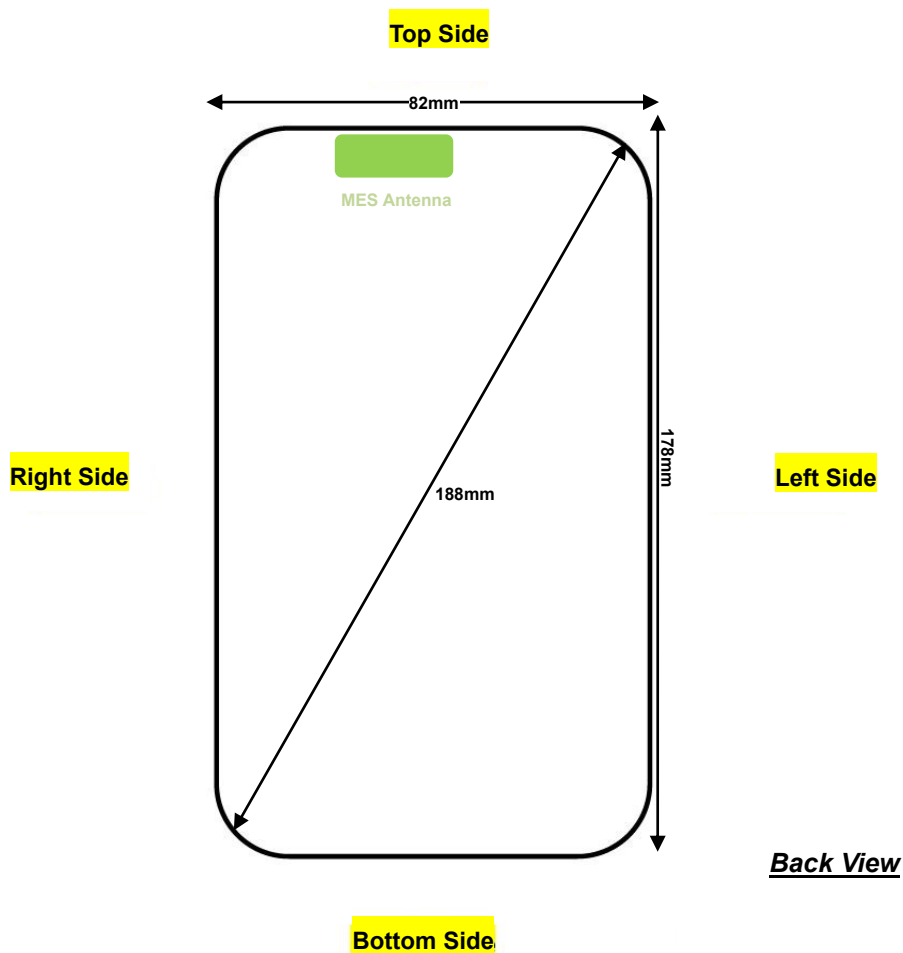

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
MES Antenna	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
MES Antenna	Yes	Yes	Yes	No	Yes	Yes

Note: Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.