



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM180300220401
Page: 1 of 31

TEST REPORT

Application No.:

SZEM1803002204CR

Applicant:

Buzz Bee Toys (HK) Co. Limited

Address of Applicant:

Units 1206-08, Tower B, New Mandarin Plaza, 14 Science Museum Road,
Kowloon, Hong Kong

Equipment Under Test (EUT):

COVERT SQUAD AND WALKIE TALKIE DEVICE

EUT Name:

62850, 62800, 62801, 62802, 62803, 62804, 62805, 62806, 62807, 62808,
62809, 62810, 62811, 62812, 62813, 62814, 62815, 62816, 62817, 62818,
62819, 62820, 62821, 62822, 62823, 62824, 62825, 62826, 62827, 62828,
62829, 62830, 62831, 62832, 62833, 62834, 62835, 62836, 62837, 62838,
62839, 62840, 62841, 62842, 62843, 62844, 62845, 62846, 62847, 62848,
62849, 62851, 62852, 62853, 62854, 62855, 62856, 62857, 62858, 62859,
62860, 62861, 62862, 62863, 62864, 62865, 62866, 62867, 62868, 62869,
62870, 62871, 62872, 62873, 62874, 62875, 62876, 62877, 62878, 62879,
62880, 62881, 62882, 62883, 62884, 62885, 62886, 62887, 62888, 62889,
62890, 62891, 62892, 62893, 62894, 62895, 62896, 62897, 62898, 62899 ♦

♦

Please refer to section 2 of this report which indicates which model was
actually tested and which were electrically identical.

FCC ID:

2APIW-62850

Standard(s) :

47 CFR Part 95, Subpart B

RSS-210 Issue 9

RSS-Gen Issue 4

Date of Receipt:

2018-03-26

Date of Test:

2018-03-26 to 2018-03-28

Date of Issue:

2018-03-30

Test Result:	Pass*
---------------------	-------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-03-30		Original

Authorized for issue by:			
		Harry Wu /Project Engineer	
		Eric Fu /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 95, Subpart B, RSS-Gen	N/A	47 CFR Part 95, Subpart B 95.587(b) RSS-210 Issue 9 E.1(b)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Frequency Stability	47 CFR Part 95, Subpart B, RSS-Gen	ANSI/TIA-603-E:2016	47 CFR FCC Part95.565 & FCC Part2.1055; RSS-210 Issue 9 E.2.6	Pass
Effective Radiated Power (ERP)	47 CFR Part 95, Subpart B, RSS-Gen	ANSI/TIA-603-E:2016	47 CFR FCC Part95.567 & FCC Part2.1046; RSS-210 Issue 9 E.2.4	Pass
Occupied Bandwidth	47 CFR Part 95, Subpart B, RSS-Gen	ANSI/TIA-603-E:2016	47 CFR FCC Part 95.573 & FCC Part2.1049; RSS-210 Issue 9 E.2.3	Pass
Modulation characteristics	47 CFR Part 95, Subpart B, RSS-Gen	ANSI/TIA-603-E:2016	47 CFR FCC Part 95.575 & FCC Part2.1047; RSS-210 Issue 9 E.2.2	Pass
Radiated Spurious Emissions	47 CFR Part 95, Subpart B, RSS-Gen	ANSI/TIA-603-E:2016	47 CFR FCC Part 95.579 & FCC Part2.1053; RSS-210 Issue 9 E.2.5	Pass

Remark:

Model No.: 62850, 62800, 62801, 62802, 62803, 62804, 62805, 62806, 62807, 62808, 62809, 62810, 62811, 62812, 62813, 62814, 62815, 62816, 62817, 62818, 62819, 62820, 62821, 62822, 62823, 62824, 62825, 62826, 62827, 62828, 62829, 62830, 62831, 62832, 62833, 62834, 62835, 62836, 62837, 62838, 62839, 62840, 62841, 62842, 62843, 62844, 62845, 62846, 62847, 62848, 62849, 62851, 62852, 62853, 62854, 62855, 62856, 62857, 62858, 62859, 62860, 62861, 62862, 62863, 62864, 62865, 62866, 62867, 62868, 62869, 62870, 62871, 62872, 62873, 62874, 62875, 62876, 62877, 62878, 62879, 62880, 62881, 62882, 62883, 62884, 62885, 62886, 62887, 62888, 62889, 62890, 62891, 62892, 62893, 62894, 62895, 62896, 62897, 62898, 62899

Only the model 62850 was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for all the above models, with only difference on item number, accessories and color.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 DETAILS OF E.U.T.....	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS.....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 EQUIPMENT LIST	7
6 RADIO SPECTRUM TECHNICAL REQUIREMENT.....	9
6.1 ANTENNA REQUIREMENT	9
6.1.1 <i>Test Requirement:</i>	9
6.1.2 <i>Conclusion</i>	9
7 RADIO SPECTRUM MATTER TEST RESULTS	10
7.1 FREQUENCY STABILITY	10
7.1.1 <i>E.U.T. Operation</i>	10
7.1.2 <i>Test Setup Diagram</i>	10
7.1.3 <i>Measurement Procedure and Data</i>	10
7.2 EFFECTIVE RADIATED POWER (ERP)	12
7.2.1 <i>E.U.T. Operation</i>	12
7.2.2 <i>Test Setup Diagram</i>	12
7.2.3 <i>Measurement Procedure and Data</i>	13
7.3 OCCUPIED BANDWIDTH.....	14
7.3.1 <i>E.U.T. Operation</i>	14
7.3.2 <i>Test Setup Diagram</i>	14
7.3.3 <i>Measurement Procedure and Data</i>	14
7.4 MODULATION CHARACTERISTICS	17
7.4.1 <i>E.U.T. Operation</i>	17
7.4.2 <i>Test Setup Diagram</i>	17
7.4.3 <i>Measurement Procedure and Data</i>	17
7.5 RADIATED UNWANTED EMISSIONS.....	26
7.5.1 <i>E.U.T. Operation</i>	26
7.5.2 <i>Test Setup Diagram</i>	27
7.5.3 <i>Measurement Procedure and Data</i>	27
8 PHOTOGRAPHS	30
8.1 EFFECTIVE RADIATED POWER TEST SETUP.....	30
8.2 RADIATED SPURIOUS EMISSIONS TEST SETUP.....	30
8.3 EUT CONSTRUCTIONAL DETAILS	31

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 4.5V (3 x 1.5V AA batteries)
Cable:	Earphone: 100cm, Unshielded
Frequency Range:	462.5625-462.6625MHz
Modulation Type:	FM
Emission Type:	F3E
Antenna Type:	Integral
Antenna Gain:	0dBi

Channel 1: 462.5625MHz, Channel 5: 462.6625MHz

4.2 Description of Support Units

The EUT has been tested independent unit.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25×10^{-8}
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz) 4.8dB (above 1GHz)
8	Radiated Spurious emission test	4.5dB (Below 1GHz) 4.8dB (Above 1GHz)
9	Temperature test	1 °C
10	Humidity test	3%
11	Supply voltages	1.5%

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

RF Conducted Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2017-09-27	2018-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2017-07-13	2018-07-12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26
Audio Analyzer	Rohde & Schwarz	UPL	SEM0093	2017-09-27	2018-09-26

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2017-05-02	2020-05-01
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2017-07-13	2018-07-12
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2017-04-14	2018-04-13
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-13
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2017-12-04	2018-12-03
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2017-04-14	2018-04-13
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2017-09-27	2018-09-26
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-28
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2017-04-14	2018-04-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2017-07-13	2018-07-12

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2017-04-18	2018-04-17

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 95, Subpart B 95.587(b) & RSS-210 Issue 9 E.1(b)

6.1.2 Conclusion

95.587(b) Requirement:

The antenna of each FRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the FRS transmitter type.
- (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
- (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.

RSS-210 Issue 9 E.1(b) Requirement:

- (b) The antenna of FRS devices must be an integral part of the unit.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The antenna gain is 0dBi (as compared to a half-wave dipole) and with vertically polarized.

Antenna Location:

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1803002204CR.

7 Radio Spectrum Matter Test Results

7.1 Frequency Stability

Test Requirement 47 CFR FCC Part 95.565 & FCC Part 2.1055;
RSS-210 Issue 9 E.2.6

Test Method: ANSI/TIA-603-E:2016

Limit: For FCC Part 95.565:
Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.


For RSS-210 Issue 9:
The carrier frequency stability shall be better than ± 5 ppm.

7.1.1 E.U.T. Operation

Operating Environment:
Temperature: 24.8 °C Humidity: 49.2 % RH Atmospheric Pressure: 1020 mbar

Test mode:
a:Tx mode(CH. 1), Keep the EUT in transmitting mode.
b:Tx mode(CH. 5), Keep the EUT in transmitting mode.

7.1.2 Test Setup Diagram

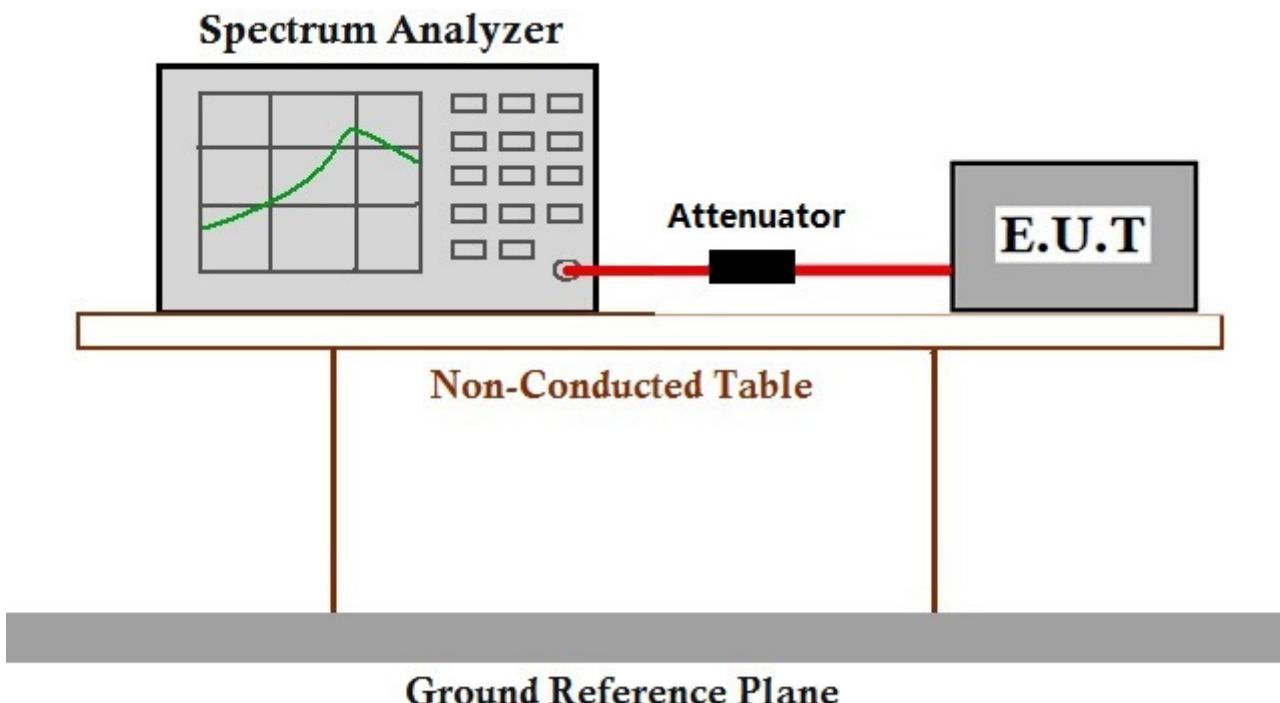

7.1.3 Measurement Procedure and Data

462.5625MHz

Assigned Frequency:462.5625MHz						
Voltage(V)	Temperature (°C)	Measured Frequency(MHz)	Frequency Deviation(ppm)	FCC Limit (ppm)	IC Limit (ppm)	Result
4.5	-30	462.5633	1.7	±2.5	±5	Pass
	-20	462.5633	1.7			
	-10	462.5634	1.9			
	0	462.5634	1.9			
	10	462.5635	2.2			
	20	462.5635	2.2			
	30	462.5635	2.2			
	40	462.5634	1.9			
	50	462.5635	2.2			
	5.2	462.5635	2.2			
3.8	25	462.5634	1.9			

462.6625MHz

Assigned Frequency:462.6625MHz						
Voltage(V)	Temperature (°C)	Measured Frequency(MHz)	Frequency Deviation(ppm)	FCC Limit (ppm)	IC Limit (ppm)	Result
4.5	-30	462.6633	1.7	±2.5	±5	Pass
	-20	462.6634	1.9			
	-10	462.6634	1.9			
	0	462.6635	2.2			
	10	462.6635	2.2			
	20	462.6635	2.2			
	30	462.6635	2.2			
	40	462.6634	1.9			
	50	462.6634	1.9			
	5.2	462.6635	2.2			
3.8	25	462.6635	2.2			


7.2 Effective Radiated Power (ERP)

Test Requirement	47 CFR FCC Part95.567 & FCC Part2.1046;
Test Method:	RSS-210 Issue 9 E.2.4
Measurement Distance:	ANSI/TIA-603-E:2016
Limit:	3m
	Test instrumentation resolution bandwidth 100 kHz (30 MHz - 1000 MHz)
	For FCC Part 95.567: Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.
	For RSS-210 E.2.4: The maximum permissible transmitted ERP of the equipment under any operating conditions shall not exceed 0.5 W.

7.2.1 E.U.T. Operation

Operating Environment:		
Temperature:	24.8 °C	Humidity: 49.3 % RH
Test mode:	a:Tx mode(CH. 1), Keep the EUT in transmitting mode.	Atmospheric Pressure: 1020 mbar
	b:Tx mode(CH. 5), Keep the EUT in transmitting mode.	

7.2.2 Test Setup Diagram

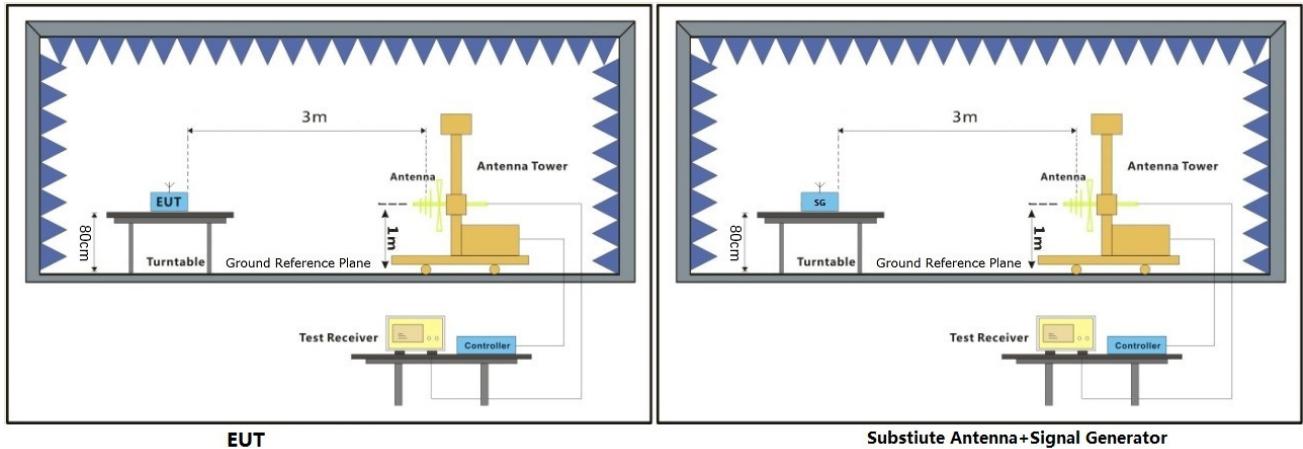

7.2.3 Measurement Procedure and Data

The technique used to find the output power of the transmitter was the antenna substitution method. The following test procedure was followed:

- 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by lowering 1m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8). Calculate power in dBm by the following formula:

$$\text{ERP (dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

Pg is the generator output power into the substitution antenna.

Test result:

Effective Radiated Power of Transmitter (ERP)

Channel	Freq. (MHz)	SGP (dBm)	Substitution Gain(dBd)	Cable Loss (dB)	ERP (dBm)	ERP (mW)	FCC Limit (W)	IC Limit (W)	Result
1	462.5625	-1.4	-4.9	0.6	-6.9	0.204	2.0	0.5	Pass
5	462.6625	-3.8	-4.9	0.6	-9.3	0.117	2.0	0.5	Pass

Note:

a: For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should be taken to calculate it:

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b: SGP=Signal Generator Level

c: RBW > emission bandwidth, VBW > 3 x RBW, Detector: RMS

7.3 Occupied Bandwidth

Test Requirement 47 CFR FCC Part 95.573 & FCC Part2.1049;
RSS-210 Issue 9 E.2.3

Test Method: ANSI/TIA-603-E:2016

Limit: For FCC Part 95.567:
Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.


For RSS-210 E.2.3:
The authorized bandwidth for an FRS unit is 12.5 kHz.

7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 24.8 °C Humidity: 49.2 % RH Atmospheric Pressure: 1020 mbar

Test mode:
a:Tx mode(CH. 1), Keep the EUT in transmitting mode.
b:Tx mode(CH. 5), Keep the EUT in transmitting mode.

7.3.2 Test Setup Diagram

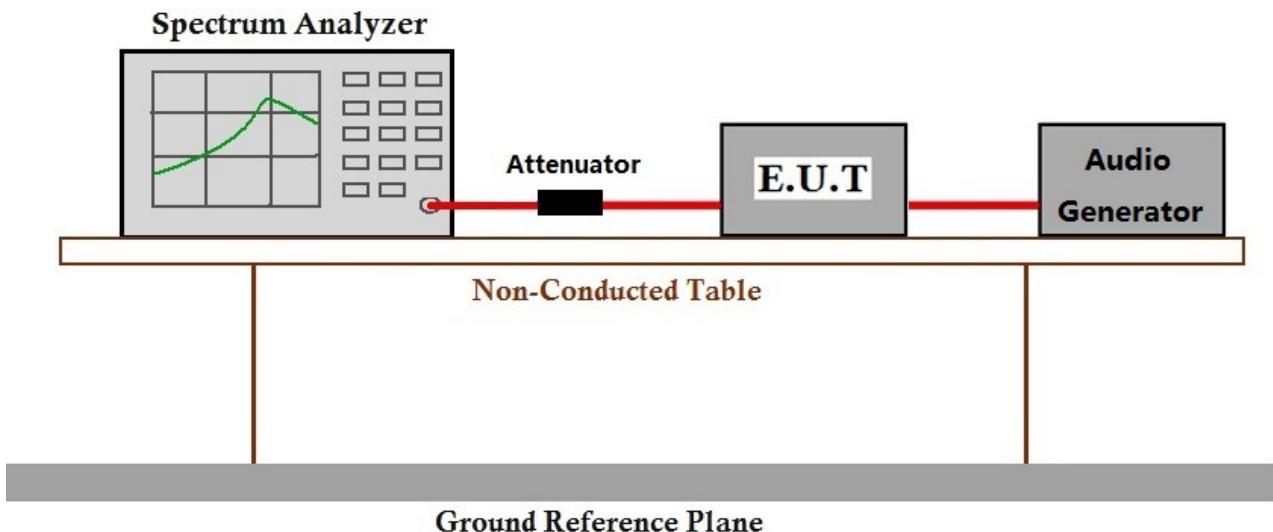


7.3.3 Measurement Procedure and Data

Test result:


462.5625MHz:

The occupied Bandwidth is measured to be 6.19 KHz for FRS.

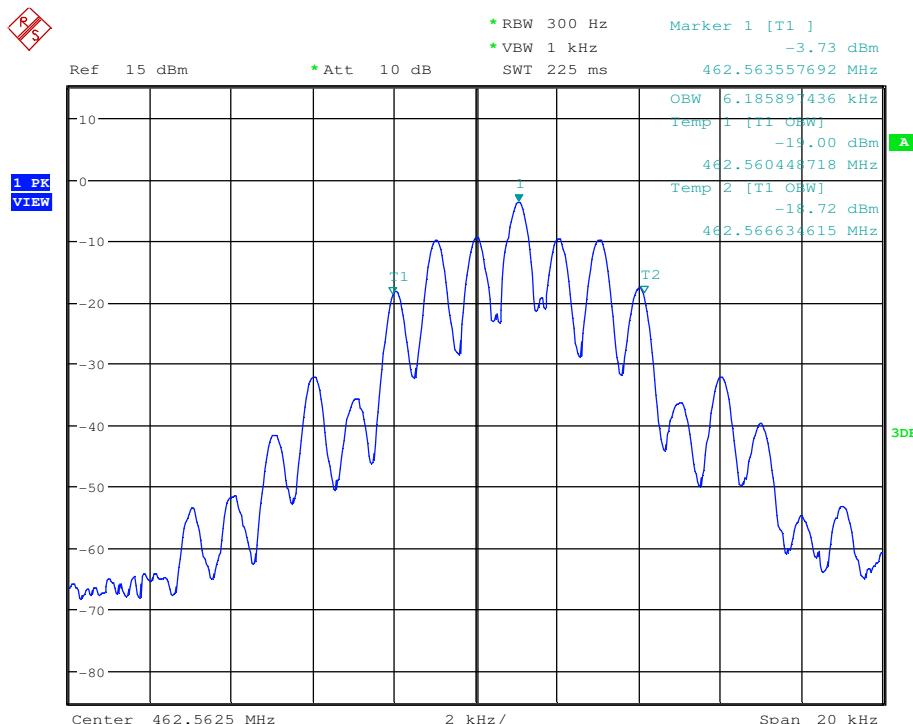

462.6625MHz:

The occupied Bandwidth is measured to be 6.25 KHz for FRS.

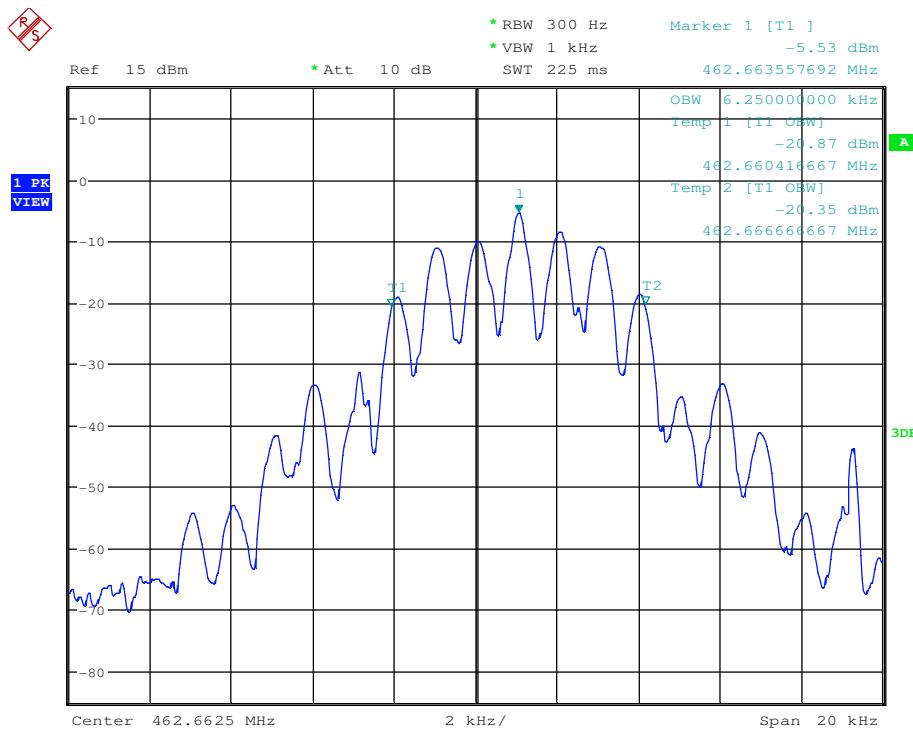

7.4 Modulation characteristics

Test Requirement 47 CFR FCC Part 95.575 & FCC Part2.1047;
RSS-210 Issue 9 E.2.2

Test Method: ANSI/TIA-603-E:2016

Limit: For FCC Part 95.575:
Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

For RSS-210 E.2.3:
The peak frequency deviation shall not exceed ± 2.5 kHz. The limiter shall be followed by a low-pass filter to remove unwanted harmonic emissions.


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C Humidity: 49.2 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:Tx mode(CH. 1), Keep the EUT in transmitting mode.
b:Tx mode(CH. 5), Keep the EUT in transmitting mode.

7.4.2 Test Setup Diagram

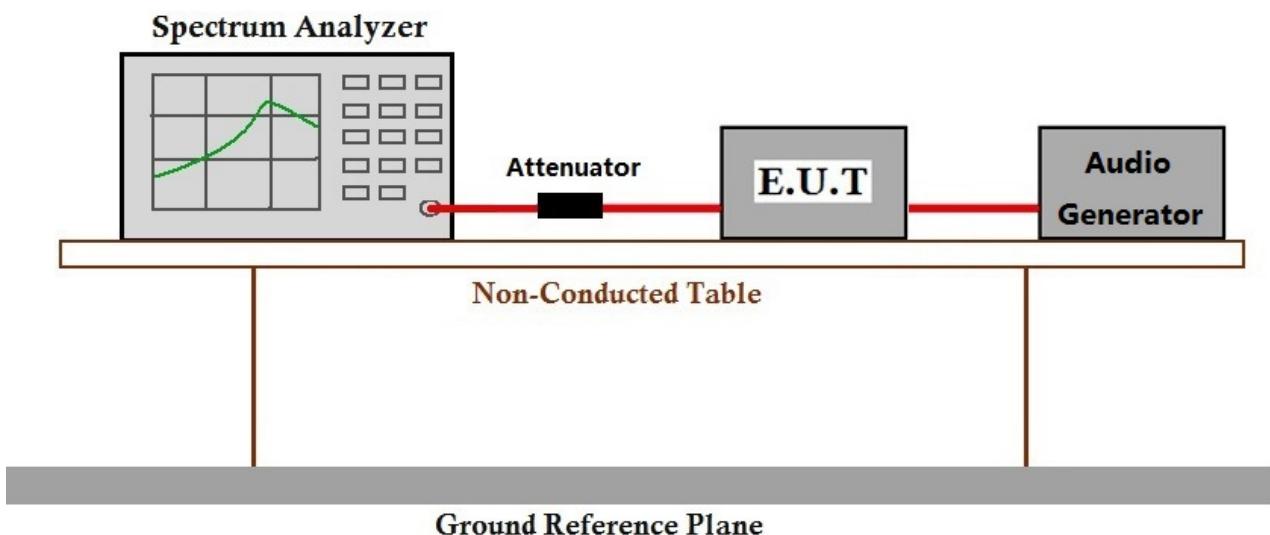


7.4.3 Measurement Procedure and Data

Test result:

Frequency Deviation:


Channel 1 :462.5625MHz for FRS

Channel 1: 462.5625MHz FRS					
Modulation Input(dB)	Peak Frequency Deviation(KHz) at 500Hz	Peak Frequency Deviation(KHz) at 1000Hz	Peak Frequency Deviation(KHz) at 2500Hz	Peak Frequency Deviation(KHz) at 3125Hz	Limit (KHz)
-20	0.96	0.82	0.85	0.89	2.50
-15	0.89	0.87	0.83	0.94	2.50
-10	0.92	0.96	0.96	0.98	2.50
-5	0.94	0.94	1.05	0.91	2.50
0	1.08	1.01	1.15	1.01	2.50
5	1.14	1.29	1.05	1.12	2.50
10	1.22	1.38	1.15	1.15	2.50
15	1.27	1.32	1.28	1.03	2.50
20	1.18	1.43	1.06	1.14	2.50

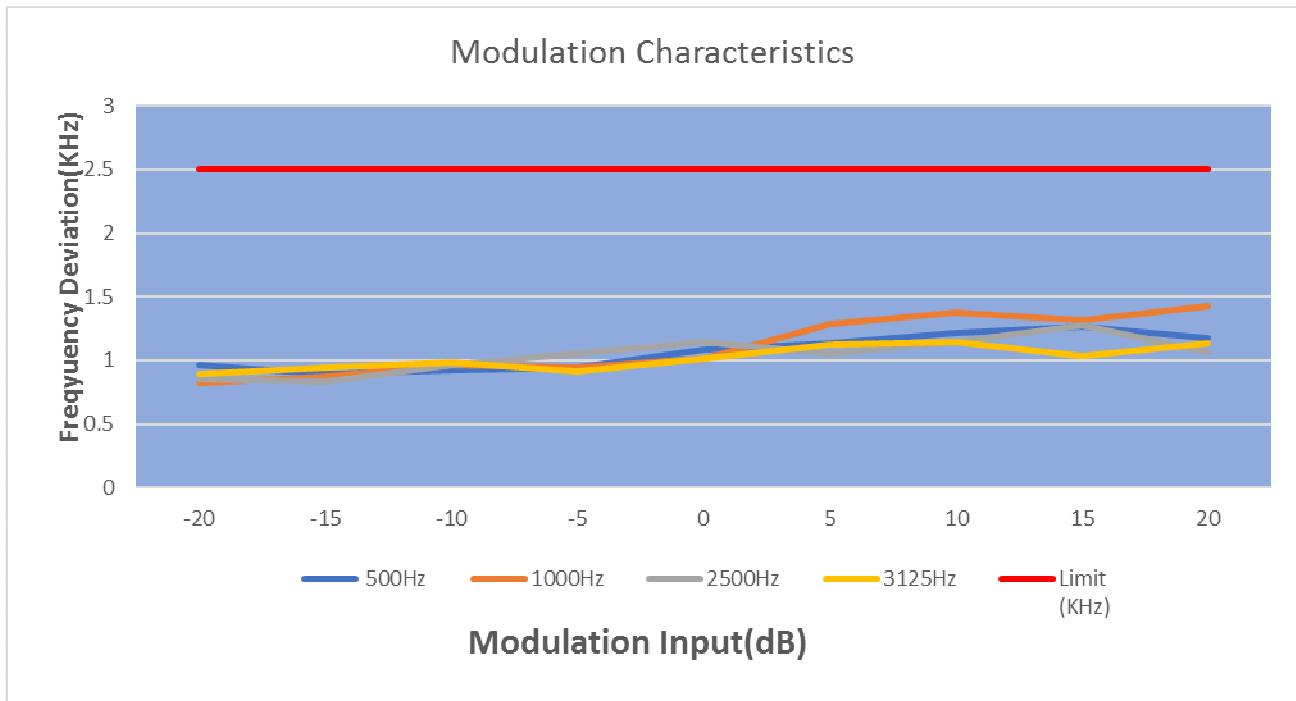


Channel 5 :462.6625MHz for FRS

Channel 5: 462.6625MHz FRS					
Modulation Input(dB)	Peak Frequency Deviation(KHz) at 500Hz	Peak Frequency Deviation(KHz) at 1000Hz	Peak Frequency Deviation(KHz) at 2500Hz	Peak Frequency Deviation(KHz) at 3125Hz	Limit (KHz)
-20	0.75	0.96	0.85	0.77	2.50
-15	0.82	0.95	0.89	0.87	2.50
-10	0.96	1.01	0.95	0.97	2.50
-5	0.81	1.09	1.02	1.02	2.50
0	1.15	1.25	1.10	1.05	2.50
5	1.21	1.29	1.23	1.10	2.50
10	1.35	1.46	1.32	1.08	2.50
15	1.37	1.41	1.22	1.04	2.50
20	1.25	1.21	1.06	1.15	2.50

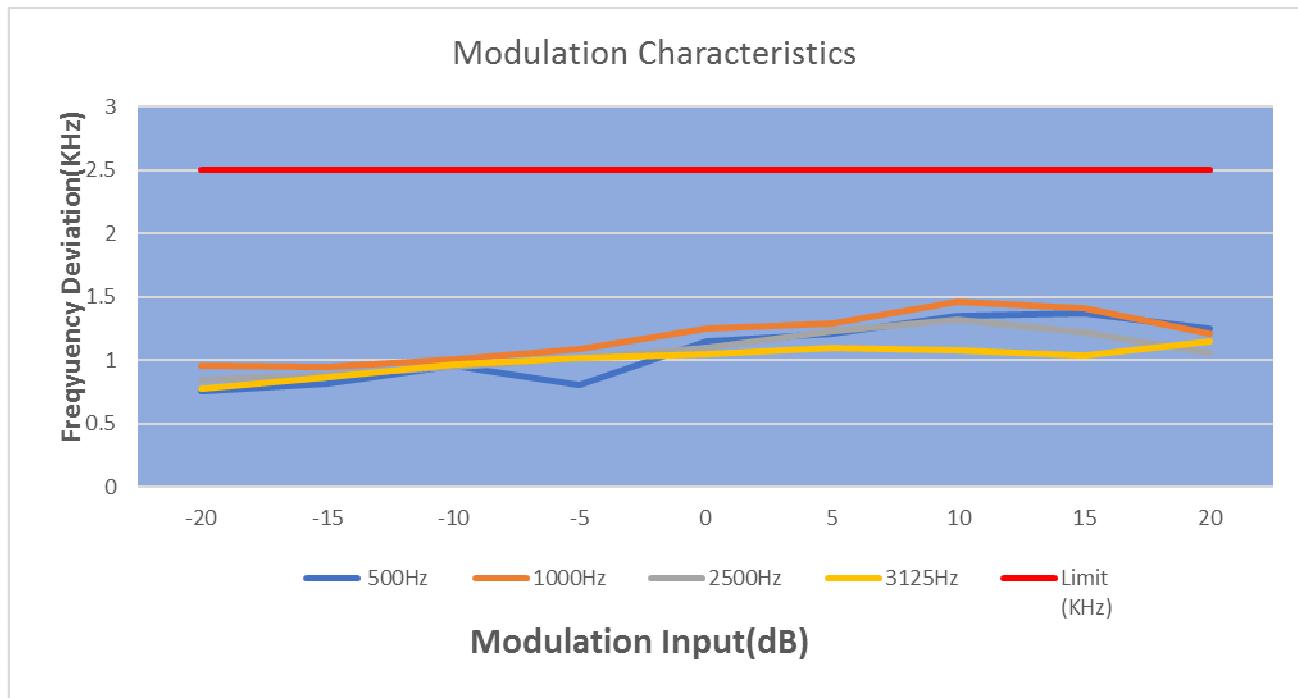


Audio Frequency Response
Channel 1 :462.5625MHz for FRS

Modulation Frequency(Hz)	Peak Modulation Deviation(KHz)	Limit (KHz)
100	0.91	3.125
200	0.85	3.125
300	0.98	3.125
400	1.05	3.125
500	1.01	3.125
600	1.01	3.125
700	1.03	3.125
800	1.02	3.125
900	1.18	3.125
1000	1.36	3.125
1250	1.29	3.125
1500	1.42	3.125
1750	1.23	3.125
2000	1.17	3.125
2250	1.19	3.125
2500	1.38	3.125
2750	1.14	3.125
3000	1.02	3.125
3125	0.97	3.125
3250	0.92	3.125
3500	0.99	3.125
4000	0.90	3.125
5000	0.87	3.125

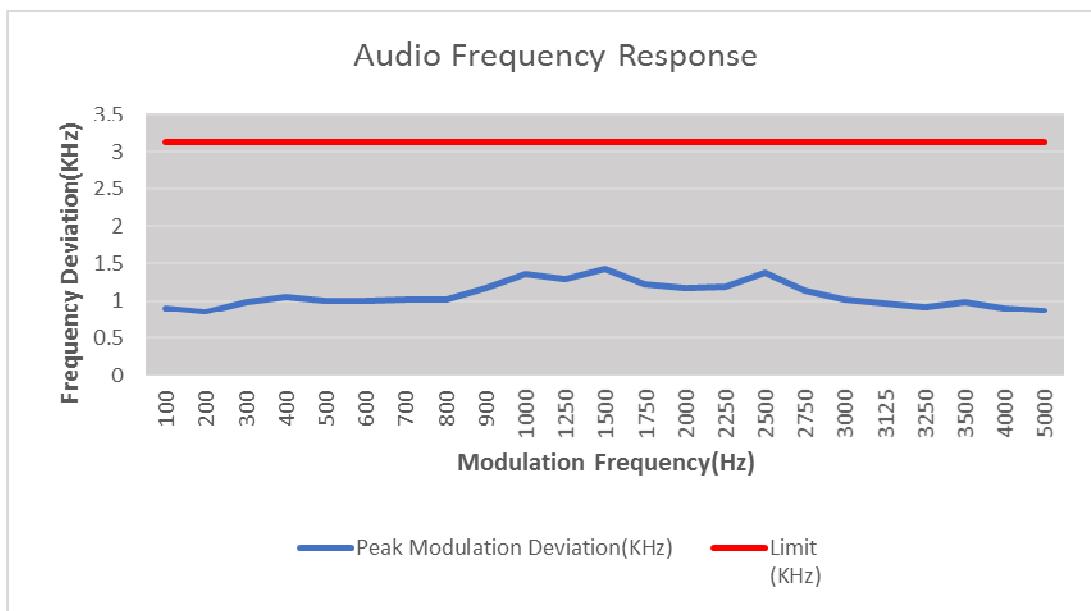


Channel 5 :462.6625MHz for FRS

Modulation Frequency(Hz)	Peak Modulation Deviation(KHz)	Limit (KHz)
100	0.88	3.125
200	0.85	3.125
300	0.93	3.125
400	1.05	3.125
500	1.06	3.125
600	1.10	3.125
700	1.09	3.125
800	1.15	3.125
900	1.28	3.125
1000	1.36	3.125
1250	1.29	3.125
1500	1.42	3.125
1750	1.33	3.125
2000	1.27	3.125
2250	1.19	3.125
2500	1.34	3.125
2750	1.29	3.125
3000	1.09	3.125
3125	0.97	3.125
3250	0.88	3.125
3500	0.79	3.125
4000	0.85	3.125
5000	0.91	3.125

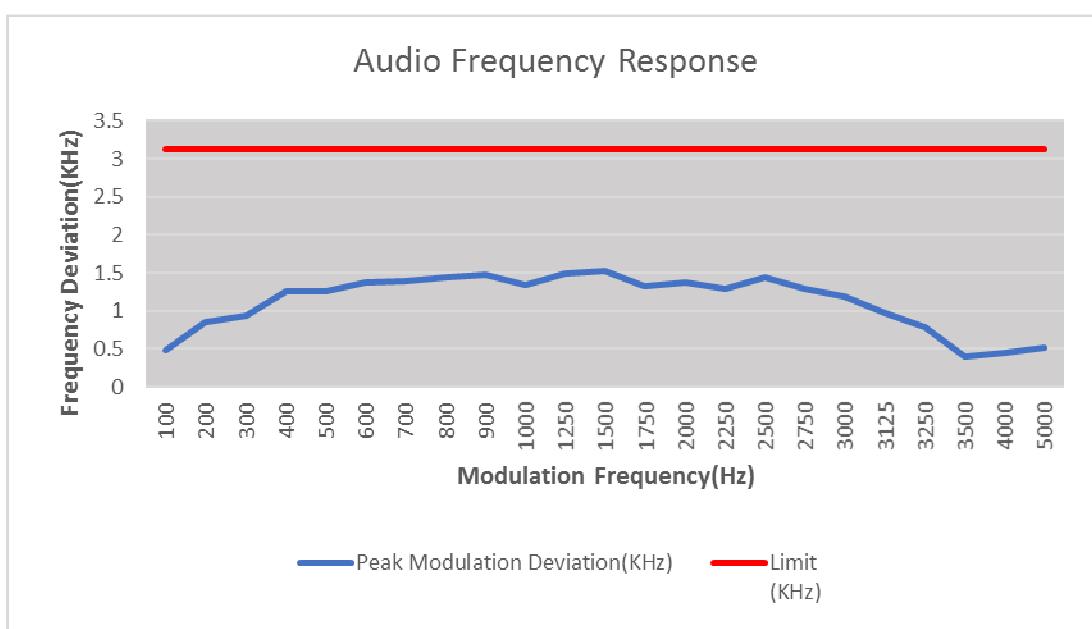


Audio Low Pass Filter Frequency Response
Channel 1 :462.5625MHz for FRS

Frequency(KHz)	Response (dB)	Limit (KHz)
1	0	0.00
2	0	0.00
3	-5.22	0.00
4	-11.32	-8.52
5	-15.45	-13.64
6	-19.95	-18.75
7	-24.76	-22.16
8	-27.84	-25.57
9	-32.64	-28.98
10	-34.11	-32.29
20	-55.25	-49.43
30	-55.25	-50.00
40	-55.25	-50.00
50	-55.25	-50.00
60	-55.25	-50.00
70	-55.25	-50.00
80	-55.25	-50.00
90	-55.25	-50.00
100	-55.25	-50.00

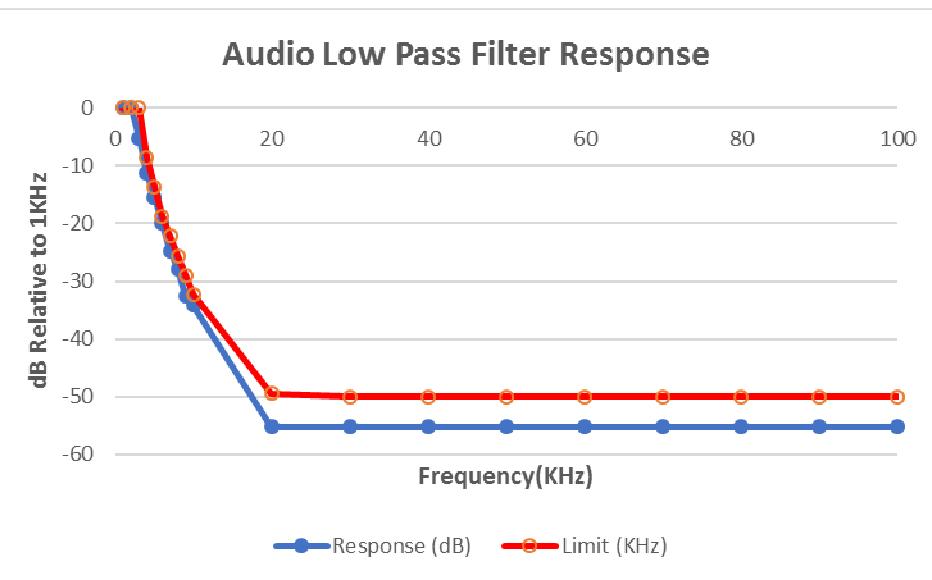

Channel 5 :462.6625MHz for FRS


Frequency(KHz)	Response (dB)	Limit (KHz)
1	0.00	0.00
2	0.00	0.00
3	-5.25	0.00
4	-10.87	-8.52
5	-15.85	-13.64
6	-19.37	-18.75
7	-24.47	-22.16
8	-28.27	-25.57
9	-31.94	-28.98
10	-33.48	-32.29
20	-55.32	-49.43
30	-55.32	-50.00
40	-55.32	-50.00
50	-55.32	-50.00
60	-55.32	-50.00
70	-55.32	-50.00
80	-55.32	-50.00
90	-55.32	-50.00
100	-55.32	-50.00

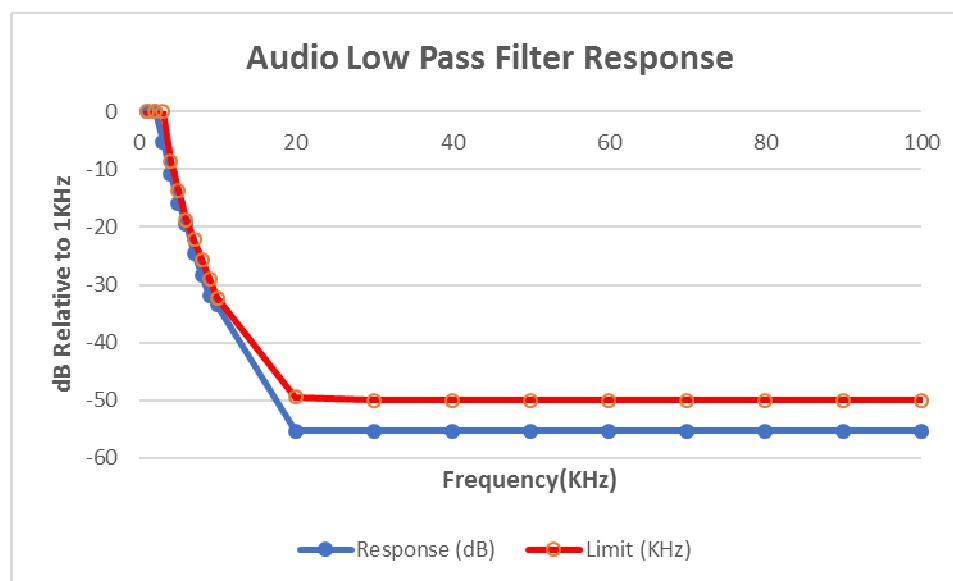

Modulation Limiting


Channel 1 :462.5625MHz for FRS

Audio Frequency(Hz)	Instantaneous		Steady-state		Limit (KHz)
	Deviation (+20dB) (KHz)	Deviation (-20dB) (KHz)	Deviation (+20dB) (KHz)	Deviation (-20dB) (KHz)	
300	0.885	0.278	0.975	0.269	2.5
400	0.875	0.209	0.798	0.175	2.5
500	0.776	0.161	0.754	0.147	2.5
600	0.789	0.189	0.805	0.188	2.5
700	1.105	0.268	1.206	0.238	2.5
800	1.149	0.186	1.011	0.214	2.5
900	1.171	0.147	1.146	0.173	2.5
1000	1.284	0.155	1.244	0.188	2.5
1200	1.422	0.202	1.387	0.235	2.5
1400	1.553	0.269	1.579	0.301	2.5
1600	1.767	0.303	1.735	0.335	2.5
1800	2.034	0.253	2.046	0.255	2.5
2000	2.082	0.391	2.067	0.376	2.5
2200	1.998	0.397	1.986	0.343	2.5
2200	1.996	0.411	1.977	0.356	2.5
2300	1.849	0.453	1.837	0.411	2.5
2400	1.742	0.387	1.753	0.389	2.5
2500	1.868	0.385	1.845	0.335	2.5
2600	1.915	0.354	1.947	0.303	2.5
2700	1.932	0.315	1.941	0.239	2.5
2800	1.548	0.262	1.576	0.248	2.5
2900	1.402	0.216	1.467	0.209	2.5
3000	1.326	0.179	1.341	0.176	2.5

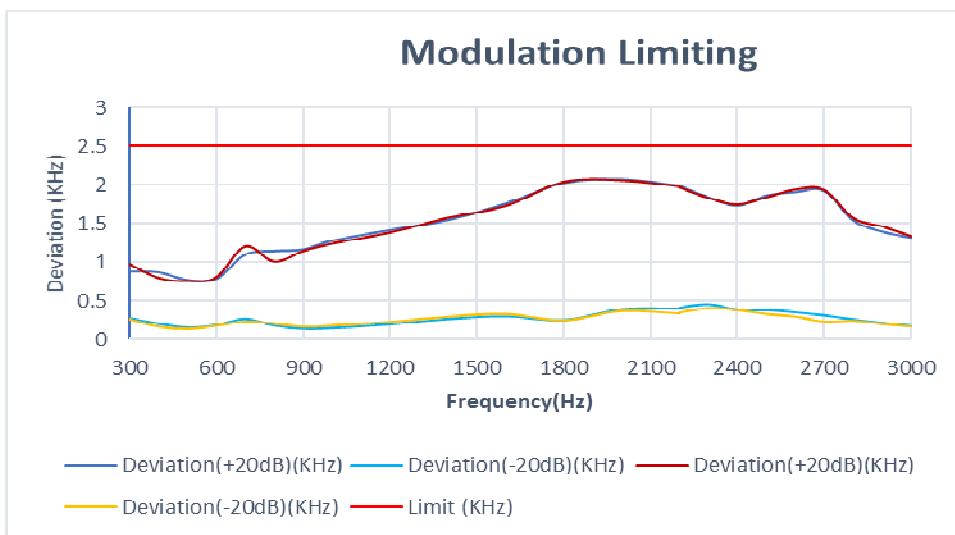

Channel 5 :462.6625MHz for FRS

Audio Frequency(Hz)	Instantaneous		Steady-state		Limit (KHz)
	Deviation (+20dB) (KHz)	Deviation (-20dB) (KHz)	Deviation (+20dB) (KHz)	Deviation (-20dB) (KHz)	
300	0.892	0.271	0.917	0.273	2.5
400	0.877	0.212	0.797	0.179	2.5
500	0.774	0.163	0.758	0.146	2.5
600	0.786	0.184	0.803	0.186	2.5
700	1.104	0.269	1.208	0.232	2.5
800	1.141	0.185	1.013	0.219	2.5
900	1.178	0.144	1.147	0.175	2.5
1000	1.282	0.158	1.247	0.185	2.5
1200	1.426	0.204	1.385	0.266	2.5
1400	1.558	0.261	1.531	0.306	2.5
1600	1.764	0.303	1.736	0.339	2.5
1800	2.032	0.254	2.042	0.257	2.5
2000	2.084	0.399	2.068	0.373	2.5
2200	1.995	0.398	1.981	0.344	2.5
2200	1.992	0.417	1.974	0.355	2.5
2300	1.843	0.459	1.838	0.416	2.5
2400	1.745	0.383	1.756	0.388	2.5
2500	1.863	0.386	1.849	0.338	2.5
2600	1.914	0.357	1.945	0.303	2.5
2700	1.934	0.319	1.948	0.235	2.5
2800	1.543	0.268	1.572	0.241	2.5
2900	1.406	0.218	1.463	0.211	2.5
3000	1.327	0.172	1.348	0.173	2.5

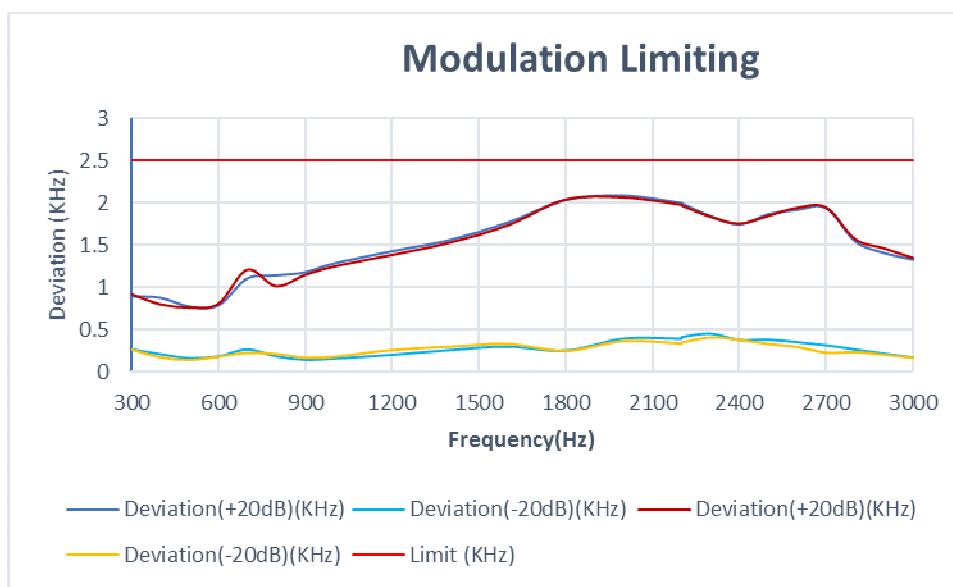

7.5 Radiated Unwanted Emissions

Test Requirement 47 CFR FCC Part 95.579 & FCC Part2.1053;
RSS-210 Issue 9 E.2.5

Test Method: ANSI/TIA-603-E:2016

Measurement Distance: 3m

Resolution bandwidth =10 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1GHz.

Video Bandwidth = 300 kHz for spurious emissions below 1 GHz, and 3 MHz for spurious emissions above 1 GHz.

Limit:

For FCC Part 95.579 & RSS-210 E.2.5:

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) Measurement bandwidths. The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) Measurement conditions. The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 23.1 °C Humidity: 48 % RH Atmospheric Pressure: 1020 mbar

Test mode:

- a:Tx mode(CH. 1), Keep the EUT in transmitting mode.
- b:Tx mode(CH. 5), Keep the EUT in transmitting mode.

7.5.2 Test Setup Diagram

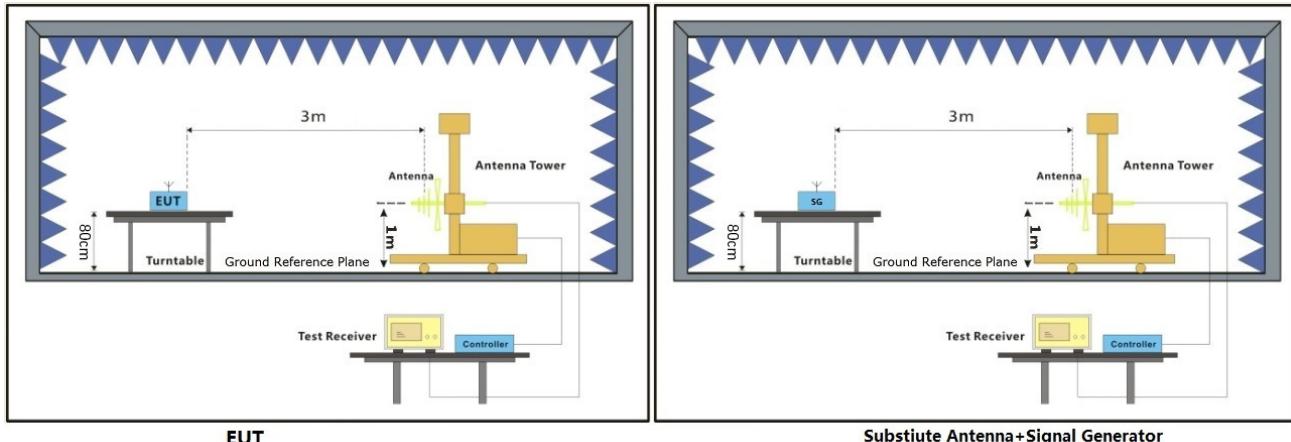

7.5.3 Measurement Procedure and Data


Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Test Result:
Channel 1 :462.5625MHz

Frequency MHz	Polarity H/V	Emission Level dBm	Limit dBm	Margin dBm
925.124	V	-44.24	-13.00	-31.24
1387.686	V	-55.98	-13.00	-42.98
1850.248	V	-55.13	-13.00	-42.13
2312.810	V	-49.58	-13.00	-36.58
2775.372	V	-54.20	-13.00	-41.20
925.124	H	-50.54	-13.00	-37.54
1387.686	H	-56.30	-13.00	-43.30
1850.248	H	-55.03	-13.00	-42.03
2312.810	H	-47.21	-13.00	-34.21
2775.372	H	-56.32	-13.00	-43.32

Note: Margin = Emission level – Limit.

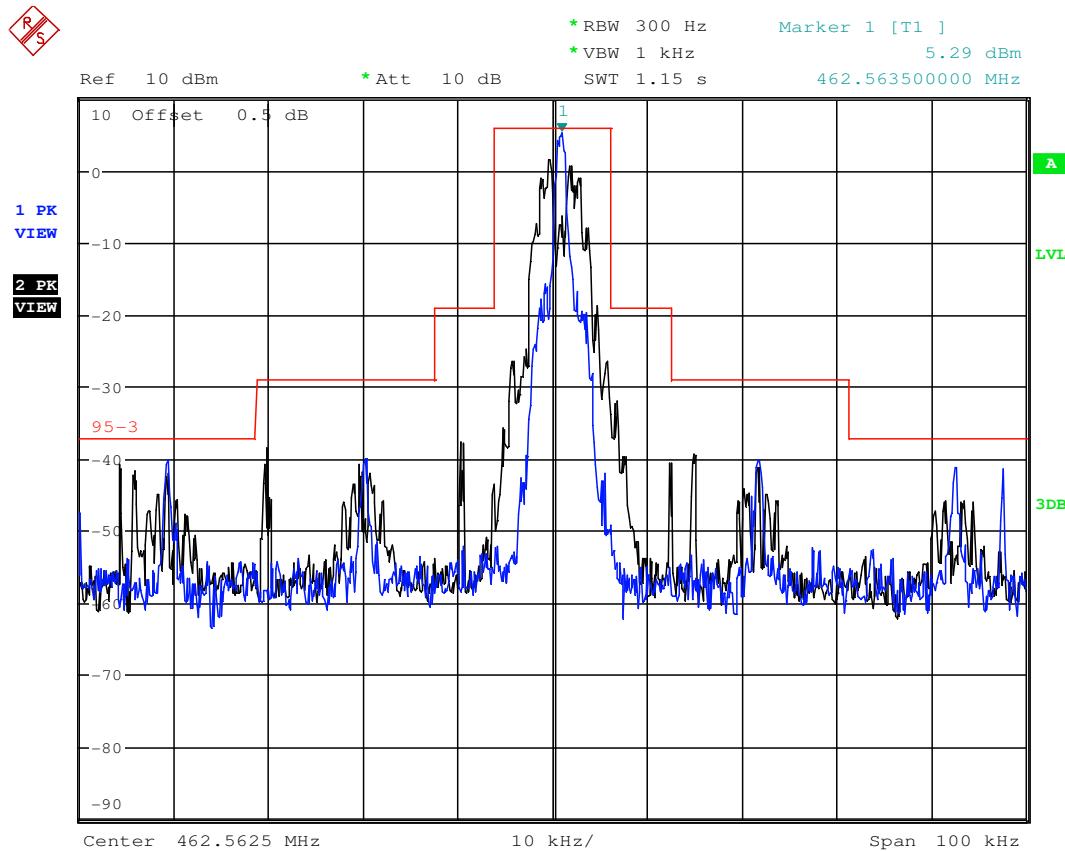
Emission Mask:


Channel 5 :462.6625MHz

Frequency MHz	Polarity H/V	Emission Level dBm	Limit dBm	Margin dBm
925.325	V	-43.86	-13.00	-30.86
1387.988	V	-57.28	-13.00	-44.28
1850.650	V	-56.18	-13.00	-43.18
2313.313	V	-48.77	-13.00	-35.77
2775.975	V	-56.48	-13.00	-43.48
925.325	H	-46.97	-13.00	-33.97
1387.988	H	-57.28	-13.00	-44.28
1850.650	H	-56.18	-13.00	-43.18
2313.313	H	-48.77	-13.00	-35.77
2775.975	H	-56.47	-13.00	-43.47


Note: Margin = Emission level – Limit.

Emission Mask:

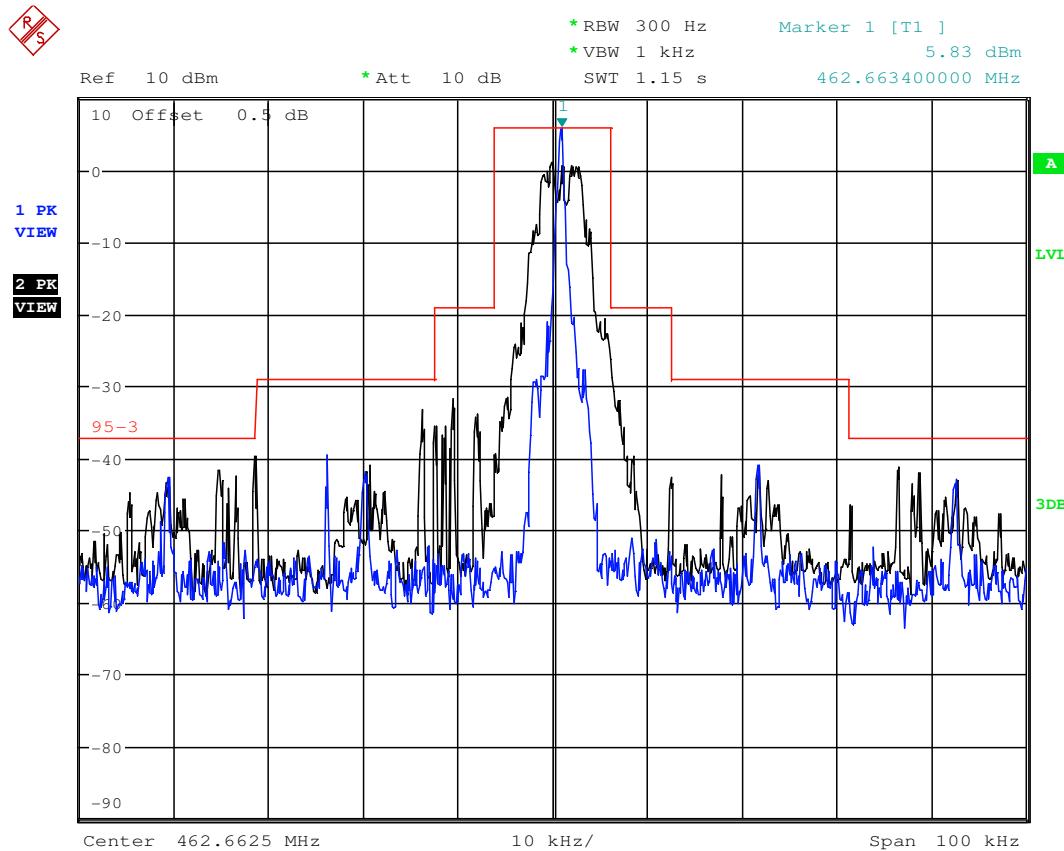



8 Photographs

8.1 Effective Radiated Power Test Setup

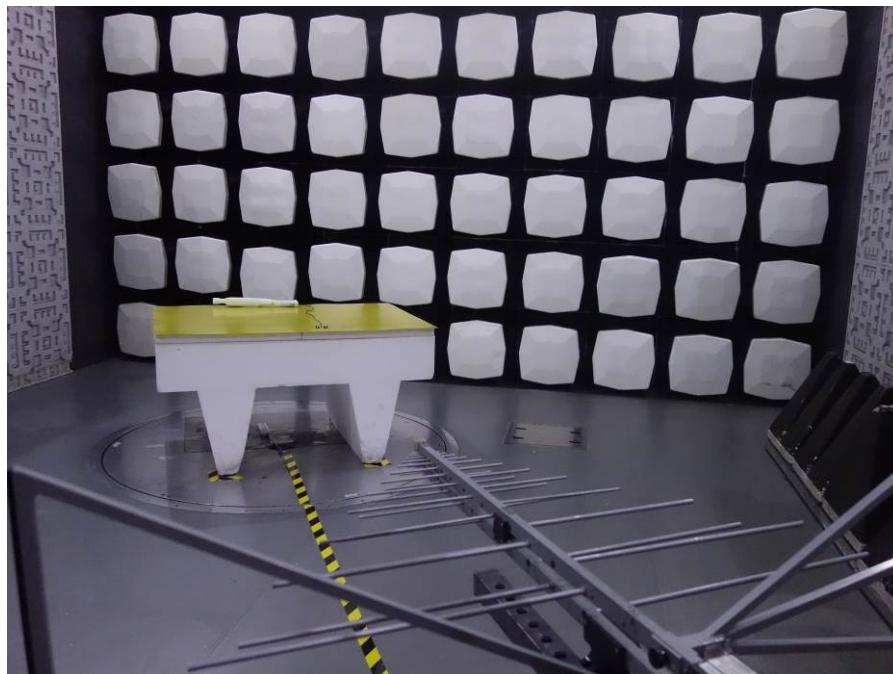

8.2 Radiated Spurious Emissions Test Setup

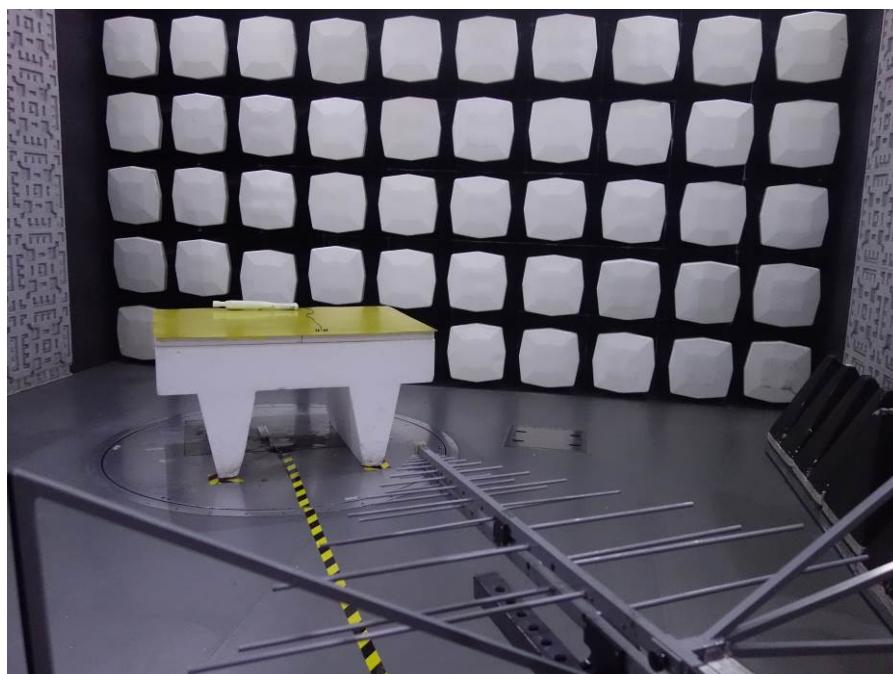

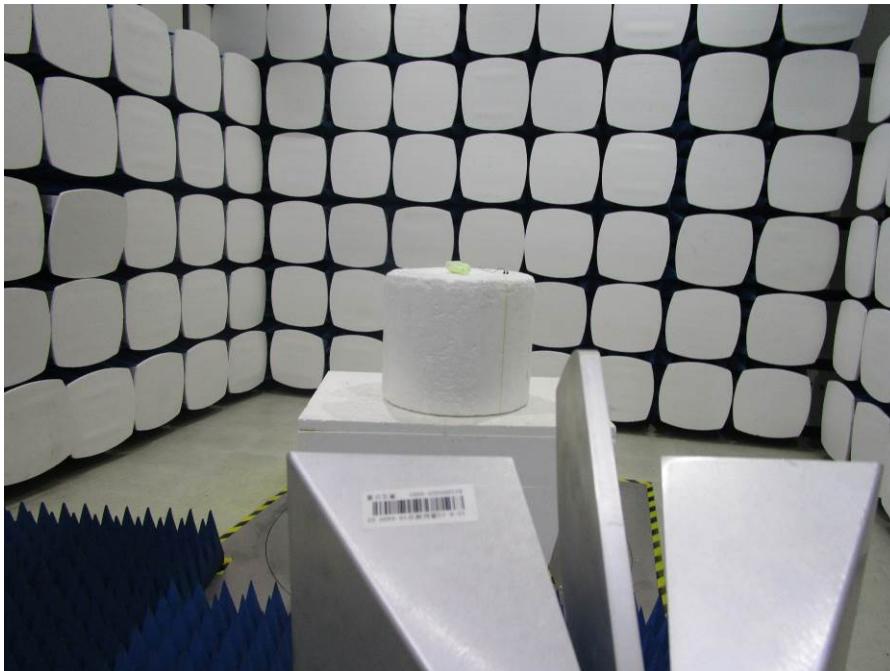

8.3 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1803002204CR.

- End of the Report -