


FCC PART 15.247 TEST REPORT

For

MeiG Smart Technology Co., Ltd

3/F, No.88, Qinqiang Road, Xuhui District, Shanghai, China.

FCC ID: 2APJ4-SLM756P

Report Type: Original Report	Product Type: Smart Module
Test Engineer: Max Min	
Report Number: RSHA190708001-00B	
Report Date: 2019-09-04	
Reviewed By: Oscar Ye RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
CALCULATED FORMULARY:.....	11
CALCULATED DATA (WORST CASE):	12
FCC §15.203 – ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	21
TEST DATA	22
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	39
APPLICABLE STANDARD	39

TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	64
APPLICABLE STANDARD	64
TEST PROCEDURE	64
TEST DATA	64
FCC §15.247(d) - BAND EDGES TESTING	71
APPLICABLE STANDARD	71
TEST PROCEDURE	71
TEST DATA	71

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	MeiG Smart Technology Co., Ltd
Tested Model	SLM756P
Product Type	Smart Module
Dimension	44mm(L)*39 mm(W)*3mm(H)
Power Supply	DC 3.8V

**All measurement and test data in this report was gathered from production sample serial number: 20190708001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-07-08)*

Objective

This test report is prepared on behalf of *MeiG Smart Technology Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS, Part 22H24E27 PCB and 15.407 NII submissions with FCC ID: 2APJ4-SLM756P

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for BT3.0:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test software: Engineering mode

GFSK, $\pi/4$ -DQPSK, 8DPSK Power level: 9.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Dian Yuan Technology	Adapter	DYS-0502000C	/
MEIG	Baseplate1	MEIG_EVB_V1.03	/
MEIG	Baseplate2	SLM756_ZB_V1.03_PCB	/
MeiG Smart	Antenna	/	/
/	Socket	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	Baseplate1	Adapter
Antenna Cable	0.3	Baseplate2	MeiG Smart Antenna

Block Diagram of Test Setup


For Conducted Emissions:

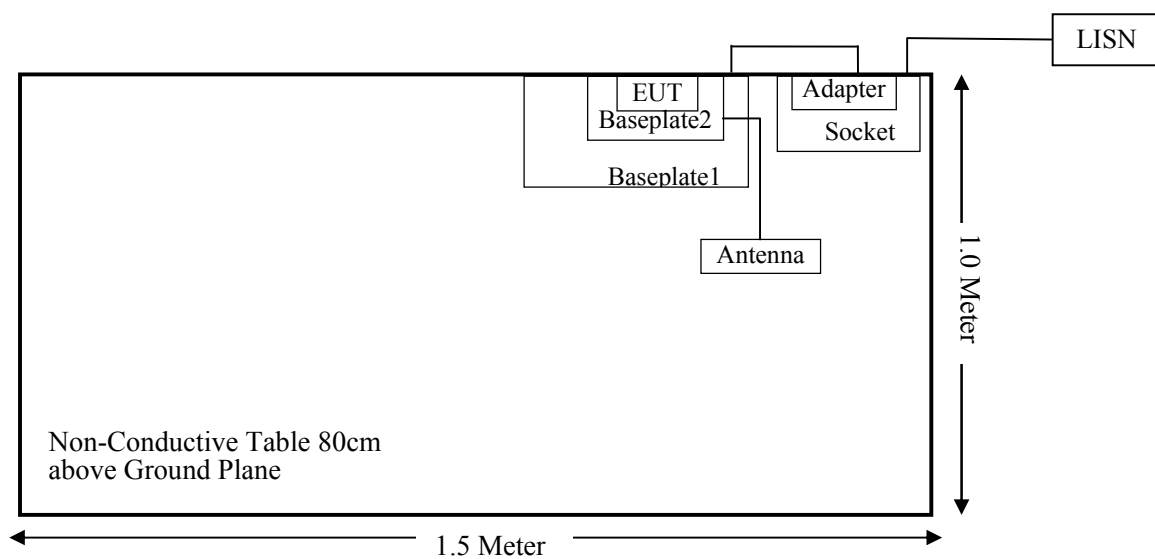

For Radiated Emissions (Below 1GHz):

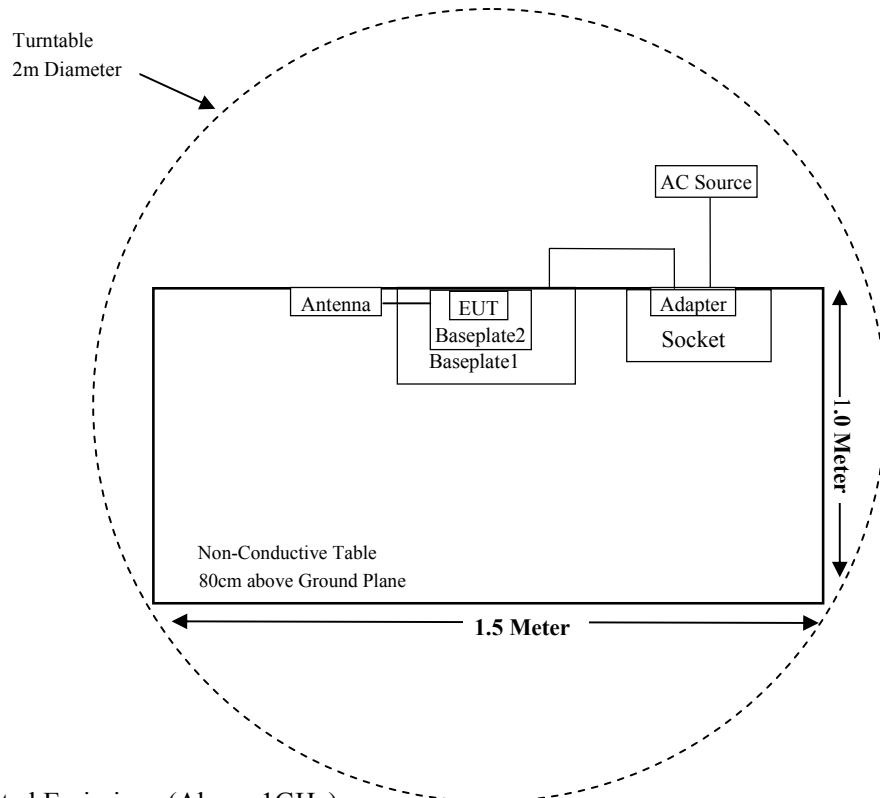

For Radiated Emissions (Above 1GHz):

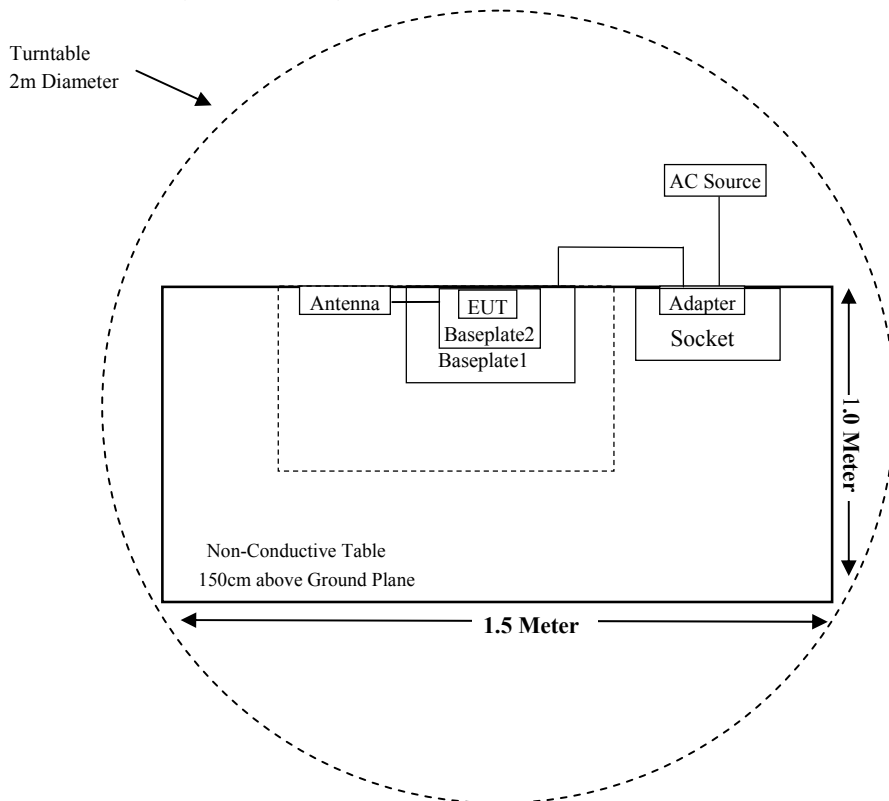

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-05-30	2020-05-29
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Agilent	Power Meter	N1912A	MY5000492	2018-11-18	2019-11-17
Agilent	Power Sensor	N1921A	MY54210024	2018-11-18	2019-11-17
MeiG Smart	RF Cable	MeiG SmartC01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2018-11-12	2019-11-11
Audix	Test Software	e3	V9	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data (worst case):

Mode	Frequency Range (MHz)	Maximum Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE ratio
		(dBi)	(numeric)	(dBm)	(mW)				
802.11b	2412-2462	0.00	1.00	19.00	79.43	20	0.0158	1.00	0.0158
802.11g		0.00	1.00	20.00	100.00	20	0.0199	1.00	0.0199
802.11n-HT20		0.00	1.00	18.50	70.79	20	0.0141	1.00	0.0141
802.11n-HT40	2422-2452	0.00	1.00	17.50	56.23	20	0.0112	1.00	0.0112
802.11a	5150~5250	0.00	1.00	12.00	15.85	20	0.0032	1.00	0.0032
	5250~5350	0.00	1.00	12.00	15.85	20	0.0032	1.00	0.0032
	5470~5725	0.00	1.00	12.50	17.78	20	0.0035	1.00	0.0035
	5725~5850	0.00	1.00	12.50	17.78	20	0.0035	1.00	0.0035
802.11n-HT20	5150~5250	0.00	1.00	12.50	17.78	20	0.0035	1.00	0.0035
	5250~5350	0.00	1.00	11.50	14.13	20	0.0028	1.00	0.0028
	5470~5725	0.00	1.00	12.50	17.78	20	0.0035	1.00	0.0035
	5725~5850	0.00	1.00	12.50	17.78	20	0.0035	1.00	0.0035
802.11n-HT40	5150~5250	0.00	1.00	9.50	8.91	20	0.0018	1.00	0.0018
	5250~5350	0.00	1.00	9.00	7.94	20	0.0016	1.00	0.0016
	5470~5725	0.00	1.00	11.50	14.13	20	0.0028	1.00	0.0028
	5725~5850	0.00	1.00	11.50	14.13	20	0.0028	1.00	0.0028
BLE	2402-2480	0.00	1.00	1.50	1.41	20	0.0003	1.00	0.0003
BT 3.0	2402-2480	0.00	1.00	11.50	14.13	20	0.0028	1.00	0.0032

Calculation of maximum antenna gain based on ERP/EIRP

Mode	Max Tune-up Power (dBm)	ERP/EIRP Limit (dBm)	Max Antenna Gain (dBd)	Max Antenna Gain (dBi)
WCDMA Band II	23.00	33.00	/	10.00
WCDMA Band IV	23.00	30.00	/	7.00
WCDMA Band V	24.00	38.45	14.45	16.60
FDD (Band 2)	22.00	33.00	/	11.00
FDD (Band 4)	22.50	30.00	/	7.00
FDD (Band 5)	22.50	38.45	15.95	18.10
FDD (Band 7)	22.50	33.00	/	10.00
FDD (Band 12)	23.00	34.77	11.77	13.92
FDD (Band 13)	23.00	34.77	11.77	13.92
FDD (Band 17)	23.00	34.77	11.77	13.92

Note:0dBd=2.15dBi

Calculation of maximum antenna gain based on MPE Ratio

Mode	Frequency Range	Tune-up Conducted Power		Power Density Limit	Maximum Power Density	Evaluation Distance	Maximum Antenna Gain Allowed based on MPE		MPE ratio
	(MHz)	(dBm)	(mW)	(mW/cm ²)	(mW/cm ²)	(cm)	(numeric)	(dBi)	
WCDMA Band II	1850.0-1910.0	23.00	199.53	1.00	0.9788	20	24.66	13.92	0.9788
WCDMA Band IV	1710.0-1755.0	23.00	199.53	1.00	0.9788	20	24.66	13.92	0.9788
WCDMA Band V	824.0-849.0	24.00	251.19	0.55	0.5619	20	19.59	12.92	0.9788
FDD (Band 2)	1850.0-1910.0	22.00	158.49	1.00	0.9789	20	31.05	14.92	0.9789
FDD (Band 4)	1710.0-1755.0	22.50	177.83	1.00	0.9788	20	22.67	14.42	0.9788
FDD (Band 5)	824.0-849.0	22.50	177.83	0.55	0.5619	20	22.67	14.42	0.9788
FDD (Band 7)	2500.0-2570.0	22.50	177.83	1.00	0.9788	20	22.67	14.42	0.9788
FDD (Band 12)	699.0-716.0	23.00	199.53	0.47	0.4802	20	24.66	13.92	0.9788
FDD (Band 13)	777.0-787.0	23.00	199.53	0.52	0.5313	20	24.66	13.92	0.9788
FDD (Band 17)	704.0-716.0	23.00	199.53	0.47	0.4802	20	24.66	13.92	0.9788

Note: Wi-Fi/ BLE/ BT 3.0& WCDMA/FDD can transmit simultaneously; the worst condition is 802.11b of Wi-Fi & FDD (Band13), as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0199 + 0.9789 = 0.9988 < 1.0$$

Mode	Max Allow Antenna Gain (dBi)
WCDMA Band II/LTE Band 2	10.0
WCDMA Band IV/ LTE Band 4	7.00
WCDMA Band V/ LTE Band 5	12.92
LTE Band 7	10.00
LTE Band 12/ LTE Band 17	13.92
LTE Band 13	13.92

Result: To meet RF exposure & ERP/ERIP, the maximum net gains of antennas allowed are 10dBi@ WCDMA Band II/LTE Band 2 , 7dBi@ WCDMA Band IV/ LTE Band 4 , 12.92dBi@ WCDMA Band V/ LTE Band 5 , 10.00dBi @LTE Band 7, 13.92dBi @ LTE Band 12/LTE Band 17, 13.92dBi @ LTE Band 13. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm. Transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has been tested with an external antenna for WIFI&BLE and the antenna gain is 0.00dBi, which have a unique type of connector , fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

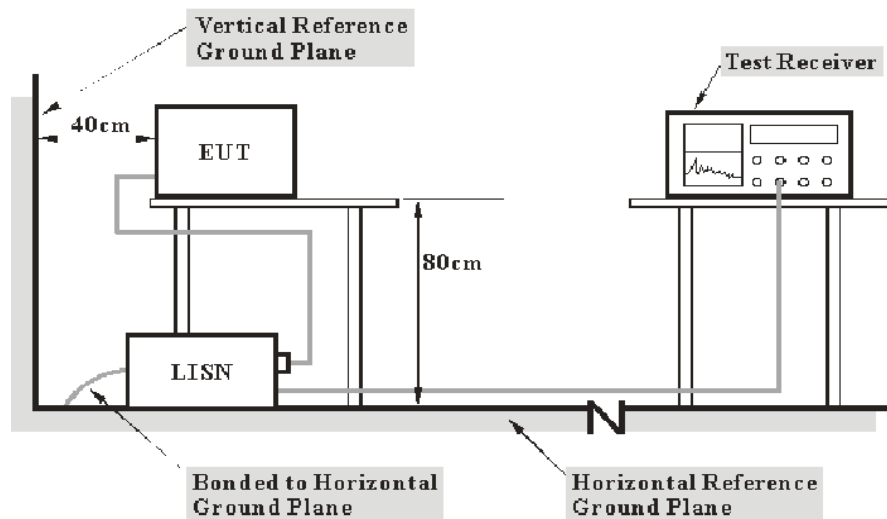

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over Limit of 7dB means the emission is 7 dB above the limit. The equation for over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2019-08-12.


Test Result: Compliant.

EUT operation mode: Transmitting in middle channel (worst case)

AC 120V/60 Hz, Line

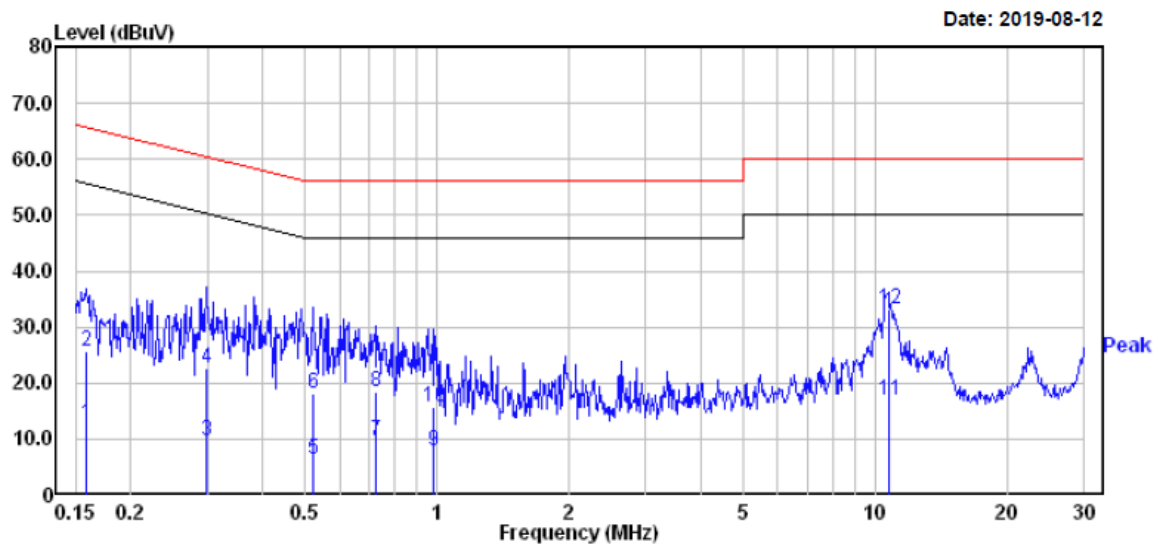

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.159	-7.00	19.82	12.82	55.52	-42.70	Average
2	0.159	5.70	19.82	25.52	65.52	-40.00	QP
3	0.297	-10.20	19.83	9.63	50.32	-40.69	Average
4	0.297	2.90	19.83	22.73	60.32	-37.59	QP
5	0.521	-13.40	19.76	6.36	46.00	-39.64	Average
6	0.521	-1.70	19.76	18.06	56.00	-37.94	QP
7	0.724	-10.10	19.74	9.64	46.00	-36.36	Average
8	0.724	-1.30	19.74	18.44	56.00	-37.56	QP
9	0.979	-12.10	19.80	7.70	46.00	-38.30	Average
10	0.979	-4.20	19.80	15.60	56.00	-40.40	QP
11	10.733	-2.80	19.57	16.77	50.00	-33.23	Average
12	10.733	13.50	19.57	33.07	60.00	-26.93	QP

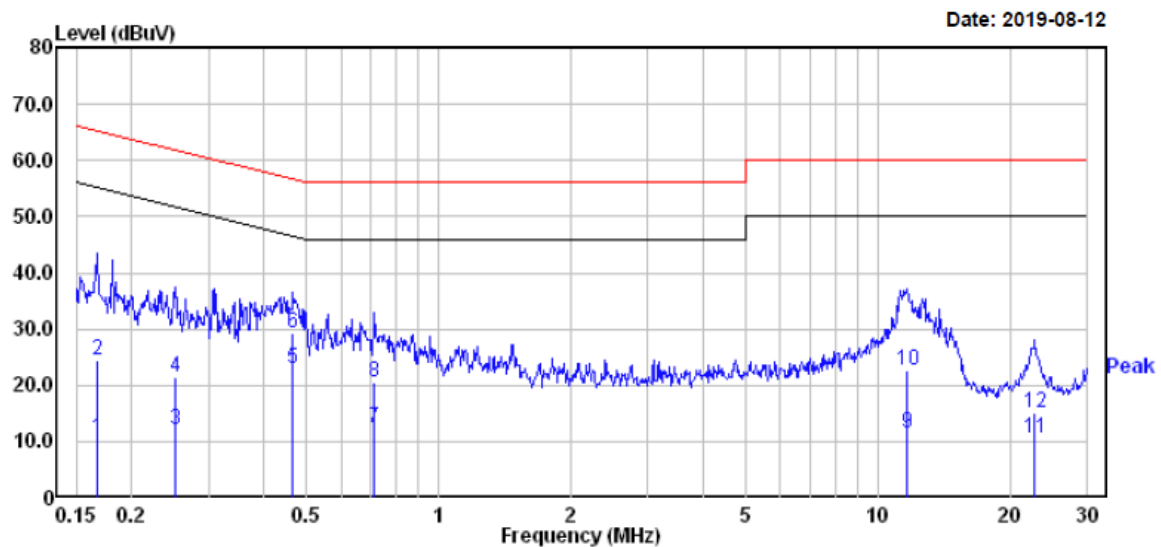AC 120V/60 Hz, Neutral



	Freq	Read		Limit	Over	
	MHz	Level	Factor	Level	Line	Limit
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.168	-9.20	19.83	10.63	55.08	-44.45
2	0.168	4.50	19.83	24.33	65.08	-40.75
3	0.251	-7.80	19.82	12.02	51.73	-39.71
4	0.251	1.70	19.82	21.52	61.73	-40.21
5	0.466	3.30	19.75	23.05	46.58	-23.53
6	0.466	9.50	19.75	29.25	56.58	-27.33
7	0.716	-7.50	19.74	12.24	46.00	-33.76
8	0.716	0.90	19.74	20.64	56.00	-35.36
9	11.683	-8.00	19.58	11.58	50.00	-38.42
10	11.683	3.10	19.58	22.68	60.00	-37.32
11	22.775	-9.10	19.80	10.70	50.00	-39.30
12	22.775	-4.60	19.80	15.20	60.00	-44.80

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBUV) + Factor (dB) - Limit (dBUV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

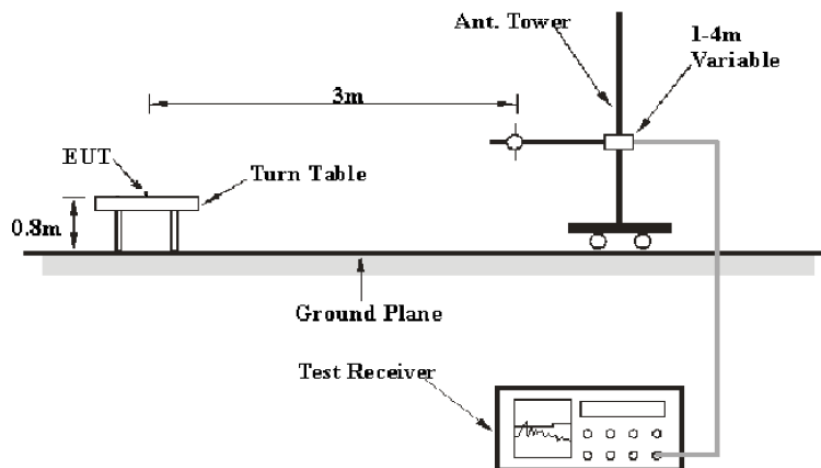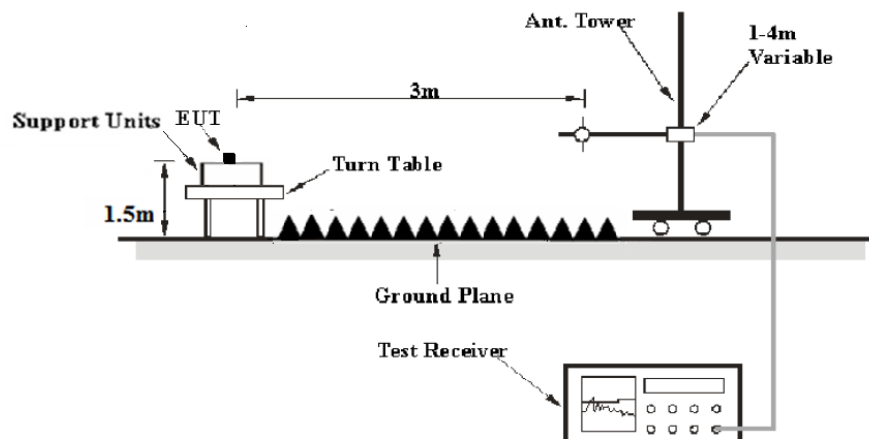EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.8~25.2 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.2~101.3 kPa


The testing was performed by Max Min from 2019-07-14 to 2019-08-25.

EUT operation mode: Transmitting

Spurious Emission Test:

30MHz-1GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case middle channel of 8DPSK Mode in X-axis of orientation was recorded

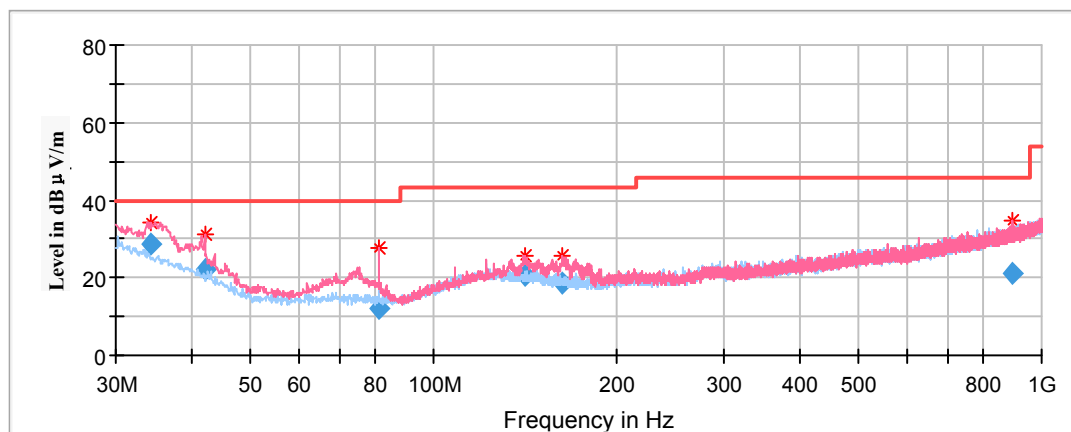

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
34.365000	28.78	100	V	161.0	-7.1	40.00	11.22
42.003750	22.37	100	V	140.0	-11.9	40.00	17.63
81.288750	12.03	100	V	129.0	-17.8	40.00	27.97
141.672500	20.57	200	V	181.0	-12.0	43.50	22.93
162.768750	18.56	100	V	320.0	-12.8	43.50	24.94
895.459400	21.26	100	V	229.0	-0.1	46.00	24.74

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case 8DPSK Mode in X-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz


Full Spectrum

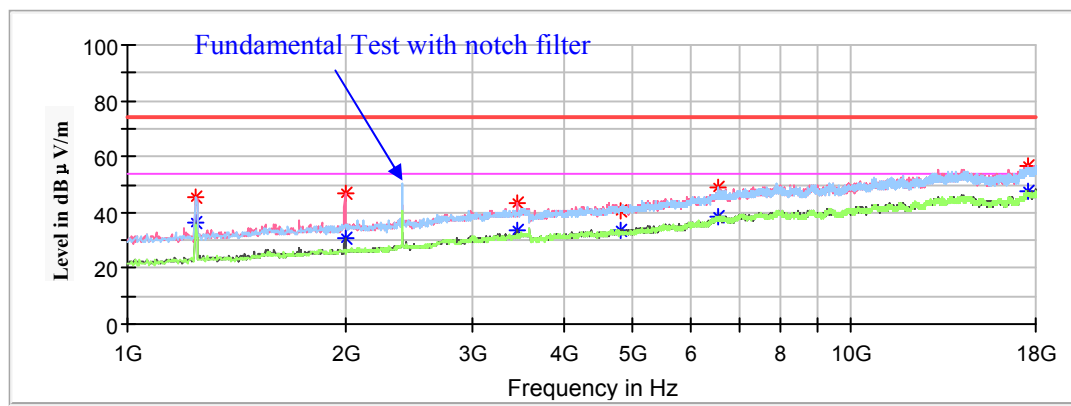

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1244.80	45.77	---	150.0	V	54.0	-11.3	74.00	28.23
1244.80	---	36.25	150.0	V	54.0	-11.3	54.00	17.75
1999.60	46.63	---	200.0	V	113.0	-8.2	74.00	27.37
1999.60	---	30.79	200.0	V	113.0	-8.2	54.00	23.21
3454.80	43.17	---	200.0	V	69.0	-3.6	74.00	30.83
3454.80	---	33.86	200.0	V	69.0	-3.6	54.00	20.14
4804.00	40.70	---	200.0	V	127.0	-0.6	74.00	33.30
4804.00	---	33.88	200.0	V	127.0	-0.6	54.00	20.12
6555.60	48.75	---	150.0	H	21.0	4.5	74.00	25.25
6555.60	---	38.70	150.0	H	21.0	4.5	54.00	15.30
17547.80	56.30	---	150.0	V	0.0	14.2	74.00	17.70
17547.80	---	47.67	150.0	V	0.0	14.2	54.00	6.33

Middle Channel: 2441MHz


Full Spectrum

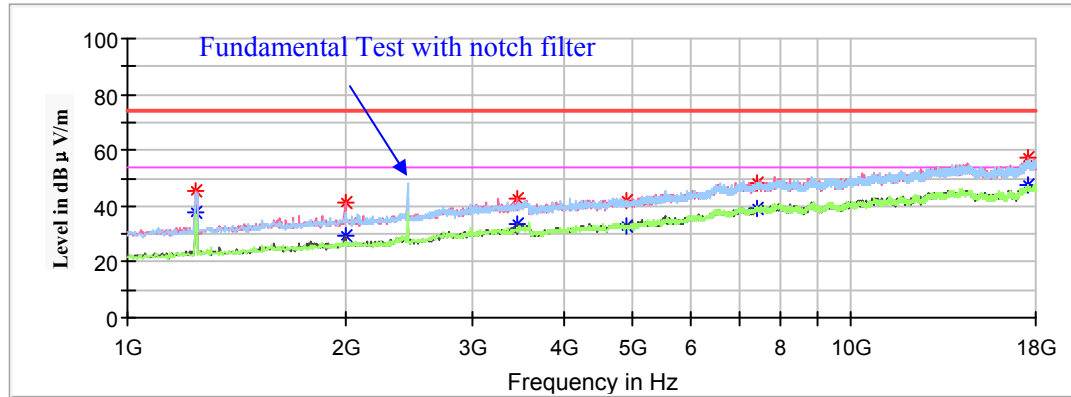

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1244.80	45.60	---	150.0	V	348.0	-11.3	74.00	28.40
1244.80	---	37.99	150.0	V	348.0	-11.3	54.00	16.01
1999.60	41.06	---	200.0	V	55.0	-8.2	74.00	32.94
1999.60	---	29.07	200.0	V	55.0	-8.2	54.00	24.93
3454.80	43.00	---	200.0	V	70.0	-3.6	74.00	31.00
3454.80	---	33.80	200.0	V	70.0	-3.6	54.00	20.20
4882.00	42.08	---	200.0	H	317.0	-0.4	74.00	31.92
4882.00	---	33.02	200.0	H	317.0	-0.4	54.00	20.98
7432.80	48.57	---	200.0	V	7.0	6.0	74.00	25.43
7432.80	---	39.11	200.0	V	7.0	6.0	54.00	14.89
17537.60	---	47.59	150.0	V	297.0	14.2	54.00	6.41
17537.60	57.17	---	150.0	V	297.0	14.2	74.00	16.83

High Channel: 2480MHz


Full Spectrum

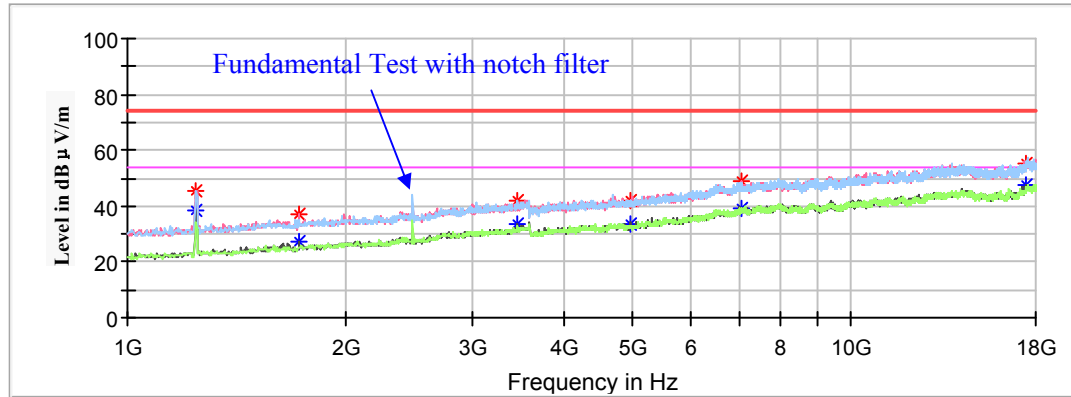


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1244.80	45.42	---	150.0	V	77.0	-11.3	74.00	28.58
1244.80	---	38.66	150.0	V	77.0	-11.3	54.00	15.34
1727.60	36.82	---	150.0	V	314.0	-9.2	74.00	37.18
1727.60	---	26.95	150.0	V	314.0	-9.2	54.00	27.05
3454.80	42.18	---	200.0	V	155.0	-3.6	74.00	31.82
3454.80	---	33.32	200.0	V	155.0	-3.6	54.00	20.68
4960.00	41.67	---	150.0	V	270.0	-0.3	74.00	32.33
4960.00	---	33.64	150.0	V	270.0	-0.3	54.00	20.36
7041.80	48.70	---	200.0	V	331.0	5.4	74.00	25.30
7041.80	---	39.07	200.0	V	331.0	5.4	54.00	14.93
17486.60	55.31	---	150.0	V	49.0	14.2	74.00	18.69
17486.60	---	47.42	150.0	V	49.0	14.2	54.00	6.58

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case middle channel of 8DPSK Mode in X-axis of orientation was recorded

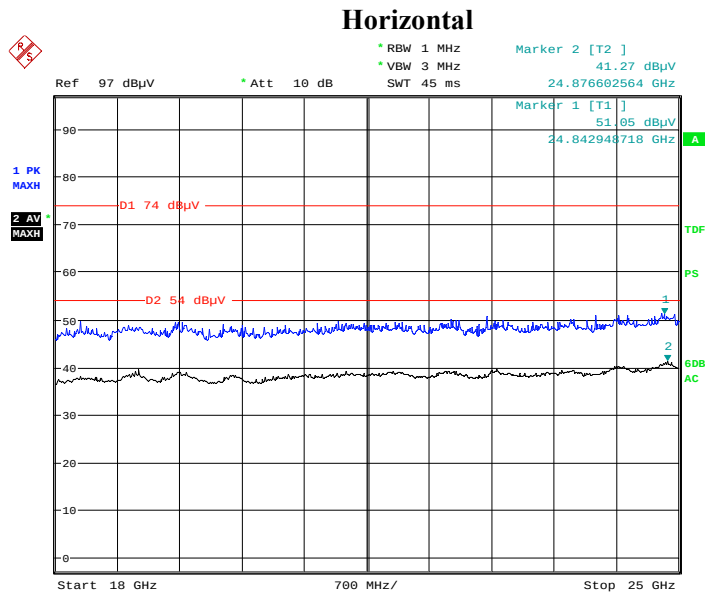

Date: 23.AUG.2019 16:38:56

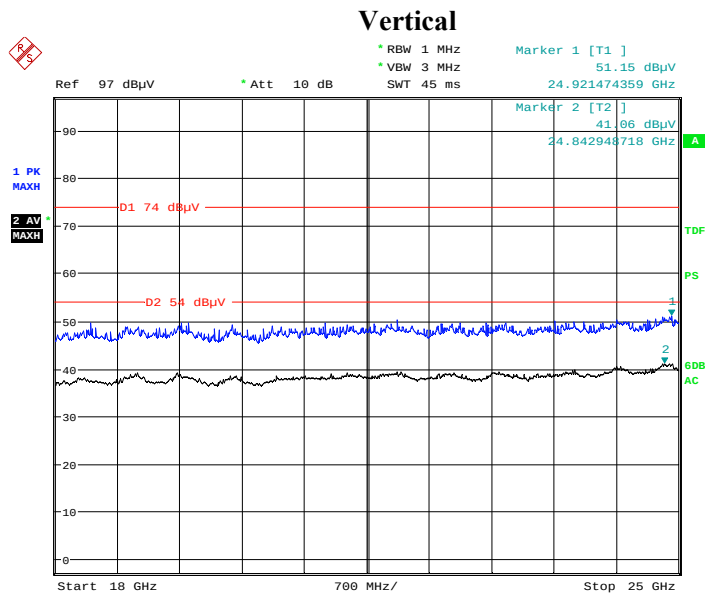

Date: 23.AUG.2019 16:59:22

Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case 8DPSK Mode in X-axis of orientation was recorded

Note:



1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)


Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	---	40.56	150	V	107	2.8	54	13.44
2390.00	49.67	---	150	V	107	2.8	74	24.33
High Channel: 2480MHz								
2483.50	---	40.96	150	V	104	3.0	54	13.04
2483.50	50.11	---	150	V	104	3.0	74	23.89


BDR (GFSK): Low Channel

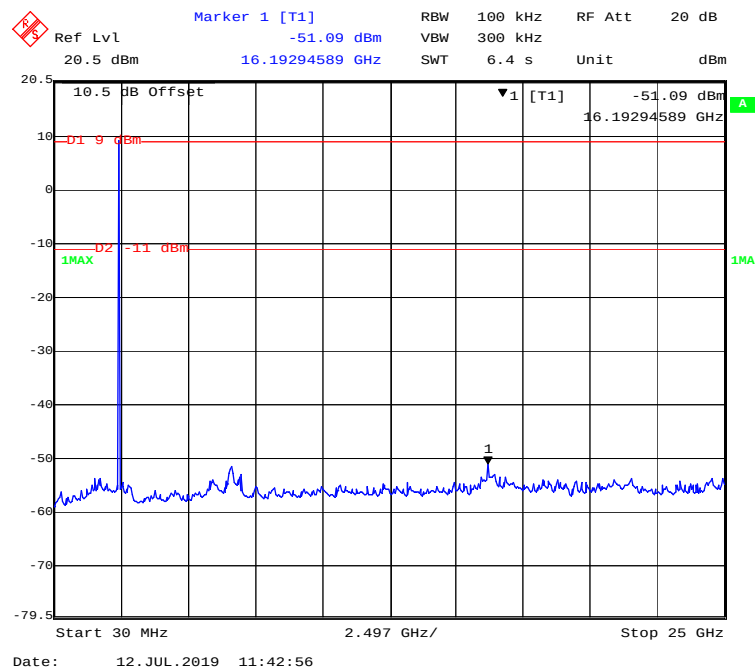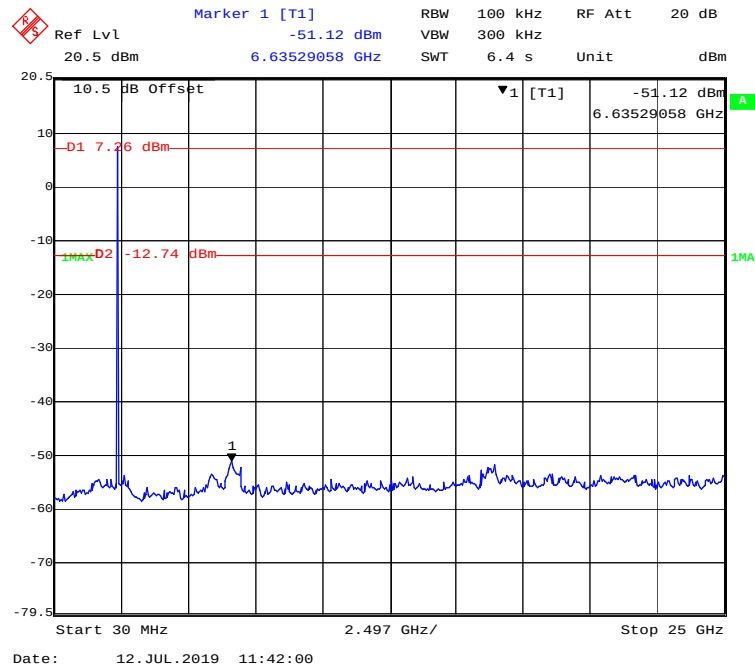


BDR (GFSK): High Channel

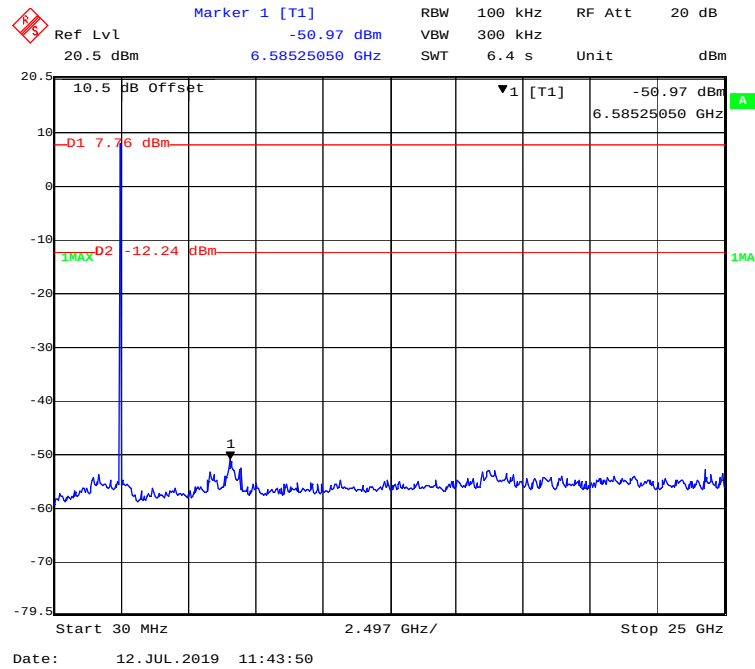


EDR ($\pi/4$ -DQPSK): Low Channel

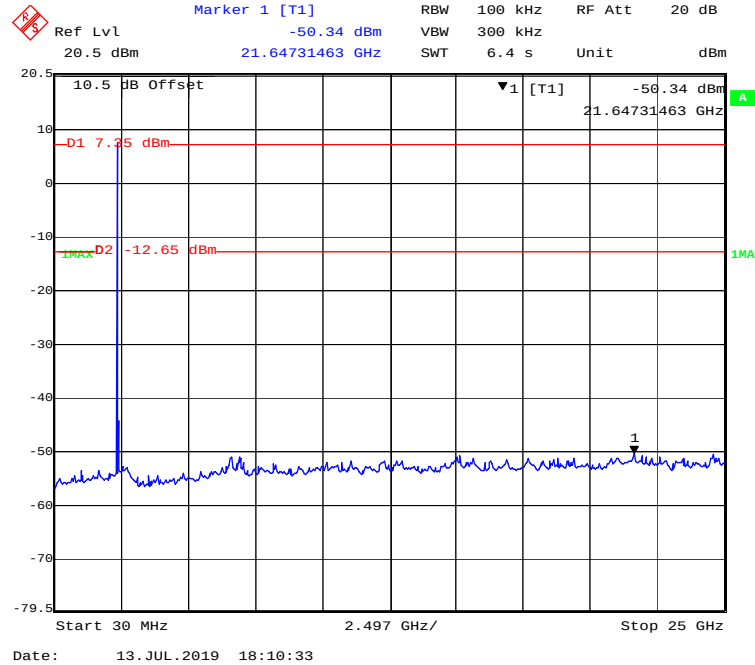


EDR ($\pi/4$ -DQPSK): Middle Channel

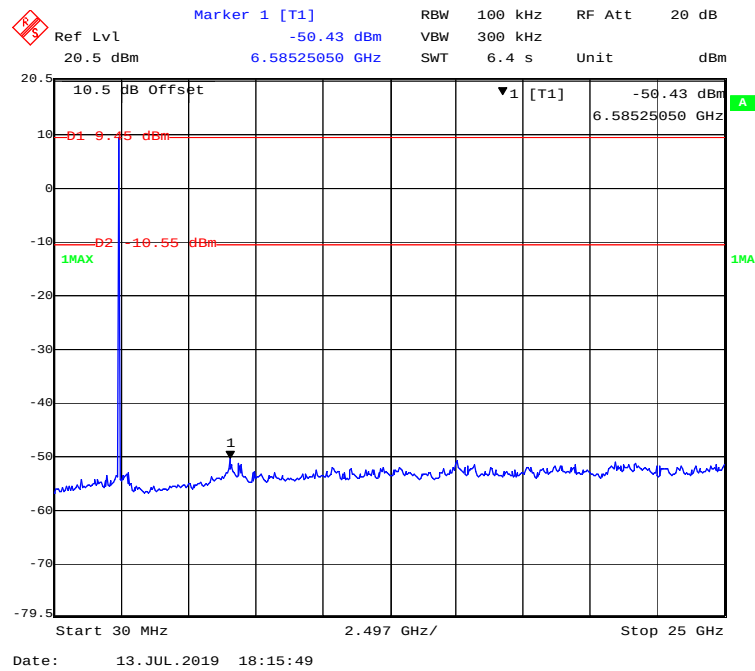


EDR ($\pi/4$ -DQPSK): High Channel

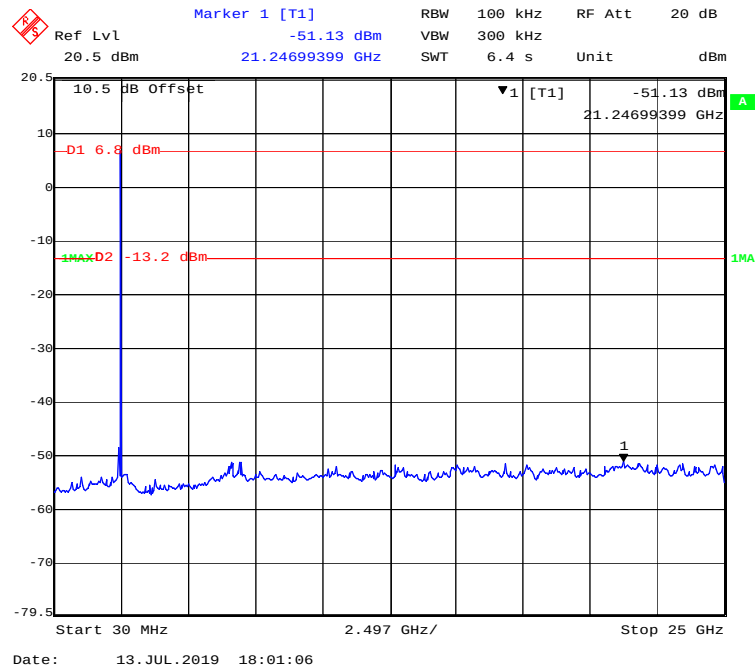


EDR (8DPSK): Low Channel

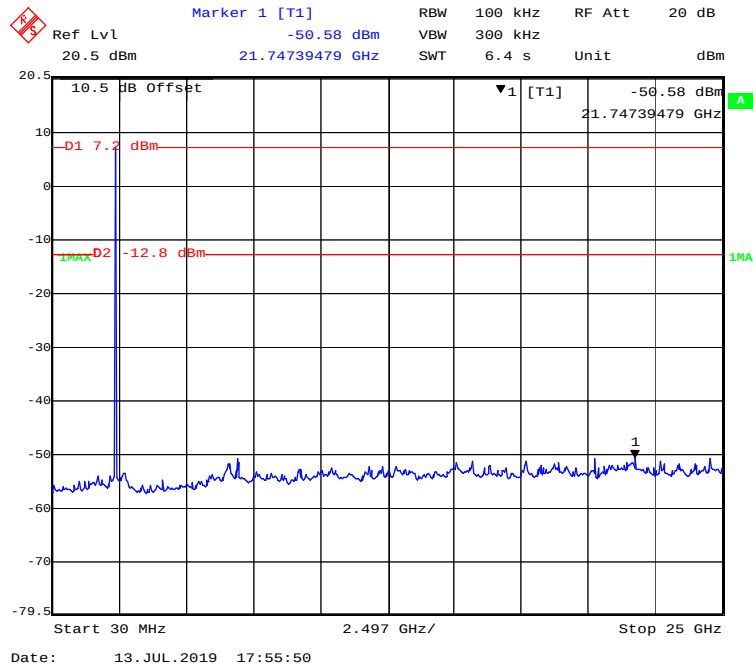

EDR (8DPSK): Middle Channel

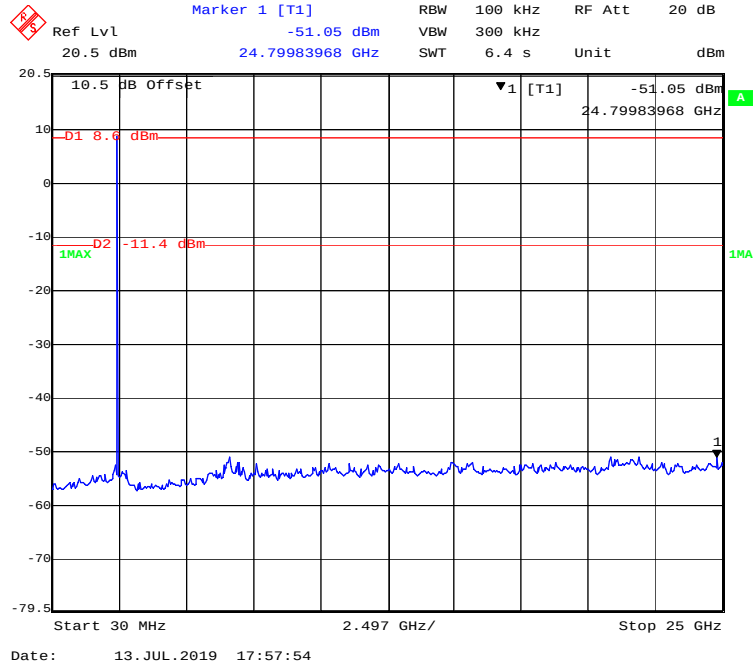

EDR (8DPSK): High Channel

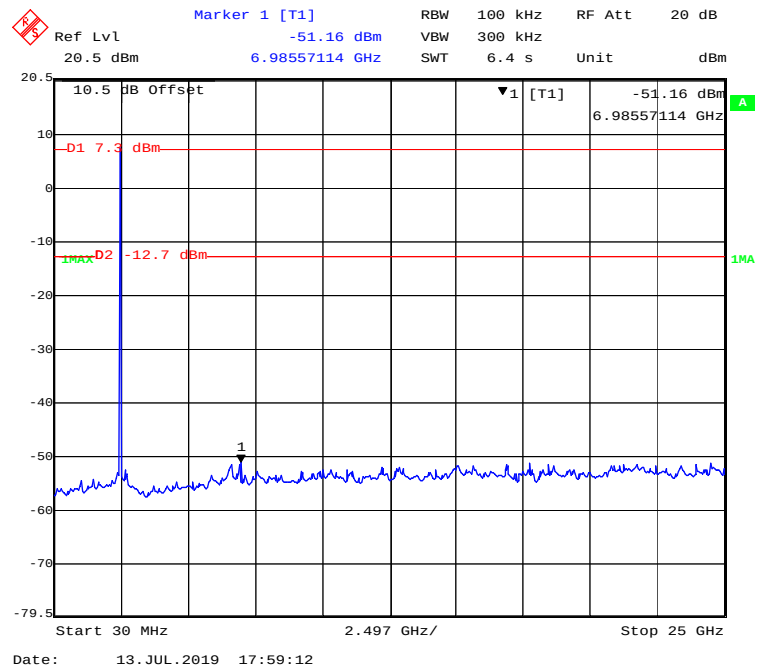

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2019-07-13.


EUT operation mode: Transmitting

Test Result: Compliant.


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.673	Pass
	Adjacent	2403			
	Middle	2441	1.010	0.665	Pass
	Adjacent	2442			
	High	2480	1.004	0.637	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.846	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.854	Pass
	Adjacent	2442			
	High	2480	1.004	0.842	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.838	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.838	Pass
	Adjacent	2442			
	High	2480	1.004	0.829	Pass
	Adjacent	2479			

Note: For BDR mode and EDR mode, Limit = 20 dB bandwidth*2/3


BDR (GFSK): Low Channel

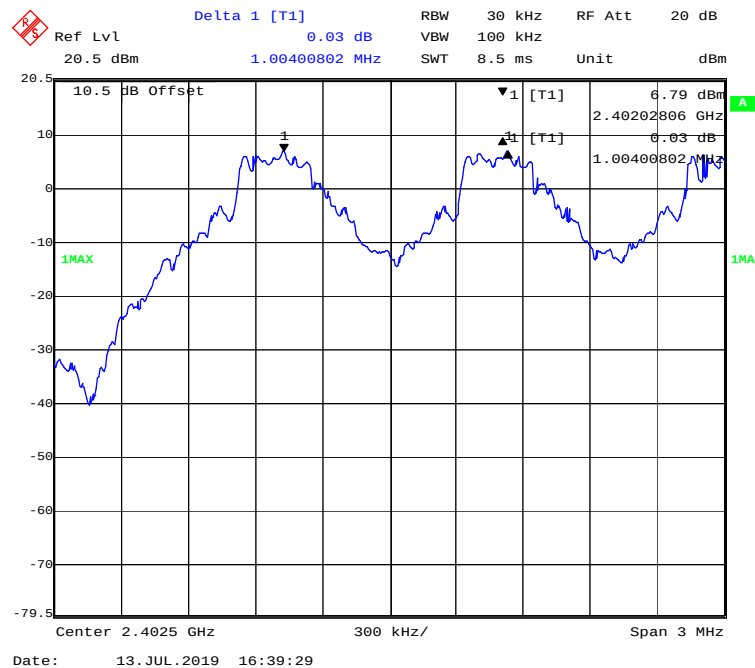

BDR (GFSK): Middle Channel

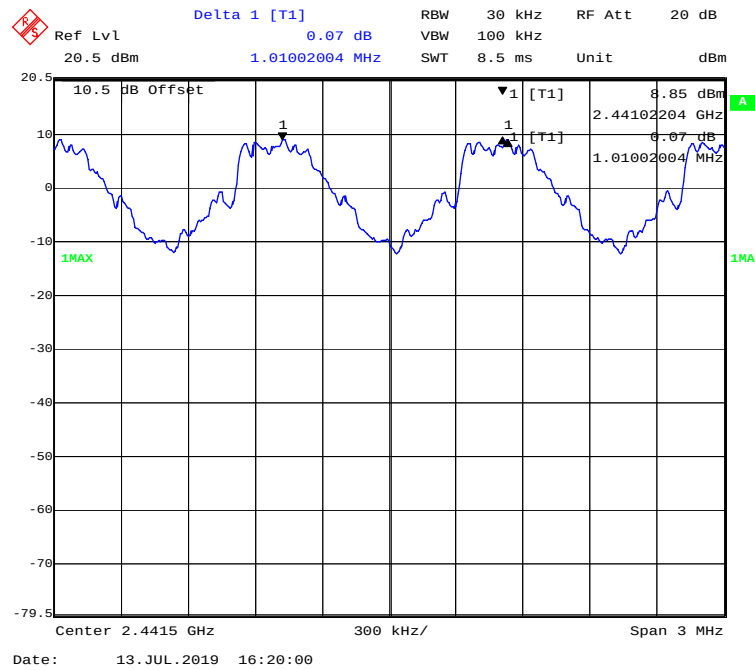

BDR (GFSK): High Channel

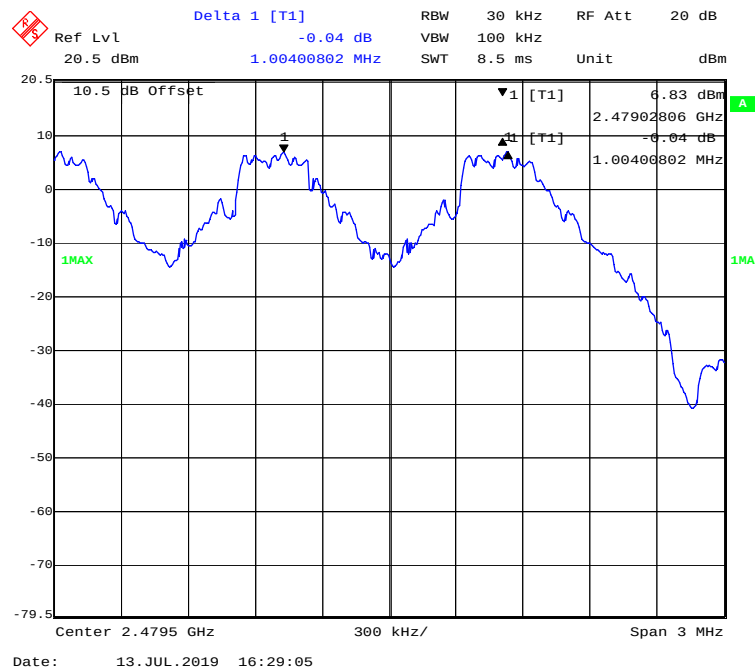

[illegible]

Delta 1 [T1] 0.07 dB RBW 30 kHz RF Att 20 dB
 Ref Lvl 20.5 dBm VBW 100 kHz Unit dBm
 1.00400802 MHz

10.5 dB Offset

1MAX

1

1 [T1]

2.44152204 GHz


0.07 dB

1.00400802 MHz


Center 2.4415 GHz 300 kHz/ Span 3 MHz

Date: 13. JUL. 2019 17:00:22


EDR ($\pi/4$ -DQPSK): High Channel

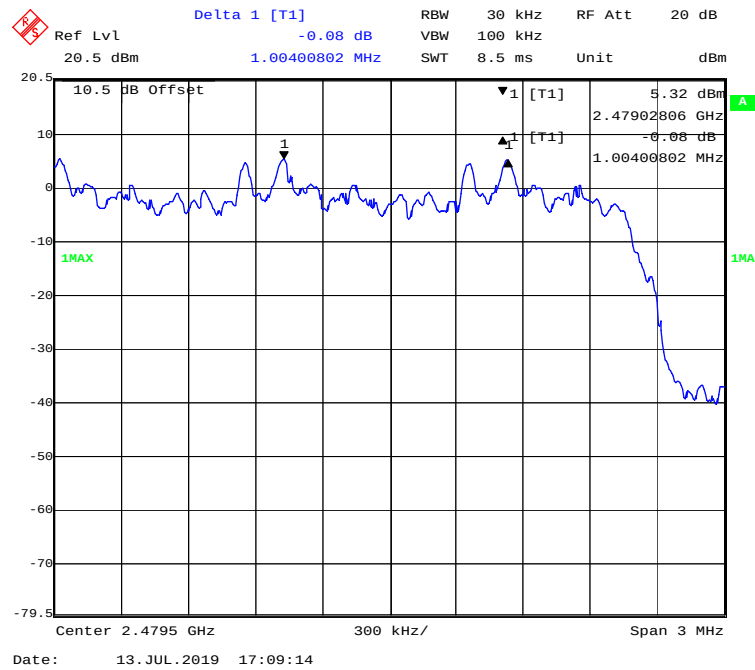


EDR (8DPSK): Low Channel

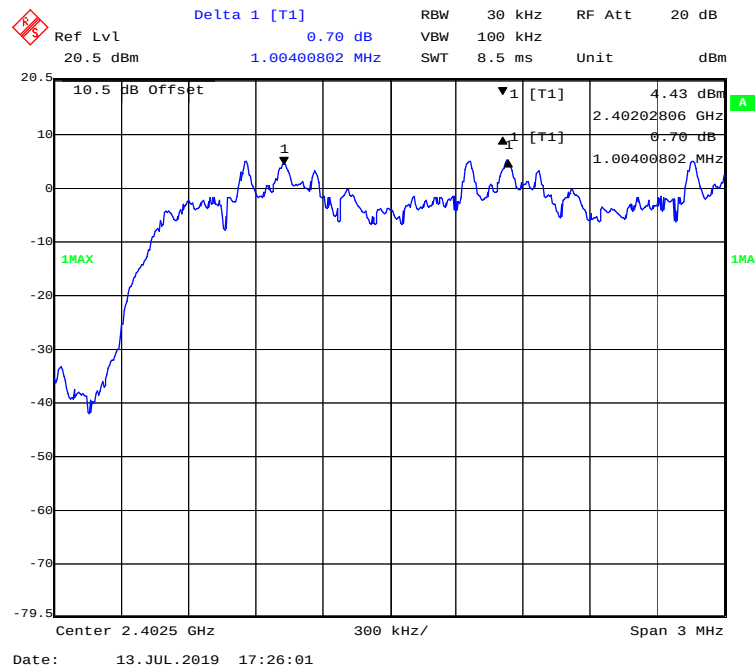

EDR (8DPSK): Middle Channel

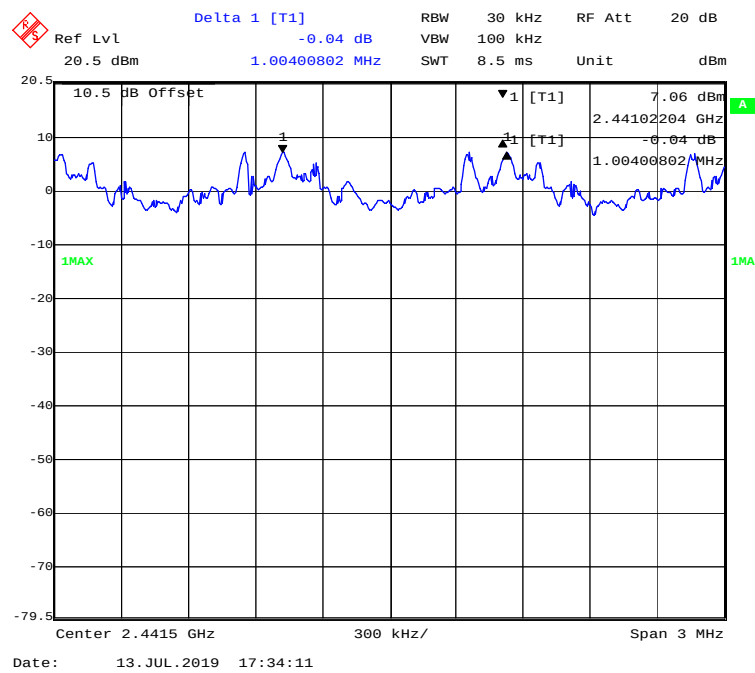

EDR (8DPSK): High Channel

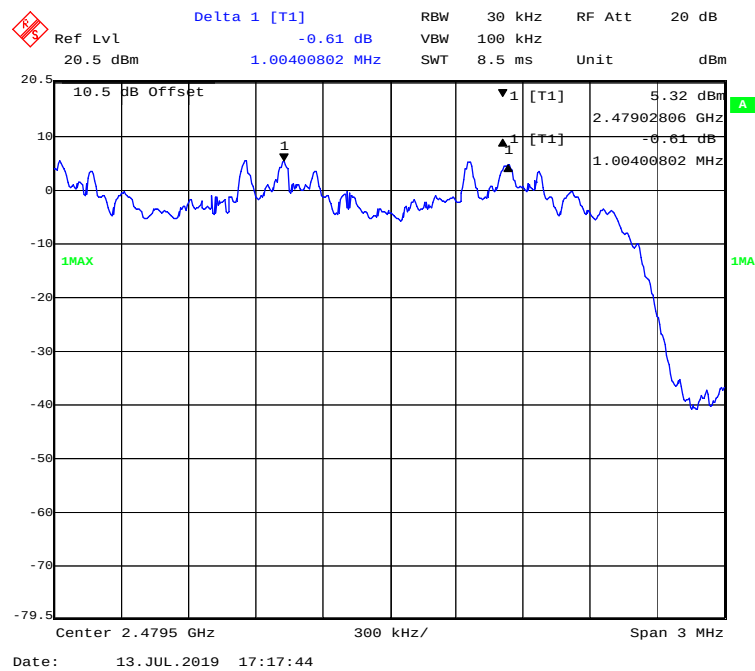

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Max Min on 2019-07-12.

EUT operation mode: Transmitting

Test Result: Compliant.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.010
	Middle	2441	0.998
	High	2480	0.956
EDR ($\pi/4$ -DQPSK)	Low	2402	1.269
	Middle	2441	1.281
	High	2480	1.263
EDR (8DPSK)	Low	2402	1.257
	Middle	2441	1.257
	High	2480	1.244

BDR (GFSK): Low Channel

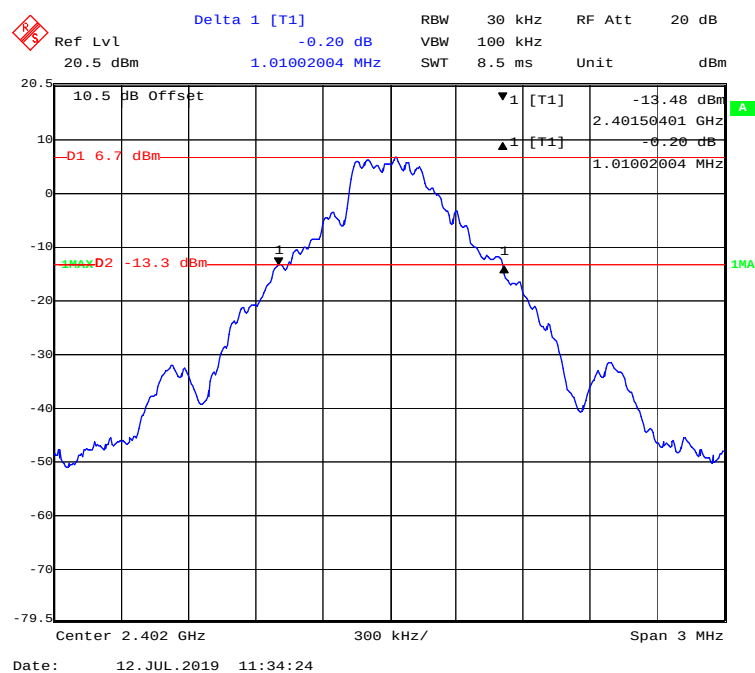

[illegible]

Delta 1 [T1]

Ref Lvl -0.09 dB

20.5 dBm

955.91182365 kHz

RBW 30 kHz

RF Att 20 dB

VBW 100 kHz

SWT 8.5 ms

Unit dBm

10.5 dB Offset

▼1 [T1] -13.72 dBm

▲1 [T1] -0.09 dB

955.91182365 kHz

1MAX D2 -13.61 dBm


1MAX

Center 2.48 GHz

300 kHz/

Span 3 MHz

Date: 12. JUL. 2019 11:37:13

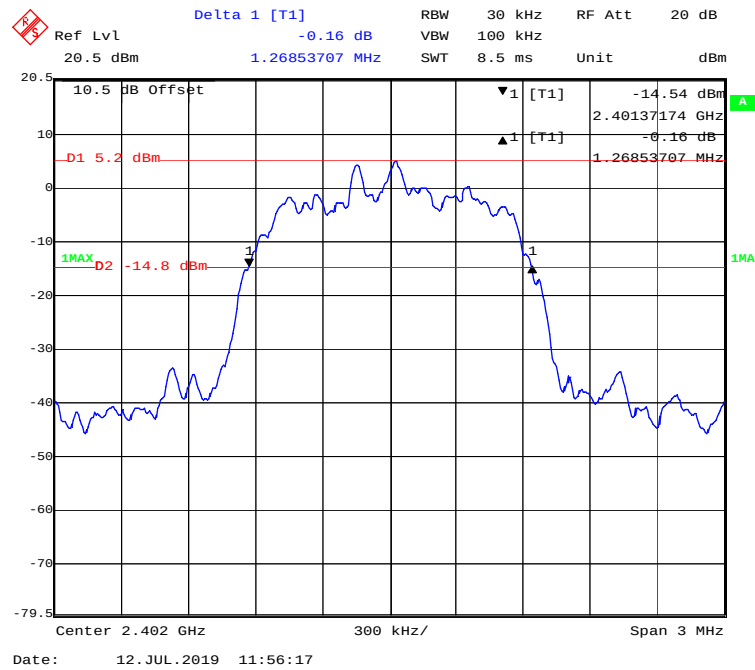EDR ($\pi/4$ -DQPSK): Low Channel**EDR($\pi/4$ -DQPSK): Middle Channel**

[illegible]

Ref Lvl 20.5 dBm

Delta 1 [T1] 0.56 dB

RBW 30 kHz

RF Att 20 dB

Unit dBm

10.5 dB Offset

-15.23 dBm

2.40138377 GHz

0.56 dB

-12.56 dBm

1.25651303 MHz


-14.8 dBm

Center 2.402 GHz


Span 3 MHz

Date: 12. JUL. 2019 11:53:01

EDR (8DPSK): Middle Channel

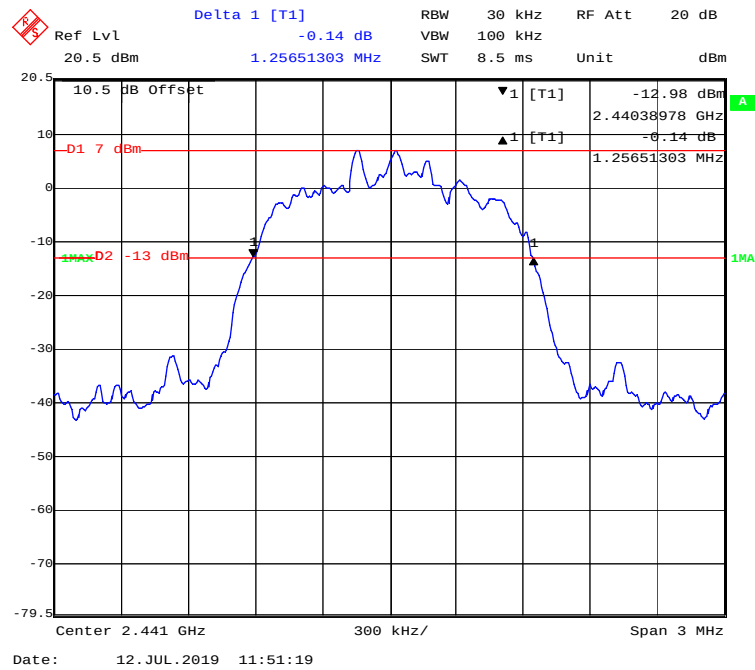

EDR (8DPSK): High Channel

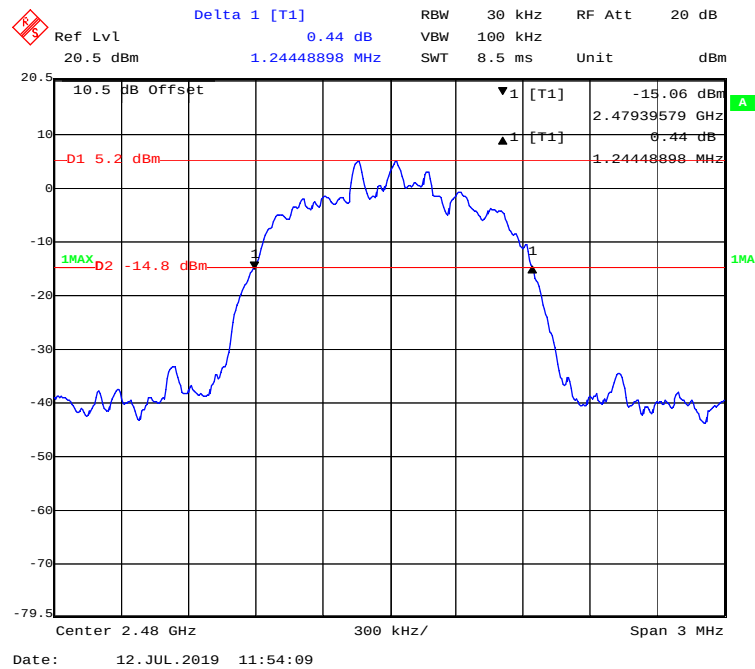

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Max Min on 2019-07-13.

EUT operation mode: Hopping


Test Result: Compliant.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

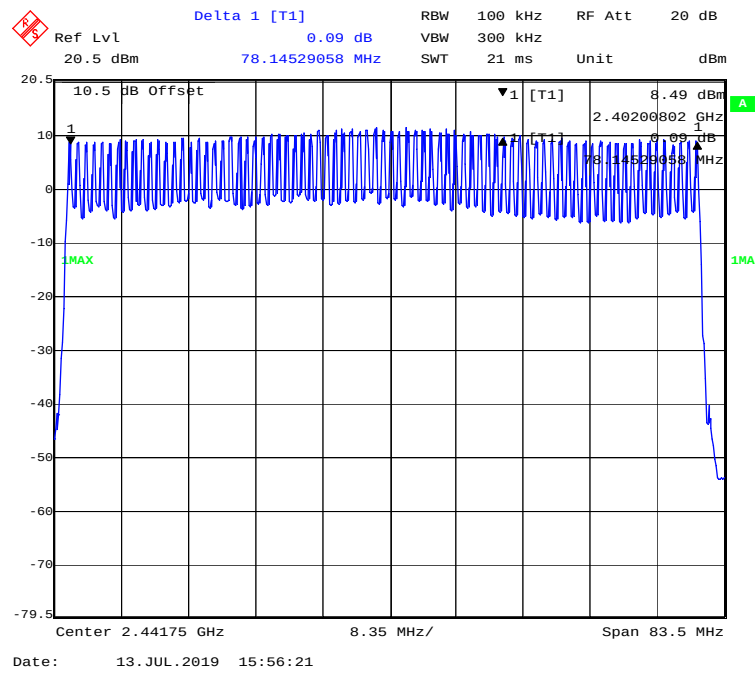

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

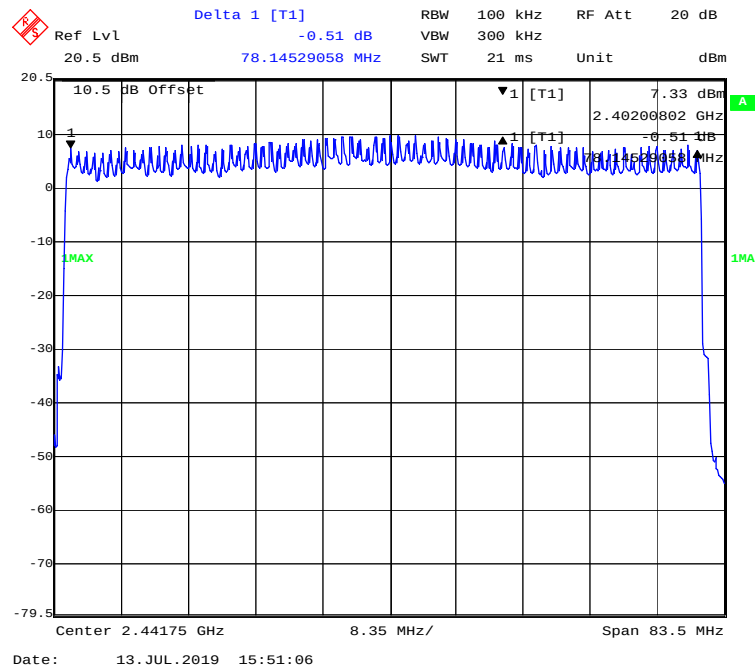

EDR (8DPSK): Number of Hopping Channels

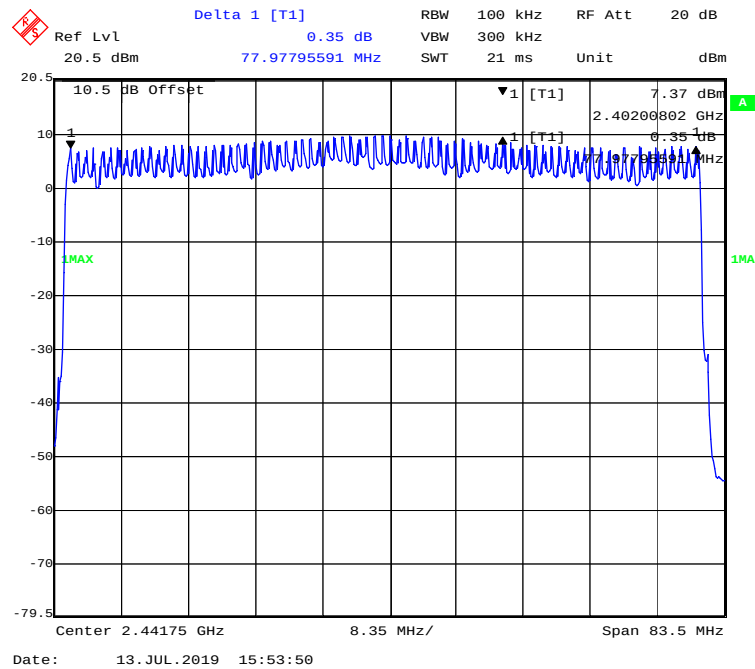

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	25.3°C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2019-07-13.


EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.405	0.130	0.4	Pass
		Middle	0.405	0.130	0.4	Pass
		High	0.405	0.130	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.673	0.268	0.4	Pass
		Middle	1.673	0.268	0.4	Pass
		High	1.673	0.268	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	2.924	0.312	0.4	Pass
		Middle	2.924	0.312	0.4	Pass
		High	2.924	0.312	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.411	0.132	0.4	Pass
		Middle	0.411	0.132	0.4	Pass
		High	0.411	0.132	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.673	0.268	0.4	Pass
		Middle	1.673	0.268	0.4	Pass
		High	1.673	0.268	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.924	0.312	0.4	Pass
		Middle	2.924	0.312	0.4	Pass
		High	2.924	0.312	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.413	0.132	0.4	Pass
		Middle	0.413	0.132	0.4	Pass
		High	0.413	0.132	0.4	Pass
		Note:3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.673	0.268	0.4	Pass
		Middle	1.673	0.268	0.4	Pass
		High	1.673	0.268	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.924	0.312	0.4	Pass
		Middle	2.924	0.312	0.4	Pass
		High	2.924	0.312	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

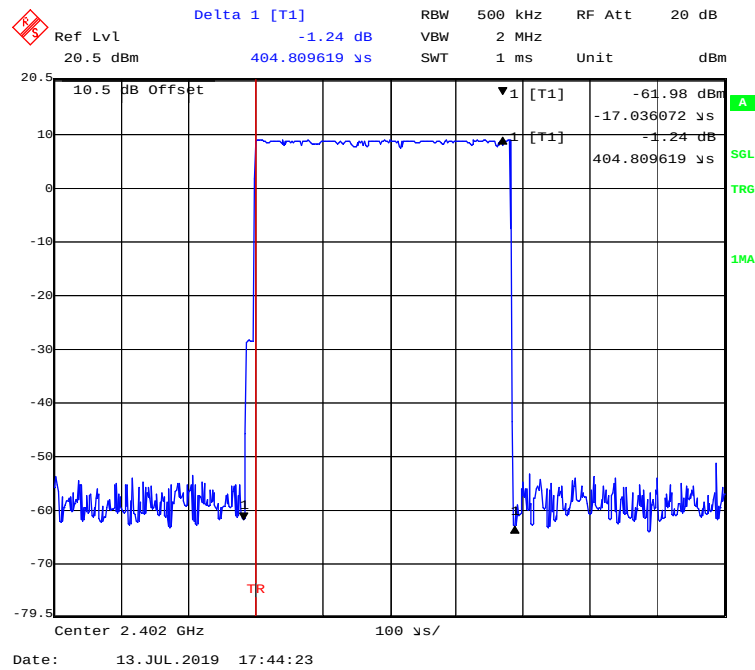


BDR (GFSK): Pulse time, Middle Channel, DH1

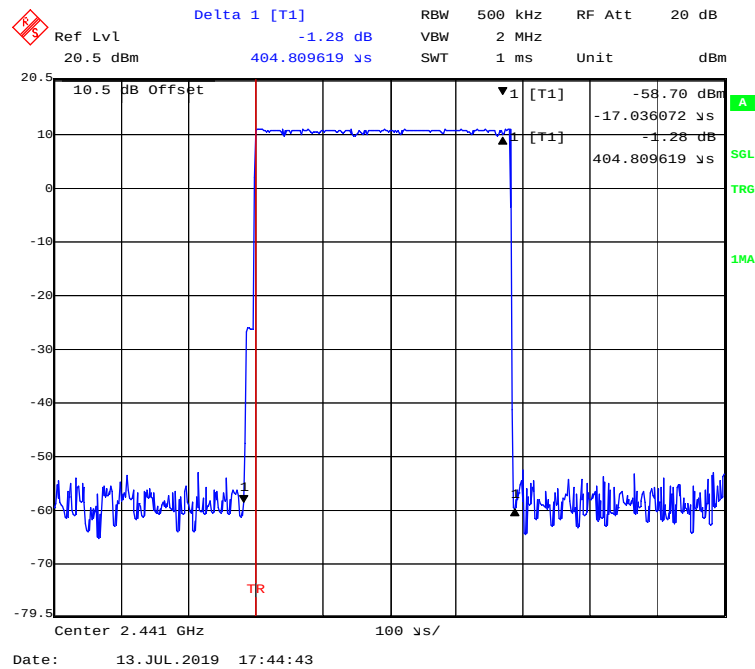


BDR (GFSK): Pulse time, High Channel, DH1

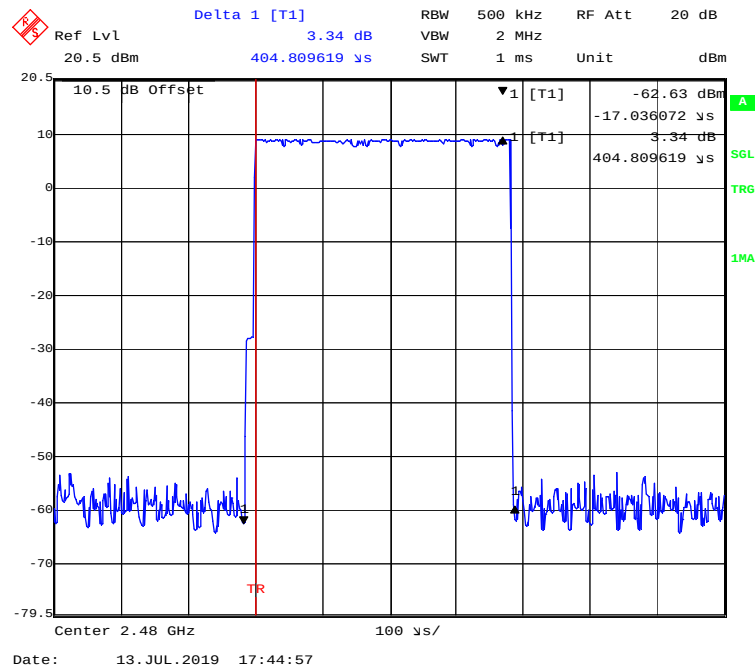


BDR (GFSK): Pulse time, Low Channel, DH3

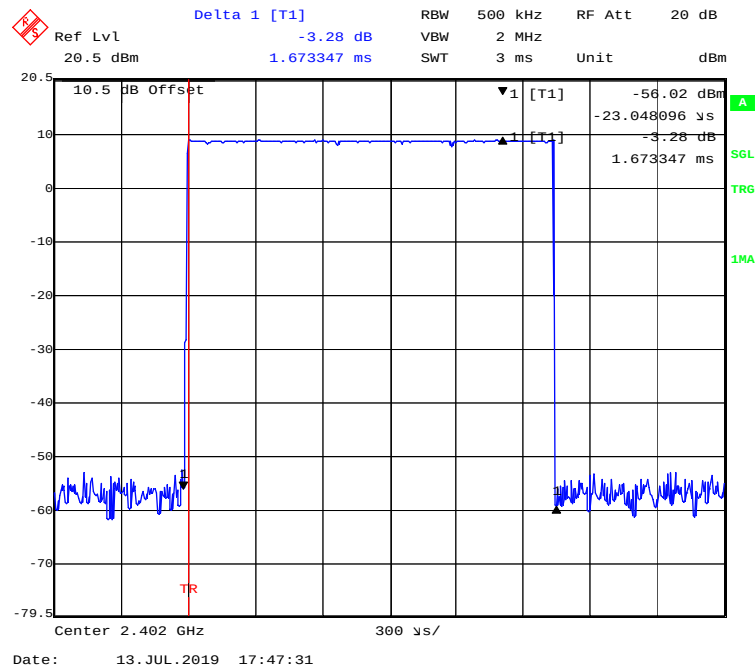


BDR (GFSK): Pulse time, Middle Channel, DH3

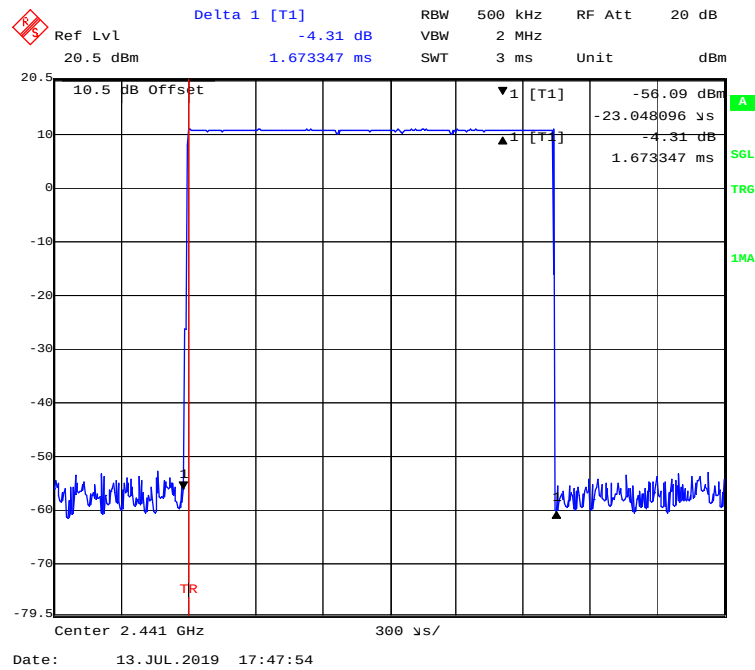


BDR (GFSK): Pulse time, High Channel, DH3

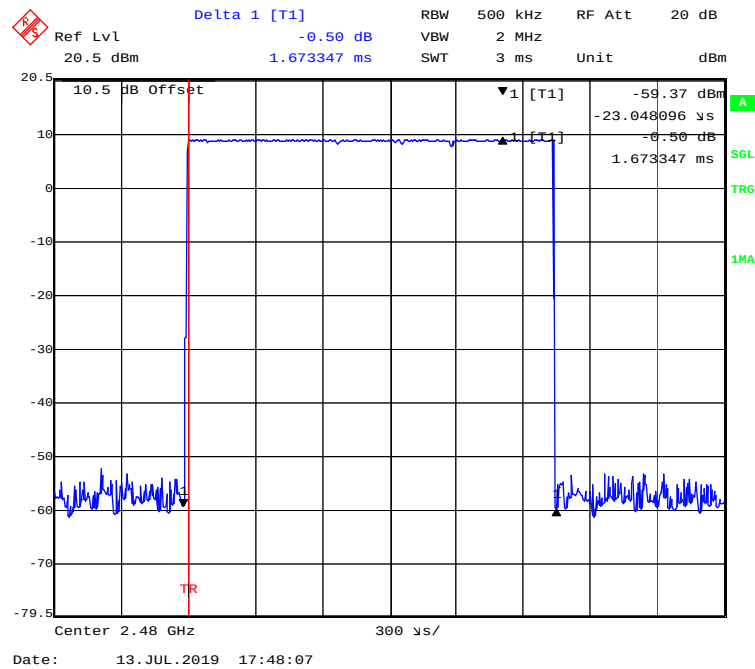


BDR (GFSK): Pulse time, Low Channel, DH5

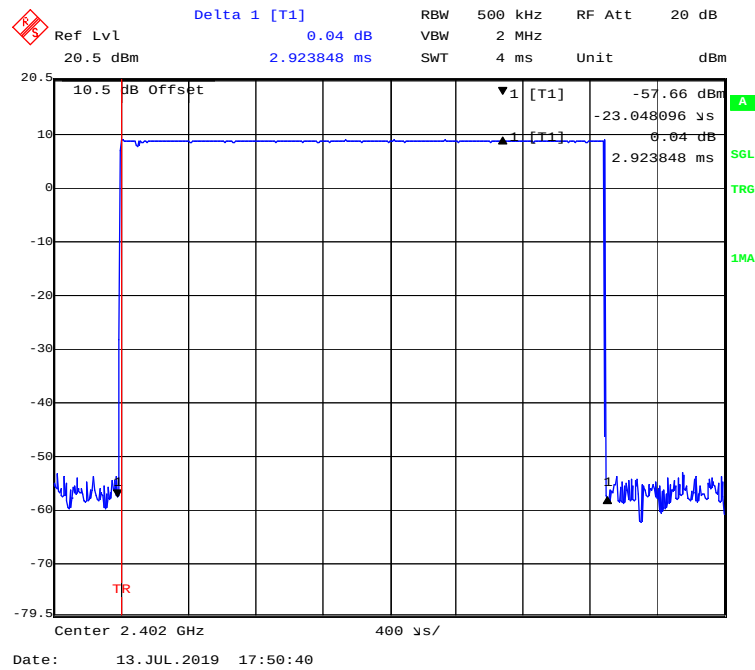


BDR (GFSK): Pulse time, Middle Channel, DH5

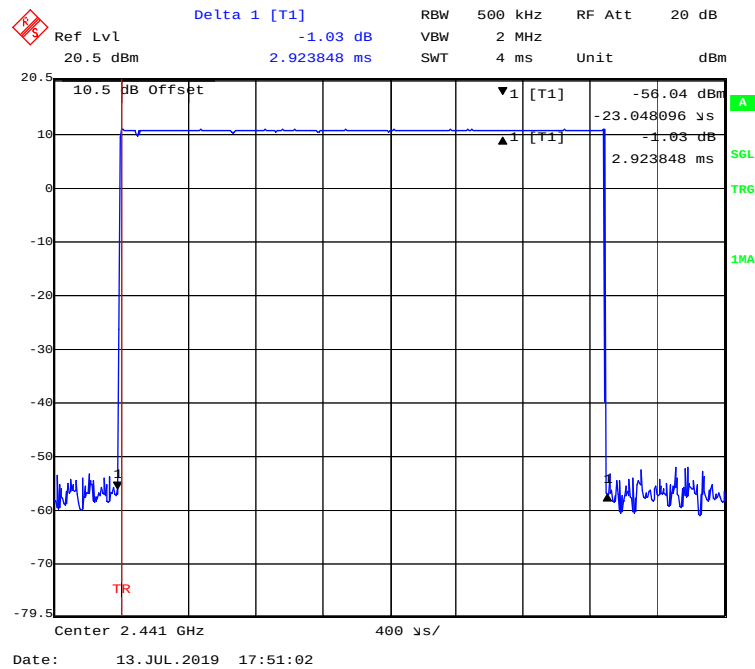

BDR (GFSK): Pulse time, High Channel, DH5

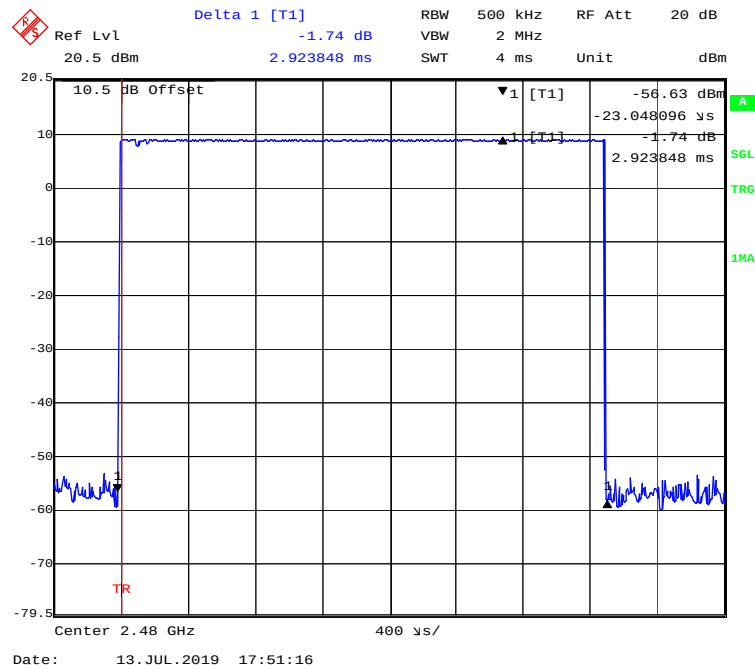

EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

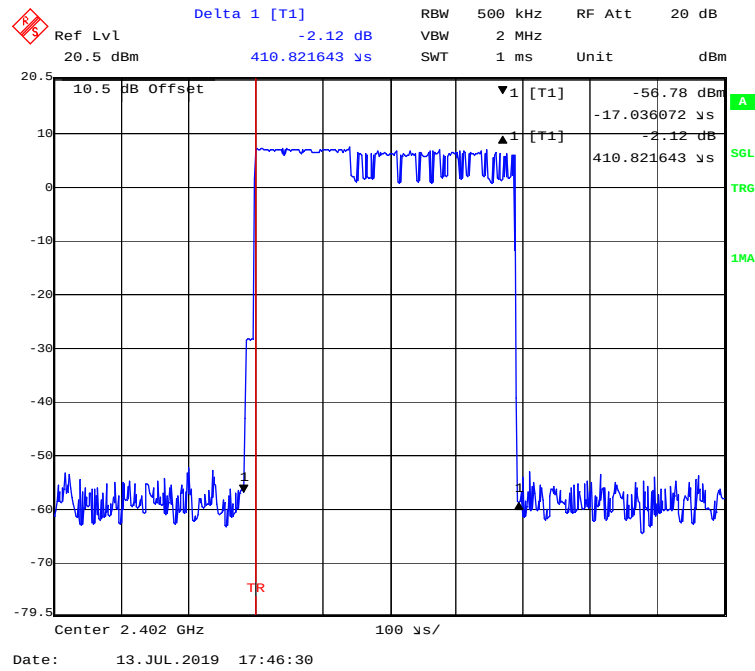

Delta 1 [T1] 1.83 dB
 RBW 500 kHz Ref Att 20 dB
 Ref Lvl 20.5 dBm VBW 2 MHz
 410.821643 μ s SWT 1 ms Unit dBm

10.5 dB Offset
 20.5
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -79.5

Center 2.441 GHz 100 μ s/

Date: 13. JUL. 2019 17:46:44

Delta 1 [T1]

Ref Lvl -3.51 dB

20.5 dBm

10.5 dB Offset

RBW 500 kHz

VBW 2 MHz

SWT 1 ms

RF Att 20 dB

Unit dBm

▼1 [T1] -57.41 dBm

▲1 [T1] -3.51 dB

-17.036072 μ s



410.821643 μ s

TR


Center 2.48 GHz

100 μ s/


Date: 13. JUL. 2019 17:45:28

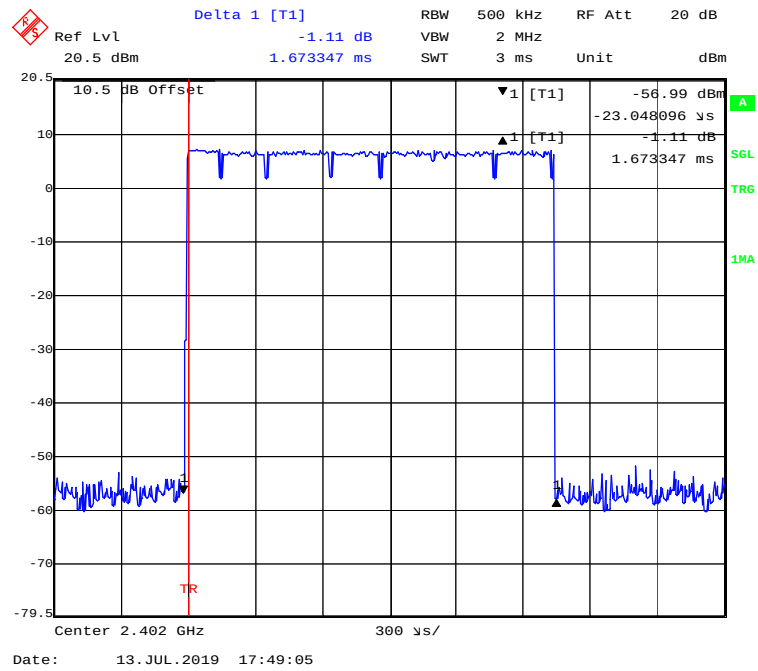
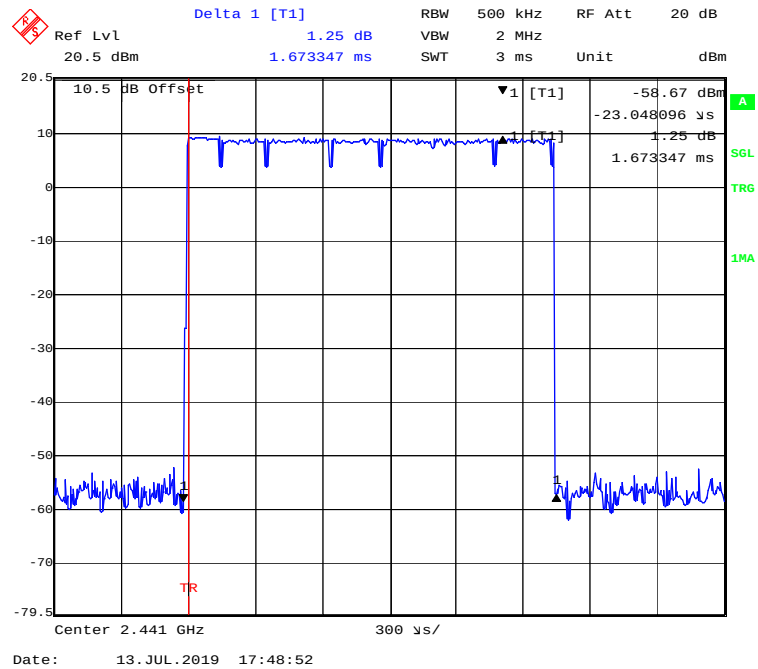
EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3

EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3

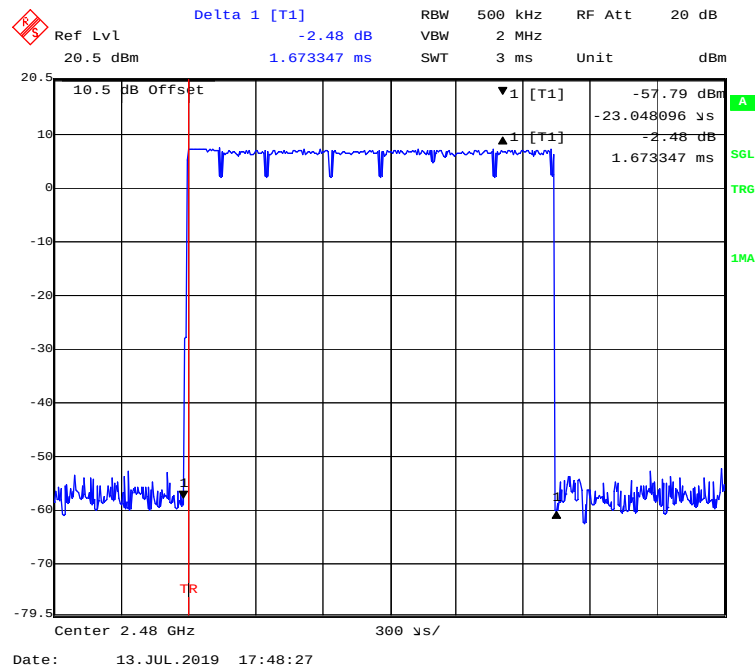


EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5

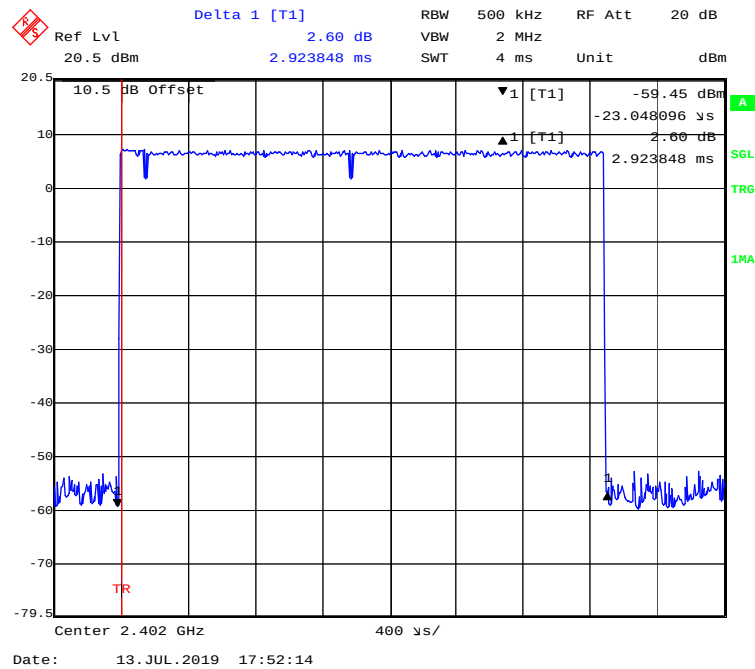


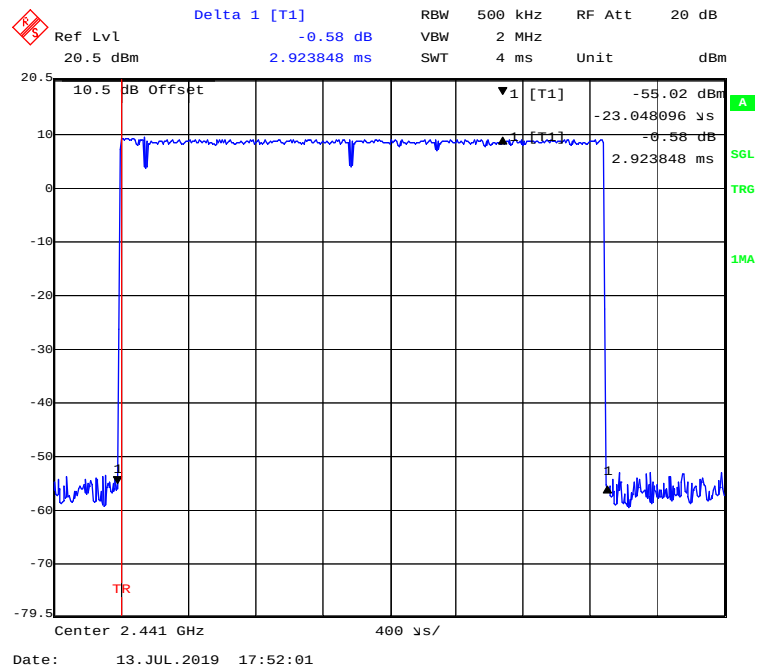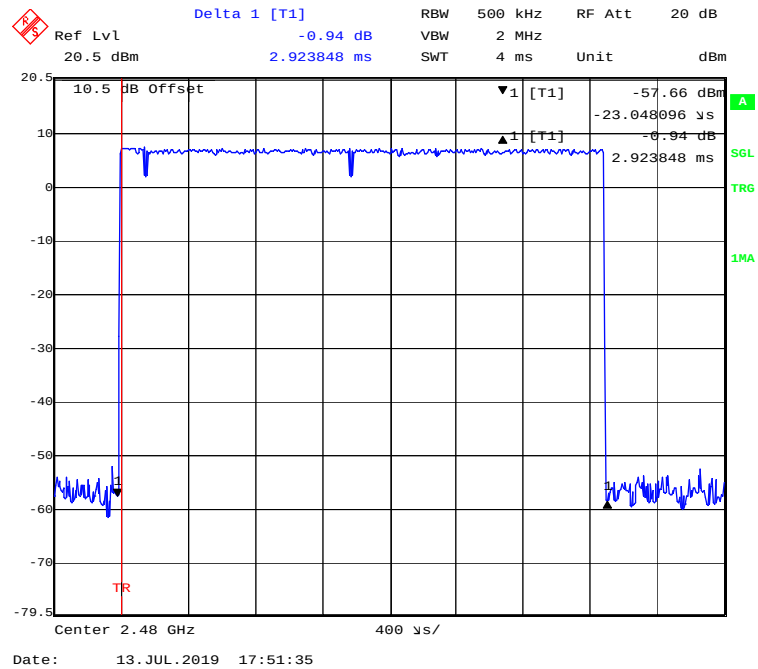EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5**EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5**


EDR (8DPSK): Pulse time, Low Channel, 3DH1

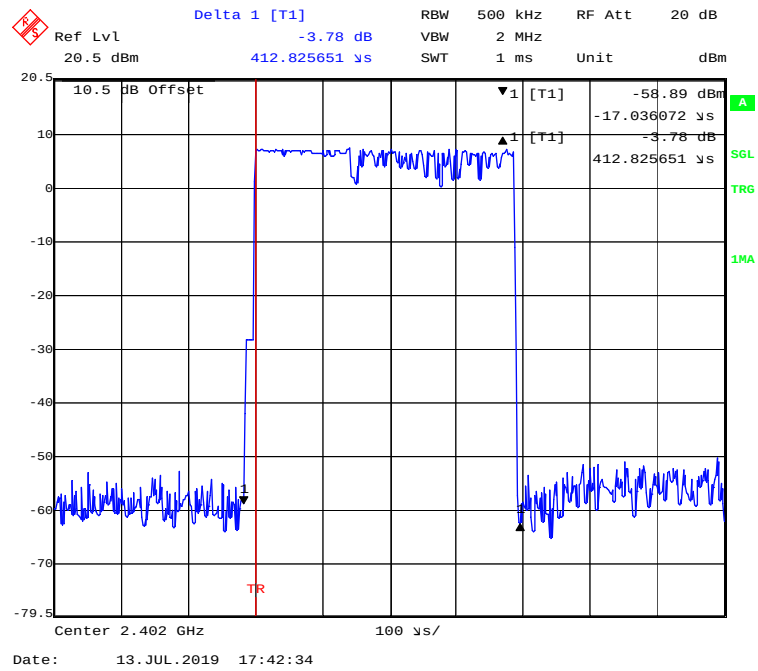


EDR (8DPSK): Pulse time, Middle Channel, 3DH1

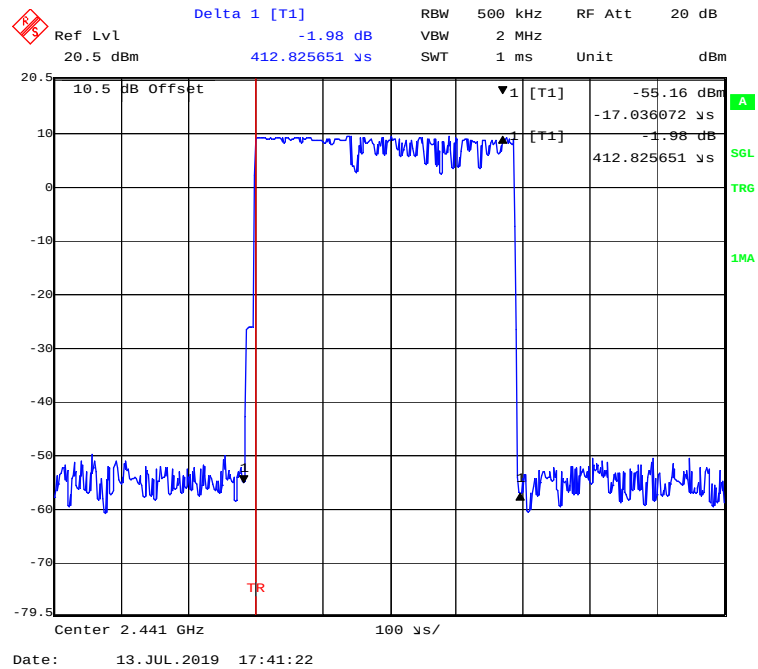


EDR (8DPSK): Pulse time, High Channel, 3DH1

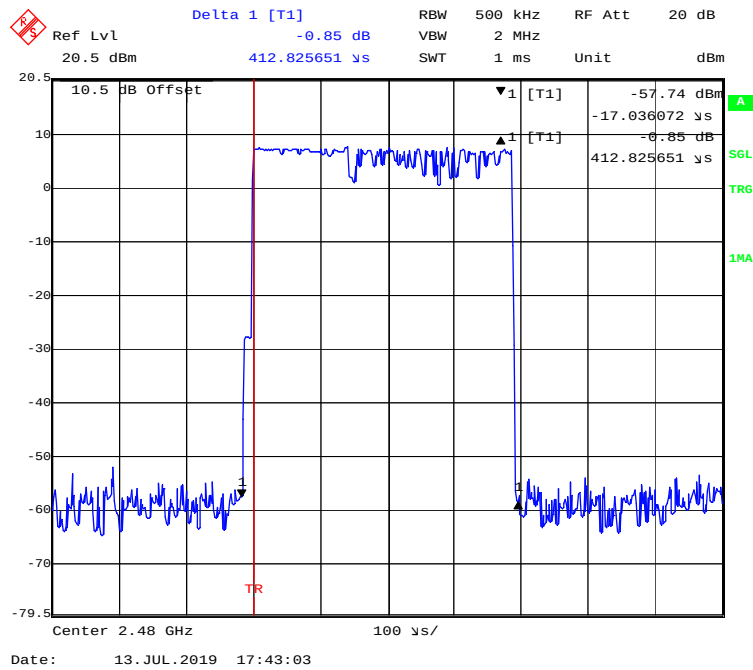


EDR (8DPSK): Pulse time, Low Channel, 3DH3

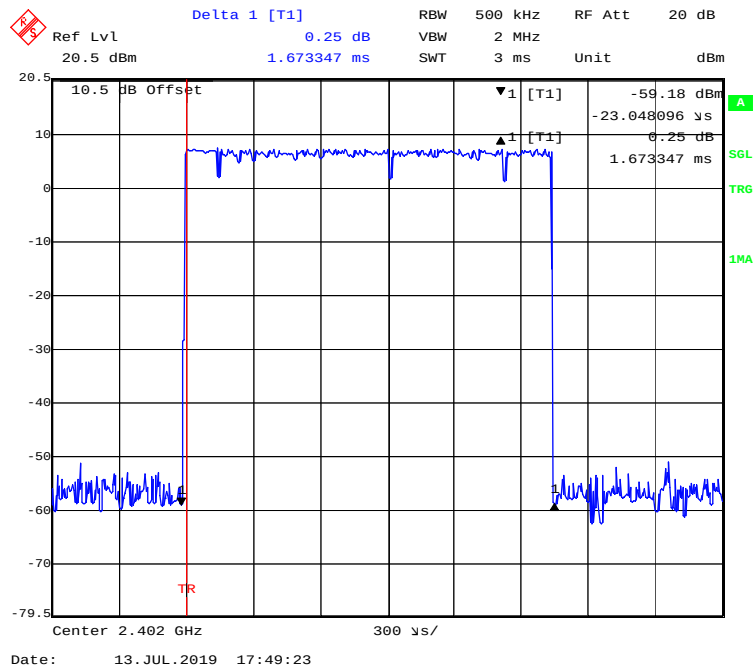


EDR (8DPSK): Pulse time, Middle Channel, 3DH3

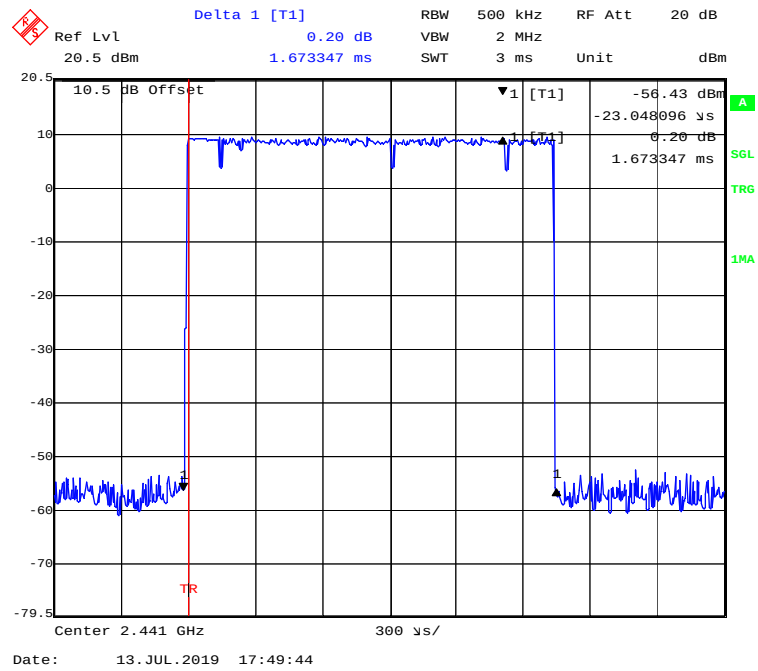


EDR (8DPSK): Pulse time, High Channel, 3DH3

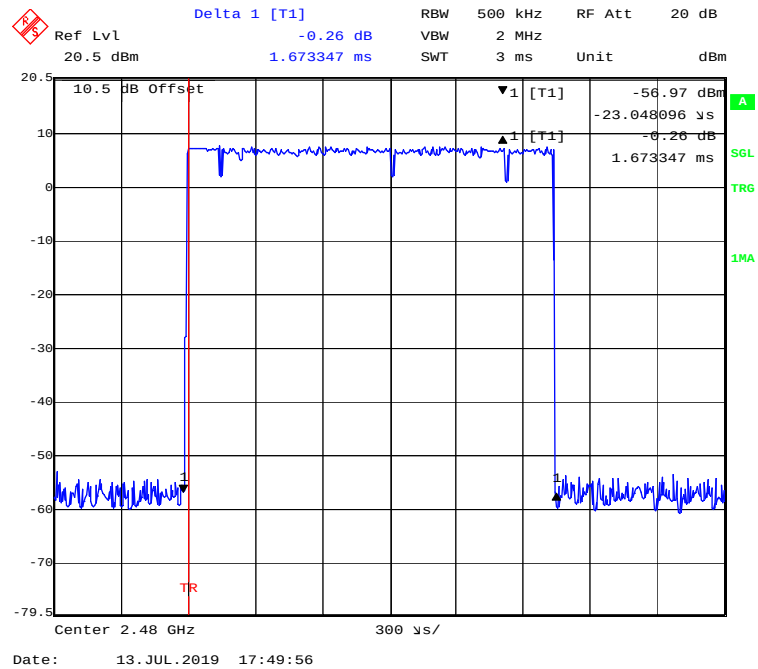


EDR (8DPSK): Pulse time, Low Channel, 3DH5

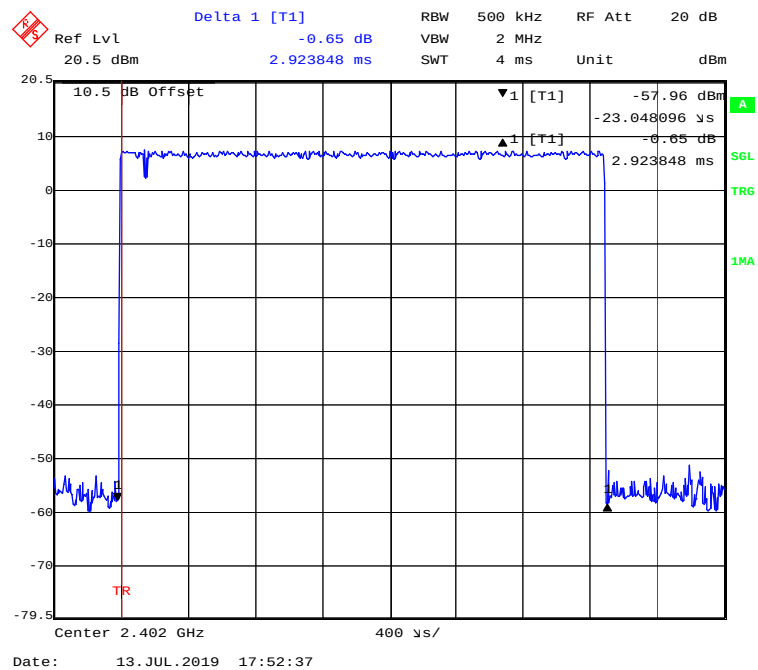

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

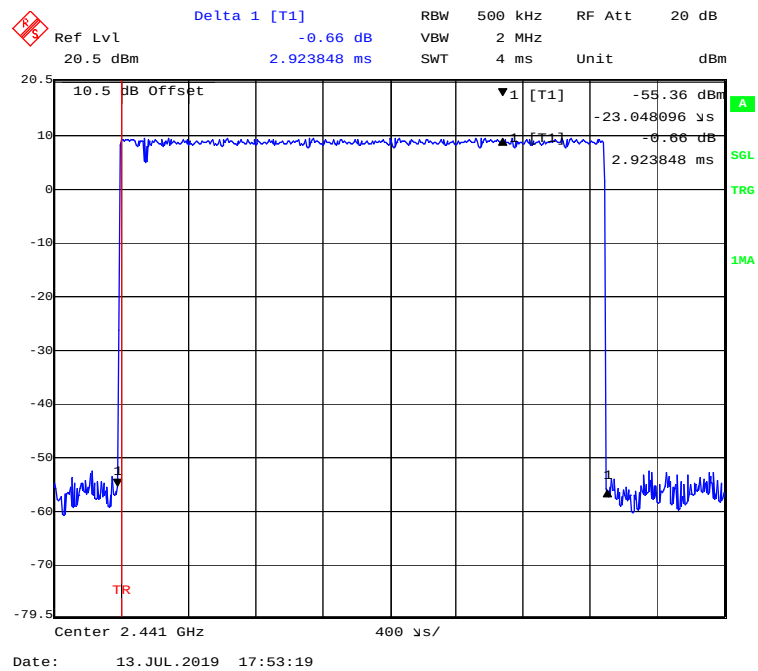

EDR (8DPSK): Pulse time, High Channel, 3DH5

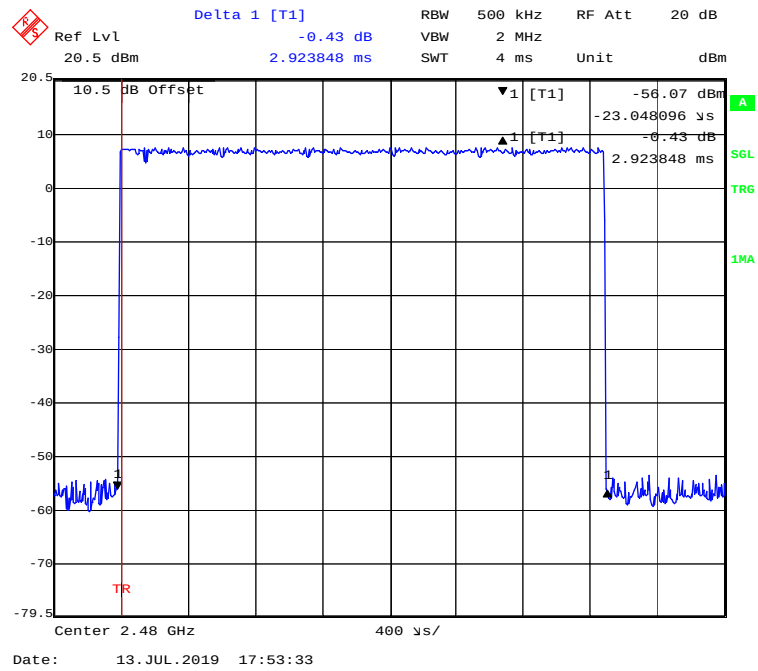

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data**Environmental Conditions**

Temperature:	24~25 °C
Relative Humidity:	50~53 %
ATM Pressure:	101.3~101.6 kPa


The testing was performed by Max Min from 2019-07-12 to 2019-09-04.

EUT operation mode: Transmitting


Test Result: Compliant.

Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	9.51	8.93	125
	2441	10.82	12.08	125
	2480	8.86	7.69	125
EDR ($\pi/4$-DQPSK)	2402	9.14	8.20	125
	2441	10.95	12.45	125
	2480	8.88	7.73	125
EDR (8DPSK)	2402	9.37	8.65	125
	2441	11.18	13.12	125
	2480	9.25	8.41	125


BDR (GFSK): 2402MHz

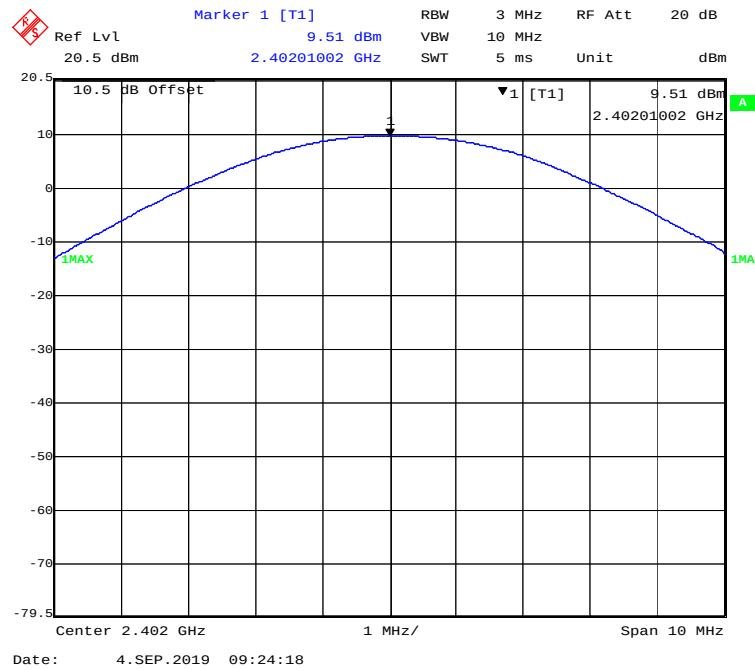


BDR (GFSK): 2441MHz

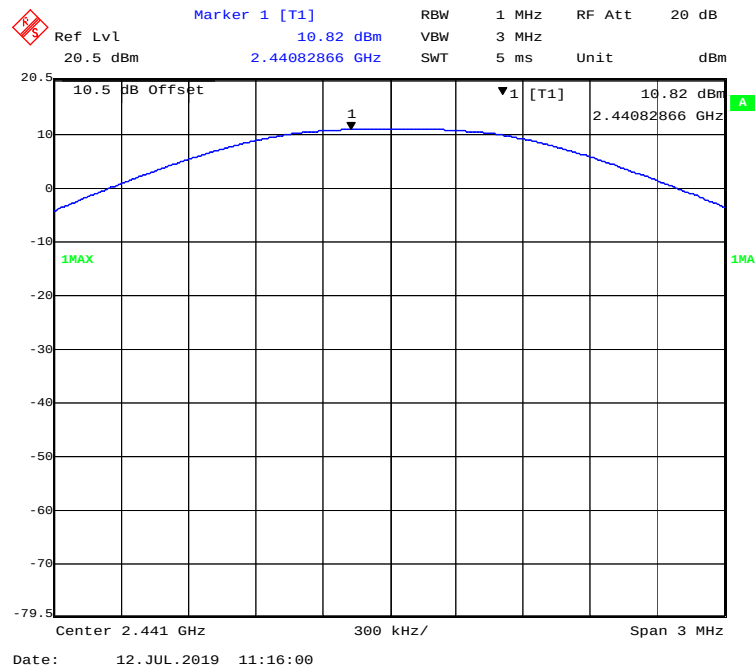


BDR (GFSK): 2480MHz

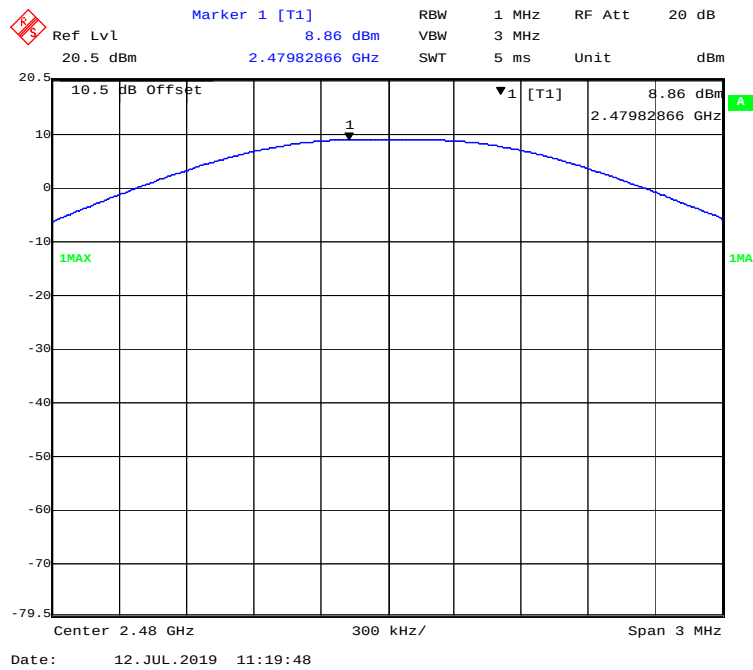


EDR($\pi/4$ -DQPSK): 2402MHz

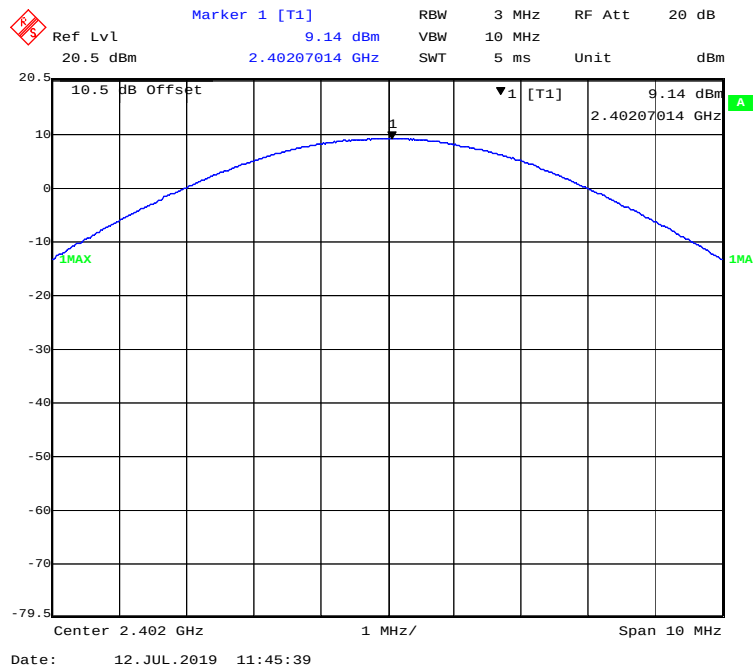


EDR($\pi/4$ -DQPSK): 2441MHz

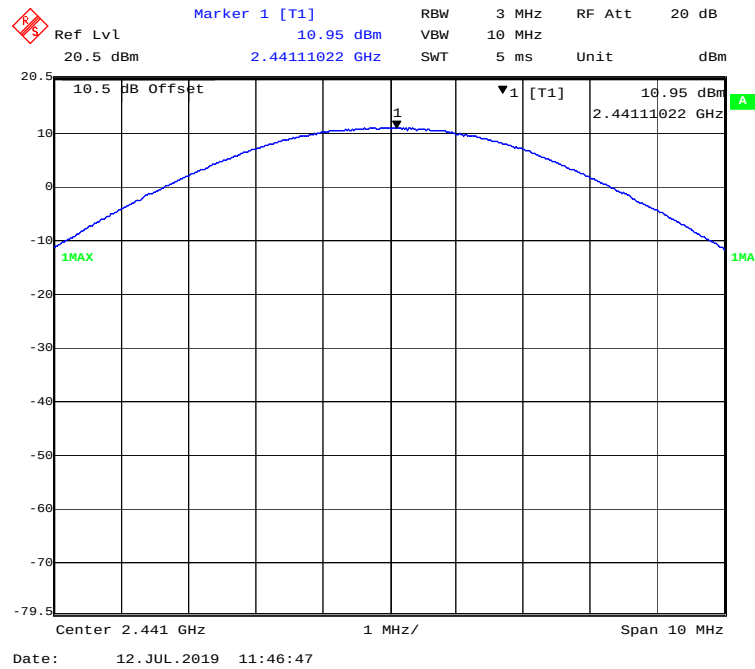


EDR($\pi/4$ -DQPSK): 2480MHz

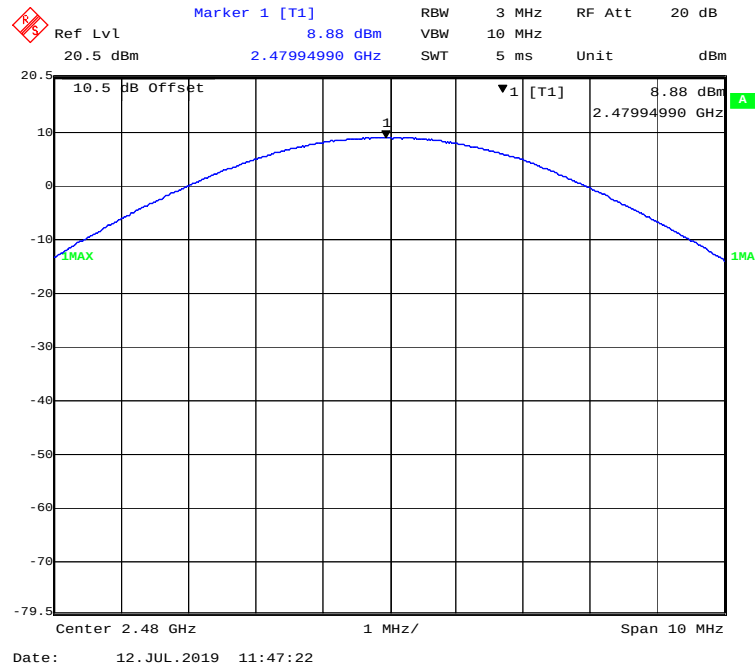


EDR(8DPSK): 2402MHz

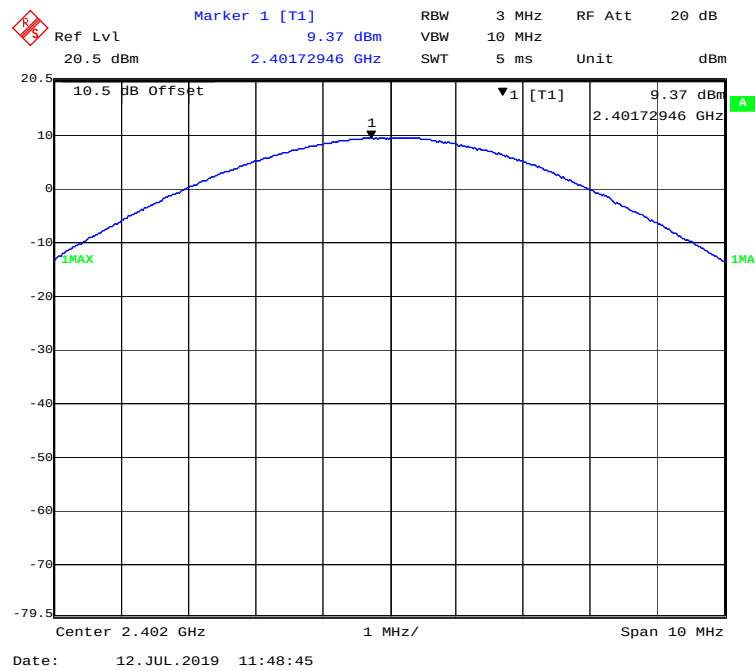

EDR(8DPSK): 2441MHz

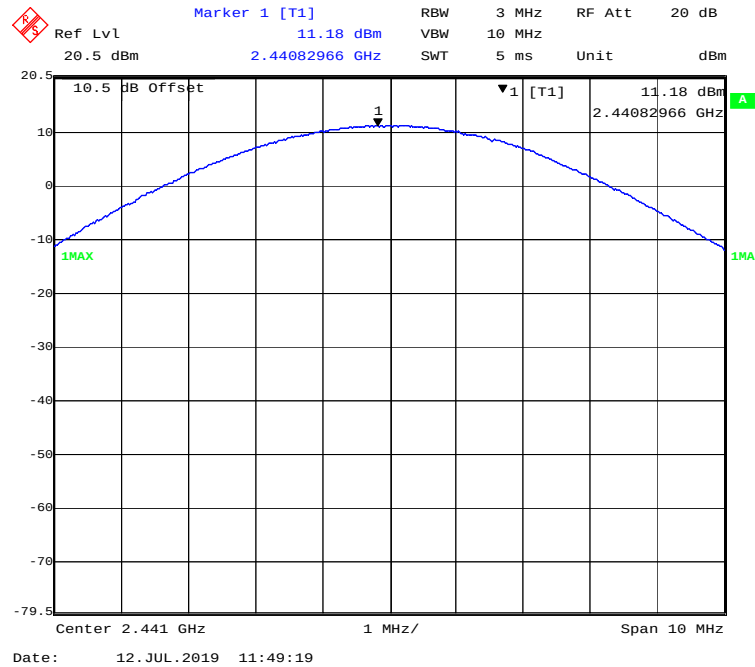

EDR(8DPSK): 2480MHz

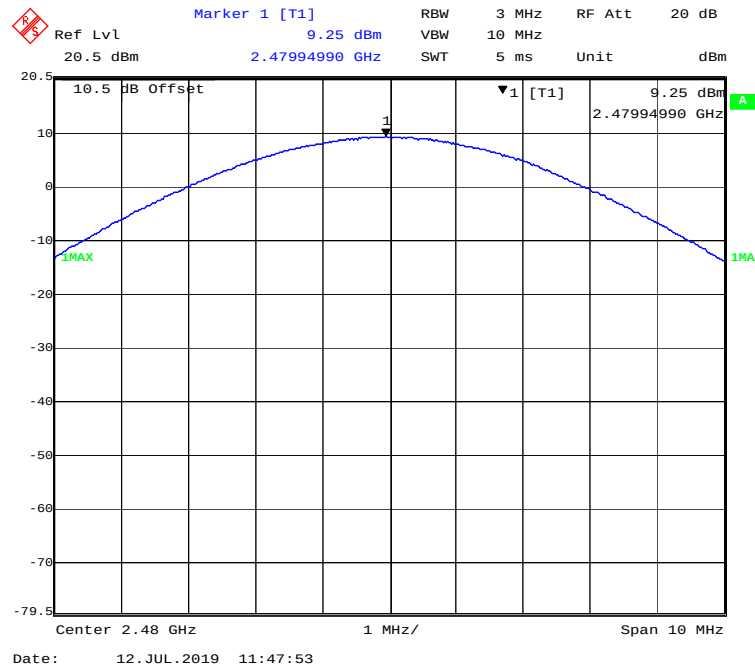

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.2~25.3℃
Relative Humidity:	48~50 %
ATM Pressure:	101.3~102.3 kPa


The testing was performed by Max Min from 2019-07-12 to 2019-07-13.

EUT operation mode: Transmitting & Hopping


Test Result: Compliant.

Band Edge

BDR (GFSK): Left Side - Transmitting

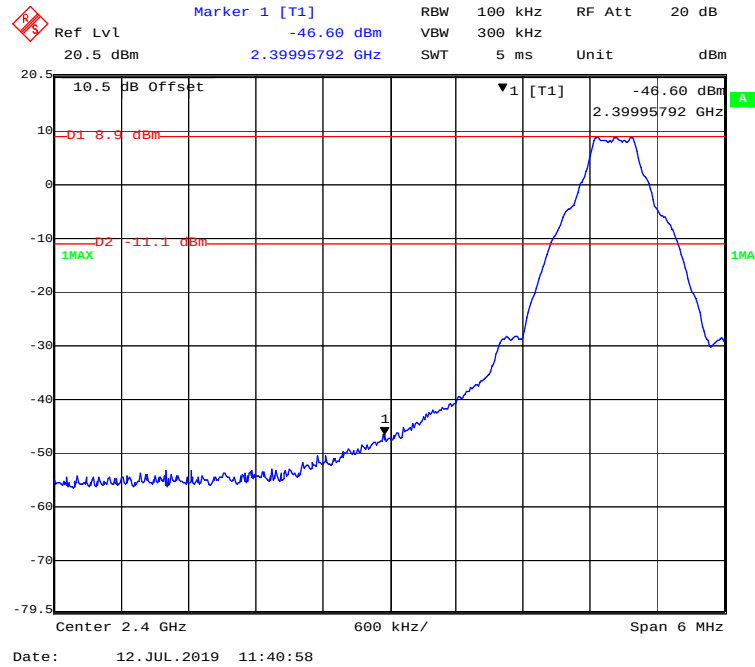

BDR (GFSK): Right Side - Transmitting

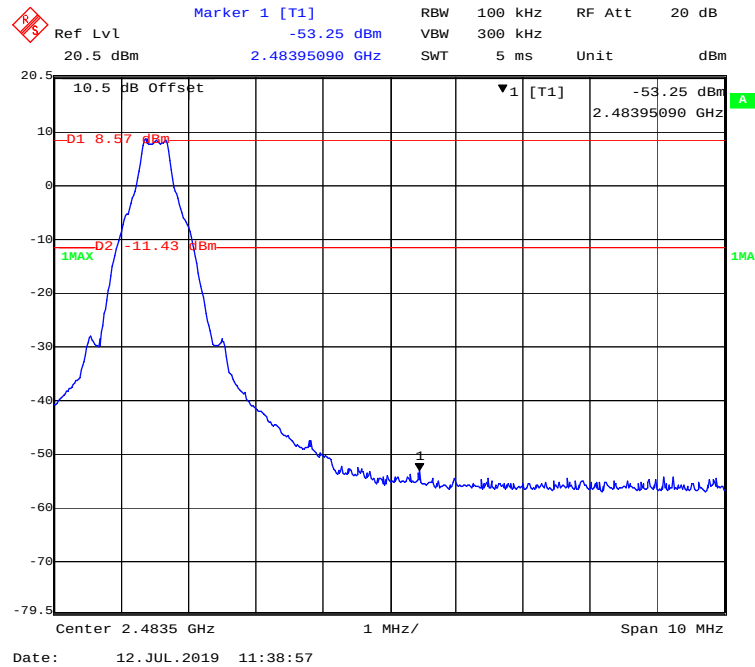

Marker 1 [T1]
 -48.18 dBm
 2.39996994 GHz

RBW 100 kHz RF Att 20 dB
 Ref Lvl 20.5 dBm Unit dBm
 SWT 5 ms

10.5 dB Offset

▼1 [T1] -48.18 dBm
 2.39996994 GHz

-D1 6.3 dBm

1MAXD2 -13.7 dBm

1

Center 2.4 GHz 600 kHz/ Span 6 MHz

Date: 12.JUL.2019 13:12:15

Marker 1 [T1]
 Ref Lvl -54.91 dBm
 20.5 dBm 2.48413126 GHz
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 5 ms Unit dBm


10.5 dB Offset
 ▼1 [T1]
 -54.91 dBm
 2.48413126 GHz

-D1 5.8 dBm
 -14.2 dBm
 -54.91 dBm
 -14.2 dBm


Center 2.4835 GHz 1 MHz/ Span 10 MHz

Date: 12. JUL. 2019 13:17:22


EDR (8DPSK): Left Side - Transmitting

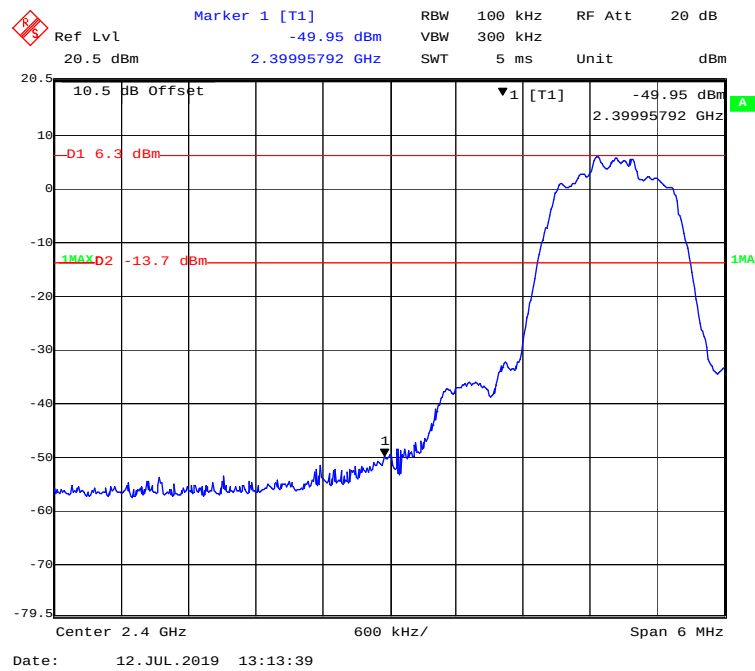


EDR (8DPSK): Right Side - Transmitting

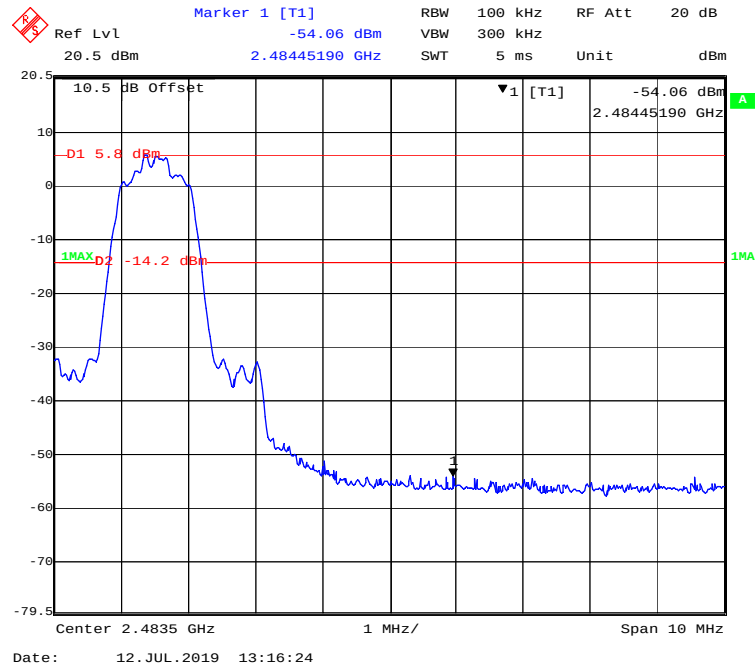


BDR (GFSK): Left Side - Hopping

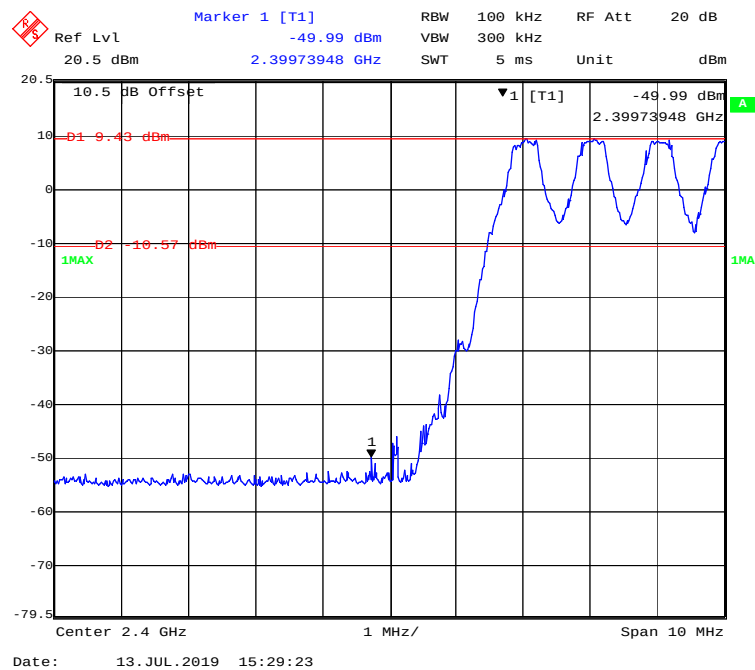


BDR (GFSK): Right Side- Hopping

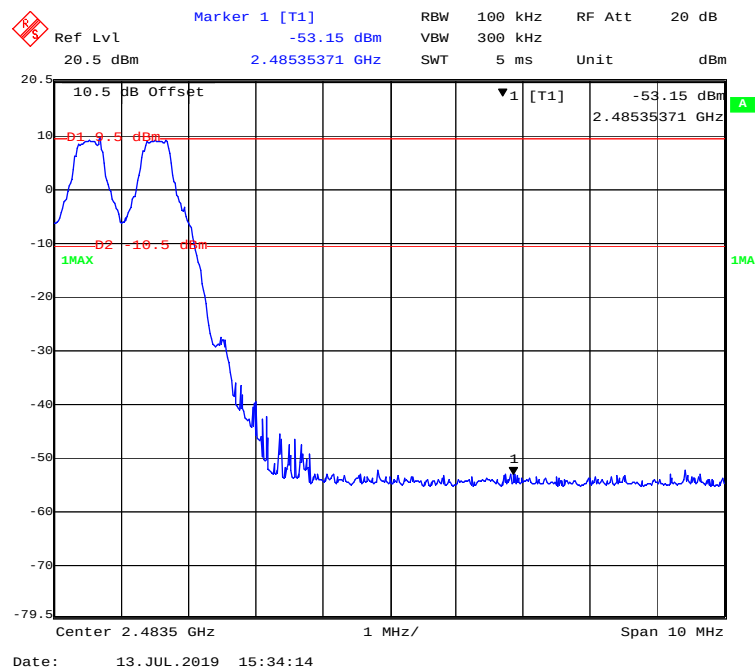


EDR ($\pi/4$ -DQPSK): Left Side- Hopping

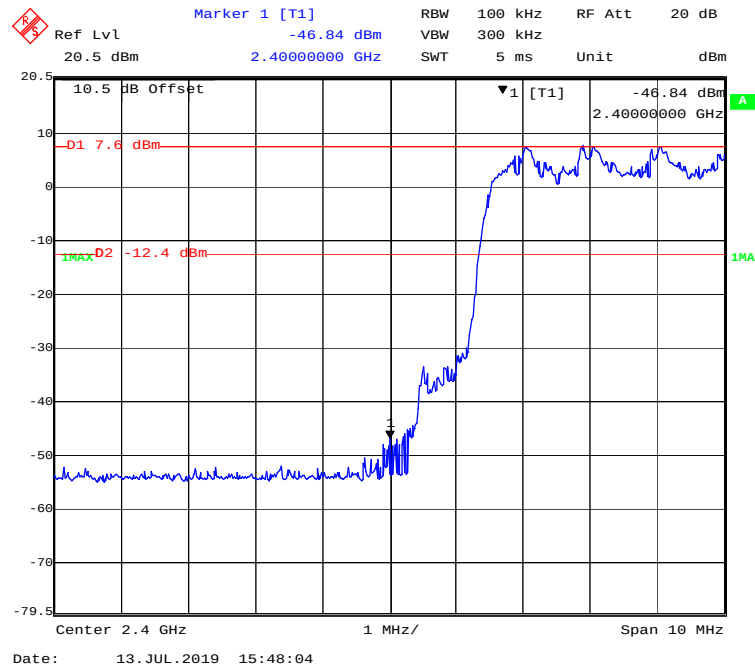


EDR ($\pi/4$ -DQPSK): Right Side- Hopping

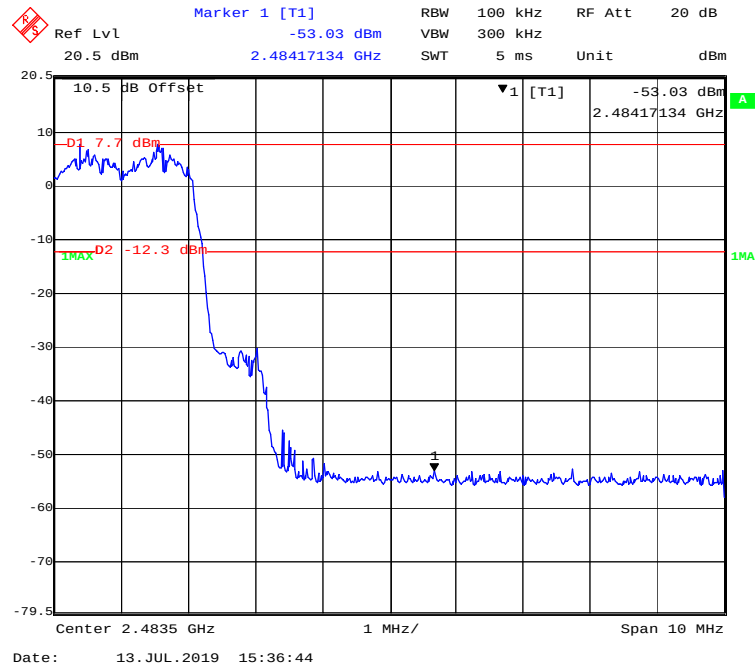

EDR (8DPSK): Left Side- Hopping

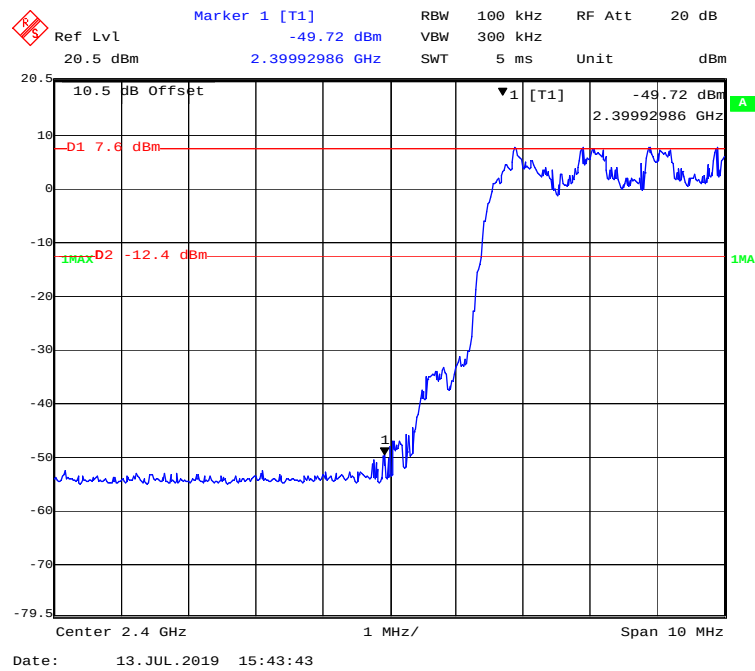

EDR (8DPSK): Right Side- Hopping

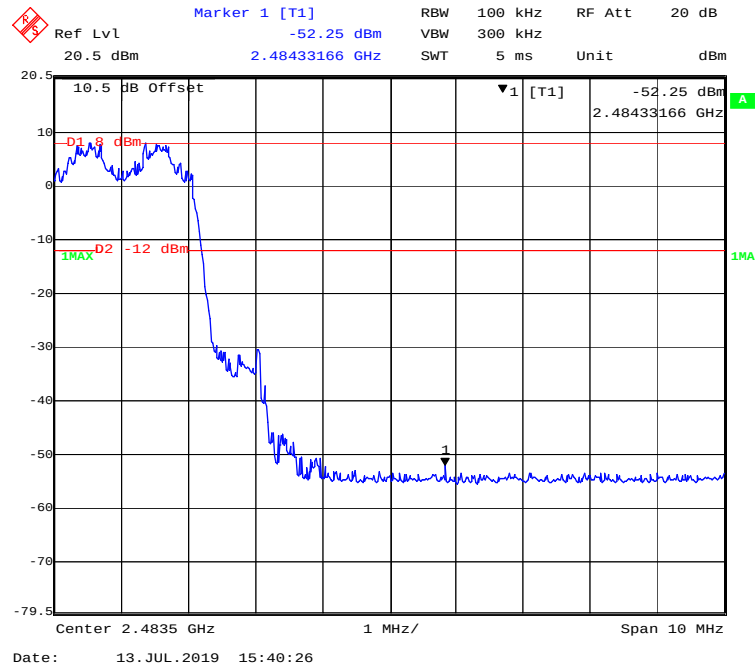

***** END OF REPORT *****