



FCC RADIO TEST REPORT

Applicant : Revlis Biotech Co., Ltd.
Address : 7F., No.108-1, Minquan Rd., Xindian Dist., New Taipei City 23141, Taiwan (R.O.C.)
Equipment : Bluetooth Data transmitter
Model No. : CHI-100
Trade Name : Cmate
FCC ID. : 2APXB-CHI100-107

I HEREBY CERTIFY THAT :

The sample was received on Apr. 09, 2018 and the testing was carried out on Apr. 30, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Tested by:

Mark Liao / Assistant Manager

Spree Yei / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channes	6
2.3 Test Mode & Test Software	7
2.4 Description of Test System	7
2.5 General Information of Test	8
2.6 Measurement Uncertainty	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements	10
4.1 Standard Applicable	10
4.2 Antenna Construction and Directional Gain	10
5. Test of AC Power Line Conducted Emission	11
5.1 Test Limit	11
5.2 Test Procedures	11
5.3 Typical Test Setup	12
5.4 Test Result and Data	13
5.5 Test Photographs	15
6. Test of Radiated Spurious Emission	16
6.1 Test Limit	16
6.2 Test Procedures	16
6.3 Typical Test Setup	17
6.4 Test Result and Data (9kHz ~ 30MHz)	18
6.5 Test Result and Data (30MHz ~ 1GHz)	18
6.6 Test Result and Data (1GHz ~ 25GHz)	20
6.7 Restricted Bands of Operation	32
6.8 Test Photographs (30MHz ~ 1GHz)	33
6.9 Test Photographs (1GHz ~ 25GHz)	34
7. Test of Conducted Spurious Emission	35
7.1 Test Limit	35
7.2 Test Procedure	35
7.3 Test Setup Layout	35
7.4 Test Result and Data	35
8. 20dB Bandwidth Measurement Data	43
8.1 Test Limit	43
8.2 Test Procedures	43
8.3 Test Setup Layout	43
8.4 Test Result and Data	43
9. Frequencies Separation	46
9.1 Test Limit	46
9.2 Test Procedures	46



- 9.3 Test Setup Layout 46
- 9.4 Test Result and Data 46
- 10. Dwell Time on each channel 49**
 - 10.1 Test Limit 49
 - 10.2 Test Procedures 49
 - 10.3 Test Setup Layout 49
 - 10.4 Test Result and Data 49
- 11. Number of Hopping Channels 52**
 - 11.1 Test Limit 52
 - 11.2 Test Procedures 52
 - 11.3 Test Setup Layout 52
 - 11.4 Test Result and Data 52
- 12. Maximum Peak Output Power 54**
 - 12.1 Test Limit 54
 - 12.2 Test Procedures 54
 - 12.3 Test Setup Layout 54
 - 12.4 Test Result and Data 55
- 13. Radio Frequency Exposure 56**
 - 13.1 EUT Specification 56



History of this test report

Report No.	Issue Date	Description
TEFB1803309	May. 14, 2018	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. AC Power Line Conducted Emission	Pass
15.209 15.205	. Radiated Spurious Emission	Pass
15.247(d)	. Conducted Spurious Emission	Pass
15.247(a)(1)	. Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	. 20dB Bandwidth	Pass
15.247(a)(1)	. Dwell Time	Pass
15.247(b)	. Number of Hopping Channels	Pass
15.247(b)	. Peak Output Power Measurement Data	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	2402-2480 MHz
Type of Modulation	BT: GFSK for 1Mbps $\pi/4$ -DQPSK for 2Mbps 8DPSK for 3Mbps BLE: GFSK for 1Mbps
Antenna Type	PIFA Antenna
Antenna Gain	1.96dBi

2.2 Carrier Frequency of Channes

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode & Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "ISRT:V2.1.26.4422" under WIN 8 was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:

Test Mode	Operating Description
1	GFSK (1Mbps)
2	$\pi/4$ -DQPSK (2Mbps)
3	8DPSK (3Mbps)

For radiation test (below 1GHz) & AC Power Line Conducted Emission, caused "Test Mode 1" generated the worst case, it was reported as the final data.
For radiation test (above 1GHz), caused "Test Mode 1, 3" generated the worst case, they were reported as the final data.
For Maximum Peak Output Power, caused "Test Mode 1, 2, 3" generated the worst case, they were reported as the final data.

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	ASUS	P2430U	Power Cable, Non-shielded, 1.8m



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4218, R-4399 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±5.007dB
Radiated Spurious Emission(30MHz~1GHz)	±5.157dB
Radiated Spurious Emission(1GHz~18GHz)	±6.383dB
Radiated Spurious Emission(18GHz~40GHz)	±6.648dB
Conducted Spurious Emission	±1.253dB
6dB Bandwidth	±6.89%
Power Spectral Density	±0.630dB
26 dB Occupied Bandwidth	±6.10%
Frequency Stability	±375KHz
Channel Frequencies Separation	±6.10%
20dB Bandwidth	±6.12%
Dwell Time	±1.34%
Peak Output Power(Conducted Power Meter)	±0.86dB
Temperature	±1.2oC
Humidity	±2.7%
Channel Move Time	±4.53%
Channel Closing Transmission Time	±6.61%
Threshold	±0.631dB
Non occupancy period	±1.17%



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100821	2017/09/08	2018/09/07
LISN	Schwarzbeck	NSLK 8127	8127-568	2018/02/26	2019/02/25
Pulse Limiter	R&S	ESH3-Z2	101934	2018/02/22	2019/02/21
Bilog Antenna	Schwarzbeck	VULB9168	275	2017/08/31	2018/08/30
Active Loop Antenna	EMCO	6507	40855	2017/05/15	2018/05/14
Horn Antenna	EMCO	3115	31601	2017/09/11	2018/09/10
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
Preamplifier	EM	EM330	60658	2017/09/08	2018/09/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2017/09/20	2018/09/19
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
Spectrum Analyzer	R&S	FSP40	100219	2017/07/01	2018/06/30
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2017/09/04	2018/09/03
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2017/09/04	2018/09/03
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Chip Antenna
Antenna Gain	1.63 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

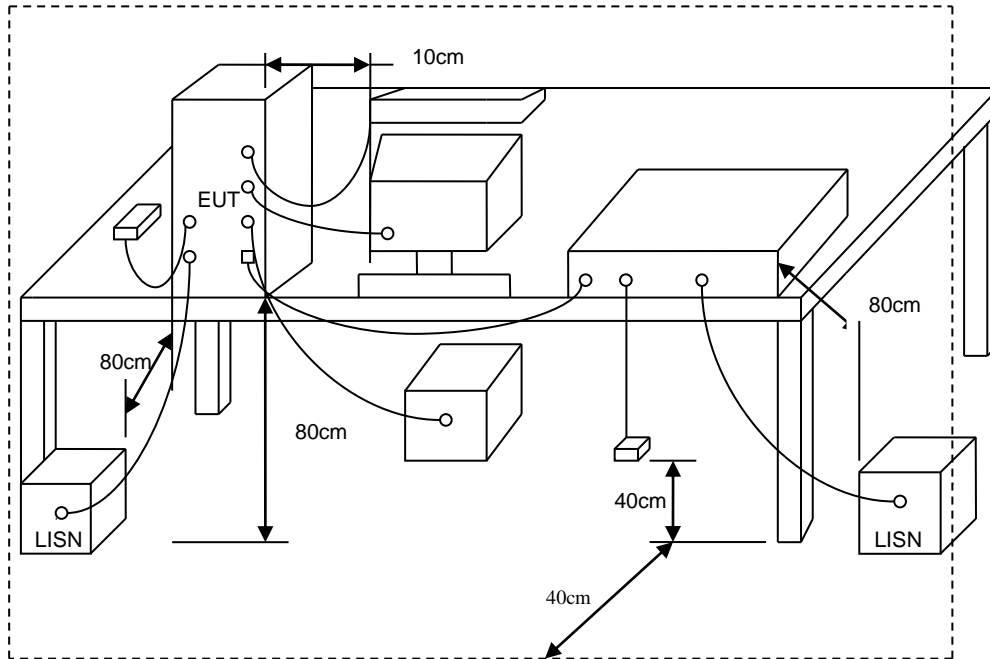



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1	Temperature	: 20 °C
Test date	: Apr. 30, 2018	Humidity	: 40 %

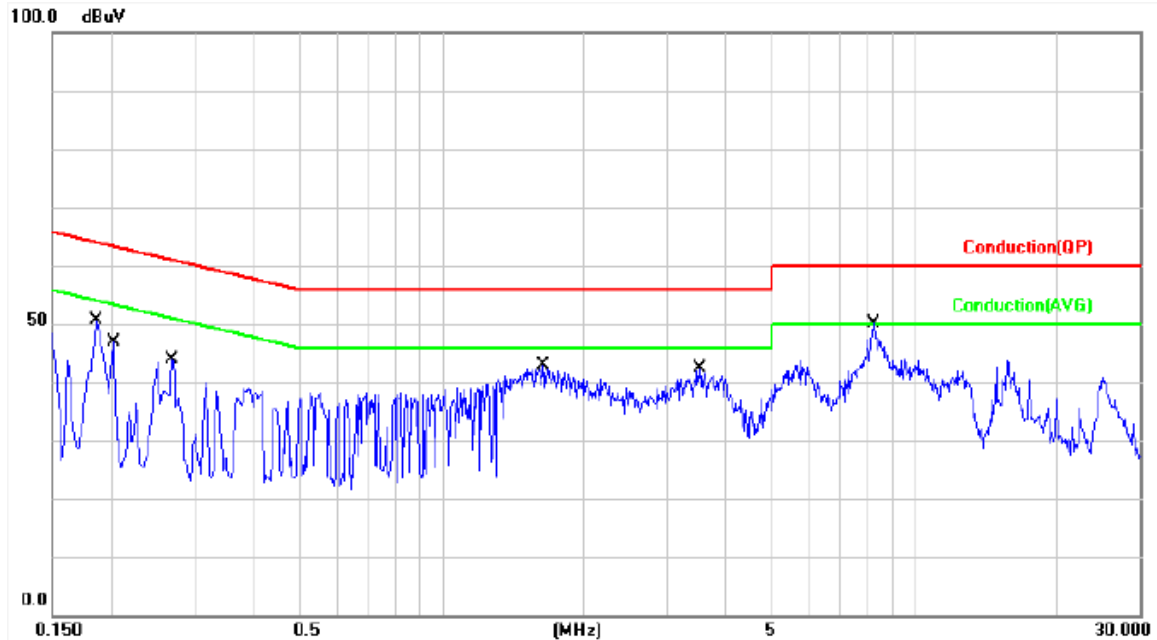


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1860	9.94	38.73	48.67	64.21	-15.54	QP	P
2	0.1860	9.94	22.92	32.86	54.21	-21.35	AVG	P
3	0.2020	9.94	36.63	46.57	63.52	-16.95	QP	P
4	0.2020	9.94	23.41	33.35	53.52	-20.17	AVG	P
5	0.2700	9.94	31.03	40.97	61.12	-20.15	QP	P
6	0.2700	9.94	19.61	29.55	51.12	-21.57	AVG	P
7	1.6380	10.04	29.63	39.67	56.00	-16.33	QP	P
8	1.6380	10.04	17.57	27.61	46.00	-18.39	AVG	P
9	3.5220	10.12	27.81	37.93	56.00	-18.07	QP	P
10	3.5220	10.12	16.27	26.39	46.00	-19.61	AVG	P
11	8.2260	10.26	32.84	43.10	60.00	-16.90	QP	P
12	8.2260	10.26	23.15	33.41	50.00	-16.59	AVG	P

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1	Temperature	: 20 °C
Test date	: Apr. 30, 2018	Humidity	: 40 %

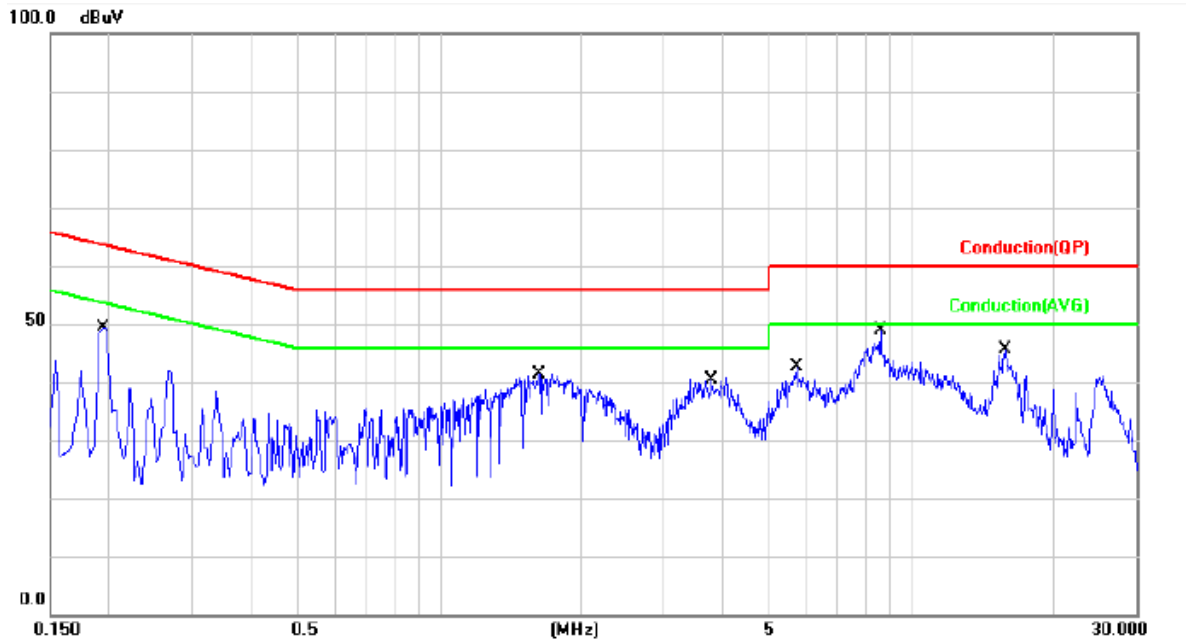

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	9.94	37.02	46.96	63.86	-16.90	QP	P
2	0.1940	9.94	22.30	32.24	53.86	-21.62	AVG	P
3	1.6300	10.04	28.72	38.76	56.00	-17.24	QP	P
4	1.6300	10.04	16.65	26.69	46.00	-19.31	AVG	P
5	3.7740	10.13	26.85	36.98	56.00	-19.02	QP	P
6	3.7740	10.13	15.12	25.25	46.00	-20.75	AVG	P
7	5.7180	10.19	26.97	37.16	60.00	-22.84	QP	P
8	5.7180	10.19	15.57	25.76	50.00	-24.24	AVG	P
9	8.6220	10.28	31.17	41.45	60.00	-18.55	QP	P
10	8.6220	10.28	21.61	31.89	50.00	-18.11	AVG	P
11	15.8180	10.46	33.84	44.30	60.00	-15.70	QP	P
12	15.8180	10.46	30.56	41.02	50.00	-8.98	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit
Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



6. Test of Radiated Spurious Emission

6.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2014. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V / M)
30-230	10	30
230-1000	10	37


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




6.3 Typical Test Setup


Below 30MHz test setup

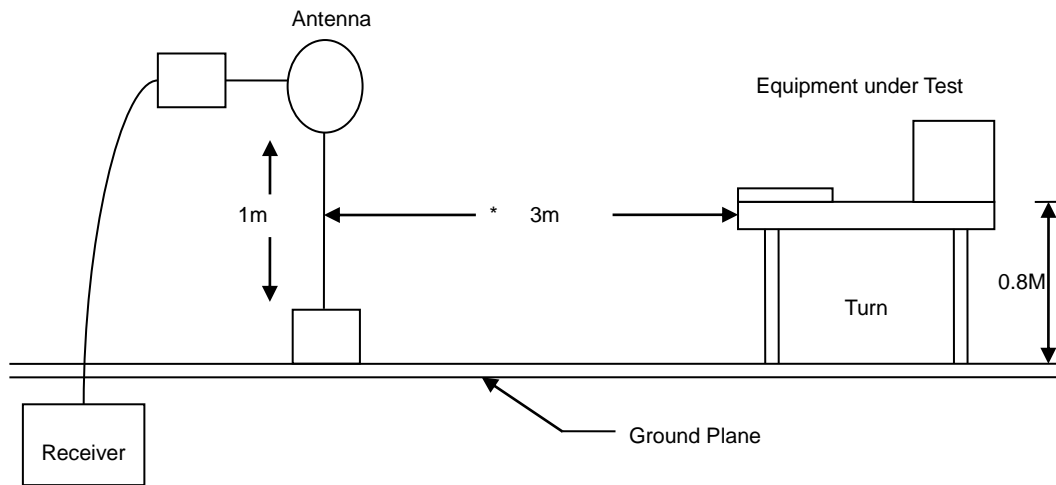

30MHz- 1GHz Test Setup

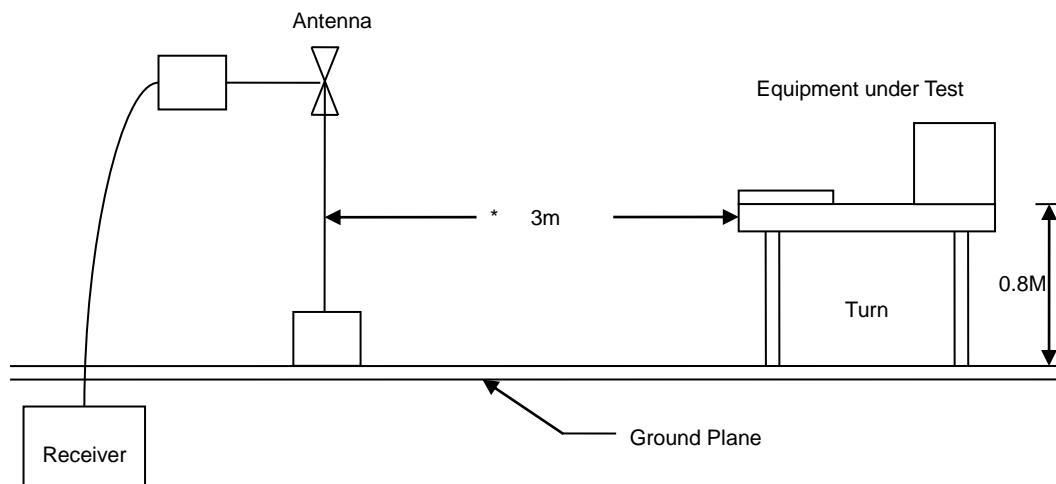

Above 1GHz Test Setup

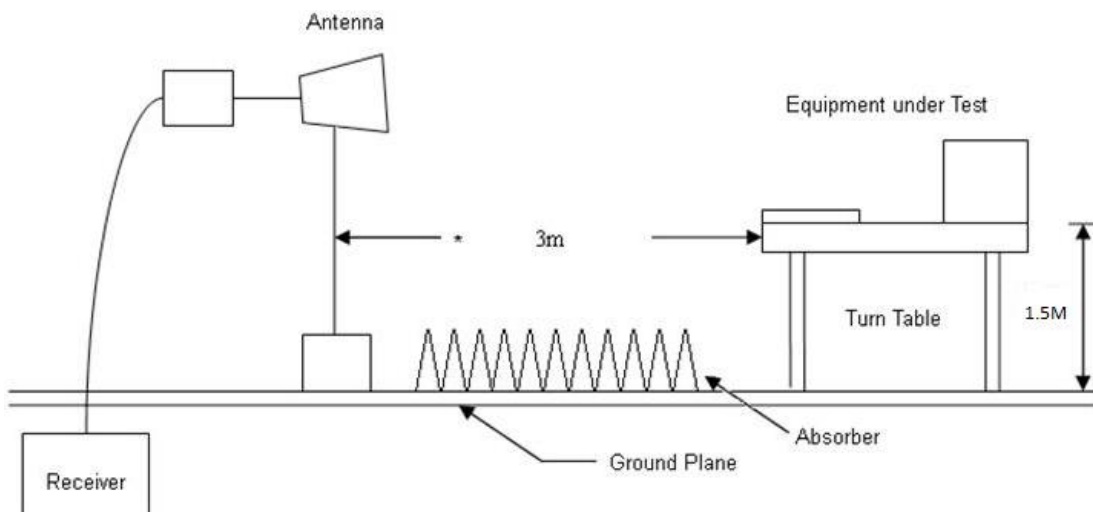




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 21 °C
Test Date	: Apr. 30, 2018	Humidity	: 65 %

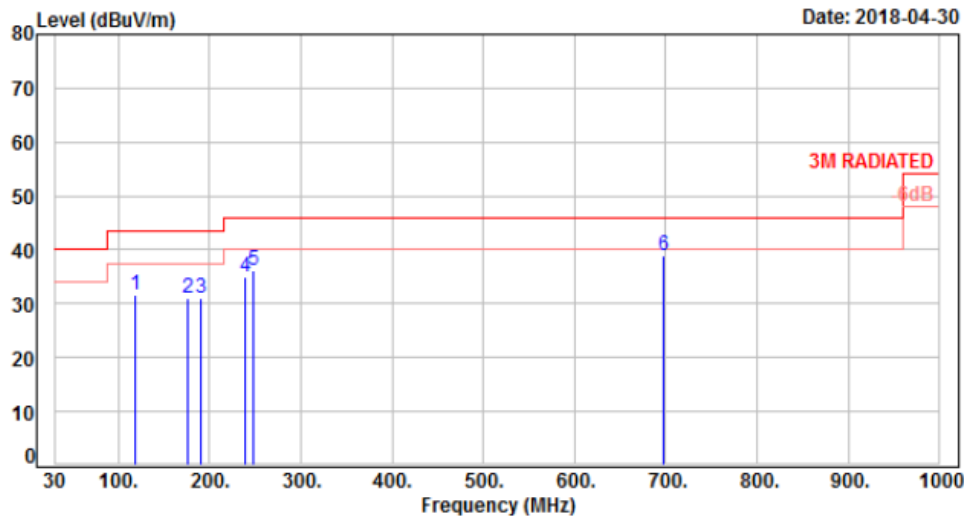


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	119.24	-13.21	45.00	31.79	43.50	-11.71	Peak	100	0	P
2	175.50	-11.64	42.71	31.07	43.50	-12.43	Peak	100	0	P
3	191.02	-13.13	44.09	30.96	43.50	-12.54	Peak	100	0	P
4	239.52	-12.00	46.97	34.97	46.00	-11.03	Peak	100	0	P
5	247.28	-11.73	48.04	36.31	46.00	-9.69	Peak	100	0	P
6	697.36	-1.45	40.31	38.86	46.00	-7.14	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 21 °C
Test Date	: Apr. 30, 2018	Humidity	: 65 %

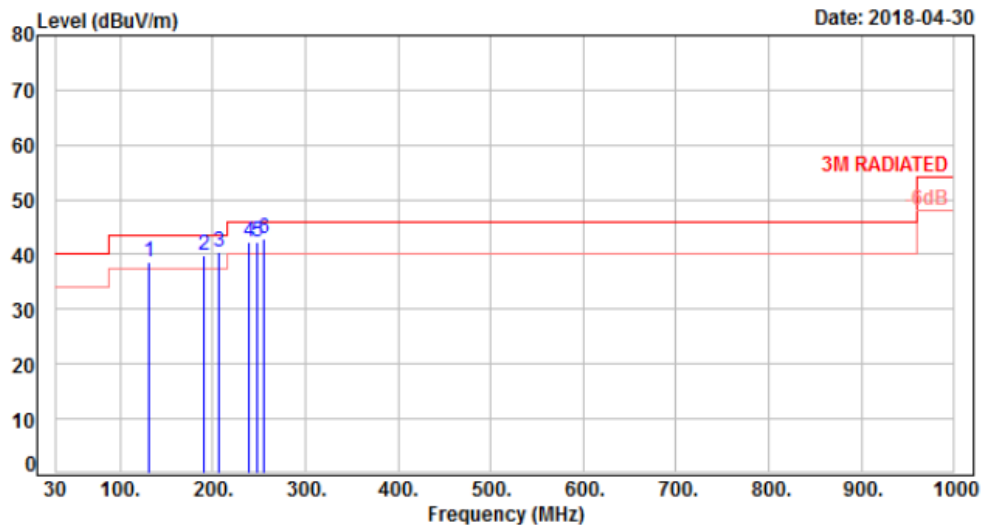


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	130.88	-12.15	50.68	38.53	43.50	-4.97	Peak	100	0	P
2	191.02	-13.13	52.96	39.83	43.50	-3.67	QP	100	161	P
3	206.54	-13.43	53.88	40.45	43.50	-3.05	QP	100	159	P
4	239.52	-12.00	54.29	42.29	46.00	-3.71	QP	100	152	P
5	247.28	-11.73	53.99	42.26	46.00	-3.74	QP	100	158	P
6	255.04	-11.47	54.39	42.92	46.00	-3.08	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

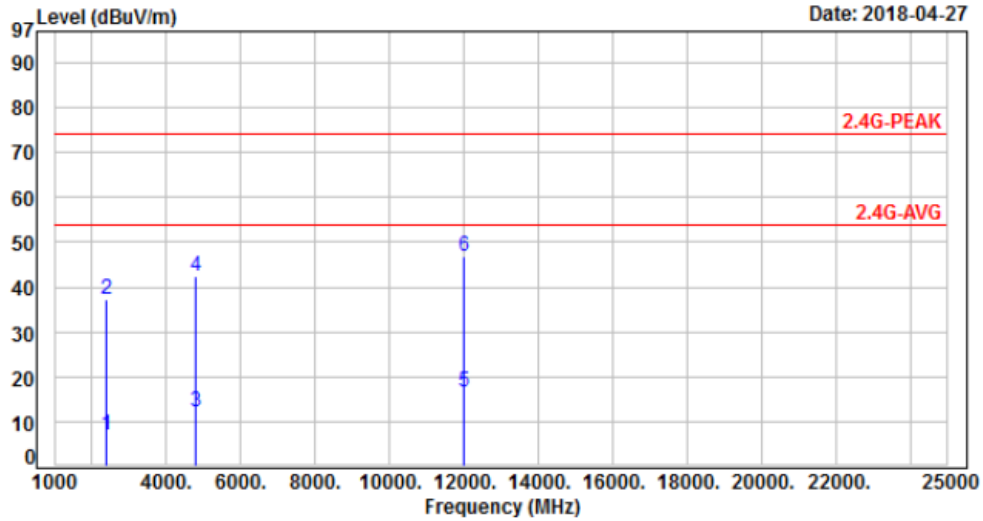


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.00	-15.97	23.00	7.03	54.00	-46.97	Average	328	50	P
2	2386.00	-15.97	53.10	37.13	74.00	-36.87	Peak	328	50	P
3	4804.00	-8.87	21.10	12.23	54.00	-41.77	Average	342	193	P
4	4804.00	-8.87	51.20	42.33	74.00	-31.67	Peak	342	193	P
5	12010.00	1.17	15.60	16.77	54.00	-37.23	Average	100	223	P
6	12010.00	1.17	45.70	46.87	74.00	-27.13	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

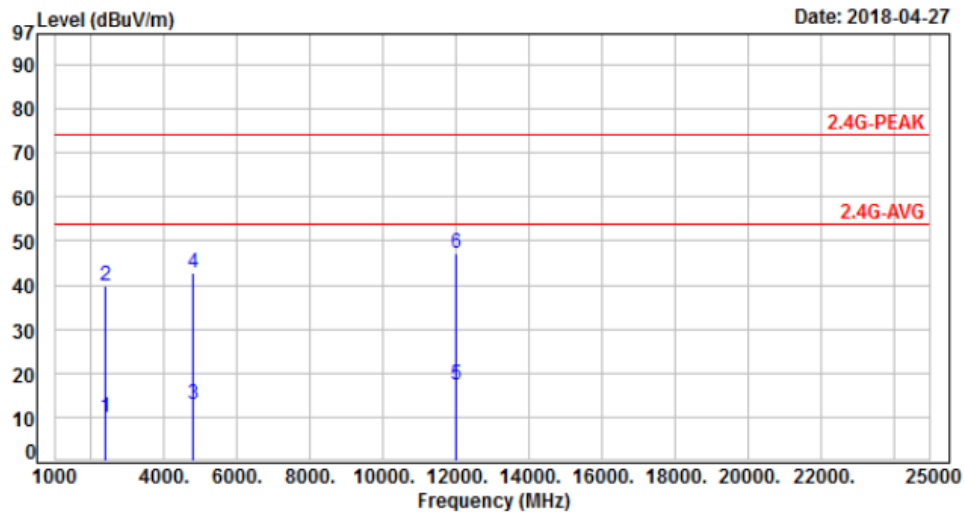


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.00	-15.97	25.80	9.83	54.00	-44.17	Average	100	280	P
2	2386.00	-15.97	55.90	39.93	74.00	-34.07	Peak	100	280	P
3	4804.00	-8.87	21.70	12.83	54.00	-41.17	Average	100	165	P
4	4804.00	-8.87	51.80	42.93	74.00	-31.07	Peak	100	165	P
5	12010.00	1.17	16.10	17.27	54.00	-36.73	Average	100	57	P
6	12010.00	1.17	46.20	47.37	74.00	-26.63	Peak	100	57	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH39	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

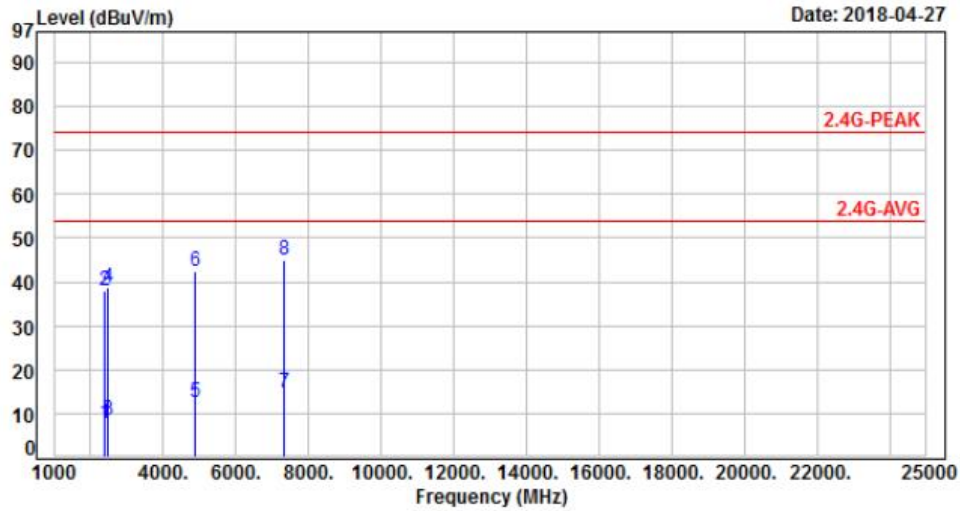


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	23.81	7.85	54.00	-46.15	Average	360	54	P
2	2390.00	-15.96	53.91	37.95	74.00	-36.05	Peak	360	54	P
3	2483.50	-15.65	24.10	8.45	54.00	-45.55	Average	360	54	P
4	2483.50	-15.65	54.20	38.55	74.00	-35.45	Peak	360	54	P
5	4882.00	-8.63	21.10	12.47	54.00	-41.53	Average	100	219	P
6	4882.00	-8.63	51.20	42.57	74.00	-31.43	Peak	100	219	P
7	7323.00	-4.66	19.40	14.74	54.00	-39.26	Average	105	71	P
8	7323.00	-4.66	49.50	44.84	74.00	-29.16	Peak	105	71	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

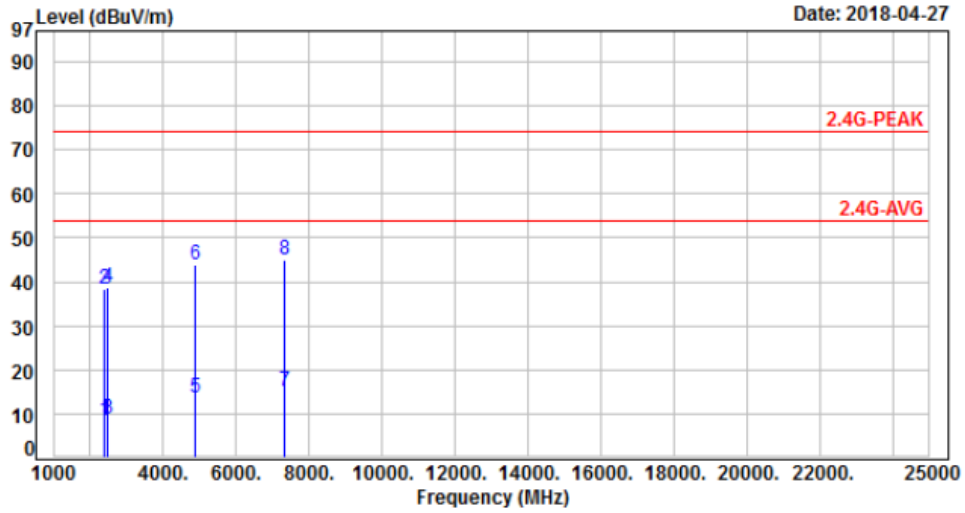


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	24.31	8.35	54.00	-45.65	Average	100	220	P
2	2390.00	-15.96	54.41	38.45	74.00	-35.55	Peak	100	220	P
3	2483.50	-15.65	24.40	8.75	54.00	-45.25	Average	100	220	P
4	2483.50	-15.65	54.50	38.85	74.00	-35.15	Peak	100	220	P
5	4882.00	-8.63	22.40	13.77	54.00	-40.23	Average	100	276	P
6	4882.00	-8.63	52.50	43.87	74.00	-30.13	Peak	100	276	P
7	7323.00	-4.66	19.70	15.04	54.00	-38.96	Average	107	118	P
8	7323.00	-4.66	49.80	45.14	74.00	-28.86	Peak	107	118	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH78	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

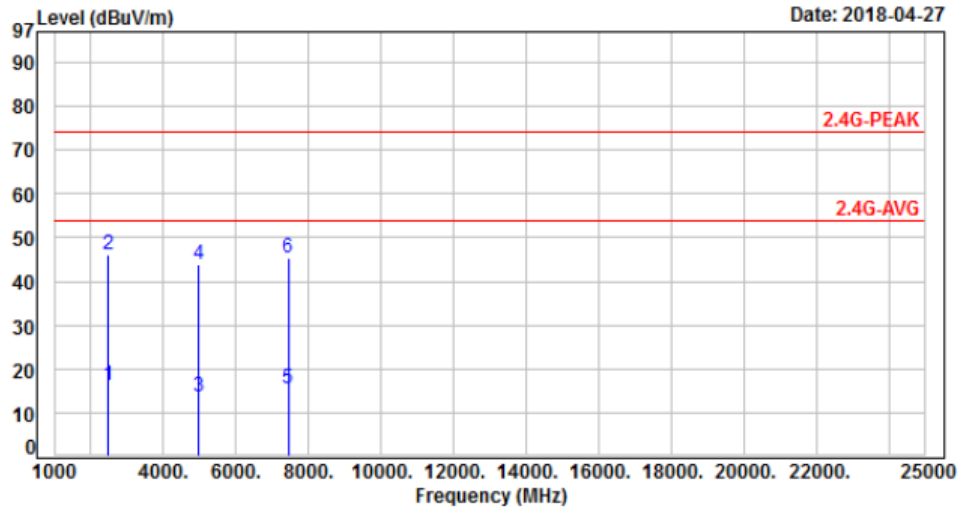


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.65	31.80	16.15	54.00	-37.85	Average	100	98	P
2	2483.50	-15.65	61.90	46.25	74.00	-27.75	Peak	100	98	P
3	4960.00	-8.38	22.00	13.62	54.00	-40.38	Average	107	122	P
4	4960.00	-8.38	52.10	43.72	74.00	-30.28	Peak	107	122	P
5	7440.00	-4.33	19.75	15.42	54.00	-38.58	Average	107	122	P
6	7440.00	-4.33	49.85	45.52	74.00	-28.48	Peak	107	122	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH78	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

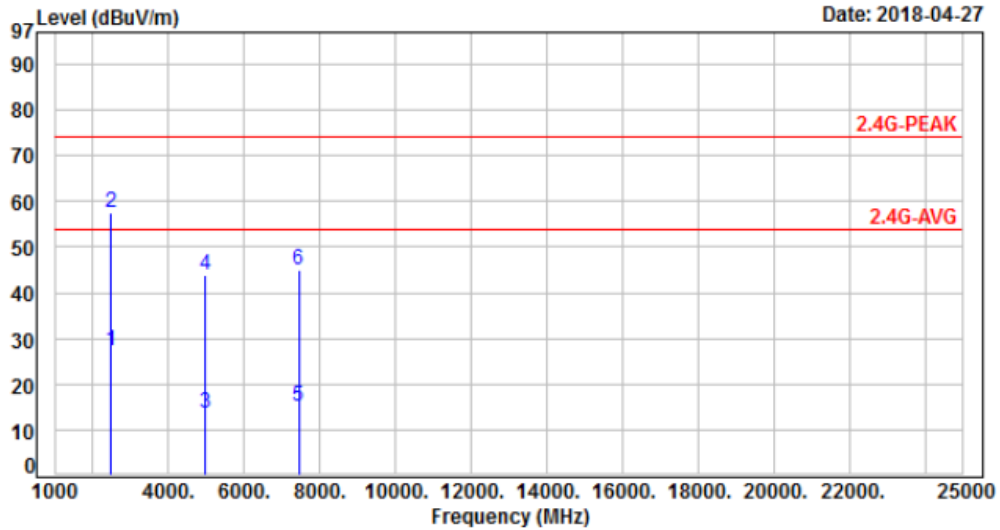


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.65	43.03	27.38	54.00	-26.62	Average	100	270	P
2	2483.50	-15.65	73.13	57.48	74.00	-16.52	Peak	100	270	P
3	4960.00	-8.38	22.00	13.62	54.00	-40.38	Average	105	275	P
4	4960.00	-8.38	52.10	43.72	74.00	-30.28	Peak	105	275	P
5	7440.00	-4.33	19.40	15.07	54.00	-38.93	Average	100	211	P
6	7440.00	-4.33	49.50	45.17	74.00	-28.83	Peak	100	211	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH00	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

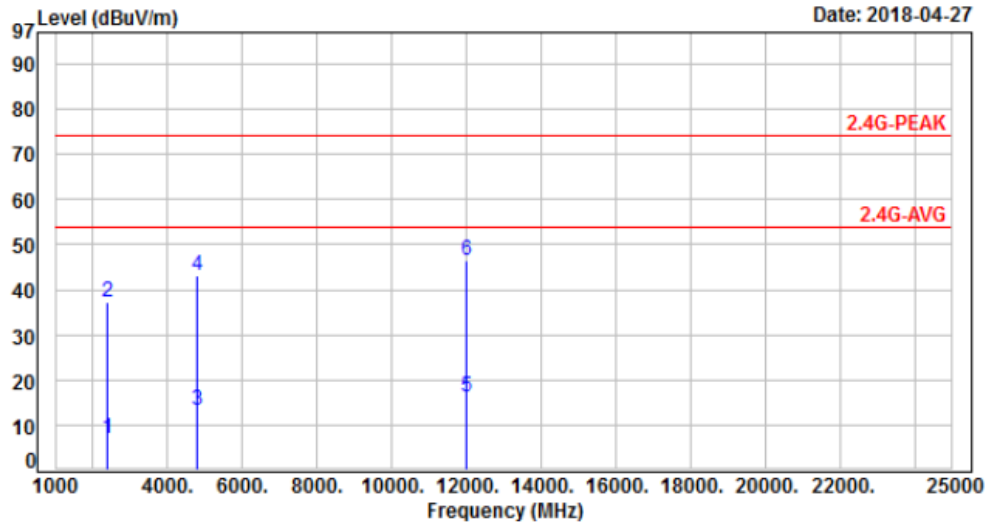


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.00	-15.97	23.13	7.16	54.00	-46.84	Average	105	102	P
2	2386.00	-15.97	53.23	37.26	74.00	-36.74	Peak	105	102	P
3	4804.00	-8.87	22.10	13.23	54.00	-40.77	Average	222	220	P
4	4804.00	-8.87	52.20	43.33	74.00	-30.67	Peak	222	220	P
5	12010.00	1.17	15.23	16.40	54.00	-37.60	Average	100	88	P
6	12010.00	1.17	45.33	46.50	74.00	-27.50	Peak	100	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH00	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

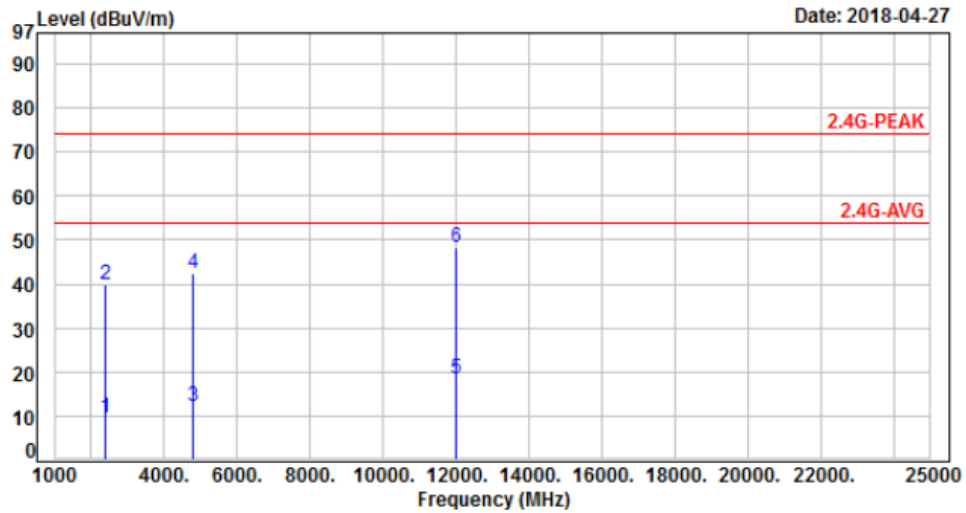


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2386.00	-15.97	25.60	9.63	54.00	-44.37	Average	175	270	P
2	2386.00	-15.97	55.70	39.73	74.00	-34.27	Peak	175	270	P
3	4804.00	-8.87	21.12	12.25	54.00	-41.75	Average	100	170	P
4	4804.00	-8.87	51.22	42.35	74.00	-31.65	Peak	100	170	P
5	12010.00	1.17	17.15	18.32	54.00	-35.68	Average	102	112	P
6	12010.00	1.17	47.25	48.42	74.00	-25.58	Peak	102	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH39	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

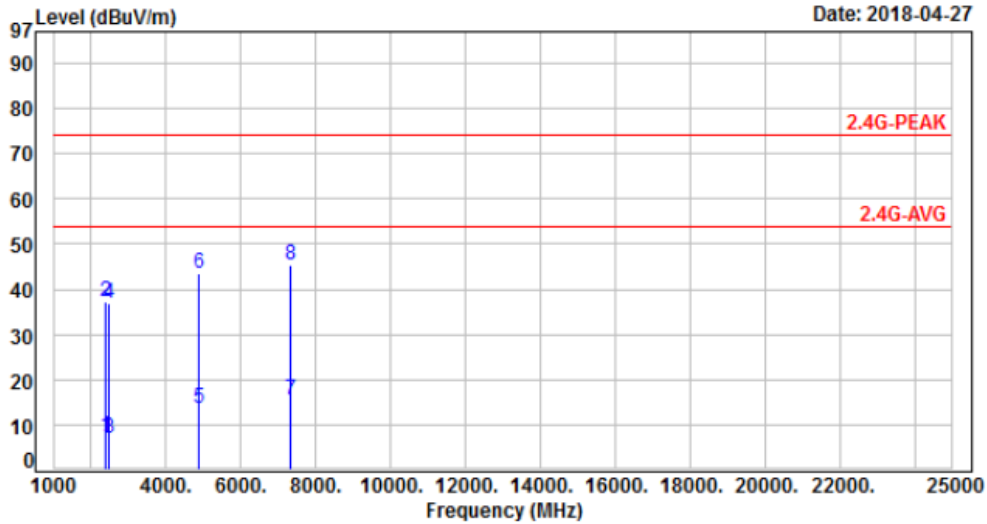


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	23.24	7.28	54.00	-46.72	Average	400	58	P
2	2390.00	-15.96	53.34	37.38	74.00	-36.62	Peak	400	58	P
3	2483.50	-15.65	22.60	6.95	54.00	-47.05	Average	400	58	P
4	2483.50	-15.65	52.70	37.05	74.00	-36.95	Peak	400	58	P
5	4882.00	-8.63	22.23	13.60	54.00	-40.40	Average	100	220	P
6	4882.00	-8.63	52.33	43.70	74.00	-30.30	Peak	100	220	P
7	7323.00	-4.66	20.00	15.34	54.00	-38.66	Average	100	88	P
8	7323.00	-4.66	50.10	45.44	74.00	-28.56	Peak	100	88	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH39	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

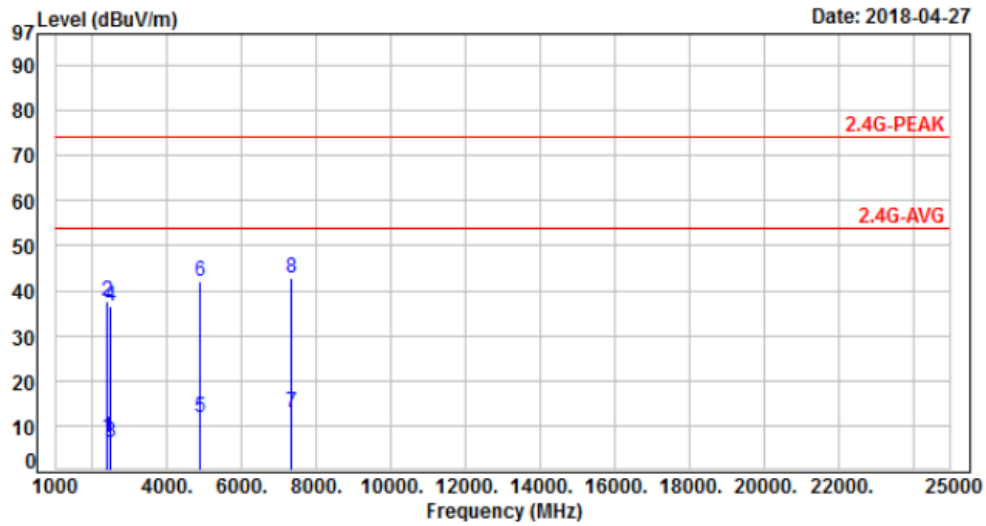


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	23.41	7.45	54.00	-46.55	Average	100	270	P
2	2390.00	-15.96	53.51	37.55	74.00	-36.45	Peak	100	270	P
3	2483.50	-15.65	22.00	6.35	54.00	-47.65	Average	100	270	P
4	2483.50	-15.65	52.10	36.45	74.00	-37.55	Peak	100	270	P
5	4882.00	-8.63	20.40	11.77	54.00	-42.23	Average	100	164	P
6	4882.00	-8.63	50.50	41.87	74.00	-32.13	Peak	100	164	P
7	7323.00	-4.66	17.45	12.79	54.00	-41.21	Average	108	122	P
8	7323.00	-4.66	47.55	42.89	74.00	-31.11	Peak	108	122	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH78	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

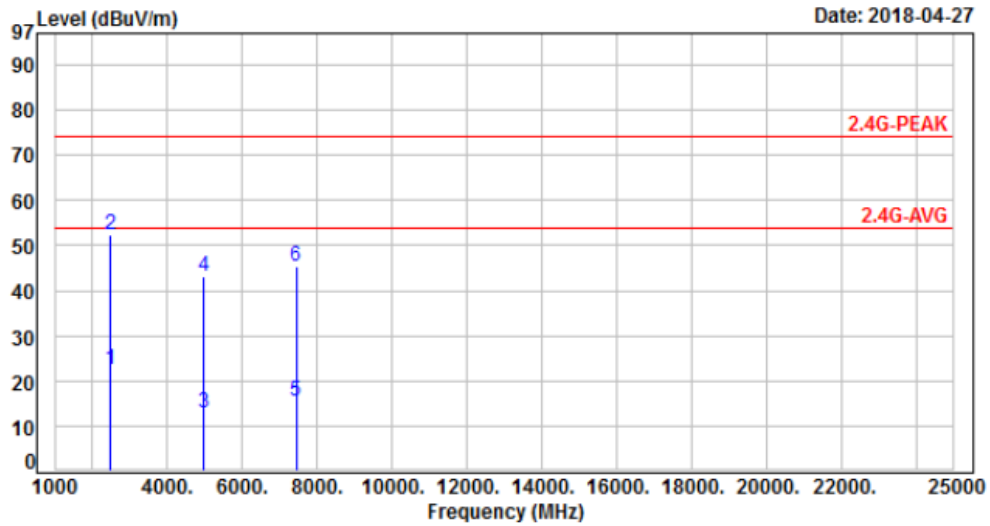


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.65	38.10	22.45	54.00	-31.55	Average	400	185	P
2	2483.50	-15.65	68.20	52.55	74.00	-21.45	Peak	400	185	P
3	4960.00	-8.38	21.40	13.02	54.00	-40.98	Average	100	229	P
4	4960.00	-8.38	51.50	43.12	74.00	-30.88	Peak	100	229	P
5	7440.00	-4.33	19.70	15.37	54.00	-38.63	Average	105	79	P
6	7440.00	-4.33	49.80	45.47	74.00	-28.53	Peak	105	79	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH78	Temperature	: 21 °C
Test Date	: Apr. 27, 2018	Humidity	: 65 %

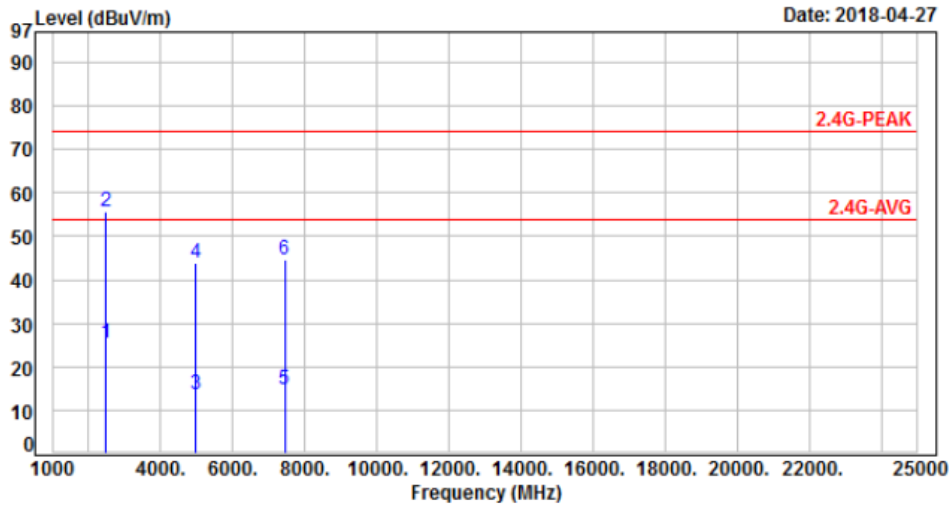

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.65	41.10	25.45	54.00	-28.55	Average	100	270	P
2	2483.50	-15.65	71.20	55.55	74.00	-18.45	Peak	100	270	P
3	4960.00	-8.38	22.12	13.74	54.00	-40.26	Average	100	275	P
4	4960.00	-8.38	52.22	43.84	74.00	-30.16	Peak	100	275	P
5	7440.00	-4.33	19.00	14.67	54.00	-39.33	Average	102	211	P
6	7440.00	-4.33	49.10	44.77	74.00	-29.23	Peak	102	211	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data

Test Result	: PASS	Temperature	: 22°C
Test Date	: Apr. 30, 2018	Humidity	: 63%

Note: Test plots refer to the following pages.




Modulation Type: GFSK, CH00

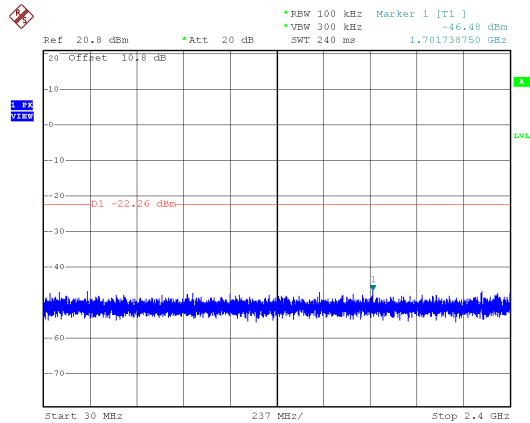


Date: 30.APR.2018 14:27:39


Modulation Type: GFSK, CH39

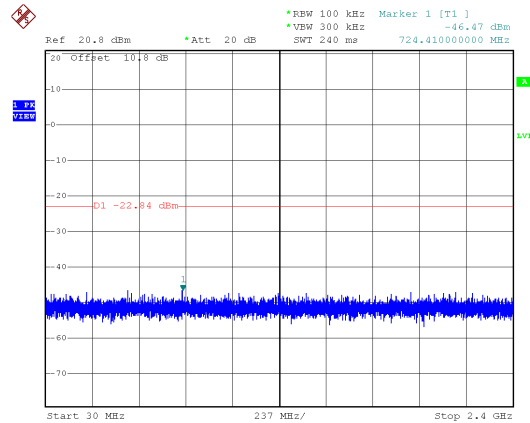


Date: 30.APR.2018 14:29:34

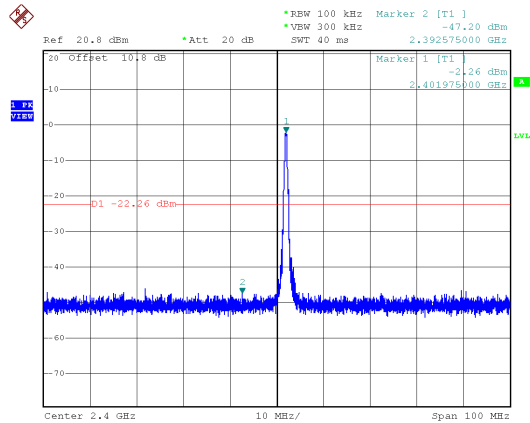


Date: 30.APR.2018 14:27:15

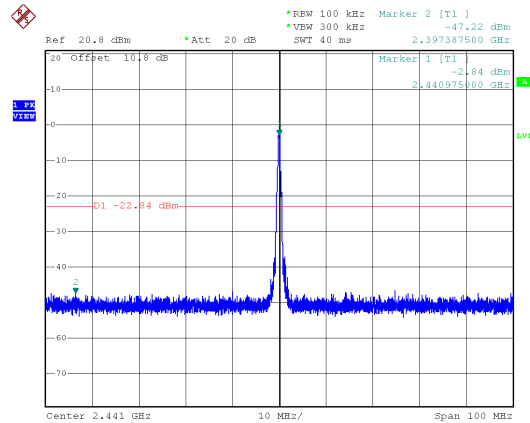

Date: 30.APR.2018 14:29:03

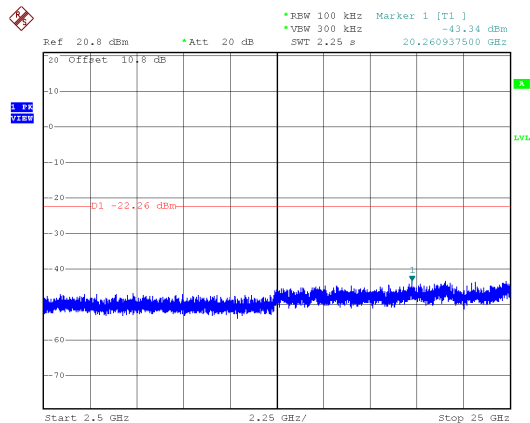


Date: 30.APR.2018 14:28:01

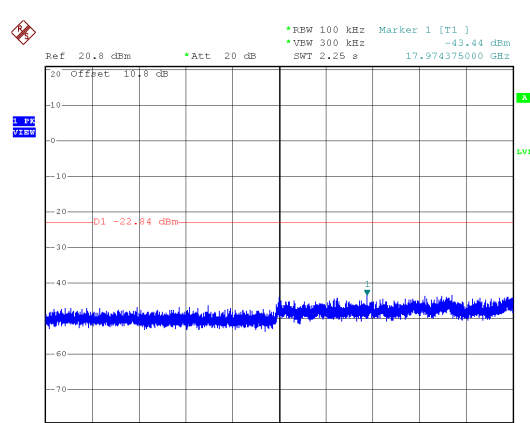

Date: 30.APR.2018 14:29:56




Modulation Type: GFSK, CH78

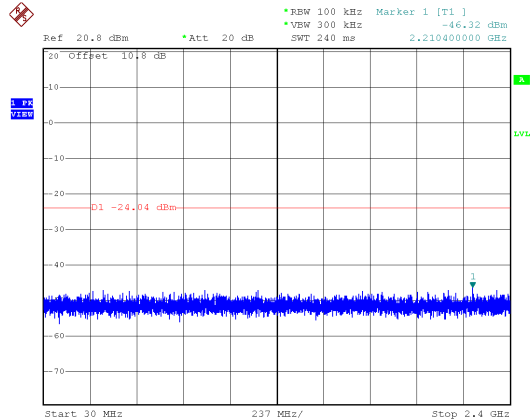


Date: 30.APR.2018 14:32:08


Modulation Type: $\pi/4$ -DQPSK, CH00

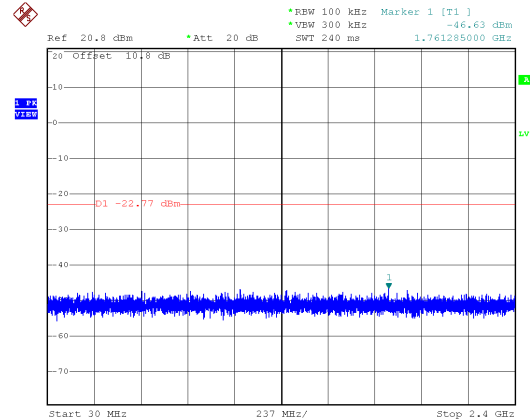


Date: 30.APR.2018 14:34:29

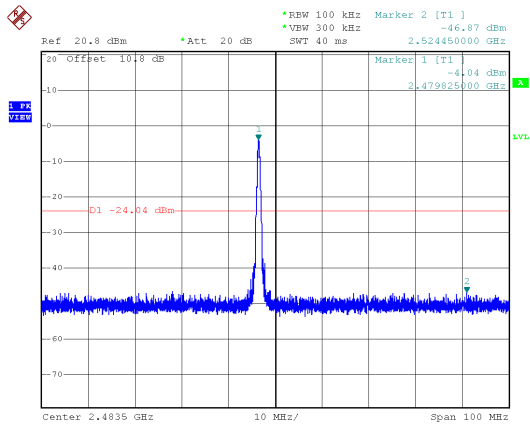


Date: 30.APR.2018 14:31:48

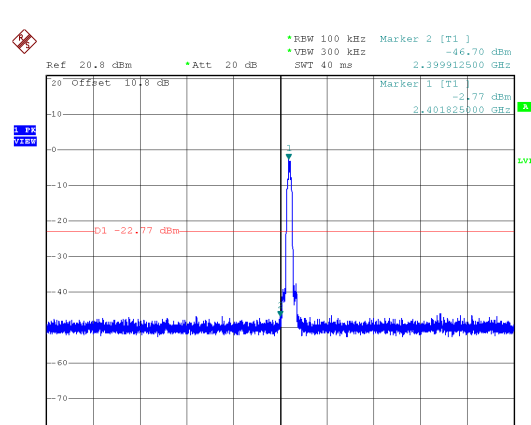

Date: 30.APR.2018 14:33:56

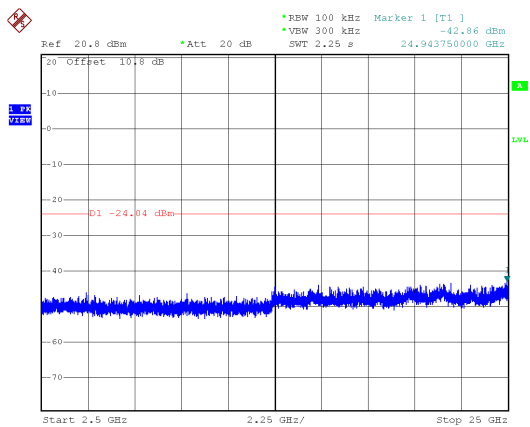


Date: 30.APR.2018 14:32:28

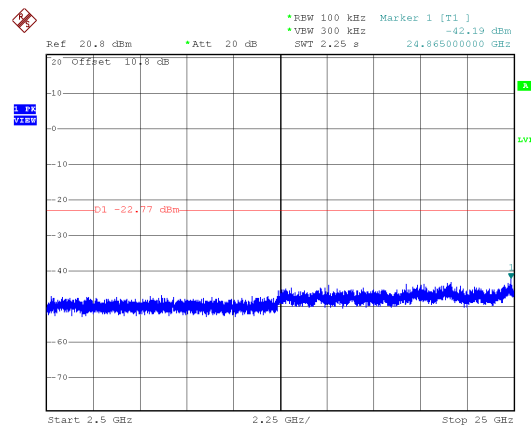

Date: 30.APR.2018 14:34:53




Modulation Type: $\pi/4$ -DQPSK, CH39

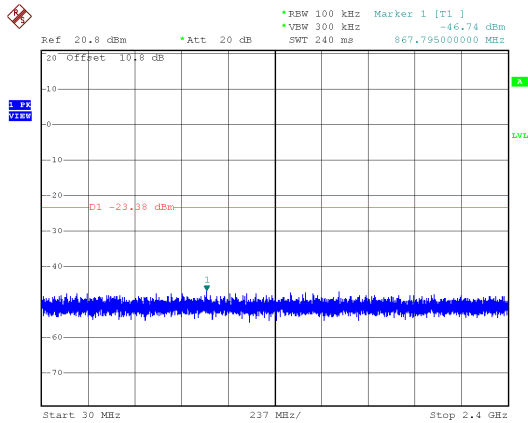


Date: 30.APR.2018 14:36:59


Modulation Type: $\pi/4$ -DQPSK, CH78

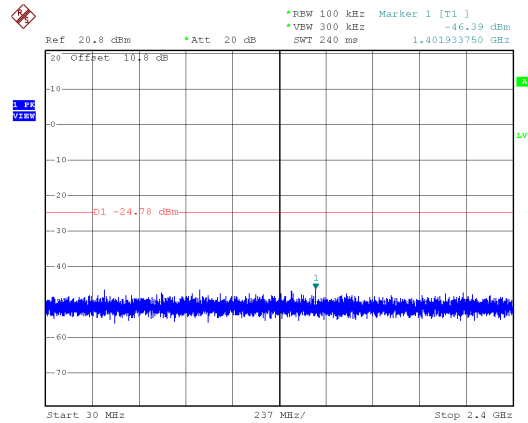


Date: 30.APR.2018 14:38:53

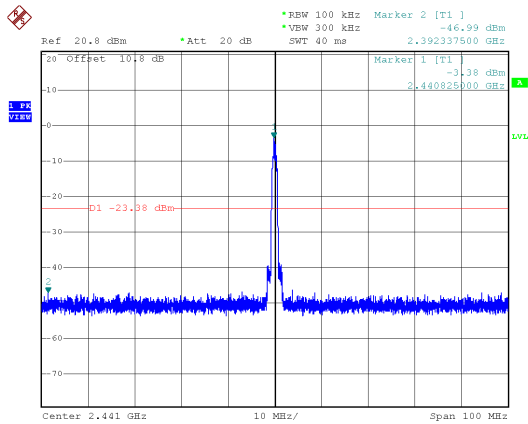


Date: 30.APR.2018 14:36:34

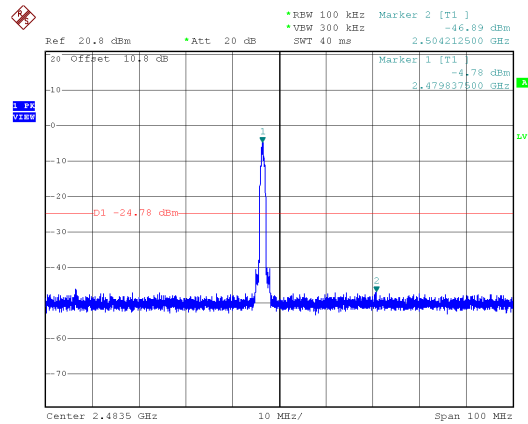

Date: 30.APR.2018 14:38:34

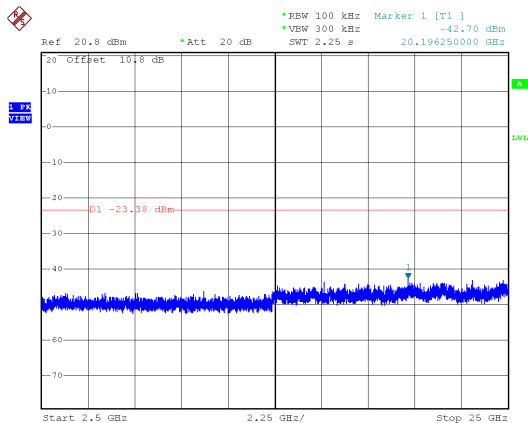


Date: 30.APR.2018 14:37:22

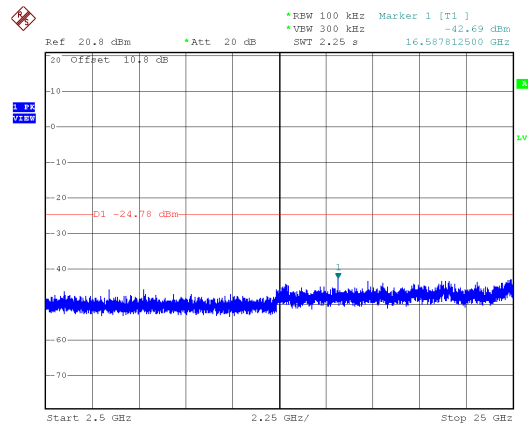

Date: 30.APR.2018 14:39:13




Modulation Type: 8DPSK, CH00

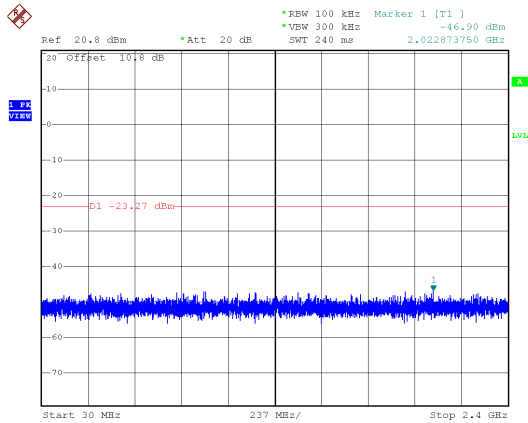


Date: 30.APR.2018 14:41:16


Modulation Type: 8DPSK, CH39

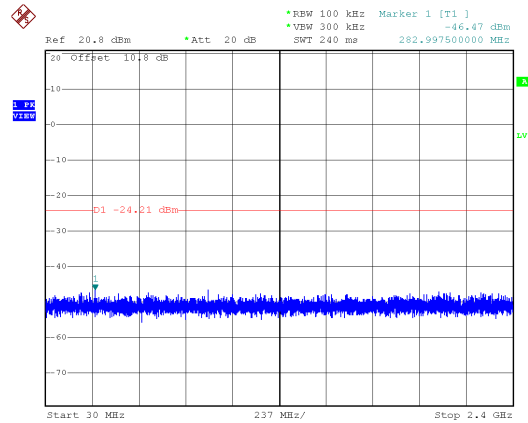


Date: 30.APR.2018 14:42:49

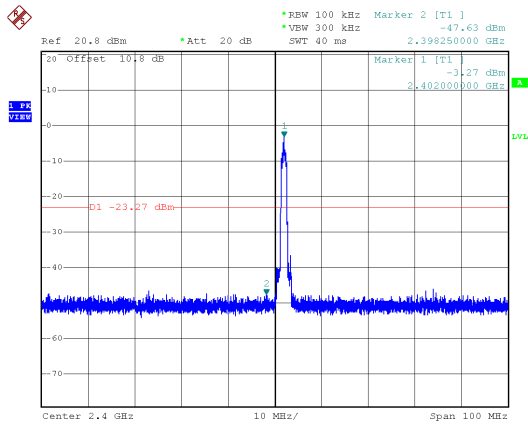


Date: 30.APR.2018 14:40:48

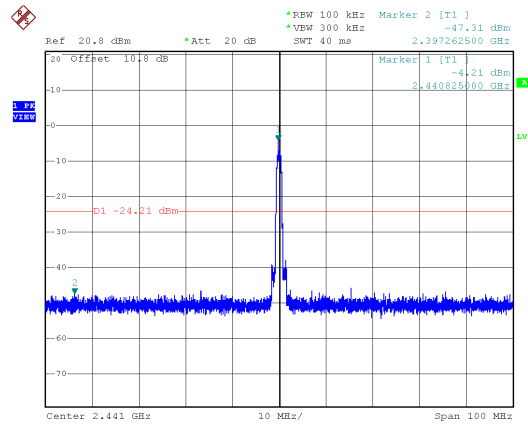

Date: 30.APR.2018 14:42:31

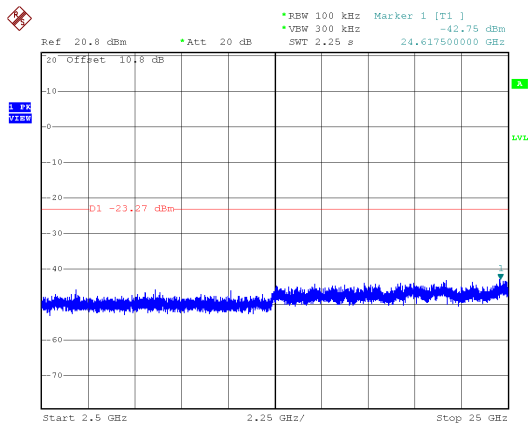


Date: 30.APR.2018 14:41:42

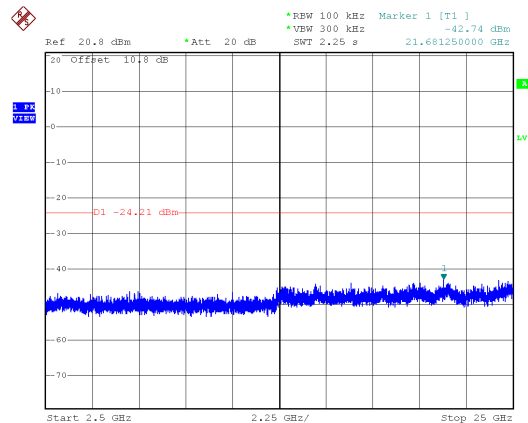


Date: 30.APR.2018 14:43:09




Modulation Type: 8DPSK, CH78

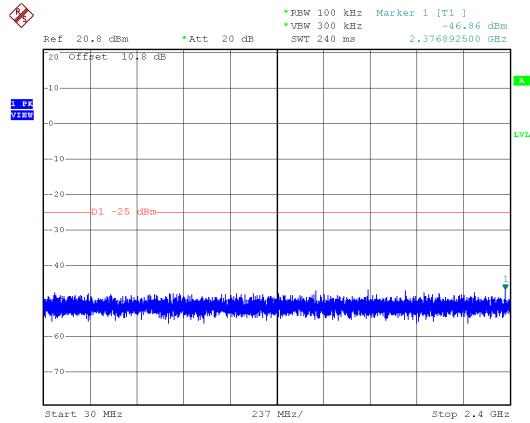

Date: 30.APR.2018 14:45:21

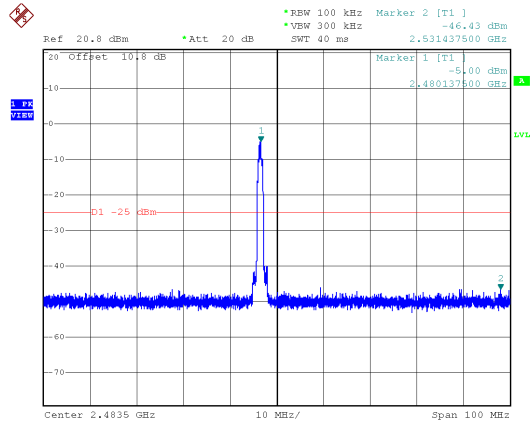

Date: 30.APR.2018 14:45:03

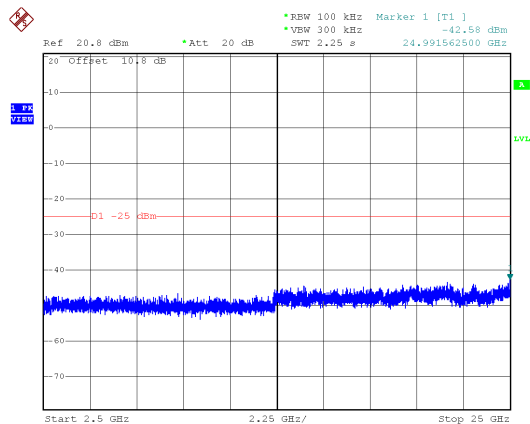


Date: 30.APR.2018 14:45:44




Hopping Mode:
Modulation Type: GFSK


Modulation Type: $\pi/4$ -DQPSK

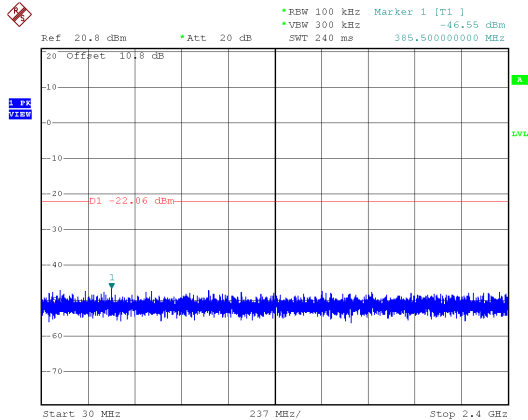


Date: 30.APR.2018 14:52:42

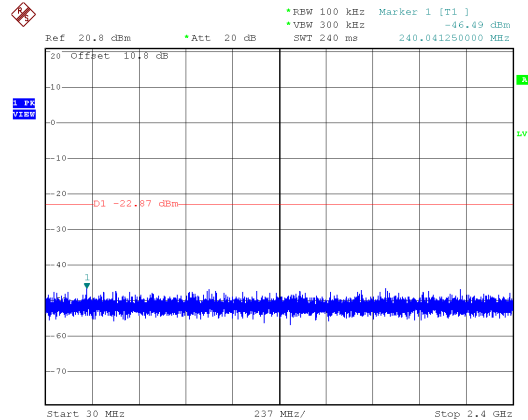


Date: 30.APR.2018 14:58:33

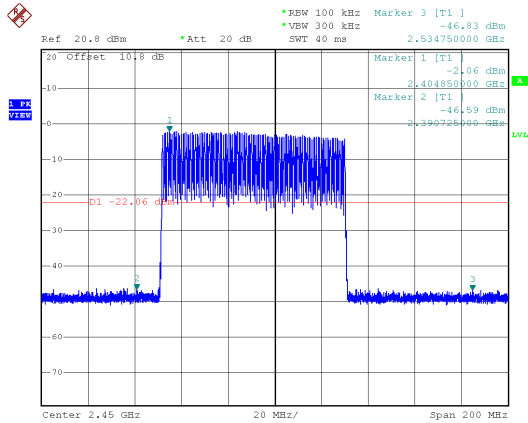


Date: 30.APR.2018 14:52:18

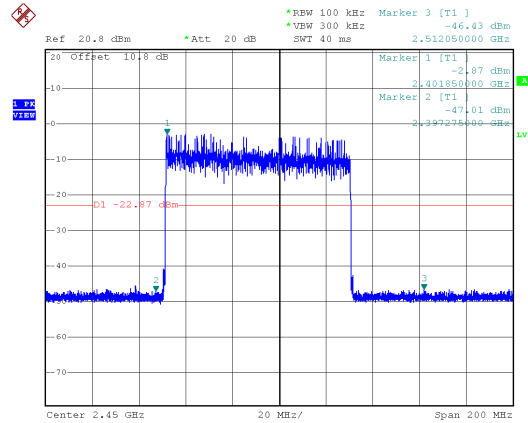

Date: 30.APR.2018 14:58:15

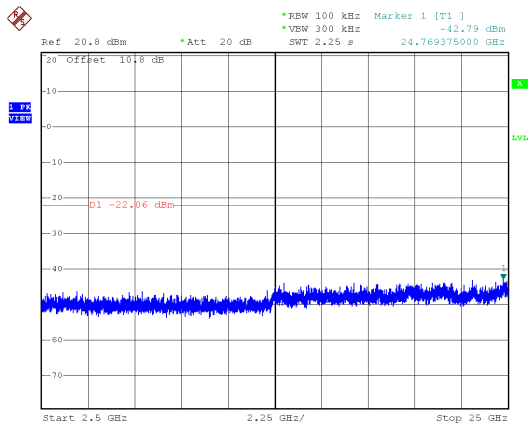


Date: 30.APR.2018 14:53:03

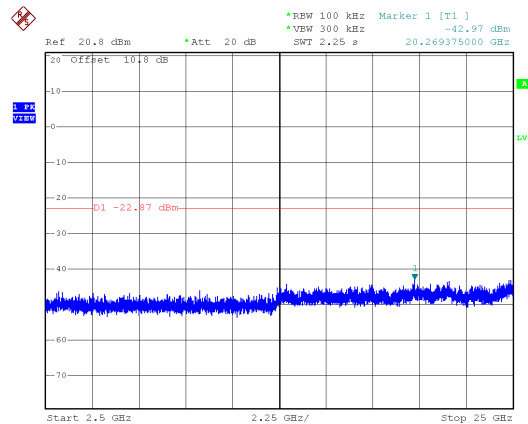


Date: 30.APR.2018 14:58:53




Modulation Type: 8DPSK

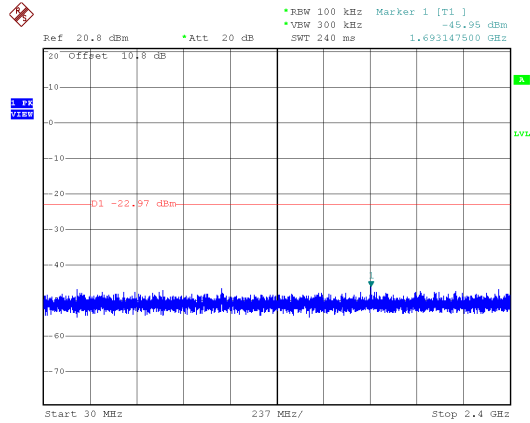

Date: 30.APR.2018 15:06:25

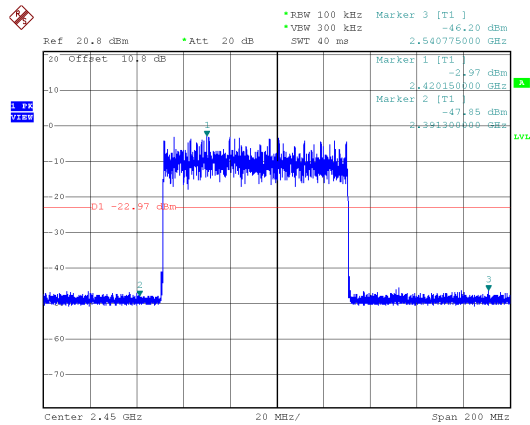

Date: 30.APR.2018 15:04:47

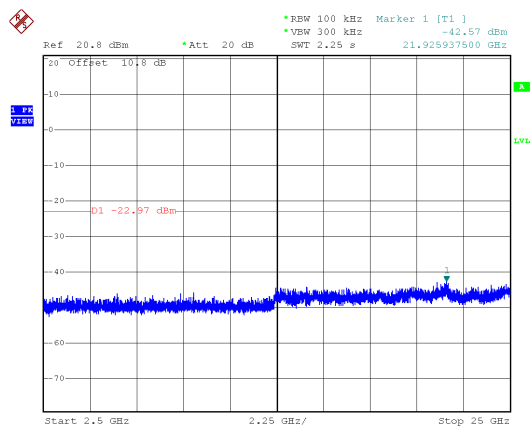

Date: 30.APR.2018 15:07:08



8. 20dB Bandwidth Measurement Data


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

8.3 Test Setup Layout




8.4 Test Result and Data

Test Result : PASS Temperature : 22°C
 Test Date : Apr. 30, 2018 Humidity : 63%

Modulation Type	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	2/3 20dB Bandwidth (MHz)
GFSK	00	2402	0.948	0.632
	39	2441	0.942	0.628
	78	2480	0.948	0.632
$\pi/4$ -DQPSK	00	2402	1.254	0.836
	39	2441	1.242	0.828
	78	2480	1.236	0.824
8DPSK	00	2402	1.260	0.840
	39	2441	1.266	0.844
	78	2480	1.260	0.840




Modulation Type: GFSK
CH00

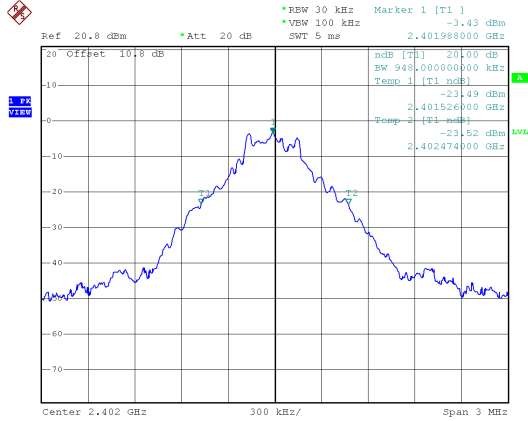


Date: 30.APR.2018 15:36:47

Modulation Type: $\pi/4$ -DQPSK
CH00

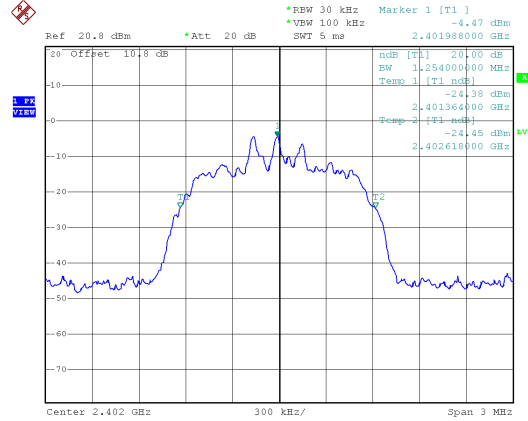


Date: 30.APR.2018 15:40:04

CH39

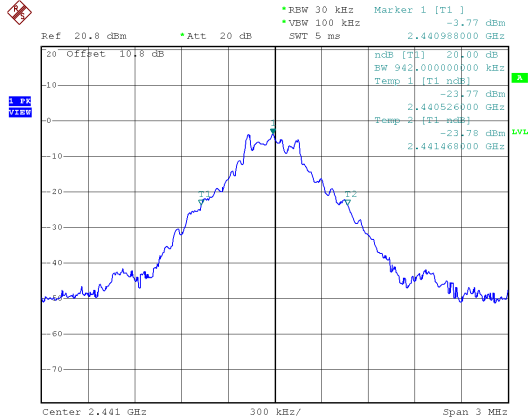


Date: 30.APR.2018 15:37:32

CH39

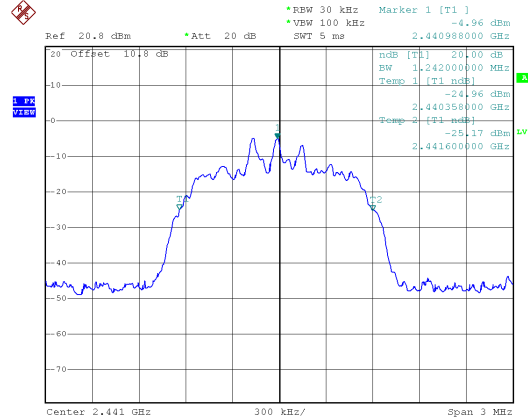


Date: 30.APR.2018 15:40:39

CH78

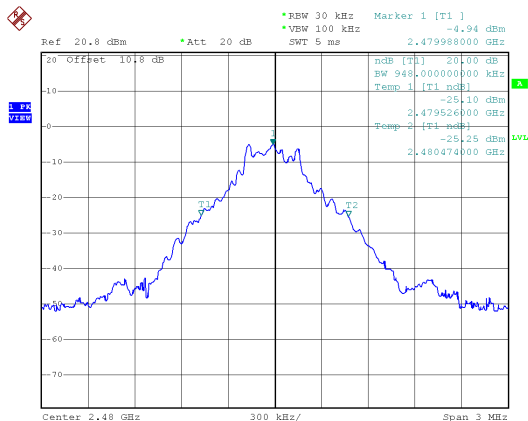

Date: 30.APR.2018 15:38:27


CH78

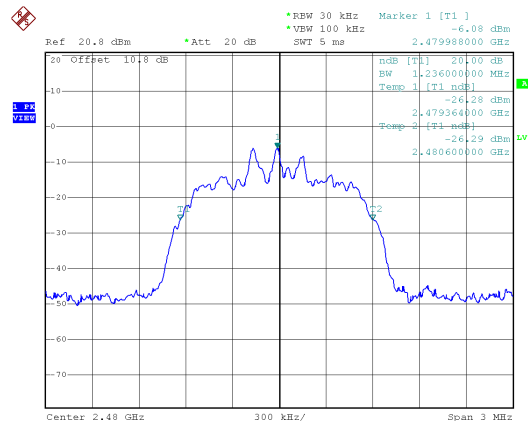

Date: 30.APR.2018 15:41:49




Modulation Type: 8DSPK
CH00

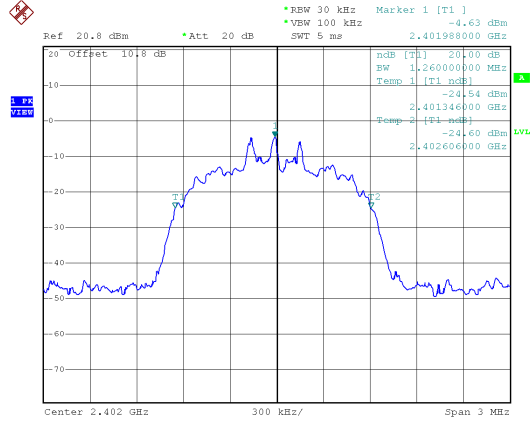


Date: 30.APR.2018 15:43:47

CH39

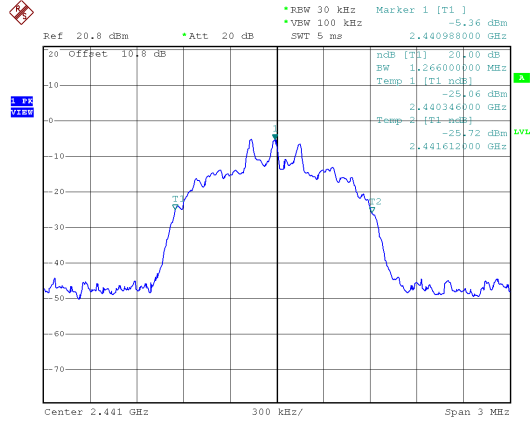

Date: 30.APR.2018 15:43:13


CH78

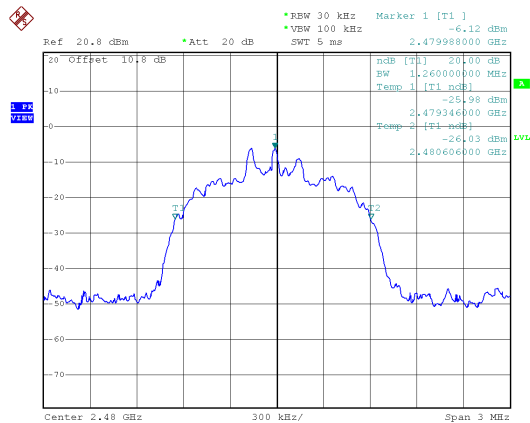

Date: 30.APR.2018 15:42:39




Modulation Type: GFSK
CH00

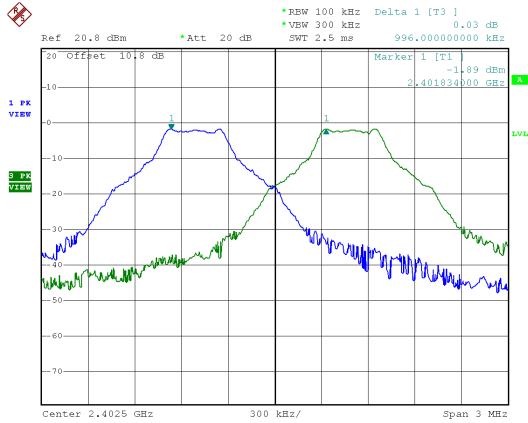


Date: 30.APR.2018 15:14:33

Modulation Type: $\pi/4$ -DQPSK
CH00

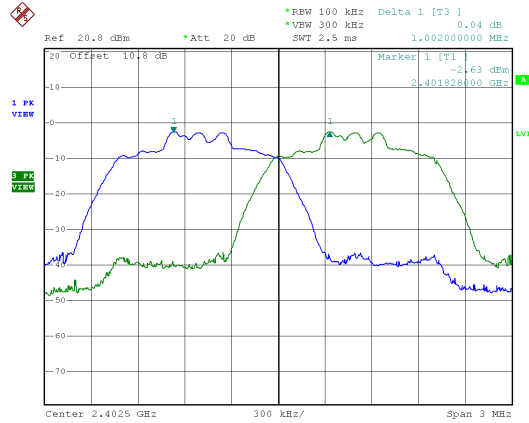


Date: 30.APR.2018 15:25:29

CH39

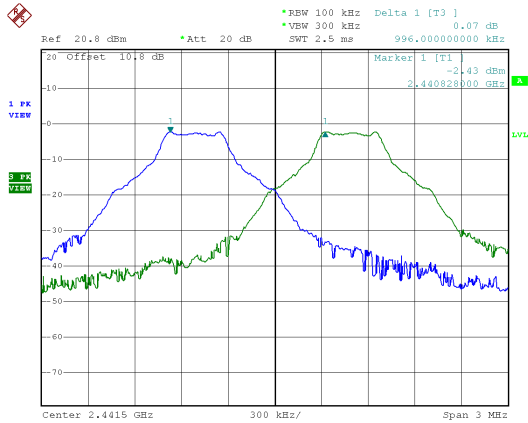


Date: 30.APR.2018 15:17:25

CH39

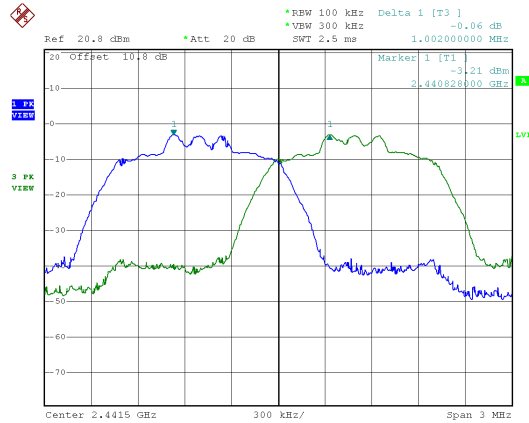


Date: 30.APR.2018 15:23:14

CH78

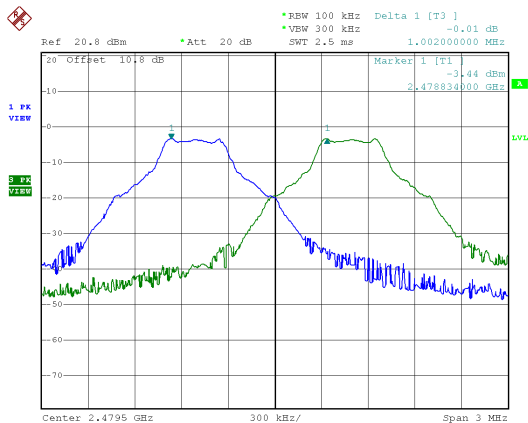

Date: 30.APR.2018 15:18:40


CH78

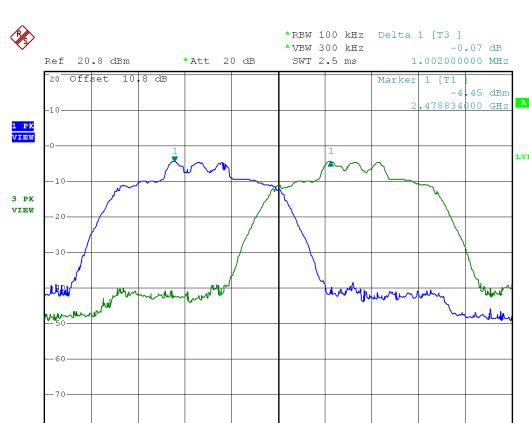

Date: 30.APR.2018 15:19:46




Modulation Type: 8DSPK
CH00

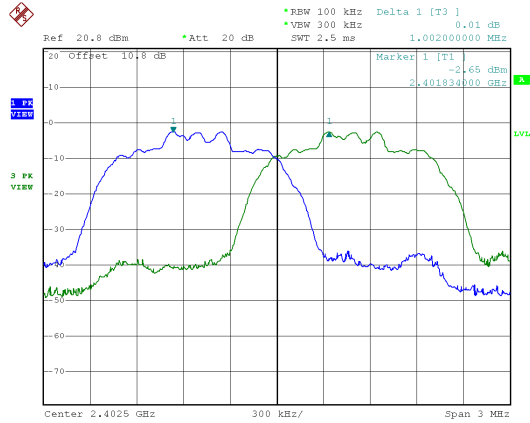


Date: 30.APR.2018 15:27:04

CH39

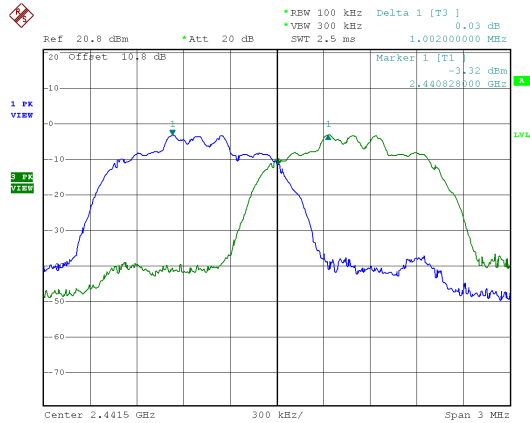

Date: 30.APR.2018 15:22:04

CH78

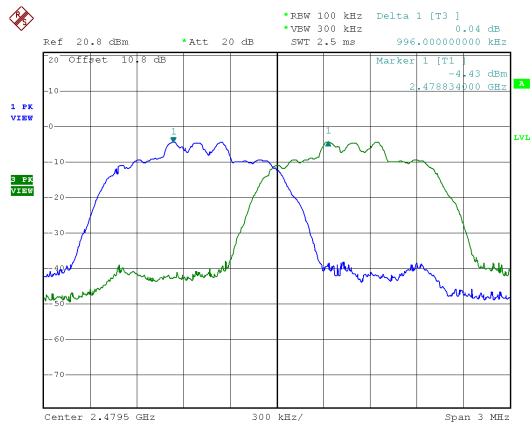

Date: 30.APR.2018 15:20:47



10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
4. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout



10.4 Test Result and Data

Test Result : PASS Temperature : 22°C
 Test Date : Apr. 30, 2018 Humidity : 63%
 Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec


Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 31.6 (79 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
GFSK (DH1)	2402	0.414	320.10	132.52	400
GFSK (DH3)	2402	1.684	159.90	269.27	400
GFSK (DH5)	2402	2.944	106.81	314.45	400
$\pi/4$ -DQPSK (DH1)	2402	0.426	320.10	136.36	400
$\pi/4$ -DQPSK (DH3)	2402	1.694	159.90	270.87	400
$\pi/4$ -DQPSK (DH5)	2402	2.954	106.81	315.52	400
8DPSK (DH1)	2402	0.426	320.10	136.36	400
8DPSK (DH3)	2402	1.690	159.90	270.23	400
8DPSK (DH5)	2402	2.950	106.81	315.09	400

Test Period = 0.4 (second/ channel) x 20 Channel = 8 sec

Modulation Type	Frequency (MHz)	Length of transmission time (ms)	Number of transmission in a 8 (20 Hopping*0.4)	Dwell Time (ms)	Limit (ms)
AFH (DH1)	2402-2421	0.428	160	68.48	400
AFH (DH3)	2402-2421	1.71	80	136.8	400
AFH (DH5)	2402-2421	2.95	53.33	157.32	400




Modulation Type: GFSK(DH1)

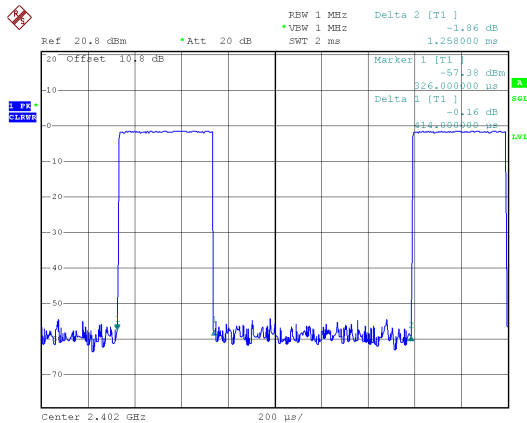


Date: 30.APR.2018 15:32:19

Modulation Type: $\pi/4$ -DQPSK (DH1)

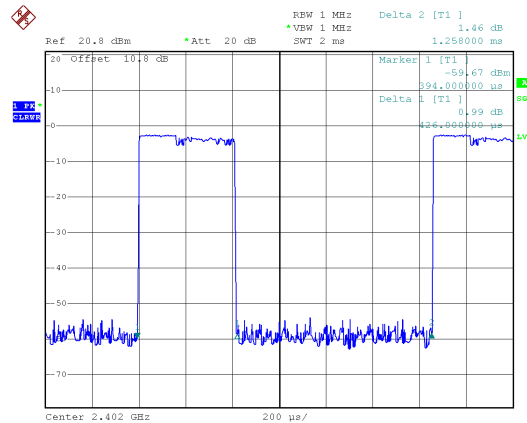


Date: 30.APR.2018 15:31:30

Modulation Type: GFSK(DH3)

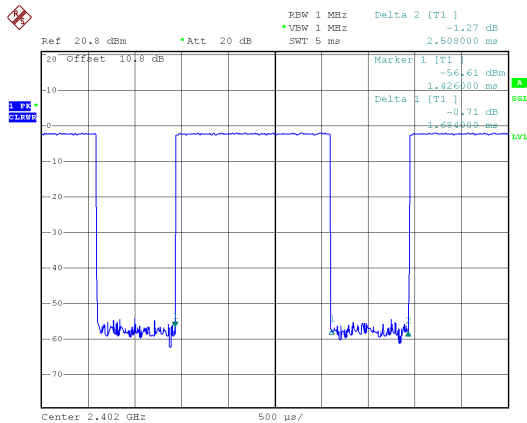


Date: 30.APR.2018 15:32:50

Modulation Type: $\pi/4$ -DQPSK (DH3)

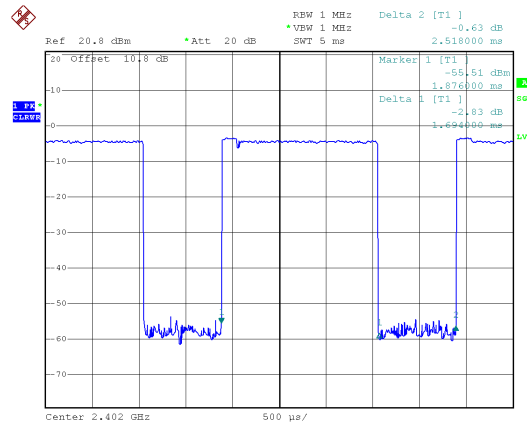


Date: 30.APR.2018 15:34:01

Modulation Type: GFSK(DH5)

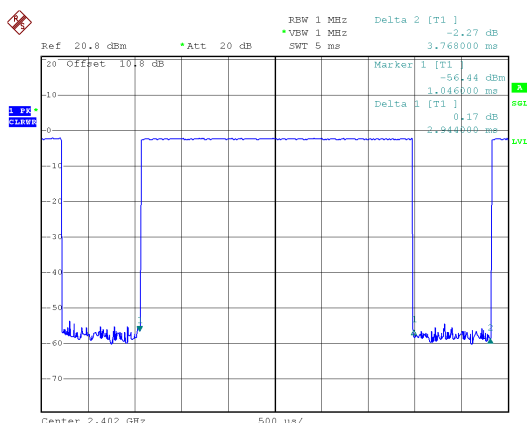

Date: 30.APR.2018 15:33:24


Modulation Type: $\pi/4$ -DQPSK (DH5)

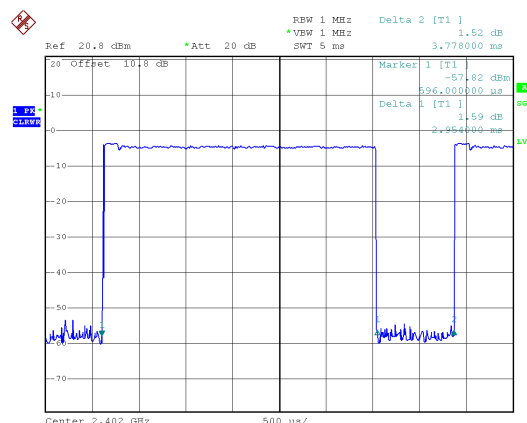

Date: 30.APR.2018 15:34:47




Modulation Type: 8DSPK (DH1)

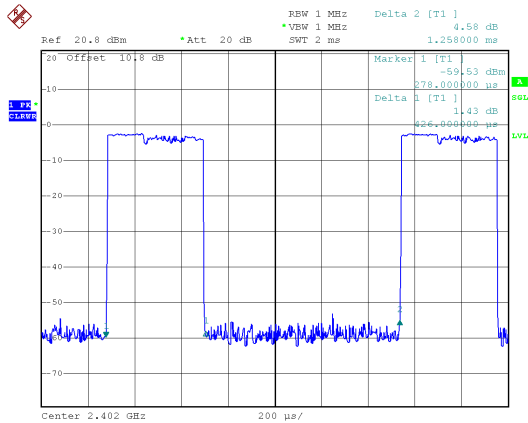


Date: 30.APR.2018 15:30:57

Modulation Type: AFH (DH1)

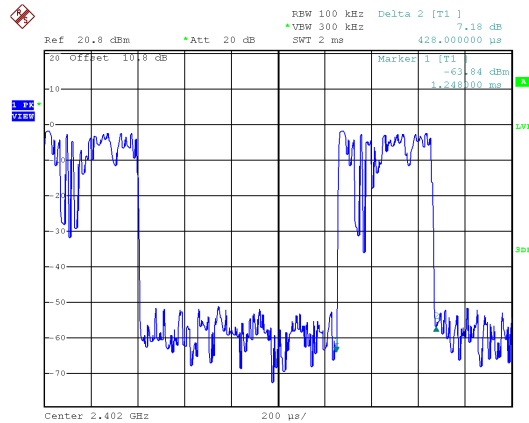


Date: 22.JUN.2018 17:11:21

Modulation Type: 8DSPK (DH3)

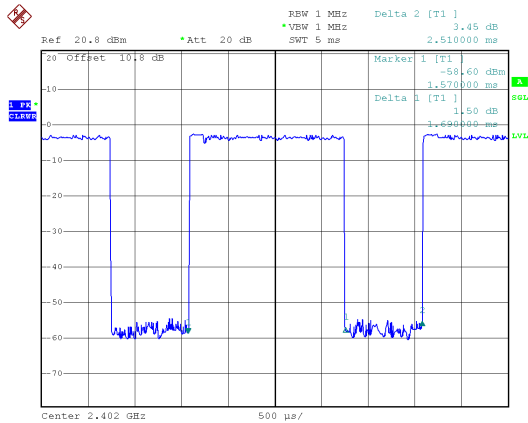


Date: 30.APR.2018 15:30:07

Modulation Type: AFH (DH3)

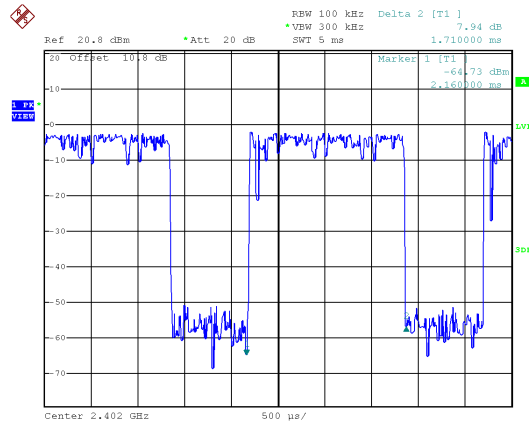


Date: 22.JUN.2018 17:10:08

Modulation Type: 8DSPK (DH5)

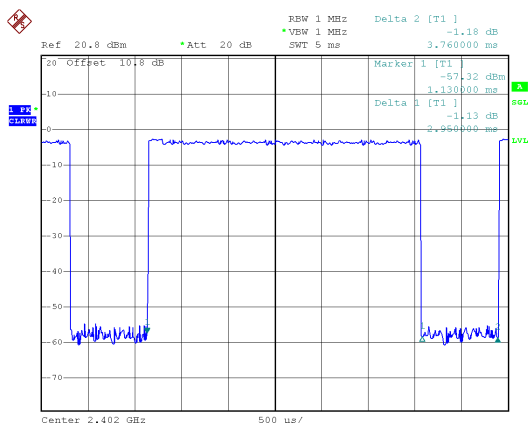

Date: 30.APR.2018 15:29:07


Modulation Type: AFH (DH5)

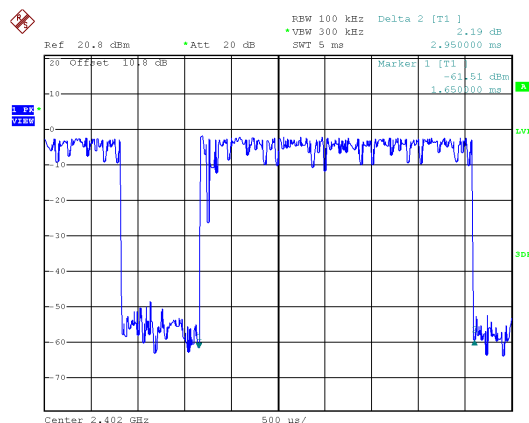

Date: 22.JUN.2018 17:09:17




Modulation Type: GFSK

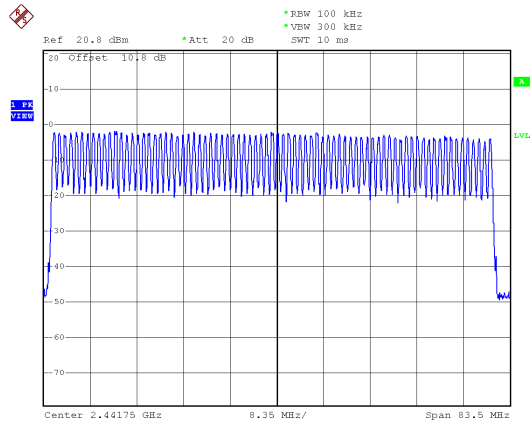


Date: 30.APR.2018 15:11:40

Modulation Type: AFH

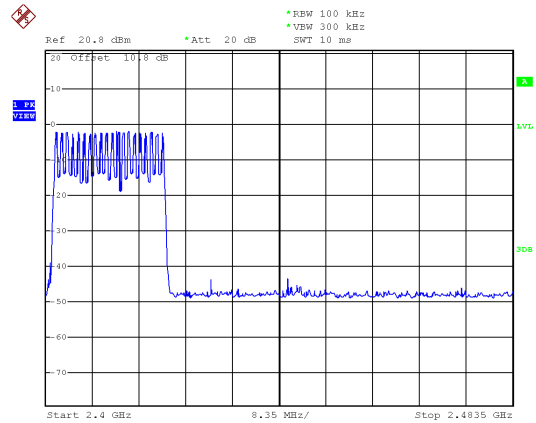


Date: 22.JUN.2018 17:05:54

Modulation Type: $\pi/4$ -DQPSK

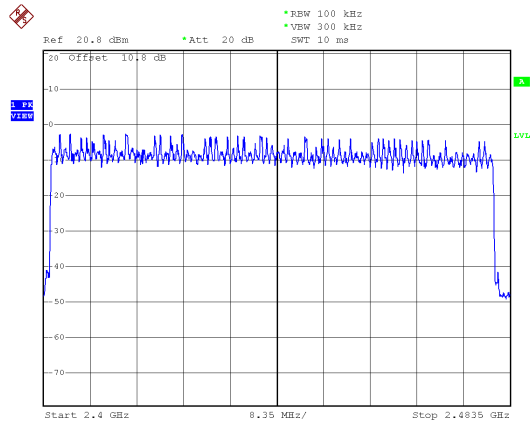

Date: 30.APR.2018 15:10:39

Modulation Type: 8DPSK

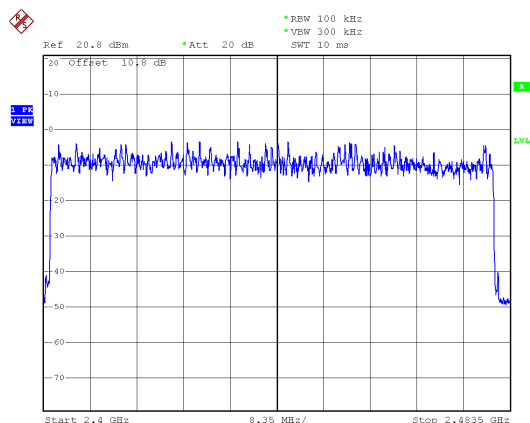

Date: 30.APR.2018 15:08:49



12. Maximum Peak Output Power


12.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

12.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout



**12.4 Test Result and Data**

Test Result : PASS

Temperature : 22°C

Test Date : Apr. 30, 2018

Humidity : 63%

Modulation Type	Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)
GFSK	00	2402	-2.23	0.598
	39	2441	-2.56	0.555
	78	2480	-3.13	0.486
$\pi/4$ -DQPSK	00	2402	-3.49	0.448
	39	2441	-3.63	0.434
	78	2480	-4.47	0.357
8DPSK	00	2402	-2.98	0.504
	39	2441	-3.41	0.456
	78	2480	-4.16	0.384

Modulation Type	Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (mW)
GFSK	00	2402	-2.87	0.516
	39	2441	-3.14	0.485
	78	2480	-3.83	0.414
$\pi/4$ -DQPSK	00	2402	-5.89	0.258
	39	2441	-6.21	0.239
	78	2480	-7.13	0.194
8DPSK	00	2402	-5.91	0.256
	39	2441	-6.23	0.238
	78	2480	-7.16	0.192

Modulation Type	Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)
AFH	0-19	2402-2421	-2.31	0.587

Modulation Type	Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (mW)
AFH	0-19	2402-2421	-2.91	0.512



13. Radio Frequency Exposure

The measurements shown in this test report were made in accordance with the procedures given in FCC Part 2 (Section 2.1091)
 KDB 447498
 IEEE C95.1

LIMIT

KDB 447498 D01 § 4.3(a)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- *f(GHz) is the RF channel transmit frequency in GHz
- * Power and distance are rounded to the nearest mW and mm before calculation
- *The result is rounded to one decimal place for comparison
- *The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion

13.1 EUT Specification

Frequency band (Operating)	<input type="checkbox"/> WLAN: 2412MHz ~ 2462MHz <input checked="" type="checkbox"/> Bluetooth: 2402MHz ~ 2480MHz
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation)
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure <input checked="" type="checkbox"/> General Population/Uncontrolled exposure
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Evaluation applied	<input type="checkbox"/> MPE Evaluation* <input checked="" type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

Remark:

1. The maximum output power is -2.23dBm (0.598mW) at 2402MHz (with numeric 1.96 antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied.

*Note: Simultaneous transmission is not applicable for this EUT.



13.2 Test Results

According to the KDB447498:

The SAR test exclusion thresholds Level:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * \text{sqrt}(\text{freq. in GHz}) < 3$

Calculation

Modulation Mode	Frequency band (MHz)	Max. Conducted output power (dBm)	Max. Conducted output power(mW)	Distance (cm)	SAR test exclusion thresholds (mW)
GFSK	2402-2480	-2.23	0.60	5	10.00
$\pi/4$ -DQPSK	2402-2480	-3.49	0.45	5	10.00
8DPSK	2402-2480	-2.98	0.50	5	10.00

Since the source-based time-averaging conducted output power is well below the SAR low threshold level, so the EUT is considered to comply with SAR requirement without testing