

SUCR240700026705 Report No.:

Rev.: 01 Page: 1 of 22

TEST REPORT

Application No: SUCR2407000267AT Applicant: SmartWitness USA, LLC

Address of Applicant: 1016 Lunt Avenue Schaumburg, IL 60193 United States

Manufacturer: SmartWitness USA, LLC

Address of Manufacturer: 1016 Lunt Avenue Schaumburg, IL 60193 United States

EUT Description: Dash Camera

CR4026-NAD011, CR4026-NAS011, CR4026-NAS0Y1, Model No.:

CR4026-NAD0Y1, CR4026-NAS2A1

Trade Mark: Sensata

FCC ID: 2AQ2S-CR402X

Standard(s): FCC 47 CFR Part 15, Subpart B

Date of Receipt: July 22, 2024

Date of Test: August 6, 2024 to August 6, 2024

Date of Issue: August 20, 2024

Test Result: Pass*

Nature Shen

Prepared by : Nature Shen / Project

Manager

Approved by: Cloud Peng /

Technical Manager

Cloud Peng

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Member of the SGS Group (SGS SA)

In the configuration tested, the EUT complied with the standards specified above.



Report No.: SUCR240700026705

Rev.: 01 Page: 2 of 22

Version

Revision Record							
Version	Version Chapter Date Modifier Remark						
01		August 20, 2024		Original			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 3 of 22

Contents

Versi	ion	2
1 T	Гest Summary	4
2 (General Information	5
2.1	Description of Support Units	6
2.2		6
2.3	Test Facility	6
2.4		6
2.5	Abnormalities from Standard Conditions	6
3 E	Emission Test Results	7
3.1	Conducted Emissions at Mains Terminals (150kHz-30MHz)	7
3.2		
3.3		
4 E	Equipment List	19
5 N	Measurement Uncertainty	21
6 F	Photographs	22
6 1	Test Setup	22

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SUCR240700026705 Report No.:

Rev.: 01 4 of 22 Page:

Test Summary 1

Emission Part							
Item	Standard	Method	Requirement	Result			
Conducted Emissions at Mains Terminals (150kHz-30MHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass			
Radiated Emissions (30MHz-1GHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass			
Radiated Emissions (above 1GHz)	FCC 47 CFR Part 15, Subpart B	ANSI C63.4:2014	Class B	Pass			

Internal Source	Upper Frequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower

Remark:

This test report (Report No.: SUCR240700026705 issue on August 20, 2024) is based on the original test report (Report No.: SEWM2308000332RG05 issued on September 1, 2023).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Therefore in this report Conducted Emissions at Mains Terminals (150kHz-30MHz), Radiated Emissions (30MHz-1GHz) and Radiated Emissions (above 1GHz) were performed based on the worst case of the original report with report number SEWM2308000332RG05 issued on September 1, 2023 and other test data in this report are based on the previous report with report number SEWM2308000332RG05 issued on September 1, 2023.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 5 of 22

2 General Information

Product Name:	Dash Camera	Dash Camera						
Model No. (EUT):		CR4026-NAD011, CR4026-NAS011, CR4026-NAS0Y1, CR4026-NAD0Y1, CR4026-NAS2A1						
Trade Mark:	Sensata							
Hardware Version:	V1.3							
Software Version:	SC600YNAPAR06A04_BP03	3.006_QDM039						
IMEI:	016468000014929							
	Band	Tx (MHz)	Rx (MHz)					
	LTE Band 2	1850~1910	1930~1990					
	LTE Band 4	1710~1755	2110~2155					
	LTE Band 5	824~849	869~894					
	LTE Band 7	2500~2570	2620~2690					
	LTE Band 12	699~716	729~746					
	LTE Band 13	777~787	746~756					
	LTE Band 14	788~798	746~756					
	LTE Band 17	704~716	734~746					
Frequency Bands:	LTE Band 25	1850~1915	1930~1995					
r requericy barius.	LTE Band 26	814~824	859~869					
	(814 to 824 MHz)	014-024	059~009					
	LTE Band 26	824~849	869~894					
	(824 to 849 MHz) LTE Band 41	2496~2690	2496~2690					
	LTE Band 41	1710~1780	2110~2200					
	LTE Band 71	663~698	617~652					
	Bluetooth	2402~2480	2402~2480					
	Wi-Fi 2.4G GNSS	2412~2462	2412~2462					
	(GPS+Beidou+GLONASS)	N/A	1559~1610					

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SUCR240700026705 Report No.:

Rev.: 01 6 of 22 Page:

2.1 Description of Support Units

The EUT has been tested as an independent unit.

2.2 Test Location

All tests were performed at:

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

2.4 Deviation from Standards

None

2.5 Abnormalities from Standard Conditions

None

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 7 of 22

3 Emission Test Results

3.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B				
Test Method:	ANSI C63.4:2014				
Frequency Range:	150kHz to 30MHz				
Receiver Setup:	RBW = 9kHz, VBW = 30kHz				
	Fraguescy Denge (MUz)	Limit(dBµV)			
	Frequency Range (MHz)	Quasi-peak	average		
	0.15M-0.5MHz	66 ~ 56*	56 ~ 46*		
Limit:	0.5M-5MHz	56	46		
	5M-30MHz	60	50		
	*Decreases with the logarithm of the frequency				
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz					

2.1.1 E.U.T. Operation

Operating Environment:

Temperature:	22~23°C
Humidity:	44~46%RH
Atmospheric Pressure:	101kPa
Pretest these modes to find the worst case:	a: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 5 b: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 12 c: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 13 d: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 14 e: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 17 f: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 26 g: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 71
The worst case for final test:	d: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 14

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

ones one may state the results from it has test report test only to the sample (s) tested and sumple (s) are feating to




Report No.: SUCR240700026705

Rev.: 01 Page: 8 of 22

2.1.2 Test Setup Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

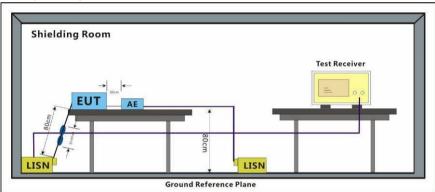

2.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 9 of 22

Test on the worst case:

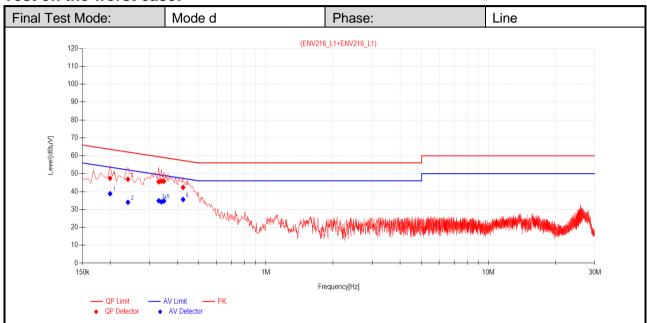

Final	Data List										
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.1995	11.04	36.40	47.44	63.63	16.19	27.77	38.81	53.63	14.82	PASS
2	0.2400	10.92	35.96	46.88	62.10	15.22	23.08	34.00	52.10	18.10	PASS
3	0.3300	10.78	34.69	45.47	59.45	13.98	24.09	34.87	49.45	14.58	PASS
4	0.3390	10.77	34.98	45.75	59.23	13.48	23.49	34.26	49.23	14.97	PASS
5	0.3480	10.77	34.98	45.75	59.01	13.26	23.96	34.73	49.01	14.28	PASS
6	0.4245	10.74	31.57	42.31	57.36	15.05	24.82	35.56	47.36	11.80	PASS

Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
- 3. Margin = Limit[$dB\mu V$] Value[$dB\mu V$]

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR240700026705

Rev.: 01 Page: 10 of 22

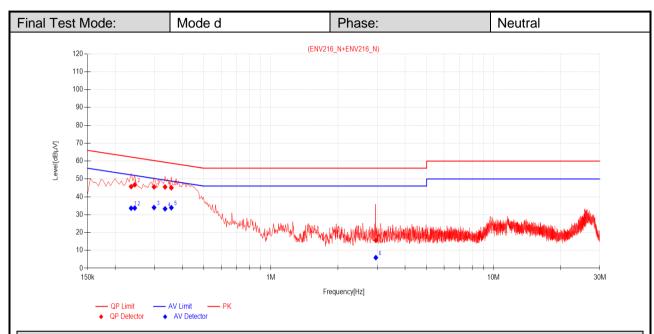

Fina	Data List										
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dΒμV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.2355	10.86	34.85	45.71	62.25	16.54	22.75	33.61	52.25	18.64	PASS
2	0.2445	10.83	35.91	46.74	61.94	15.20	22.88	33.71	51.94	18.23	PASS
3	0.2985	10.69	34.84	45.53	60.28	14.75	23.31	34.00	50.28	16.28	PASS
4	0.3345	10.69	34.81	45.50	59.34	13.84	22.59	33.28	49.34	16.06	PASS
5	0.3570	10.68	34.36	45.04	58.80	13.76	23.22	33.90	48.80	14.90	PASS
6	2.9580	10.93	4.69	15.62	56.00	40.38	-4.98	5.95	46.00	40.05	PASS

Remark:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Value =Reading[dBµV] + Factor(Lisn factor[dB] + cable loss[dB]).
- 3. Margin = Limit[dBµV] Value[dBµV]

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR240700026705

Rev.: 01 Page: 11 of 22

3.2 Radiated Emissions (30MHz-1GHz)

	,						
Test Requirement:	47 CFR Part 15, Subpart B						
Test Method:	ANSI C63.4:2014						
Frequency Range:	30MHz to 1GHz						
Measurement Distance:	3m						
	Frequency Range (MHz)	Limit(dBµV/m)	Detector				
	30MHz -88MHz	40.0	Quasi-peak				
Limit:	88MHz-216MHz	43.5	Quasi-peak				
	216MHz-960MHz	46.0	Quasi-peak				
	960MHz-1000MHz	54.0	Quasi-peak				
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz						

3.2.1 E.U.T. Operation

Temperature:	22~23°C
Humidity:	44~46%RH
Atmospheric Pressure:	101kPa
	a: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 5
	b: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 12
Duestoot those modes to	c: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 13
Pretest these modes to find the worst case:	d: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 14
inia trio worst case.	e: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 17
	f: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 26
	g: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 71
The worst case for final test:	f: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 26

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




Report No.: SUCR240700026705

Rev.: 01 Page: 12 of 22

3.2.2 Test Setup Procedures

- 1. The EUT was placed in a semi Anechoic Chamber as show below
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest radiation.
- 4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- 5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- 6. Set the test-receiver system to Peak Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
- 7. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

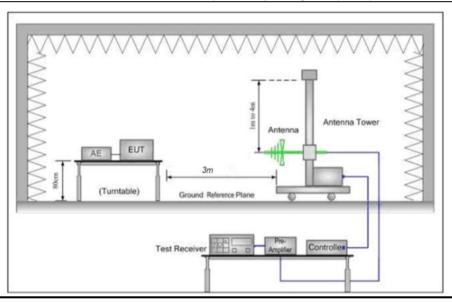

3.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

The three polarities of X,Y,Z were measured by EUT, but only the worst data had been displayed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980


t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SUCR240700026705

Rev.: 01 Page: 13 of 22

Test on the worst case:

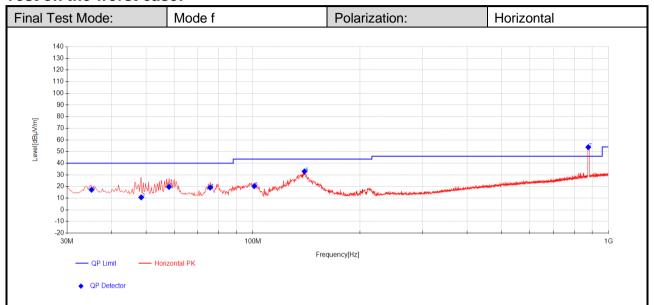

Final [Final Data List							
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity
1	35.1578	32.52	18.72	-34.00	17.24	40.00	22.76	Horizontal
2	48.4959	25.68	19.01	-33.98	10.71	40.00	29.29	Horizontal
3	58.0551	34.89	18.66	-33.88	19.67	40.00	20.33	Horizontal
4	75.7875	36.59	16.21	-33.69	19.11	40.00	20.89	Horizontal
5	100.8156	38.05	15.77	-33.47	20.35	43.50	23.15	Horizontal
6	139.6127	47.83	18.39	-33.24	32.98	43.50	10.52	Horizontal
7*	877.0525	53.52	29.68	-29.40	53.80	-	-	Horizontal

Remark:

- 1. The Quasi-Peak measurements were performed on the EUT.
- 2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dB μ V/m] –Value[dB μ V/m]

Note*: #7 30M-1G: is system simulator signal which can be ignored.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 14 of 22

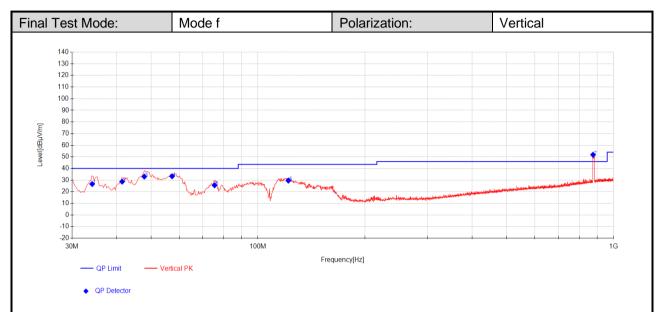

Final D	Data List							
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	34.1823	42.09	18.56	-34.00	26.65	40.00	13.35	Vertical
2	41.4981	43.18	19.50	-33.99	28.69	40.00	11.31	Vertical
3	47.8954	47.95	19.04	-33.98	33.01	40.00	6.99	Vertical
4	57.3431	48.51	18.68	-33.89	33.30	40.00	6.70	Vertical
5	75.5116	42.93	16.29	-33.69	25.53	40.00	14.47	Vertical
6	121.7778	45.67	17.22	-33.33	29.56	43.50	13.94	Vertical
7*	875.84	51.56	29.66	-29.41	51.81	-	-	Vertical

Remark:

- 1. The Quasi-Peak measurements were performed on the EUT.
- 2. Value = Reading + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Margin = Limit[dB μ V/m] –Value[dB μ V/m]

3. Note*: #7 30M-1G: is system simulator signal which can be ignored.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Report Template No./Rev: SUWI-TRF-RF(FCC)004/ v01



Report No.: SUCR240700026705

Rev.: 01 Page: 15 of 22

3.3 Radiated Emissions (above 1GHz)

Test Requirement:	47 CFR Part 15, Subpa	art B				
Test Method:	ANSI C63.4:2014					
Frequency Range:	Above 1GHz					
Measurement Distance:	3m					
	Frequency (MHz)	Limit (dBµV/m)	Detector			
Limit:	Above 4CH=	74	Peak			
	Above 1GHz 54 Average					
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 5th harmonic of the highest frequency or 40GHz, whichever is lower.					

3.3.1 E.U.T. Operation

3.3.1 L.O.1. Operation	
Temperature:	22~23°C
Humidity:	44~46%RH
Atmospheric Pressure:	101kPa
Pretest these modes to find the worst case:	a: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 5 b: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 12 c: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 13 d: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 14 e: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 17 f: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 26 g: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 71
The worst case for final test:	g: USB (adapter input)+BT+2.4GWLAN +GNSS +LTE Band 71

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




SUCR240700026705 Report No.:

Rev.: **01** 16 of 22 Page:

3.3.2 Test Setup Procedures

- 1. The EUT was placed in a full Anechoic Chamber as show below
- 2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- 4. The antenna height is adjusted between 1 to 4 meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- 5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- 6. Set the test-receiver system to Peak and AV Detect Function with specified bandwidth with Maximum Hold Mode, and the trace was allowed to stabilize.
- 7. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

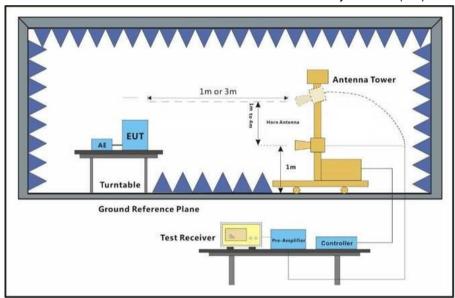

Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The three polarities of X, Y, Z were measured by EUT, but only the worst data had been displayed. Scan from 5th harmonic of the highest frequency or 40GHz, whichever is lower, the disturbance above 18GHz was very low. The points marked on below plots are the highest emissions could be found when testing, so only below points had been displayed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 17 of 22

Test on the worst case:

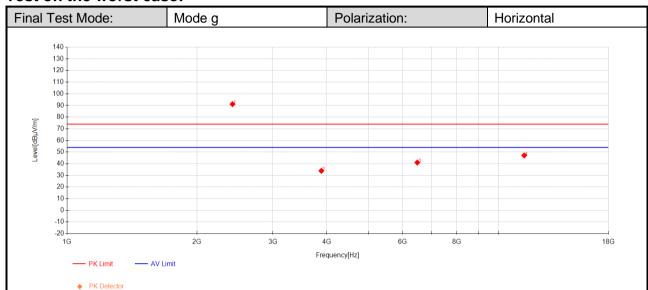

Final D	Final Data List							
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity
1*	2418.5	85.96	27.22	-22.04	91.14	-	-	Horizontal
2	3886.0714	45.83	30.91	-42.83	33.91	74.00	40.09	Horizontal
3	6485.3571	44.46	35.77	-39.22	41.01	74.00	32.99	Horizontal
4	11475	38.77	38.40	-30.08	47.09	74.00	26.91	Horizontal

Remark:

- 1. The Peak and Average measurements were performed on the EUT.
- 2. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dB μ V/m] - Level[dB μ V/m]

3. Note*: #1 1G-18G: is RF signal which come from Wi-Fi access point used to connect the EUT, and which can be ignored.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: SUCR240700026705

Rev.: 01 Page: 18 of 22

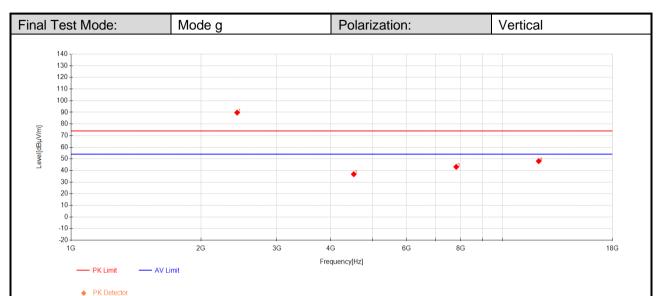

Final Da	Final Data List							
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Polarity
1*	2426.8333	84.55	27.24	-22.03	89.76	-	-	Vertical
2	4522.5	46.58	32.15	-41.94	36.79	74.00	37.21	Vertical
3	7815.5357	42.94	36.92	-36.75	43.10	74.00	30.90	Vertical
4	12137.6786	38.90	38.57	-29.43	48.03	74.00	25.97	Vertical

Remark:

- 1. The Peak and Average measurements were performed on the EUT.
- 2. Level = Reading Level + AF + Factor:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit[dB μ V/m] - Level[dB μ V/m]

3. Note*: #1 1G-18G: is RF signal which come from Wi-Fi access point used to connect the EUT, and which can be ignored.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 19 of 22

4 Equipment List

	Conduction Test Equipment							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)			
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2024/02/01	2025/01/31			
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2024/02/04	2025/02/03			
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2024/02/04	2025/02/03			
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2024/02/04	2025/02/03			
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR			
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 20 of 22

RE Test Equipment							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/06/03	2026/06/02		
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2024/02/18	2025/02/17		
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	2023/11/21	2024/11/20		
Test receiver	ROHDE&SCH WARZ	ESR7	SUWI-01-10-01	2024/02/01	2025/01/31		
Receiving antenna	SCHWRZBEC K MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2023/05/13	2025/05/12		
Receiving antenna	SCHWRZBEC K MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2023/05/13	2025/05/12		
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2024/02/04	2025/02/03		
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2024/02/04	2025/02/03		
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20		
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR		

Remark: NCR=No Calibration Requirement.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 21 of 22

5 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 2.9dB (150kHz to 30MHz)
	2 Radiated Emission	± 4.8dB (Below 1GHz)
2		± 4.8dB (1GHz to 18GHz)
		± 4.8dB (Above 18GHz)

Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SUCR240700026705

Rev.: 01 Page: 22 of 22

6 Photographs

6.1 Test Setup

Refer to Appendix A.1 15B Setup Photos.

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-and-Conditions

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com