



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: Sep 26 ~ November 02, 2020  
 Test Report S/N: LR500112011T  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2AQQT XV-110**

APPLICANT

**CNA Co., Ltd.**

<b>Equipment Class</b>	<b>DCD - Low Power Transmitter Below 1705 kHz</b>
<b>Manufacturing Description</b>	<b>Wireless Charger</b>
<b>Manufacturer</b>	<b>CNA Co., Ltd.</b>
<b>Model name</b>	<b>XV-110</b>
<b>Variant name</b>	<b>XV-110A, XV-110B, XV-110C, XV-110D, XV-110E, XV-110F, XV-110G, XV-110H, XV-110I, XV-110J</b>
<b>Test Device Serial No.:</b>	<b>Identical prototype</b>
<b>Rule Part(s)</b>	<b>FCC Part 15.209 Subpart C ; ANSI C-63.10-2013</b>
<b>Frequency Range</b>	<b>110 ~ 146 KHz</b>
<b>Data of issue</b>	<b>November 05, 2018</b>

This test report is issued under the authority of:

JaBeom, Koo / Manager

The test was supervised by:

Yeon Jae Hum, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 Antenna requirement	-----	6
3.2.2 Spurious Emission	-----	7
3.2.3 AC Conducted Emissions	-----	15
APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	16

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2021-09-30	ECT accredited Lab.
	KOREA		-	
RRA	U.S.A	KR0049	2021-04-11	
	CANADA		2021-06-16	RRA accredited Lab.
	VIETNAM		2021-04-12	
		C-14948	2023-09-10	
VCCI	JAPAN	T-12416	2023-09-10	
		R-14483	2023-10-15	VCCI registration
		G-10847	2021-12-13	
KOLAS	KOREA	KT551	2021-08-20	KOLAS accredited Lab.

## 2. Information about test item

### 2-1 Client & Manufacturer

Company name : CNA Co., Ltd.  
 Address : 1-204, 160, Hyanggyo-ro, Paldal-gu, Suwon-si, Gyeonggi-do, Republic of Korea  
 Tel / Fax : +82-010-3886-2007 / -

### 2-2 Equipment Under Test (EUT)

Trade name : Wireless Charger  
 Model name : XV-110  
 Variant name : XV-110A, XV-110B, XV-110C, XV-110D, XV-110E, XV-110F, XV-110G, XV-110H, XV-110I, XV-110J  
 Serial number : Identical prototype  
 Date of receipt : June 19, 2020  
 EUT condition : Pre-production, not damaged  
 Antenna type : inductive loop coil antenna  
 Frequency Range : 110 ~ 146 kHz  
 Modulation Technology : MSK  
 Power Source : DC 9 V by USB Port

### 2-3 Tested frequency

	LOW	MID	HIGH
Frequency (KHz)	110	130	146

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.203	Antenna requirement	Radiation	C
15.209(a)(f)	Radiated Spurious Emission		C
15.207	AC Conducted Emissions		N/A

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

### 3.2 Technical Characteristics Test

#### 3.2.1 Antenna requirement

<b>Standard requirement</b>	FCC Part15 C Section 15.203
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>EUT Antenna</b>	Inductive loop coil Antenna
The antenna is inductive loop coil antenna which permanently attached	

### 3.2.2 Radiated Spurious Emission

#### Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defined in ANSI C63.10-2013.

The EUT is placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

#### The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 100 kHz ( 30 MHz ~ 1 GHz)

VBW  $\geq$  RBW

= 1 MHz ( 1 GHz ~ 10<sup>th</sup> harmonic )


Trace = max hold



Detector function = peak

Sweep = auto

Sweep = auto

#### **below 30 MHz**

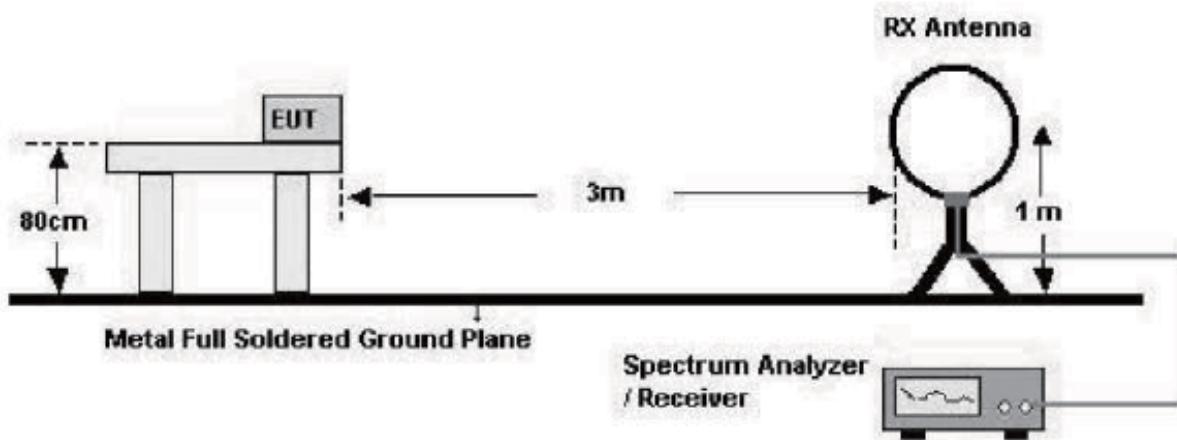

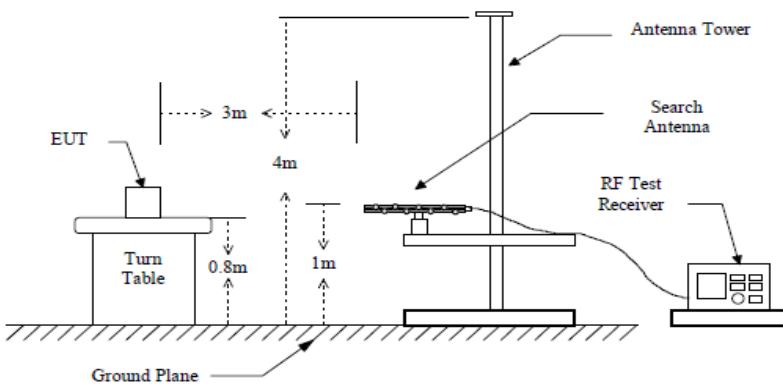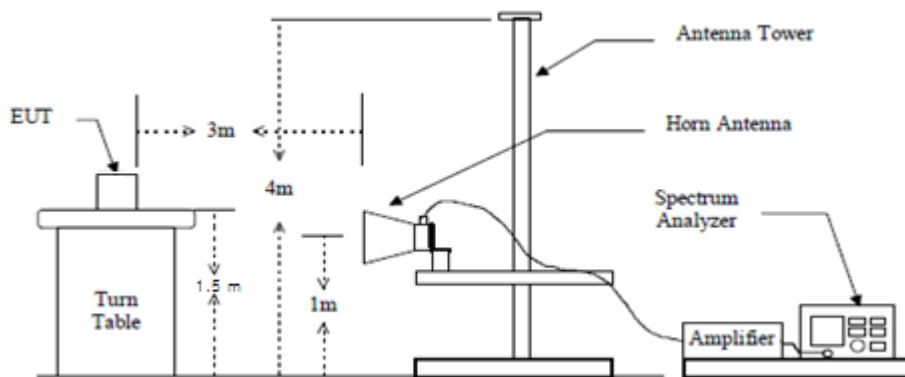**below 1 GHz (30 MHz to 1 GHz)****above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.

**Minimum Standard: FCC Part 15.209(a)**

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	24000/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions (9 kHz ~ 30 MHz)

9 kHz ~ 150 kHz



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: XV-110

Temp/Humi: 20 °C / 42 % R.H.

Test Mode : Operating mode

Tested by: YEON J H

Power :

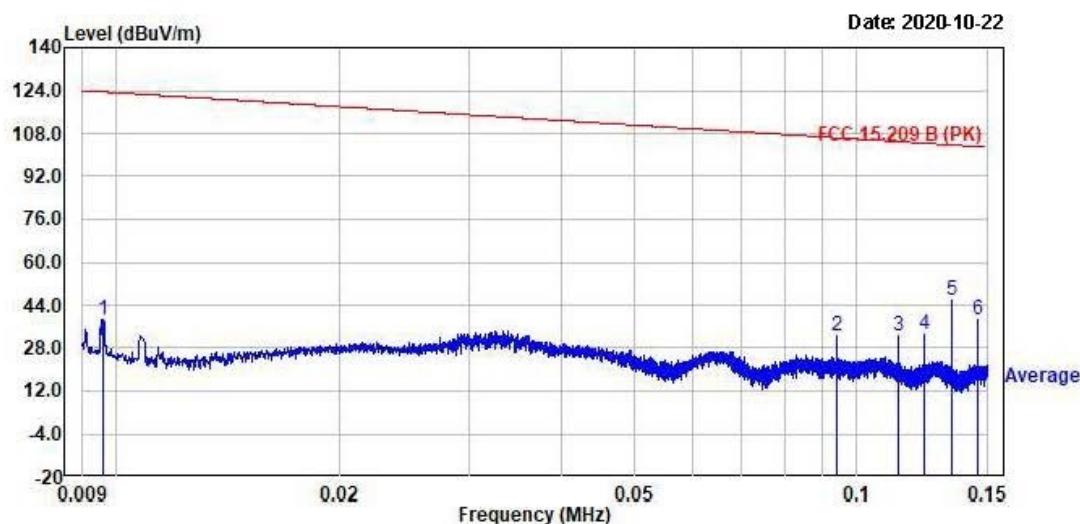

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	0.01	70.60	-31.98	38.62	123.50	84.88	-----	-----	line
2.	0.09	64.37	-32.03	32.34	106.38	74.04	-----	-----	line
3.	0.11	64.63	-32.01	32.62	104.97	72.35	-----	-----	line
4.	0.12	64.99	-32.00	32.99	104.36	71.37	-----	-----	line
5.	0.13	77.60	-31.98	45.62	103.69	58.07	-----	-----	line
6.	0.15	70.28	-31.97	38.31	103.11	64.80	-----	-----	line

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: XV-110

Temp/Humi: 20 °C / 42 % R.H.

Test Mode : Operating mode

Tested by: YEON J H

Power :

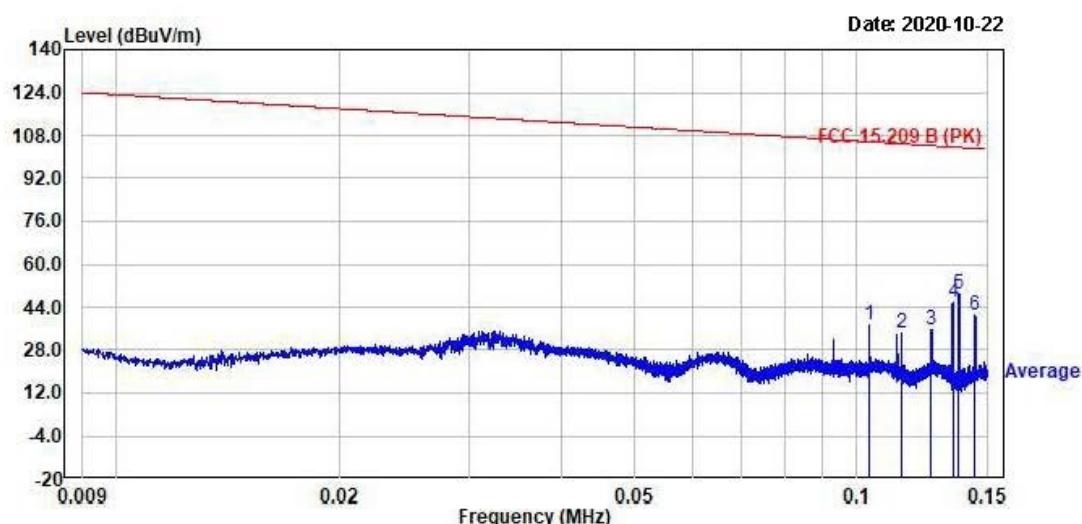

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result Q.P dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	0.10	69.10	-32.02	37.08	105.62	68.54	-----	-----	Vertical
2.	0.12	66.19	-32.01	34.18	104.87	70.69	-----	-----	Vertical
3.	0.13	67.65	-31.99	35.66	104.18	68.52	-----	-----	Vertical
4.	0.13	77.81	-31.98	45.83	103.69	57.86	-----	-----	Vertical
5.	0.14	80.96	-31.98	48.98	103.54	54.56	-----	-----	Vertical
6.	0.14	72.71	-31.97	40.74	103.16	62.42	-----	-----	Vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

150 kHz ~ 30 MHz



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: XV-110

Temp/Humi: 20 °C / 42 % R.H.

Test Mode : Operating mode

Tested by: YEON J H

Power :

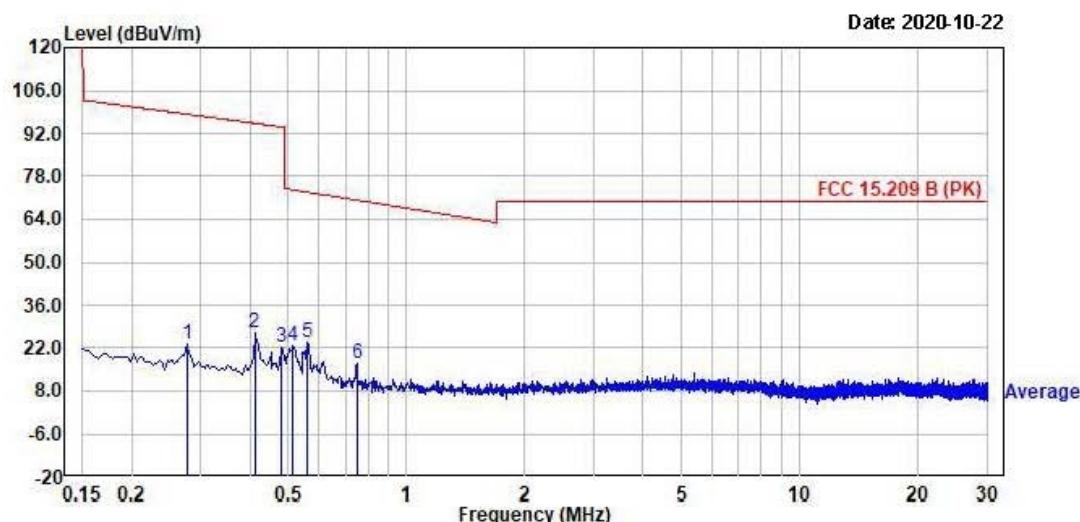

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V		dB $\mu$ V/m	dB $\mu$ V/m		cm	deg	
1.	0.28	55.06	-31.77	23.29	98.28	74.99	-----	-----	Horizontal
2.	0.41	58.62	-31.58	27.04	95.32	68.28	-----	-----	Horizontal
3.	0.48	53.64	-31.52	22.12	94.12	72.00	-----	-----	Horizontal
4.	0.52	54.40	-31.50	22.90	73.55	50.65	-----	-----	Horizontal
5.	0.56	55.08	-31.47	23.61	72.82	49.21	-----	-----	Horizontal
6.	0.75	48.19	-31.37	16.82	70.24	53.42	-----	-----	Horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: XV-110

Temp/Humi: 20 'C / 42 % R.H.

Test Mode : Operating mode

Tested by: YEON J H

Power :

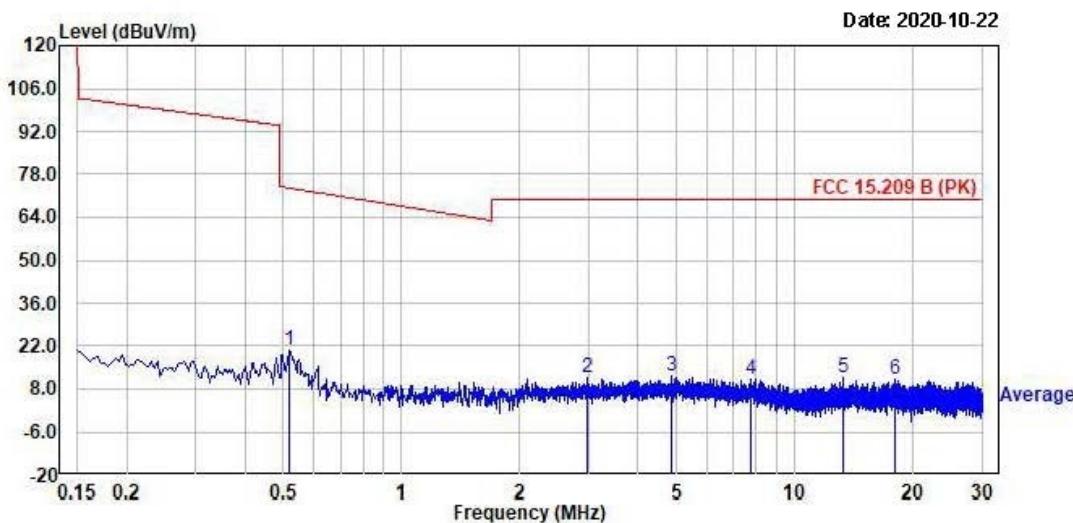

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	0.52	52.04	-31.50	20.54	73.49	52.95	-----	-----	Vertical
2.	2.98	42.29	-30.80	11.49	70.00	58.51	-----	-----	Vertical
3.	4.87	42.47	-30.40	12.07	70.00	57.93	-----	-----	Vertical
4.	7.76	41.64	-30.36	11.28	70.00	58.72	-----	-----	Vertical
5.	13.33	42.57	-30.93	11.64	70.00	58.36	-----	-----	Vertical
6.	18.07	41.03	-30.10	10.93	70.00	59.07	-----	-----	Vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

30 MHz ~ 1 GHz




4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com

EUT/Model No.: Temp/Humi: 23 °C / 38 % R.H.

Test Mode : Operating mode Tested by:

Power :

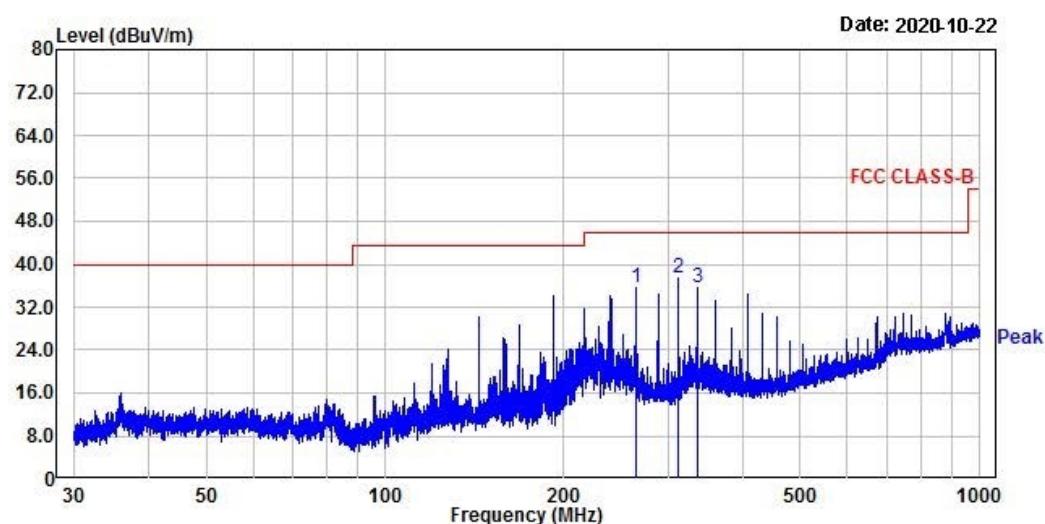

No.	Freq	Reading	C.F	Result QP	Limit	Margin	Height	Angle Polarity	
								MHz	dB $\mu$ V
1.	264.05	47.79	-12.13	35.66	46.00	10.34	100	0	horizontal
2.	312.04	47.84	-10.41	37.43	46.00	8.57	100	336	horizontal
3.	336.04	45.60	-9.88	35.72	46.00	10.28	100	250	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.:

Temp/Humi: 23 'C / 38 % R.H.

Test Mode : Operating mode

Tested by:

Power :

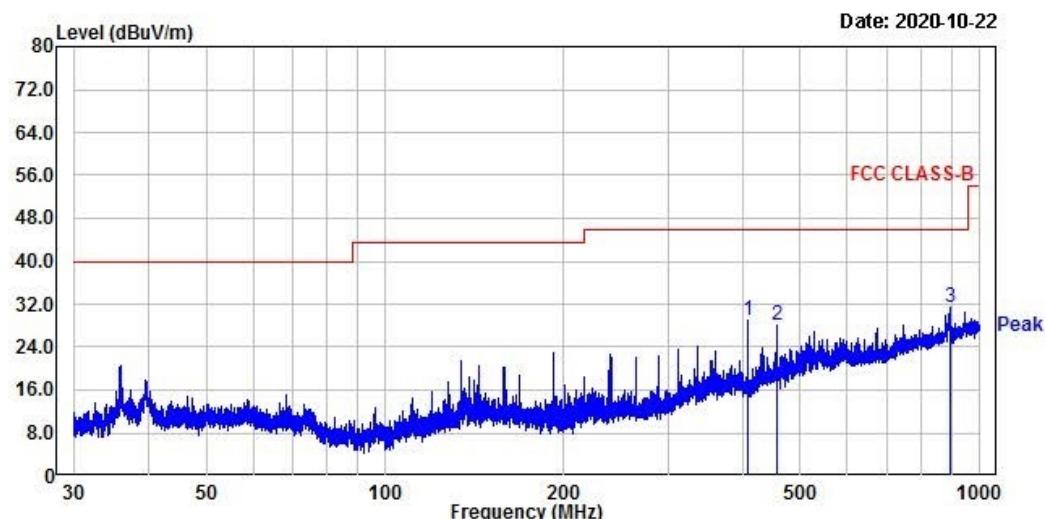

No.	Freq MHz	Reading dB $\mu$ V	C.F dB	Result QP dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle deg	Polarity
1.	408.05	37.43	-8.56	28.87	46.00	17.13	100	214	vertical
2.	456.11	35.91	-7.75	28.16	46.00	17.84	100	226	vertical
3.	893.47	30.55	0.71	31.26	46.00	14.74	100	191	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.2.3 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**Minimum Standard: FCC Part 15.207(a) / EN 55022**

**Measurement Data: N/A**

#### Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

**APPENDIX I**  
**TEST EQUIPMENT USED FOR TESTS**

	<b>Use</b>	<b>Description</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Manufacturer</b>	<b>Interval</b>	<b>Next Cal. Date</b>
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2021-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2021-03-16
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2021-03-16
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2021-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2021-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2021-09-06
7		RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2021-09-06
8		RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2021-03-16
9		Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-08-04
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2022-03-16
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2022-03-16
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2021-03-16
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2021-03-16
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2021-03-16
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2021-09-06
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2021-09-06
20		Moduleation Analyzer	8901B	3749A05878	HP	1 year	2021-09-06
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	Jin Young Tech	1 year	2021-09-06
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2021-03-16
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2021-09-06
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2021-03-16
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2021-03-16
26		Highpass Filter	WPKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2021-03-16
27		Highpass Filter	WPKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2021-03-16
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2021-03-16
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2021-03-16
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2021-03-16
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2021-02-26