



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, APRIL 2018

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Beijing Penslink Co.,Ltd

502 Room,2 Building,6th Yard, Fuandonglu Street, Chaoyang District Beijing, China

FCC ID: 2AQXJ-P0102A

IC: 24286-P0102A

Report Type: Original Report	Product Name: Petfon
Report Number: RDG180628007-00D	
Report Date: 2018-10-24	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	9
APPLICABLE STANDARD	9
RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION	10
APPLICABLE STANDARD	10
FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	12
FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS.....	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5,RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 b) - CHANNEL SEPARATION TEST	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	28
RSS-247 CLUASE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH TESTING	34
APPLICABLE STANDARD	34
TEST PROCEDURE	35

TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(a) (1) (iii)& RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL TEST.....	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	46
FCC §15.247(a) (1) (iii)& RSS-247 Clause 5.1 d) - TIME OF OCCUPANCY (DWELL TIME)	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST EQUIPMENT LIST AND DETAILS.....	50
TEST DATA	50
FCC §15.247(b) (1), RSS-247 Clause 5.4 b) - PEAK OUTPUT POWER MEASUREMENT	66
APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST EQUIPMENT LIST AND DETAILS.....	66
TEST DATA	66
FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING.....	68
APPLICABLE STANDARD	68
TEST PROCEDURE	68
TEST EQUIPMENT LIST AND DETAILS.....	69
TEST DATA	69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Petfon
EUT Model:	P0102A, P0102B
FCC ID:	2AQXJ-P0102A
IC:	24286-P0102A
Rated Input Voltage:	DC 3.7V from battery or DC 5V charged by Charger box(Controller) DC 3.7V from battery or DC 5V charged by Charger box(Tracker)
External Dimension:	42mm(L)* 42mm(W)* 18mm(H) (Controller) 42mm(L)* 42mm(W)* 18mm(H) (Tracker)
Serial Number:	180628007-1 (Controller) 180628007-2(Tracker)
EUT Received Date:	2018.06.28

Note: the Controller and Tracker have identical schematics and PCB layout, only antenna, keys and appearance different, test performed at both unit for AC Line Conducted Emissions and Radiation Spurious emissions, other test items only performed at Controller.

Objective

This report is prepared on behalf of *Beijing Penslink Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05. And RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

EUT Exercise Software

The software "WCN_Combo_Tool" was used for testing and the maximum power was configured as below:

Mode	Channel	Frequency (MHz)	Power Level
GFSK	Low	2402	7
	Middle	2441	7
	High	2480	7
$\pi/4$ DQPSK	Low	2402	7
	Middle	2441	7
	High	2480	7
8DPSK	Low	2402	7
	Middle	2441	7
	High	2480	7

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Huawei	adapter	HW-050200C3W	H333L5FM06947


Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	no	no	0.8	adapter	charger box

Block Diagram of Test Setup

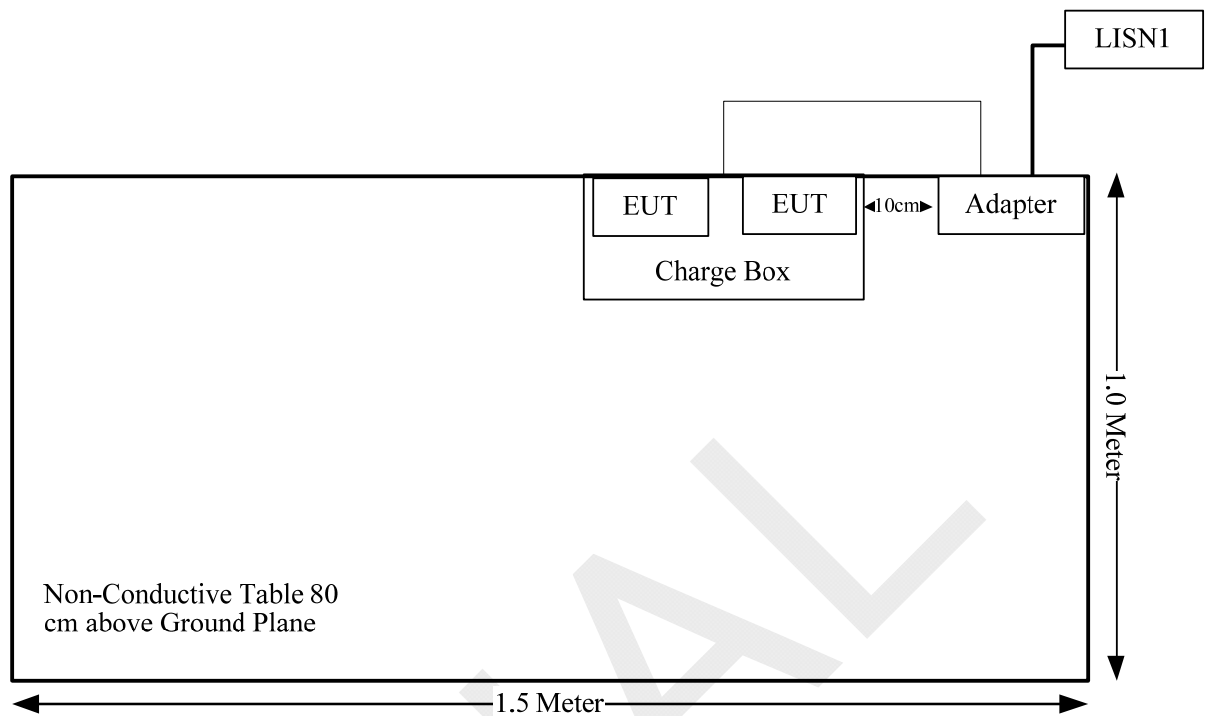

Radiated Emissions:

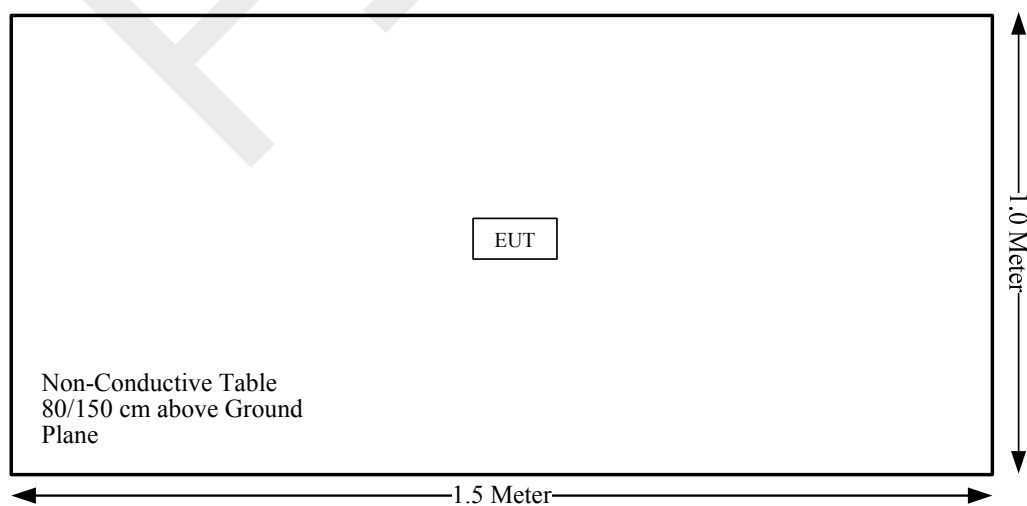

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
RSS-102 §2.5.1	Exemption Limits for Routine Evaluation - SAR Evaluation	Compliance
FCC§15.203, RSS-GEN Clause 6.8	Antenna Requirement	Compliance
FCC§15.207 (a), RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d), RSS-247 Clause 5.5, RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(1), RSS-247 Clause 5.1 b) RSS-Gen Clause 6.7	Emission Bandwidth	Compliance
FCC §15.247(a)(1), RSS-247 Clause 5.1 b)	Channel Separation Test	Compliance
FCC§15.247(a)(1)(iii), RSS-247 Clause 5.1 d)	Time of Occupancy (Dwell Time)	Compliance
FCC§15.247(a)(1)(iii), RSS-247 Clause 5.1 d)	Quantity of hopping channel Test	Compliance
FCC§15.247(b)(1), RSS-247 Clause 5.4 b)	Peak Output Power Measurement	Compliance
FCC§15.247(d) RSS-247 Clause 5.5	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 2.0 dBm (1.58 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 1.58/5 \cdot (\sqrt{2.480}) = 0.5 < 3.0$

So the stand-alone SAR evaluation is not necessary.

RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION

Applicable Standard

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance⁴⁵

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Measurement Result:

The maximum output power including tune up tolerance is 2.0 dBm, which was declared by manufacturer. The antenna gain is 1.0 dBi, so the EIRP=2.0+1.0= 3.0dBm(2 mW)

The exemption power(P) limits for routine evaluation in 2402-2480MHz is:

$$(2480-2450)/(3500-2450)=(4-P)/(4-2)$$

$$\Rightarrow P=3.96 \text{ mW}@2480\text{MHz}$$

$$> 2 \text{ mW}$$

So the SAR evaluation can be exempted.

FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Information And Connector Construction

Both Controller and Tracker have 3 internal antenna, fulfill the requirement of this section. Please refer to the EUT photos and below information.

Unit	Antenna	Antenna Type	Connector Type	input impedance (Ohm)	Antenna Gain /Frequency
Controller	Lora	FPC	ejector pin	50	3.0 dBi/ 902-928MHz
	WIFI	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
	BT	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
Tracker	Lora	FPC	ejector pin	50	3.0 dBi/ 902-928MHz
	WIFI	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
	BT	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz


Result: Compliance.

FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a), RSS-GEN CLAUSE 8.8.

EUT Setup

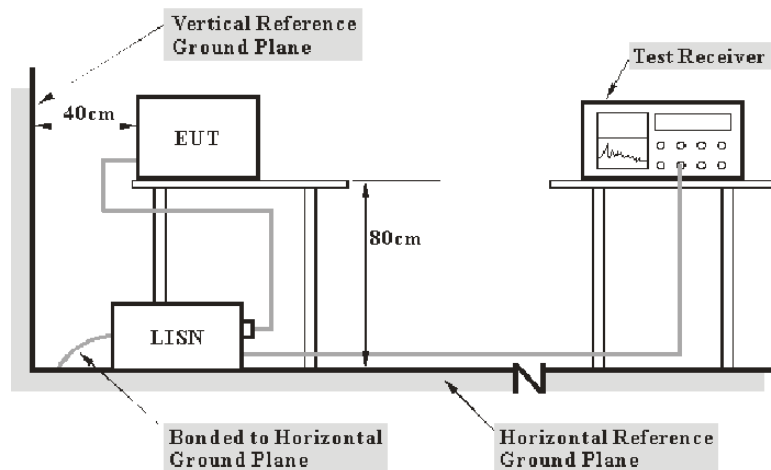

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	28.5°C
Relative Humidity:	58 %
ATM Pressure:	100.2 kPa

The testing was performed by Sider Huang on 2018-07-16.

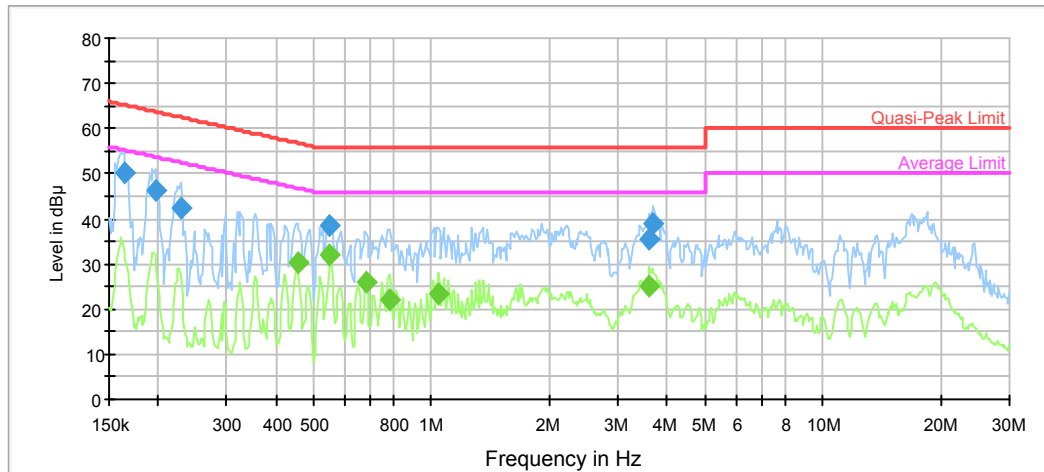Test Mode: Charging**AC120V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.163741	50.1	9.000	L1	11.0	15.2	65.3	Compliance
0.196675	46.2	9.000	L1	10.7	17.5	63.7	Compliance
0.228823	42.6	9.000	L1	10.4	19.9	62.5	Compliance
0.545378	38.3	9.000	L1	9.9	17.7	56.0	Compliance
3.575883	35.5	9.000	L1	9.8	20.5	56.0	Compliance
3.691692	39.1	9.000	L1	9.8	16.9	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.454052	30.1	9.000	L1	9.9	16.7	46.8	Compliance
0.549741	32.0	9.000	L1	9.9	14.0	46.0	Compliance
0.681699	25.9	9.000	L1	9.8	20.1	46.0	Compliance
0.780588	22.1	9.000	L1	9.8	23.9	46.0	Compliance
1.039922	23.5	9.000	L1	9.8	22.5	46.0	Compliance
3.604490	25.0	9.000	L1	9.8	21.0	46.0	Compliance

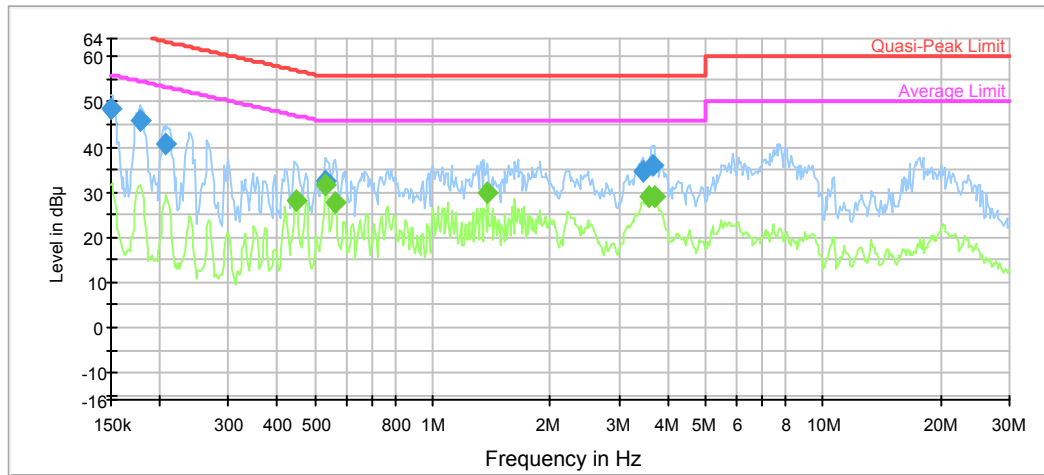AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.5	9.000	N	6.2	22.5	66.0	Compliance
0.177322	45.9	9.000	N	5.8	23.7	64.6	Compliance
0.207957	40.5	9.000	N	5.6	27.8	63.3	Compliance
0.528270	32.4	9.000	N	9.9	23.6	56.0	Compliance
3.463707	34.5	9.000	N	9.8	21.5	56.0	Compliance
3.662393	35.7	9.000	N	9.8	20.3	56.0	Compliance


Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.446873	28.1	9.000	N	9.9	18.8	46.9	Compliance
0.532496	31.4	9.000	N	9.9	14.6	46.0	Compliance
0.563041	27.8	9.000	N	9.8	18.2	46.0	Compliance
1.385415	29.7	9.000	N	9.7	16.3	46.0	Compliance
3.575883	28.9	9.000	N	9.8	17.1	46.0	Compliance
3.691692	28.9	9.000	N	9.8	17.1	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5, RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205; RSS-247 Clause 5.5, RSS-GEN Clause 8.10

EUT Setup

Below 1GHz:

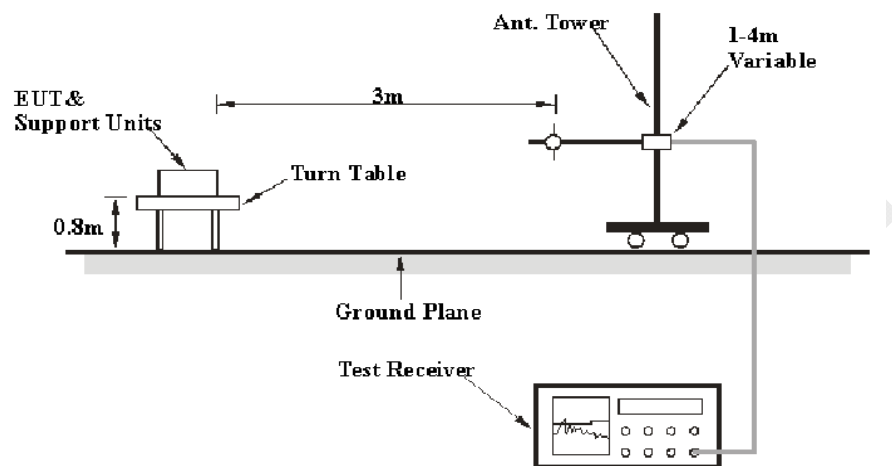

Above 1GHz:

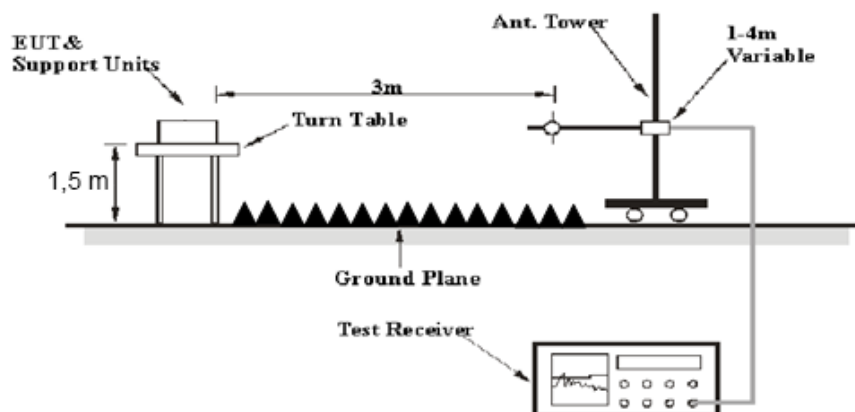

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 and the RSS-247 Clause 5.5, RSS-GEN Clause 8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-31	2019-08-31
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2018-02-24	2019-02-28
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	26.4~27.7 °C
Relative Humidity:	40~44 %
ATM Pressure:	100~100.7kPa

** The testing was performed by Sunny Cen & Vern Shen on 2018-10-09~2018-10-18.*


Test Mode: Transmitting

1) 30MHz-1GHz (GFSK middle channel was the worst)

Horizontal:

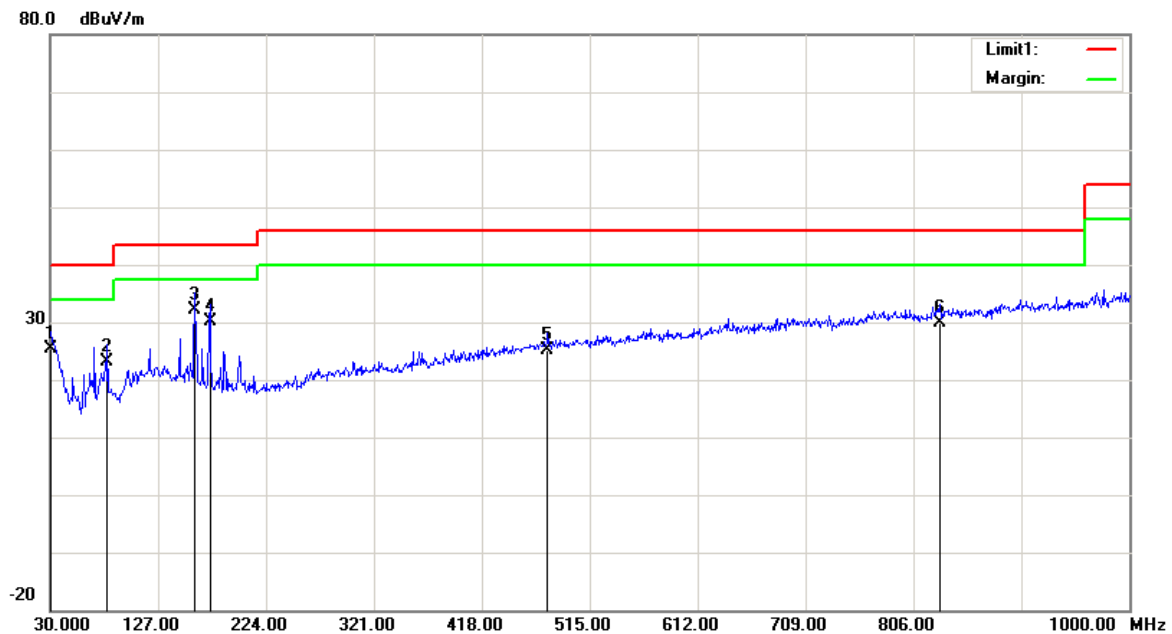

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	24.55	QP	0.85	25.40	40.00	14.60
81.4100	34.41	QP	-11.31	23.10	40.00	16.90
159.9800	38.03	QP	-5.83	32.20	43.50	11.30
173.5600	36.95	QP	-6.85	30.10	43.50	13.40
477.1700	25.16	QP	-0.06	25.10	46.00	20.90
830.2500	24.35	QP	5.65	30.00	46.00	16.00

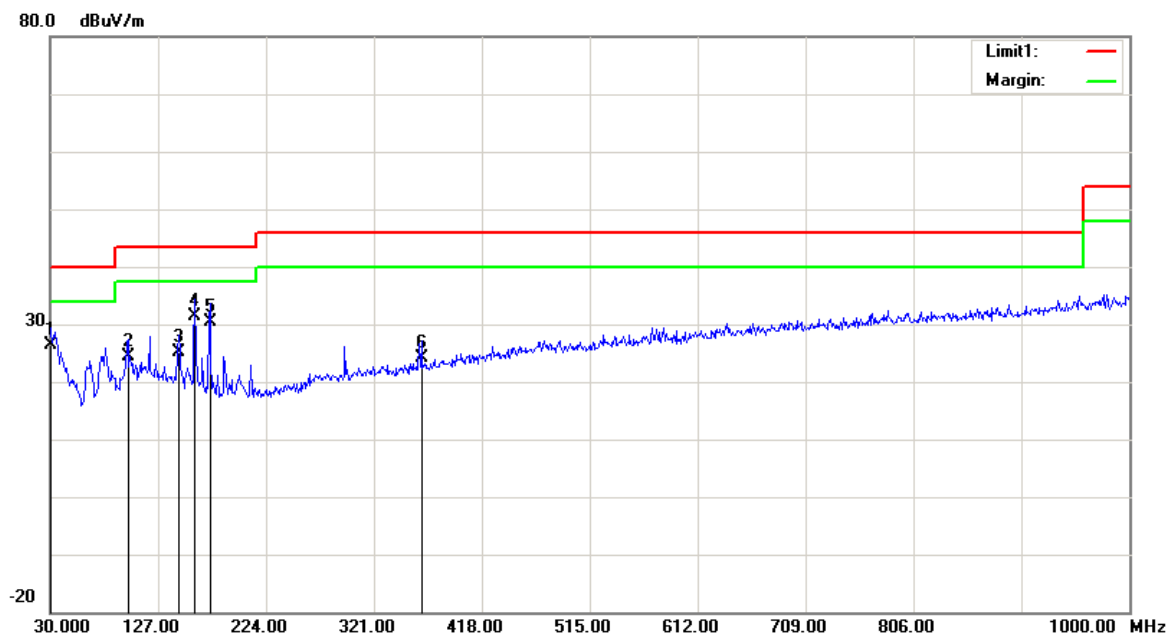Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	24.76	QP	1.54	26.30	40.00	13.70
99.8400	33.19	QP	-8.89	24.30	43.50	19.20
145.4300	31.09	QP	-5.99	25.10	43.50	18.40
159.9800	37.23	QP	-5.83	31.40	43.50	12.10
173.5600	37.35	QP	-6.85	30.50	43.50	13.00
363.6800	26.81	QP	-2.61	24.20	46.00	21.80

2) 1GHz-26.5GHz:*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	65.98	PK	H	24.82	3.34	0.00	94.14	N/A	N/A
2402.00	47.53	AV	H	24.82	3.34	0.00	75.69	N/A	N/A
2402.00	63.55	PK	V	24.82	3.34	0.00	91.71	N/A	N/A
2402.00	46.03	AV	V	24.82	3.34	0.00	74.19	N/A	N/A
2390.00	28.13	PK	H	24.80	3.33	0.00	56.26	74.00	17.74
2390.00	15.52	AV	H	24.80	3.33	0.00	43.65	54.00	10.35
4804.00	47.63	PK	H	29.71	4.58	27.36	54.56	74.00	19.44
4804.00	36.72	AV	H	29.71	4.58	27.36	43.65	54.00	10.35
7206.00	43.28	PK	H	33.93	5.59	27.19	55.61	74.00	18.39
7206.00	33.63	AV	H	33.93	5.59	27.19	45.96	54.00	8.04
Middle Channel: 2441 MHz									
2441.00	65.97	PK	H	24.89	3.36	0.00	94.22	N/A	N/A
2441.00	48.94	AV	H	24.89	3.36	0.00	77.19	N/A	N/A
2441.00	63.92	PK	V	24.89	3.36	0.00	92.17	N/A	N/A
2441.00	46.93	AV	V	24.89	3.36	0.00	75.18	N/A	N/A
4882.00	49.35	PK	H	29.86	4.56	27.56	56.21	74.00	17.79
4882.00	36.64	AV	H	29.86	4.56	27.56	43.50	54.00	10.50
7323.00	44.05	PK	H	34.12	5.69	27.26	56.60	74.00	17.40
7323.00	33.87	AV	H	34.12	5.69	27.26	46.42	54.00	7.58
High Channel: 2480 MHz									
2480.00	64.22	PK	H	24.96	3.38	0.00	92.56	N/A	N/A
2480.00	46.68	AV	H	24.96	3.38	0.00	75.02	N/A	N/A
2480.00	63.07	PK	V	24.96	3.38	0.00	91.41	N/A	N/A
2480.00	45.89	AV	V	24.96	3.38	0.00	74.23	N/A	N/A
2483.50	28.53	PK	H	24.97	3.38	0.00	56.88	74.00	17.12
2483.50	15.88	AV	H	24.97	3.38	0.00	44.23	54.00	9.77
4960.00	47.83	PK	H	30.02	4.58	27.37	55.06	74.00	18.94
4960.00	36.63	AV	H	30.02	4.58	27.37	43.86	54.00	10.14
7440.00	45.10	PK	H	34.30	5.79	27.22	57.97	74.00	16.03
7440.00	34.51	AV	H	34.30	5.79	27.22	47.38	54.00	6.62

EDR Mode ($\pi/4$ -DQPSK):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	64.40	PK	H	24.82	3.34	0.00	92.56	N/A	N/A
2402.00	46.68	AV	H	24.82	3.34	0.00	74.84	N/A	N/A
2402.00	62.82	PK	V	24.82	3.34	0.00	90.98	N/A	N/A
2402.00	45.49	AV	V	24.82	3.34	0.00	73.65	N/A	N/A
2390.00	28.15	PK	H	24.80	3.33	0.00	56.28	74.00	17.72
2390.00	15.34	AV	H	24.80	3.33	0.00	43.47	54.00	10.53
4804.00	47.95	PK	H	29.71	4.58	27.36	54.88	74.00	19.12
4804.00	38.02	AV	H	29.71	4.58	27.36	44.95	54.00	9.05
7206.00	44.68	PK	H	33.93	5.59	27.19	57.01	74.00	16.99
7206.00	33.40	AV	H	33.93	5.59	27.19	45.73	54.00	8.27
Middle Channel: 2441 MHz									
2441.00	64.97	PK	H	24.89	3.36	0.00	93.22	N/A	N/A
2441.00	47.64	AV	H	24.89	3.36	0.00	75.89	N/A	N/A
2441.00	62.72	PK	V	24.89	3.36	0.00	90.97	N/A	N/A
2441.00	45.82	AV	V	24.89	3.36	0.00	74.07	N/A	N/A
4882.00	48.95	PK	H	29.86	4.56	27.56	55.81	74.00	18.19
4882.00	36.58	AV	H	29.86	4.56	27.56	43.44	54.00	10.56
7323.00	43.54	PK	H	34.12	5.69	27.26	56.09	74.00	17.91
7323.00	33.81	AV	H	34.12	5.69	27.26	46.36	54.00	7.64
High Channel: 2480 MHz									
2480.00	63.51	PK	H	24.96	3.38	0.00	91.85	N/A	N/A
2480.00	45.32	AV	H	24.96	3.38	0.00	73.66	N/A	N/A
2480.00	61.02	PK	V	24.96	3.38	0.00	89.36	N/A	N/A
2480.00	43.25	AV	V	24.96	3.38	0.00	71.59	N/A	N/A
2483.50	28.67	PK	H	24.97	3.38	0.00	57.02	74.00	16.98
2483.50	15.79	AV	H	24.97	3.38	0.00	44.14	54.00	9.86
4960.00	47.47	PK	H	30.02	4.58	27.37	54.70	74.00	19.30
4960.00	37.21	AV	H	30.02	4.58	27.37	44.44	54.00	9.56
7440.00	45.08	PK	H	34.30	5.79	27.22	57.95	74.00	16.05
7440.00	33.89	AV	H	34.30	5.79	27.22	46.76	54.00	7.24

EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	64.09	PK	H	24.82	3.34	0.00	92.25	N/A	N/A
2402.00	45.79	AV	H	24.82	3.34	0.00	73.95	N/A	N/A
2402.00	60.97	PK	V	24.82	3.34	0.00	89.13	N/A	N/A
2402.00	42.35	AV	V	24.82	3.34	0.00	70.51	N/A	N/A
2390.00	28.34	PK	H	24.80	3.33	0.00	56.47	74.00	17.53
2390.00	15.25	AV	H	24.80	3.33	0.00	43.38	54.00	10.62
4804.00	48.65	PK	H	29.71	4.58	27.36	55.58	74.00	18.42
4804.00	38.28	AV	H	29.71	4.58	27.36	45.21	54.00	8.79
7206.00	43.45	PK	H	33.93	5.59	27.19	55.78	74.00	18.22
7206.00	33.59	AV	H	33.93	5.59	27.19	45.92	54.00	8.08
Middle Channel: 2441 MHz									
2441.00	64.85	PK	H	24.89	3.36	0.00	93.10	N/A	N/A
2441.00	46.78	AV	H	24.89	3.36	0.00	75.03	N/A	N/A
2441.00	63.72	PK	V	24.89	3.36	0.00	91.97	N/A	N/A
2441.00	45.32	AV	V	24.89	3.36	0.00	73.57	N/A	N/A
4882.00	48.95	PK	H	29.86	4.56	27.56	55.81	74.00	18.19
4882.00	37.59	AV	H	29.86	4.56	27.56	44.45	54.00	9.55
7323.00	44.02	PK	H	34.12	5.69	27.26	56.57	74.00	17.43
7323.00	33.20	AV	H	34.12	5.69	27.26	45.75	54.00	8.25
High Channel: 2480 MHz									
2480.00	65.26	PK	H	24.96	3.38	0.00	93.60	N/A	N/A
2480.00	46.82	AV	H	24.96	3.38	0.00	75.16	N/A	N/A
2480.00	62.99	PK	V	24.96	3.38	0.00	91.33	N/A	N/A
2480.00	44.92	AV	V	24.96	3.38	0.00	73.26	N/A	N/A
2483.50	28.64	PK	H	24.97	3.38	0.00	56.99	74.00	17.01
2483.50	15.47	AV	H	24.97	3.38	0.00	43.82	54.00	10.18
4960.00	47.99	PK	H	30.02	4.58	27.37	55.22	74.00	18.78
4960.00	36.59	AV	H	30.02	4.58	27.37	43.82	54.00	10.18
7440.00	44.22	PK	H	34.30	5.79	27.22	57.09	74.00	16.91
7440.00	33.36	AV	H	34.30	5.79	27.22	46.23	54.00	7.77




Worst plots(GFSK High channel)
Horizontal

Fundamental
Test with Band
Rejection Filter

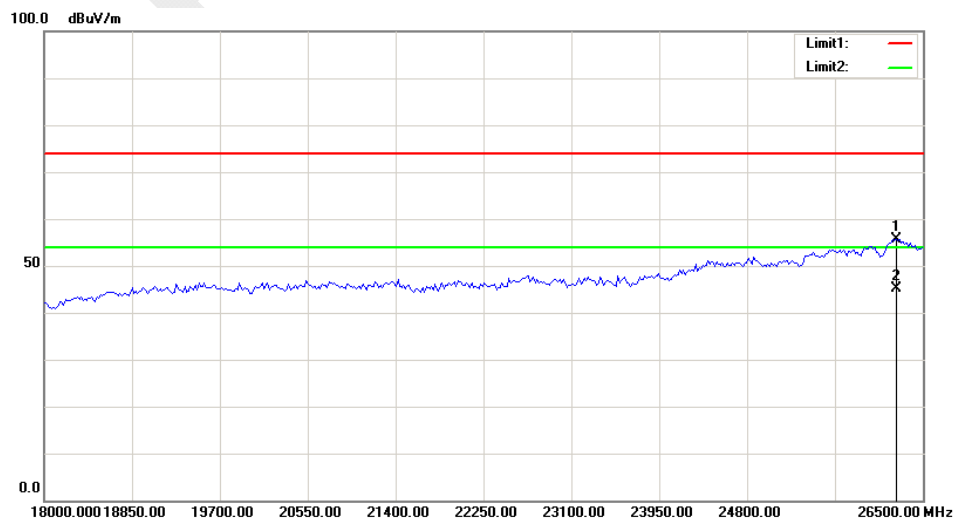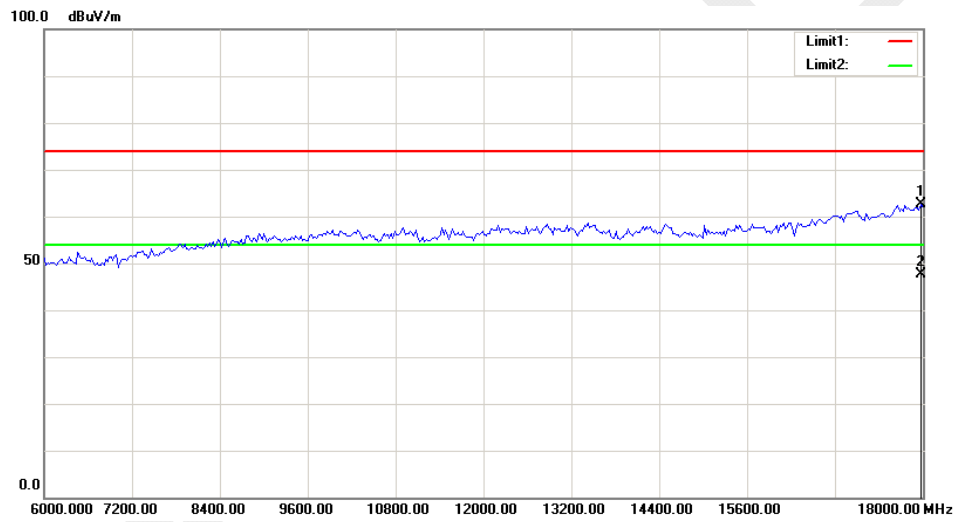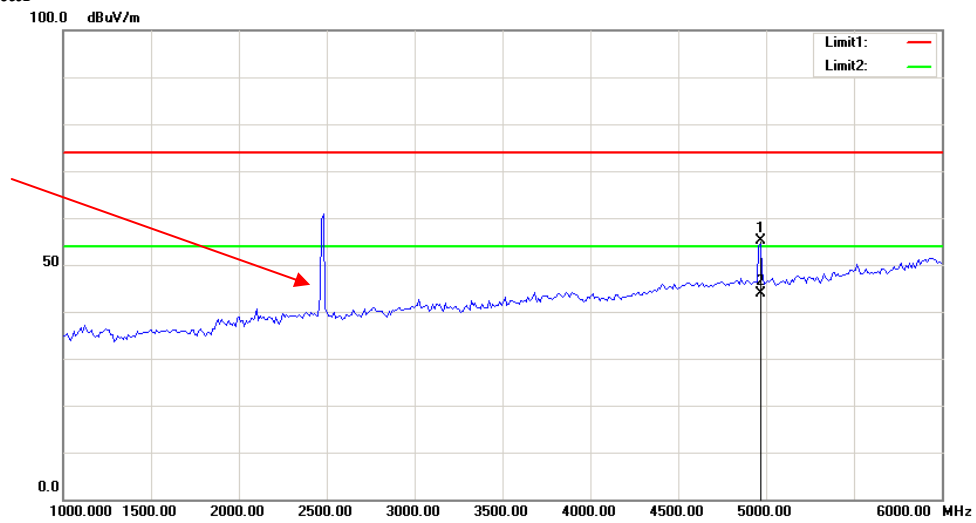

Vertical

Fundamental
Test with Band
Rejection Filter

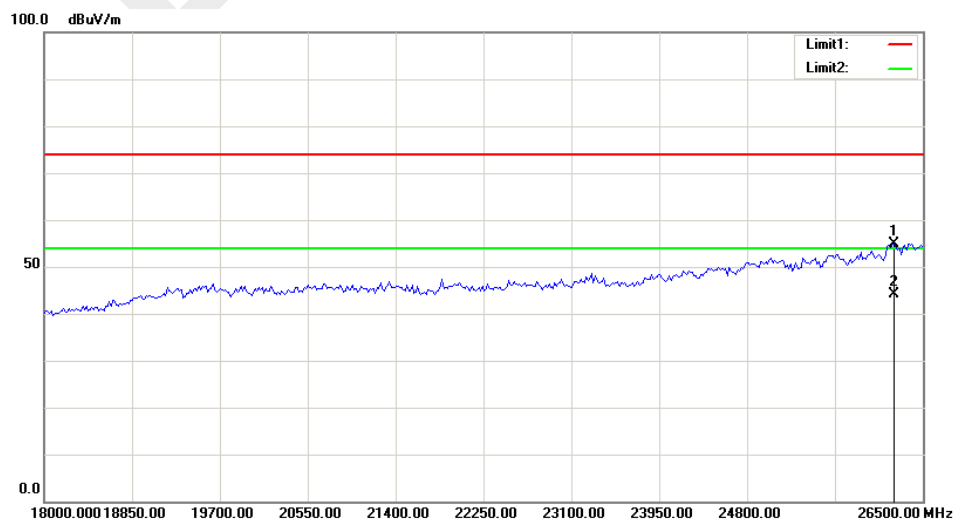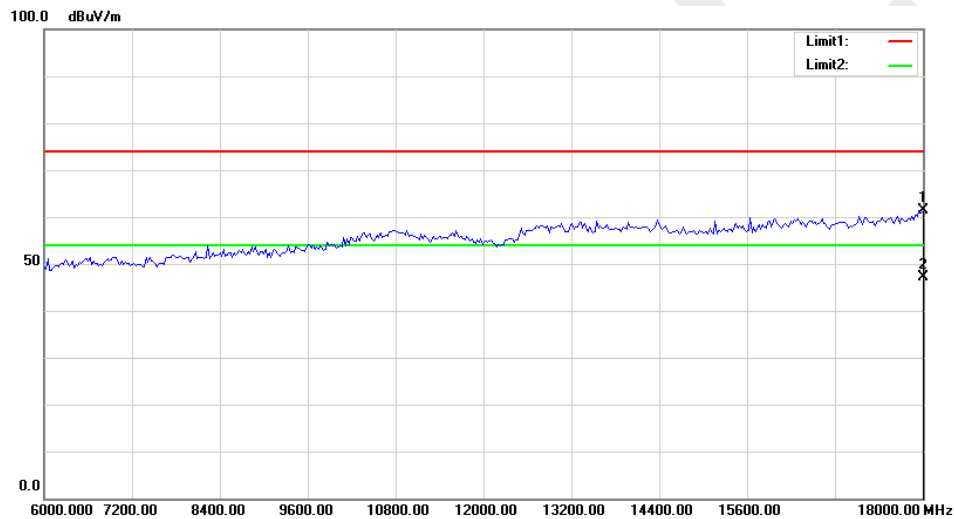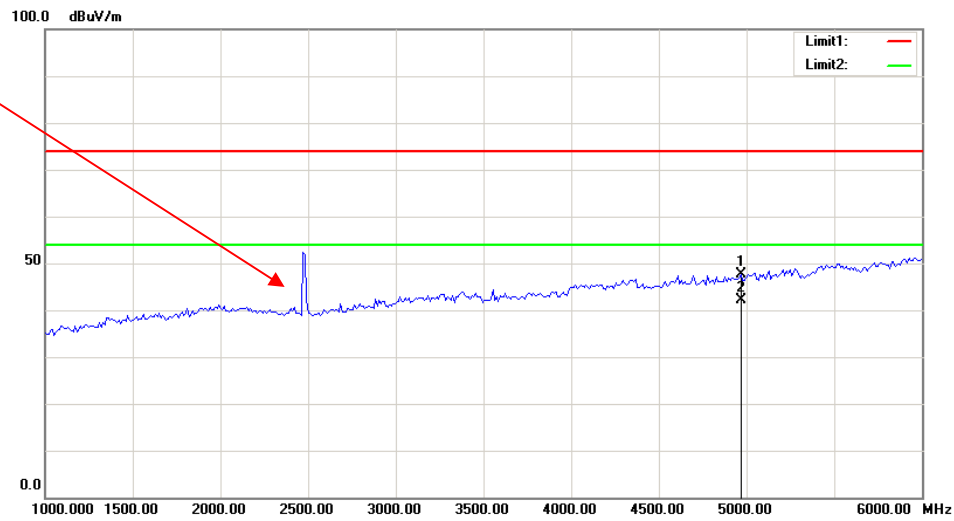

FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 b) - CHANNEL SEPARATION TEST**Applicable Standard**

According to FCC §15.247(a) (1), RSS-247 Clause 5.1 b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Tiago Huang on 2018-07-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.000	0.62
	Middle	2441	1.000	0.62
	High	2480	1.004	0.62
EDR ($\pi/4$ -DQPSK)	Low	2402	1.000	0.83
	Middle	2441	1.000	0.84
	High	2480	0.996	0.84
EDR (8-DPSK)	Low	2402	1.000	0.84
	Middle	2441	1.000	0.86
	High	2480	1.004	0.84


Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

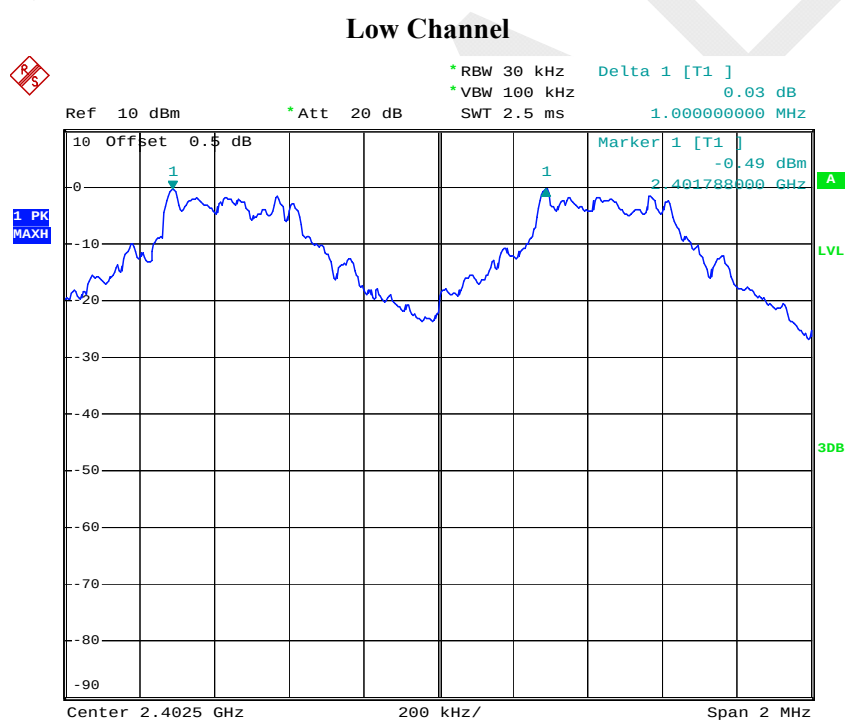


Date: 12.JUL.2018 23:08:23

Middle Channel

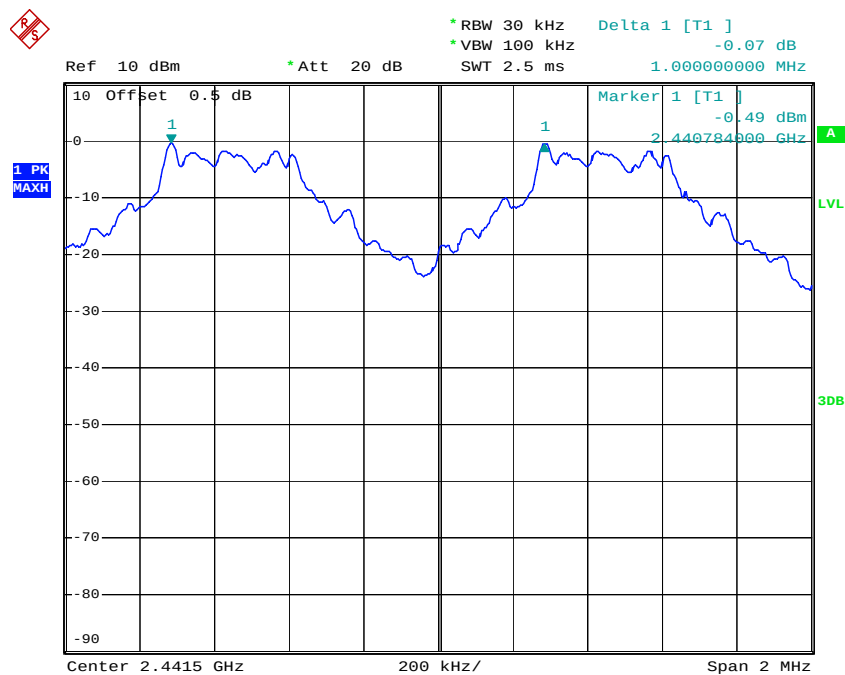

Date: 12.JUL.2018 23:09:36


High Channel

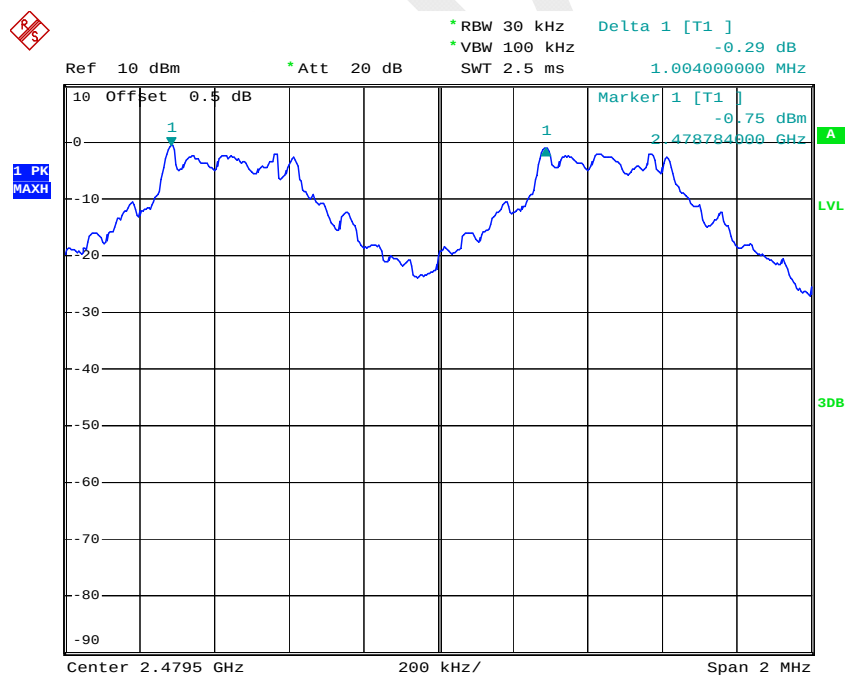

Date: 12.JUL.2018 23:10:30


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

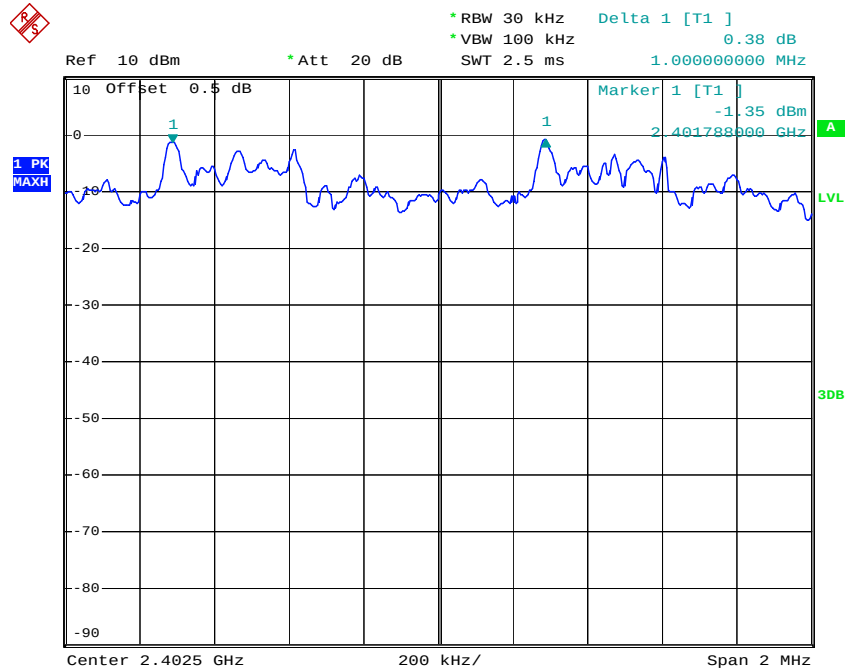


Date: 12.JUL.2018 23:20:45

Middle Channel

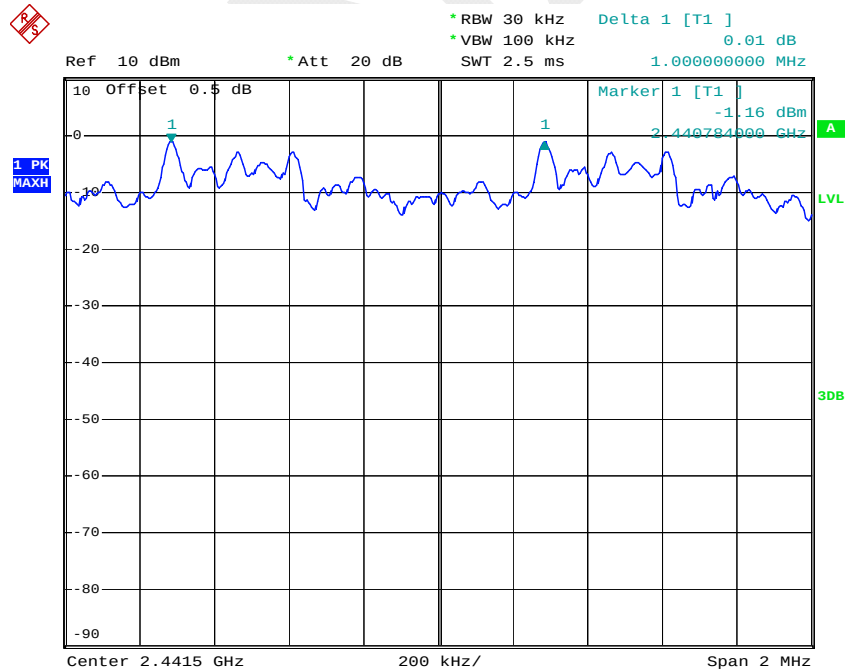

Date: 12.JUL.2018 23:21:45


High Channel

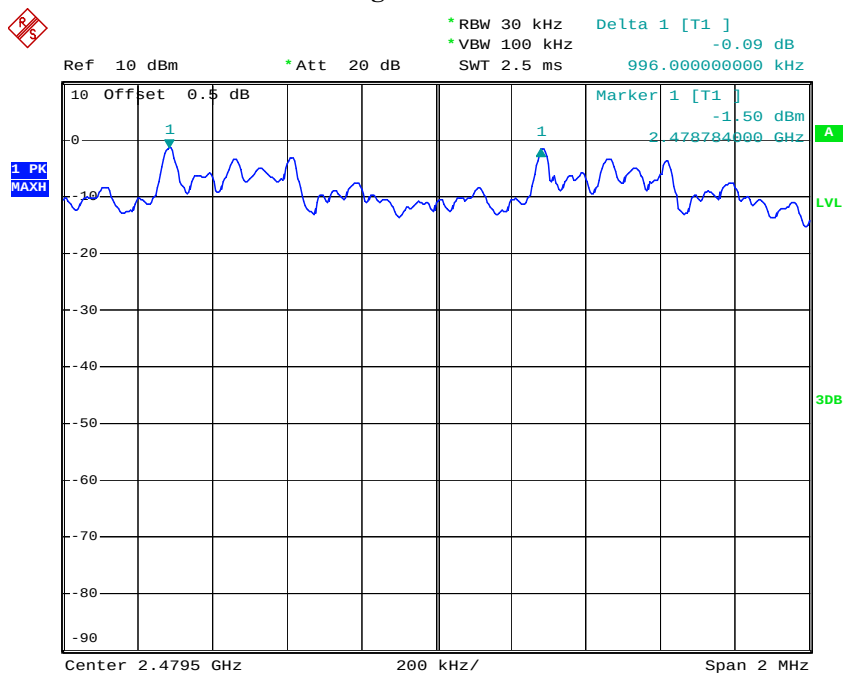

Date: 12.JUL.2018 23:23:21


EDR Mode (8-DPSK):

Low Channel

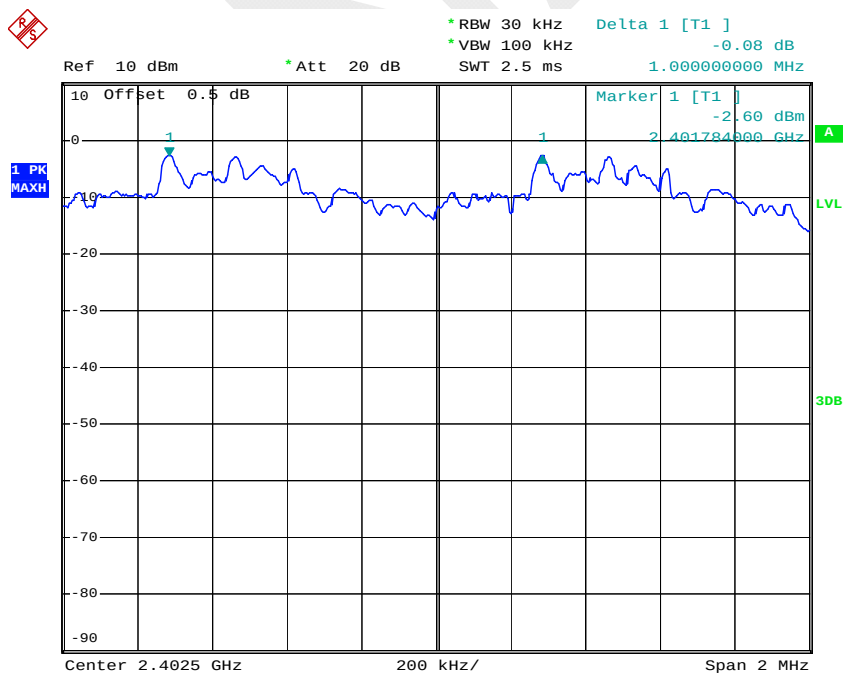


Date: 12.JUL.2018 23:25:08

Middle Channel

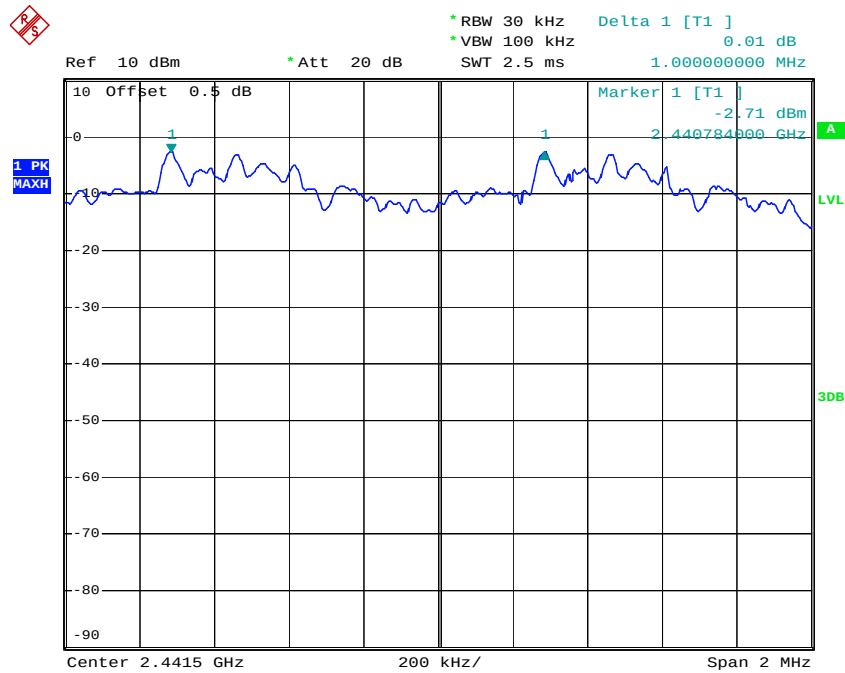

Date: 12.JUL.2018 23:26:38

High Channel

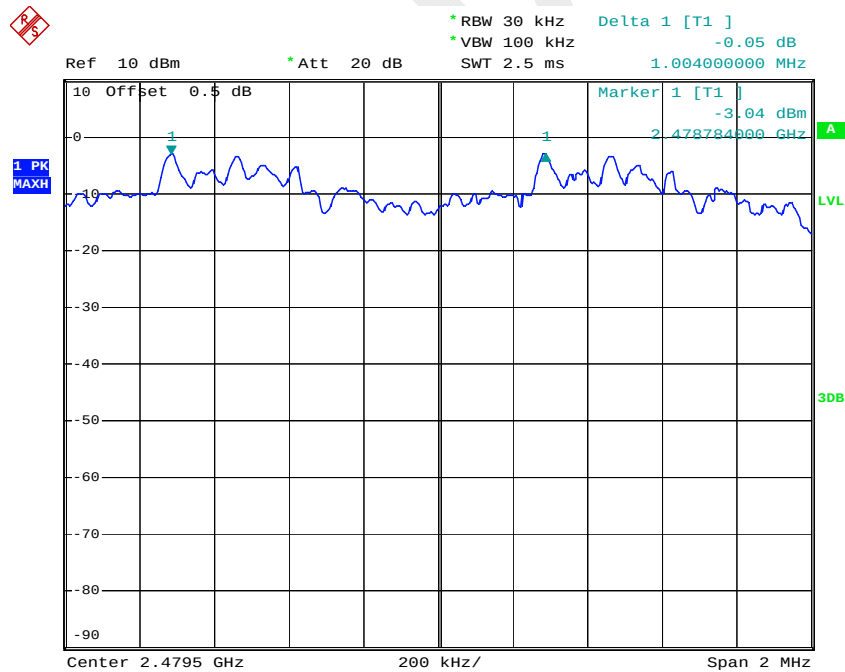

Date: 12.JUL.2018 23:27:53

RSS-247 CLUASE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH TESTING

Applicable Standard

According to FCC §15.247(a) (1)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1 b):

- b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

According to RSS-Gen Clause 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Tiago Huang on 2018-07-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% occupied Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.928	0.848
	Middle	2441	0.936	0.836
	High	2480	0.932	0.840
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.248	1.296
	Middle	2441	1.254	1.236
	High	2480	1.254	1.230
EDR Mode (8DPSK)	Low	2402	1.254	1.254
	Middle	2441	1.284	1.218
	High	2480	1.260	1.206


20dB Bandwidth:

BDR Mode (GFSK):

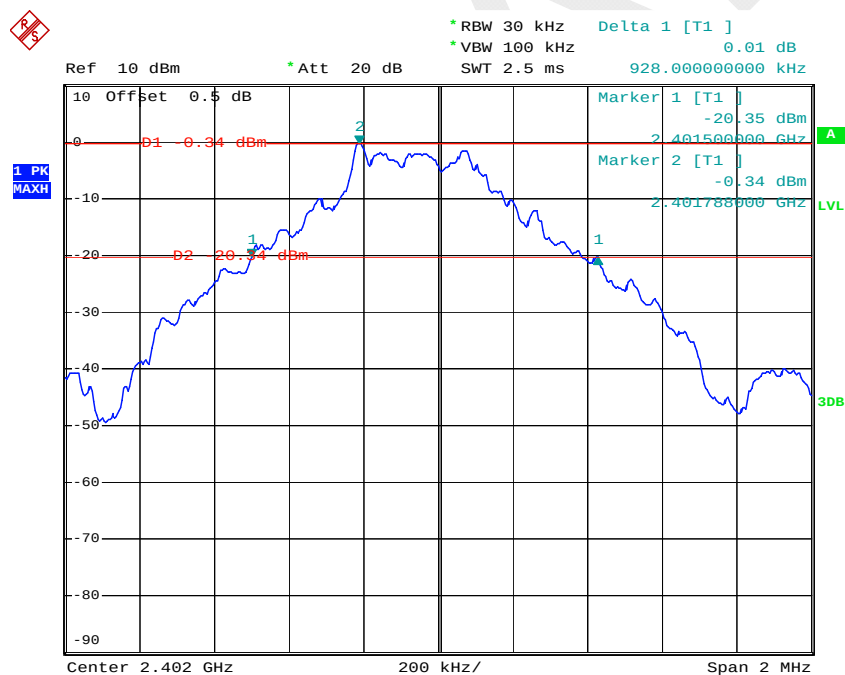Low Channel


Date: 12 . JUL . 2018 22:47:30

Middle Channel

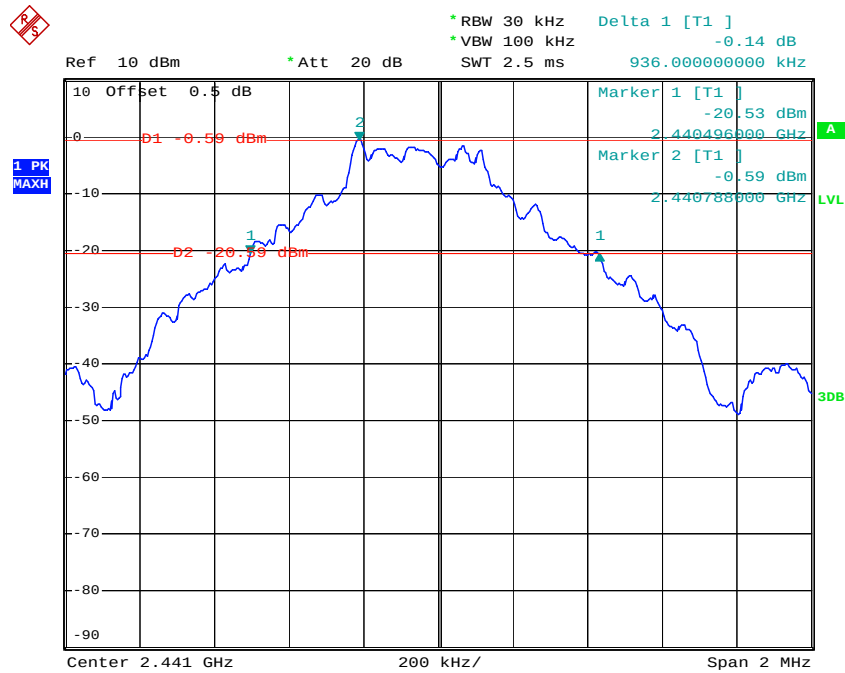


Date: 12.JUL.2018 22:50:32


High Channel

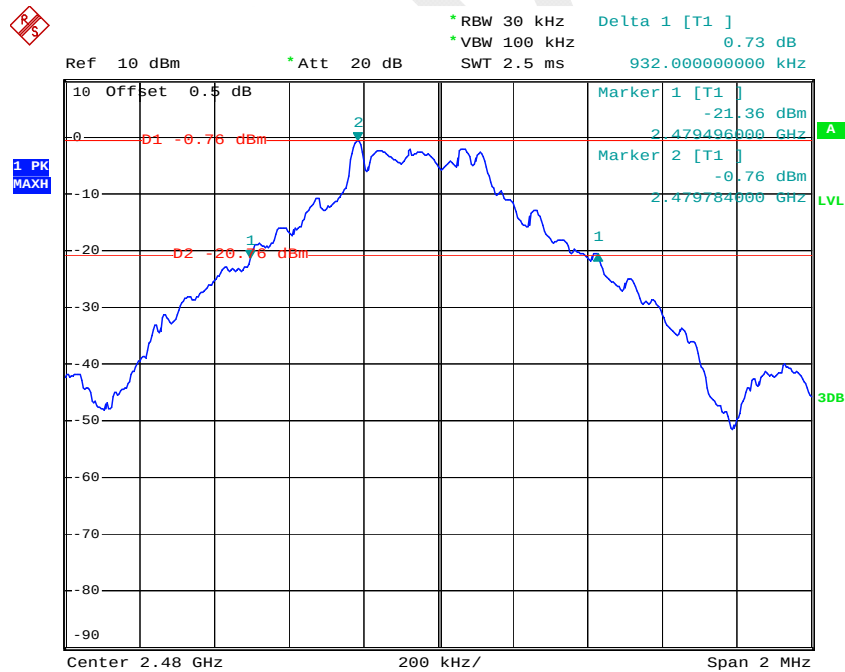

Date: 12.JUL.2018 22:56:32

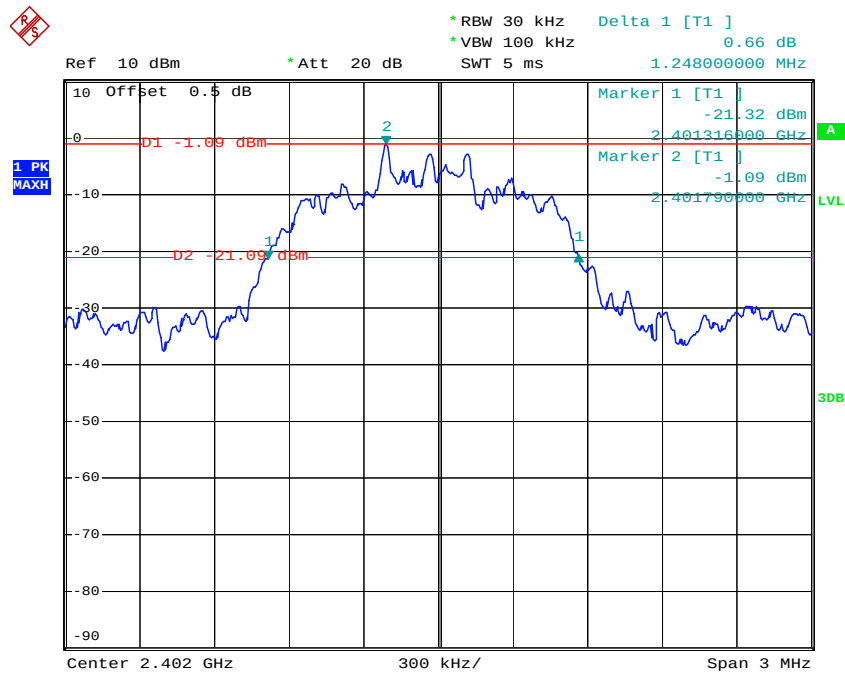
*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 12.JUL.2018 22:58:32

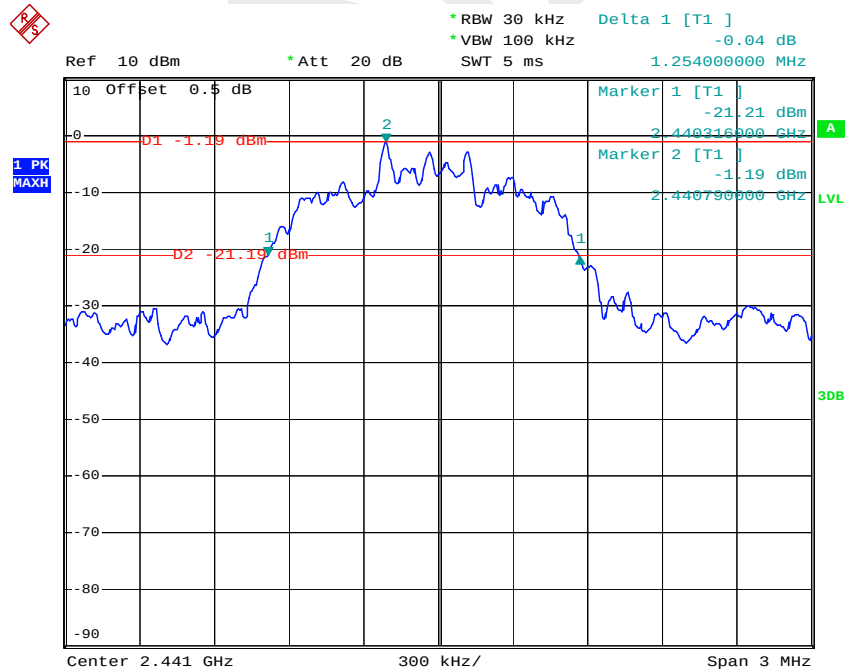Middle Channel

Date: 12.JUL.2018 23:00:02


High Channel

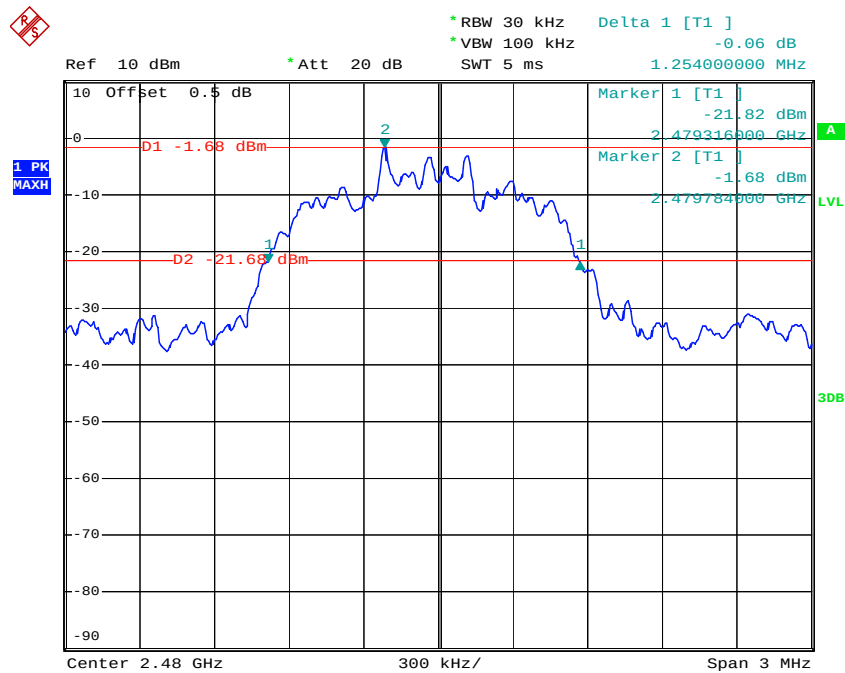

Date: 12.JUL.2018 23:01:22


EDR Mode (8-DPSK):

Low Channel

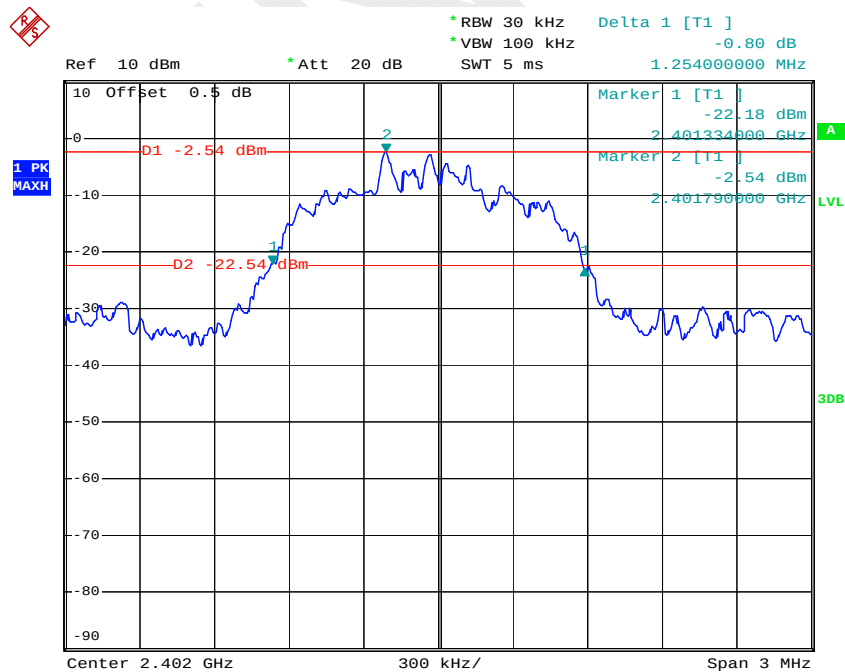


Date: 12.JUL.2018 23:03:26

Middle Channel

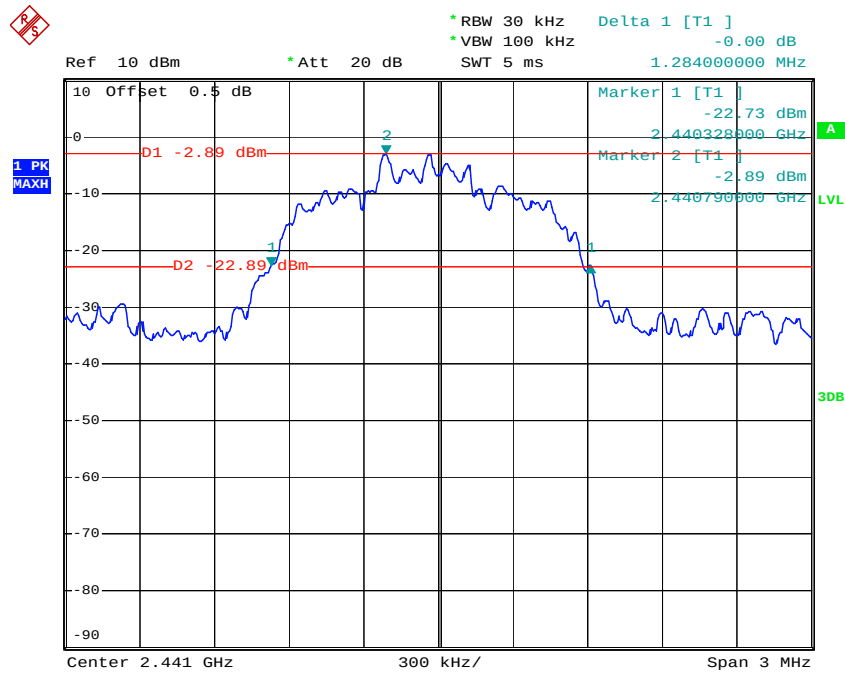


Date: 12.JUL.2018 23:04:52


High Channel

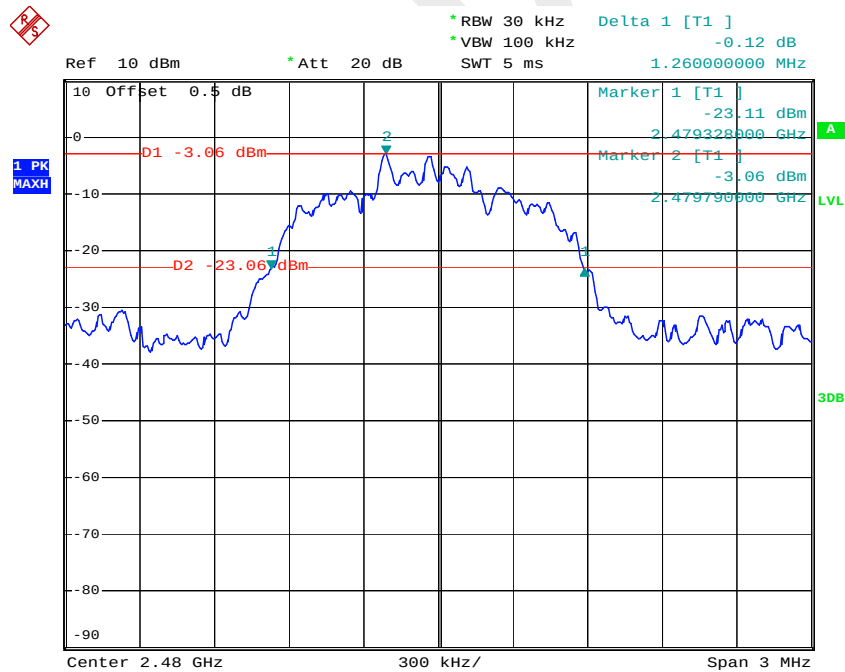

Date: 12.JUL.2018 23:06:04

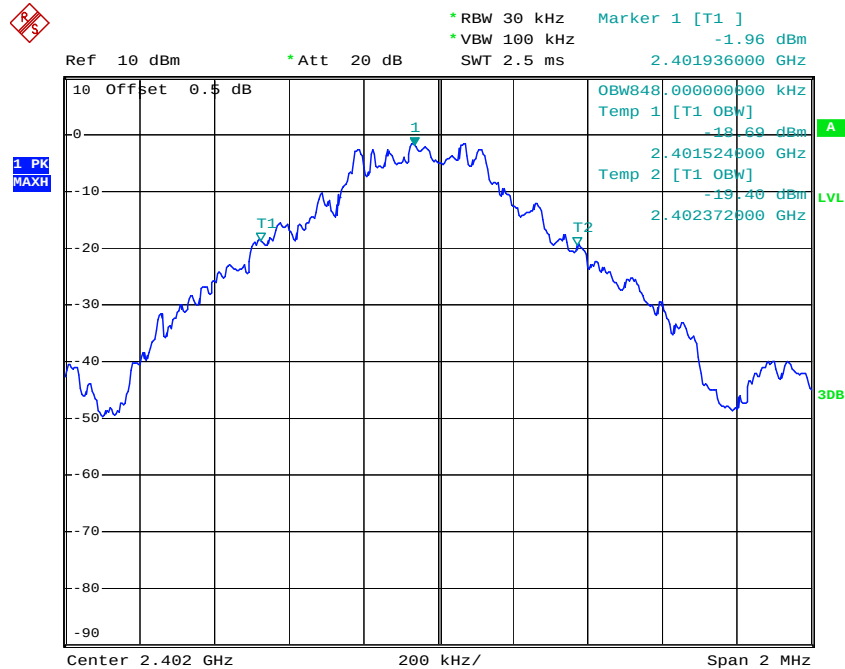
99% Occupied Bandwidth:*BDR Mode (GFSK):***Low Channel**

Date: 12.JUL.2018 22:47:46

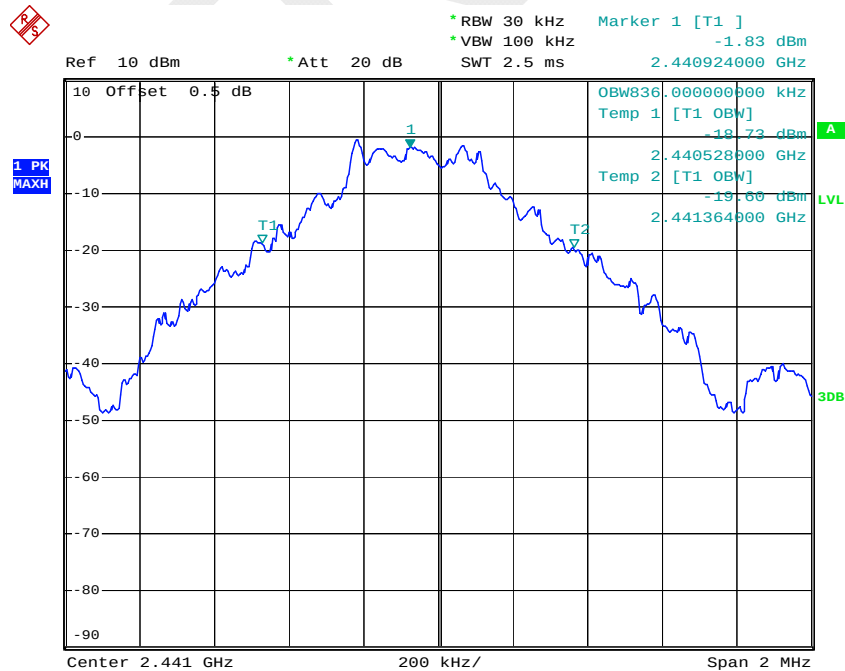Middle Channel

Date: 12.JUL.2018 22:50:48


High Channel

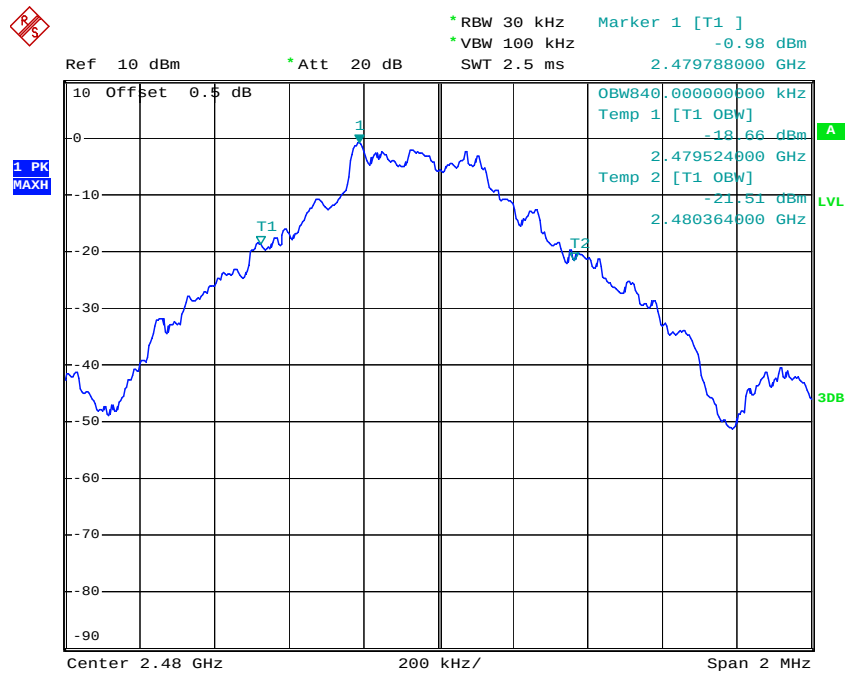

Date: 12.JUL.2018 22:56:49


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

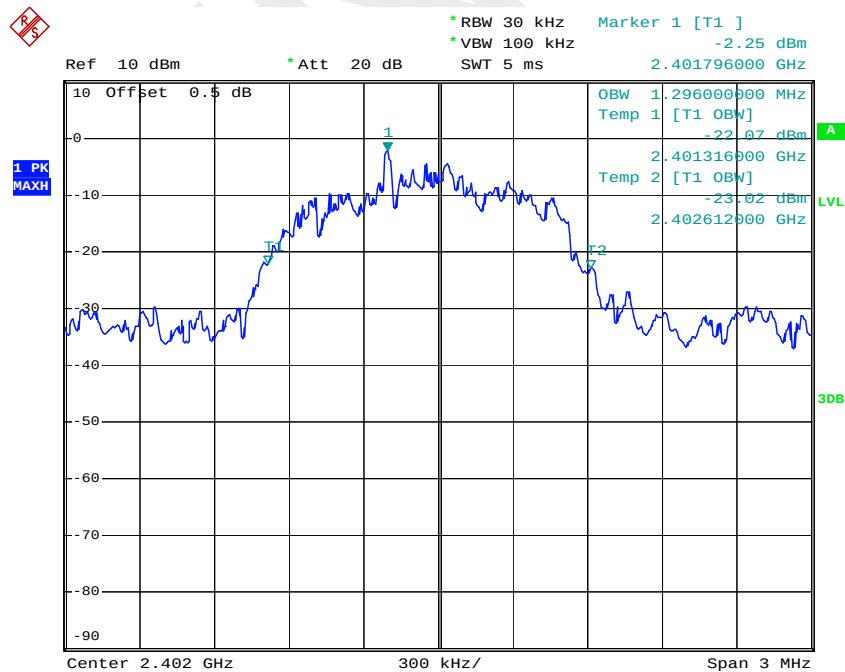


Date: 12.JUL.2018 22:58:47

Middle Channel

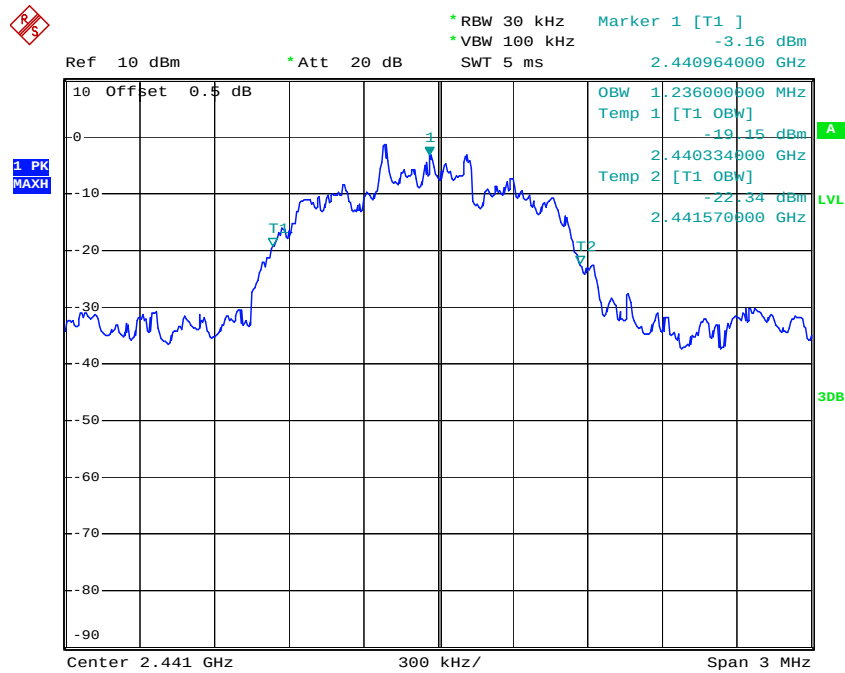

Date: 12.JUL.2018 23:00:20


High Channel

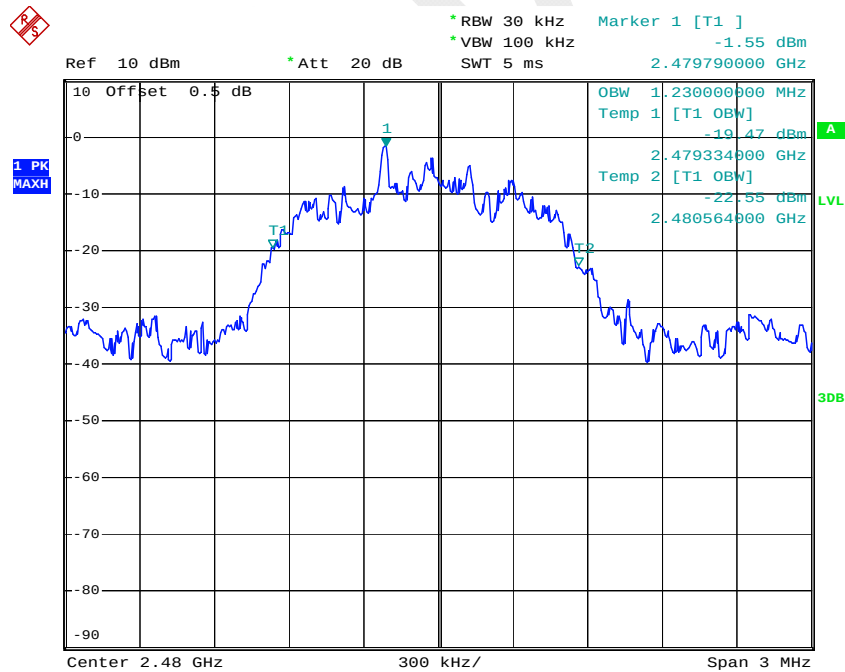

Date: 12.JUL.2018 23:01:35


EDR Mode (8DPSK):

Low Channel

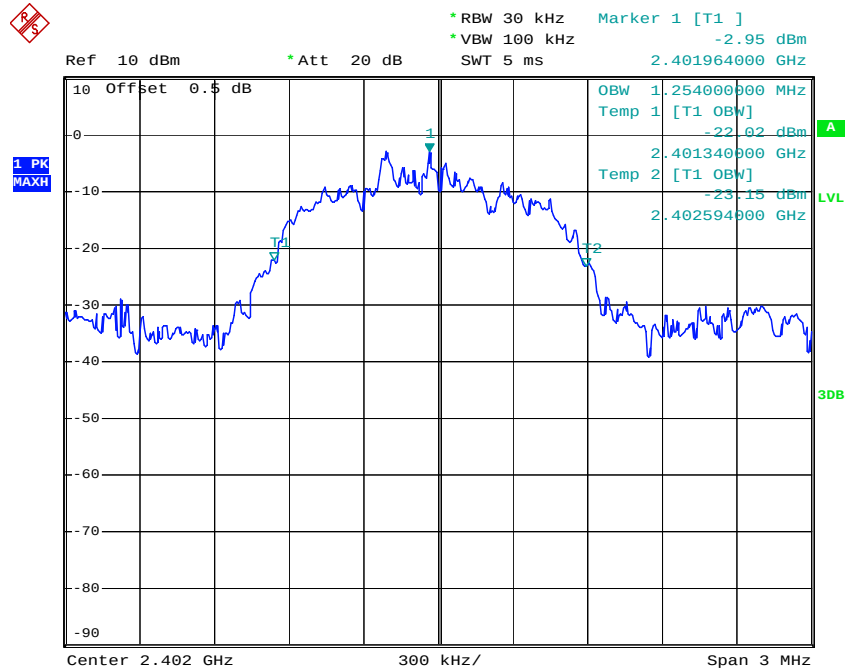


Date: 12.JUL.2018 23:03:40

Middle Channel

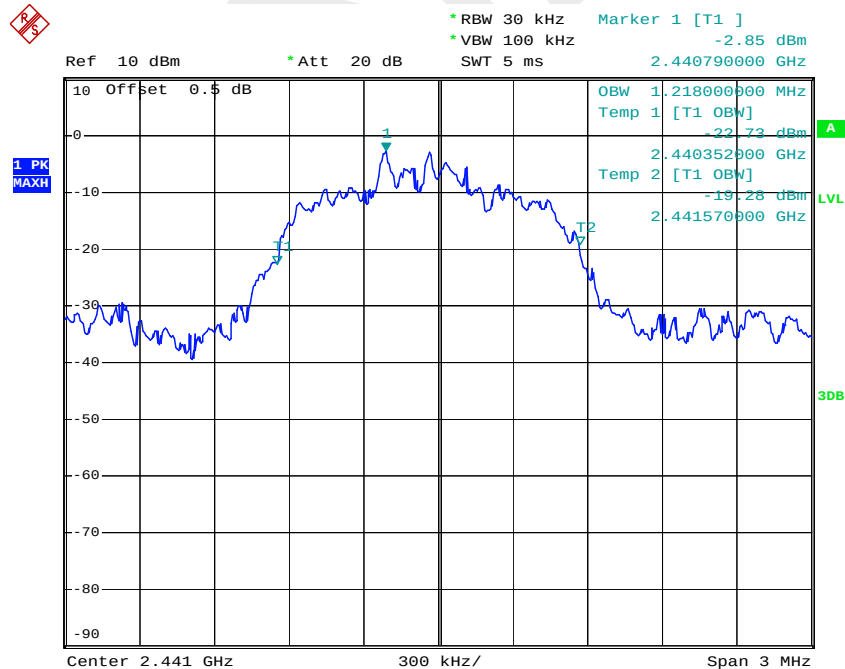

Date: 12.JUL.2018 23:05:08

High Channel

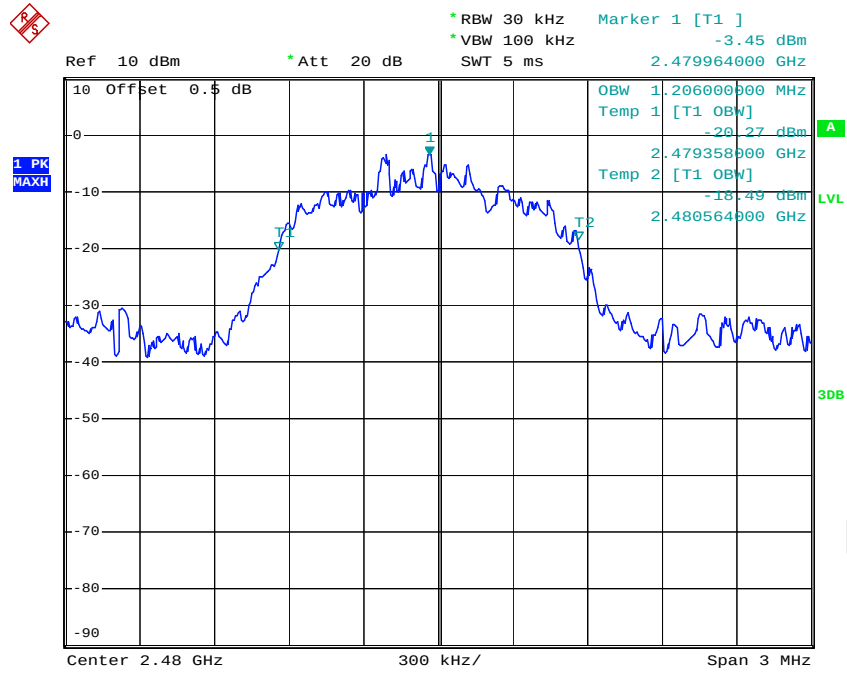

Date: 12.JUL.2018 23:06:20

FCC §15.247(a) (1) (iii)& RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii), RSS-247 Clause 5.1 d)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Tiago Huang on 2018-07-12.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

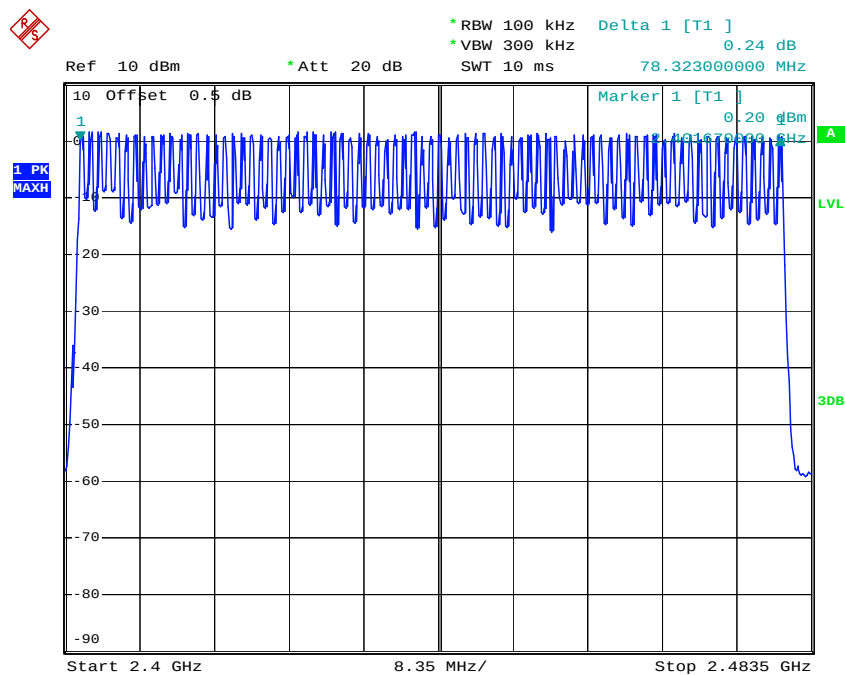


Date: 12. JUL. 2018 23:33:52

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

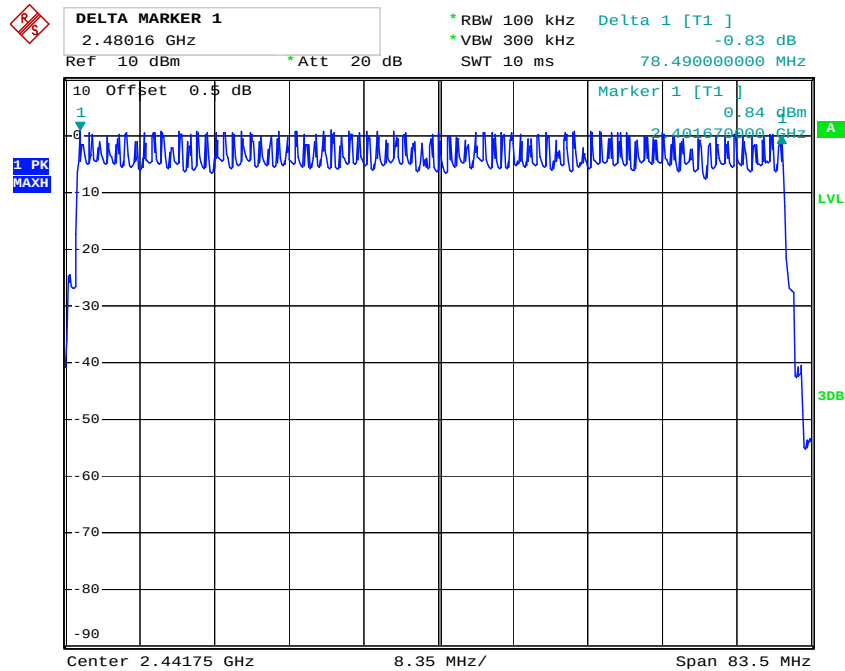


Date: 12.JUL.2018 23:51:20

EDR Mode (8DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

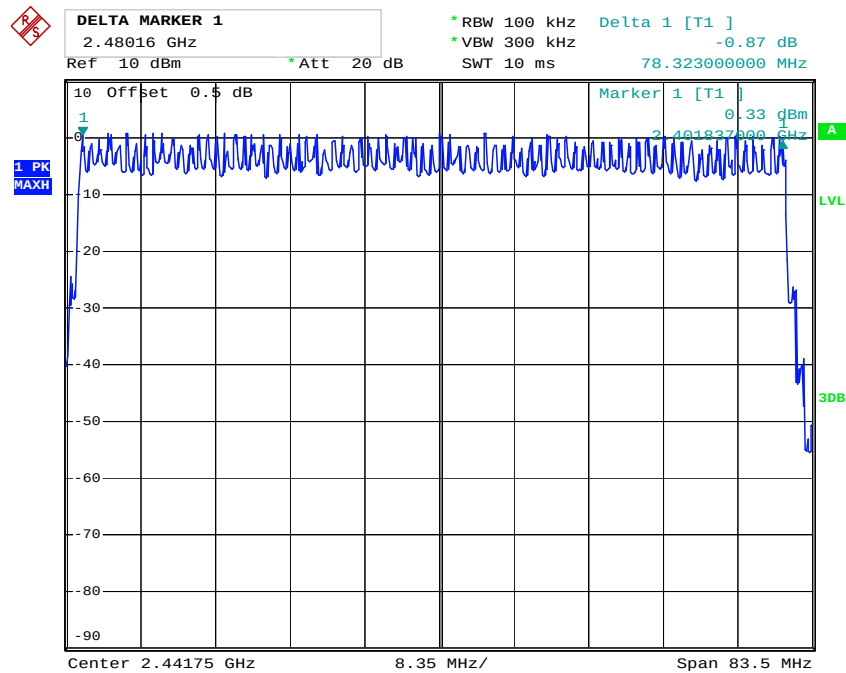

Date: 12.JUL.2018 23:57:14

FCC §15.247(a) (1) (iii)& RSS-247 Clause 5.1 d) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

According to FCC §15.247(a) (1) (iii), RSS-247 Clause 5.1 d)

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	65 %
ATM Pressure:	100 kPa


* The testing was performed by Tiago Huang on 2018-07-13.

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.396	0.127	0.4	Compliance
	Middle	0.396	0.127	0.4	Compliance
	High	0.396	0.127	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.670	0.267	0.4	Compliance
	Middle	1.670	0.267	0.4	Compliance
	High	1.670	0.267	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.920	0.311	0.4	Compliance
	Middle	2.920	0.311	0.4	Compliance
	High	2.930	0.313	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

DH1: Low Channel

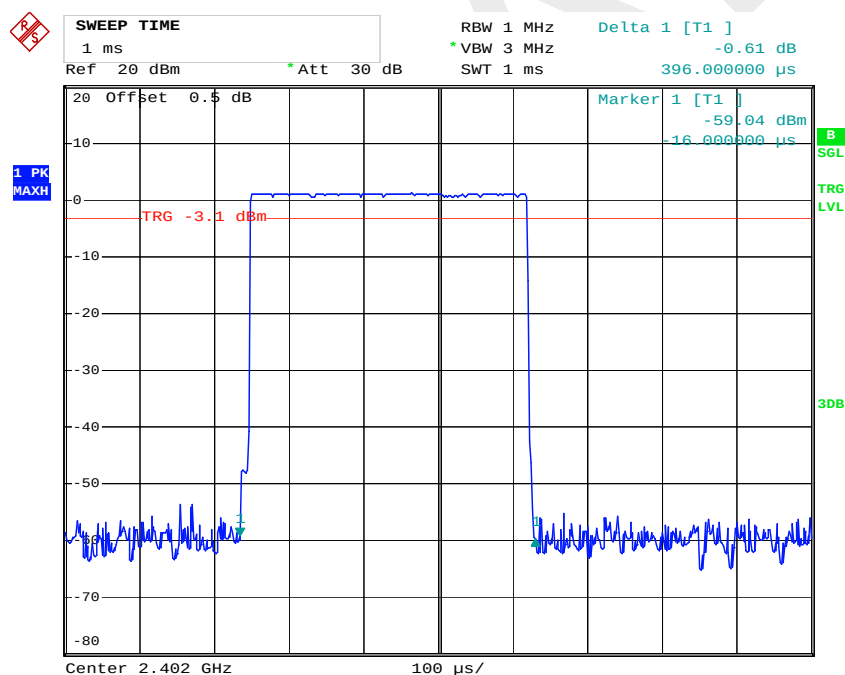


Date: 13.JUL.2018 00:08:11

DH1: Middle Channel

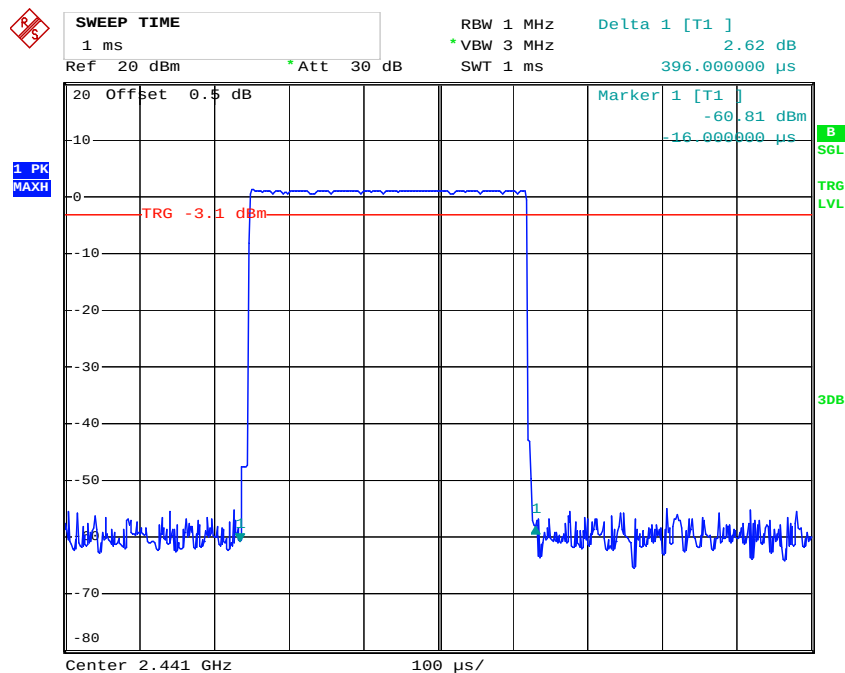


Date: 13.JUL.2018 00:08:33

DH1: High Channel

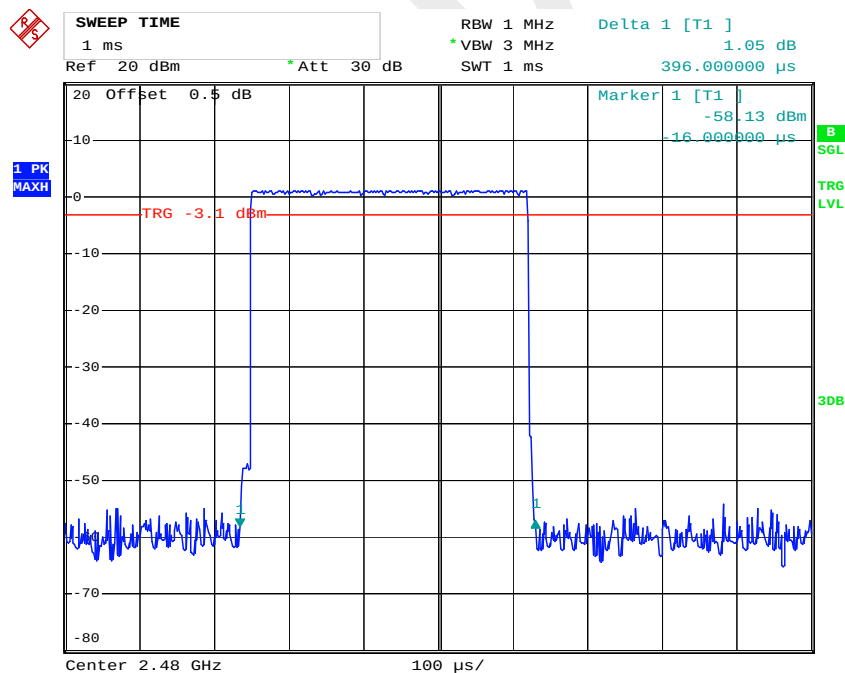


Date: 13.JUL.2018 00:08:48

DH3: Low Channel

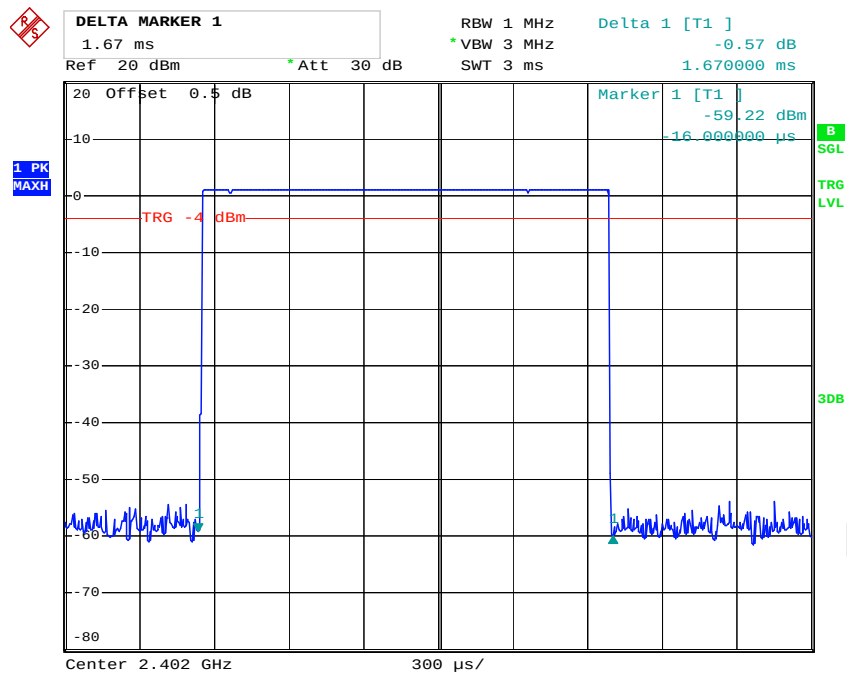


Date: 13.JUL.2018 00:12:58

DH3: Middle Channel

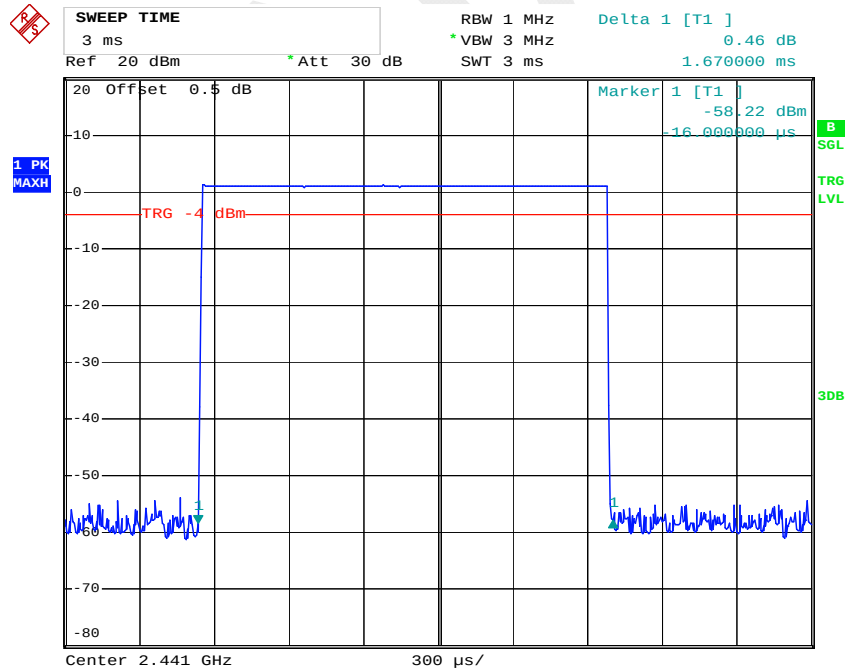


Date: 13.JUL.2018 00:13:10

DH3: High Channel

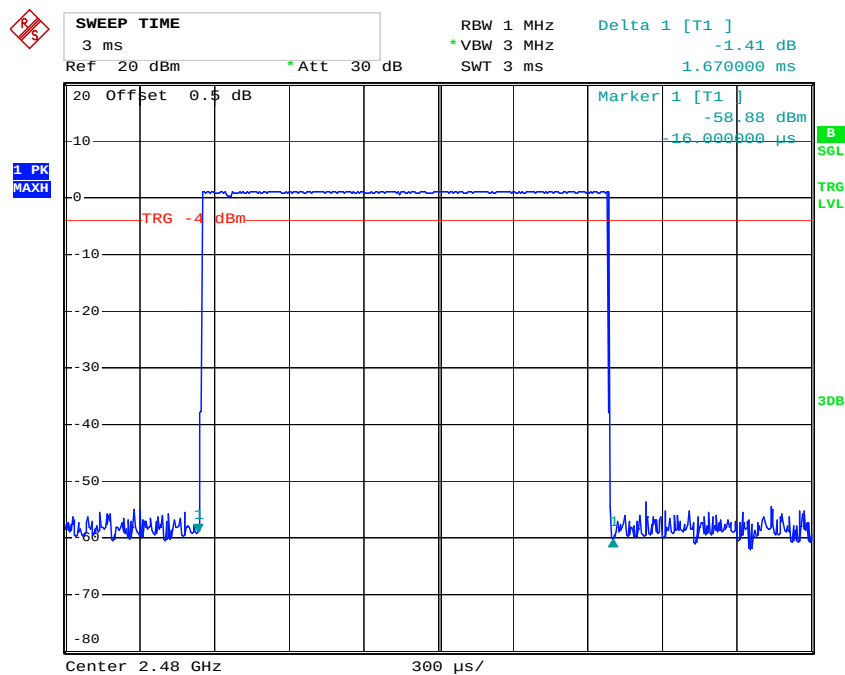


Date: 13.JUL.2018 00:13:28

DH5: Low Channel

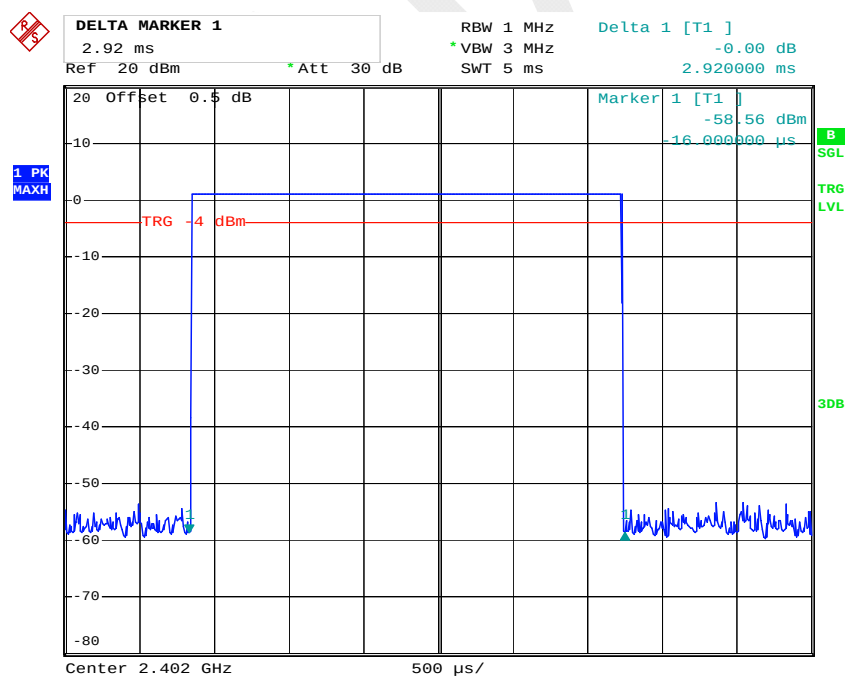


Date: 13.JUL.2018 00:17:15

DH5: Middle Channel

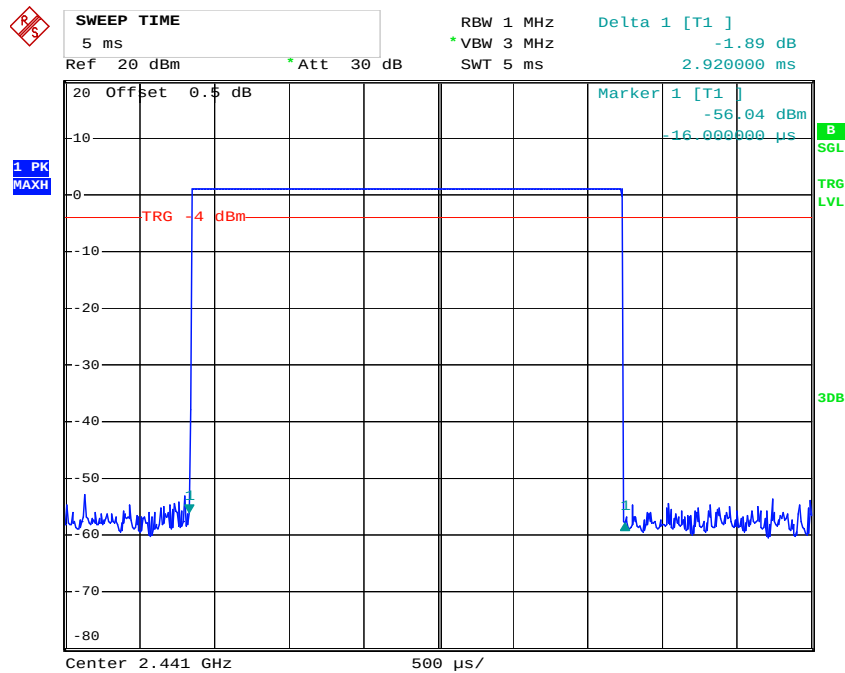

Date: 13.JUL.2018 00:17:26

DH5: High Channel

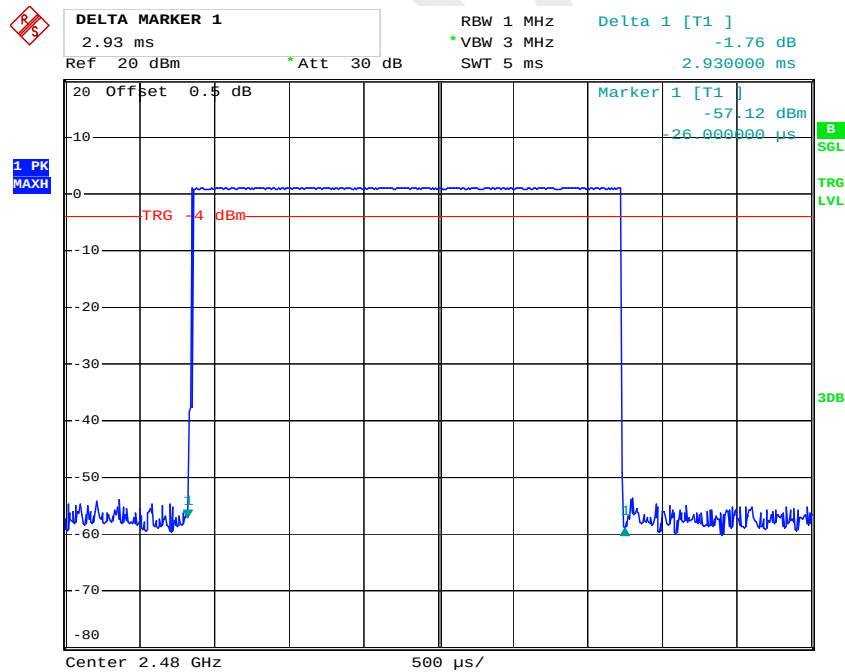


Date: 13.JUL.2018 00:17:40

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.402	0.129	0.4	Compliance
	Middle	0.402	0.129	0.4	Compliance
	High	0.402	0.129	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.670	0.267	0.4	Compliance
	Middle	1.670	0.267	0.4	Compliance
	High	1.670	0.267	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.920	0.311	0.4	Compliance
	Middle	2.930	0.313	0.4	Compliance
	High	2.930	0.313	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

2DH1: Low Channel

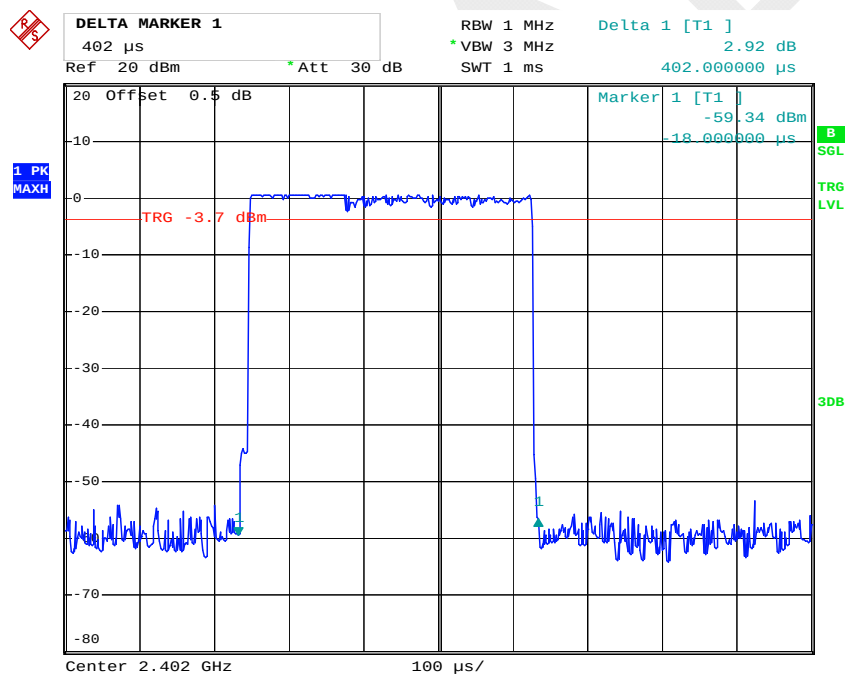


Date: 13.JUL.2018 00:09:35

2DH1: Middle Channel

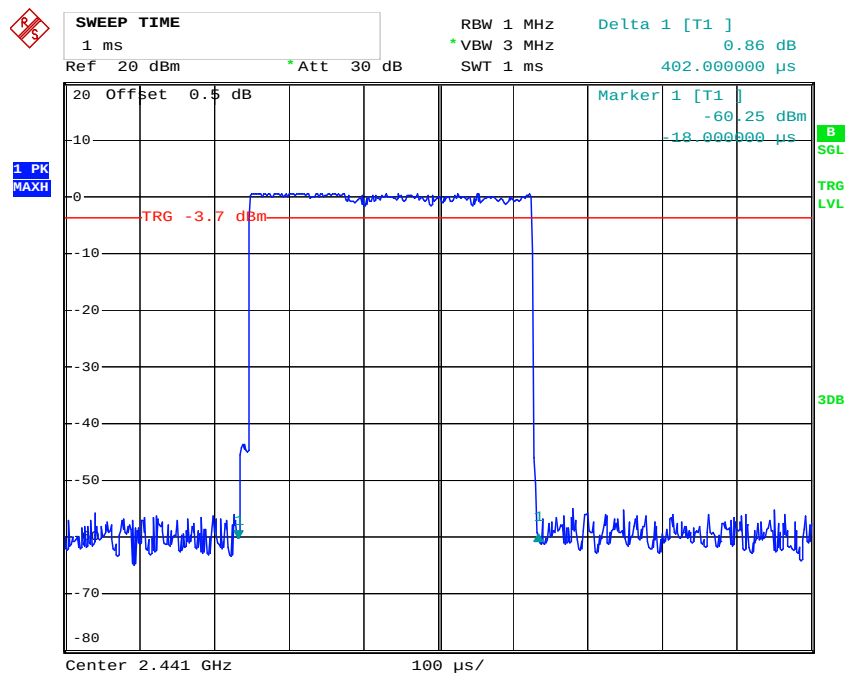


Date: 13.JUL.2018 00:09:51


2DH1: High Channel

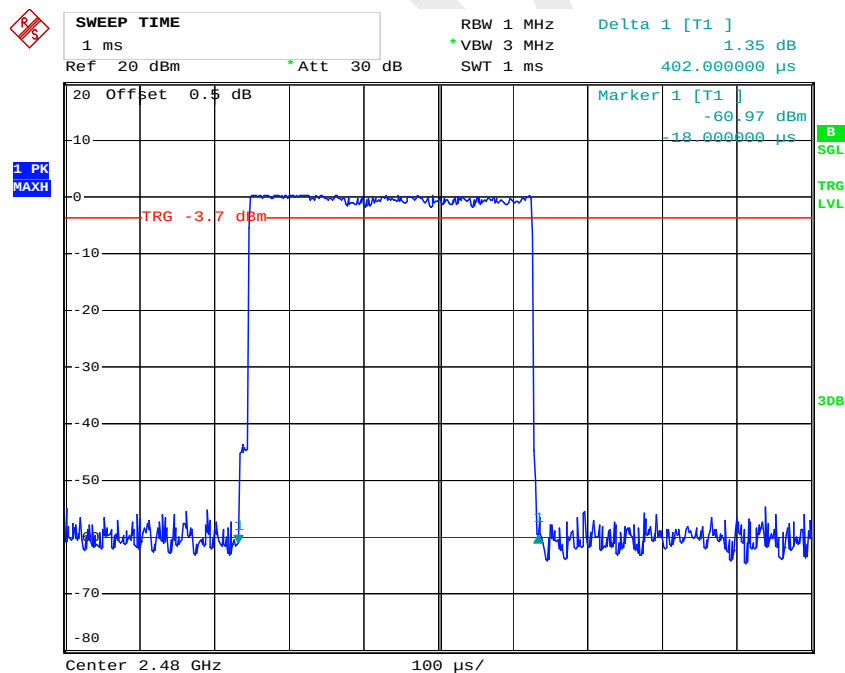


Date: 13.JUL.2018 00:10:05

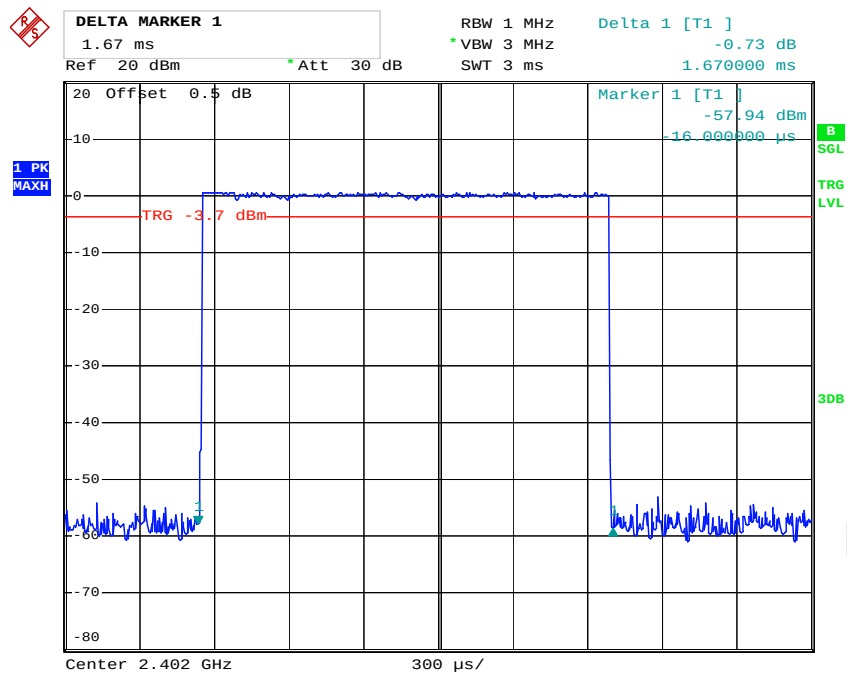2DH3: Low Channel


Date: 13.JUL.2018 00:14:30

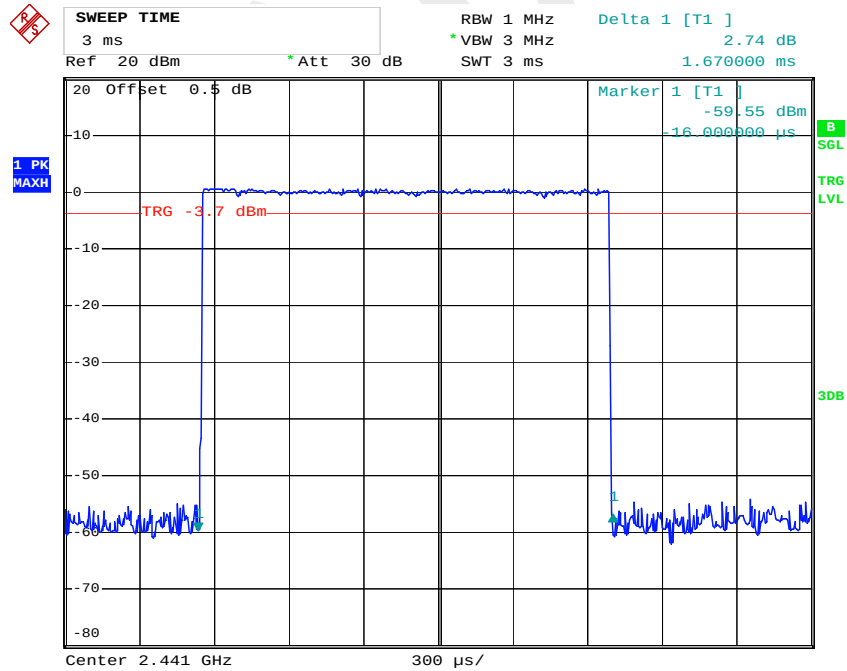2DH3: Middle Channel


Date: 13.JUL.2018 00:14:52

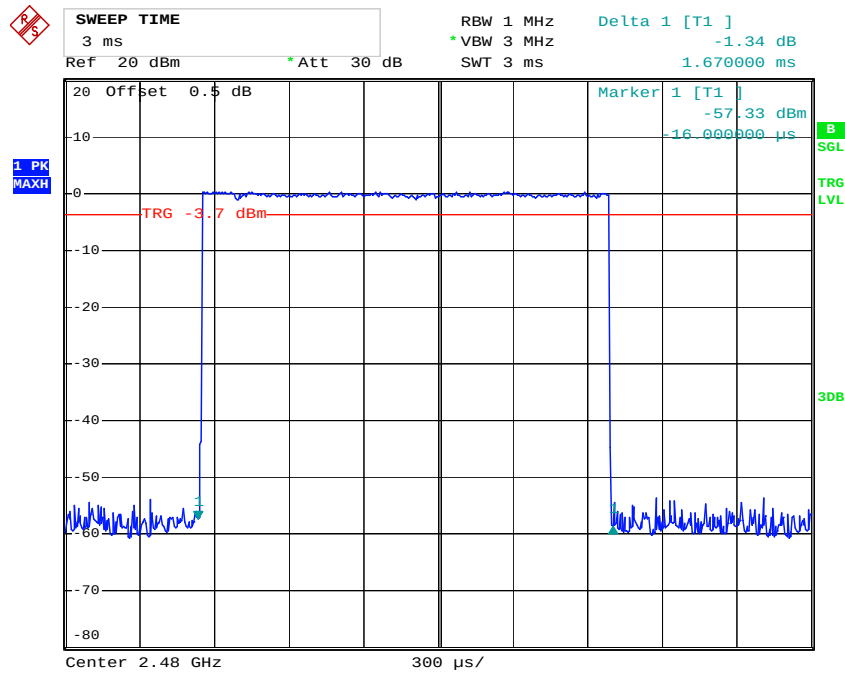2DH3: High Channel


Date: 13.JUL.2018 00:15:07

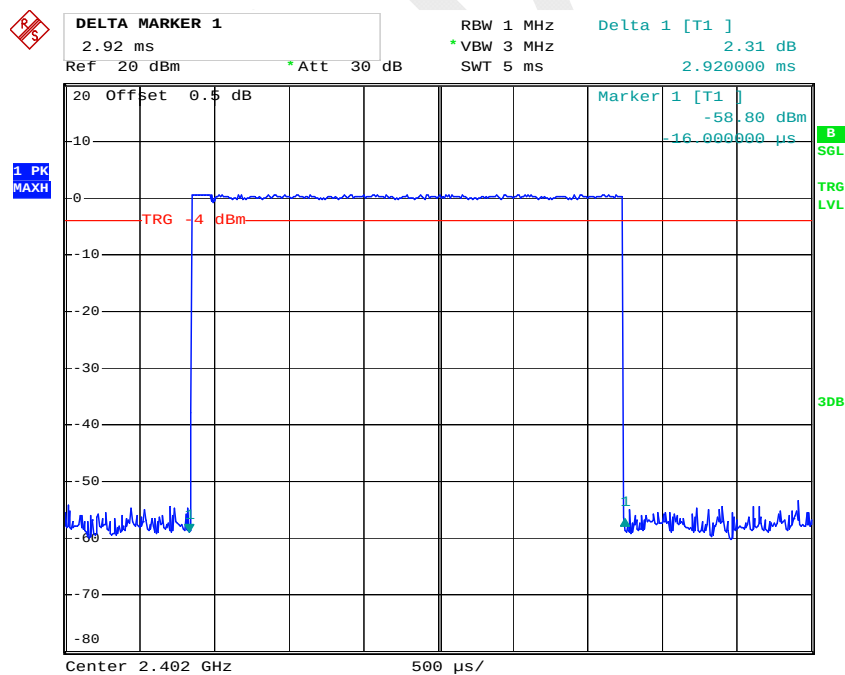2DH5: Low Channel

Date: 13.JUL.2018 00:18:23

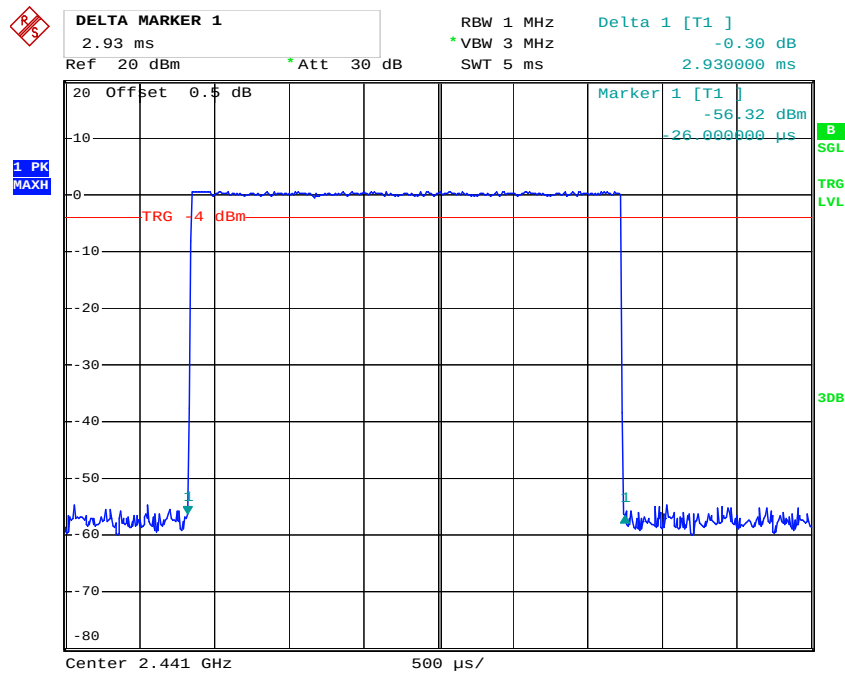2DH5: Middle Channel

Date: 13.JUL.2018 00:18:40

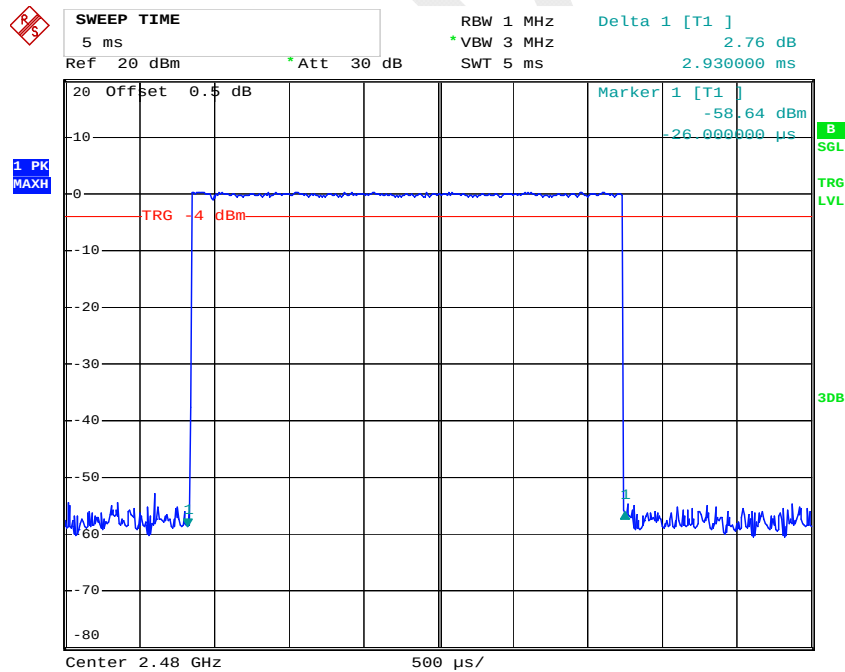2DH5: High Channel

Date: 13.JUL.2018 00:18:52

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.406	0.130	0.4	Compliance
	Middle	0.408	0.131	0.4	Compliance
	High	0.404	0.129	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
3DH3	Low	1.670	0.267	0.4	Compliance
	Middle	1.670	0.267	0.4	Compliance
	High	1.670	0.267	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
3DH5	Low	2.930	0.313	0.4	Compliance
	Middle	2.940	0.314	0.4	Compliance
	High	2.940	0.314	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


DELTA MARKER 1
406 μ s
Ref 20 dBm Att 30 dB
RBW 1 MHz
VBW 3 MHz
SWT 1 ms
Delta 1 [T1]
-1.67 dB
406.000000 μ s

20 Offset 0.5 dB
Marker 1 [T1]
-60.65 dBm
18.000000 μ s


1 PK MAXH
TRG -3.7 dBm

Center 2.402 GHz 100 μ s/


Page 61 of 75

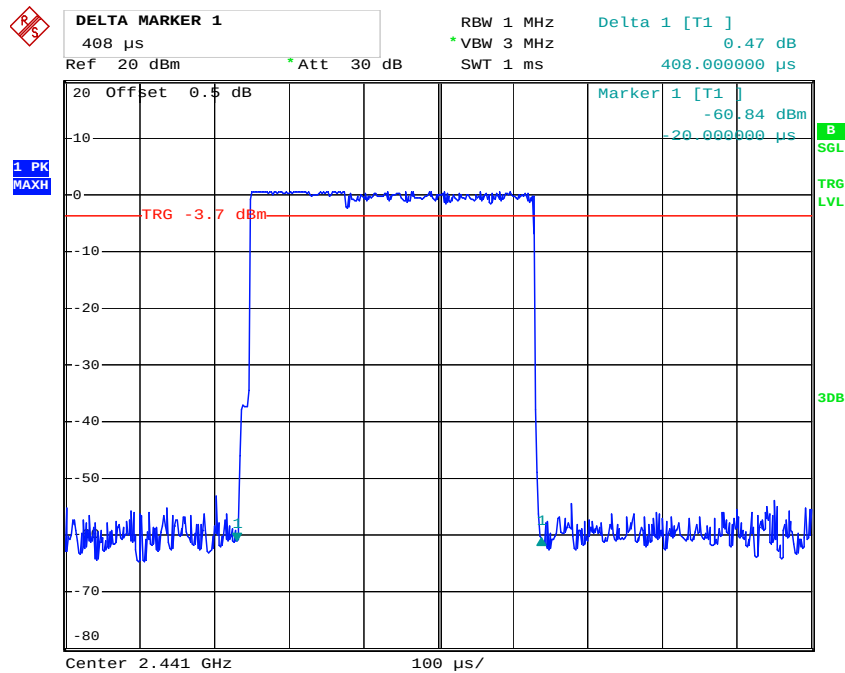3DH1: Middle Channel


Date: 13.JUL.2018 00:10:58

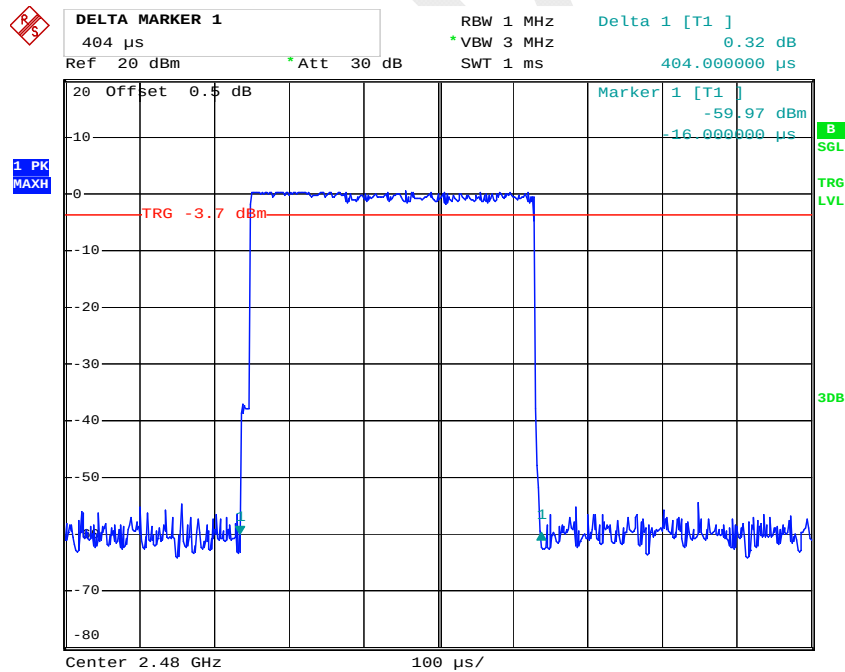3DH1: High Channel


Date: 13.JUL.2018 00:12:01

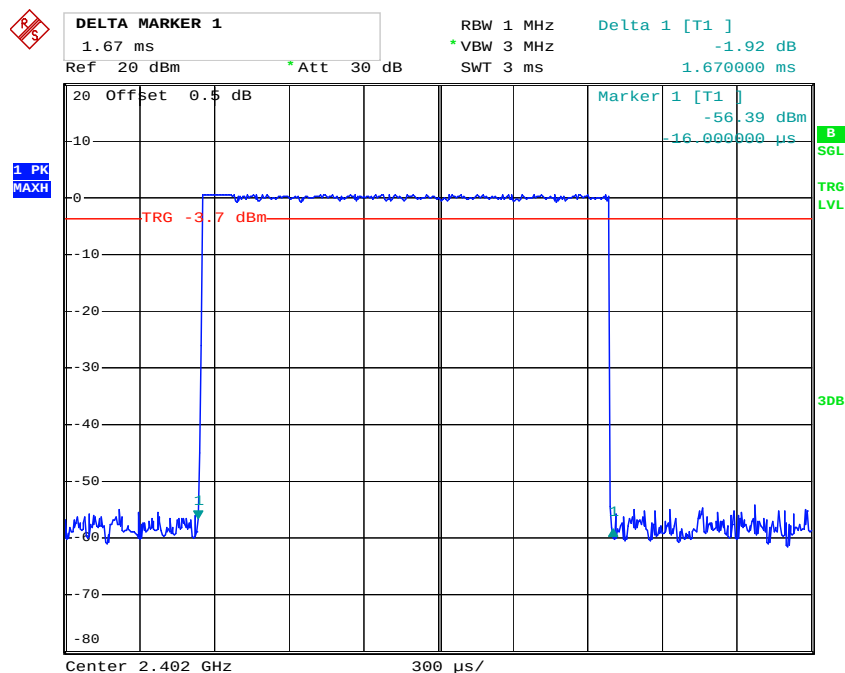3DH3: Low Channel


Date: 13.JUL.2018 00:15:51

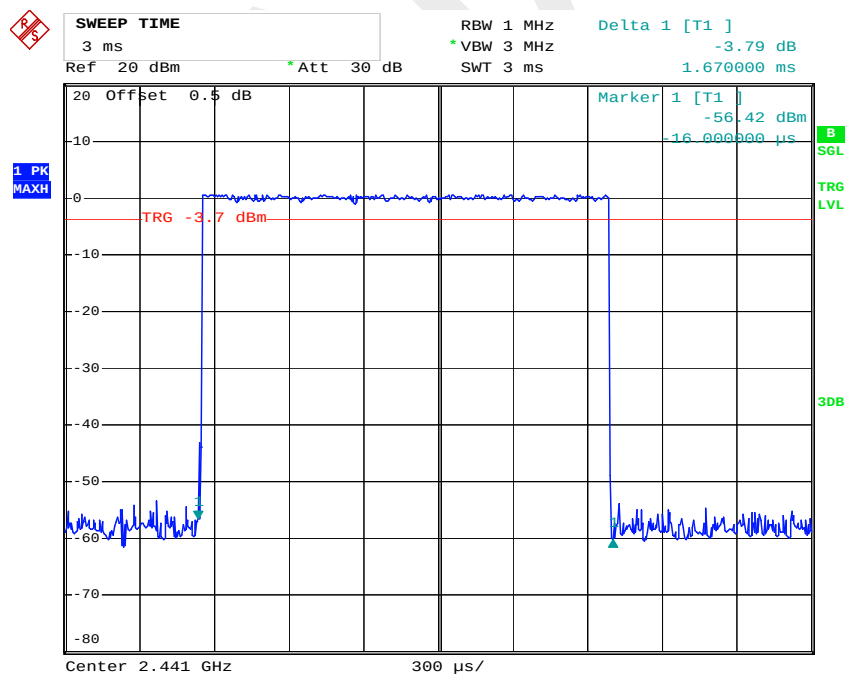3DH3: Middle Channel


Date: 13.JUL.2018 00:16:06

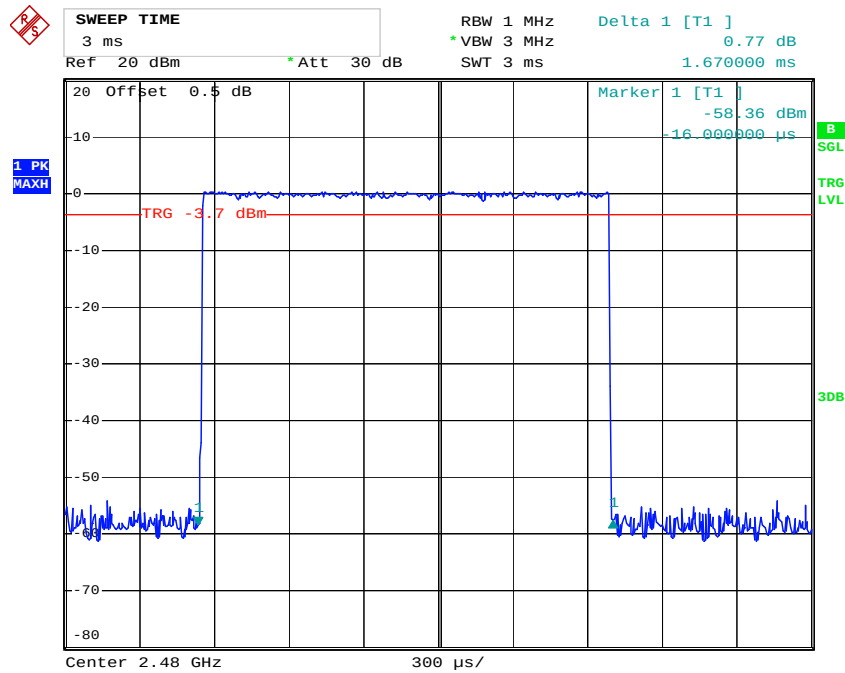3DH3: High Channel


Date: 13.JUL.2018 00:16:18

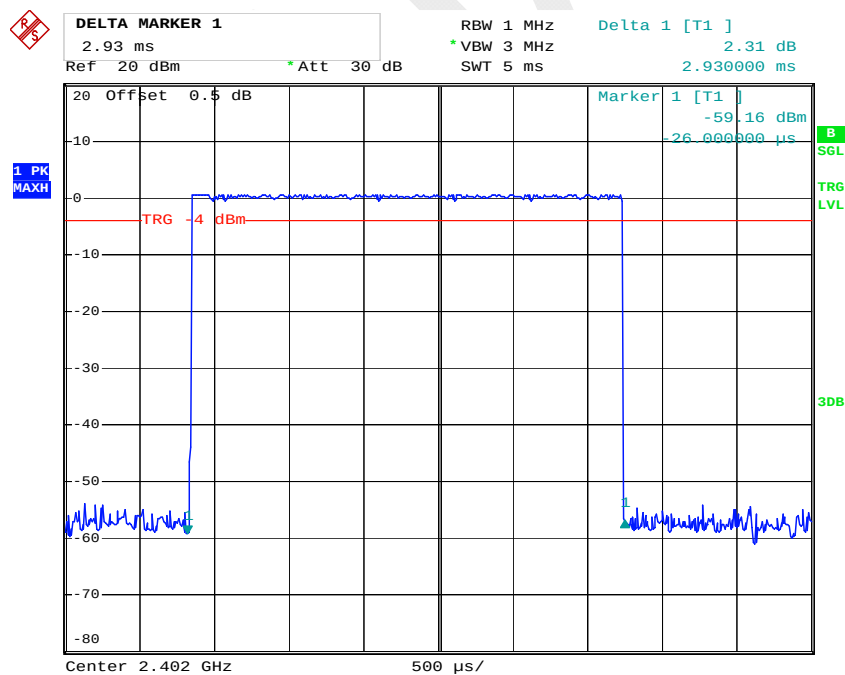3DH5: Low Channel

Date: 13.JUL.2018 00:19:47

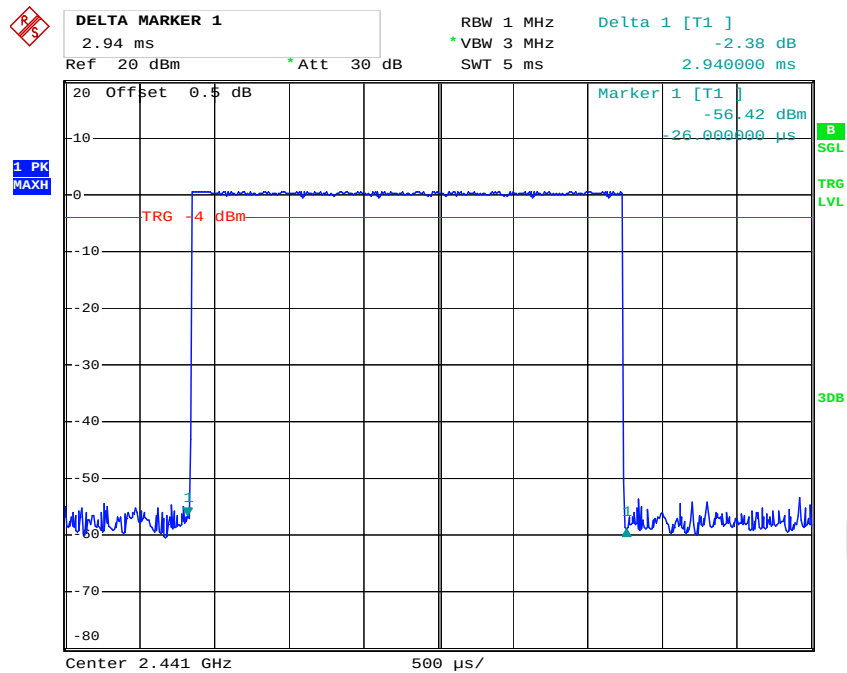3DH5: Middle Channel

Date: 13.JUL.2018 00:20:06

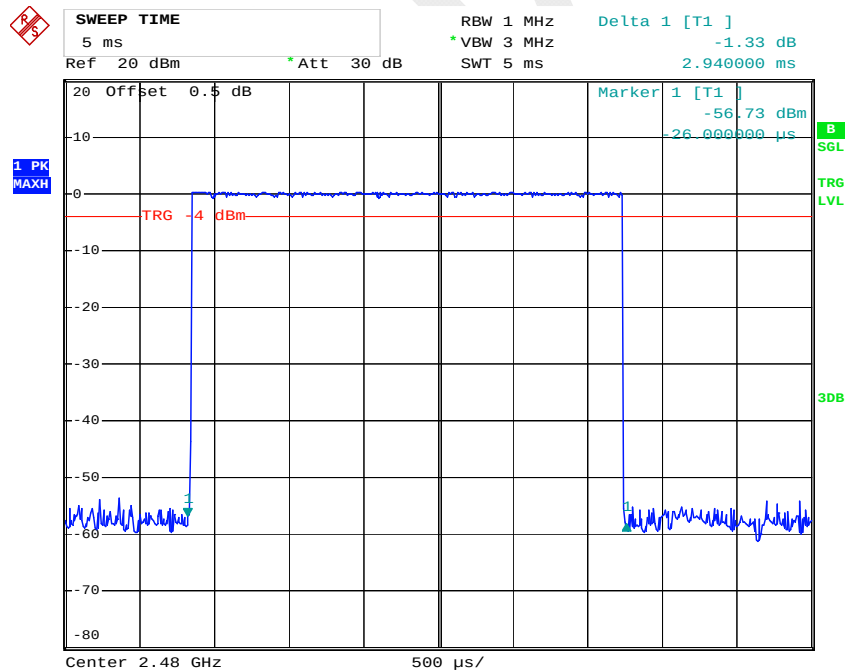3DH5: High Channel

Date: 13.JUL.2018 00:20:21

FCC §15.247(b) (1), RSS-247 Clause 5.4 b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

According to RSS-247 Clause 5.4 b)

- b) For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Tiago Huang on 2018-07-12.

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Peak Conducted Output power Limit (dBm)	EIRP (dBm)	EIRP Limit For ISSED (dBm)
BDR Mode (GFSK)	2402	1.64	21	2.64	36
	2441	1.45	21	2.45	36
	2480	1.06	21	2.06	36
EDR Mode ($\pi/4$ -DQPSK)	2402	1.21	21	2.21	36
	2441	1.00	21	2.00	36
	2480	0.69	21	1.69	36
EDR Mode (8DPSK)	2402	1.30	21	2.30	36
	2441	1.15	21	2.15	36
	2480	0.81	21	1.81	36

Note: The data above was tested in conducted mode, the antenna gain is 1.0dBi.

FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9~29.2 °C
Relative Humidity:	65 %
ATM Pressure:	99.8~100 kPa


* The testing was performed by Tiago Huang on 2018-07-12& 2018-07-13.

Test Result: Compliance

Single mode:


BDR Mode (GFSK):

Band Edge, Left Side

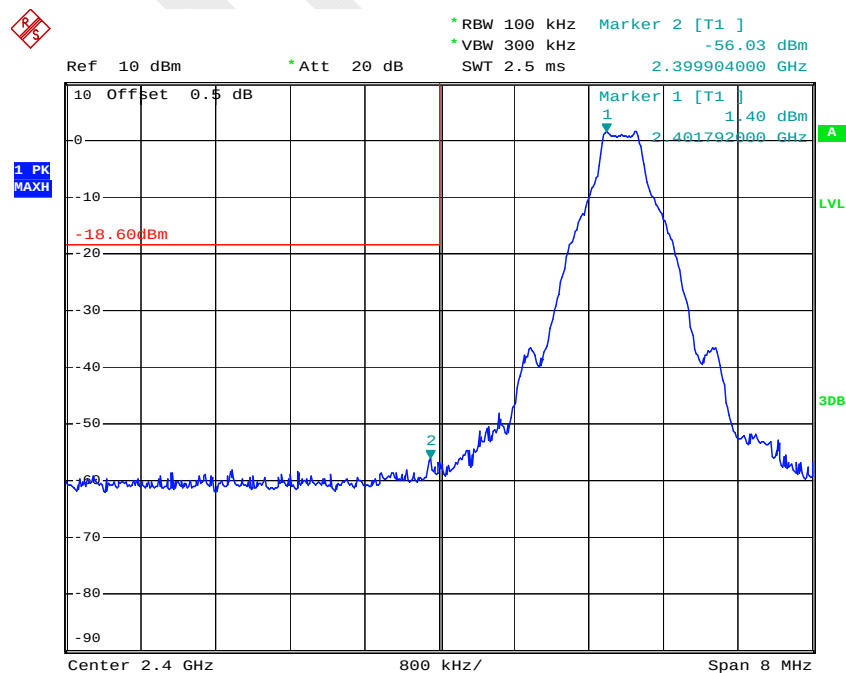

Date: 12. JUL. 2018 22:48:22


Band Edge, Right Side

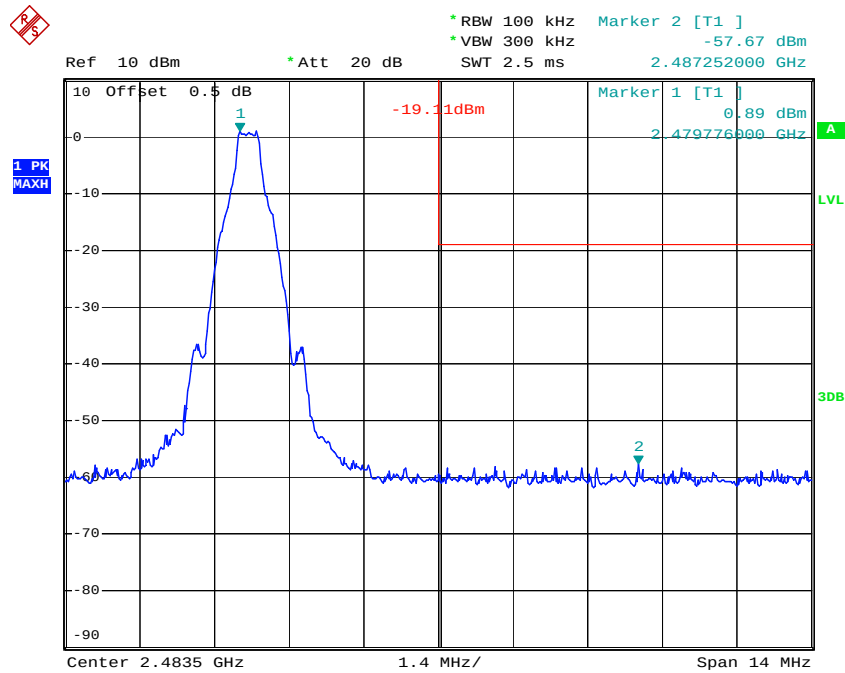


Date: 12.JUL.2018 22:57:25

EDR Mode ($\pi/4$ -DQPSK):


Band Edge, Left Side

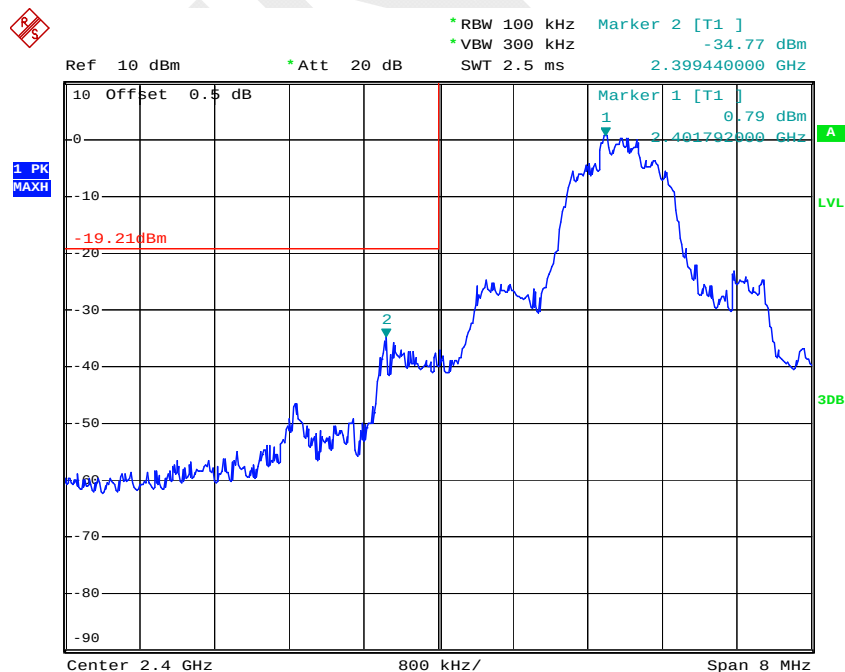


Date: 12.JUL.2018 22:59:19

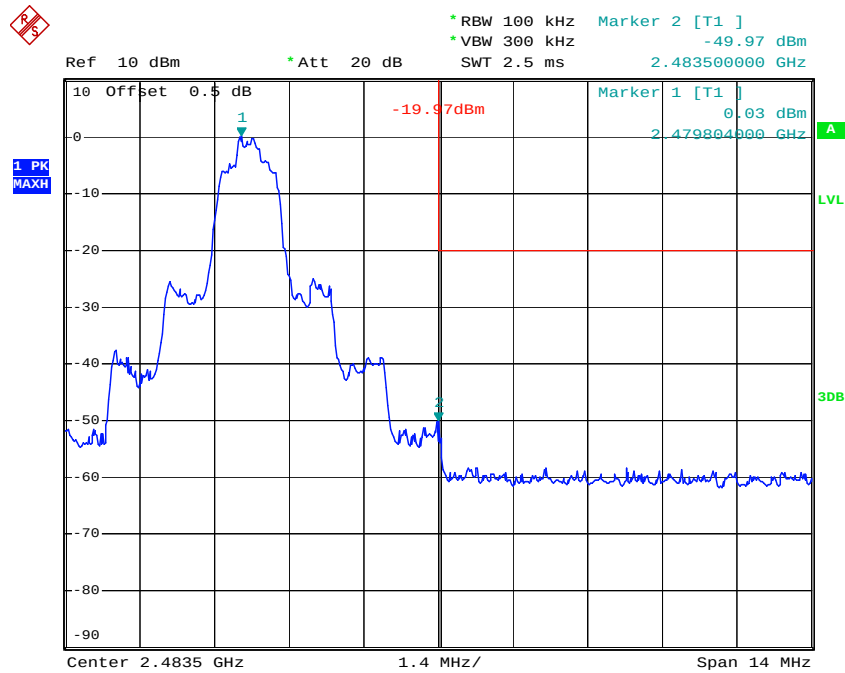Band Edge, Right Side

Date: 12.JUL.2018 23:02:14

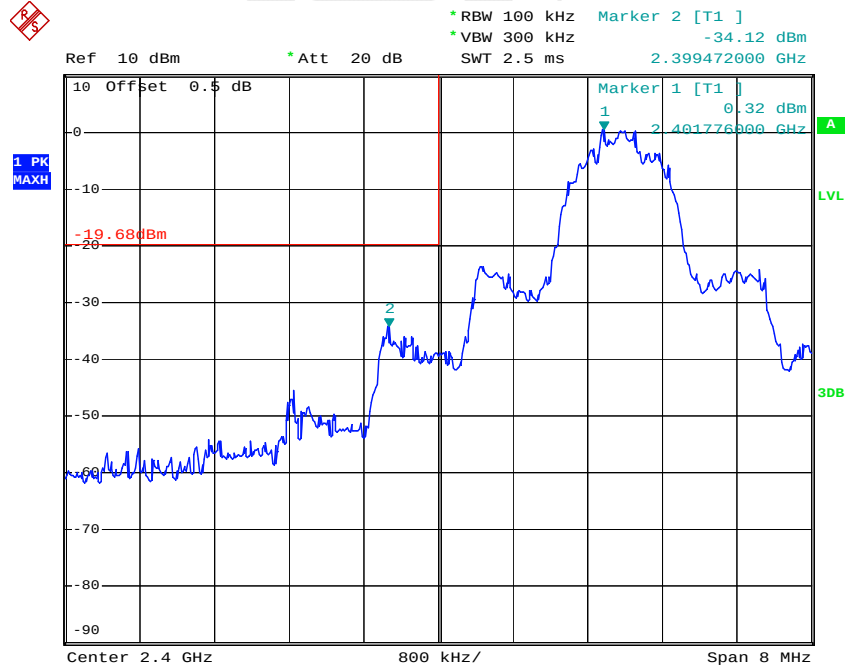*EDR Mode (8-DPSK):***Band Edge, Left Side**


Date: 12.JUL.2018 23:04:10

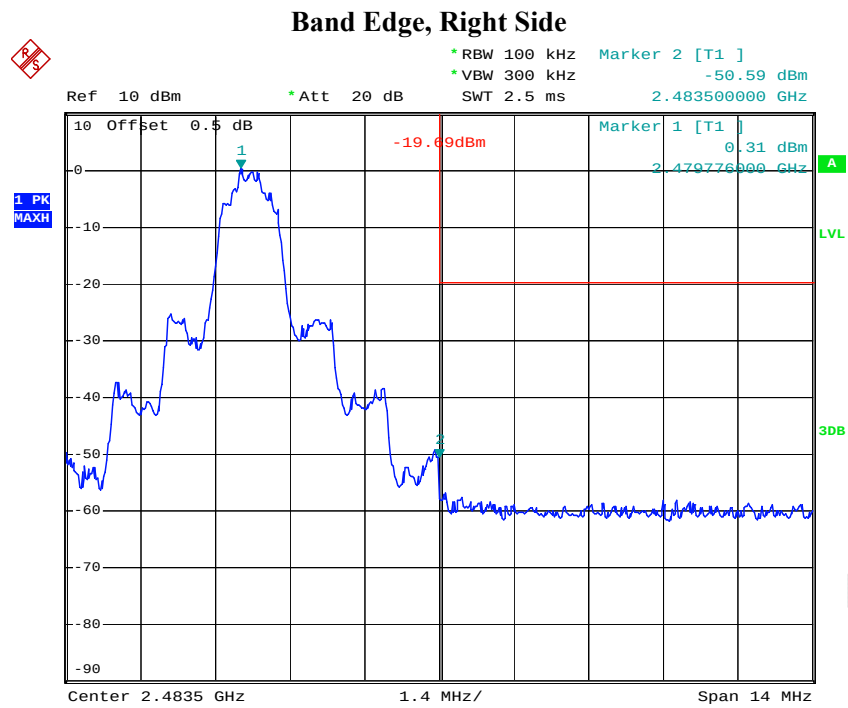

Date: 12.JUL.2018 23:06:56


Hopping mode:
BDR Mode (GFSK):

Band Edge, Left Side

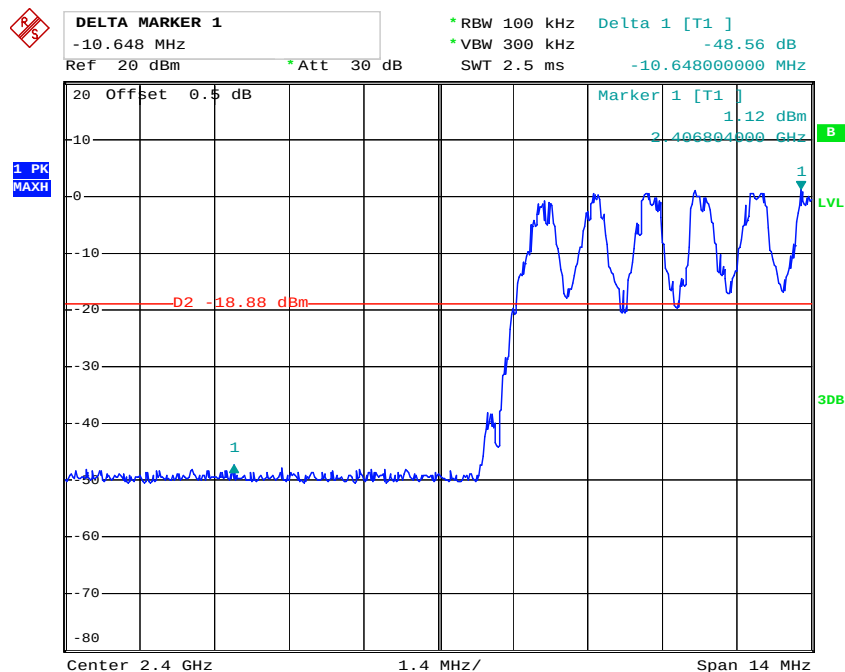


Date: 12.JUL.2018 23:35:50

Band Edge, Right Side

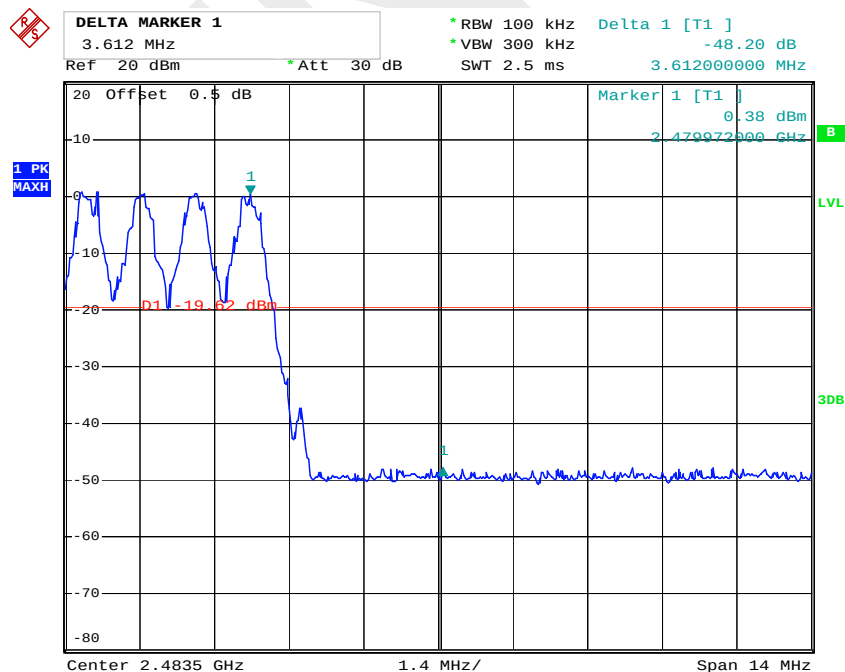

Date: 12.JUL.2018 23:37:44

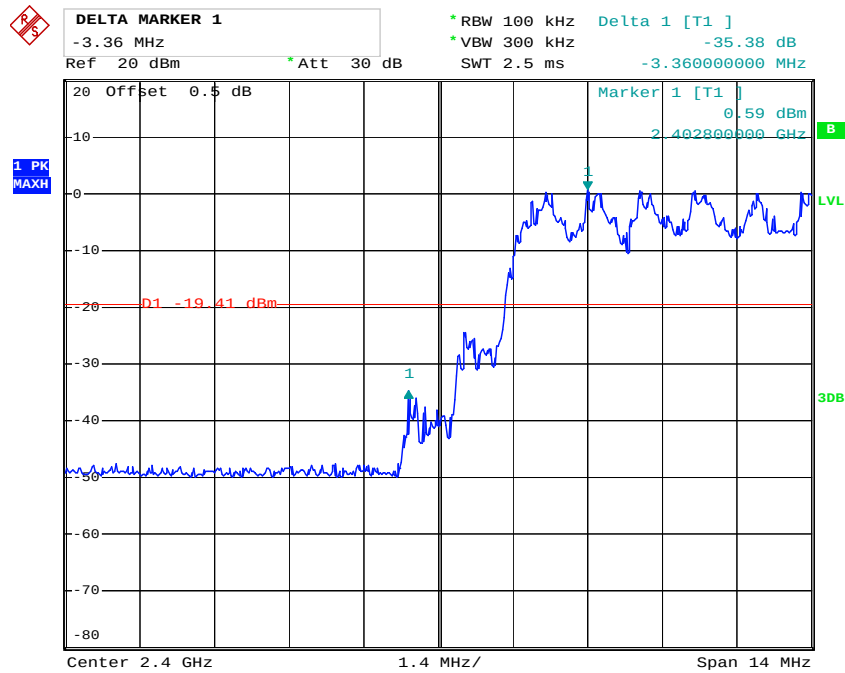*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**


Date: 12.JUL.2018 23:41:32

Band Edge, Right Side

Date: 12.JUL.2018 23:45:40


EDR Mode (8-DPSK):

Band Edge, Left Side

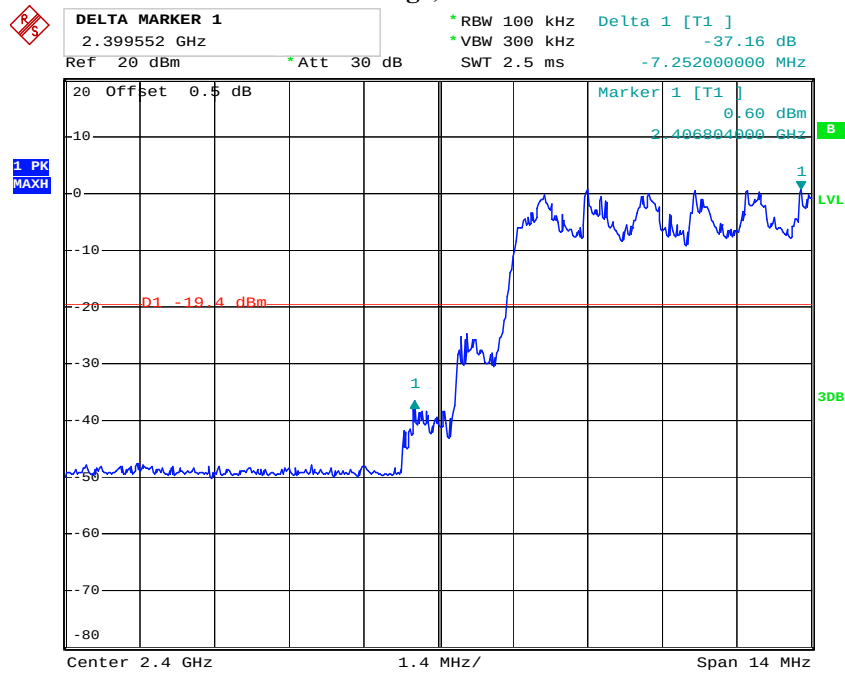

Date: 13.JUL.2018 00:05:23

Band Edge, Right Side

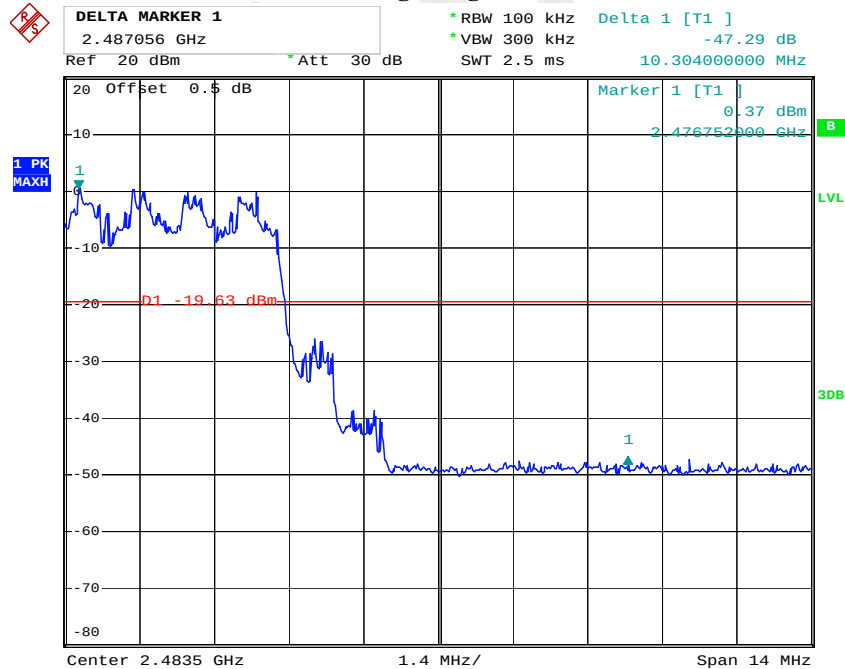

Date: 13.JUL.2018 00:01:34

***** END OF REPORT *****