



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, APRIL 2018

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Beijing Penslink Co.,Ltd

502 Room,2 Building,6th Yard, Fuandonglu Street, Chaoyang District Beijing, China

FCC ID: 2AQXJ-P0102A
IC: 24286-P0102A

Report Type: Original Report	Product Name: Petfon
Report Number: RDG180628007-00C	
Report Date: 2018-10-24	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093, RSS-102 §4- RF EXPOSURE.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	11
FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5,RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 a) - CHANNEL SEPARATION TEST	35
APPLICABLE STANDARD	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST PROCEDURE	35
TEST DATA	36
RSS-247 CLUASE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH TESTING	38
APPLICABLE STANDARD	38
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	39

FCC §15.247(a) (1) (i)& RSS-247 CLAUSE 5.1 C) - QUANTITY OF HOPPING CHANNEL TEST	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	43
FCC §15.247(a) (1) (i)& RSS-247 Clause 5.1 C) - TIME OF OCCUPANCY (DWELL TIME).....	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	44
FCC §15.247(b) (2), RSS-247 Clause 5.4 a) - PEAK OUTPUT POWER MEASUREMENT.....	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	49
FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING.....	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Petfon
EUT Model:	P0102A, P0102B
FCC ID:	2AQXJ-P0102A
IC:	24286-P0102A
Rated Input Voltage:	DC 3.7V from battery or DC 5V charged by Charger box(Controller) DC 3.7V from battery or DC 5V charged by Charger box(Tracker)
External Dimension:	42mm(L)* 42mm(W)* 18mm(H) (Controller) 42mm(L)* 42mm(W)* 18mm(H) (Tracker)
Serial Number:	180628007-1 (Controller) 180628007-2(Tracker)
EUT Received Date:	2018.06.28

Note: the Controller and Tracker have identical schematics and PCB layout, only antenna, keys and appearance different, test performed at both unit for AC Line Conducted Emissions and Radiation Spurious emissions, other test items only performed at Controller.

Objective

This report is prepared on behalf of *Beijing Penslink Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05. And RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The device was a hopping transmitter with LoRa_125kHz mode.

The system was configured for testing in an engineering mode. 51 hopping channels are employed:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.5	14	909.0	27	915.5	40	922.0
2	903.0	15	909.5	28	916.0	41	922.5
3	903.5	16	910.0	29	916.5	42	923.0
4	904.0	17	910.5	30	917.0	43	923.5
5	904.5	18	911.0	31	917.5	44	924.0
6	905.0	19	911.5	32	918.0	45	924.5
7	905.5	20	912.0	33	918.5	46	925.0
8	906.0	21	912.5	34	919.0	47	925.5
9	906.5	22	913.0	35	919.5	48	926.0
10	907.0	23	913.5	36	920.0	49	926.5
11	907.5	24	914.0	37	920.5	50	927.0
12	908.0	25	914.5	38	921.0	51	927.5
13	908.5	26	915.0	39	921.5	/	/

Channel 1, 26, 51 were selected to test.

EUT Exercise Software

The worst condition (maximum power level) was configured by system default setting, the software ' BLE Reader ' used for change test modes and channels.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Huawei	adapter	HW-050200C3W	H333L5FM06947

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	no	no	0.8	adapter	charger box

Block Diagram of Test Setup

AC Line Conducted Emissions:

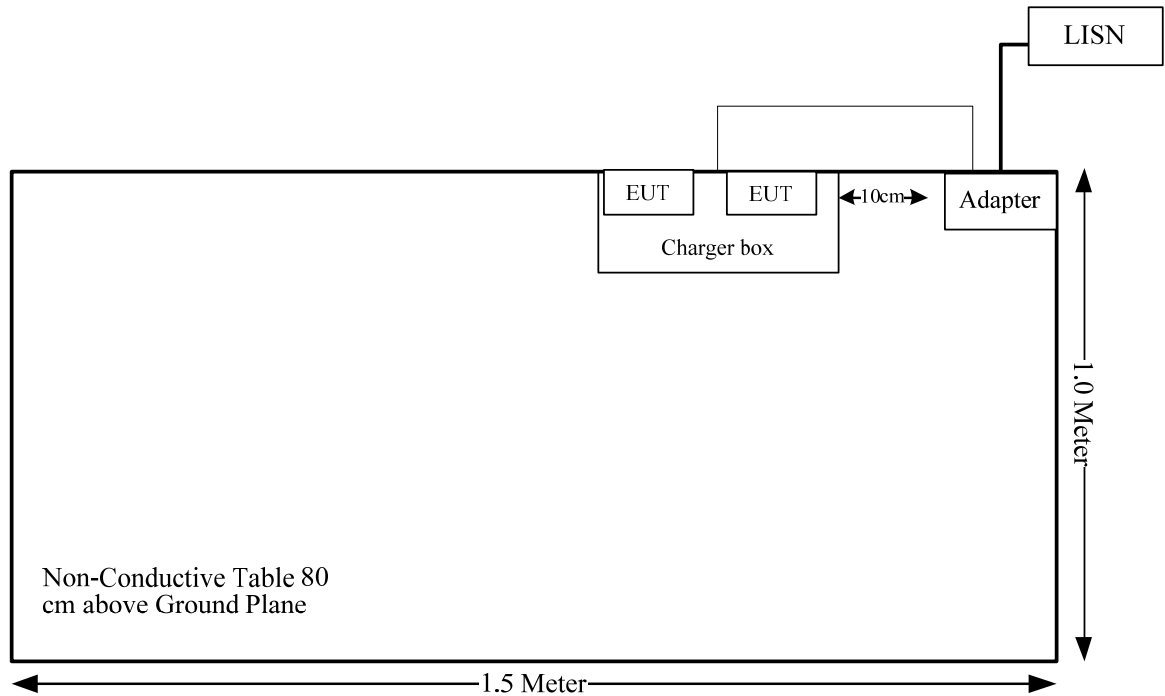

Radiated Emissions:

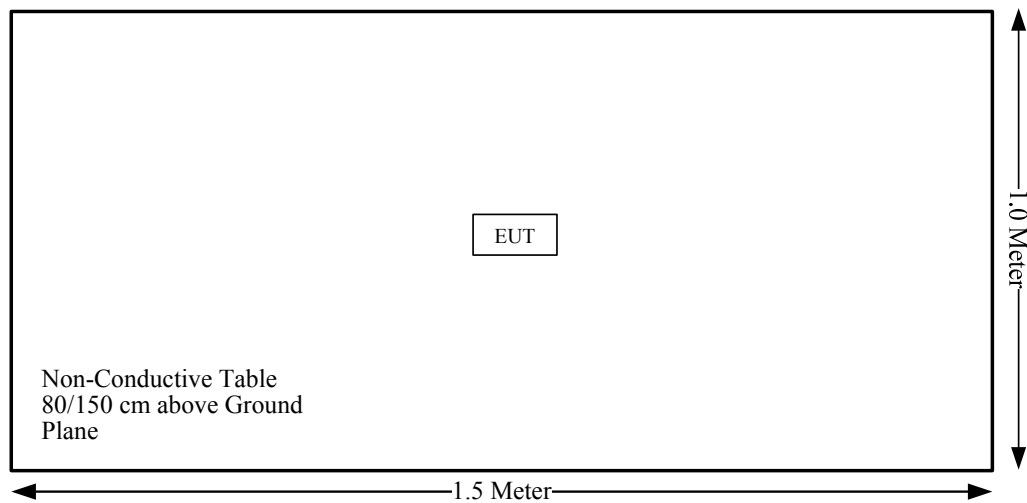

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093 RSS-102 §4	RF Exposure	Compliance
FCC§15.203, RSS-GEN Clause 6.8	Antenna Requirement	Compliance
FCC§15.207 (a), RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d), RSS-247 Clause 5.5, RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(1), RSS-247 Clause 5.1 a) RSS-Gen Clause 6.7	Emission Bandwidth	Compliance
FCC §15.247(a)(1), RSS-247 Clause 5.1 a)	Channel Separation Test	Compliance
FCC§15.247(a)(1)(i), RSS-247 Clause 5.1 c)	Time of Occupancy (Dwell Time)	Compliance
FCC§15.247(a)(1)(i), RSS-247 Clause 5.1 a)	Quantity of hopping channel Test	Compliance
FCC§15.247(b)(2), RSS-247 Clause 5.4 a)	Peak Output Power Measurement	Compliance
FCC§15.247(d) RSS-247 Clause 5.5	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093, RSS-102 §4- RF EXPOSURE**Applicable Standard**

According to §15.247(i), §1.1310 and §2.1093.

According to RSS-102 §4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RDG180628007-20.

FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Information And Connector Construction

Both Controller and Tracker have 3 internal antenna, fulfill the requirement of this section. Please refer to the EUT photos and below information.

Unit	Antenna	Antenna Type	Connector Type	input impedance (Ohm)	Antenna Gain /Frequency
Controller	Lora	FPC	ejector pin	50	3.0 dBi/ 902-928MHz
	WIFI	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
	BT	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
Tracker	Lora	FPC	ejector pin	50	3.0 dBi/ 902-928MHz
	WIFI	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
	BT	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz


Result: Compliance.

FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a), RSS-GEN CLAUSE 8.8.

EUT Setup

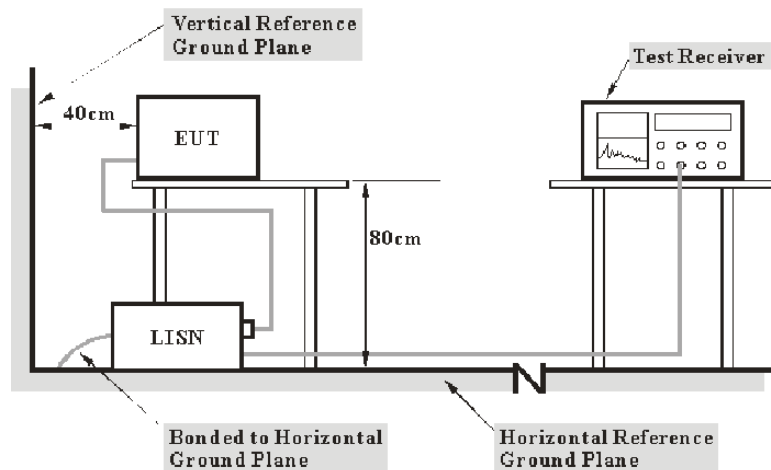

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	28.5 °C
Relative Humidity:	58 %
ATM Pressure:	100.2 kPa

The testing was performed by Lily Xie on 2018-07-16.

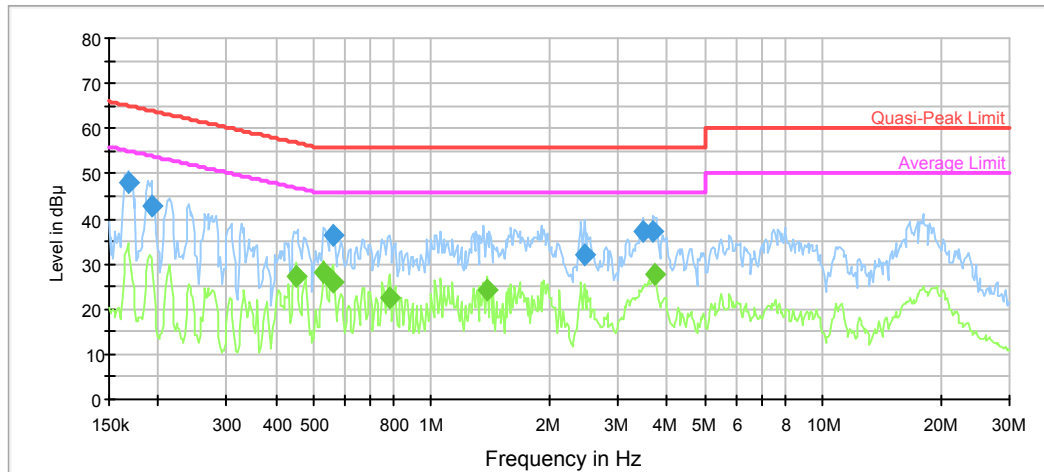Test Mode: Charging**AC120V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.167702	48.0	9.000	L1	10.9	17.1	65.1	Compliance
0.192030	42.8	9.000	L1	10.7	21.2	63.9	Compliance
0.558572	36.2	9.000	L1	9.9	19.8	56.0	Compliance
2.458886	32.1	9.000	L1	9.8	23.9	56.0	Compliance
3.463707	37.3	9.000	L1	9.8	18.7	56.0	Compliance
3.691692	37.2	9.000	L1	9.8	18.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.450448	27.2	9.000	L1	9.9	19.7	46.9	Compliance
0.532496	28.1	9.000	L1	9.9	17.9	46.0	Compliance
0.563041	25.9	9.000	L1	9.9	20.1	46.0	Compliance
0.780588	22.4	9.000	L1	9.8	23.6	46.0	Compliance
1.385415	24.2	9.000	L1	9.7	21.8	46.0	Compliance
3.721226	27.7	9.000	L1	9.8	18.3	46.0	Compliance


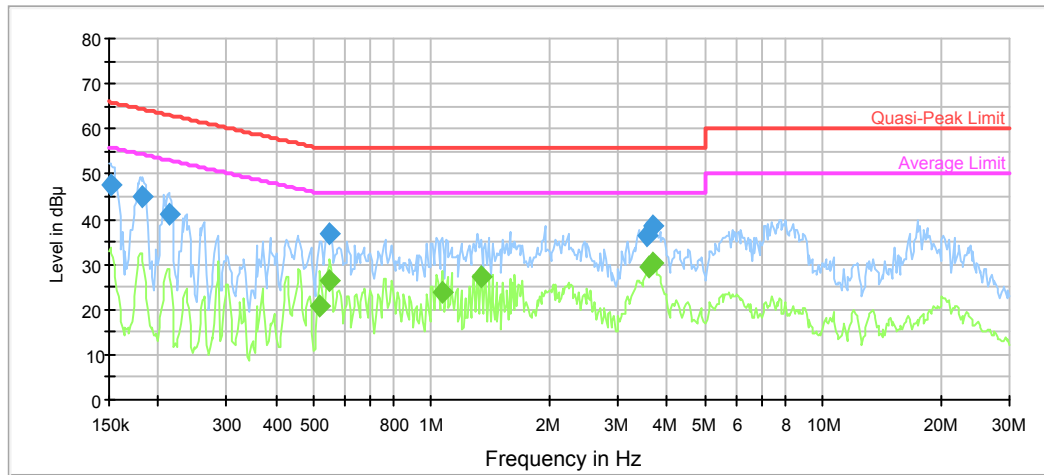
AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151200	47.4	9.000	N	11.2	18.5	65.9	Compliance
0.183065	44.8	9.000	N	10.8	19.5	64.3	Compliance
0.212988	40.9	9.000	N	10.5	22.2	63.1	Compliance
0.545378	37.0	9.000	N	9.9	19.0	56.0	Compliance
3.547503	36.4	9.000	N	9.8	19.6	56.0	Compliance
3.691692	38.5	9.000	N	9.8	17.5	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.519918	20.9	9.000	N	9.9	25.1	46.0	Compliance
0.549741	26.2	9.000	N	9.9	19.8	46.0	Compliance
1.065081	23.7	9.000	N	9.8	22.3	46.0	Compliance
1.341955	27.2	9.000	N	9.7	18.8	46.0	Compliance
3.575883	29.5	9.000	N	9.8	16.5	46.0	Compliance
3.691692	30.1	9.000	N	9.8	15.9	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5, RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205; RSS-247 Clause 5.5, RSS-GEN Clause 8.10

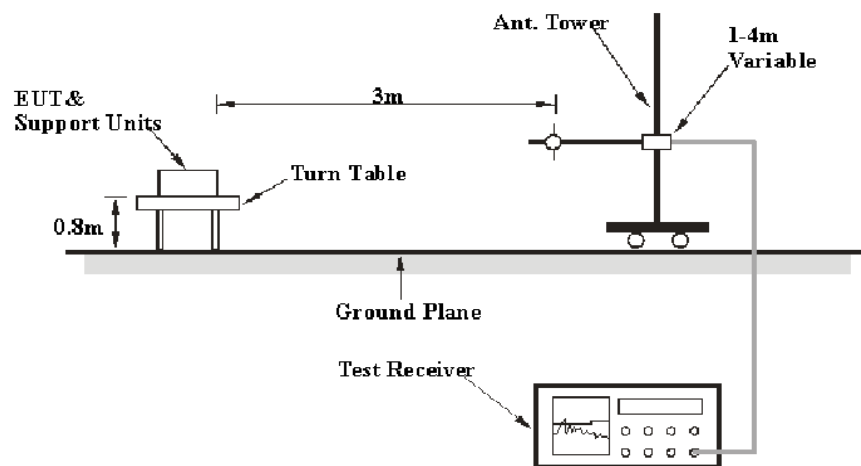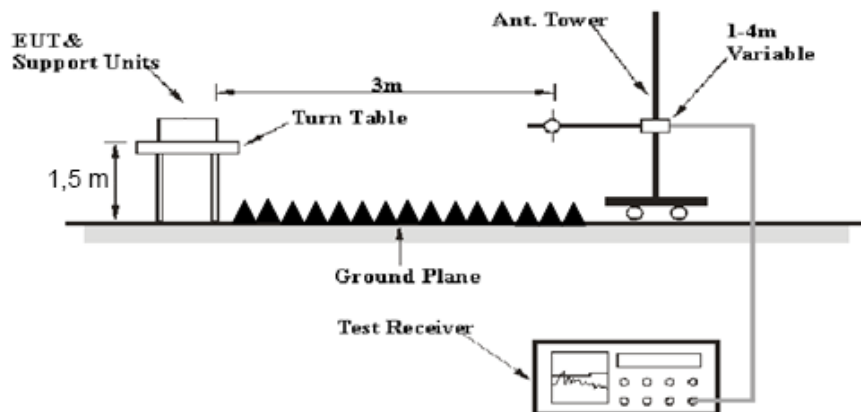EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 and the RSS-247 Clause 5.5, RSS-GEN Clause 8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-31	2019-08-31
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2018-02-24	2019-02-28
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	24.7~26.4°C
Relative Humidity:	34~37 %
ATM Pressure:	100.4~100.6 kPa

** The testing was performed by Vern Shen and Blake Yang from 2018-09-29 to 2018-10-15.*


Test Mode: Transmitting

1)Controller(P0102A):


30MHz-1GHz

Low channel

Horizontal:

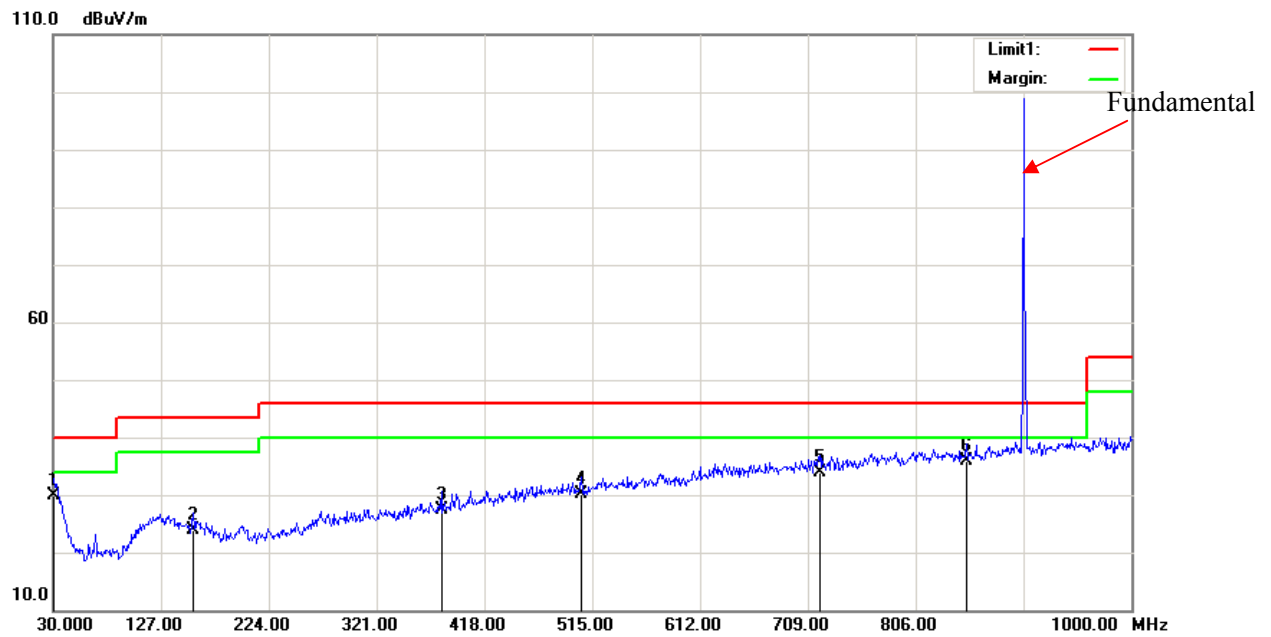


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	1.74	QP	28.16	29.90	40.00	10.10
156.1000	4.06	QP	19.84	23.90	43.50	19.60
379.2000	4.36	QP	23.14	27.50	46.00	18.50
505.3000	3.95	QP	26.25	30.20	46.00	15.80
719.6700	3.84	QP	29.96	33.80	46.00	12.20
851.5900	7.98	QP	27.82	35.80	46.00	10.20

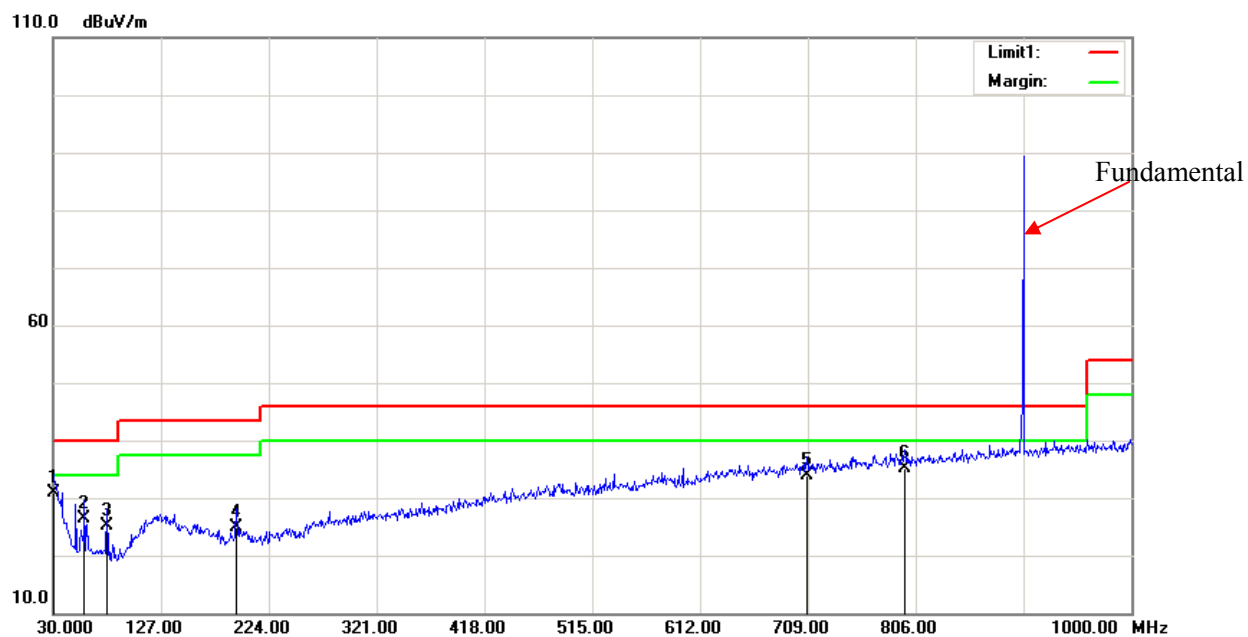
Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	2.84	QP	28.16	31.00	40.00	9.00
58.1300	12.50	QP	14.00	26.50	40.00	13.50
78.5000	10.14	QP	14.96	25.10	40.00	14.90
194.9000	6.19	QP	18.81	25.00	43.50	18.50
708.0300	4.31	QP	29.69	34.00	46.00	12.00
796.3000	4.32	QP	30.88	35.20	46.00	10.80

Middle channel

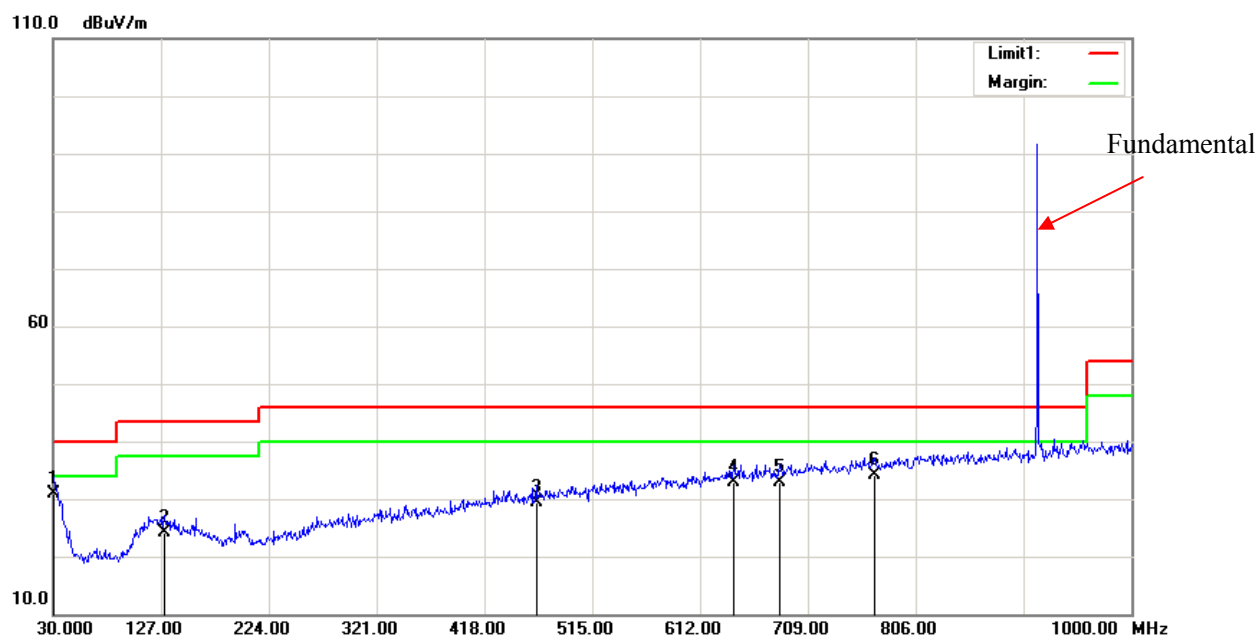
Horizontal:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	3.45	QP	27.35	30.80	40.00	9.20
129.9100	3.03	QP	21.07	24.10	43.50	19.40
464.5600	3.50	QP	25.80	29.30	46.00	16.70
642.0700	3.88	QP	28.92	32.80	46.00	13.20
683.7800	3.80	QP	29.20	33.00	46.00	13.00
769.1400	3.42	QP	30.78	34.20	46.00	11.80

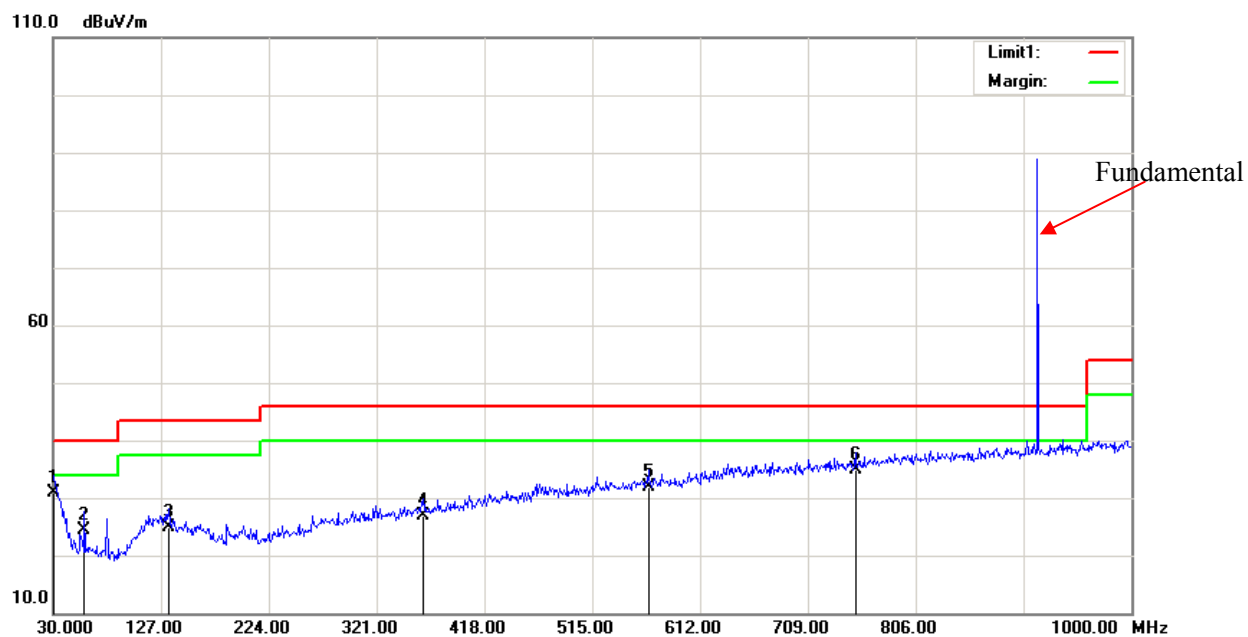
Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	2.64	QP	28.16	30.80	40.00	9.20
58.1300	10.50	QP	14.00	24.50	40.00	15.50
133.7900	4.22	QP	20.78	25.00	43.50	18.50
362.7100	4.08	QP	22.82	26.90	46.00	19.10
565.4400	4.35	QP	27.55	31.90	46.00	14.10
751.6800	4.63	QP	30.27	34.90	46.00	11.10

High channel

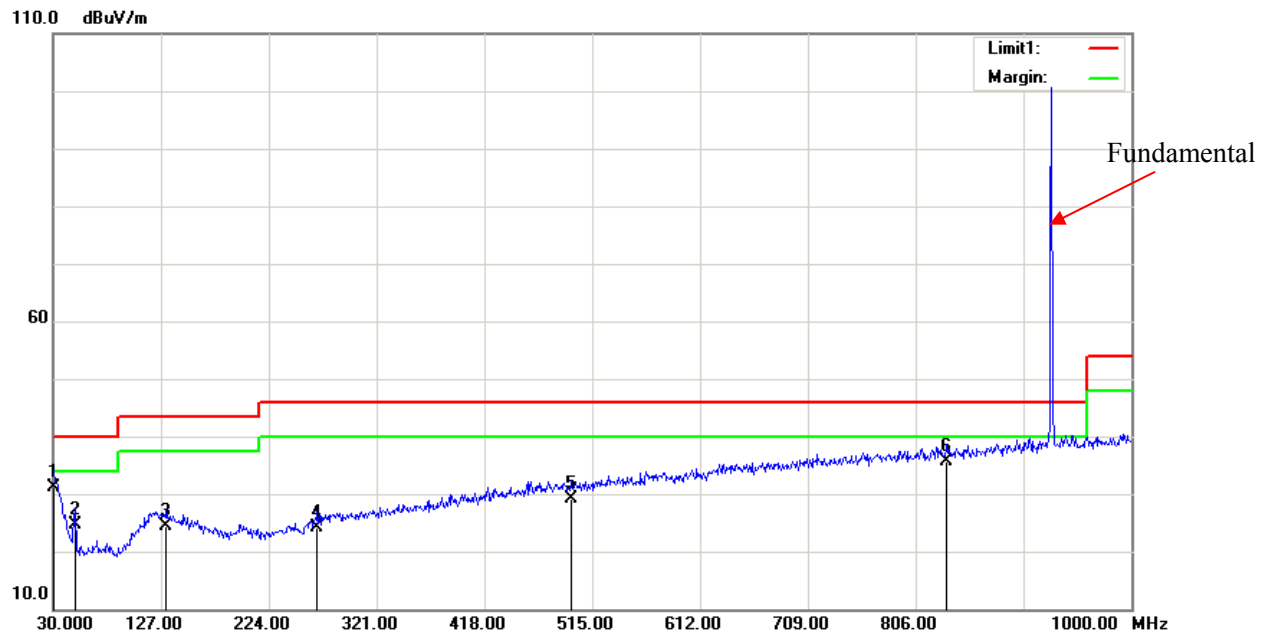Horizontal:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	2.94	QP	28.16	31.10	40.00	8.90
50.3700	9.68	QP	15.02	24.70	40.00	15.30
131.8500	3.43	QP	20.97	24.40	43.50	19.10
267.6500	3.29	QP	20.81	24.10	46.00	21.90
495.6000	2.99	QP	26.21	29.20	46.00	16.80
834.1300	4.05	QP	31.55	35.60	46.00	10.40

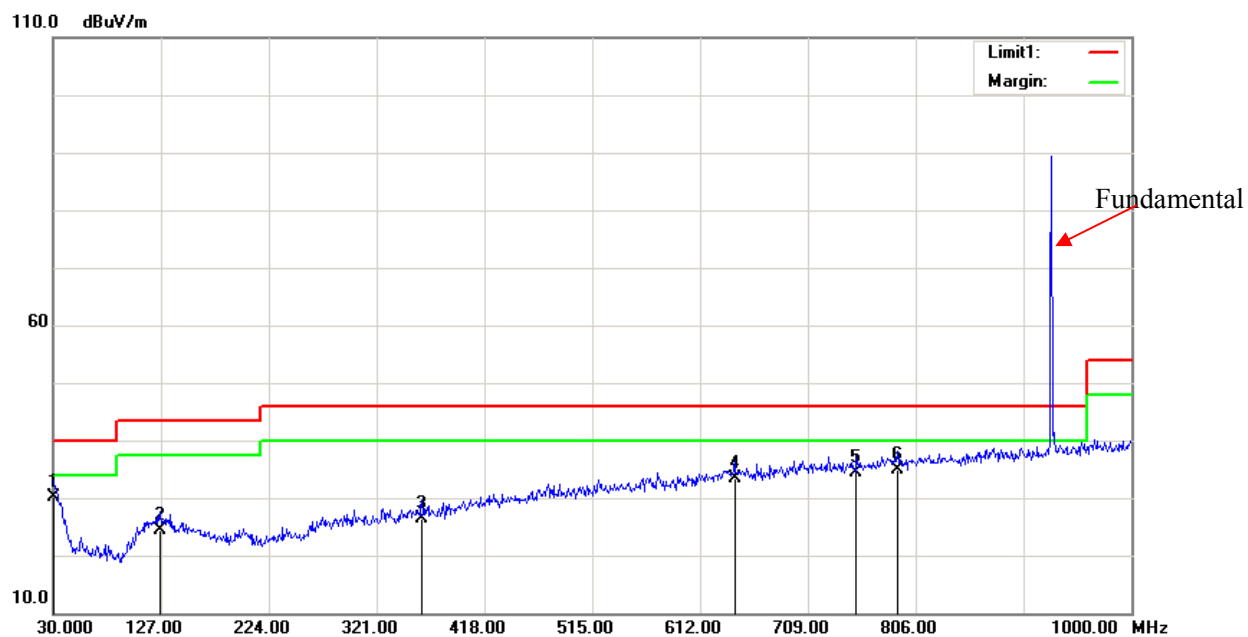
Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	2.85	QP	27.35	30.20	40.00	9.80
126.0300	3.27	QP	21.23	24.50	43.50	19.00
361.7400	3.69	QP	22.81	26.50	46.00	19.50
643.0400	4.38	QP	28.92	33.30	46.00	12.70
752.6500	3.98	QP	30.32	34.30	46.00	11.70
789.5100	4.08	QP	30.92	35.00	46.00	11.00


2) Fundamental, and above 1GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 902.5 MHz									
902.50	71.90	QP	H	22.35	4.29	0.00	98.54	N/A	N/A
902.50	63.10	QP	V	22.35	4.29	0.00	89.74	N/A	N/A
902.00	21.70	QP	H	22.34	4.29	0.00	48.33	78.54	30.21
1805.00	55.76	PK	H	26.48	1.66	35.90	48.00	74.00	26.00
1805.00	53.67	AV	H	26.48	1.66	35.90	45.91	54.00	8.09
2707.50	48.53	PK	H	29.05	1.88	36.47	42.99	74.00	31.01
2707.50	46.72	AV	H	29.05	1.88	36.47	41.18	54.00	12.82
3610.00	54.39	PK	H	31.54	2.41	37.11	51.23	74.00	22.77
3610.00	52.17	AV	H	31.54	2.41	37.11	49.01	54.00	4.99
4512.50	49.38	PK	H	32.33	3.02	37.14	47.59	74.00	26.41
4512.50	47.56	AV	H	32.33	3.02	37.14	45.77	54.00	8.23
Middle Channel: 915 MHz									
915.00	70.20	QP	H	22.40	4.21	0.00	96.81	N/A	N/A
915.00	61.00	QP	V	22.40	4.21	0.00	87.61	N/A	N/A
1830.00	56.16	PK	H	26.59	1.66	35.95	48.46	74.00	25.54
1830.00	54.67	AV	H	26.59	1.66	35.95	46.97	54.00	7.03
2745.00	49.23	PK	H	29.18	1.91	36.51	43.81	74.00	30.19
2745.00	46.92	AV	H	29.18	1.91	36.51	41.50	54.00	12.50
3660.00	54.84	PK	H	31.65	2.50	37.06	51.93	74.00	22.07
3660.00	52.37	AV	H	31.65	2.50	37.06	49.46	54.00	4.54
4575.00	49.68	PK	H	32.45	3.08	37.13	48.08	74.00	25.92
4575.00	47.14	AV	H	32.45	3.08	37.13	45.54	54.00	8.46
High Channel: 927.5 MHz									
927.50	73.90	QP	H	22.55	4.35	0.00	100.80	N/A	N/A
927.50	62.40	QP	V	22.55	4.35	0.00	89.30	N/A	N/A
928.00	23.70	QP	H	22.56	4.34	0.00	50.60	80.80	30.20
1855.00	55.37	PK	H	26.69	1.66	35.99	47.73	74.00	26.27
1855.00	53.17	AV	H	26.69	1.66	35.99	45.53	54.00	8.47
2782.50	48.24	PK	H	29.32	1.94	36.55	42.95	74.00	31.05
2782.50	46.84	AV	H	29.32	1.94	36.55	41.55	54.00	12.45
3710.00	53.37	PK	H	31.76	2.57	37.02	50.68	74.00	23.32
3710.00	51.67	AV	H	31.76	2.57	37.02	48.98	54.00	5.02
4637.50	48.24	PK	H	32.58	3.08	37.11	46.79	74.00	27.21
4637.50	46.38	AV	H	32.58	3.08	37.11	44.93	54.00	9.07

Worst plots(Middle channel) **Horizontal**

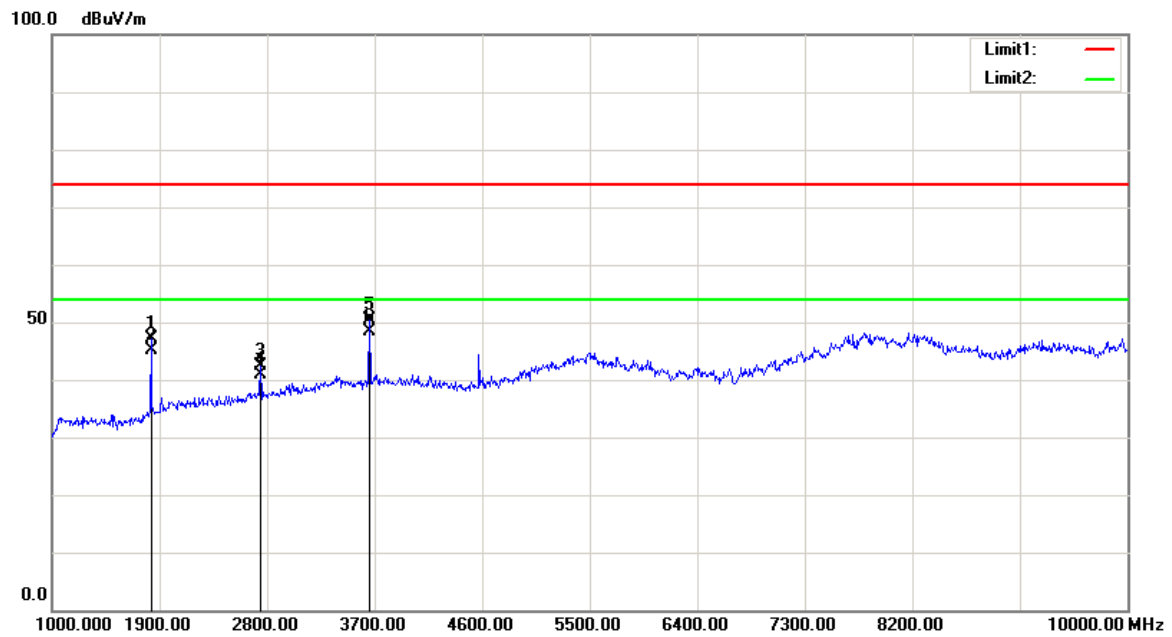

Vertical

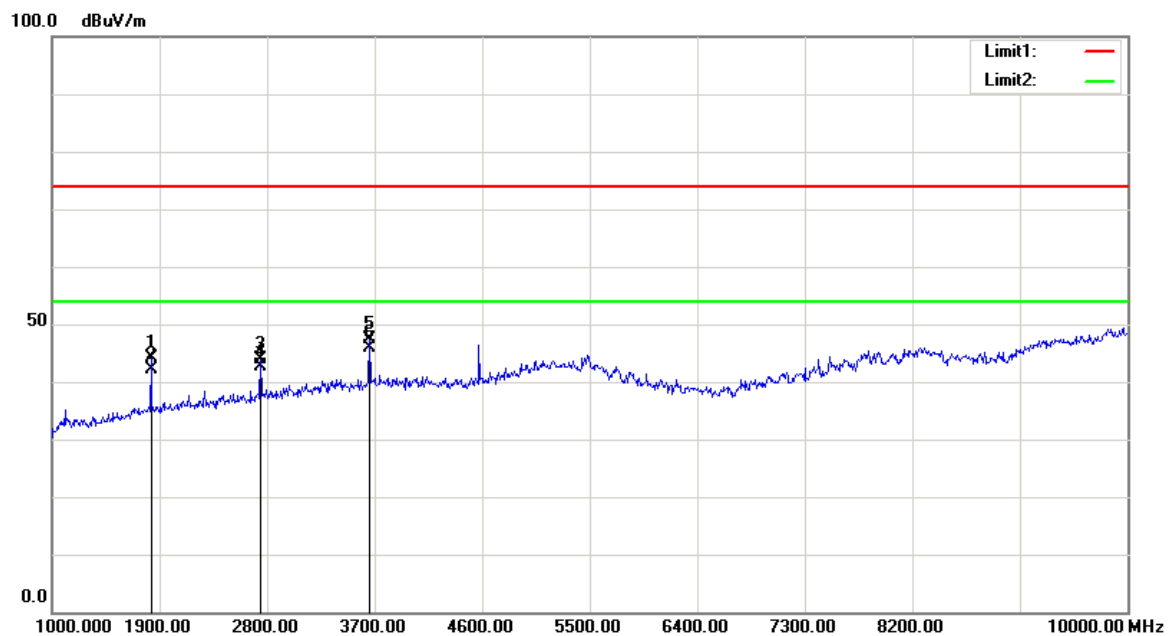


Test Mode: Transmitting

Tracker(P0102B)


1) 30MHz-1GHz

Low channel

Horizontal:

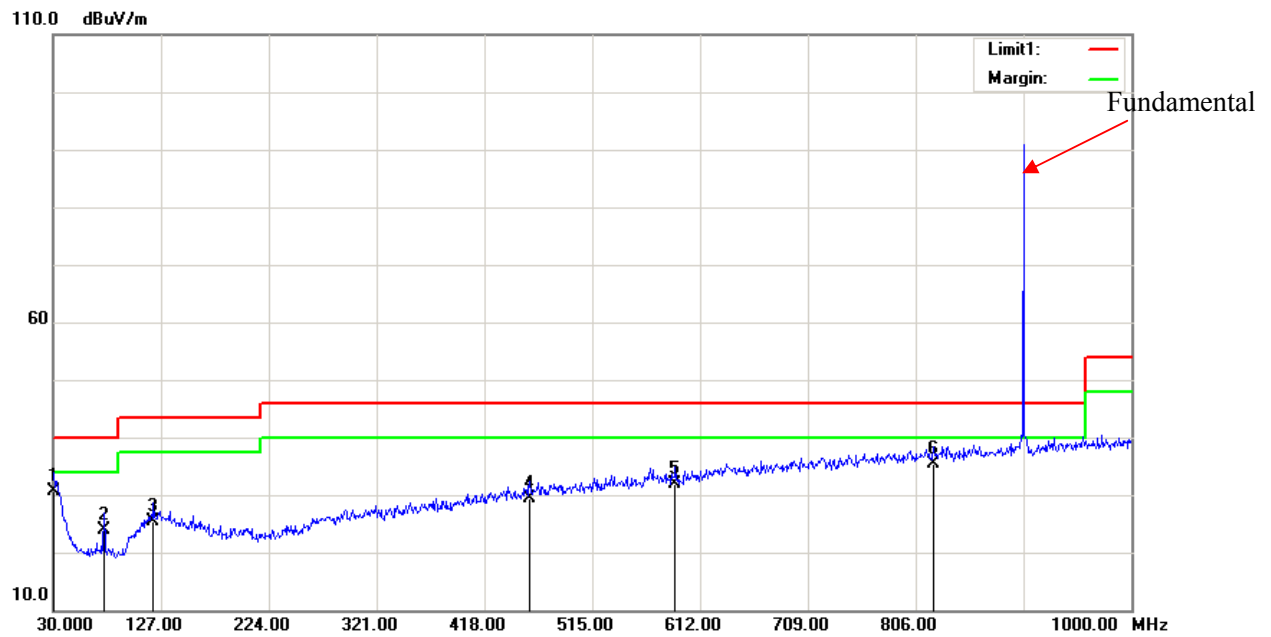


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	3.35	QP	27.35	30.70	40.00	9.30
75.5900	8.66	QP	15.14	23.80	40.00	16.20
120.2100	4.36	QP	21.14	25.50	43.50	18.00
458.7400	3.96	QP	25.44	29.40	46.00	16.60
589.6900	4.56	QP	27.44	32.00	46.00	14.00
821.5200	3.98	QP	31.42	35.40	46.00	10.60

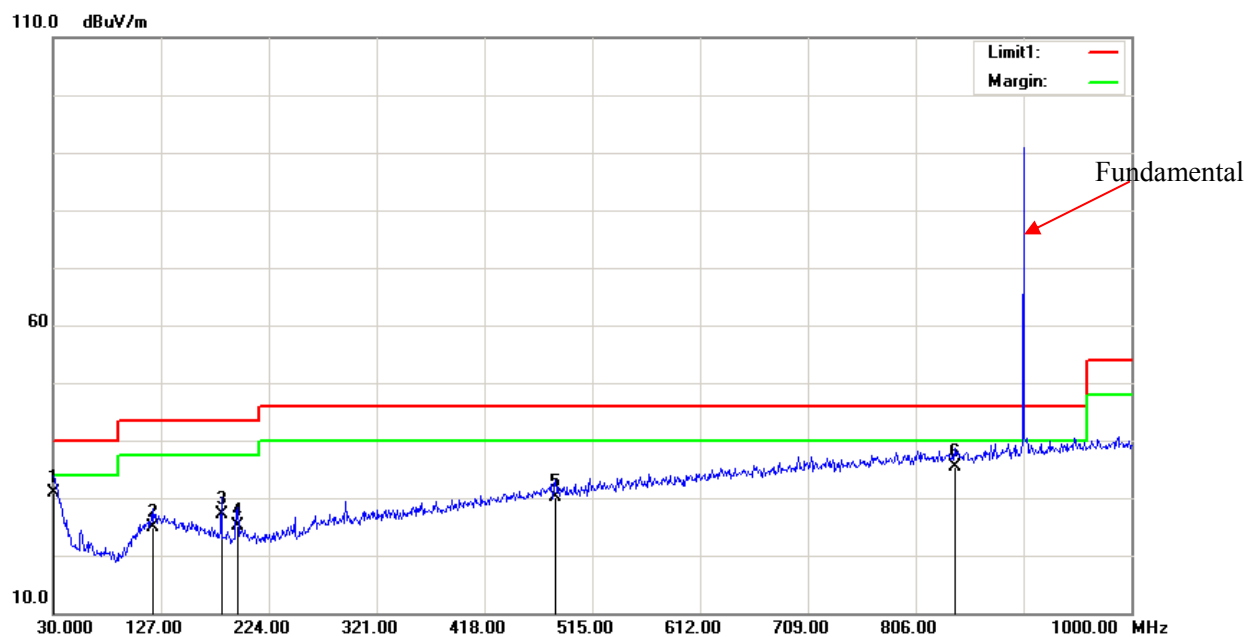
Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	3.55	QP	27.35	30.90	40.00	9.10
119.2400	3.89	QP	21.11	25.00	43.50	18.50
181.3200	8.79	QP	18.31	27.10	43.50	16.40
195.8700	6.32	QP	18.88	25.20	43.50	18.30
482.0200	4.03	QP	26.17	30.20	46.00	15.80
840.9200	7.68	QP	27.82	35.50	46.00	10.50

Middle channel

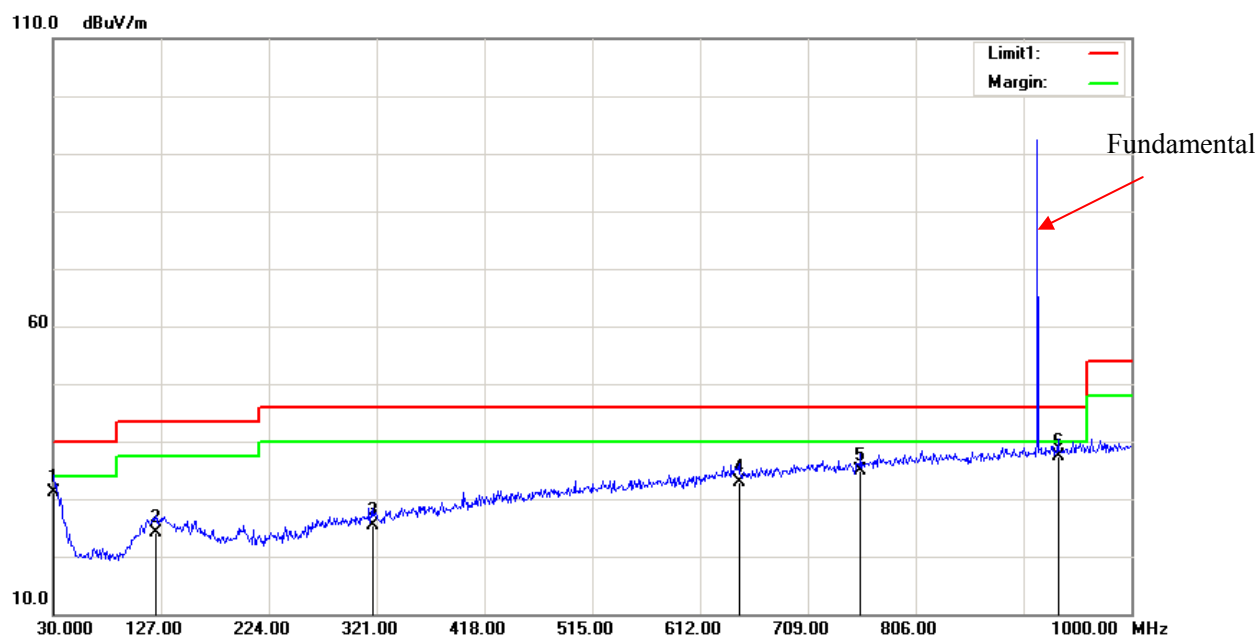Horizontal:


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	2.94	QP	28.16	31.10	40.00	8.90
122.1500	2.85	QP	21.35	24.20	43.50	19.30
317.1200	3.62	QP	21.78	25.40	46.00	20.60
646.9200	4.13	QP	28.87	33.00	46.00	13.00
756.5300	4.35	QP	30.45	34.80	46.00	11.20
934.0400	14.62	QP	22.68	37.30	46.00	8.70

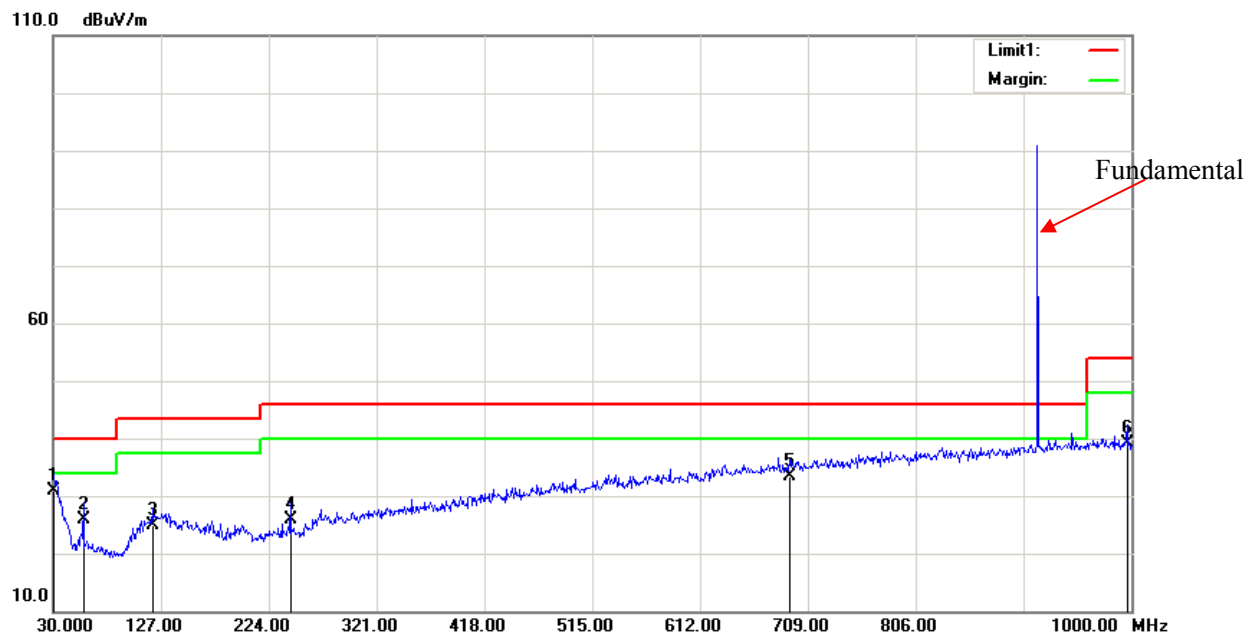Vertical:


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	2.64	QP	28.16	30.80	40.00	9.20
57.1600	11.75	QP	14.05	25.80	40.00	14.20
119.2400	3.79	QP	21.11	24.90	43.50	18.60
243.4000	6.66	QP	19.24	25.90	46.00	20.10
692.5100	3.97	QP	29.43	33.40	46.00	12.60
996.1200	15.96	QP	23.24	39.20	54.00	14.80

High channel

Horizontal:

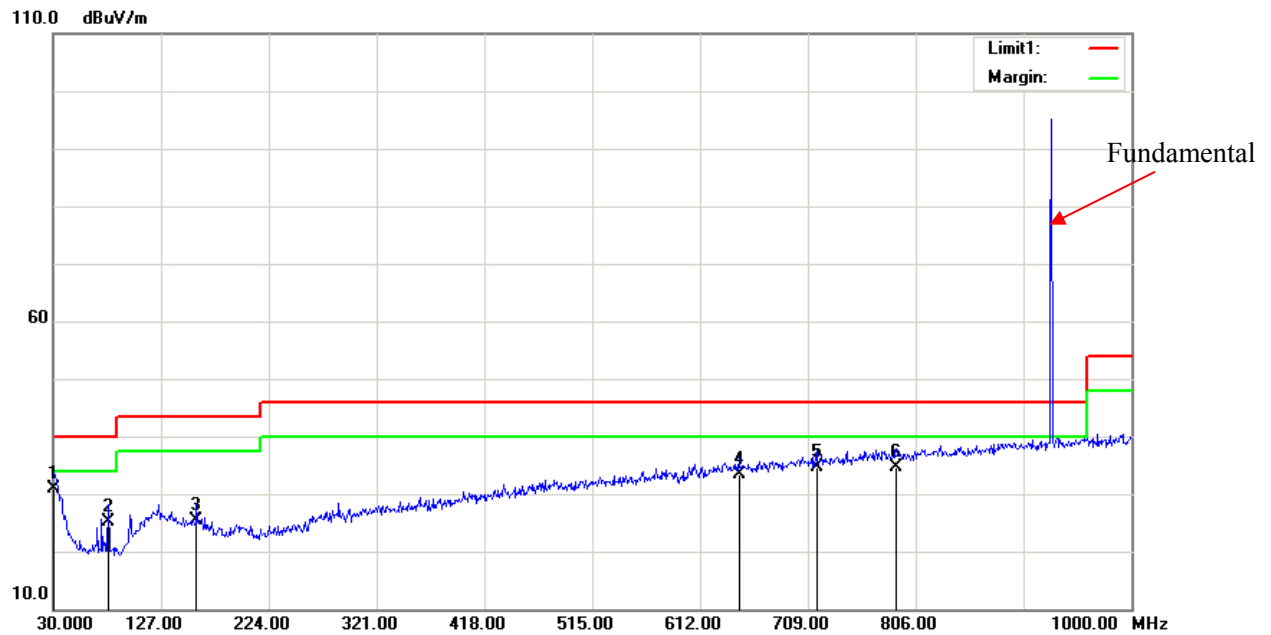

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	3.45	QP	27.35	30.80	40.00	9.20
79.4700	10.26	QP	14.94	25.20	40.00	14.80
159.0100	5.49	QP	19.81	25.30	43.50	18.20
646.9200	4.63	QP	28.87	33.50	46.00	12.50
716.7600	4.80	QP	29.90	34.70	46.00	11.30
788.5400	3.77	QP	30.93	34.70	46.00	11.30

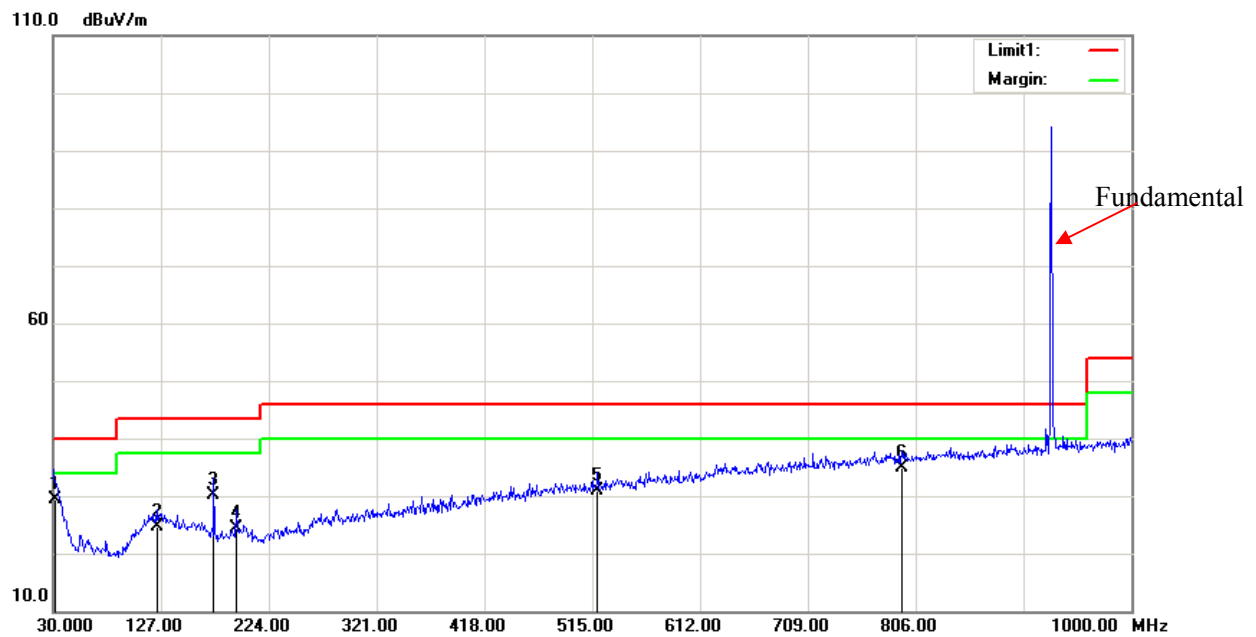
Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
31.9400	2.76	QP	26.64	29.40	40.00	10.60
123.1200	3.25	QP	21.35	24.60	43.50	18.90
174.5300	11.41	QP	18.69	30.10	43.50	13.40
194.9000	5.69	QP	18.81	24.50	43.50	19.00
519.8500	4.39	QP	26.61	31.00	46.00	15.00
793.3900	4.04	QP	30.86	34.90	46.00	11.10


2) Fundamental, and above 1GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 902.5 MHz									
902.50	65.20	QP	H	22.35	4.29	0.00	91.84	N/A	N/A
902.50	63.40	QP	V	22.35	4.29	0.00	90.04	N/A	N/A
902.00	12.20	QP	H	22.34	4.29	0.00	38.83	71.84	33.01
1805.00	60.08	PK	H	26.48	1.66	35.90	52.32	74.00	21.68
1805.00	58.15	AV	H	26.48	1.66	35.90	50.39	54.00	3.61
2707.50	46.35	PK	H	29.05	1.88	36.47	40.81	74.00	33.19
2707.50	44.32	AV	H	29.05	1.88	36.47	38.78	54.00	15.22
3610.00	52.56	PK	H	31.54	2.41	37.11	49.40	74.00	24.60
3610.00	50.78	AV	H	31.54	2.41	37.11	47.62	54.00	6.38
4512.50	46.54	PK	H	32.33	3.02	37.14	44.75	74.00	29.25
4512.50	44.78	AV	H	32.33	3.02	37.14	42.99	54.00	11.01
Middle Channel: 915 MHz									
915.00	65.50	QP	H	22.40	4.21	0.00	92.11	N/A	N/A
915.00	63.70	QP	V	22.40	4.21	0.00	90.31	N/A	N/A
1830.00	59.10	PK	H	26.59	1.66	35.95	51.40	74.00	22.60
1830.00	57.51	AV	H	26.59	1.66	35.95	49.81	54.00	4.19
2745.00	48.01	PK	H	29.18	1.91	36.51	42.59	74.00	31.41
2745.00	46.15	AV	H	29.18	1.91	36.51	40.73	54.00	13.27
3660.00	54.58	PK	H	31.65	2.50	37.06	51.67	74.00	22.33
3660.00	53.07	AV	H	31.65	2.50	37.06	50.16	54.00	3.84
4575.00	48.51	PK	H	32.45	3.08	37.13	46.91	74.00	27.09
4575.00	46.58	AV	H	32.45	3.08	37.13	44.98	54.00	9.02
High Channel: 927.5 MHz									
927.50	68.10	QP	H	22.55	4.35	0.00	95.00	N/A	N/A
927.50	67.35	QP	V	22.55	4.35	0.00	94.25	N/A	N/A
928.00	20.40	QP	H	22.56	4.34	0.00	47.30	75.00	27.70
1855.00	60.24	PK	H	26.69	1.66	35.99	52.60	74.00	21.40
1855.00	58.95	AV	H	26.69	1.66	35.99	51.31	54.00	2.69
2782.50	48.89	PK	H	29.32	1.94	36.55	43.60	74.00	30.40
2782.50	46.75	AV	H	29.32	1.94	36.55	41.46	54.00	12.54
3710.00	51.33	PK	H	31.76	2.57	37.02	48.64	74.00	25.36
3710.00	50.05	AV	H	31.76	2.57	37.02	47.36	54.00	6.64
4637.50	47.35	PK	H	32.58	3.08	37.11	45.90	74.00	28.10
4637.50	45.12	AV	H	32.58	3.08	37.11	43.67	54.00	10.33

Worst plots(Tracker, High channel) **Horizontal**

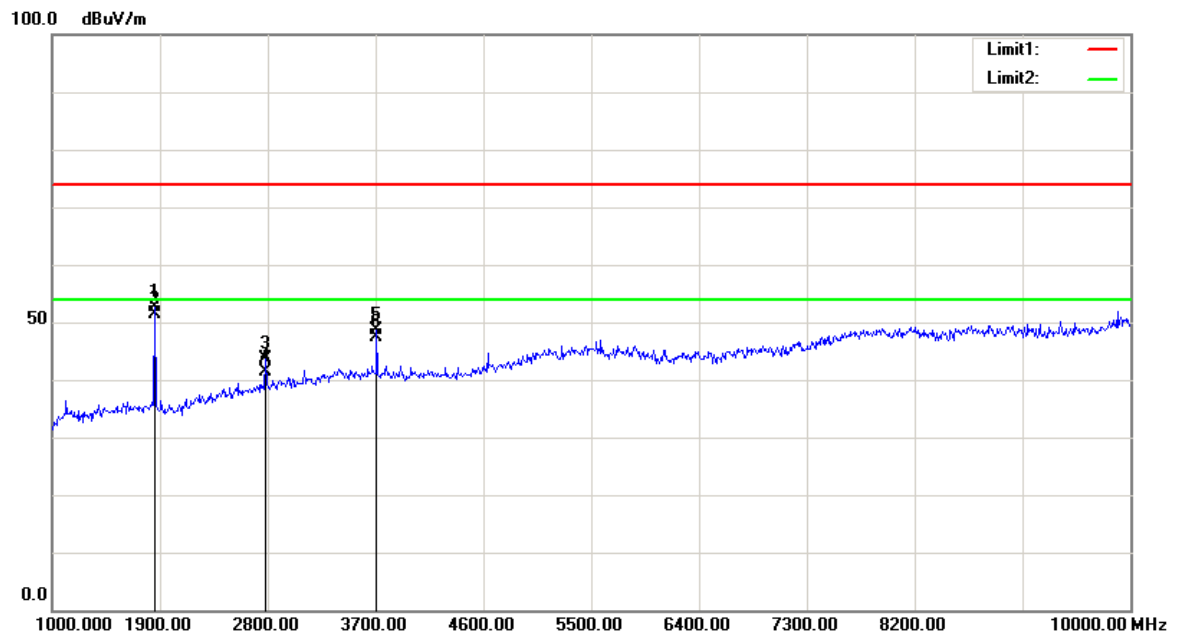

Vertical

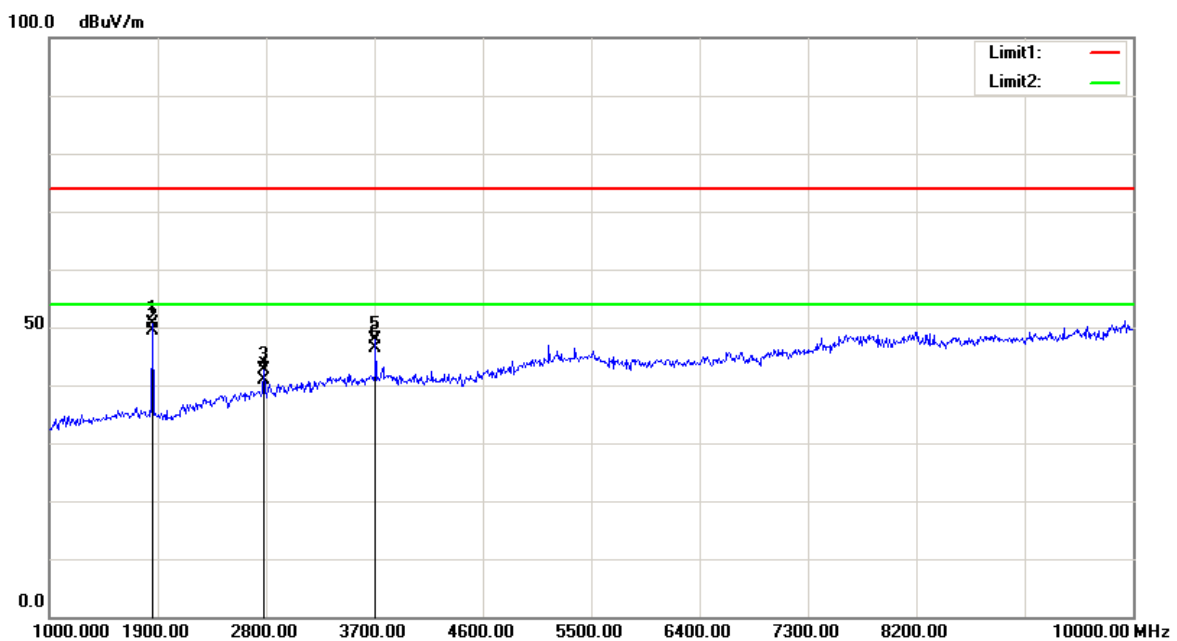

FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 a) - CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1a)

- a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 3 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	27.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.1 kPa

* The testing was performed by Harry Yang on 2018-10-19.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
Low	902.5	0.500	0.139
Middle	915	0.500	0.138
High	927.5	0.500	0.140


Low Channel

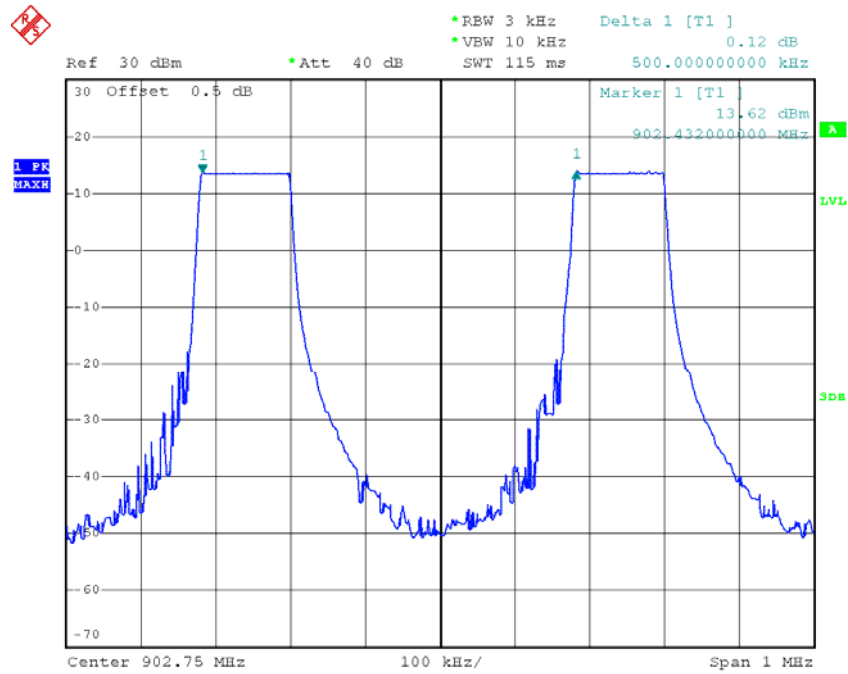

Date: 19.OCT.2018 14:14:50

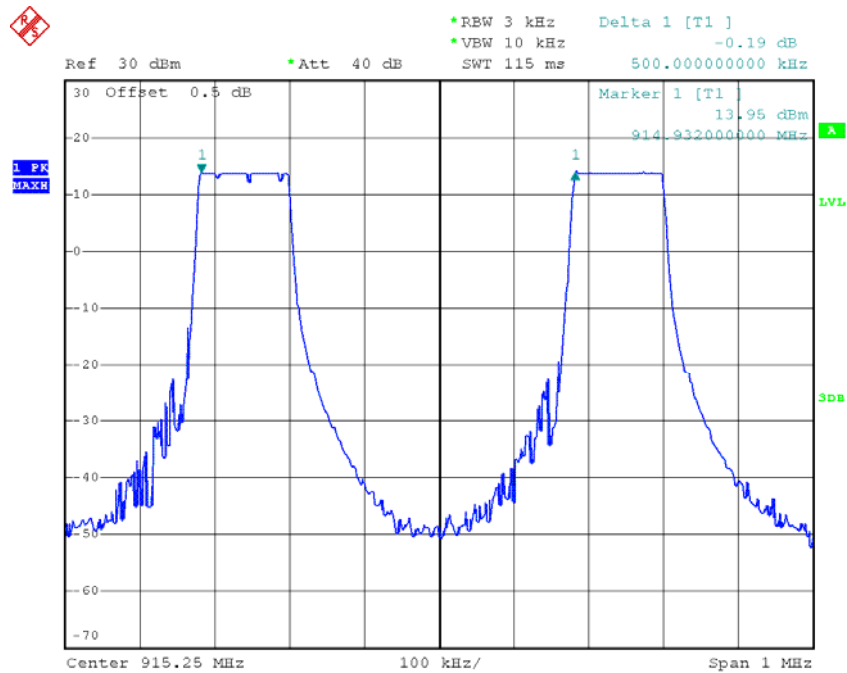Middle Channel

Date: 19.OCT.2018 14:10:53

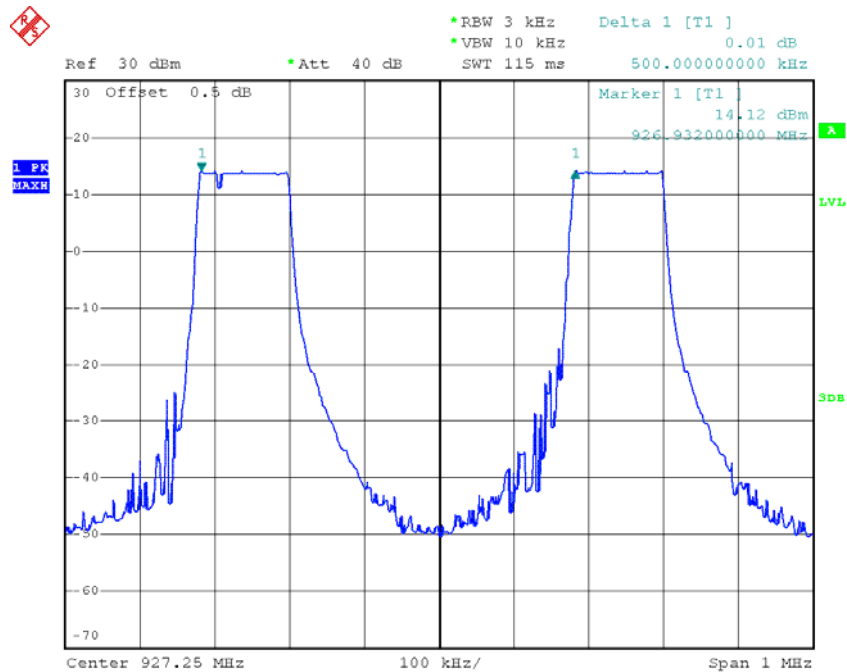High Channel

Date: 19.OCT.2018 14:07:28

RSS-247 CLUASE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH TESTING

Applicable Standard

According to FCC §15.247(a) (1)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1 a):

- a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to RSS-Gen Clause 6.7:

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the "x dB bandwidth" is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.1 kPa

* The testing was performed by Harry Yang on 2018-10-19.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% occupied Bandwidth (MHz)
Low	902.5	0.139	0.126
Middle	915.0	0.138	0.125
High	927.5	0.140	0.126


20dB Bandwidth & 99% Occupied Bandwidth:

Low Channel

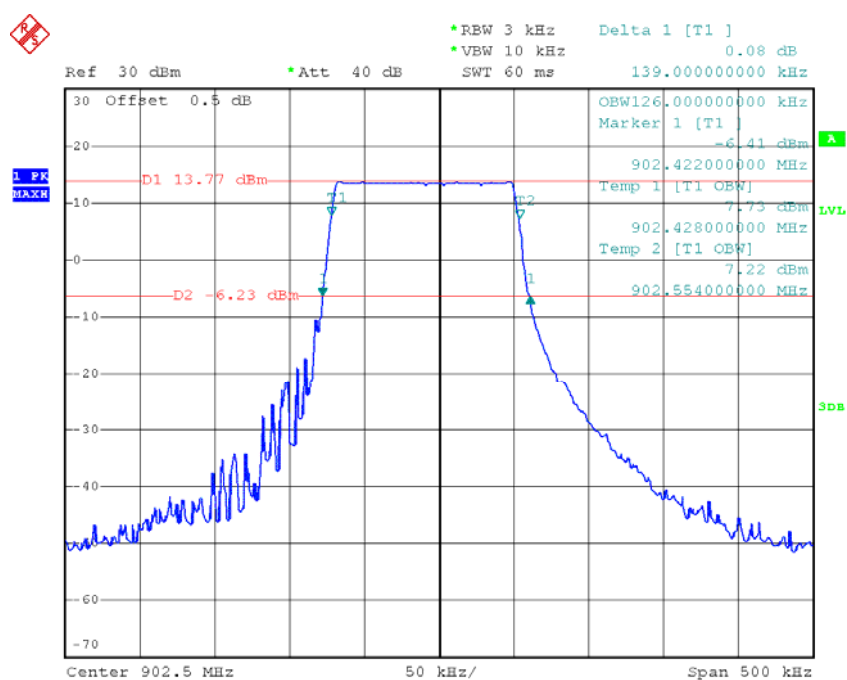


Date: 19.OCT.2018 13:42:25

Middle Channel

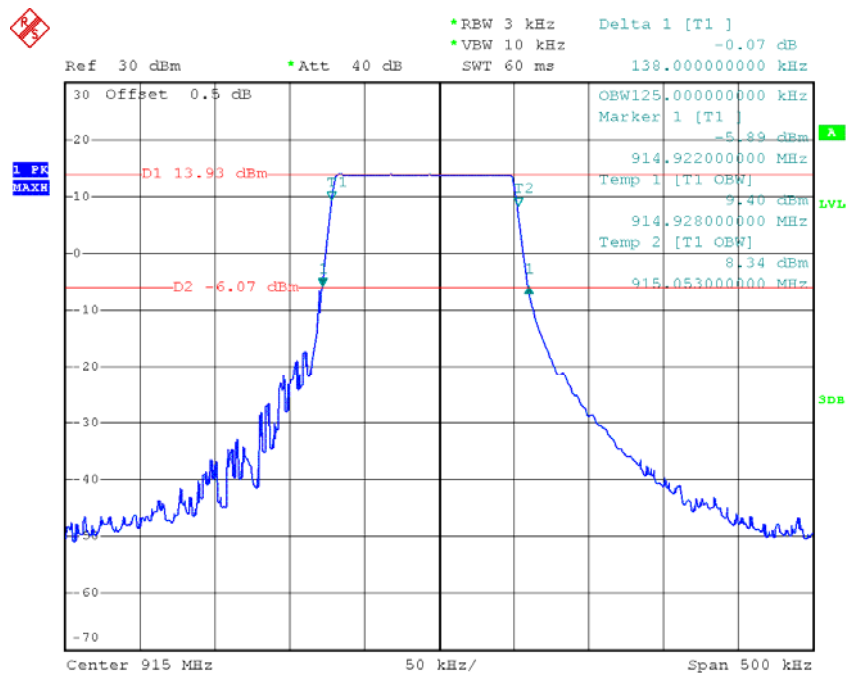

Date: 19.OCT.2018 13:45:05

High Channel

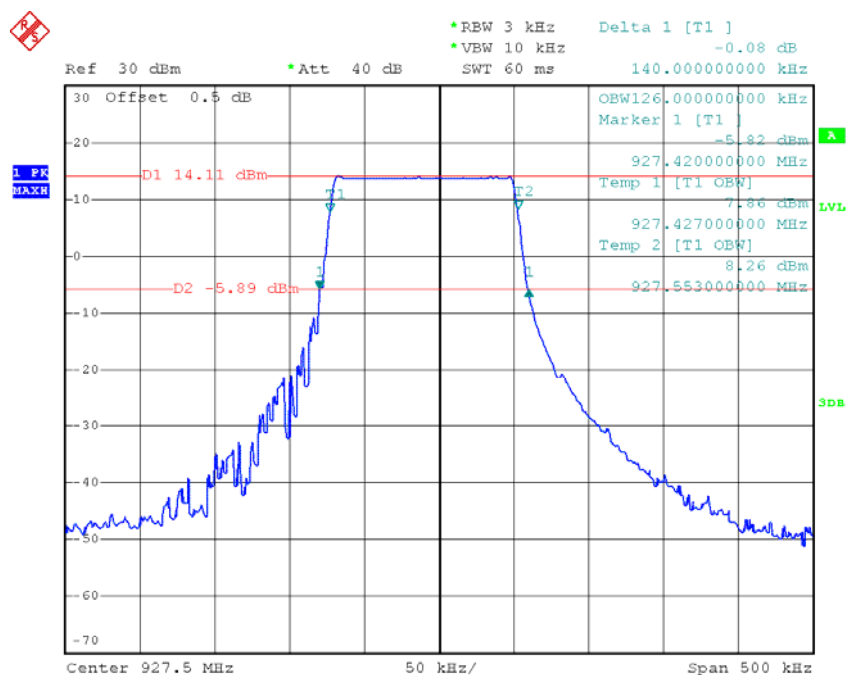

Date: 19.OCT.2018 13:47:55

FCC §15.247(a) (1) (i)& RSS-247 CLAUSE 5.1 C) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (i), RSS-247 Clause 5.1 d)

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

According to RSS-247 Clause 5.1 d)

- c) For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.1 kPa


* The testing was performed by Harry Yang on 2018-10-19.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
902-928	51	≥50

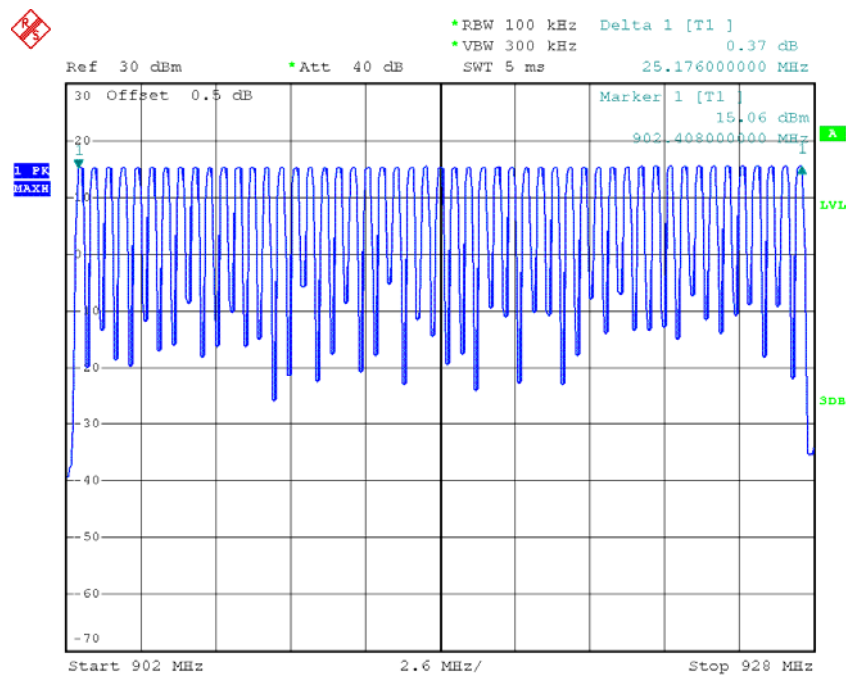Number of Hopping Channels

Date: 19.OCT.2018 13:53:38

FCC §15.247(a) (1) (i)& RSS-247 Clause 5.1 C) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (i), RSS-247 Clause 5.1 d)

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

According to RSS-247 Clause 5.1 d)

- c) For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.1 kPa

* The testing was performed by Harry Yang on 2018-10-19.


Test Mode: Transmitting

Channel	Frequency (MHz)	Pulse Width (ms)	Real Observed Period(s)	Hopping number in Observed Period	Dwell Time (s)	Limit (s)	Result
Low	902.5	41.10	20	2	0.0822	0.4	Compliance
Middle	915.0	40.9	20	2	0.0818	0.4	Compliance
High	927.5	41.10	20	2	0.0822	0.4	Compliance


Note:

Dwell time=Pulse width × hopping number per channel in Observed Period

Observed Period=20s

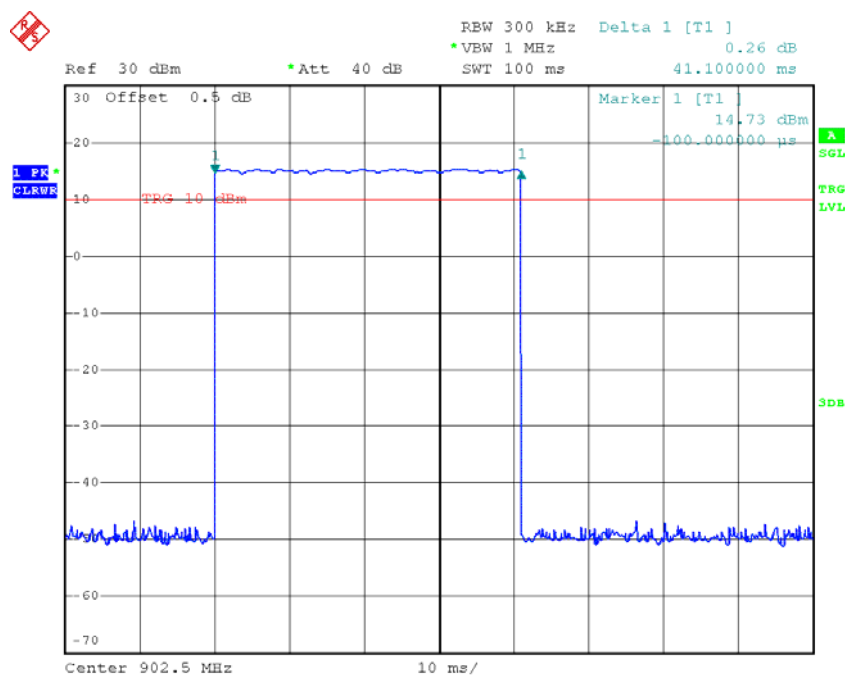
Low Channel

Date: 19.OCT.2018 14:22:03

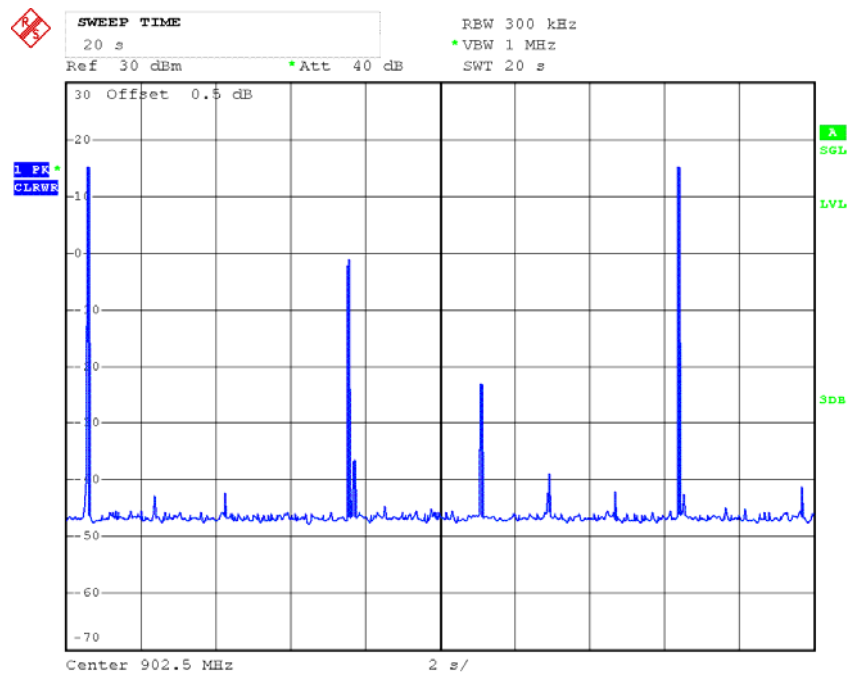

Date: 19.OCT.2018 14:28:38

Middle Channel

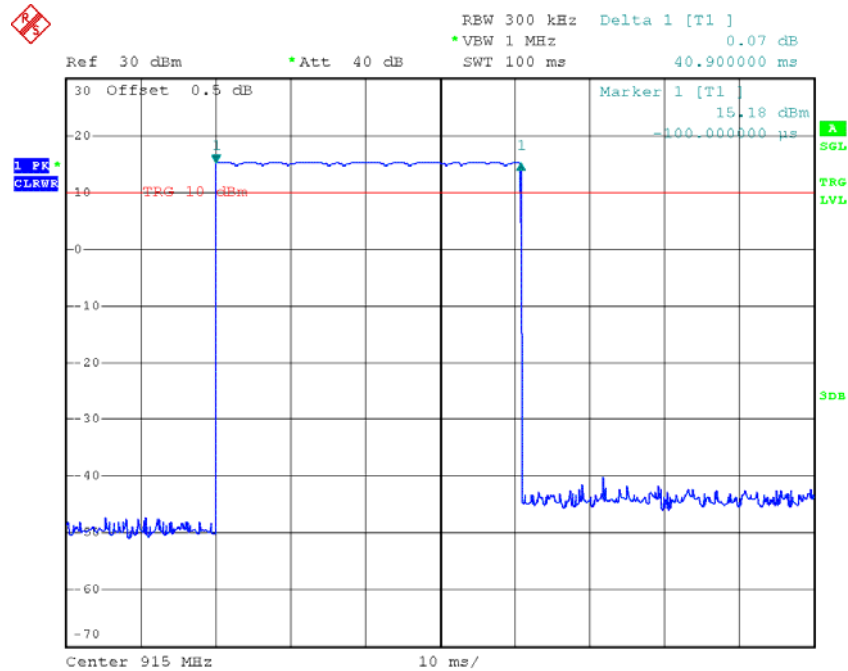

Date: 19.OCT.2018 14:23:23



RBW 300 kHz Delta 1 [T1] -0.02 dB
 *VBW 1 MHz
 *Att 40 dB SWT 100 ms 41.100000 ms

Ref 30 dBm Offset 0.5 dB


Marker 1 [T1] 15.44 dBm
 -100.000000 μ s

1 PK
 CLUR

TRG 10 dBm

Center 927.5 MHz 10 ms/

Date: 19.OCT.2018 14:24:04

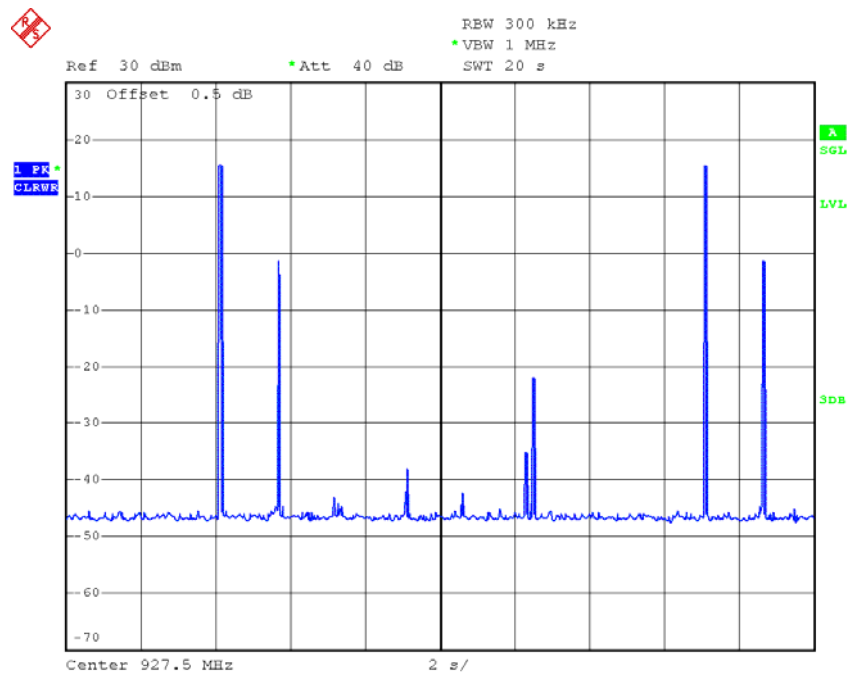

Date: 19.OCT.2018 14:25:49

FCC §15.247(b) (2), RSS-247 Clause 5.4 a) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b)

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

According to RSS-247 Clause 5.4 a)

- a) For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W and the e.i.r.p. shall not exceed 1 W if the hopset uses less than 50 hopping channels.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.1 kPa


* The testing was performed by Harry Yang on 2018-10-19.

Test Result: Compliance.

Test Mode: Transmitting


Channel	Frequency (MHz)	Peak Conducted Output power (dBm)	Peak Conducted Output power Limit (dBm)	EIRP (dBm)	EIRP Limit For ISSED (dBm)
Low	902.5	15.06	30	18.06	36
Middle	915.0	15.19	30	18.19	36
High	927.5	15.39	30	18.39	36

Note: The data above was tested in conducted mode, the antenna gain is 3dBi.

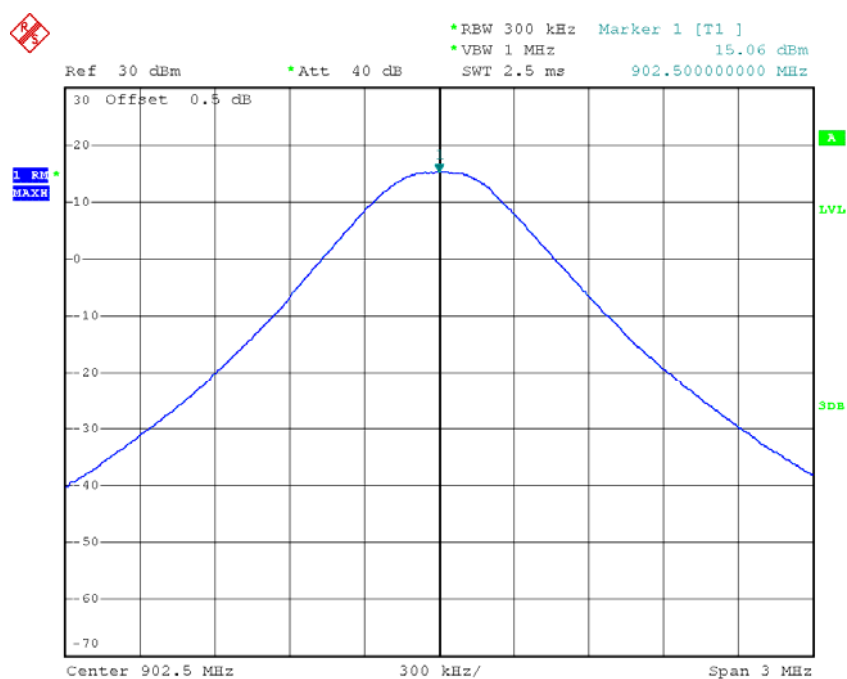Low Channel


Date: 19.OCT.2018 14:34:09

Middle Channel

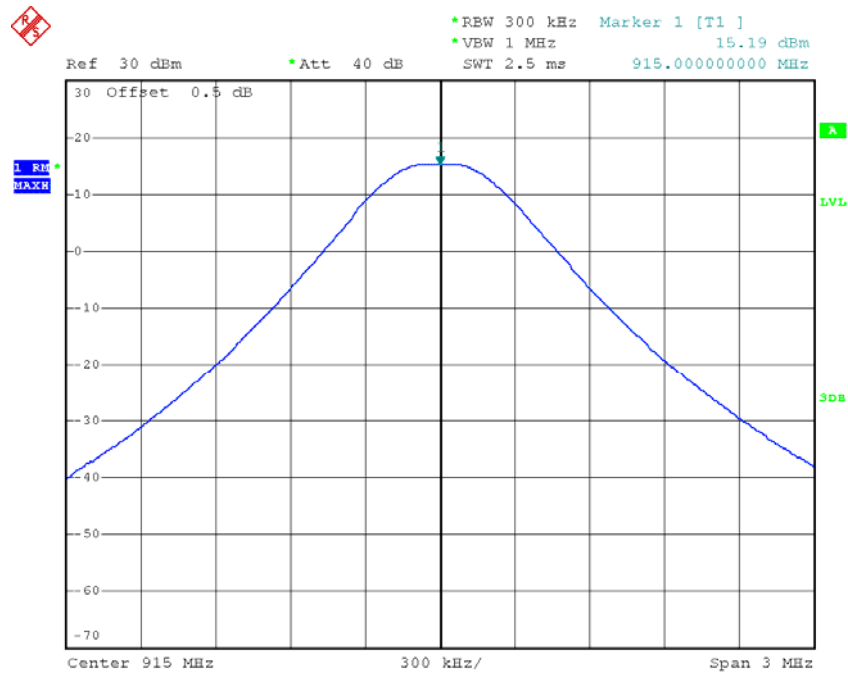

Date: 19.OCT.2018 14:34:36

High Channel

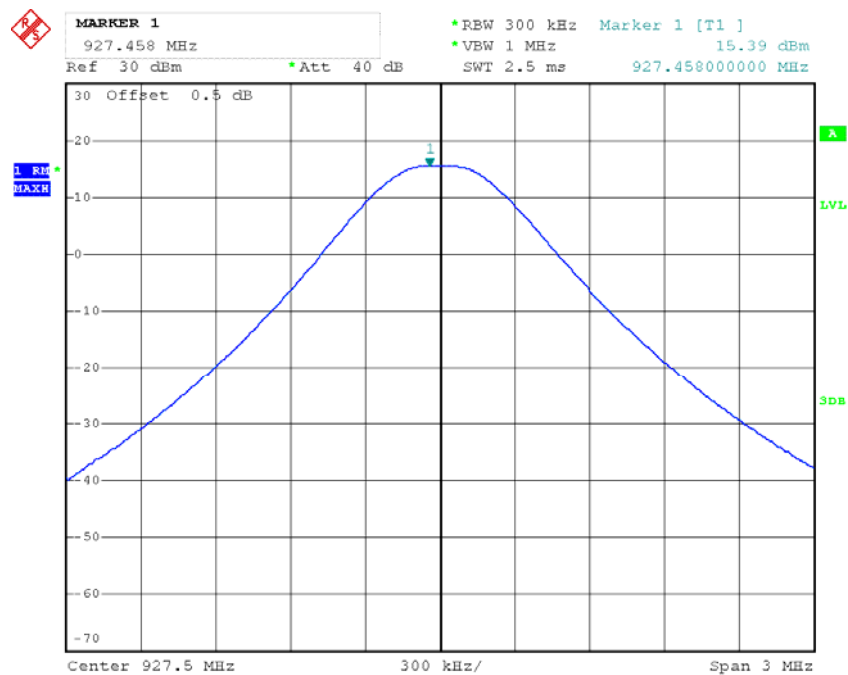

Date: 19.OCT.2018 14:35:04

FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.1 kPa

* The testing was performed by Harry Yang on 2018-10-19.



Test Result: Compliance

Single mode:


Band Edge, Left Side

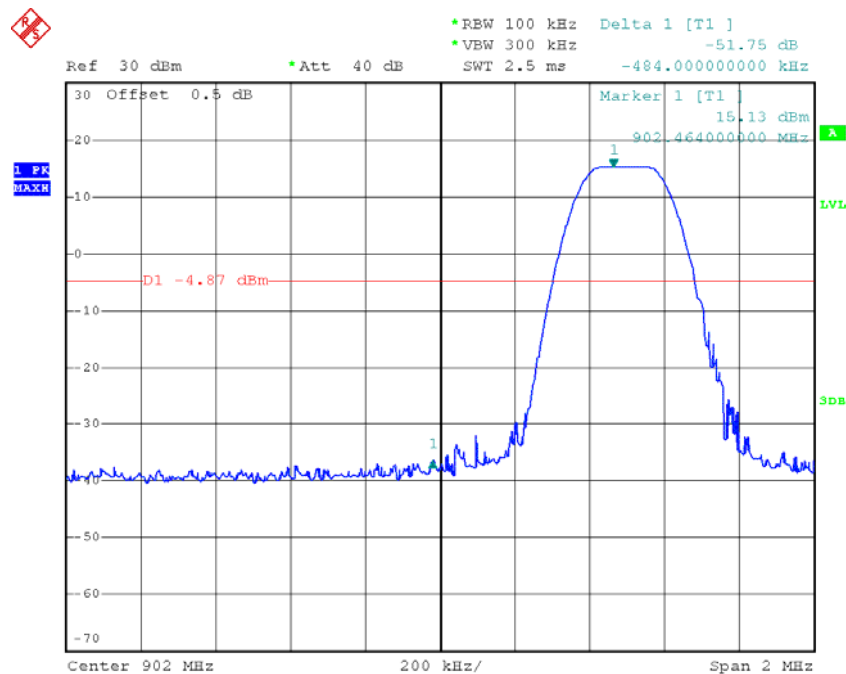

Date: 19.OCT.2018 14:01:41

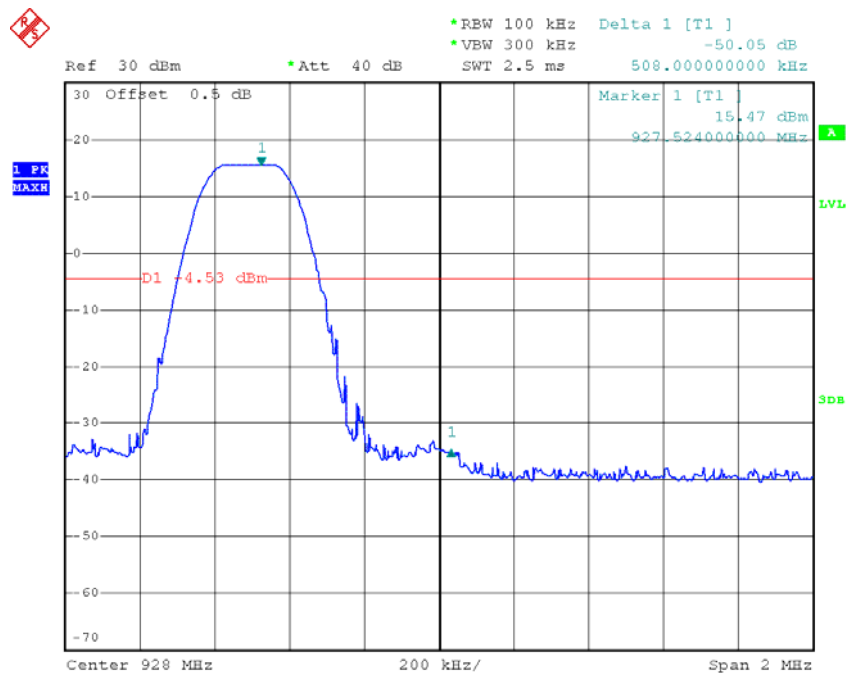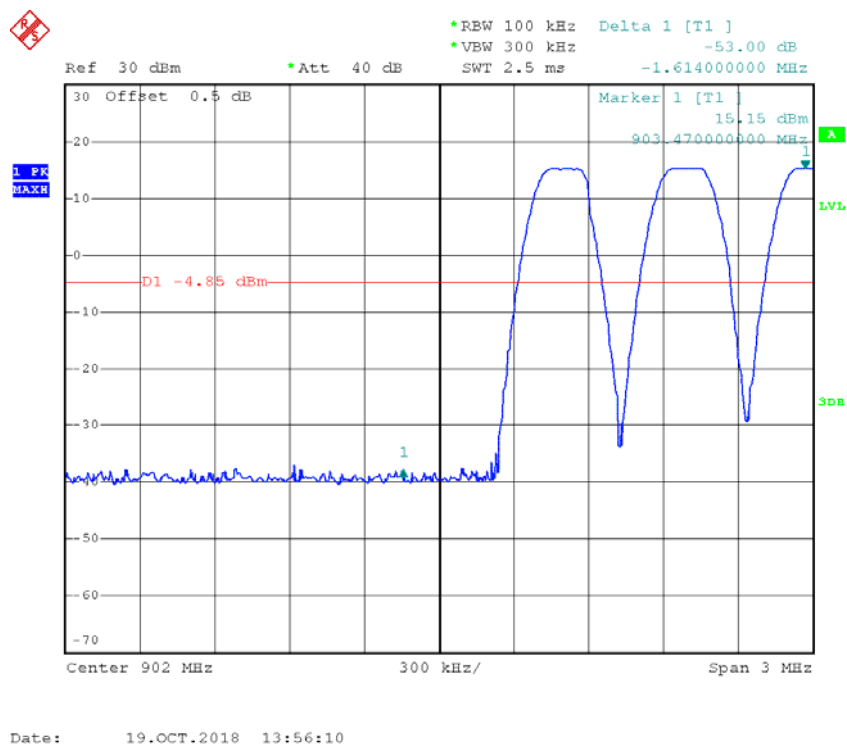Band Edge, Right Side*Hopping mode:***Band Edge, Left Side**

Band Edge, Right Side

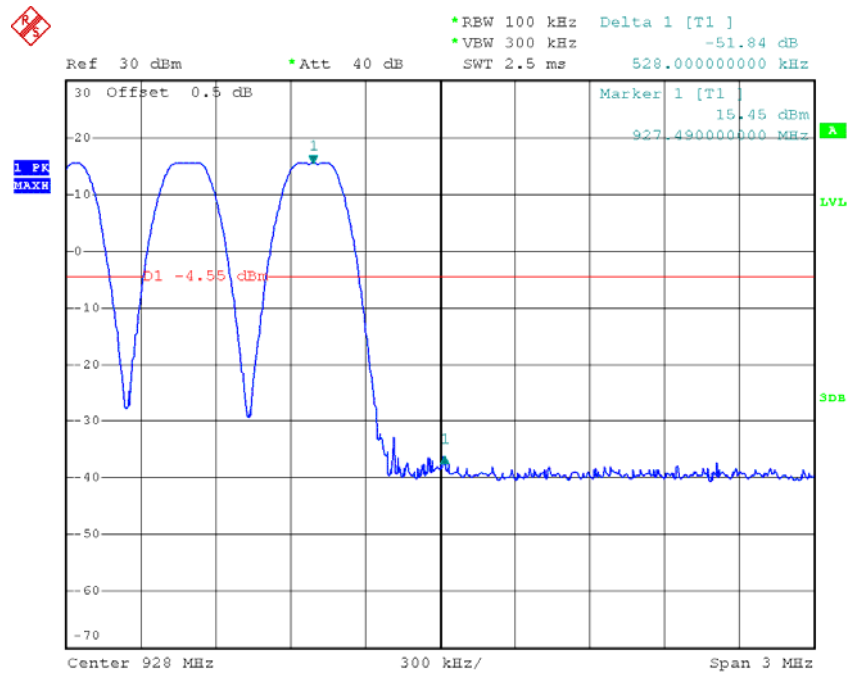

Date: 19.OCT.2018 13:57:21

***** END OF REPORT *****