



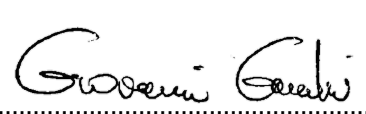

**TEST REPORT**  
**Nr. R20000901**

**Federal Communication Commission (FCC)**

<b>Report Reference No.</b> .....	R20000901
Date of issue: .....	20.02.2020
Total number pages: .....	27
<b>Applicant's name</b> .....	Elettronica GF S.r.l.
Address .....	Via Ca' Bianca, 10 – 48018 Faenza (RA) – Italy
<b>Test specification:</b>	
Standards .....	FCC Rules & Regulations, Title 47:2018 Part 15 paragraph(s): 209
Non-standard test method .....	N/A
<b>Test Report Form No.</b> .....	15_225CMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF .....	2020-01
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
<b>Test item description</b> .....	NFC/BLE (Gymkit) 5V RS232 board
Trademark .....	Elettronica GF
Manufacturer .....	Elettronica GF S.r.l.
Model / Type reference .....	0615F
FCC ID .....	2ARDN0615D
Rating(s) .....	5 Vdc
<b>Report</b>	
Tested by (name + signature) .....	G. Gandini 
Approved by (name + signature) .....	R. Beghetto 

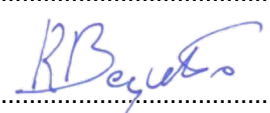

<b>1</b>	<b>Summary</b>	
1	Summary.....	2
2	Reference standard .....	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of test item(s).....	5
6.1	Photos of the test item.....	6
7	Verdict summary section .....	7
8	Test conditions.....	9
8.1	General.....	9
9	Test results .....	10
9.1	Radiated emissions .....	10

CMC Centro Misure Compatibilità S.r.l.



<b>2 Reference standard</b>	
FCC Rules and Regulation Title 47 part 15:2018	--
<b>3 List of attachments</b>	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
<b>4 Deviation(s) from test specification</b>	
None	
<b>5 Testing location</b>	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

CMC Centro Misure Compatibilità S.r.l.



<b>Testing and sampling:</b>	
Date of receipt of test item .....	07.01.2020
Testing start date .....	10.02.2020
Testing end date .....	14.02.2020
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion.  The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P200003
<b>General remarks:</b>	
<p>This report shall not be reproduced, except in full, without the written approval of CMC.            The test results presented in this report relate only to the object tested.            "(see appended table)": refers to a table appended to the report.            Throughout this report a comma is used as the decimal separator.</p>	
<b>Possible test case verdicts:</b>	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
<b>Definition of symbols used in this test report:</b>	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

CMC Centro Misure Compatibilità S.r.l.





## 6 General description of test item(s)

Description .....	NFC/BLE (Gymkit) 5V RS232 board						
Model Number .....	0615F						
FCC ID .....	2ARDN0615D						
Serial Number .....	--						
Brand name .....	Elettronica GF						
Nominal frequency .....	13,56 MHz						
Rated power supply .....		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 5 V					<input type="checkbox"/>
General mounting position .....	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/ceiling mounted equipment					
	<input checked="" type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
Type of equipment .....	<input checked="" type="checkbox"/>	Transmitter unit					
	<input type="checkbox"/>	Receiver unit					
Type of station .....	<input checked="" type="checkbox"/>	Fixed station					
	<input type="checkbox"/>	Portable station					
	<input type="checkbox"/>	Mobile station					
Operating modes .....	No.	Operating mode of test item					
	1	TX mode, continuous transmission at 13,56 MHz					



6.1 Photos of the test item

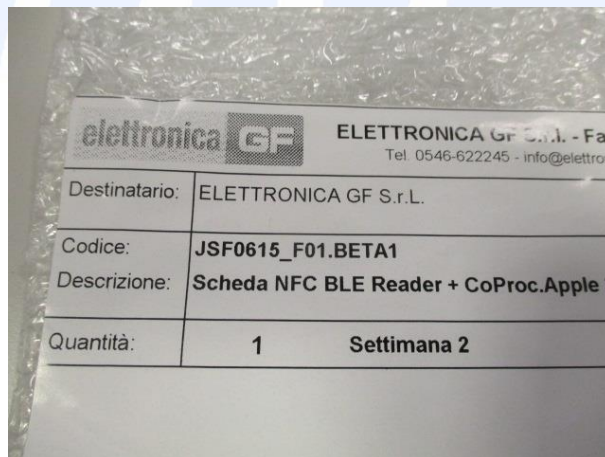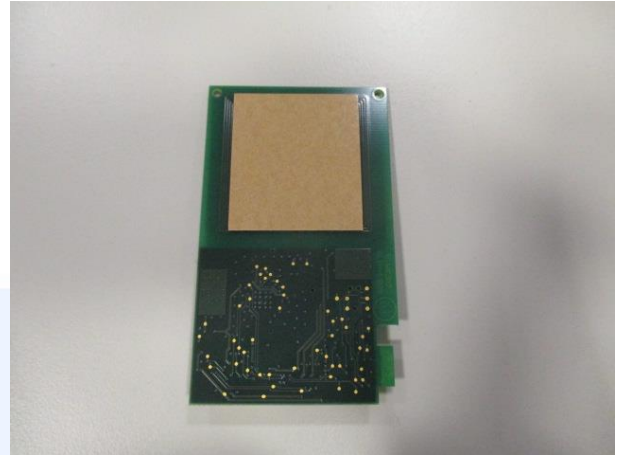

CMC Centro Misure Compatibilità S.r.l.



## 7 Verdict summary section

FCC Rules & Regulations, Title 47:2018 Part 15 paragraph(s): 209			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.209	Radiated emissions	ANSI C63.10	<b>P</b>





<b>Normative references</b>	
<b>Reference no.</b>	<b>Description</b>
FCC Rules and Regulation Title 47 part 15:2018	--
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices








## 8 Test conditions

### 8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.		
	The climatic conditions during the tests were within the following limits:		
	<b>Temperature</b>	<b>Humidity</b>	<b>Atmospheric pressure</b>
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties .....	Attachment 1		

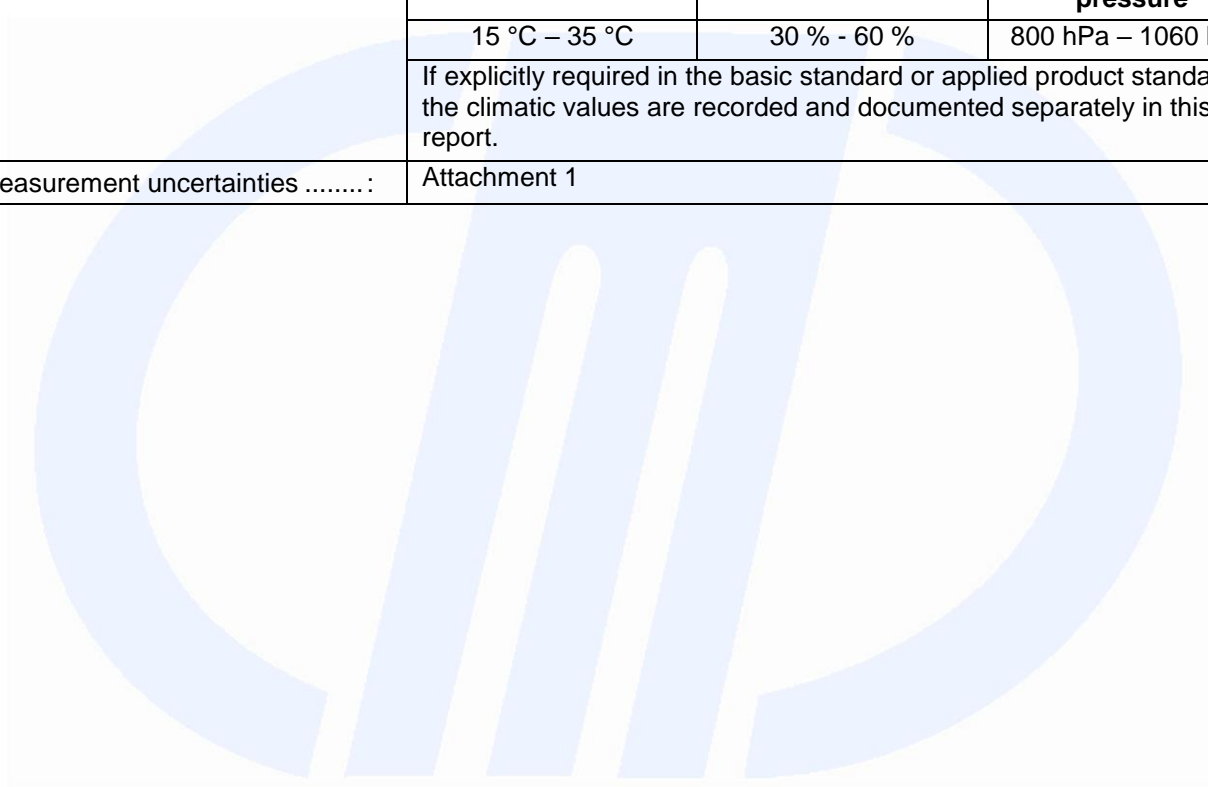

CMC Centro Misure Compatibilità S.r.l.



## 9 Test results

### 9.1 Radiated emissions

Tested by .....	G. Gandini	
Test date .....	10.02.2020	
Test location (stand) .....	Semi-anechoic chamber (CMC A070)	
Reference standards .....	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description .....	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description .....	--	
Test method applied .....	<input checked="" type="checkbox"/>	SAC with measurement distance [m]: 10
Supplementary information.....	According to KDB 414788 D01 chapter 2, emissions at frequencies below 30 MHz have been evaluated on 10 m SAC test site. As demonstrated on document "Test site correlation" date 28.03.2019, results of tests on SAC10 are slightly higher than the results of tests on OATS test site (+1 dB at 10 m and +4,2 dB at 3 m). The evaluation has been performed at both 10 and 3 m distance and at both 125 kHz and 13,56 MHz frequency	

### Acceptance limits

<b>Acceptance limits for emissions in restricted frequency bands (<math>f &lt; 1000</math> MHz)</b>		
Frequency range (MHz)	Test distance (m)	Limits [dB( $\mu$ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

**Remarks:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

<b>Acceptance limits for emissions in restricted frequency bands (<math>f \geq 1000</math> MHz)</b>			
Frequency (MHz)	Test distance (m)	AV limits [dB( $\mu$ V/m)]	Peak limits [dB( $\mu$ V/m)]
> 1000	3	54	74




The restricted frequency bands are listed in the following table

MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

**Acceptance limits for emissions in non-restricted frequency bands**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test setup**

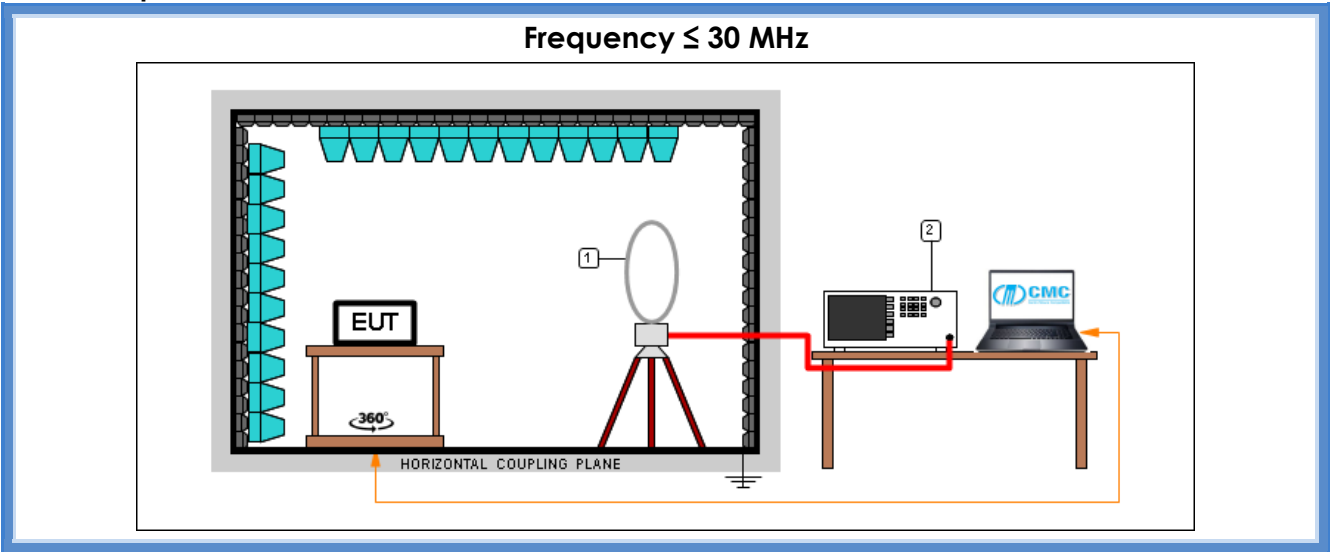

*Test setup PE004\_01*

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

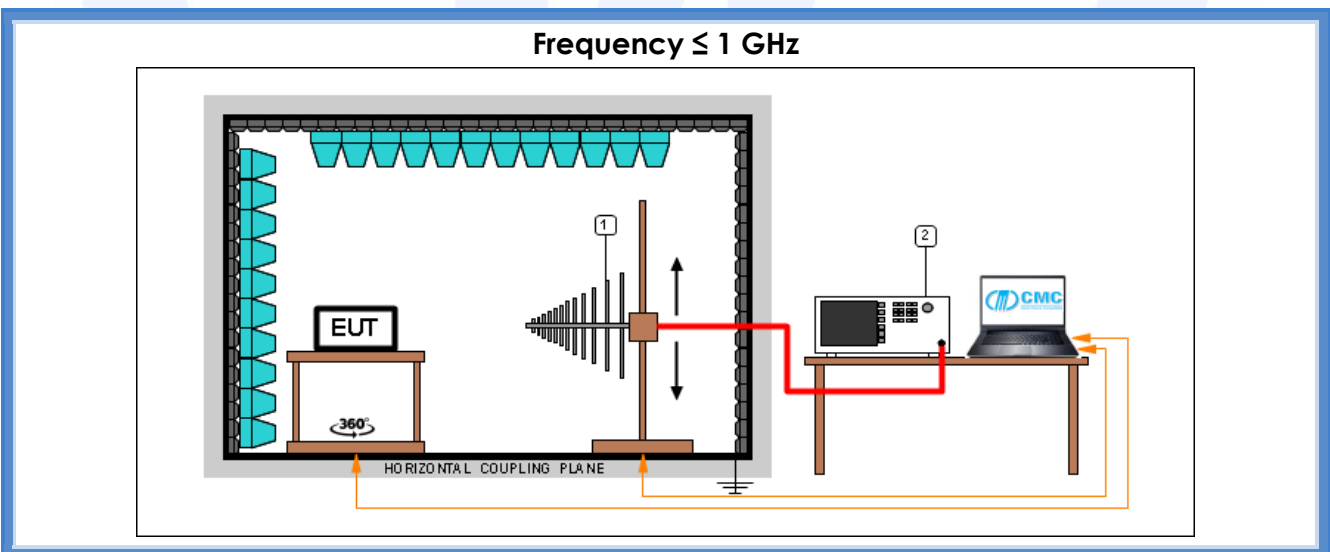

*Test setup PE004\_02*

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

*Test setup PE004\_03*

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna



**Result**

<i>Polarization</i>	<i>Frequency Range (MHz)</i>	<i>Graphs</i>	<i>Remarks</i>	<i>Result</i>
V	30 – 300	G20000902	--	P
H	30 – 300	G20000903	--	P
H	300 – 1000	G20000904	--	P
V	300 – 1000	G20000905	--	P
Loop	0,009 – 30	G20000907	--	P


**Remarks:** EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor  $40\log(\text{test distance}/10)$  based on the measuring distance provided by the standard. Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor  $20\log(\text{test distance}/10)$  based on the measuring distance provided by the standard. Peaks above the limits are caused by the nominal transmitting frequency

*Graphs Legend*

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +  
 AV: Average; AV [1s] (average at 1 second) values are marked with a X



## Graphs

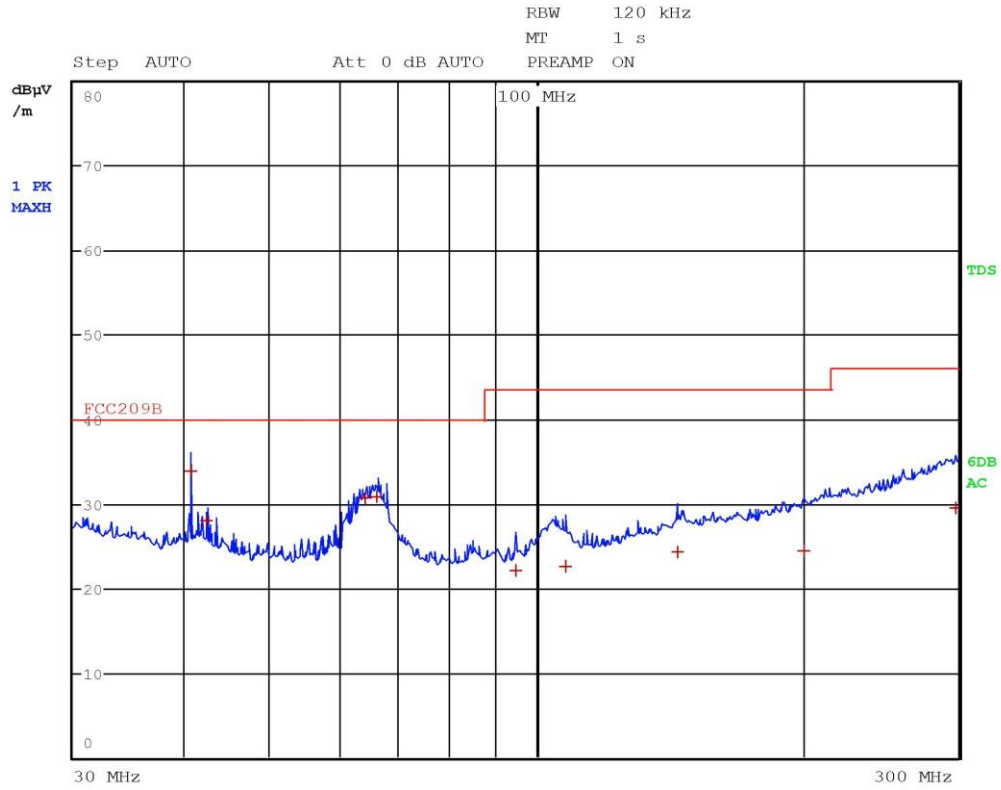


Gandini 20000902



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	40.68 MHz	33.81	-6.18
1 Quasi Peak	42.3982051282 MHz	27.92	-12.07
1 Quasi Peak	64.1133974359 MHz	30.67	-9.32
1 Quasi Peak	66.0782051282 MHz	30.87	-9.12
1 Quasi Peak	94.92 MHz	22.17	-21.34
1 Quasi Peak	108.04 MHz	22.68	-20.83
1 Quasi Peak	144.428525641 MHz	24.27	-19.24
1 Quasi Peak	200.68 MHz	24.45	-19.06
1 Quasi Peak	298.24 MHz	29.54	-16.47

Gandini 20000902

CMC Centro Misure Compatibilità S.r.l.

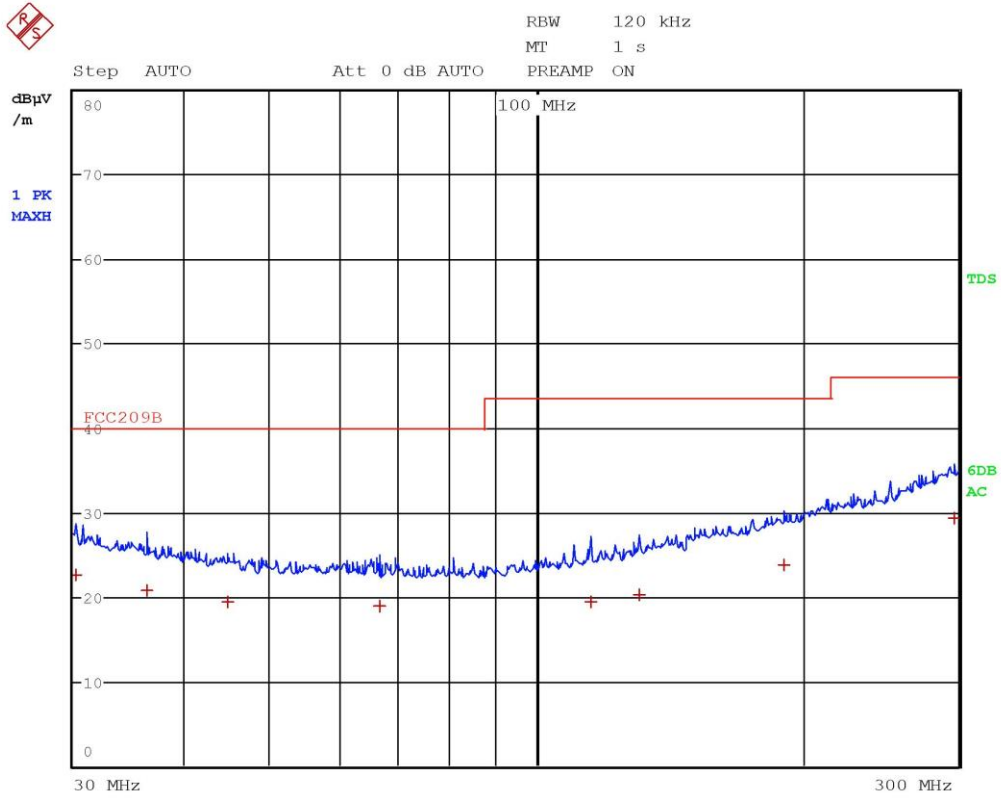

Gandini 20000903


CMC Centro Misure Compatibilità S.r.l.





EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dB $\mu$ V/m	DELTA LIMIT dB
1 Quasi Peak	30.2 MHz	22.55	-17.44
1 Quasi Peak	36.36 MHz	20.76	-19.23
1 Quasi Peak	44.8 MHz	19.46	-20.53
1 Quasi Peak	66.56 MHz	18.90	-21.09
1 Quasi Peak	115.12 MHz	19.36	-24.15
1 Quasi Peak	130.68 MHz	20.27	-23.24
1 Quasi Peak	190.4 MHz	23.73	-19.78
1 Quasi Peak	297.04 MHz	29.31	-16.70

Gandini 20000903

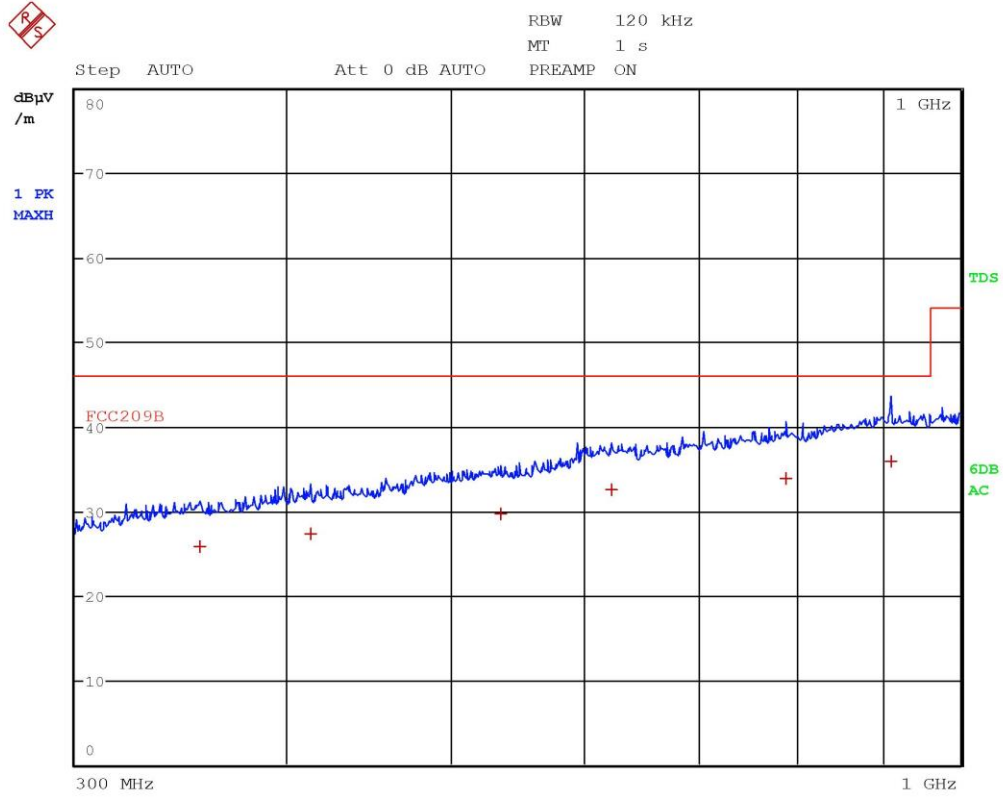


Gandini 20000904

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	355.68 MHz	25.85	-20.17
1 Quasi Peak	413 MHz	27.31	-18.70
1 Quasi Peak	535.24 MHz	29.65	-16.36
1 Quasi Peak	622.48 MHz	32.45	-13.56
1 Quasi Peak	788.64 MHz	33.91	-12.10
1 Quasi Peak	909.12 MHz	35.91	-10.10

Gandini 20000904

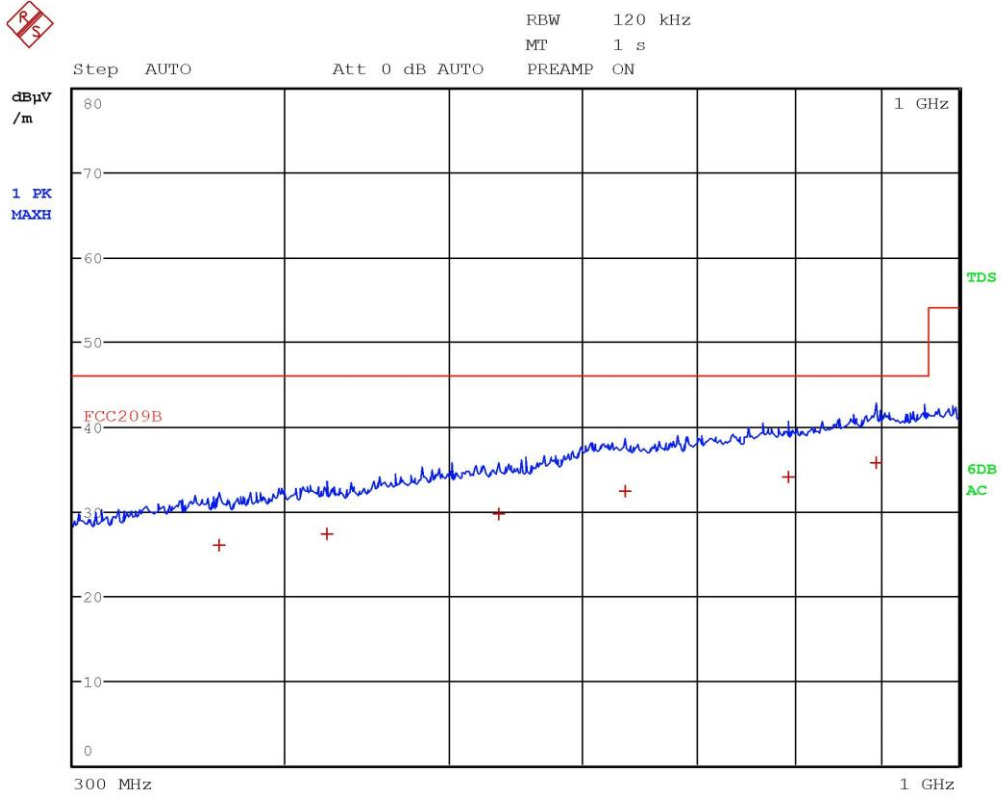


Gandini 20000905

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dB $\mu$ V/m	DELTA LIMIT dB
1 Quasi Peak	366.24 MHz	25.90	-20.11
1 Quasi Peak	423.32 MHz	27.31	-18.70
1 Quasi Peak	534.8 MHz	29.68	-16.33
1 Quasi Peak	635.16 MHz	32.39	-13.62
1 Quasi Peak	792.92 MHz	33.99	-12.02
1 Quasi Peak	894.72 MHz	35.68	-10.33

Gandini 20000905

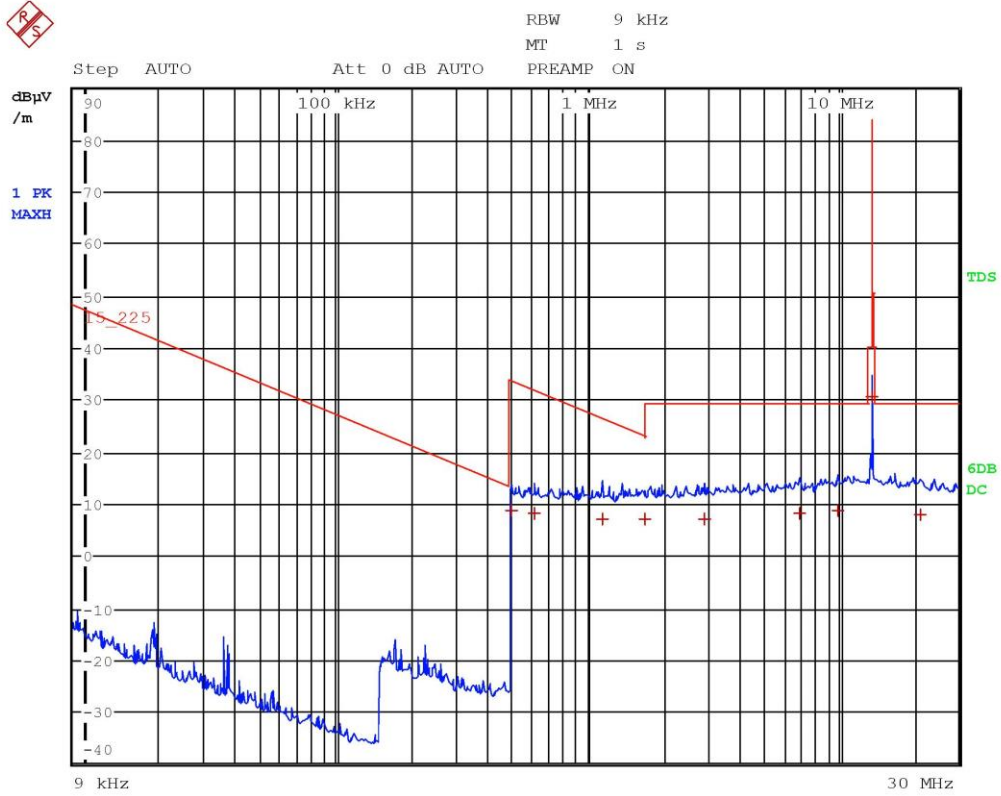

Gandini 20000907

CMC Centro Misure Compatibilità S.r.l.



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	15_225		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL d $\mu$ V/m	DELTA LIMIT dB
1 Quasi Peak	494 kHz	8.74	-24.98
1 Quasi Peak	610 kHz	8.18	-23.71
1 Quasi Peak	1.138 MHz	7.23	-19.24
1 Quasi Peak	1.682 MHz	7.19	-15.89
1 Quasi Peak	2.918 MHz	7.04	-22.49
1 Quasi Peak	6.982 MHz	8.12	-21.41
1 Quasi Peak	9.954 MHz	8.65	-20.88
1 Quasi Peak	13.558 MHz	30.50	-53.49
1 Quasi Peak	21.094 MHz	8.03	-21.50

Gandini 20000907



### Attachment 1

<i><b>Id. number</b></i>	<i><b>Manufacturer</b></i>	<i><b>Model</b></i>	<i><b>Description</b></i>	<i><b>Serial number</b></i>	<i><b>Last calibration</b></i>	<i><b>Due date calibration</b></i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	---	January '20	January '21
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '20	January '21
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '20	January '21
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '20	January '21
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '19	November '20
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '19	November '20
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '19	November '20
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '19	November '20
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '19	November '20
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3Ghz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '19	November '20
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '19	November '22





## Attachment 1

### Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonic current emissions test	PE006_01	10 mA + 2,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,8 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



### Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	< 1x10 <sup>-7</sup>	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 <sup>-7</sup>	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev_20_01 date 16/01/2020			

**Note 1:**

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of K=2, providing a level of confidence of p = 95%





**Note 2:**

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2



### Attachment 1

#### Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 <p>The sample complies with the requirements.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	 <p>The sample complies with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

#### Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual) .....	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual) .....	Measurement uncertainty calculation

CMC Centro Misure Compatibilità S.r.l.