



GUANGDONG SLEING COMM-TECH CO., LTD

SPECIFICATION APPROVAL SHEET

CUSTOMER

CUS PART NO

REV

X1

SPECIFICATION

2.4-2.5GHz

BT Antenna L=43mm(Ø0.81+MHF)

weight

SUP PART NO

SLEingA248970045

DATE

2025.03.31

SUP APPROVED

APPROVED	Structure audit	RF CHECKED	QA CHECKED	DESIGNED

CUS APPROVED

APPROVED	CHECKED	QA CHECKED	DESIGNED

GUANGDONG SLEING COMM-TECH CO., LTD

Room 402, Building 6, No. 24, Industrial East Road, Songshan Lake Park,
Dongguan City, Guangdong Province

Tel: +86-076989208968

Fax: +86-0769-89208969

www.sleing.com



MODIFICATION RECORD SHEET

REV.	Modification date	Summary of modification content	Signature	Approval
X1	2025.03.31	First Issue	Jerry	Jongrei




Spec Item

NO.	Project	Remark	Page
1	Spec Cover		1
2	MODIFICATION RECORD SHEET)		2
3	Spec Item		3
4	Drawing		4
5	Test Reports		5
6	Antenna assembly diagram		6
7	S Parameter Test		7
8	Test Setup		8
9	Test Efficiency		9
10	Pattern		10

Give clear indication of:

1. The contents of the acknowledgement shall be arranged in order according to the items in the check sheet.
2. The number of copies of the acceptance letter shall be printed according to the customer's requirements, and the SGS report shall be stamped with the engineering seal.
3. All materials shall be confirmed by the customer. Any material/process/changes that may affect product quality and environmental quality must be re-sent to the customer for confirmation before import.
4. SGS report is valid for one year.
5. According to the contents attached to the actual acknowledgement, check the check form: "Yes" is provided, "no" is provided according to customer requirements.

Drawing:

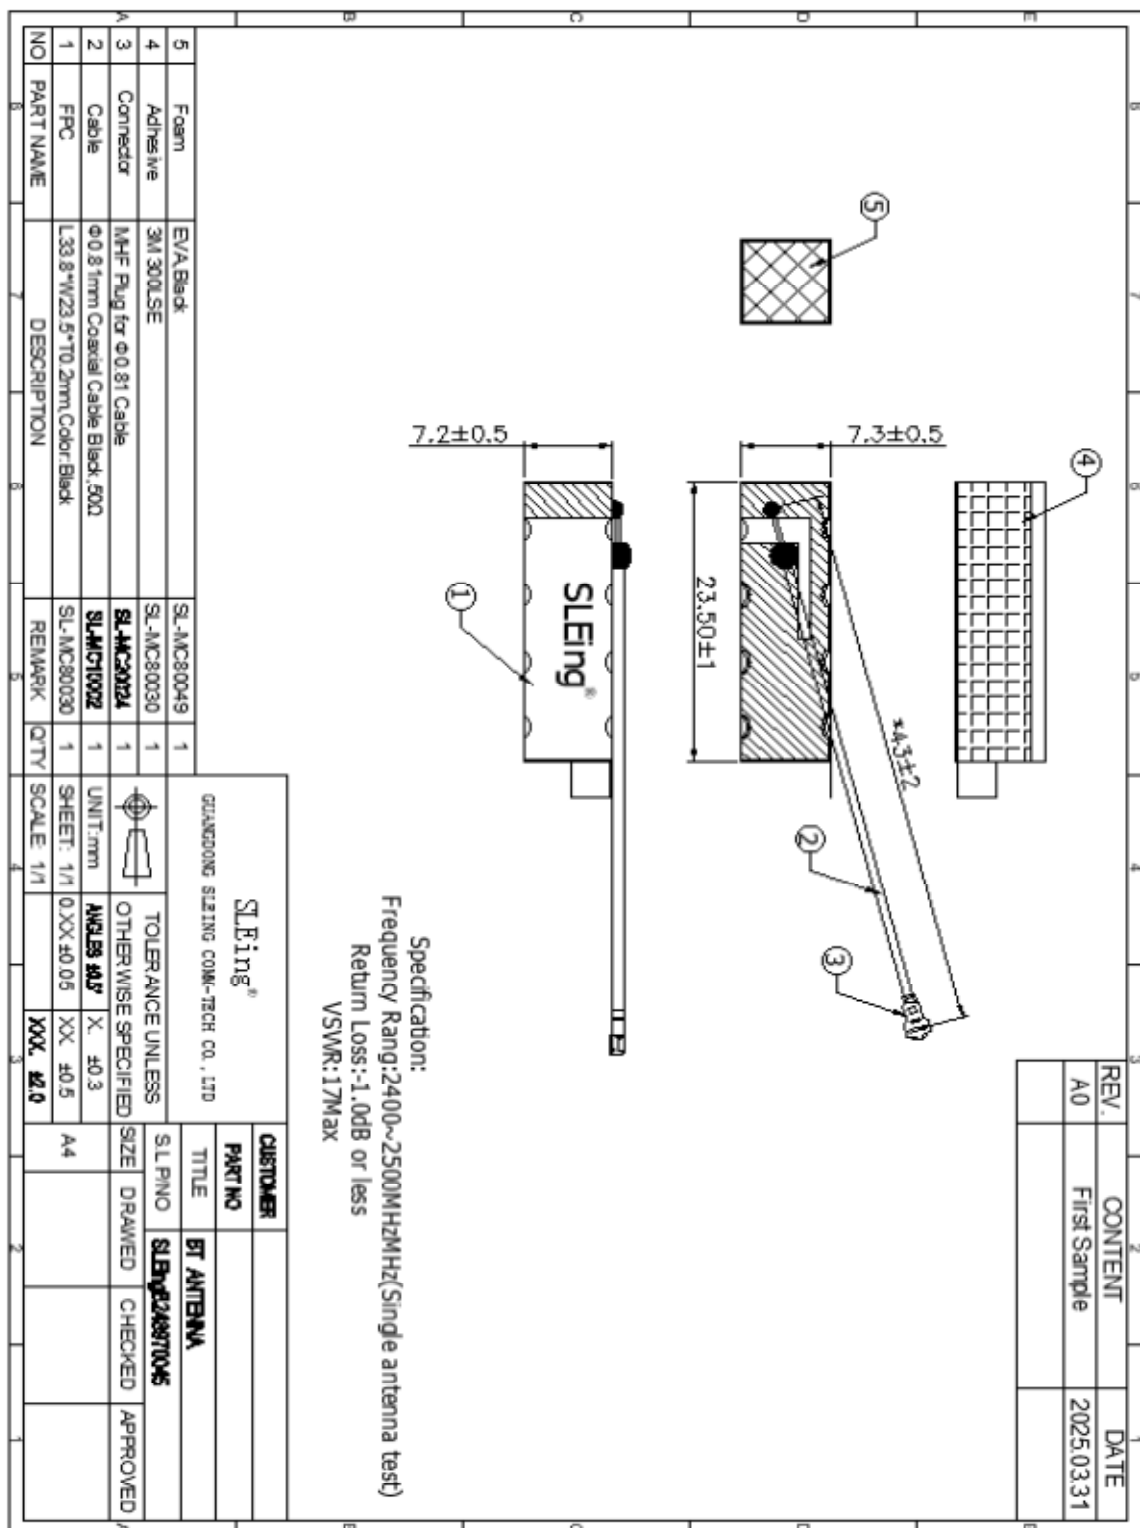

Test Reports

Electrical Properties	
Frequency	2400-2500 MHz (Single antenna test)
Impedance	50 Ohm Nominal
V.S.W.R	≤ 1.7
Return Loss	-1.0dB Max
Radiation	Omni-directional
Gain (Peak)	-1±1 dBi
Polarization	Linear, Vertical
Admitted Power	2 W
Connector	MHF
Physical Properties	
Antenna Material	FPC
Cable Type	Φ0.81mm Black
Operating Temp	-40℃-85℃
Storage Temp.	-40℃-85℃

Antenna assembly diagram

Device



Antenna




S Parameter Test



Agilent E5071C Network Analyzer



RF Antenna (VSWR/Return Loss)

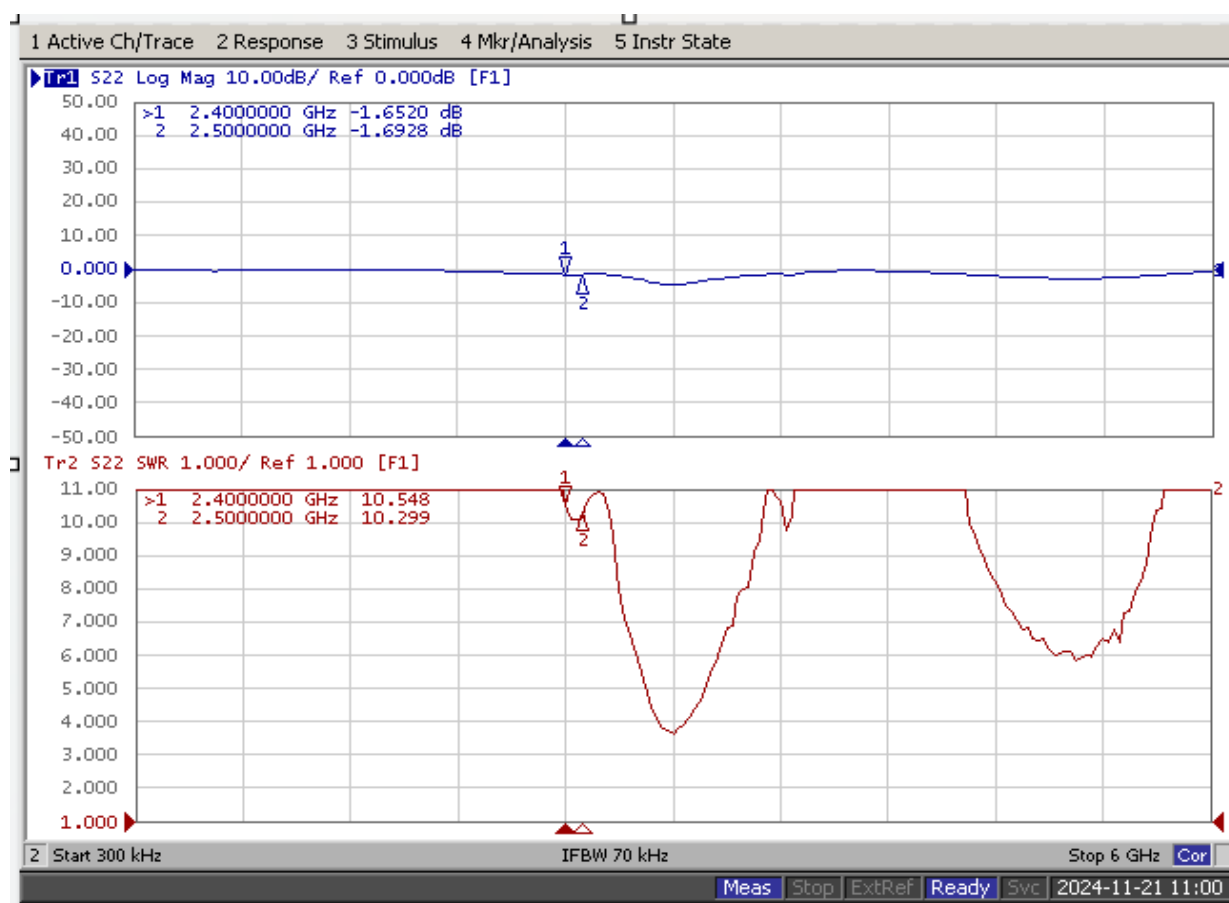

Test Setup

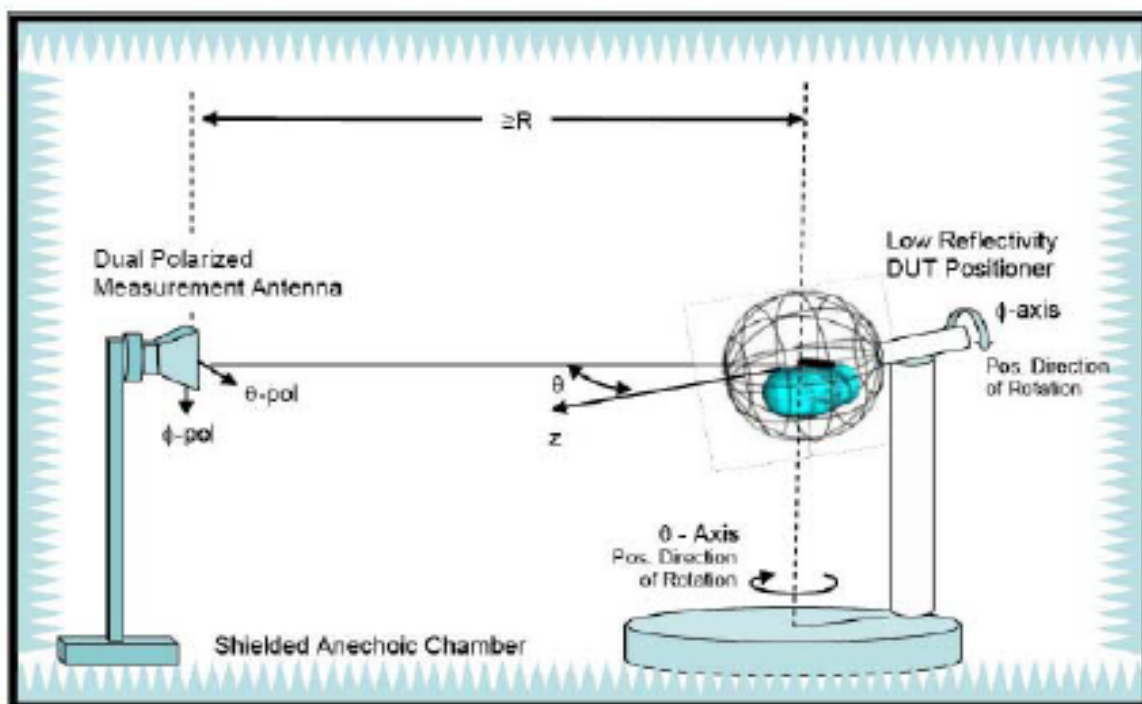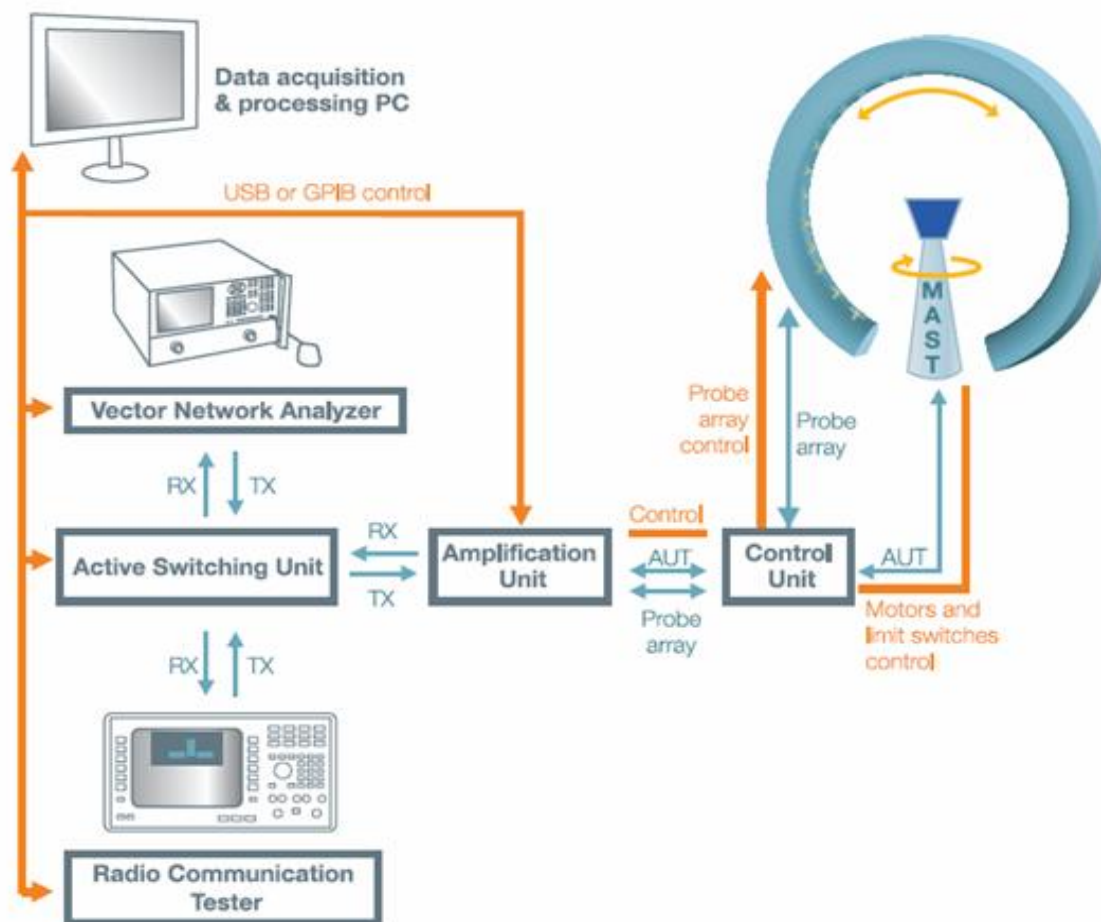

Test Efficiency

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	-1.67	-1.89	-1.75	-1.48	-1.61	-1.70	-1.85	-1.56	-1.27	-0.83	-0.52
Efficiency (%)	18.71	18.09	18.57	19.52	19.60	20.14	21.02	21.68	21.93	22.96	23.06

Pattern

