



# RADIO TEST REPORT

FCC ID : 2ARXK-VHC25  
Equipment : Wireless Edge Server  
Brand Name : VeeaHub  
Model Name : VHC25,VHC20  
Applicant : Veea Inc.  
164 E 83rd Street, NEW YORK,United States, 10028  
Manufacturer : Veea Inc.  
164 E 83rd Street, NEW YORK,United States, 10028  
Standard : 47 CFR FCC Part 15.247

The product was received on Aug. 09, 2021, and testing was started from Aug. 11, 2021 and completed on Sep. 18, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Information.....	5
1.2 Applicable Standards .....	9
1.3 Testing Location Information .....	9
1.4 Measurement Uncertainty .....	10
<b>2 Test Configuration of EUT.....</b>	<b>11</b>
2.1 Test Channel Mode .....	11
2.2 The Worst Case Measurement Configuration.....	12
2.3 EUT Operation during Test .....	13
2.4 Accessories .....	14
2.5 Support Equipment.....	14
2.6 Test Setup Diagram .....	15
<b>3 Transmitter Test Result .....</b>	<b>18</b>
3.1 AC Power-line Conducted Emissions .....	18
3.2 DTS Bandwidth .....	20
3.3 Maximum Conducted Output Power .....	21
3.4 Power Spectral Density .....	24
3.5 Emissions in Non-restricted Frequency Bands .....	26
3.6 Emissions in Restricted Frequency Bands.....	27
<b>4 Test Equipment and Calibration Data .....</b>	<b>31</b>
<b>Appendix A. Test Results of AC Power-line Conducted Emissions</b>	
<b>Appendix B. Test Results of DTS Bandwidth</b>	
<b>Appendix C. Test Results of Maximum Conducted Output Power</b>	
<b>Appendix D. Test Results of Power Spectral Density</b>	
<b>Appendix E. Test Results of Emissions in Non-restricted Frequency Bands</b>	
<b>Appendix F. Test Results of Emissions in Restricted Frequency Bands</b>	
<b>Appendix G. Test Results of Radiated Emission Co-location</b>	
<b>Appendix H. Test Photos</b>	
<b>Photographs of EUT v01</b>	



## History of this test report

TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A10\_9 Ver1.3

Page Number : 3 of 33  
Issued Date : Jan. 13, 2022  
Report Version : 01



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Wendy Pan**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std.	Ch. Frequency (MHz)	Channel Number
2400-2483.5	802.15.4	2405-2480	11-26 [26]

#### For Radio 4

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.15.4	5	1

Note:

- 802.15.4 uses a O-QPSK (250kbps) modulation.
- BWch is the nominal channel bandwidth.


**1.1.2 Antenna Information**

Ant.	Brand Name	Model Name	Antenna Type	Connector	Gain (dBi)
1	WNC	VHC25	PIFA	I-PEX	Note 1
2	WNC	VHC25	PIFA	I-PEX	
3	WNC	VHC25	PIFA	I-PEX	
4	WNC	VHC25	PIFA	I-PEX	

Note 1:

Ant.	Port					Gain (dBi)				
	WLAN 2.4GHz	WLAN 5GHz UNII-3	WLAN 5GHz UNII-1	Bluetooth BR/EDR	Bluetooth LE or IEEE802.15.4	WLAN 2.4GHz	WLAN 5GHz UNII-3	WLAN 5GHz UNII-1	Bluetooth BR/EDR	Bluetooth LE or IEEE802.15.4
1	-	-	2	1	-	-	-	3.6	2.3	-
2	1	2	-	-	-	2.2	3.3	-	-	-
3	-	-	1	-	1	-	-	3.5	-	1.9
4	2	1	-	-	-	1.8	3.4	-	-	-

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{i=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ANT}} g_{i,k} \right\}^2}{N_{ANT}} \right]$
BF	$Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{i=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ANT}} g_{i,k} \right\}^2}{N_{ANT}} \right]$	$Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{i=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ANT}} g_{i,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ Gain = 10 \cdot \log \left[ \frac{\sum_{i=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ANT}} g_{i,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

G1 = Ant 1 Gain ; G2 = Ant 2 Gain ; G3 = Ant 3 Gain ; G4 = Ant 4 Gain ;

2.4GHz DG = 5.01 dBi

5 GHz U-NII-1 DG = 6.56 dBi

5 GHz U-NII-3 DG = 6.36 dBi

#### For 2.4GHz:

##### For IEEE 802.11b/g/n/VHT/ax mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

##### For 5GHz UNII-1 / UNII-3:

##### For IEEE 802.11a/n/ac/ax mode (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

##### Bluetooth / IEEE802.15.4 (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.15.4	1	0	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

<b>EUT Power Type</b>	From adapter			
<b>Beamforming Function</b>	<input checked="" type="checkbox"/>	With beamforming	<input type="checkbox"/>	Without beamforming
	The product has beamforming function for n/VHT/ax in 2.4GHz and n/ac/ax in 5GHz.			
<b>Function</b>	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
<b>Test Software Version</b>	DOS [ver 6.1.7601]			

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

Model Name	Description
VHC25	All the model names are identical, the difference model names served as marketing strategy.
VHC20	

Note1: From the above models, model: VHC25 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

**1.1.6 Table for EUT Operation Information**

Operation Mode	Description
1	WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band + Bluetooth BR/EDR + IEEE 802.15.4
2	WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band + Bluetooth BR/EDR + Bluetooth LE

Note: The above information was declared by manufacturer.

**1.1.7 Table for EUT support function**

Function
AP
Mesh

Note1: AP mode was selected as representative mode for AC power-line conducted emissions and Emissions in Restricted Frequency Bands below 1GHz test and its data was recorded in this report.

Note2: The above information was declared by manufacturer.





## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Caster Chang	23.2~24.2 / 53~55	Aug. 13, 2021 ~ Sep. 18, 2021
Radiated<1GHz	10CH01-CB	Peter Wu	23~24 / 58~59	Aug. 30, 2021 ~ Dec. 03, 2021
Radiated>1GHz	03CH03-CB	RJ Huang	23.5-24.6 / 55-59	Aug. 11, 2021 ~ Sep. 09, 2021
Radiated Co-Location	03CH06-CB	RJ Huang	25.8-28.2 / 56-59	Aug. 11, 2021 ~ Sep. 09, 2021
AC Conduction	CO01-CB	Ryo Fan	22~23 / 65~67	Aug. 27, 2021



## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emissions below 1GHz	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.5 dB	Confidence levels of 95%
Bandwidth Measurement	0.9%	Confidence levels of 95%



## **2 Test Configuration of EUT**

### **2.1 Test Channel Mode**

<b>Mode</b>	<b>Power Setting</b>
802.15.4	-
2405MHz	20
2440MHz	20
2475MHz	20
2480MHz	17

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Normal Link
1	Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + IEEE 802.15.4) + Adapter
2	Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + Bluetooth LE) + Adapter
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	Normal Link
1	EUT in Z axis Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + IEEE 802.15.4) + Adapter
2	EUT in Z axis Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + Bluetooth LE) + Adapter
Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 ~ 4 will follow this same test mode.	
3	EUT in Y axis Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + IEEE 802.15.4) + Adapter
4	EUT in X axis Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + IEEE 802.15.4) + Adapter
For operating mode 1 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	The EUT was performed at X axis, Y axis and Z axis position t, and the worst case was found at Z axis. So the measurement will follow this same test configuration. EUT in Z axis CTX

<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Radiated Emission Co-location
<b>Test Condition</b>	Radiated measurement
<b>Operating Mode</b>	Normal Link
	The EUT was performed at X axis, Y axis and Z axis position t, and the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	EUT in Z axis Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + IEEE 802.15.4) + Adapter
2	EUT in Z axis Normal Link – AP mode (WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band) + CTX (Bluetooth BR/EDR + Bluetooth LE) + Adapter
Refer to Appendix G for Radiated Emission Co-location.	

<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
<b>Operating Mode</b>	
1	WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band + Bluetooth BR/EDR + IEEE 802.15.4
2	WLAN 2.4GHz + 5GHz Low Band + 5GHz High Band + Bluetooth BR/EDR + Bluetooth LE
Refer to Sporton Test Report No.: FA172726 for Co-location RF Exposure Evaluation.	

Note: The EUT can only be used in Z axis position.

## 2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



## 2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	Veea	VHC25-30A	Input: 100-240V~50/60Hz, 1.0A Max Output: 12V, 2.5A
Other			
RJ-45 cable*1: Non-shielded, 1.8m			

## 2.5 Support Equipment


**For AC Conduction and Radiated (below 1GHz):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	WAN NB	DELL	E6430	N/A
C	2.4G NB	DELL	E6430	N/A
D	5GL NB	DELL	E6430	N/A
E	5GH NB	DELL	E6431	N/A
F	Micro SD Card	Transcend	TS16GUSDHC10	N/A

**For Radiated (above 1GHz) and RF Conducted:**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A


## 2.6 Test Setup Diagram

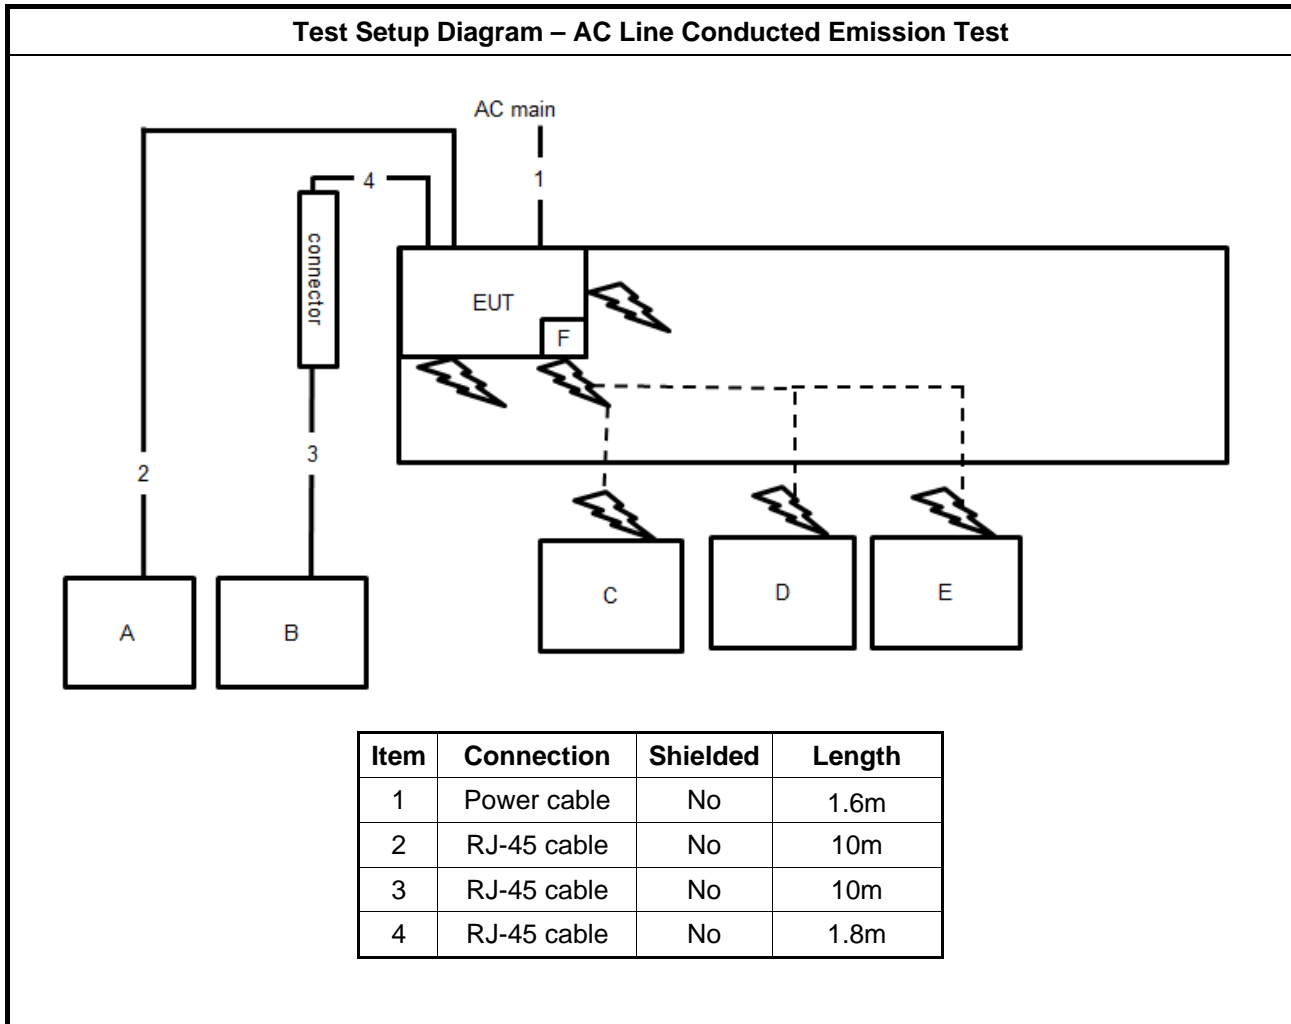

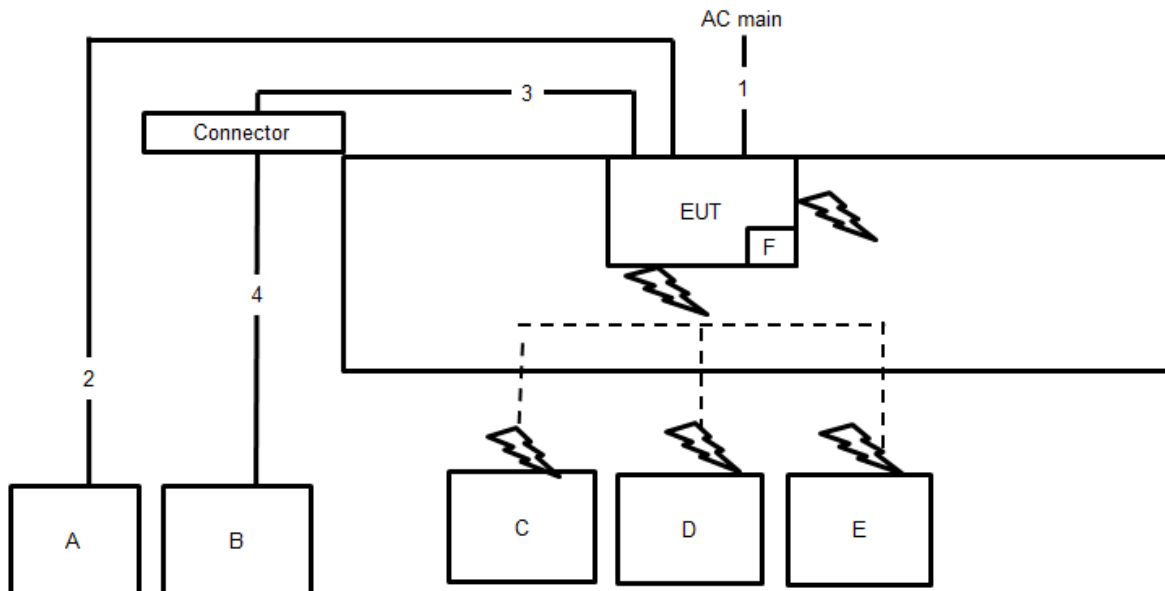**Test Setup Diagram - Radiated Test < 1GHz**


Item	Connection	Shielded	Length
1	Power cable	No	1.6m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.8m
4	RJ-45 cable	No	10m

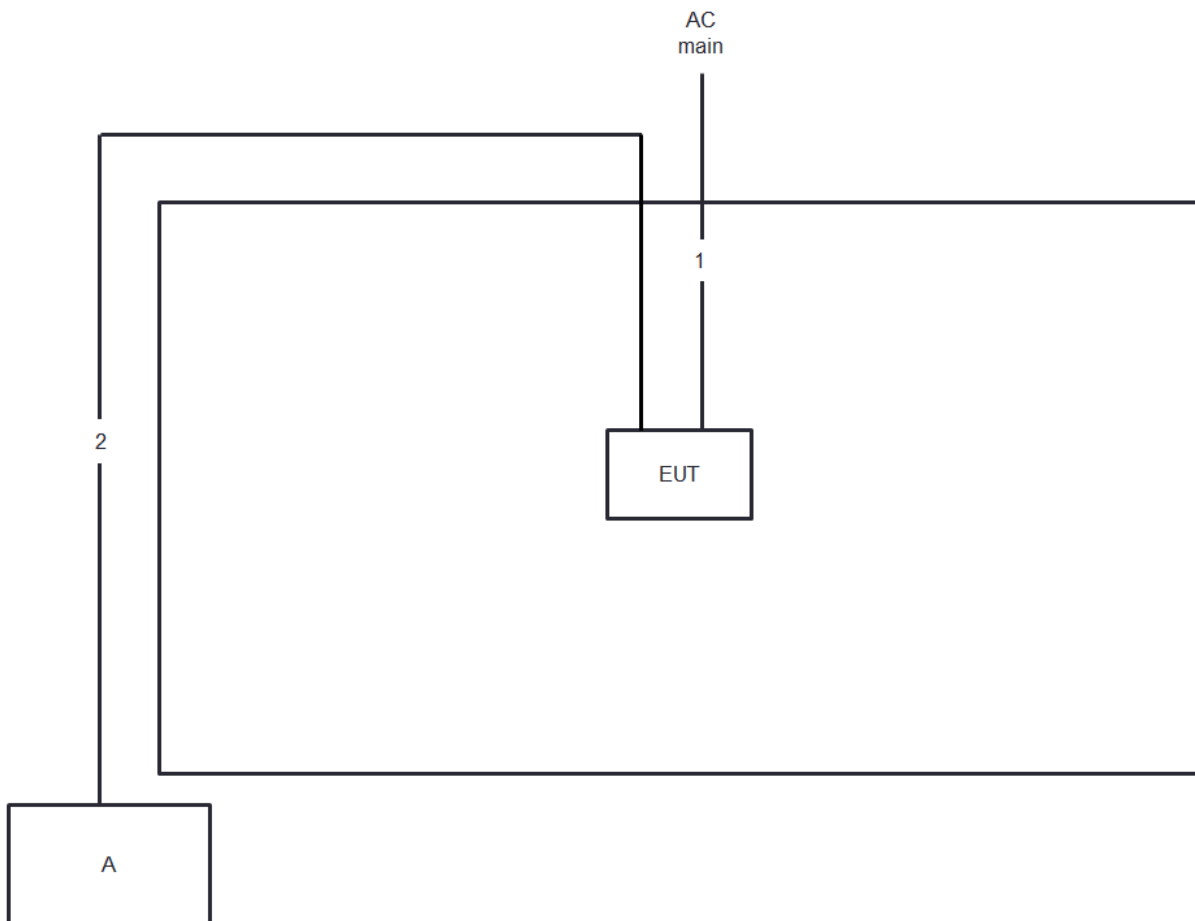

**Test Setup Diagram - Radiated Test > 1GHz**


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

### 3.1.4 Test Setup

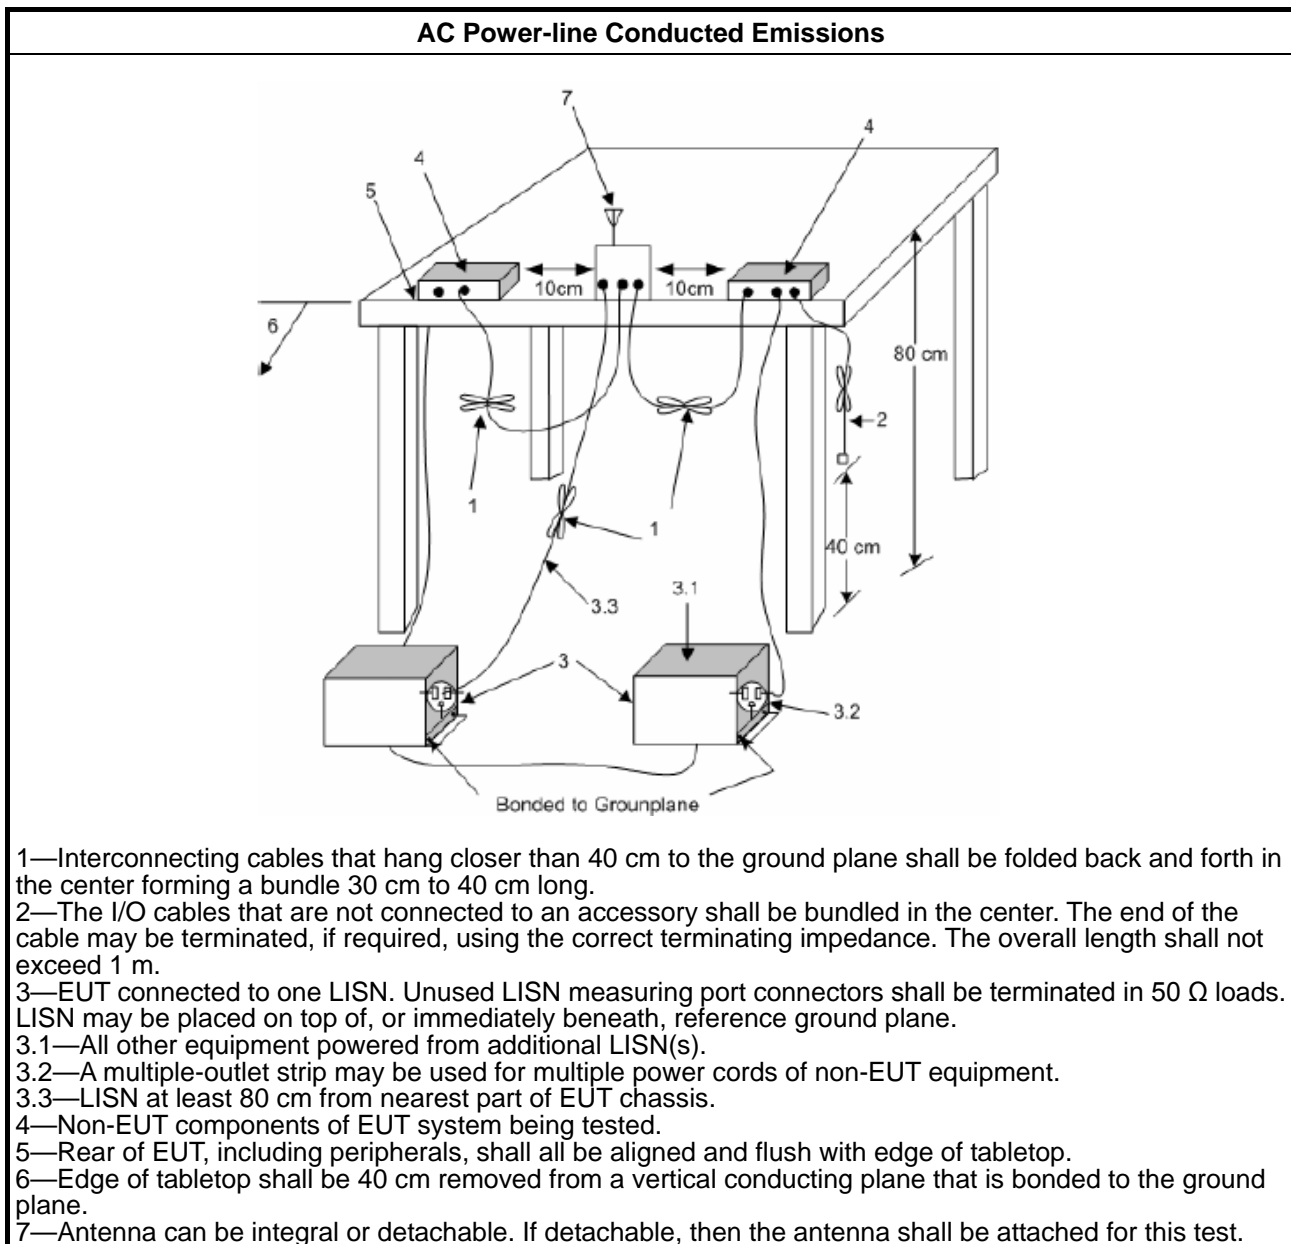

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

## 3.2 DTS Bandwidth

### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

### 3.2.4 Test Setup

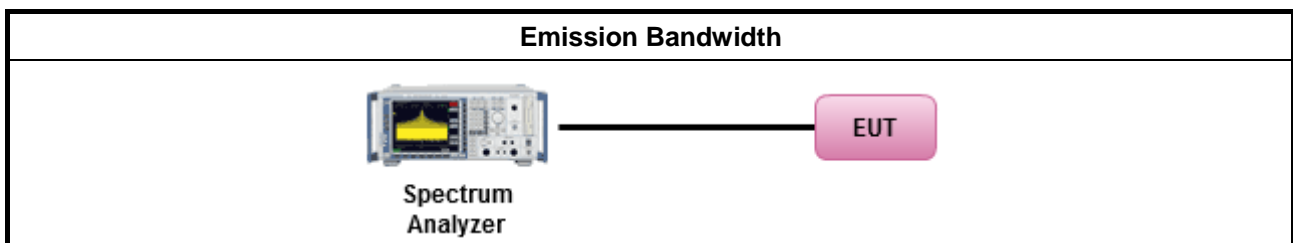

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:  <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])  <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

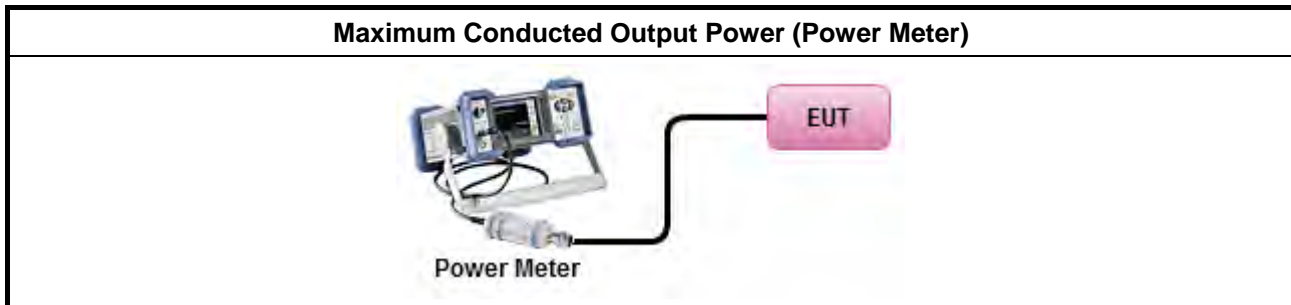

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) $\leq 8$ dBm/3kHz

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
<input type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.



### 3.4.4 Test Setup

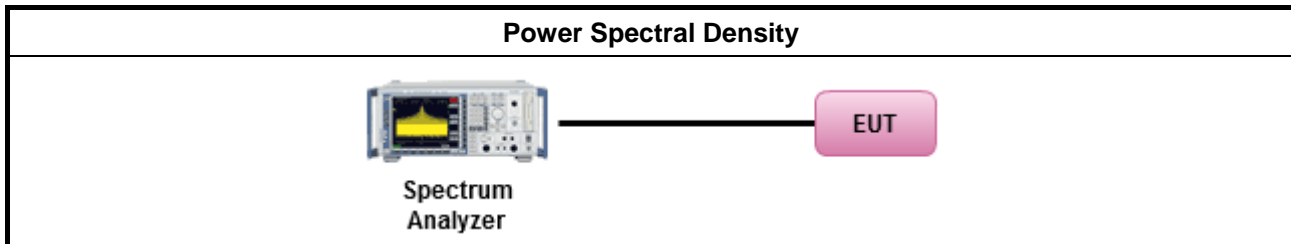

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
<p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p>	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

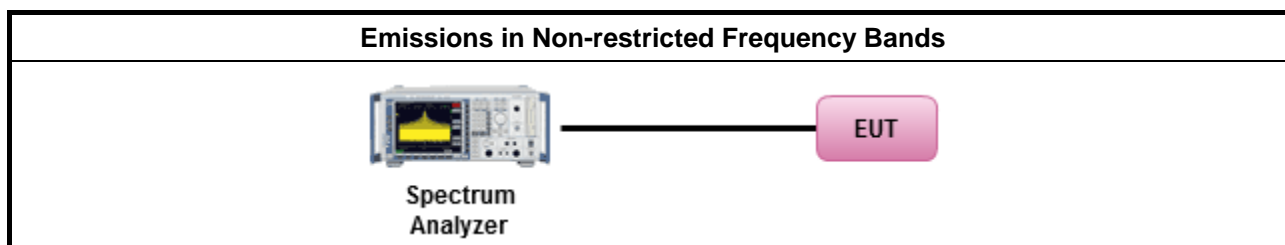

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.6.3 Test Procedures**

Test Method	
▪ The average emission levels shall be measured in [duty cycle $\geq 98$ or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$ ).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$ ).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

### 3.6.4 Test Setup

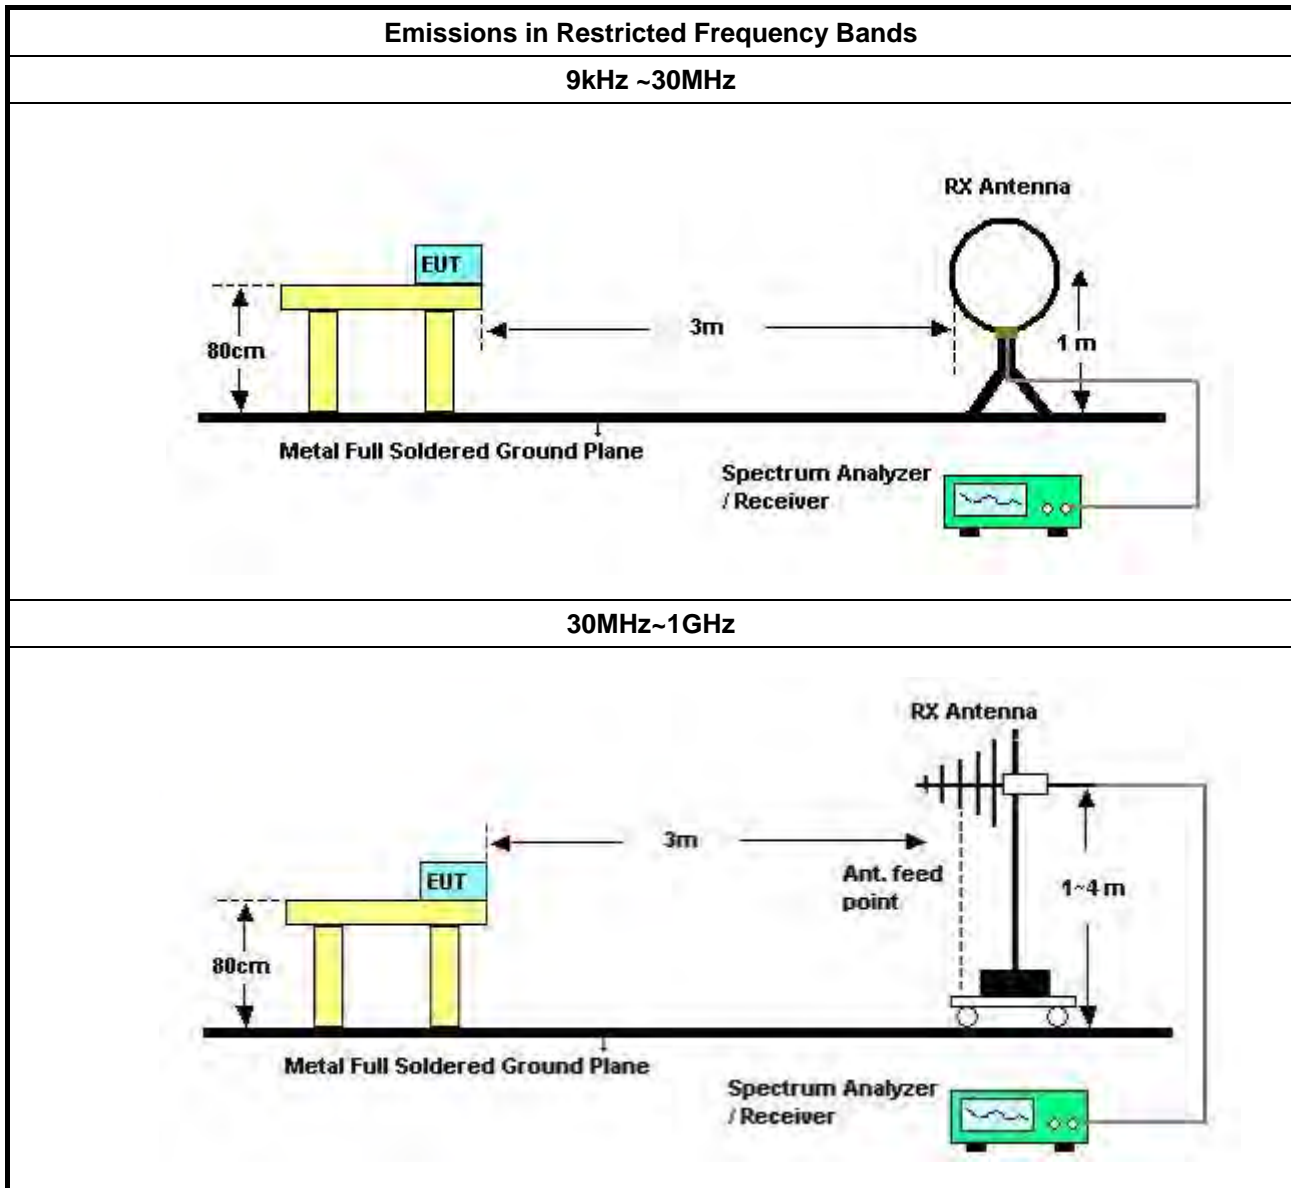

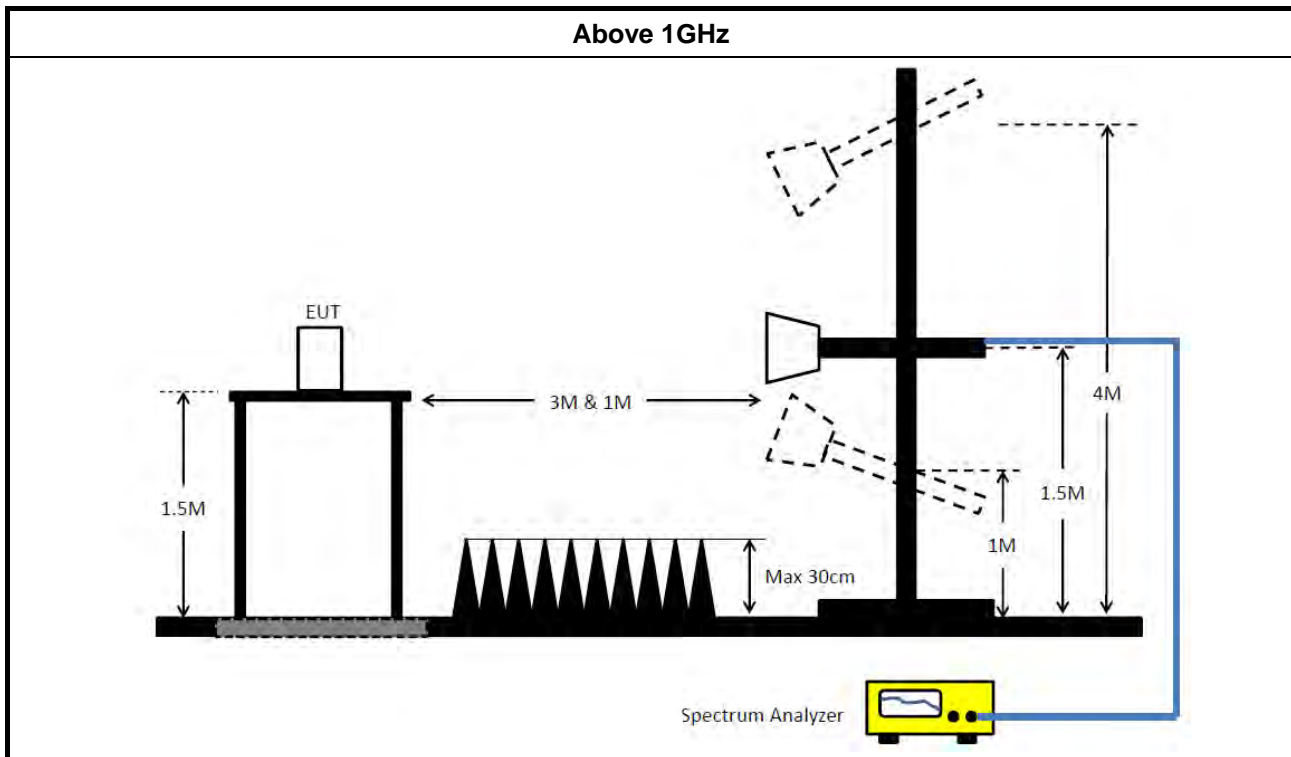

### 3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

### 3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 03, 2021	Mar. 02, 2022	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Jan. 06, 2021	Jan. 05, 2022	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Mar. 07, 2021	Mar. 06, 2022	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 30, 2021	Jan. 29, 2022	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 19, 2021	May 18, 2022	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 28, 2021	Jan. 27, 2022	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 11, 2021	Mar. 10, 2022	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 11, 2021	Mar. 10, 2022	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 20, 2020	Oct. 19, 2021	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 19, 2021	Oct. 18, 2022	Radiation (10CH01-CB)
High Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 20, 2020	Oct. 19, 2021	Radiation (10CH01-CB)
High Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 19, 2021	Oct. 18, 2022	Radiation (10CH01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0609	30MHz ~ 1GHz	Jul. 01, 2021	Jun. 30, 2022	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Mar. 08, 2021	Mar. 07, 2022	Radiation (10CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 14, 2021	Apr. 13, 2022	Radiation (10CH01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 06, 2021	May 05, 2022	Radiation (03CH03-CB)
Horn Antenna	ETS • Lindgren	3115	6821	750MHz~18GHz	Jan. 26, 2021	Jan. 25, 2022	Radiation (03CH03-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 18, 2021	Jun. 17, 2022	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 02, 2021	Jul. 01, 2022	Radiation (03CH03-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 04, 2021	Jun. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Aug. 20, 2021	Aug. 19, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Aug. 20, 2021	Aug. 19, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 02, 2020	Oct. 01, 2021	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Sep. 21, 2020	Sep. 20, 2021	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 18, 2021	Jun. 17, 2022	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	May 06, 2021	May 05, 2022	Radiation (03CH06-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Dec. 15, 2020	Dec. 14, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+24	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 21, 2021	May 20, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)



**RADIO TEST REPORT****Report No. : FR172726AD**

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 23, 2021	Feb. 22, 2022	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 23, 2021	Feb. 22, 2022	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



## Conducted Emissions at Powerline


## Appendix A

### Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	50.89	66.00	-15.11	Line

## Mode 1


27/08/2021

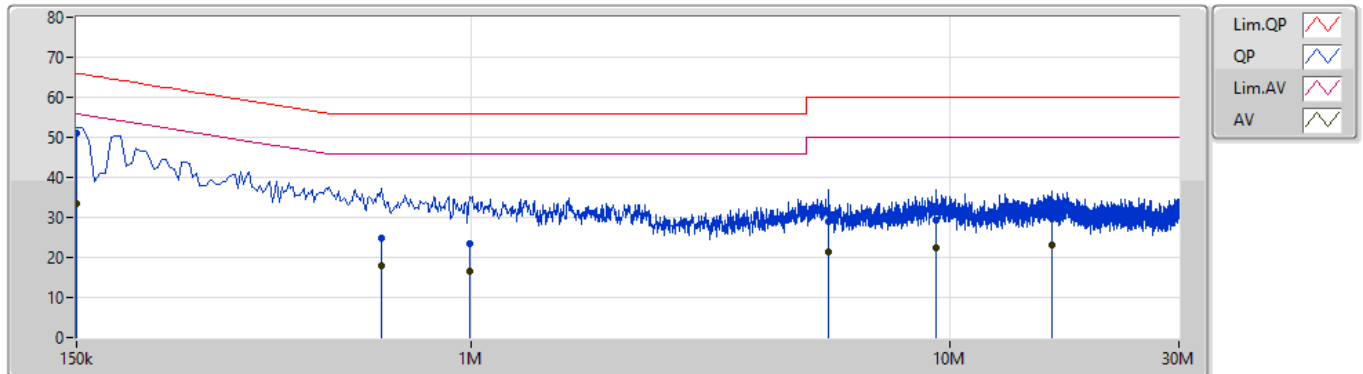

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	50.89	66.00	-15.11	9.89	Line	"Worst"	41.00	0.04	0.04	9.81			
AV	150k	33.54	56.00	-22.46	9.89	Line	-	23.65	0.04	0.04	9.81			
QP	649.5k	24.86	56.00	-31.14	9.92	Line	-	14.94	0.05	0.04	9.83			
AV	649.5k	18.06	46.00	-27.94	9.92	Line	-	8.14	0.05	0.04	9.83			
QP	996k	23.35	56.00	-32.65	9.93	Line	-	13.42	0.06	0.04	9.83			
AV	996k	16.65	46.00	-29.35	9.93	Line	-	6.72	0.06	0.04	9.83			
QP	5.568M	28.96	60.00	-31.04	10.17	Line	-	18.79	0.16	0.13	9.88			
AV	5.568M	21.51	50.00	-28.49	10.17	Line	-	11.34	0.16	0.13	9.88			
QP	9.339M	29.39	60.00	-30.61	10.27	Line	-	19.12	0.21	0.16	9.90			
AV	9.339M	22.25	50.00	-27.75	10.27	Line	-	11.98	0.21	0.16	9.90			
QP	16.292M	29.64	60.00	-30.36	10.41	Line	-	19.23	0.29	0.18	9.94			
AV	16.292M	22.95	50.00	-27.05	10.41	Line	-	12.54	0.29	0.18	9.94			

## Mode 1

27/08/2021

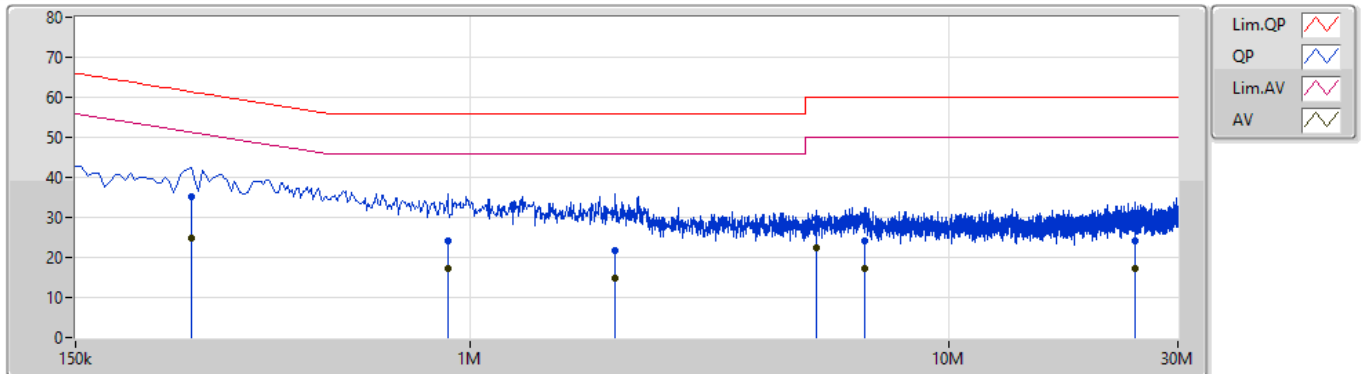

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	262.5k	35.06	61.35	-26.29	9.88	Neutral	"Worst"	25.18	0.03	0.04	9.81			
AV	262.5k	24.88	51.35	-26.47	9.88	Neutral	-	15.00	0.03	0.04	9.81			
QP	897k	24.12	56.00	-31.88	9.92	Neutral	-	14.20	0.05	0.04	9.83			
AV	897k	17.31	46.00	-28.69	9.92	Neutral	-	7.39	0.05	0.04	9.83			
QP	2.009M	21.67	56.00	-34.33	9.96	Neutral	-	11.71	0.07	0.07	9.82			
AV	2.009M	14.72	46.00	-31.28	9.96	Neutral	-	4.76	0.07	0.07	9.82			
QP	5.289M	29.72	60.00	-30.28	10.14	Neutral	-	19.58	0.13	0.13	9.88			
AV	5.289M	22.33	50.00	-27.67	10.14	Neutral	-	12.19	0.13	0.13	9.88			
QP	6.644M	24.20	60.00	-35.80	10.19	Neutral	-	14.01	0.16	0.14	9.89			
AV	6.644M	17.11	50.00	-32.89	10.19	Neutral	-	6.92	0.16	0.14	9.89			
QP	24.468M	24.08	60.00	-35.92	10.64	Neutral	-	13.44	0.36	0.27	10.01			
AV	24.468M	17.24	50.00	-32.76	10.64	Neutral	-	6.60	0.36	0.27	10.01			

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.15.4	1.65M	2.274M	2M27D1D	1.625M	2.255M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.15.4	-	-	-	-
2405MHz	Pass	500k	1.638M	2.255M
2440MHz	Pass	500k	1.625M	2.261M
2480MHz	Pass	500k	1.65M	2.274M


Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

**802.15.4**
**2405MHz**
**EBW-DTS**

14/08/2021

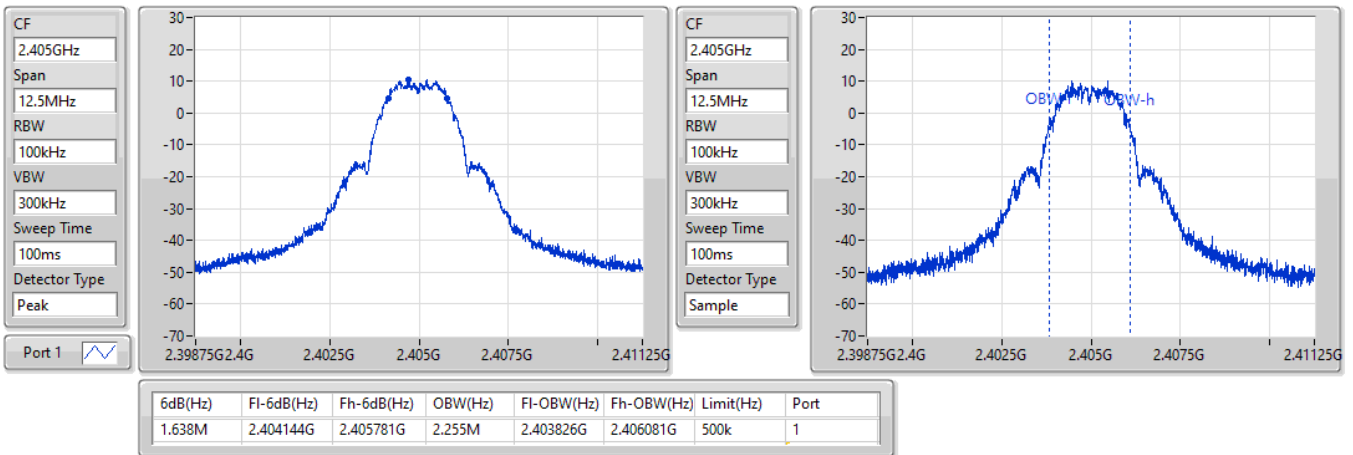
**802.15.4**
**2440MHz**
**EBW-DTS**

14/08/2021

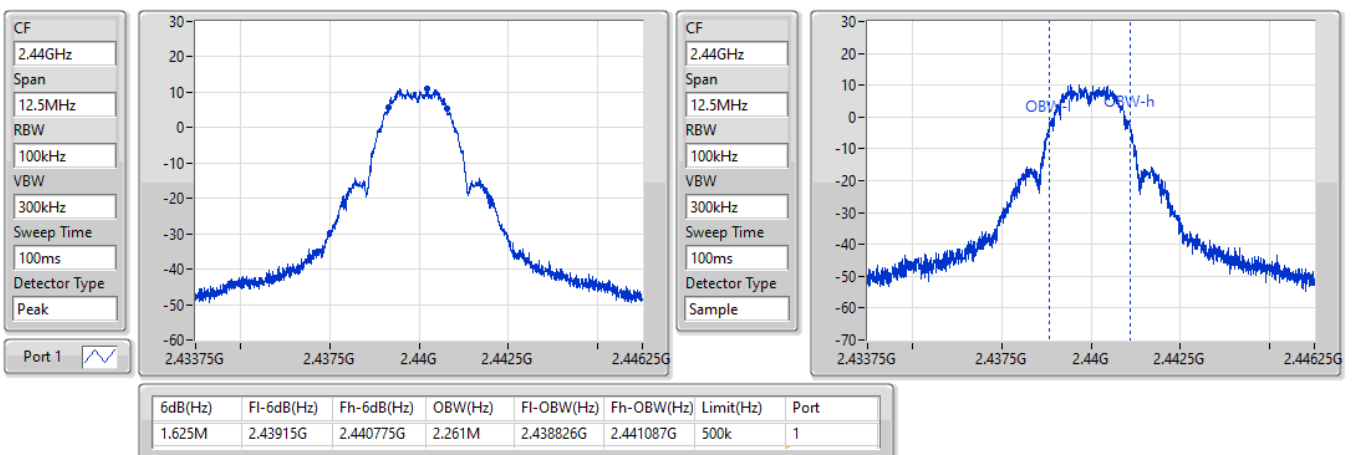


802.15.4

2480MHz

EBW-DTS

14/08/2021

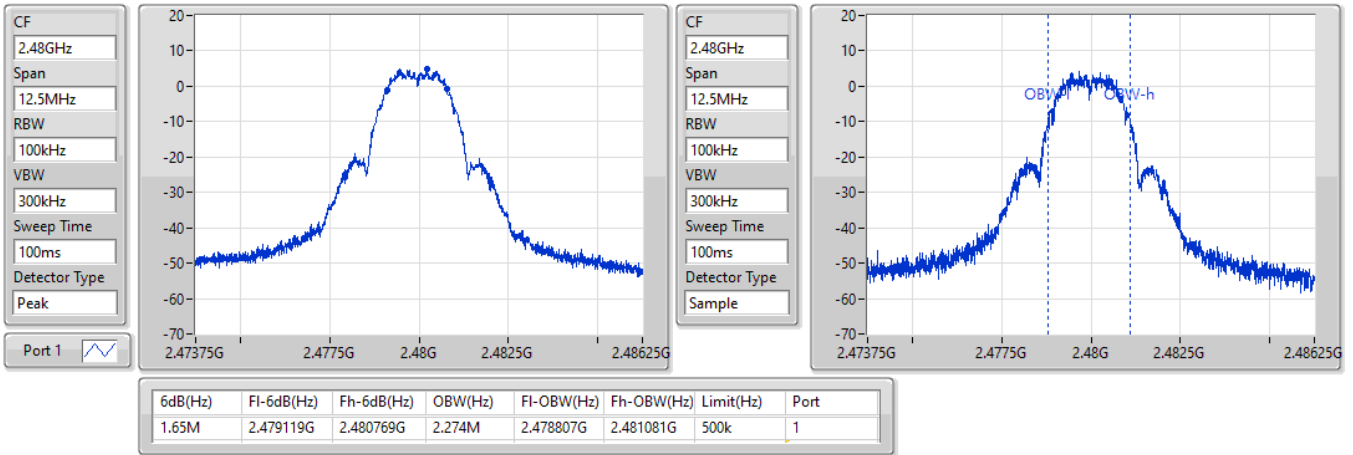





**Summary**

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
802.15.4	15.03	0.03184



## Average Power-DTS

## Appendix C

### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
802.15.4	-	-	-	-
2405MHz	Pass	1.90	14.22	30.00
2440MHz	Pass	1.90	15.03	30.00
2475MHz	Pass	1.90	13.75	30.00
2480MHz	Pass	1.90	8.92	30.00

DG = Directional Gain; Port X = Port X output power



**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.15.4	-1.54

RBW = 3kHz;



Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.15.4	-	-	-	-
2405MHz	Pass	1.90	-2.40	8.00
2440MHz	Pass	1.90	-1.54	8.00
2480MHz	Pass	1.90	-8.19	8.00


DG = Directional Gain; RBW = 3kHz;  
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.15.4

2405MHz

PSD

14/08/2021

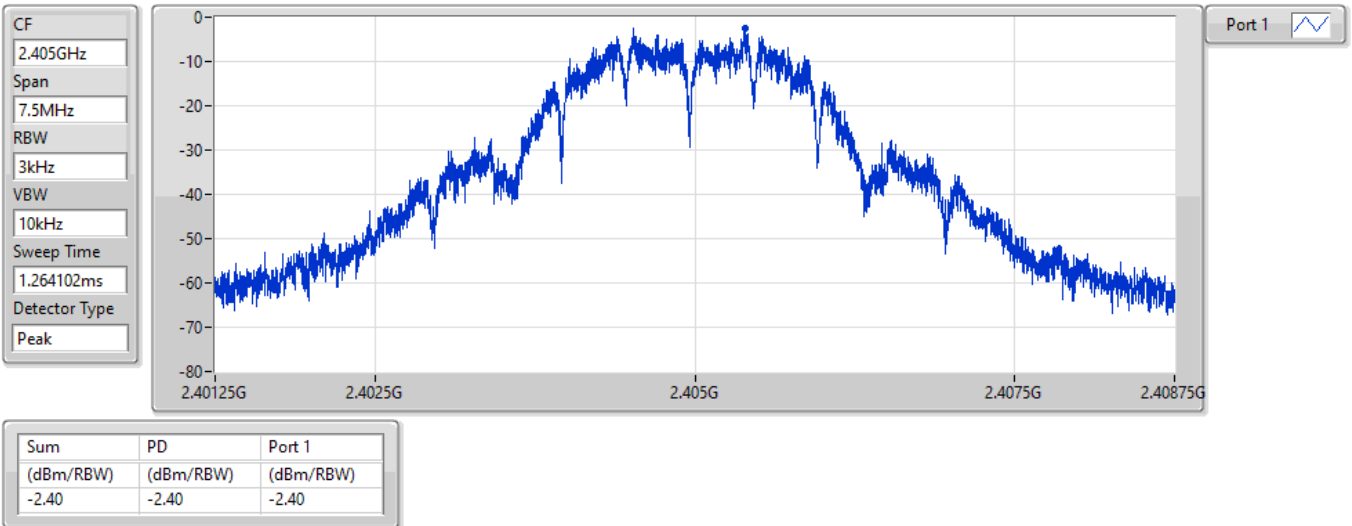


802.15.4

2440MHz

PSD

14/08/2021

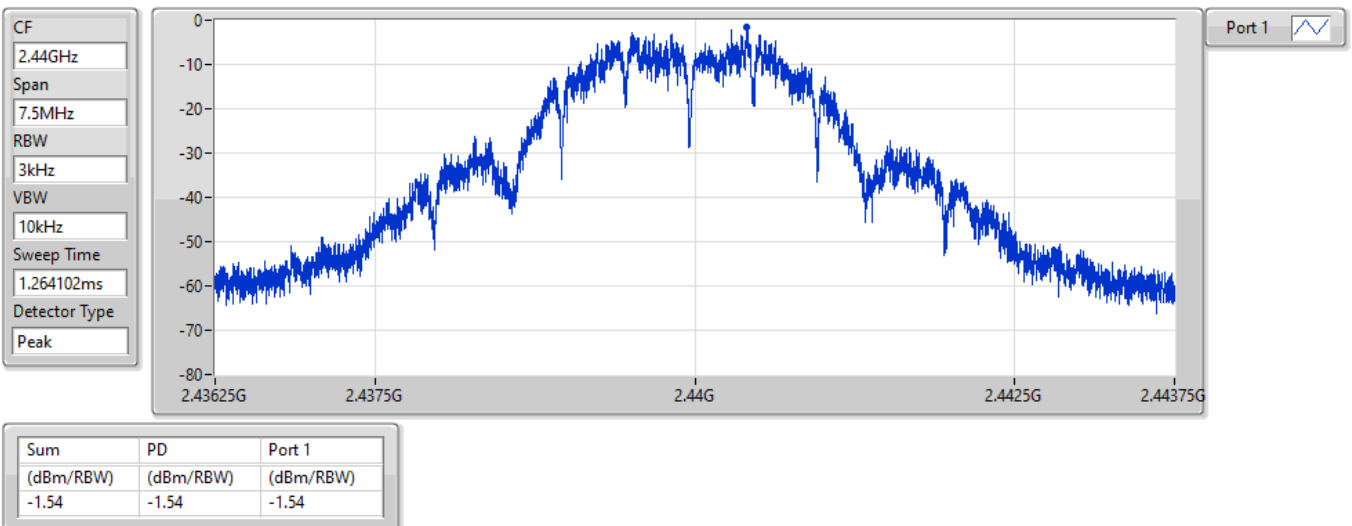

802.15.4

2480MHz

PSD

14/08/2021

CF  
2.48GHz


Span  
7.5MHz


RBW  
3kHz

VBW  
10kHz

Sweep Time  
1.264102ms

Detector Type  
Peak

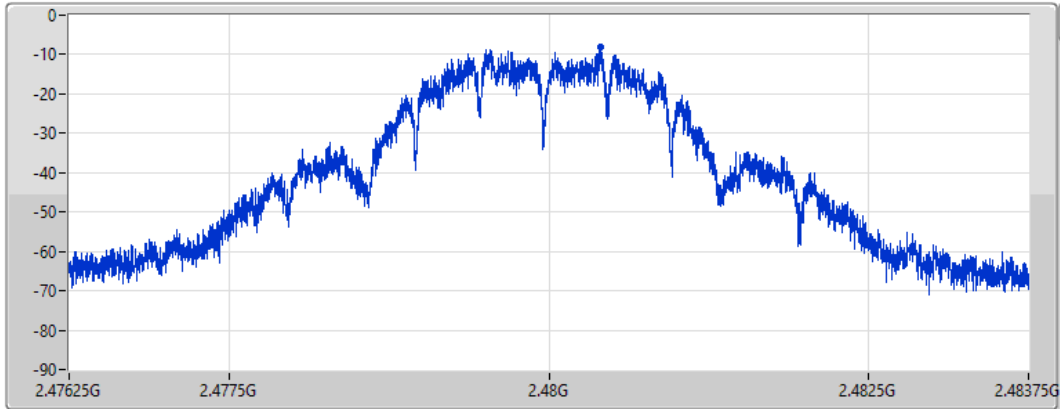

Port 1 

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.19	-8.19	-8.19



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.15.4	Pass	2.44046G	10.38	-19.62	159.84M	-52.61	2.39996G	-44.36	2.4G	-43.94	2.49067G	-50.68	6.7694G	-46.20	1

**Result**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.15.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2405MHz	Pass	2.44046G	10.38	-19.62	159.84M	-52.61	2.39996G	-44.36	2.4G	-43.94	2.49067G	-50.68	6.7694G	-46.20	1
2440MHz	Pass	2.44046G	10.38	-19.62	757.03M	-52.93	2.39765G	-52.57	2.4835G	-54.87	2.48576G	-51.60	15.10154G	-45.43	1
2480MHz	Pass	2.44046G	10.38	-19.62	2.10241G	-52.89	2.39091G	-52.43	2.4835G	-45.16	2.48351G	-45.51	24.43478G	-44.94	1



802.15.4

CSEndB-DTS


2405MHz

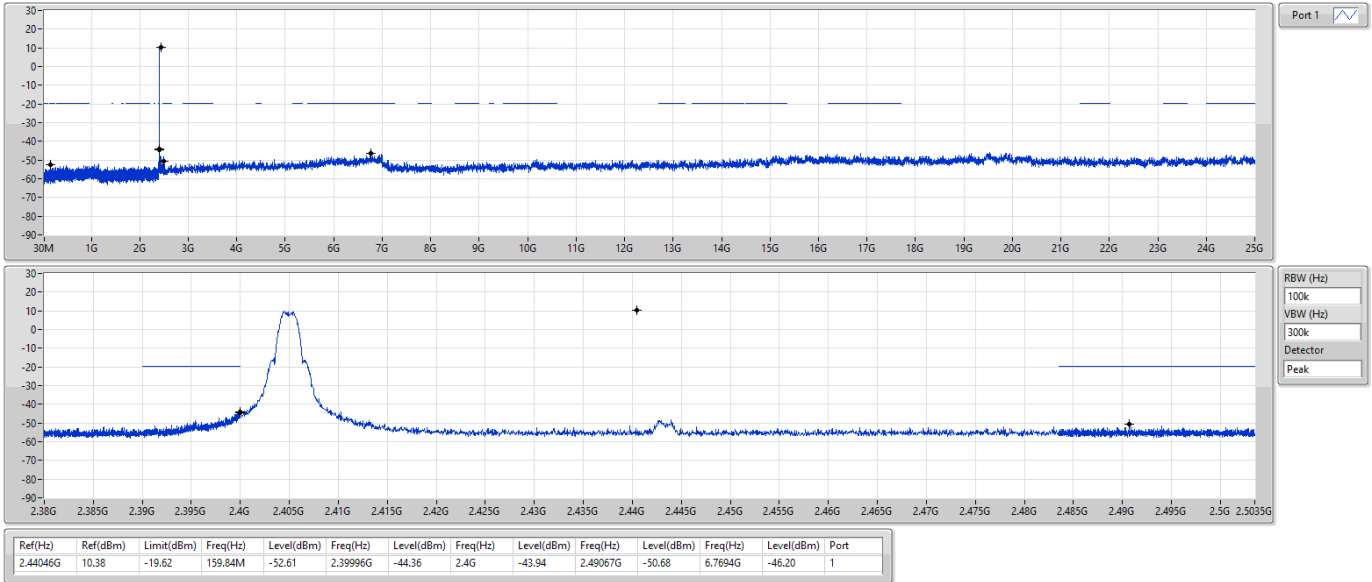

802.15.4

CSEndB-DTS

2440MHz

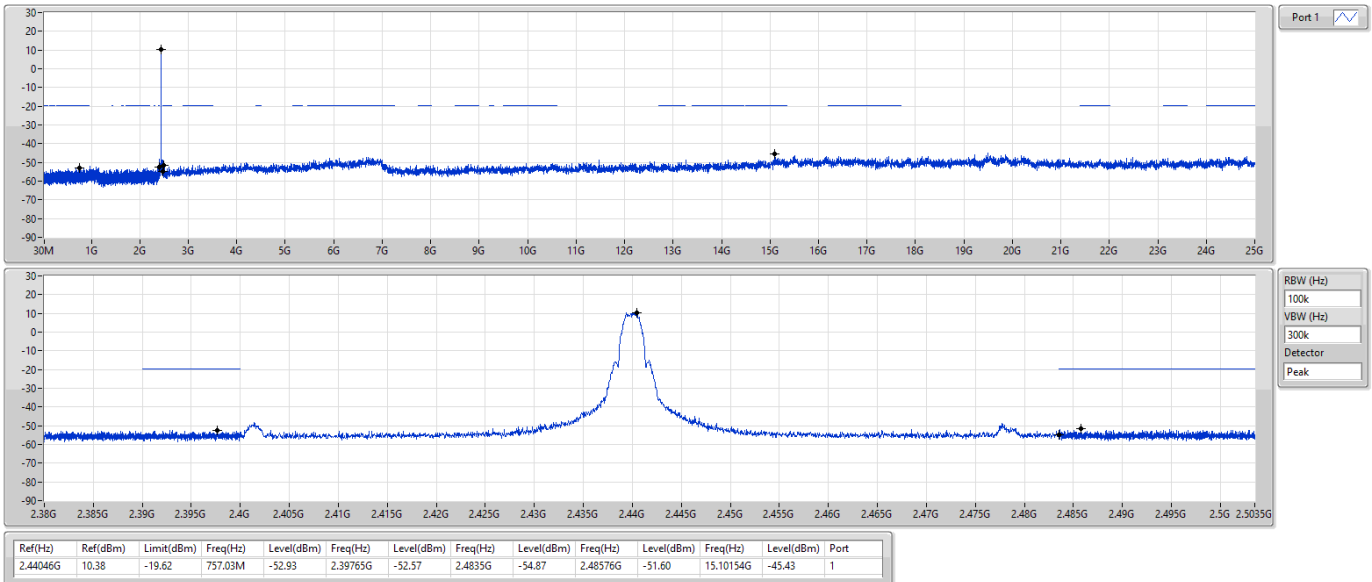


802.15.4

CSEndB-DTS

2480MHz

14/08/2021

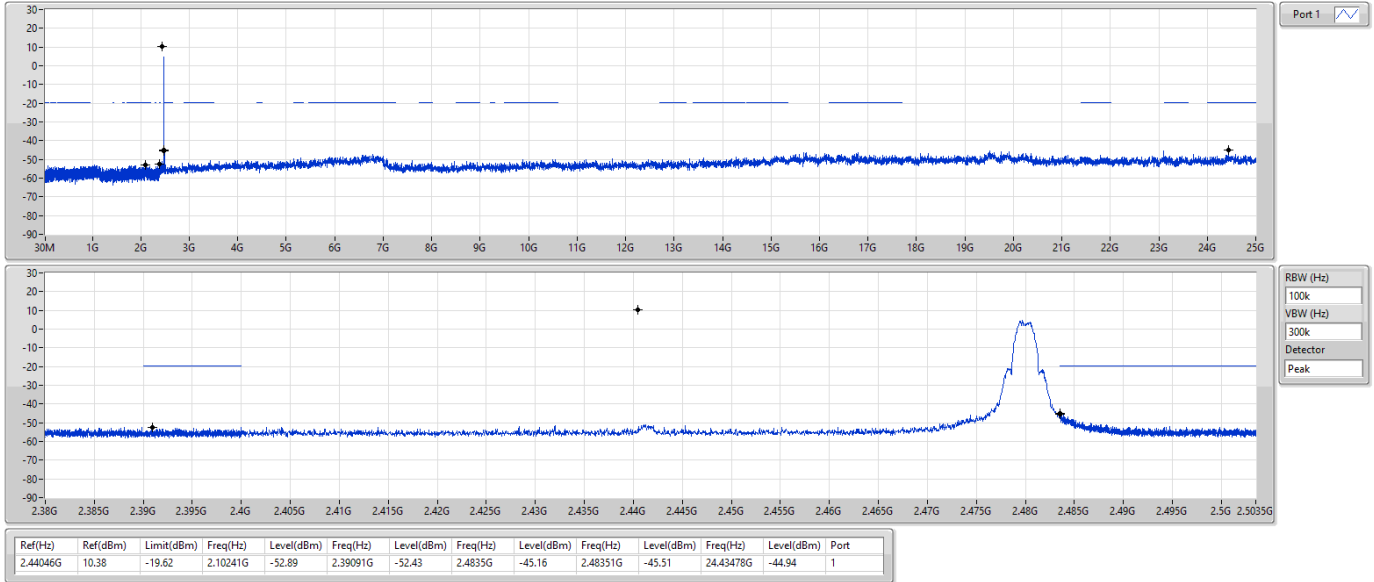



## ***Radiated Emissions below 1GHz***


## ***Appendix F.1***

### **Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	30.68M	32.24	40.00	-7.76	Vertical

30/08/2021


## Mode 1

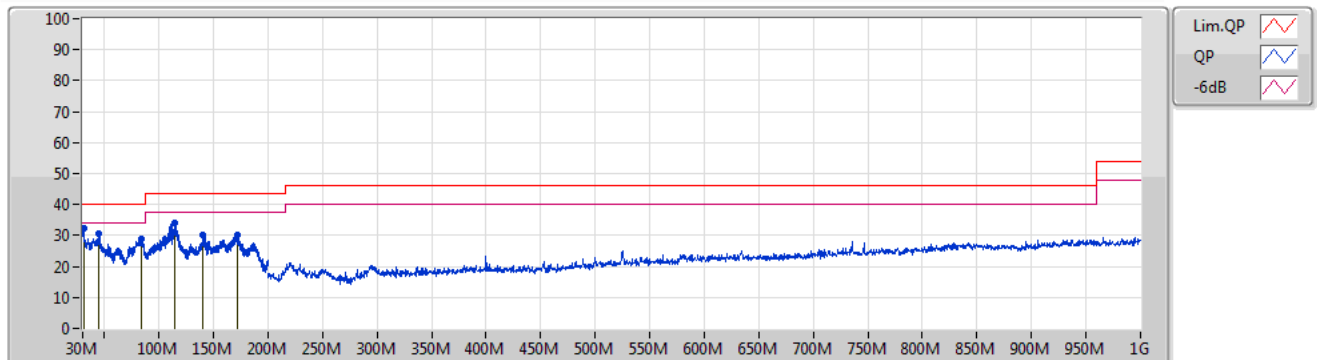

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	30.68M	32.24	40.00	-7.76	-3.26	3	Vertical	300	1.00	"Worst"	35.50	23.60	1.03	27.89
PK	45.05M	30.70	40.00	-9.30	-10.66	3	Vertical	293	1.00	-	41.36	15.87	1.40	27.93
PK	84.32M	28.84	40.00	-11.16	-12.11	3	Vertical	32	2.00	-	40.95	13.55	2.19	27.85
PK	113.9M	33.94	43.50	-9.56	-7.00	3	Vertical	246	1.00	-	40.94	18.08	2.61	27.69
PK	140.33M	30.36	43.50	-13.14	-7.42	3	Vertical	36	1.00	-	37.78	17.12	3.00	27.54
PK	172.46M	30.33	43.50	-13.17	-8.48	3	Vertical	48	4.00	-	38.81	15.56	3.39	27.43

30/08/2021

### Mode 1

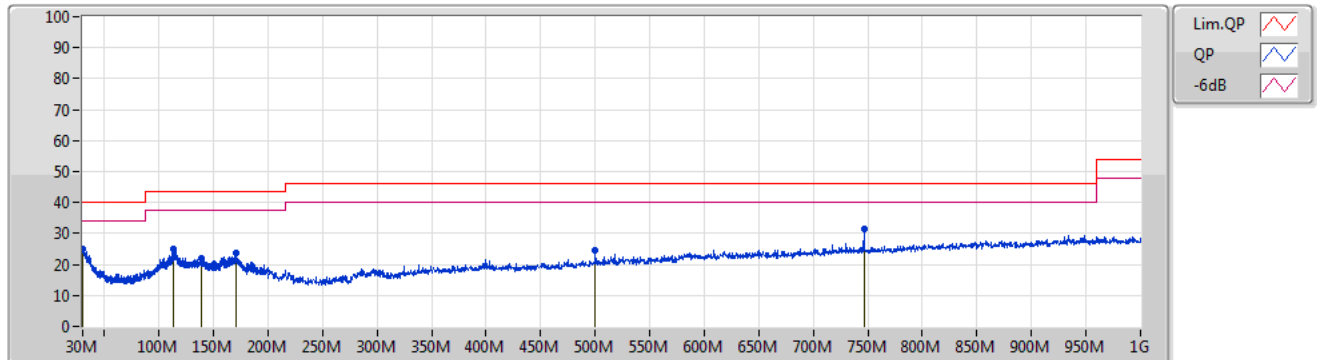

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	30.17M	24.88	40.00	-15.12	-3.13	3	Horizontal	255	1.00	-	28.01	23.74	1.01	27.88
PK	112.71M	24.91	43.50	-18.59	-7.08	3	Horizontal	331	2.00	-	31.99	18.03	2.59	27.70
PK	138.89M	22.07	43.50	-21.43	-7.35	3	Horizontal	1	1.00	-	29.42	17.22	2.98	27.55
PK	171.1M	23.62	43.50	-19.88	-8.46	3	Horizontal	8	1.00	-	32.08	15.61	3.37	27.44
PK	500M	24.53	46.00	-21.47	-5.58	3	Horizontal	342	2.00	-	30.11	17.52	4.80	27.90
PK	746.4M	31.28	46.00	-14.72	-1.20	3	Horizontal	55	1.00	"Worst"	32.48	20.41	5.99	27.60




**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.15.4	Pass	AV	2.4835G	53.91	54.00	-0.09	3	Horizontal	136	1.17	-

802.15.4

2405MHz\_TX

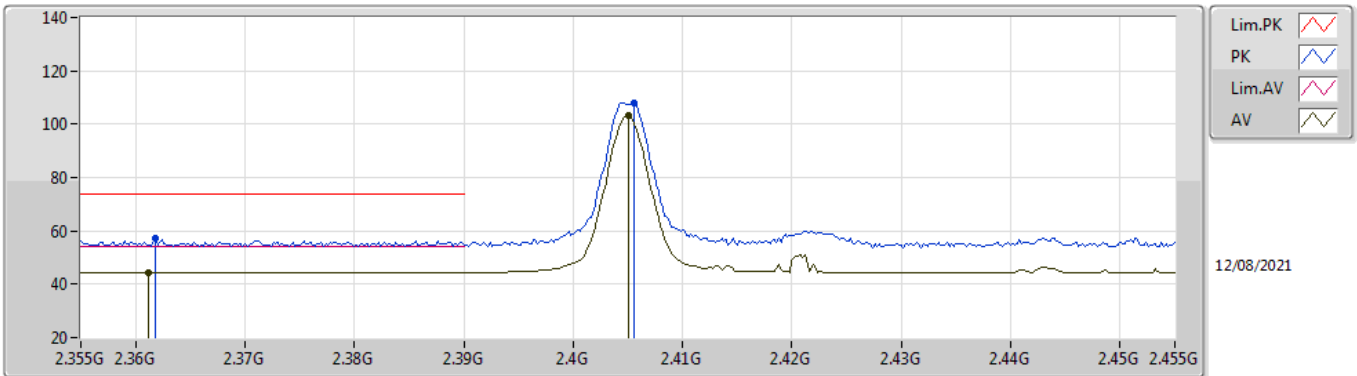


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.3618G	57.25	74.00	-16.75	25.41	3	Vertical	232	3.00	-	28.38	3.46	-	
AV	2.3612G	44.42	54.00	-9.58	12.58	3	Vertical	232	3.00	-	28.38	3.46	-	
PK	2.4056G	108.18	Inf	-Inf	76.36	3	Vertical	232	3.00	-	28.31	3.51	-	
AV	2.405G	103.27	Inf	-Inf	71.46	3	Vertical	232	3.00	-	28.31	3.50	-	

802.15.4

2405MHz\_TX

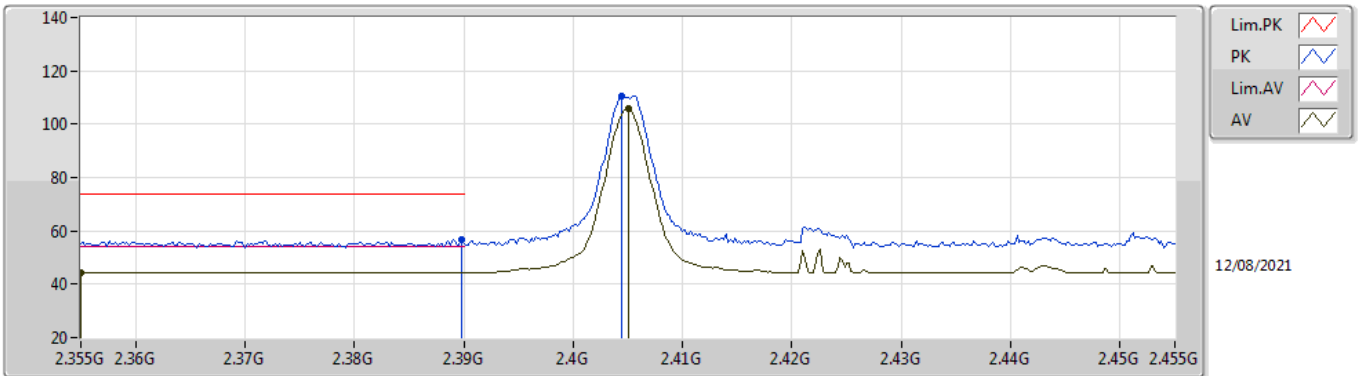


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.3898G	56.97	74.00	-17.03	25.16	3	Horizontal	306	1.07	-	28.32	3.49	-	
AV	2.355G	44.47	54.00	-9.53	12.62	3	Horizontal	306	1.07	-	28.39	3.46	-	
PK	2.4044G	110.73	Inf	-Inf	78.92	3	Horizontal	306	1.07	-	28.31	3.50	-	
AV	2.405G	105.78	Inf	-Inf	73.97	3	Horizontal	306	1.07	-	28.31	3.50	-	



802.15.4

2405MHz\_TX

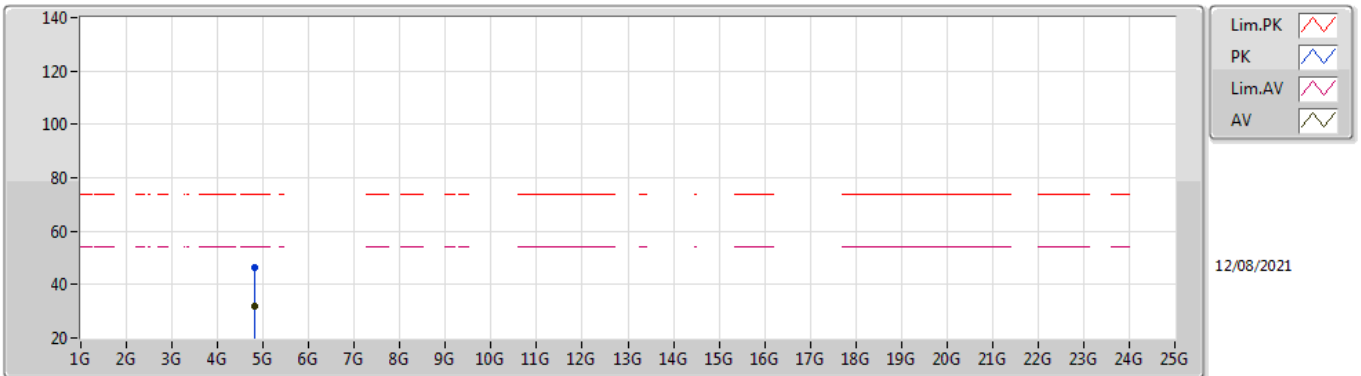


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80982G	46.37	74.00	-27.63	42.19	3	Vertical	72	1.80	-	33.40	6.21	35.43
AV	4.8102G	32.07	54.00	-21.93	27.88	3	Vertical	72	1.80	-	33.40	6.22	35.43

802.15.4

2405MHz\_TX

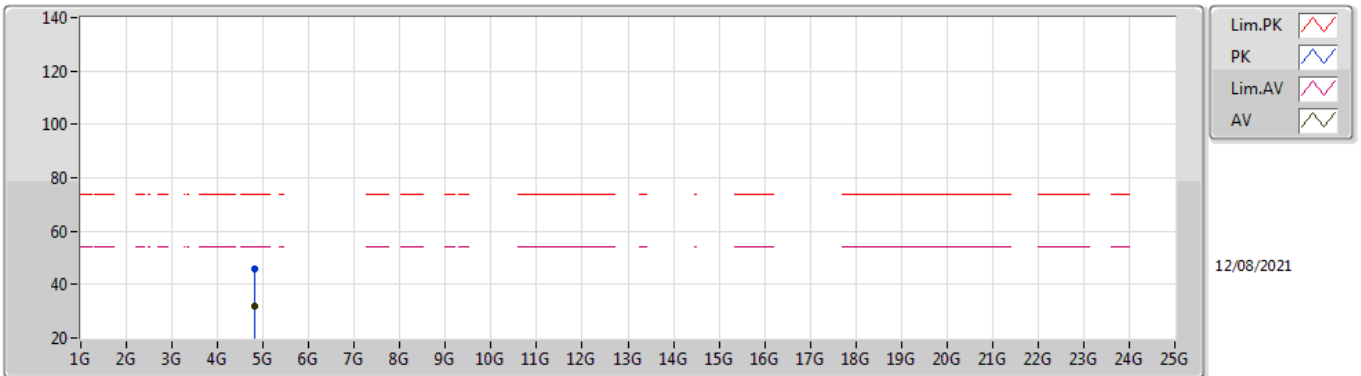


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.81048G	45.91	74.00	-28.09	41.72	3	Horizontal	346	2.96	-	33.40	6.22	35.43
AV	4.80982G	32.07	54.00	-21.93	27.89	3	Horizontal	346	2.96	-	33.40	6.21	35.43

802.15.4

2440MHz\_TX

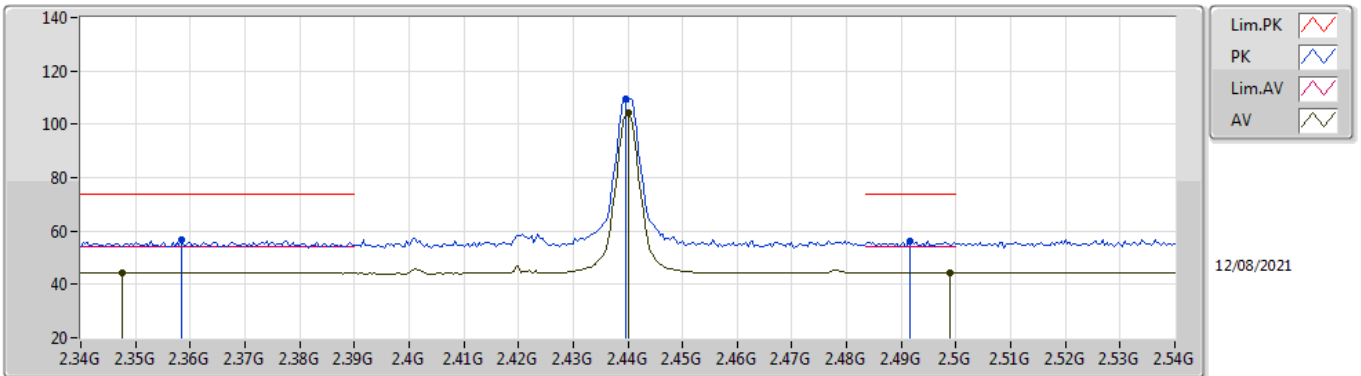


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3584G	56.56	74.00	-17.44	24.72	3	Vertical	228	3.00	-	28.38	3.46	-
AV	2.3476G	44.28	54.00	-9.72	12.44	3	Vertical	228	3.00	-	28.39	3.45	-
PK	2.4396G	109.38	Inf	-Inf	77.46	3	Vertical	228	3.00	-	28.38	3.54	-
AV	2.44G	104.45	Inf	-Inf	72.53	3	Vertical	228	3.00	-	28.38	3.54	-
PK	2.4916G	56.19	74.00	-17.81	23.95	3	Vertical	228	3.00	-	28.65	3.59	-
AV	2.4988G	44.44	54.00	-9.56	12.15	3	Vertical	228	3.00	-	28.69	3.60	-

802.15.4

2440MHz\_TX

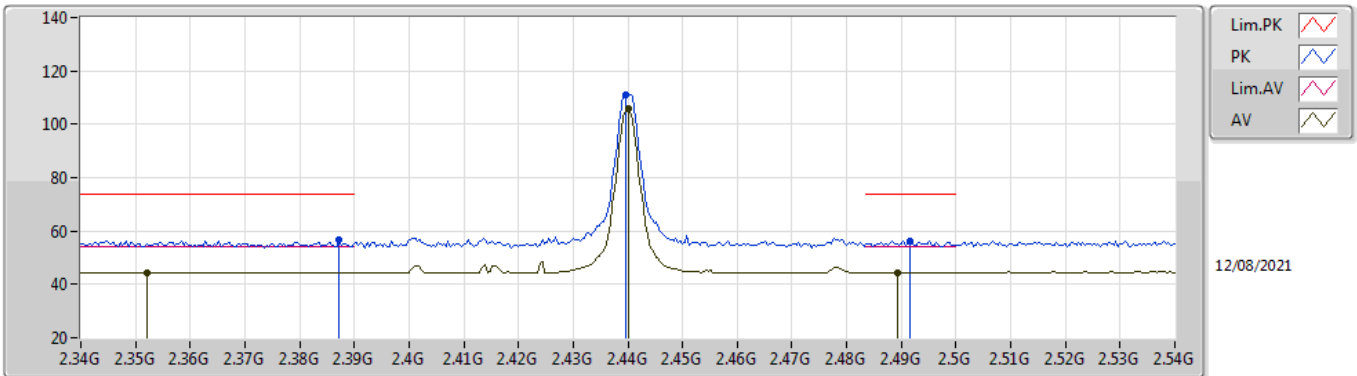


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3872G	56.80	74.00	-17.20	24.98	3	Horizontal	134	1.14	-	28.33	3.49	-
AV	2.352G	44.37	54.00	-9.63	12.52	3	Horizontal	134	1.14	-	28.40	3.45	-
PK	2.4396G	111.05	Inf	-Inf	79.13	3	Horizontal	134	1.14	-	28.38	3.54	-
AV	2.44G	106.08	Inf	-Inf	74.16	3	Horizontal	134	1.14	-	28.38	3.54	-
PK	2.4916G	56.44	74.00	-17.56	24.20	3	Horizontal	134	1.14	-	28.65	3.59	-
AV	2.4892G	44.53	54.00	-9.47	12.30	3	Horizontal	134	1.14	-	28.64	3.59	-

802.15.4

2440MHz\_TX

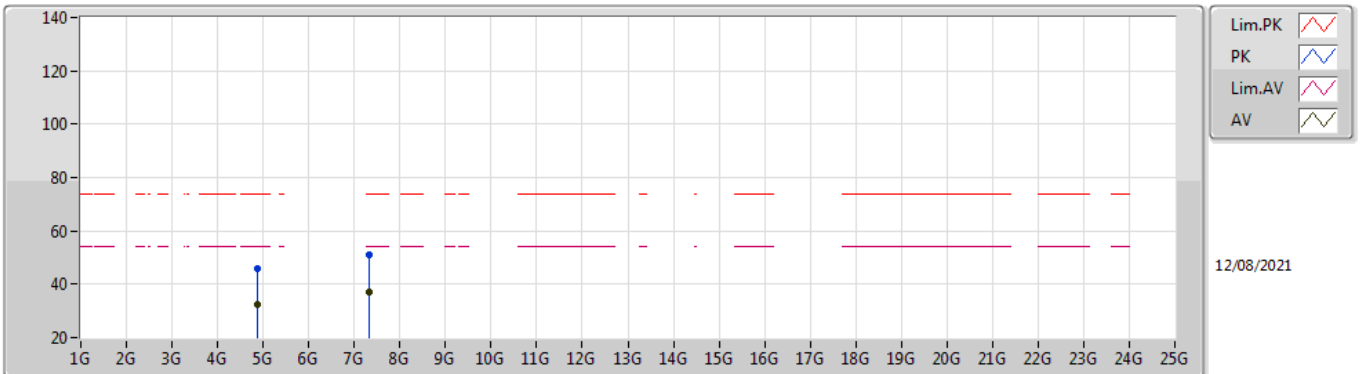


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88494G	45.98	74.00	-28.02	41.50	3	Vertical	318	2.36	-	33.54	6.33	35.39
AV	4.88464G	32.59	54.00	-21.41	28.11	3	Vertical	318	2.36	-	33.54	6.33	35.39
PK	7.32056G	50.96	74.00	-23.04	41.65	3	Vertical	79	2.18	-	37.00	7.88	35.57
AV	7.32442G	37.29	54.00	-16.71	27.97	3	Vertical	79	2.18	-	37.00	7.89	35.57

## 802.15.4

### 2440MHz\_TX

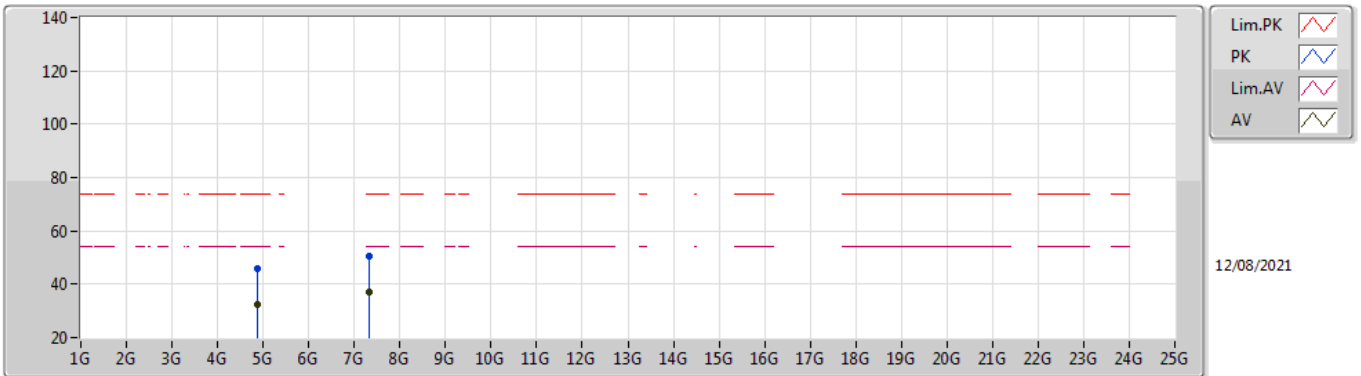


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87794G	45.87	74.00	-28.13	41.43	3	Horizontal	329	1.74	-	33.51	6.32	35.39
AV	4.8848G	32.56	54.00	-21.44	28.08	3	Horizontal	329	1.74	-	33.54	6.33	35.39
PK	7.31922G	50.47	74.00	-23.53	41.16	3	Horizontal	110	2.51	-	37.00	7.88	35.57
AV	7.3242G	37.11	54.00	-16.89	27.79	3	Horizontal	110	2.51	-	37.00	7.89	35.57

802.15.4

2475MHz\_TX

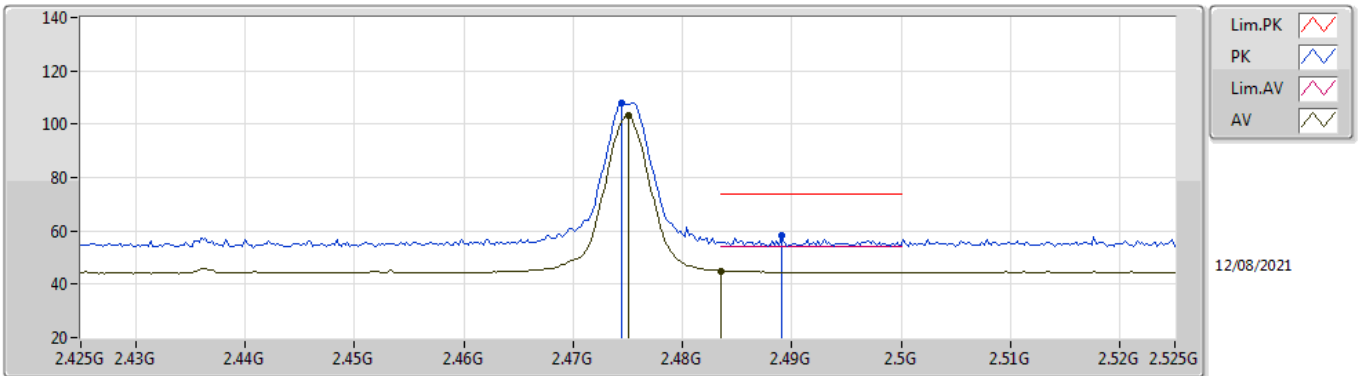


EUT Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4744G	108.03	Inf	-Inf	75.91	3	Vertical	231	2.90	-	28.55	3.57	-	
AV	2.475G	103.07	Inf	-Inf	70.94	3	Vertical	231	2.90	-	28.55	3.58	-	
PK	2.489G	58.21	74.00	-15.79	25.99	3	Vertical	231	2.90	-	28.63	3.59	-	
AV	2.4835G	45.06	54.00	-8.94	12.88	3	Vertical	231	2.90	-	28.60	3.58	-	

802.15.4

2475MHz\_TX

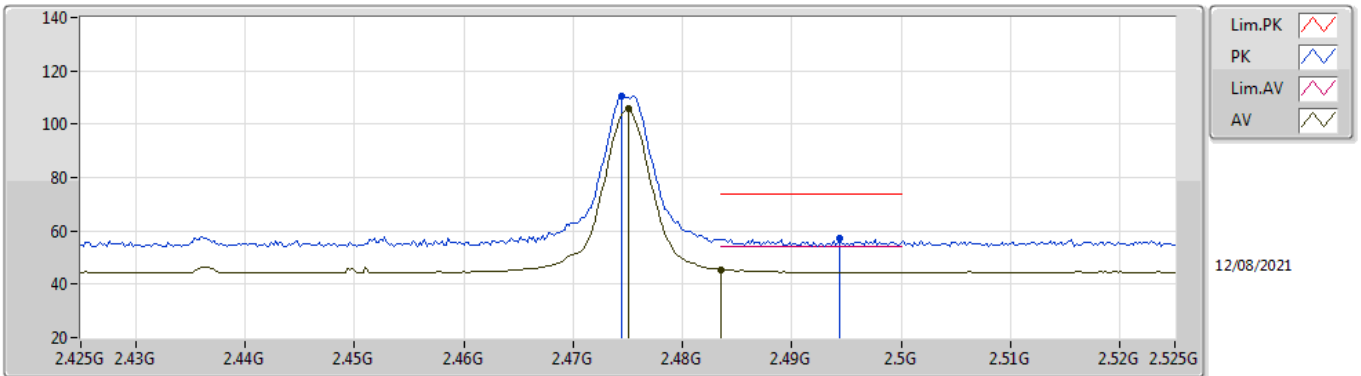


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4744G	110.57	Inf	-Inf	78.45	3	Horizontal	133	1.00	-	28.55	3.57	-	
AV	2.475G	105.62	Inf	-Inf	73.49	3	Horizontal	133	1.00	-	28.55	3.58	-	
PK	2.4944G	57.30	74.00	-16.70	25.04	3	Horizontal	133	1.00	-	28.67	3.59	-	
AV	2.4835G	45.50	54.00	-8.50	13.32	3	Horizontal	133	1.00	-	28.60	3.58	-	



802.15.4

2475MHz\_TX

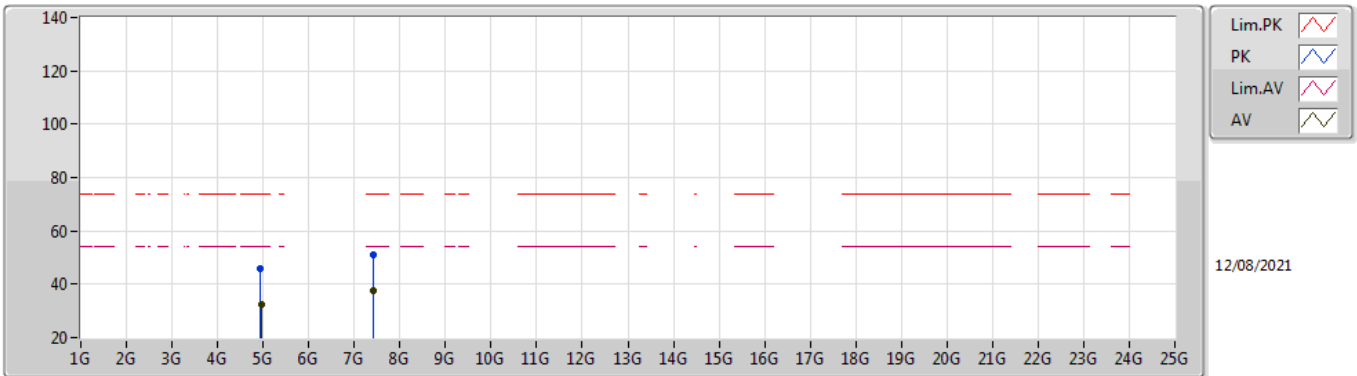


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.94668G	46.00	74.00	-28.00	41.25	3	Vertical	103	1.42	-	33.69	6.42	35.36
AV	4.95318G	32.59	54.00	-21.41	27.80	3	Vertical	103	1.42	-	33.71	6.43	35.35
PK	7.42164G	51.27	74.00	-22.73	41.81	3	Vertical	233	1.07	-	37.06	8.00	35.60
AV	7.42202G	37.70	54.00	-16.30	28.24	3	Vertical	233	1.07	-	37.06	8.00	35.60

## 802.15.4

## 2475MHz\_TX

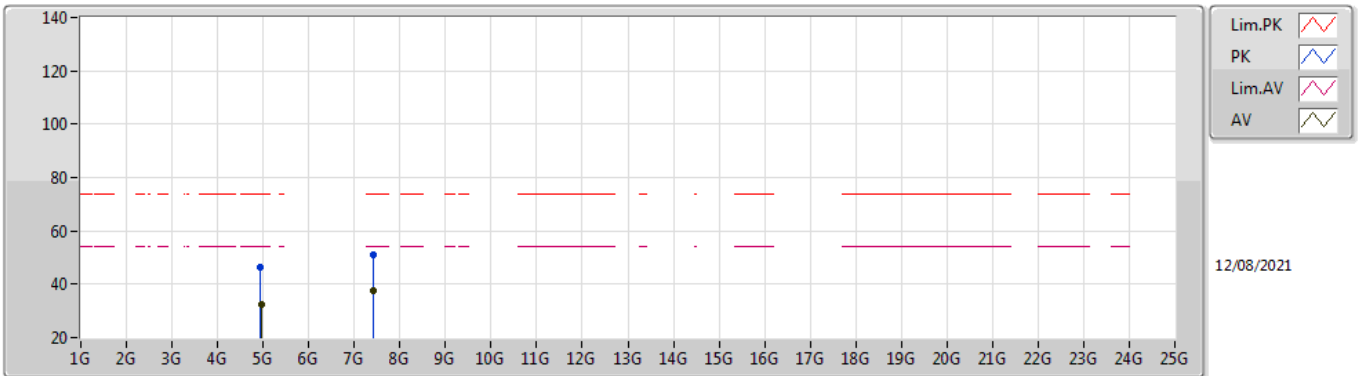


EUT\_Z\_1TX  
Setting 20  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.94788G	46.24	74.00	-27.76	41.48	3	Horizontal	242	2.60	-	33.70	6.42	35.36	
AV	4.95342G	32.57	54.00	-21.43	27.78	3	Horizontal	242	2.60	-	33.71	6.43	35.35	
PK	7.42904G	50.91	74.00	-23.09	41.47	3	Horizontal	213	2.56	-	37.04	8.00	35.60	
AV	7.42212G	37.69	54.00	-16.31	28.23	3	Horizontal	213	2.56	-	37.06	8.00	35.60	

802.15.4

2480MHz\_TX

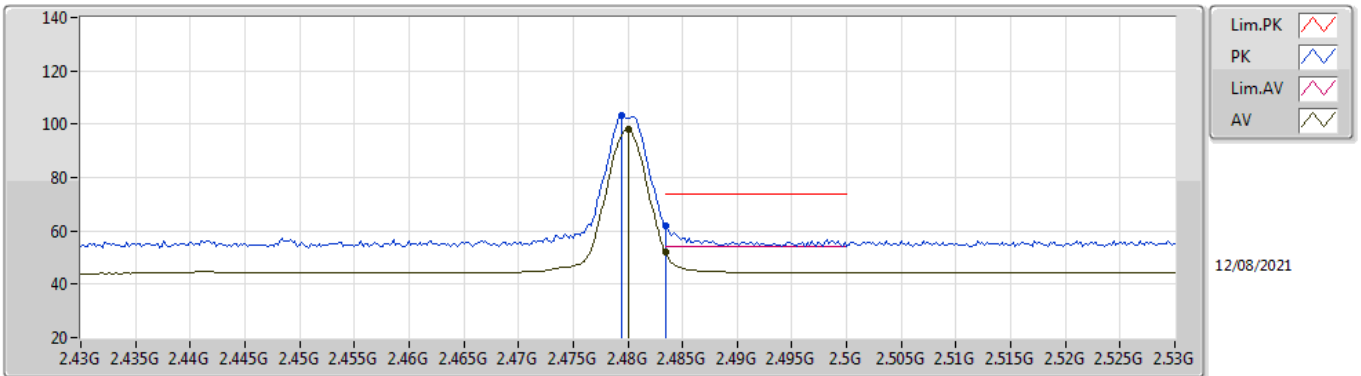


EUT\_Z\_1TX  
Setting 17  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4794G	103.24	Inf	-Inf	71.08	3	Vertical	230	2.90	-	28.58	3.58	-	
AV	2.48G	98.10	Inf	-Inf	65.94	3	Vertical	230	2.90	-	28.58	3.58	-	
PK	2.4835G	61.66	74.00	-12.34	29.48	3	Vertical	230	2.90	-	28.60	3.58	-	
AV	2.4835G	52.01	54.00	-1.99	19.83	3	Vertical	230	2.90	-	28.60	3.58	-	

802.15.4

2480MHz\_TX

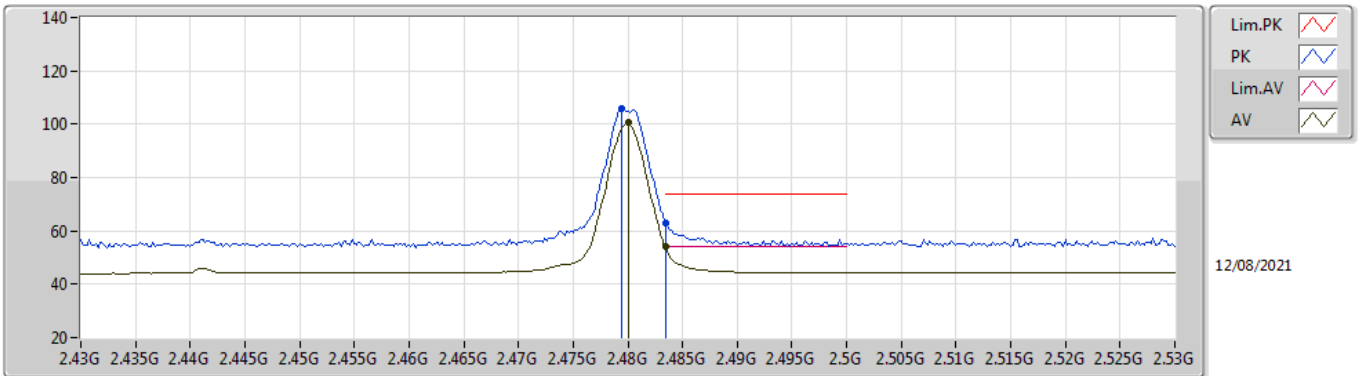


EUT\_Z\_1TX  
Setting 17  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4794G	105.64	Inf	-Inf	73.48	3	Horizontal	136	1.17	-	28.58	3.58	-	
AV	2.48G	100.49	Inf	-Inf	68.33	3	Horizontal	136	1.17	-	28.58	3.58	-	
PK	2.4835G	63.11	74.00	-10.89	30.93	3	Horizontal	136	1.17	-	28.60	3.58	-	
AV	2.4835G	53.91	54.00	-0.09	21.73	3	Horizontal	136	1.17	-	28.60	3.58	-	

802.15.4

2480MHz\_TX

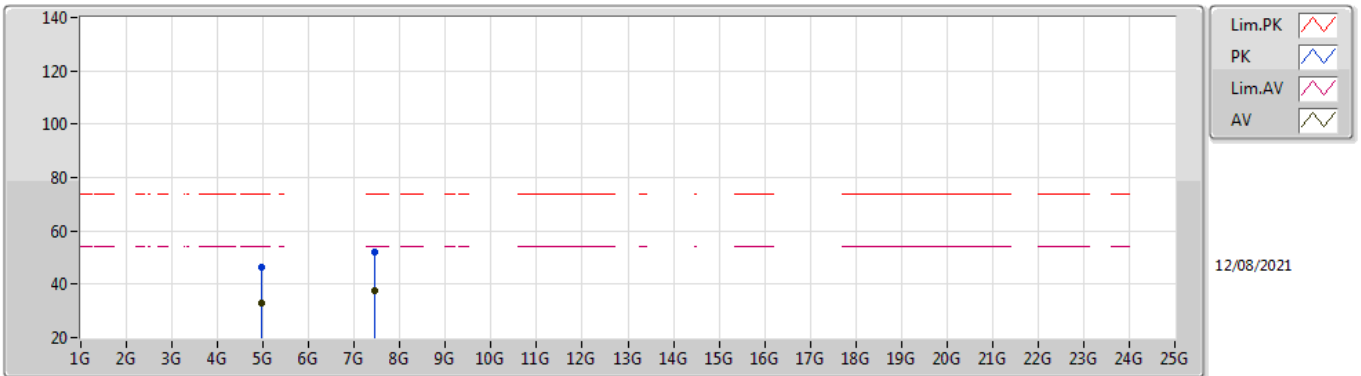


EUT\_Z\_1TX  
Setting 17  
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.9589G	46.50	74.00	-27.50	41.69	3	Vertical	206	2.53	-	33.72	6.44	35.35
AV	4.96108G	32.78	54.00	-21.22	27.97	3	Vertical	206	2.53	-	33.72	6.44	35.35
PK	7.436G	52.08	74.00	-21.92	42.65	3	Vertical	29	1.86	-	37.03	8.00	35.60
AV	7.43582G	37.60	54.00	-16.40	28.17	3	Vertical	29	1.86	-	37.03	8.00	35.60

## 802.15.4

## 2480MHz\_TX

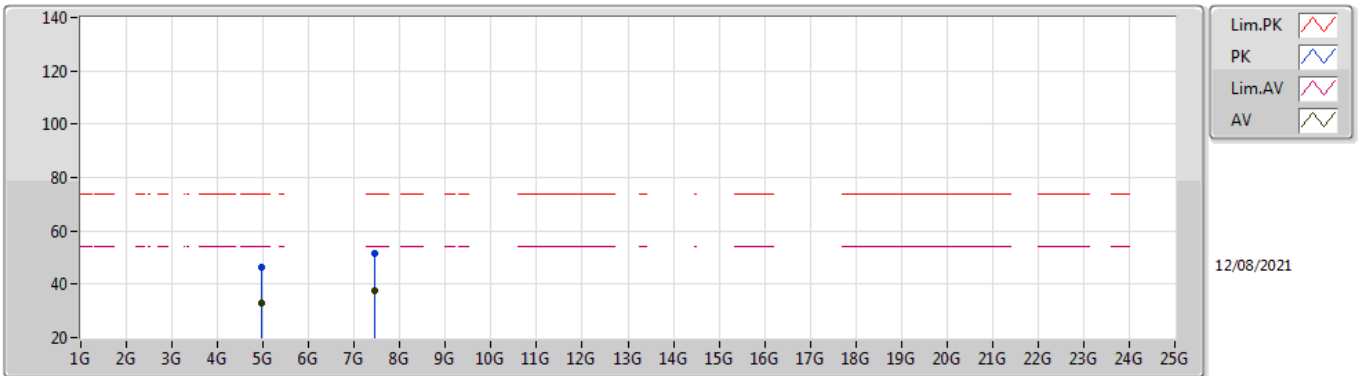

EUT\_Z\_1TX  
Setting 17  
03-D-K-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.96196G	46.30	74.00	-27.70	41.49	3	Horizontal	186	2.93	-	33.72	6.44	35.35
AV	4.96086G	32.70	54.00	-21.30	27.89	3	Horizontal	186	2.93	-	33.72	6.44	35.35
PK	7.44054G	51.30	74.00	-22.70	41.88	3	Horizontal	256	1.90	-	37.02	8.00	35.60
AV	7.4361G	37.73	54.00	-16.27	28.30	3	Horizontal	256	1.90	-	37.03	8.00	35.60



**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	2.68801G	44.36	54.00	-9.64	Vertical


## Mode 1

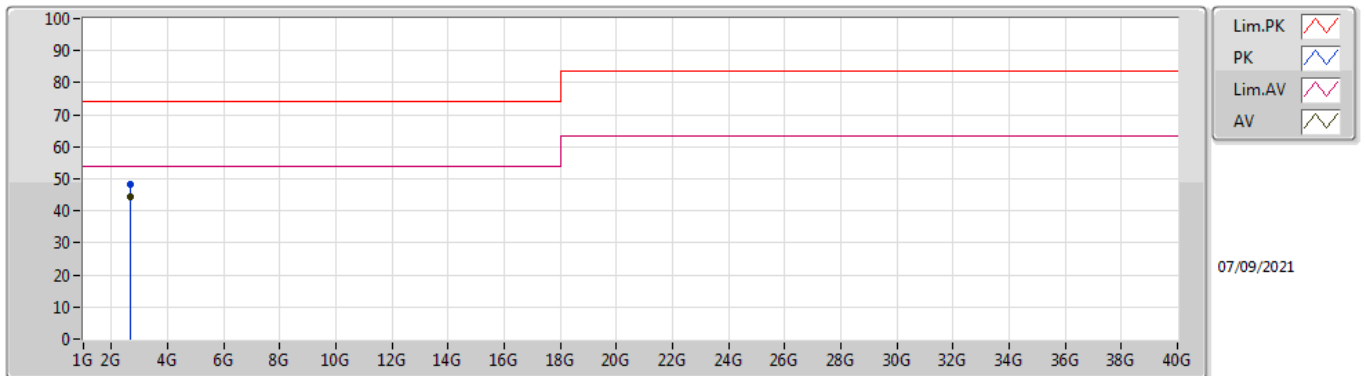

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	2.68808G	48.38	74.00	-25.62	-2.30	3	Vertical	199	1.54	-	50.68	27.73	3.48	33.51
AV	2.68801G	44.36	54.00	-9.64	-2.30	3	Vertical	199	1.54	"Worst"	46.66	27.73	3.48	33.51



### Mode 1

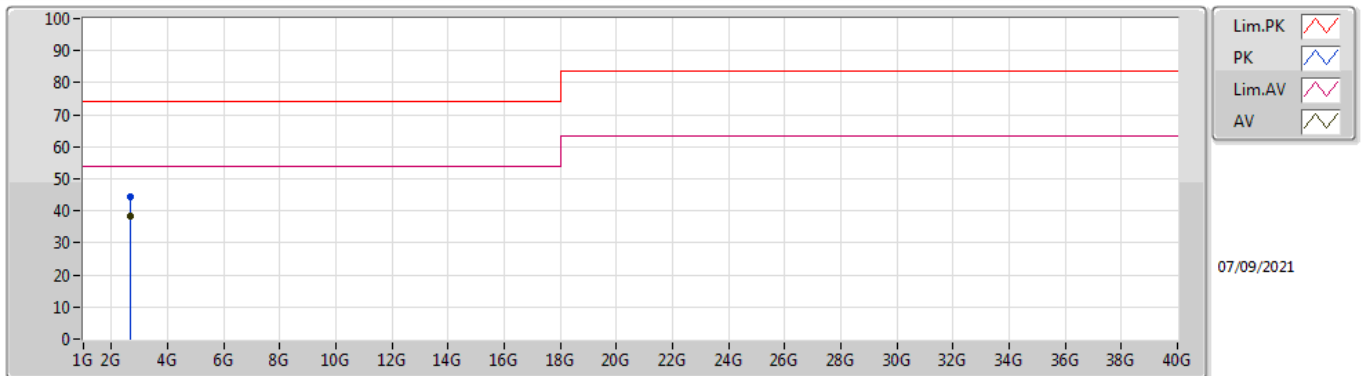

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
PK	2.68797G	44.47	74.00	-29.53	-2.30	3	Horizontal	144	1.00	-	46.77	27.73	3.48	33.51
AV	2.68801G	38.20	54.00	-15.80	-2.30	3	Horizontal	144	1.00	"Worst"	40.50	27.73	3.48	33.51