

## FCC Test Report

**Report No.:** RF190514C12-6

**FCC ID:** 2ARXKVHE10

**Test Model:** VHE10

**Series Model:** VHE10XXX (X=A-Z, 0-9, blank or "-")

**Received Date:** May 14, 2019

**Test Date:** Jul. 05 ~ Jul. 20, 2019

**Issued Date:** Jul. 26, 2019

**Applicant:** Veea Inc

**Address:** 164 E 83rd Street, New York NY, 10028, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Setup.....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results.....	17
4.2 Conducted Emission Measurement.....	47
4.2.1 Limits of Conducted Emission Measurement.....	47
4.2.2 Test Instruments.....	47
4.2.3 Test Procedures.....	48
4.2.4 Deviation from Test Standard.....	48
4.2.5 Test Setup.....	48
4.2.6 EUT Operating Conditions.....	48
4.2.7 Test Results.....	49
4.3 Number of Hopping Frequency Used.....	61
4.3.1 Limits of Hopping Frequency Used Measurement.....	61
4.3.2 Test Setup.....	61
4.3.3 Test Instruments.....	61
4.3.4 Test Procedure.....	61
4.3.5 Deviation from Test Standard.....	61
4.3.6 Test Results.....	62
4.4 Dwell Time on Each Channel.....	63
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	63
4.4.2 Test Setup.....	63
4.4.3 Test Instruments.....	63
4.4.4 Test Procedures.....	63
4.4.5 Deviation from Test Standard.....	63
4.4.6 Test Results.....	64
4.5 Channel Bandwidth.....	66
4.5.1 Limits of Channel Bandwidth Measurement.....	66
4.5.2 Test Setup.....	66
4.5.3 Test Instruments.....	66
4.5.4 Test Procedure.....	66
4.5.5 Deviation from Test Standard.....	66
4.5.6 EUT Operating Condition.....	66
4.5.7 Test Results.....	67
4.6 Hopping Channel Separation.....	68
4.6.1 Limits of Hopping Channel Separation Measurement.....	68

4.6.2	Test Setup.....	68
4.6.3	Test Instruments .....	68
4.6.4	Test Procedure .....	68
4.6.5	Deviation from Test Standard .....	68
4.6.6	Test Results .....	69
4.7	Maximum Output Power.....	70
4.7.1	Limits of Maximum Output Power Measurement .....	70
4.7.2	Test Setup.....	70
4.7.3	Test Instruments .....	70
4.7.4	Test Procedure .....	70
4.7.5	Deviation from Test Standard .....	70
4.7.6	EUT Operating Condition .....	70
4.7.7	Test Results .....	70
4.8	Conducted Out of Band Emission Measurement.....	71
4.8.1	Limits Of Conducted Out Of Band Emission Measurement .....	71
4.8.2	Test Instruments .....	71
4.8.3	Test Procedure .....	71
4.8.4	Deviation from Test Standard .....	71
4.8.5	EUT Operating Condition .....	71
4.8.6	Test Results .....	71
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>74</b>
	<b>Appendix – Information on the Testing Laboratories .....</b>	<b>75</b>

### Release Control Record

Issue No.	Description	Date Issued
RF190514C12-6	Original release	Jul. 26, 2019

## 1 Certificate of Conformity

**Product:** veeaHub

**Brand:** 

**Test Model:** VHE10

**Series Model:** VHE10XXX (X=A-Z, 0-9, blank or "-")

**Sample Status:** Engineering sample

**Applicant:** Veea Inc

**Test Date:** Jul. 05 ~ Jul. 20, 2019

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Celine Chou , **Date:** Jul. 26, 2019  
Celine Chou / Senior Specialist

**Approved by :** Bruce Chen , **Date:** Jul. 26, 2019  
Bruce Chen / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -0.50dB at 1.00467MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(a)(1)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.2dB at 57.12MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Chip antenna: No antenna connector is used. PIFA antenna: Antenna connector is U.FL not a standard connector. Dipole antenna: Antenna connector is RP-SMA-Male not a standard connector.

### Note:

1. If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:


Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	veeaHub
Brand	
Test Model	VHE10
Series Model	VHE10XXX (X=A-Z, 0-9, blank or "-")
Model Difference	Marketing purposes
Sample Status	Engineering sample
Power Supply Rating	48Vdc (Adapter and POE)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1/2/3Mbps
Operating Frequency	2402~2480MHz
Number of Channel	79
Output Power	3.908mW
Antenna Type	Chip antenna with 6dBi gain PIFA antenna with 2.2dBi gain Dipole antenna with 4.1dBi gain
Antenna Connector	Chip antenna: NA PIFA antenna: U.FL Dipole antenna: RP-SMA-Male
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The EUT uses following adapter and POE.

Adapter	
Brand	EDACPOWER ELEC.
Model	EA1062SGR-480
Input Power	100-240Vac, 50-60Hz, 2.5A
Output Power	48Vdc, 1.35A
Power Line	1.2m DC cable with one core

POE (Support unit)	
Model	APOE02-WM
Output Power	48Vdc

2. The EUT with Chip antenna (with maximum gain) was chosen for the Antenna Port Conducted Measurement tests.

3. The EUT has two sale types.

Type	Description
A	Without LTE function, BT internal ant.
B	With LTE function, BT external ant.

4. WLAN, zigbee and Bluetooth technology can transmit at same time.

### 3.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description	
	RE $\geq$ 1G	RE<1G	PLC	APCM	Antenna	Power
A1	√	√	√	√	Chip Antenna	Power from adapter
A2	-	√	√	-		Power from POE
B1	√	√	√	-	PIFA Antenna	Power from adapter
B2	-	√	√	-		Power from POE
C1	√	√	√	-	Dipole Antenna	Power from adapter
C2	-	√	√	-		Power from POE

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane for Chip Antenna, X-plane for PIFA and Dipole Antenna.**
- Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, B1, C1	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A1, B1, C1	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, A2, B1, B2, C1, C2	0 to 78	0	FHSS	8DPSK	3DH5

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, A2, B1, B2, C1, C2	0 to 78	0	FHSS	8DPSK	3DH5

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A1	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 68% RH	120Vac, 60Hz	Willy Cheng
RE<1G	25 deg. C, 68% RH	120Vac, 60Hz 48Vdc	Willy Cheng
PLC	21 deg. C, 61% RH	120Vac, 60Hz 48Vdc	Willy Cheng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Ted Chang

**3.3 Description of Support Units**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	USB Flash	HP	v250W	03	NA	-
D.	USB Flash	HP	v250W	05	NA	-
E.	USB Flash	HP	v250W	09	NA	-
F.	POE	NA	APOE02-WM	NA	NA	Provided by manufacturer


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	1.5	N	0	Cat5e
2.	RJ45 cable	1	5	N	0	Cat5e
3.	RJ45 cable	1	1.5	N	0	Cat5e

### 3.3.1 Configuration of System under Test

Test Mode A1, B1, C1

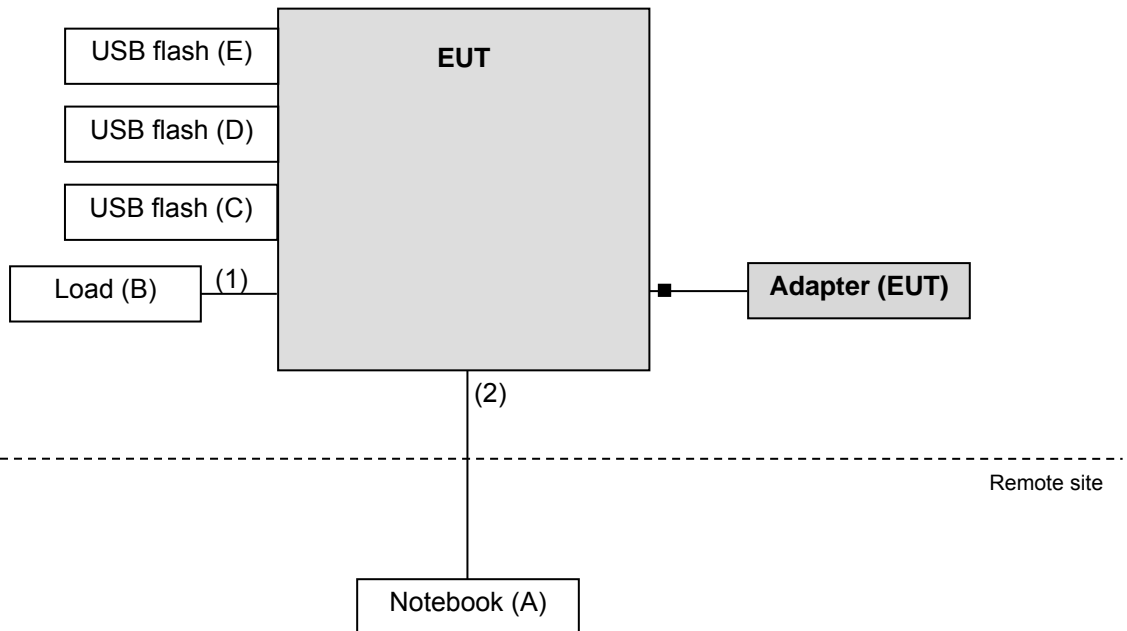

Test Mode A2, B2, C2

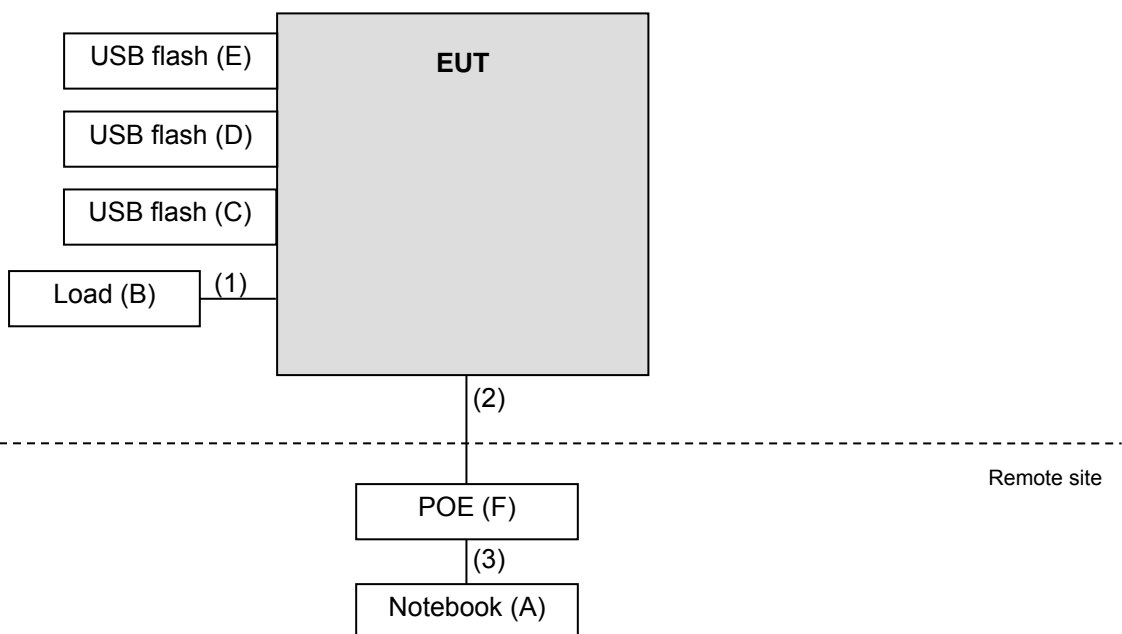

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 30, 2019	May 29, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 22, 2018	Nov. 21, 2019
HORN Antenna SCHWARZBECK	9120D	209	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna EMCI	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2018	Aug. 20, 2019
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 27, 2019	Mar. 26, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2018	Aug. 20, 2019
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-S M-8000	Cable-CH3-03 (309224+170907)	Aug. 21, 2018	Aug. 20, 2019
RF signal cable WOKEN	8D-FB	Cable-CH3-01	Aug. 21, 2018	Aug. 20, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5519 0004/MY55190007/MY 55210005	Jul. 17, 2018	Jul. 16, 2019
			Jul. 15, 2019	Jul. 14, 2020

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 3.

### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz. (RBW = 1MHz, VBW = 1kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

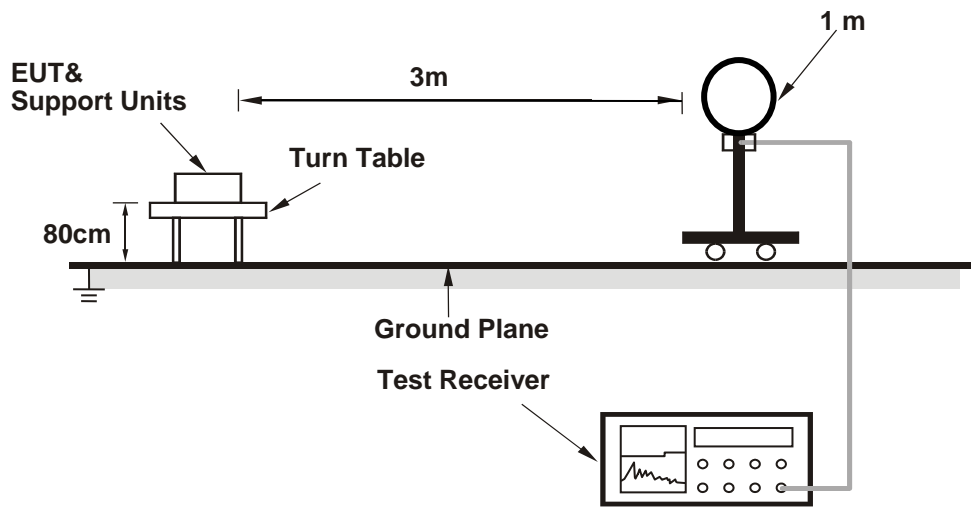

##### For Radiated emission 30MHz to 1GHz

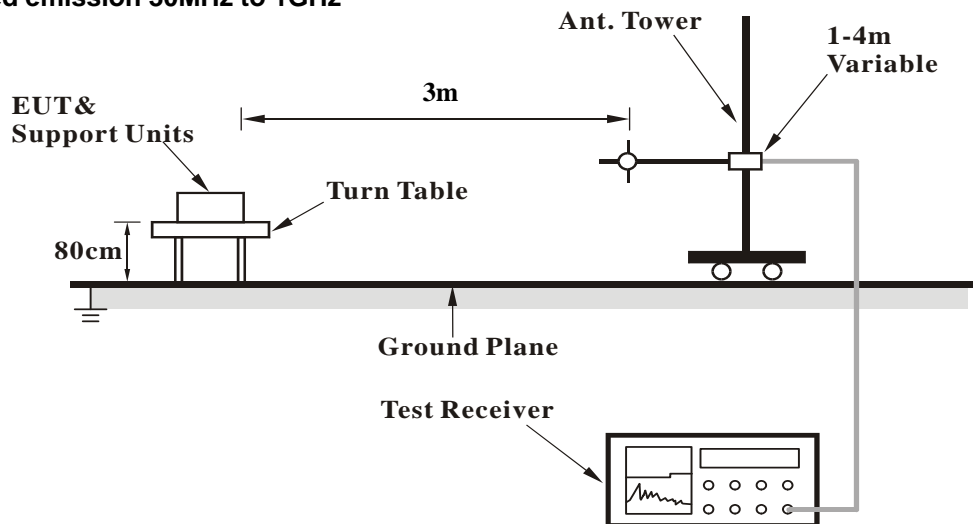

### For Radiated emission above 1GHz

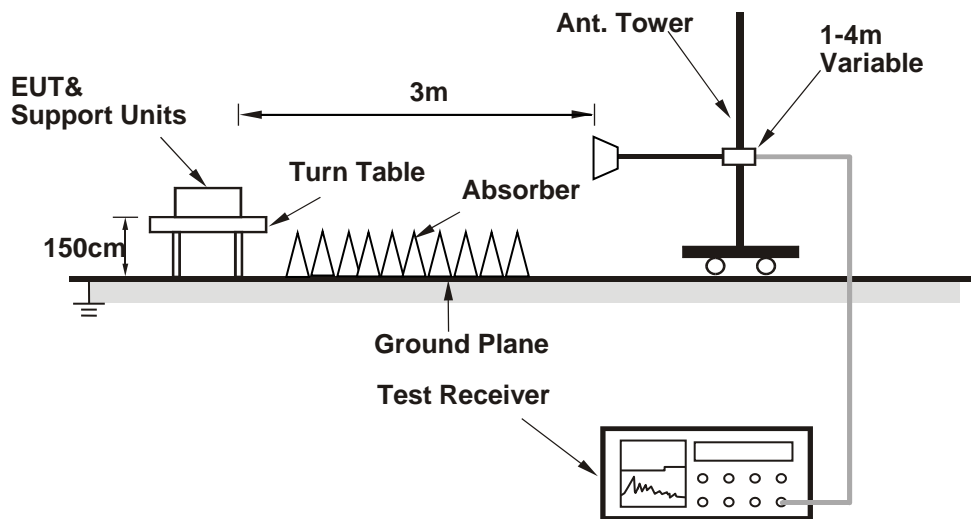

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (CBT) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.



#### 4.1.7 Test Results

Above 1GHz data:

Test Mode A1

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.08 H	310	27.5	32.9
2	2390.00	47.7 AV	54.0	-6.3	1.08 H	310	14.8	32.9
3	*2402.00	91.1 PK			1.19 H	335	58.2	32.9
4	*2402.00	89.9 AV			1.19 H	335	57.0	32.9
5	4804.00	48.1 PK	74.0	-25.9	2.22 H	186	44.5	3.6
6	4804.00	35.9 AV	54.0	-18.1	2.22 H	186	32.3	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	3.52 V	219	27.8	32.9
2	2390.00	47.4 AV	54.0	-6.6	3.52 V	219	14.5	32.9
3	*2402.00	84.2 PK			3.73 V	233	51.3	32.9
4	*2402.00	83.1 AV			3.73 V	233	50.2	32.9
5	4804.00	46.2 PK	74.0	-27.8	3.13 V	288	42.6	3.6
6	4804.00	32.5 AV	54.0	-21.5	3.13 V	288	28.9	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	93.2 PK			1.08 H	319	60.3	32.9
2	*2441.00	91.7 AV			1.08 H	319	58.8	32.9
3	4882.00	48.1 PK	74.0	-25.9	2.96 H	231	44.2	3.9
4	4882.00	35.4 AV	54.0	-18.6	2.96 H	231	31.5	3.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	87.0 PK			2.42 V	298	54.1	32.9
2	*2441.00	85.7 AV			2.42 V	298	52.8	32.9
3	4882.00	47.4 PK	74.0	-26.6	3.26 V	251	43.5	3.9
4	4882.00	33.7 AV	54.0	-20.3	3.26 V	251	29.8	3.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.2 PK			1.24 H	355	61.2	33.0
2	*2480.00	89.5 AV			1.24 H	355	56.5	33.0
3	2483.50	61.0 PK	74.0	-13.0	1.09 H	314	28.0	33.0
4	2483.50	48.3 AV	54.0	-5.7	1.09 H	314	15.3	33.0
5	4960.00	48.7 PK	74.0	-25.3	2.18 H	193	44.2	4.5
6	4960.00	36.8 AV	54.0	-17.2	2.18 H	193	32.3	4.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	87.5 PK			2.38 V	310	54.5	33.0
2	*2480.00	81.6 AV			2.38 V	310	48.6	33.0
3	2483.50	60.3 PK	74.0	-13.7	2.19 V	335	27.3	33.0
4	2483.50	47.7 AV	54.0	-6.3	2.19 V	335	14.7	33.0
5	4960.00	47.6 PK	74.0	-26.4	2.86 V	238	43.1	4.5
6	4960.00	33.7 AV	54.0	-20.3	2.86 V	238	29.2	4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.29 H	305	27.8	32.9
2	2390.00	47.6 AV	54.0	-6.4	1.29 H	305	14.7	32.9
3	*2402.00	93.7 PK			1.13 H	352	60.8	32.9
4	*2402.00	89.4 AV			1.13 H	352	56.5	32.9
5	4804.00	48.8 PK	74.0	-25.2	1.93 H	254	45.2	3.6
6	4804.00	35.7 AV	54.0	-18.3	1.93 H	254	32.1	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	2.58 V	313	27.6	32.9
2	2390.00	47.2 AV	54.0	-6.8	2.58 V	313	14.3	32.9
3	*2402.00	87.5 PK			2.48 V	300	54.6	32.9
4	*2402.00	83.1 AV			2.48 V	300	50.2	32.9
5	4804.00	46.8 PK	74.0	-27.2	2.96 V	185	43.2	3.6
6	4804.00	32.5 AV	54.0	-21.5	2.96 V	185	28.9	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.9 PK			1.18 H	342	62.0	32.9
2	*2441.00	78.9 AV			1.18 H	342	46.0	32.9
3	4882.00	48.4 PK	74.0	-25.6	2.58 H	159	44.5	3.9
4	4882.00	35.6 AV	54.0	-18.4	2.58 H	159	31.7	3.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	88.0 PK			2.43 V	309	55.1	32.9
2	*2441.00	82.0 AV			2.43 V	309	49.1	32.9
3	4882.00	47.3 PK	74.0	-26.7	2.99 V	218	43.4	3.9
4	4882.00	33.7 AV	54.0	-20.3	2.99 V	218	29.8	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.4 PK			1.04 H	353	59.4	33.0
2	*2480.00	88.0 AV			1.04 H	353	55.0	33.0
3	2483.50	60.5 PK	74.0	-13.5	2.31 H	343	27.5	33.0
4	2483.50	47.6 AV	54.0	-6.4	2.31 H	343	14.6	33.0
5	4960.00	48.8 PK	74.0	-25.2	2.83 H	251	44.3	4.5
6	4960.00	35.5 AV	54.0	-18.5	2.83 H	251	31.0	4.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	86.8 PK			1.33 V	309	53.8	33.0
2	*2480.00	79.4 AV			1.33 V	309	46.4	33.0
3	2483.50	60.0 PK	74.0	-14.0	1.48 V	315	27.0	33.0
4	2483.50	47.9 AV	54.0	-6.1	1.48 V	315	14.9	33.0
5	4960.00	47.7 PK	74.0	-26.3	2.51 V	289	43.2	4.5
6	4960.00	34.1 AV	54.0	-19.9	2.51 V	289	29.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

Test Mode B1

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	3.55 H	39	26.5	32.9
2	2390.00	47.1 AV	54.0	-6.9	3.55 H	39	14.2	32.9
3	*2402.00	71.0 PK			3.81 H	43	38.1	32.9
4	*2402.00	69.4 AV			3.81 H	43	36.5	32.9
5	4804.00	46.6 PK	74.0	-27.4	2.52 H	179	43.0	3.6
6	4804.00	32.1 AV	54.0	-21.9	2.52 H	179	28.5	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.9 PK	74.0	-14.1	2.31 V	324	27.0	32.9
2	2390.00	47.4 AV	54.0	-6.6	2.31 V	324	14.5	32.9
3	*2402.00	76.2 PK			2.35 V	311	43.3	32.9
4	*2402.00	74.8 AV			2.35 V	311	41.9	32.9
5	4804.00	46.8 PK	74.0	-27.2	1.72 V	166	43.2	3.6
6	4804.00	32.2 AV	54.0	-21.8	1.72 V	166	28.6	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	75.1 PK			3.36 H	25	42.2	32.9
2	*2441.00	73.0 AV			3.36 H	25	40.1	32.9
3	4882.00	46.1 PK	74.0	-27.9	1.98 H	263	42.2	3.9
4	4882.00	33.9 AV	54.0	-20.1	1.98 H	263	30.0	3.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	80.4 PK			4.00 V	311	47.5	32.9
2	*2441.00	78.3 AV			4.00 V	311	45.4	32.9
3	4882.00	47.4 PK	74.0	-26.6	2.62 V	221	43.5	3.9
4	4882.00	33.2 AV	54.0	-20.8	2.62 V	221	29.3	3.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	75.1 PK			3.69 H	43	42.1	33.0
2	*2480.00	72.6 AV			3.69 H	43	39.6	33.0
3	2483.50	60.2 PK	74.0	-13.8	3.55 H	32	27.2	33.0
4	2483.50	47.3 AV	54.0	-6.7	3.55 H	32	14.3	33.0
5	4960.00	47.5 PK	74.0	-26.5	2.34 H	173	43.0	4.5
6	4960.00	34.1 AV	54.0	-19.9	2.34 H	173	29.6	4.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	80.5 PK			2.63 V	309	47.5	33.0
2	*2480.00	77.9 AV			2.63 V	309	44.9	33.0
3	2483.50	59.9 PK	74.0	-14.1	2.59 V	311	26.9	33.0
4	2483.50	47.6 AV	54.0	-6.4	2.59 V	311	14.6	33.0
5	4960.00	46.6 PK	74.0	-27.4	1.96 V	285	42.1	4.5
6	4960.00	34.5 AV	54.0	-19.5	1.96 V	285	30.0	4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.9 PK	74.0	-14.1	3.42 H	33	27.0	32.9
2	2390.00	47.1 AV	54.0	-6.9	3.42 H	33	14.2	32.9
3	*2402.00	76.1 PK			3.62 H	28	43.2	32.9
4	*2402.00	68.2 AV			3.62 H	28	35.3	32.9
5	4804.00	46.1 PK	74.0	-27.9	2.15 H	196	42.5	3.6
6	4804.00	33.2 AV	54.0	-20.8	2.15 H	196	29.6	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	2.85 V	239	26.8	32.9
2	2390.00	47.3 AV	54.0	-6.7	2.85 V	239	14.4	32.9
3	*2402.00	81.3 PK			2.94 V	249	48.4	32.9
4	*2402.00	73.0 AV			2.94 V	249	40.1	32.9
5	4804.00	46.4 PK	74.0	-27.6	2.69 V	254	42.8	3.6
6	4804.00	32.9 AV	54.0	-21.1	2.69 V	254	29.3	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	77.6 PK			3.56 H	48	44.7	32.9
2	*2441.00	72.4 AV			3.56 H	48	39.5	32.9
3	4882.00	47.1 PK	74.0	-26.9	2.69 H	251	43.2	3.9
4	4882.00	34.4 AV	54.0	-19.6	2.69 H	251	30.5	3.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	83.0 PK			3.21 V	250	50.1	32.9
2	*2441.00	78.5 AV			3.21 V	250	45.6	32.9
3	4882.00	46.7 PK	74.0	-27.3	1.96 V	231	42.8	3.9
4	4882.00	33.5 AV	54.0	-20.5	1.96 V	231	29.6	3.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	79.0 PK			3.77 H	39	46.0	33.0
2	*2480.00	74.2 AV			3.77 H	39	41.2	33.0
3	2483.50	61.0 PK	74.0	-13.0	3.59 H	43	28.0	33.0
4	2483.50	47.6 AV	54.0	-6.4	3.59 H	43	14.6	33.0
5	4960.00	48.1 PK	74.0	-25.9	2.46 H	183	43.6	4.5
6	4960.00	34.5 AV	54.0	-19.5	2.46 H	183	30.0	4.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	83.6 PK			3.19 V	255	50.6	33.0
2	*2480.00	79.0 AV			3.19 V	255	46.0	33.0
3	2483.50	60.9 PK	74.0	-13.1	3.05 V	243	27.9	33.0
4	2483.50	48.2 AV	54.0	-5.8	3.05 V	243	15.2	33.0
5	4960.00	47.9 PK	74.0	-26.1	2.51 V	194	43.4	4.5
6	4960.00	34.3 AV	54.0	-19.7	2.51 V	194	29.8	4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

Test Mode C1

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	2.55 H	68	26.3	32.9
2	2390.00	47.3 AV	54.0	-6.7	2.55 H	68	14.4	32.9
3	*2402.00	91.5 PK			2.39 H	46	58.6	32.9
4	*2402.00	90.5 AV			2.39 H	46	57.6	32.9
5	4804.00	46.2 PK	74.0	-27.8	2.56 H	35	42.6	3.6
6	4804.00	35.3 AV	54.0	-18.7	2.56 H	35	31.7	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	1.55 V	23	26.5	32.9
2	2390.00	47.5 AV	54.0	-6.5	1.55 V	23	14.6	32.9
3	*2402.00	98.8 PK			1.62 V	8	65.9	32.9
4	*2402.00	97.8 AV			1.62 V	8	64.9	32.9
5	4804.00	48.8 PK	74.0	-25.2	1.80 V	16	45.2	3.6
6	4804.00	38.1 AV	54.0	-15.9	1.80 V	16	34.5	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	91.4 PK			2.36 H	43	58.5	32.9
2	*2441.00	90.4 AV			2.36 H	43	57.5	32.9
3	4882.00	46.4 PK	74.0	-27.6	1.95 H	43	42.5	3.9
4	4882.00	34.9 AV	54.0	-19.1	1.95 H	43	31.0	3.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.1 PK			1.75 V	332	65.2	32.9
2	*2441.00	97.1 AV			1.75 V	332	64.2	32.9
3	4882.00	49.2 PK	74.0	-24.8	1.15 V	348	45.3	3.9
4	4882.00	39.1 AV	54.0	-14.9	1.15 V	348	35.2	3.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	88.8 PK			2.08 H	22	55.8	33.0
2	*2480.00	87.8 AV			2.08 H	22	54.8	33.0
3	2483.50	59.8 PK	74.0	-14.2	2.44 H	38	26.8	33.0
4	2483.50	47.3 AV	54.0	-6.7	2.44 H	38	14.3	33.0
5	4960.00	48.4 PK	74.0	-25.6	2.54 H	38	43.9	4.5
6	4960.00	34.9 AV	54.0	-19.1	2.54 H	38	30.4	4.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.2 PK			1.51 V	333	62.2	33.0
2	*2480.00	94.2 AV			1.51 V	333	61.2	33.0
3	2483.50	59.9 PK	74.0	-14.1	1.75 V	347	26.9	33.0
4	2483.50	48.0 AV	54.0	-6.0	1.75 V	347	15.0	33.0
5	4960.00	50.3 PK	74.0	-23.7	1.25 V	347	45.8	4.5
6	4960.00	38.0 AV	54.0	-16.0	1.25 V	347	33.5	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.99 H	25	36.8	32.9
2	2390.00	47.1 AV	54.0	-6.9	1.99 H	25	14.2	32.9
3	*2402.00	92.9 PK			2.23 H	34	60.0	32.9
4	*2402.00	89.4 AV			2.23 H	34	56.5	32.9
5	4804.00	46.2 PK	74.0	-27.8	2.43 H	22	42.6	3.6
6	4804.00	34.4 AV	54.0	-19.6	2.43 H	22	30.8	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	2.24 V	352	27.2	32.9
2	2390.00	47.4 AV	54.0	-6.6	2.24 V	352	14.5	32.9
3	*2402.00	99.5 PK			2.17 V	356	66.6	32.9
4	*2402.00	94.9 AV			2.17 V	356	62.0	32.9
5	4804.00	47.6 PK	74.0	-26.4	1.46 V	15	44.0	3.6
6	4804.00	35.6 AV	54.0	-18.4	1.46 V	15	32.0	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.4 PK			2.05 H	46	59.5	32.9
2	*2441.00	89.2 AV			2.05 H	46	56.3	32.9
3	4882.00	48.7 PK	74.0	-25.3	2.26 H	43	44.8	3.9
4	4882.00	34.5 AV	54.0	-19.5	2.26 H	43	30.6	3.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.6 PK			1.75 V	332	65.7	32.9
2	*2441.00	94.0 AV			1.75 V	332	61.1	32.9
3	4882.00	49.7 PK	74.0	-24.3	1.13 V	347	45.8	3.9
4	4882.00	37.0 AV	54.0	-17.0	1.13 V	347	33.1	3.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	89.6 PK			2.12 H	42	56.6	33.0
2	*2480.00	85.0 AV			2.12 H	42	52.0	33.0
3	2483.50	60.6 PK	74.0	-13.4	1.99 H	55	27.6	33.0
4	2483.50	47.6 AV	54.0	-6.4	1.99 H	55	14.6	33.0
5	4960.00	48.5 PK	74.0	-25.5	2.12 H	31	44.0	4.5
6	4960.00	34.7 AV	54.0	-19.3	2.12 H	31	30.2	4.5

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.0 PK			1.22 V	334	63.0	33.0
2	*2480.00	91.4 AV			1.22 V	334	58.4	33.0
3	2483.50	60.0 PK	74.0	-14.0	1.46 V	352	27.0	33.0
4	2483.50	47.7 AV	54.0	-6.3	1.46 V	352	14.7	33.0
5	4960.00	48.8 PK	74.0	-25.2	2.10 V	293	44.3	4.5
6	4960.00	36.7 AV	54.0	-17.3	2.10 V	293	32.2	4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

Below 1GHz worst-case data:


8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A1		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	294.32	40.0 QP	46.0	-6.0	1.00 H	350	47.6	-7.6
2	358.48	44.4 QP	46.0	-1.6	2.00 H	12	50.8	-6.4
3	436.26	41.4 QP	46.0	-4.6	2.00 H	12	45.9	-4.5
4	459.59	39.4 QP	46.0	-6.6	1.49 H	14	43.7	-4.3
5	576.25	32.0 QP	46.0	-14.0	1.49 H	14	34.0	-2.0
6	875.67	35.9 QP	46.0	-10.1	1.49 H	14	32.7	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

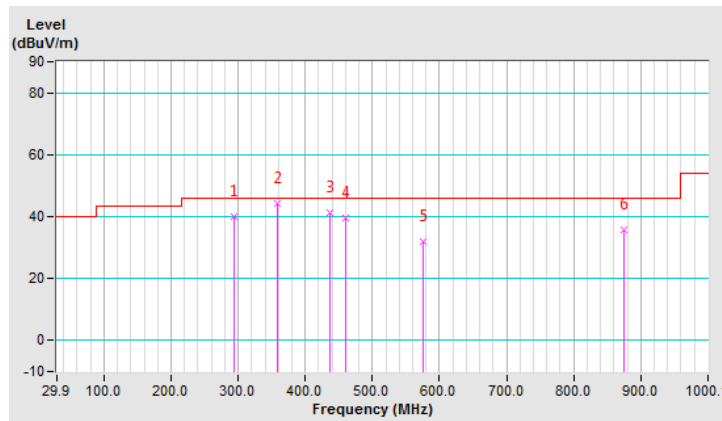


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A1		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	41.57	32.0 QP	40.0	-8.0	1.01 V	92	42.1	-10.1
2	294.32	33.7 QP	46.0	-12.3	2.00 V	15	41.3	-7.6
3	358.48	37.6 QP	46.0	-8.4	2.00 V	100	44.0	-6.4
4	438.20	36.3 QP	46.0	-9.7	1.01 V	6	40.8	-4.5
5	500.42	33.4 QP	46.0	-12.6	1.01 V	31	37.0	-3.6
6	624.85	35.3 QP	46.0	-10.7	1.01 V	80	36.0	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

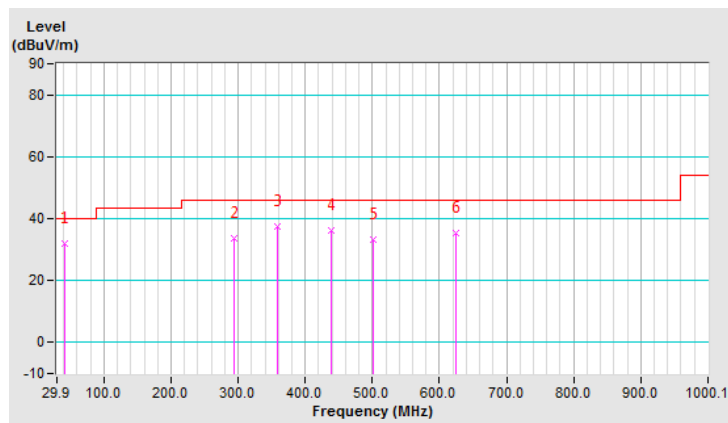


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A2		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	27.5 QP	40.0	-12.5	2.00 H	227	39.5	-12.0
2	294.32	37.5 QP	46.0	-8.5	1.01 H	80	45.1	-7.6
3	358.48	41.6 QP	46.0	-4.4	2.00 H	88	48.0	-6.4
4	500.42	38.1 QP	46.0	-7.9	1.50 H	322	41.7	-3.6
5	624.85	38.3 QP	46.0	-7.7	1.01 H	116	39.0	-0.7
6	961.21	38.0 QP	54.0	-16.0	1.01 H	16	32.9	5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

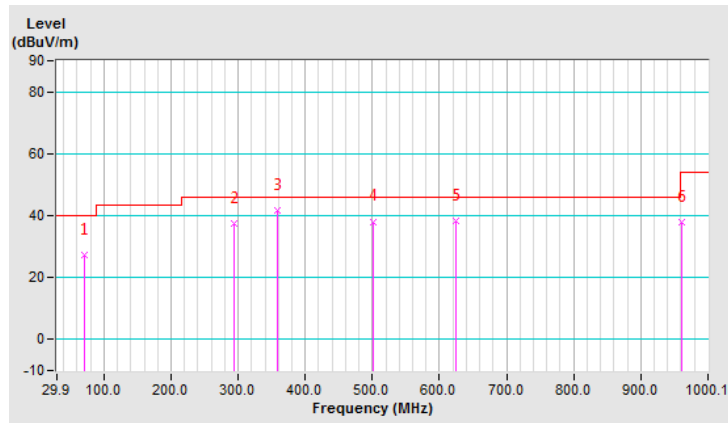


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A2		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	34.2 QP	40.0	-5.8	1.49 V	1	44.6	-10.4
2	296.27	39.1 QP	46.0	-6.9	1.49 V	15	46.7	-7.6
3	358.48	42.7 QP	46.0	-3.3	1.49 V	15	49.1	-6.4
4	360.43	41.6 QP	46.0	-4.4	1.49 V	353	48.0	-6.4
5	416.81	40.2 QP	46.0	-5.8	1.49 V	15	45.4	-5.2
6	451.81	42.9 QP	46.0	-3.1	1.00 V	11	47.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

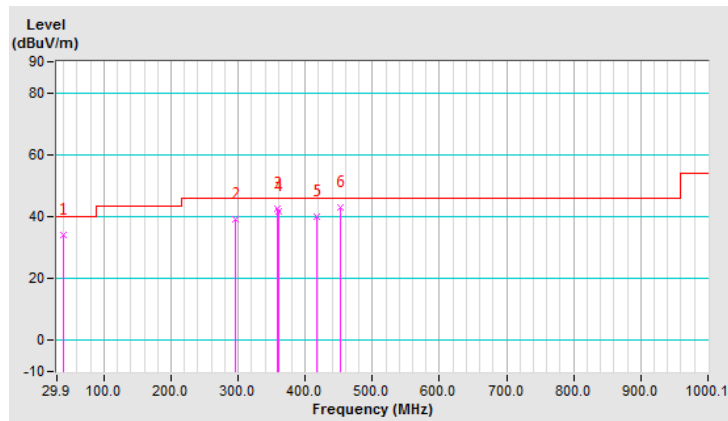


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B1		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.95	26.9 QP	40.0	-13.1	2.00 H	146	37.2	-10.3
2	99.89	31.0 QP	43.5	-12.5	2.00 H	90	44.6	-13.6
3	358.48	42.9 QP	46.0	-3.1	1.01 H	324	49.3	-6.4
4	412.92	38.3 QP	46.0	-7.7	1.01 H	287	43.6	-5.3
5	500.42	38.6 QP	46.0	-7.4	1.51 H	6	42.2	-3.6
6	624.85	41.0 QP	46.0	-5.0	1.01 H	195	41.7	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

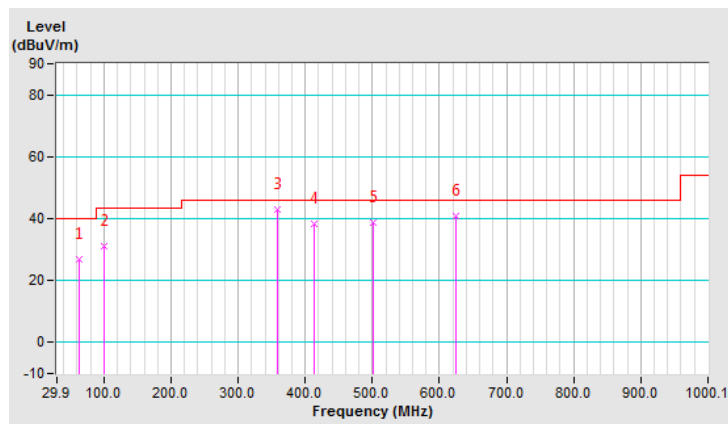


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B1		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	38.8 QP	40.0	-1.2	1.00 V	5	48.9	-10.1
2	290.43	33.9 QP	46.0	-12.1	1.99 V	75	41.6	-7.7
3	358.48	39.7 QP	46.0	-6.3	1.00 V	200	46.1	-6.4
4	420.70	40.2 QP	46.0	-5.8	1.00 V	186	45.1	-4.9
5	436.26	40.5 QP	46.0	-5.5	1.00 V	251	45.0	-4.5
6	624.85	41.3 QP	46.0	-4.7	1.00 V	5	42.0	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

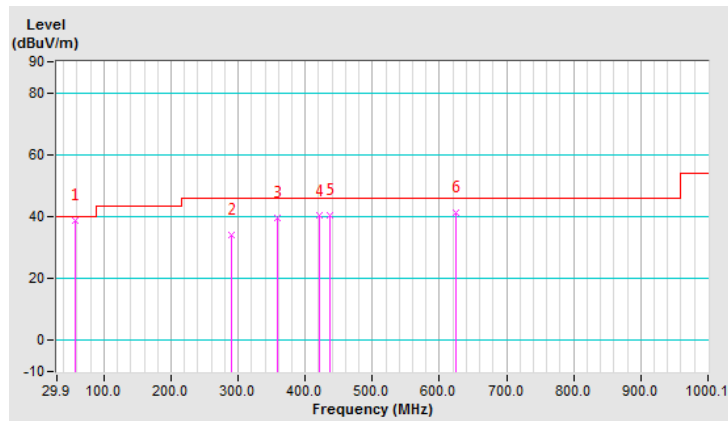




CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B2		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	27.1 QP	40.0	-12.9	2.00 H	236	37.2	-10.1
2	142.67	25.8 QP	43.5	-17.7	1.00 H	227	35.2	-9.4
3	296.27	39.0 QP	46.0	-7.0	1.51 H	326	46.6	-7.6
4	360.43	37.8 QP	46.0	-8.2	1.00 H	330	44.2	-6.4
5	434.31	33.4 QP	46.0	-12.6	1.00 H	134	37.9	-4.5
6	624.85	35.4 QP	46.0	-10.6	1.51 H	189	36.1	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

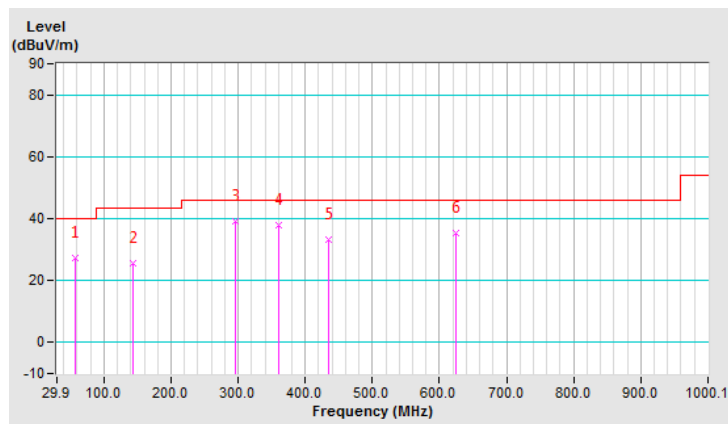


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B2		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	27.5 QP	40.0	-12.5	1.49 V	13	37.2	-9.7
2	296.27	37.4 QP	46.0	-8.6	1.49 V	250	45.0	-7.6
3	348.76	36.9 QP	46.0	-9.1	1.49 V	55	43.6	-6.7
4	424.59	36.1 QP	46.0	-9.9	1.49 V	258	40.9	-4.8
5	535.42	33.1 QP	46.0	-12.9	1.00 V	8	36.2	-3.1
6	624.85	37.0 QP	46.0	-9.0	1.49 V	88	37.7	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

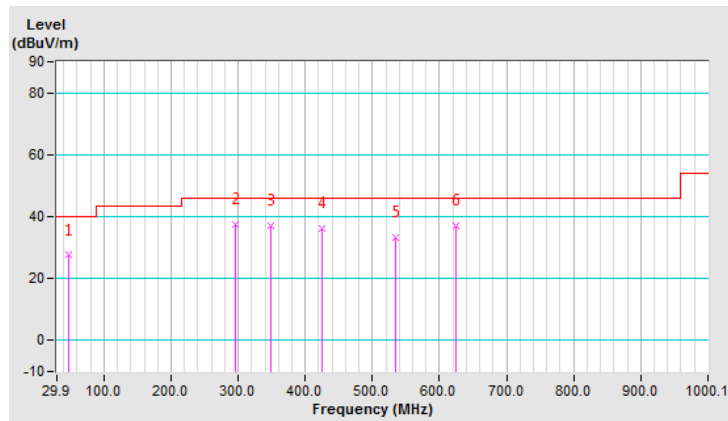


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	C1		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	374.04	38.4 QP	46.0	-7.6	1.01 H	222	44.3	-5.9
2	410.98	38.5 QP	46.0	-7.5	1.01 H	290	43.9	-5.4
3	500.42	38.8 QP	46.0	-7.2	1.01 H	358	42.4	-3.6
4	589.86	37.7 QP	46.0	-8.3	1.51 H	331	39.2	-1.5
5	624.85	38.7 QP	46.0	-7.3	1.51 H	267	39.4	-0.7
6	953.44	37.9 QP	46.0	-8.1	1.01 H	140	32.8	5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

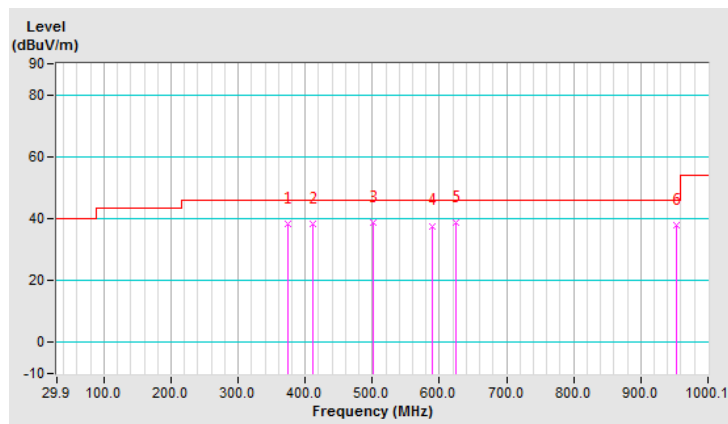


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	C1		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	35.3 QP	40.0	-4.7	1.00 V	167	46.4	-11.1
2	49.34	36.3 QP	40.0	-3.7	1.00 V	16	46.0	-9.7
3	59.06	37.6 QP	40.0	-2.4	1.00 V	15	47.7	-10.1
4	424.59	37.0 QP	46.0	-9.0	1.00 V	173	41.8	-4.8
5	500.42	38.9 QP	46.0	-7.1	1.49 V	16	42.5	-3.6
6	624.85	41.6 QP	46.0	-4.4	1.00 V	348	42.3	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

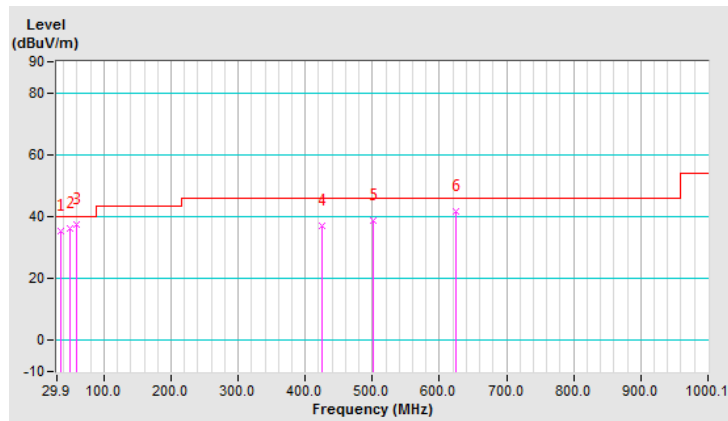


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	C2		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	24.0 QP	40.0	-16.0	1.51 H	6	36.0	-12.0
2	140.72	27.0 QP	43.5	-16.5	2.00 H	31	36.6	-9.6
3	296.27	32.2 QP	46.0	-13.8	1.00 H	292	39.8	-7.6
4	444.03	32.7 QP	46.0	-13.3	2.00 H	41	37.1	-4.4
5	593.74	36.9 QP	46.0	-9.1	1.51 H	319	38.3	-1.4
6	930.11	34.8 QP	46.0	-11.2	1.51 H	244	29.9	4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

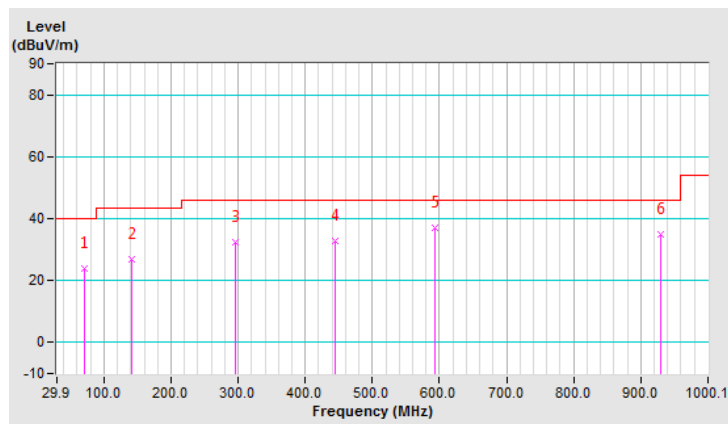


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	C2		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	29.0 QP	40.0	-11.0	1.50 V	13	39.7	-10.7
2	403.20	33.3 QP	46.0	-12.7	1.50 V	108	38.8	-5.5
3	434.31	35.1 QP	46.0	-10.9	1.00 V	159	39.6	-4.5
4	500.42	32.8 QP	46.0	-13.2	1.00 V	108	36.4	-3.6
5	582.08	35.4 QP	46.0	-10.6	1.00 V	29	37.1	-1.7
6	881.50	35.5 QP	46.0	-10.5	1.00 V	193	32.2	3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

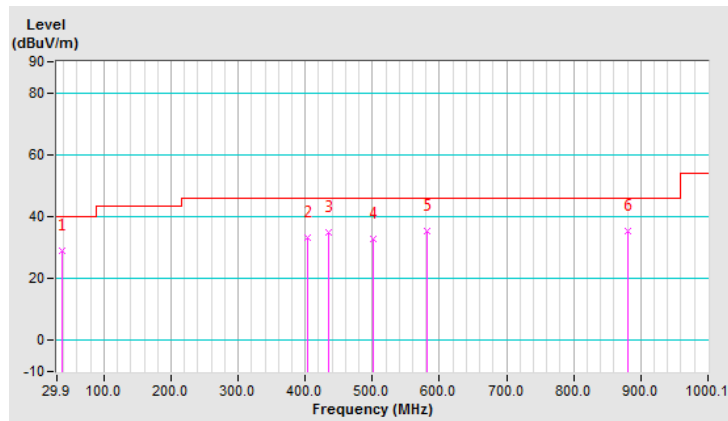

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-12040.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

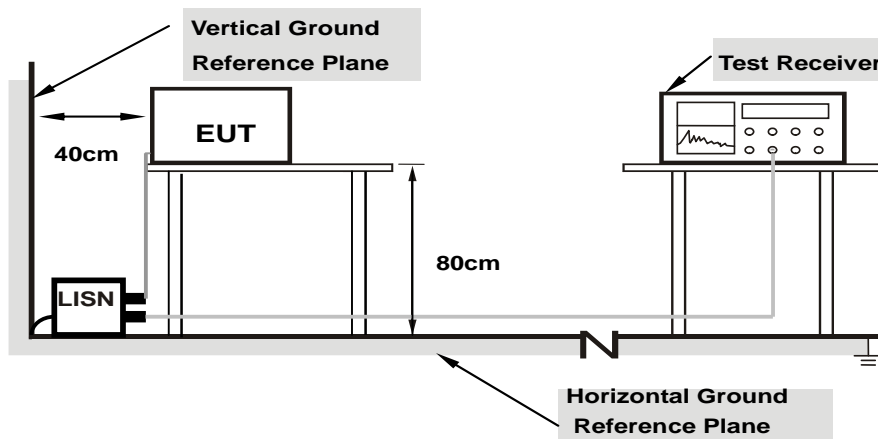

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.



#### 4.2.7 Test Results

Worst-case data:


8DPSK

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.48935	9.89	38.53	35.71	48.42	45.60	56.18
2	0.99847	9.92	38.72	35.08	48.64	45.00	56.00	46.00	-7.36	-1.00
3	1.49895	9.93	39.14	35.28	49.07	45.21	56.00	46.00	-6.93	-0.79
4	1.74919	9.94	37.45	35.21	47.39	45.15	56.00	46.00	-8.61	-0.85
5	2.24967	9.96	37.30	35.48	47.26	45.44	56.00	46.00	-8.74	-0.56
6	2.99648	9.98	36.19	35.49	46.17	45.47	56.00	46.00	-9.83	-0.53

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

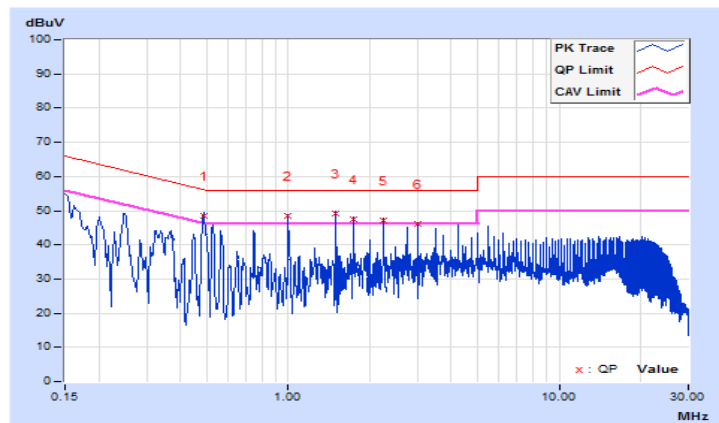


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.49017	9.87	38.29	35.54	48.16	45.41	56.16
2	0.99847	9.88	39.21	34.57	49.09	44.45	56.00	46.00	-6.91	-1.55
3	1.49954	9.90	40.17	35.16	50.07	45.06	56.00	46.00	-5.93	-0.94
4	1.74919	9.92	38.90	34.98	48.82	44.90	56.00	46.00	-7.18	-1.10
5	2.24576	9.94	36.80	35.30	46.74	45.24	56.00	46.00	-9.26	-0.76
6	2.99648	9.96	37.63	35.22	47.59	45.18	56.00	46.00	-8.41	-0.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

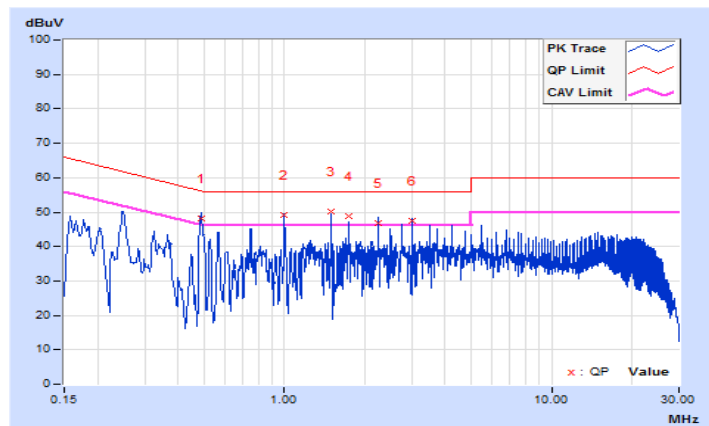


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.84	45.61	37.73	55.45	47.57	65.37
2	0.22038	9.85	35.49	25.01	45.34	34.86	62.80	52.80	-17.46	-17.94
3	0.35332	9.87	36.54	31.15	46.41	41.02	58.88	48.88	-12.47	-7.86
4	0.48295	9.89	39.72	35.79	49.61	45.68	56.29	46.29	-6.68	-0.61
5	0.52927	9.89	36.34	35.42	46.23	45.31	56.00	46.00	-9.77	-0.69
6	0.57468	9.89	32.70	30.28	42.59	40.17	56.00	46.00	-13.41	-5.83

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

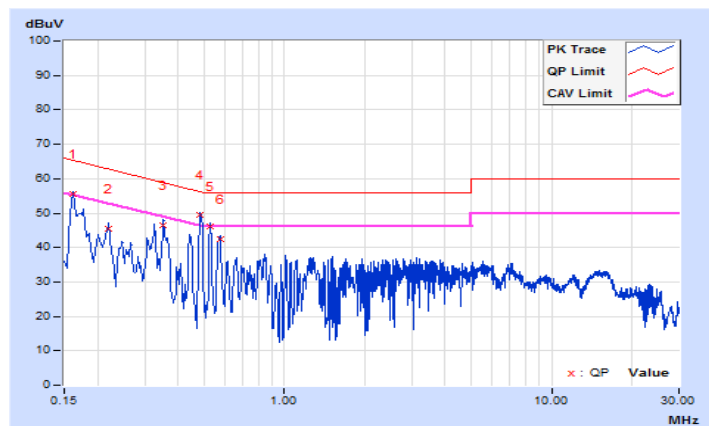


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16955	9.83	36.08	27.73	45.91	37.56	64.98
2	0.20084	9.84	35.63	27.34	45.47	37.18	63.58	53.58	-18.11	-16.40
3	0.35332	9.86	34.37	27.75	44.23	37.61	58.88	48.88	-14.65	-11.27
4	0.48626	9.87	39.15	35.79	49.02	45.66	56.23	46.23	-7.21	-0.57
5	0.57016	9.87	33.53	32.65	43.40	42.52	56.00	46.00	-12.60	-3.48
6	1.01799	9.88	30.65	27.97	40.53	37.85	56.00	46.00	-15.47	-8.15

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

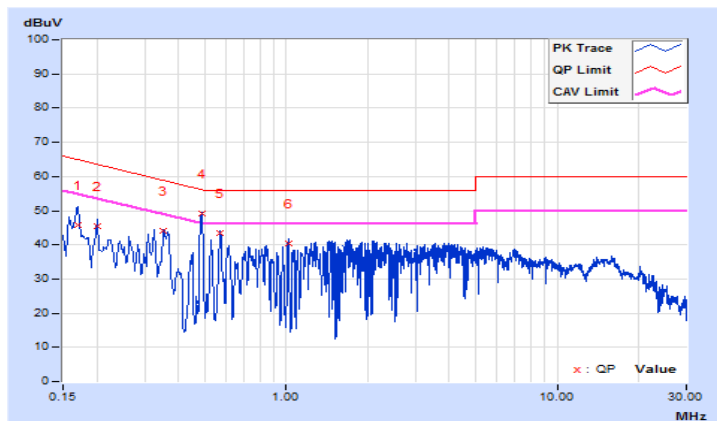


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.48626	9.89	39.23	35.73	49.12	45.62	56.23
2	0.99847	9.92	38.88	34.24	48.80	44.16	56.00	46.00	-7.20	-1.84
3	1.49895	9.93	39.26	35.48	49.19	45.41	56.00	46.00	-6.81	-0.59
4	1.74919	9.94	37.67	34.85	47.61	44.79	56.00	46.00	-8.39	-1.21
5	2.24967	9.96	37.66	35.46	47.62	45.42	56.00	46.00	-8.38	-0.58
6	3.49696	10.00	35.63	35.04	45.63	45.04	56.00	46.00	-10.37	-0.96

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

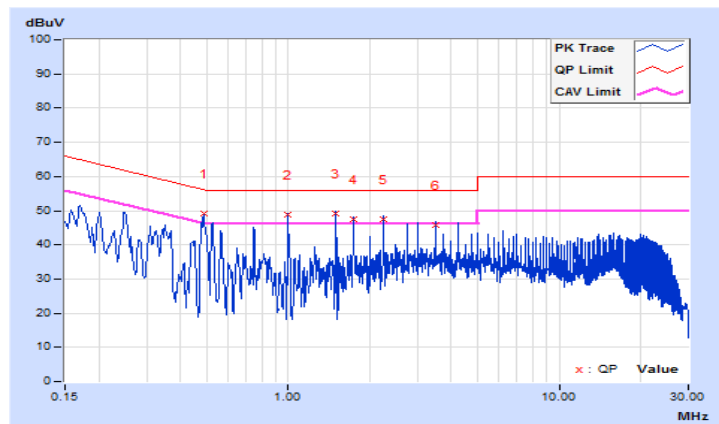


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.48626	9.87	38.62	34.36	48.49	44.23	56.23
2	0.99939	9.88	39.10	35.46	48.98	45.34	56.00	46.00	-7.02	-0.66
3	1.49895	9.90	40.36	35.12	50.26	45.02	56.00	46.00	-5.74	-0.98
4	1.74919	9.92	38.46	34.83	48.38	44.75	56.00	46.00	-7.62	-1.25
5	2.24967	9.94	37.79	34.21	47.73	44.15	56.00	46.00	-8.27	-1.85
6	3.00039	9.97	36.26	34.57	46.23	44.54	56.00	46.00	-9.77	-1.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

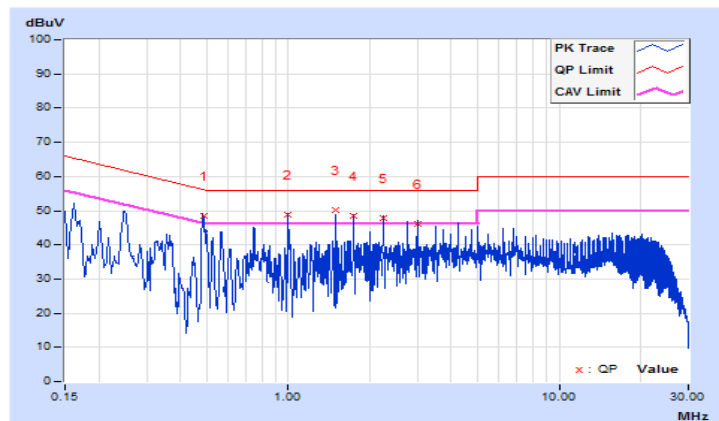


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16526	9.84	43.38	34.82	53.22	44.66	65.20
2	0.35296	9.87	35.39	26.00	45.26	35.87	58.89	48.89	-13.63	-13.02
3	0.48678	9.89	39.47	35.78	49.36	45.67	56.22	46.22	-6.86	-0.55
4	0.52682	9.89	36.42	35.42	46.31	45.31	56.00	46.00	-9.69	-0.69
5	0.57317	9.89	32.02	27.00	41.91	36.89	56.00	46.00	-14.09	-9.11
6	3.04340	9.99	25.39	16.08	35.38	26.07	56.00	46.00	-20.62	-19.93

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

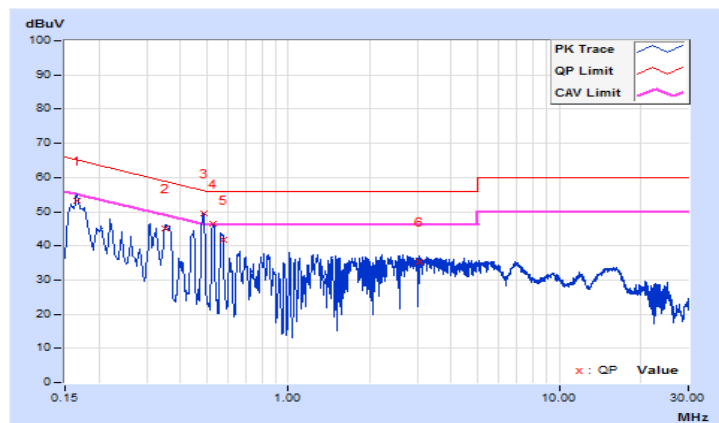


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16967	9.83	35.38	27.59	45.21	37.42	64.98
2	0.20084	9.84	36.10	28.05	45.94	37.89	63.58	53.58	-17.64	-15.69
3	0.36505	9.86	33.51	28.88	43.37	38.74	58.61	48.61	-15.24	-9.87
4	0.48626	9.87	39.02	35.51	48.89	45.38	56.23	46.23	-7.34	-0.85
5	0.56866	9.87	33.64	32.62	43.51	42.49	56.00	46.00	-12.49	-3.51
6	1.67502	9.91	29.71	19.38	39.62	29.29	56.00	46.00	-16.38	-16.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

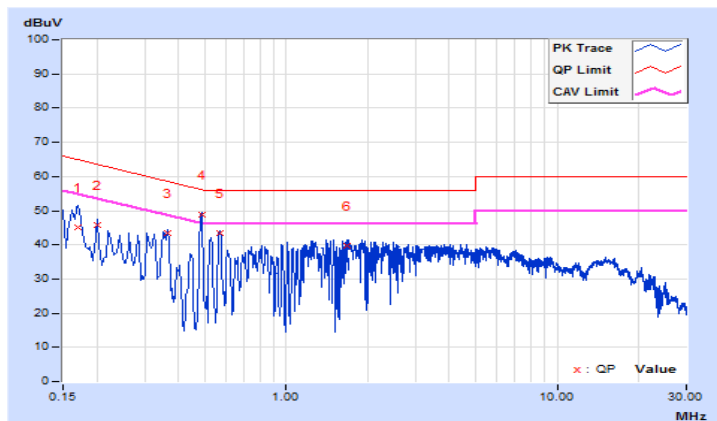




Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16569	9.84	44.11	34.56	53.95	44.40	65.17
2	0.48935	9.89	38.67	35.26	48.56	45.15	56.18	46.18	-7.62	-1.03
3	1.00238	9.92	38.10	34.35	48.02	44.27	56.00	46.00	-7.98	-1.73
4	1.50286	9.94	37.98	35.13	47.92	45.07	56.00	46.00	-8.08	-0.93
5	1.75638	9.94	37.47	35.52	47.41	45.46	56.00	46.00	-8.59	-0.54
6	2.25749	9.96	38.06	34.87	48.02	44.83	56.00	46.00	-7.98	-1.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

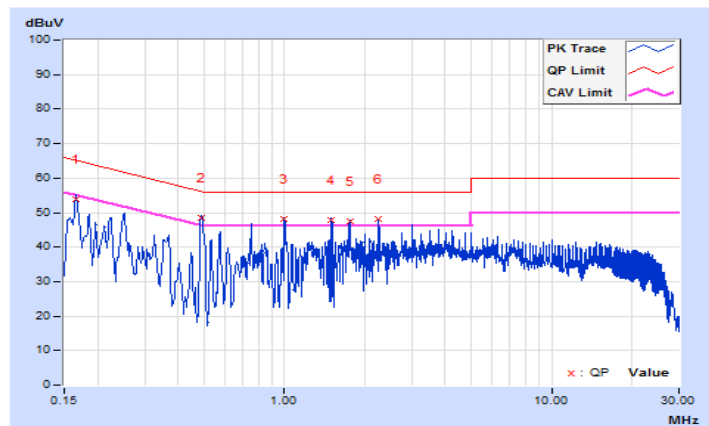


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.82	40.47	32.47	50.29	42.29	65.58
2	0.48678	9.87	39.51	35.69	49.38	45.56	56.22	46.22	-6.84	-0.66
<b>3</b>	<b>1.00467</b>	<b>9.88</b>	<b>38.42</b>	<b>35.62</b>	<b>48.30</b>	<b>45.50</b>	<b>56.00</b>	<b>46.00</b>	<b>-7.70</b>	<b>-0.50</b>
4	1.50677	9.91	38.35	35.37	48.26	45.28	56.00	46.00	-7.74	-0.72
5	1.75701	9.92	37.10	35.25	47.02	45.17	56.00	46.00	-8.98	-0.83
6	2.26140	9.94	36.07	35.15	46.01	45.09	56.00	46.00	-9.99	-0.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

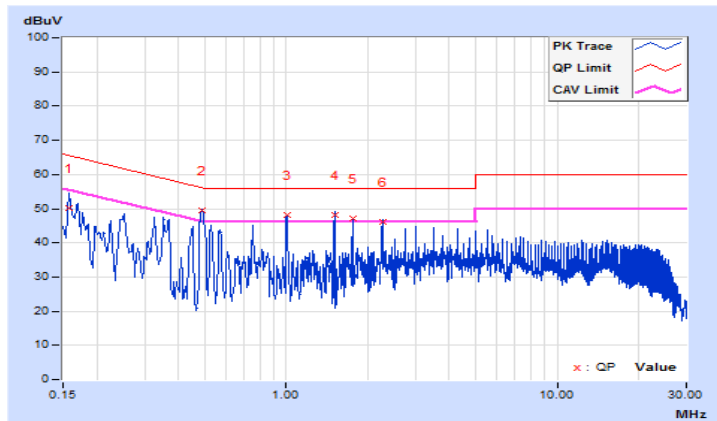


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16173	9.84	44.83	33.43	54.67	43.27	65.37
2	0.17744	9.85	44.09	35.19	53.94	45.04	64.60	54.60	-10.66	-9.56
3	0.35723	9.87	34.79	29.36	44.66	39.23	58.79	48.79	-14.13	-9.56
4	0.48626	9.89	39.53	35.76	49.42	45.65	56.23	46.23	-6.81	-0.58
5	0.52960	9.89	36.35	35.52	46.24	45.41	56.00	46.00	-9.76	-0.59
6	0.56866	9.89	32.86	29.44	42.75	39.33	56.00	46.00	-13.25	-6.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

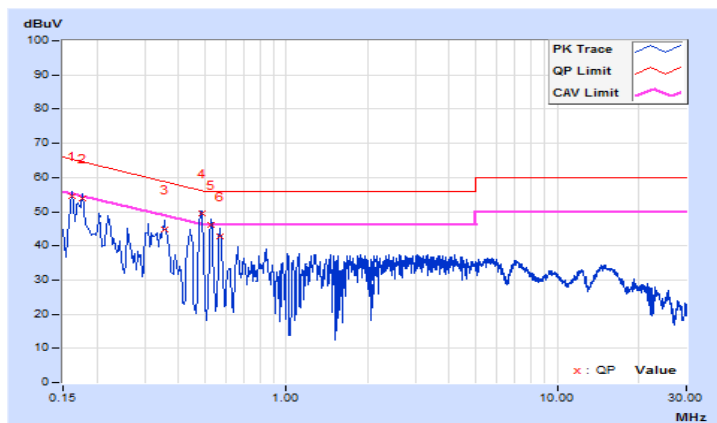


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17346	9.83	38.94	31.84	48.77	41.67	64.79
2	0.35576	9.86	33.80	29.16	43.66	39.02	58.83	48.83	-15.17	-9.81
3	0.48678	9.87	38.67	35.64	48.54	45.51	56.22	46.22	-7.68	-0.71
4	0.57016	9.87	33.37	32.02	43.24	41.89	56.00	46.00	-12.76	-4.11
5	1.67502	9.91	30.73	24.61	40.64	34.52	56.00	46.00	-15.36	-11.48
6	7.05115	10.08	25.69	14.37	35.77	24.45	60.00	50.00	-24.23	-25.55

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value.
4. Correction factor = Insertion loss + Cable loss.
5. Emission Level = Correction Factor + Reading Value.

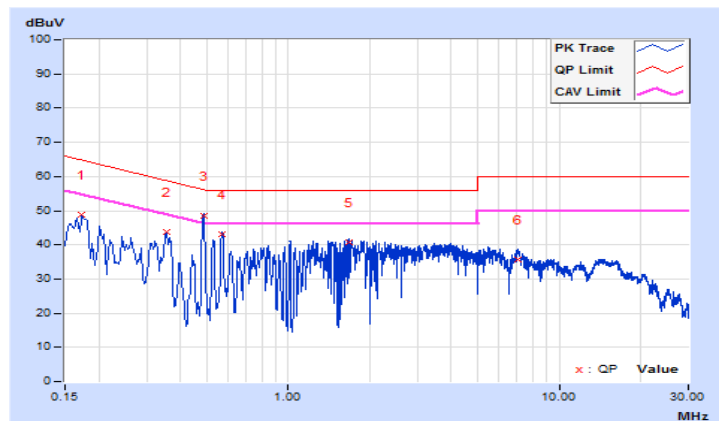


### 4.3 Number of Hopping Frequency Used

#### 4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure


- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.5 Deviation from Test Standard

No deviation.

### 4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to the test result. On the plots, it shows that the hopping frequencies are equally spaced.

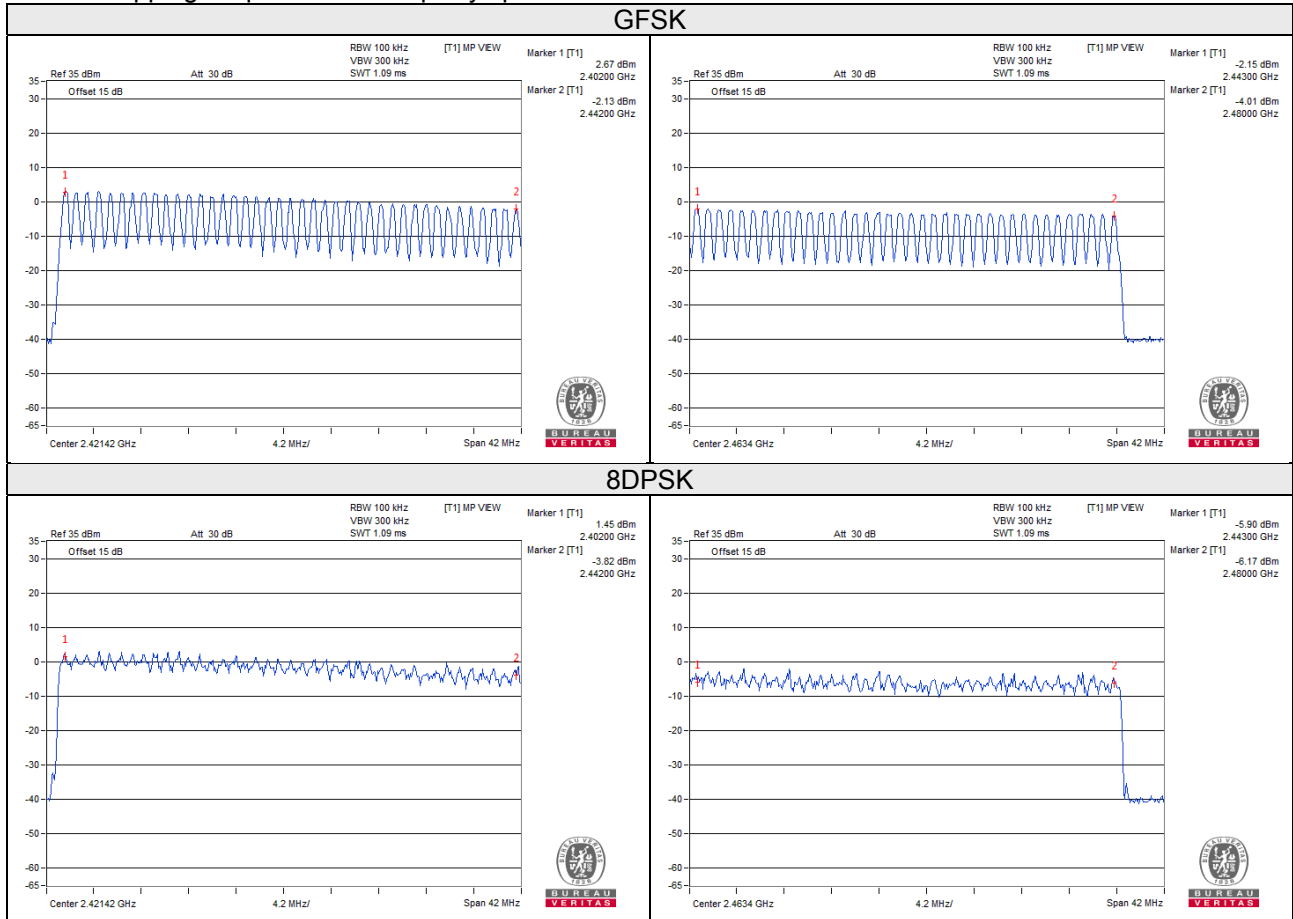


#### 4.4 Dwell Time on Each Channel

##### 4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### 4.4.2 Test Setup



##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

##### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 Test Results

#### GFSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.430	135.88	400
DH3	25 (times / 5 sec) * 6.32 = 158.00 times	1.700	268.60	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.960	318.02	400

Note: Test plots of the transmitting time slot are shown as below.





### 8DPSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.440	139.04	400
3DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.680	276.06	400
3DH5	16 (times / 5 sec) * 6.32 = 101.12 times	2.950	298.30	400

Note: Test plots of the transmitting time slot are shown as below.



## 4.5 Channel Bandwidth

### 4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.5.5 Deviation from Test Standard


No deviation.

### 4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	1.05	1.31
39	2441	1.05	1.32
78	2480	1.05	1.32

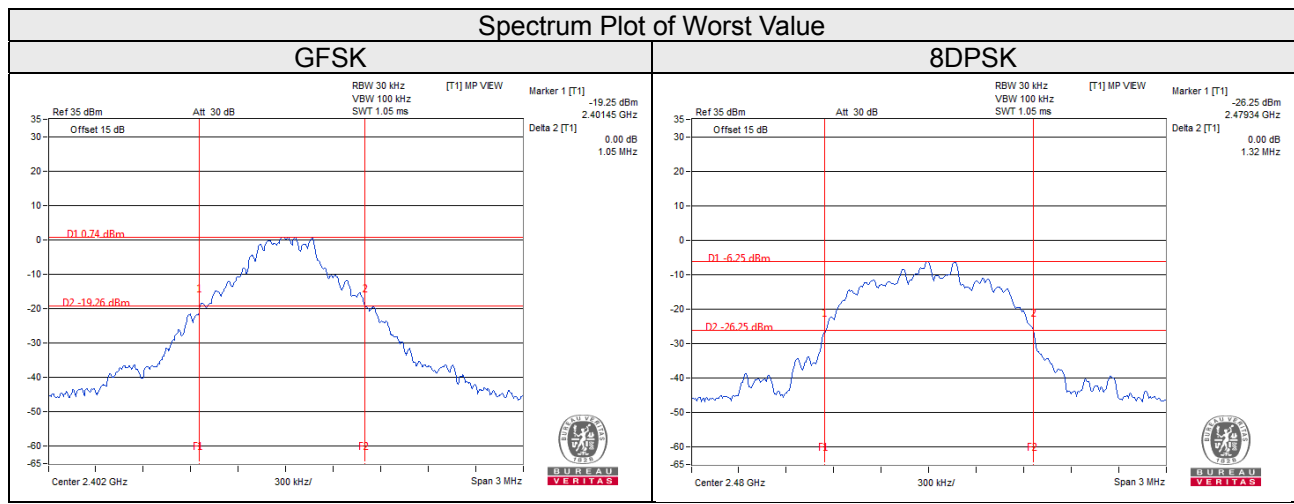


## 4.6 Hopping Channel Separation

### 4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	1.05	1.31	0.70	0.88	Pass
39	2441	1.00	1.00	1.05	1.32	0.70	0.88	Pass
78	2480	1.00	1.00	1.05	1.32	0.70	0.88	Pass

Note: The minimum limit is two-third 20dB bandwidth.

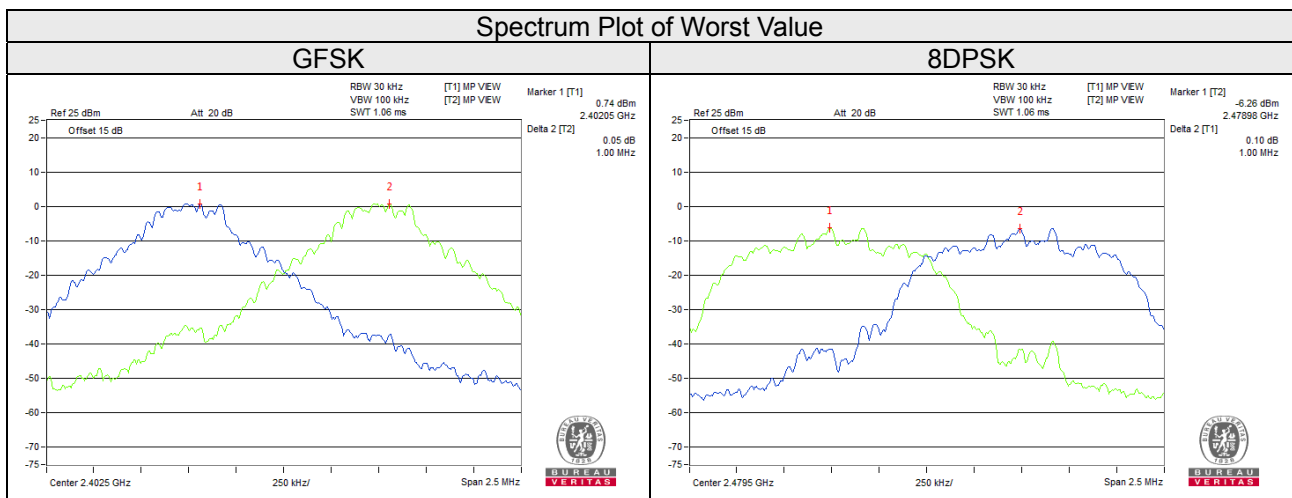


#### 4.7 Maximum Output Power

##### 4.7.1 Limits of Maximum Output Power Measurement

Refer to Regulation 15.247 (a) (1), the Maximum Output Power Measurement is 125mW.

##### 4.7.2 Test Setup



##### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.7.4 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### 4.7.5 Deviation from Test Standard

No deviation.

##### 4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

##### 4.7.7 Test Results

Channel	Frequency (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	2.350	<b>3.908</b>	3.71	5.92	125.00	Pass
39	2441	0.778	1.297	-1.09	1.13	125.00	Pass
78	2480	0.411	0.644	-3.86	-1.91	125.00	Pass

## **4.8 Conducted Out of Band Emission Measurement**

### **4.8.1 Limits Of Conducted Out Of Band Emission Measurement**

Below  $-20\text{dB}$  of the highest emission level of operating band (in  $100\text{kHz}$  RBW).

### **4.8.2 Test Instruments**

Refer to section 4.1.2 to get information of above instrument.

### **4.8.3 Test Procedure**

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to  $100\text{ kHz}$  and  $300\text{ kHz}$  with suitable frequency span including  $100\text{ MHz}$  bandwidth from band edge. The band edges was measured and recorded.

### **4.8.4 Deviation from Test Standard**

No deviation.

### **4.8.5 EUT Operating Condition**


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### **4.8.6 Test Results**


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the  $20\text{dB}$  offset below D1. It shows compliance with the requirement.

GFSK


Hopping disabled Low Channel

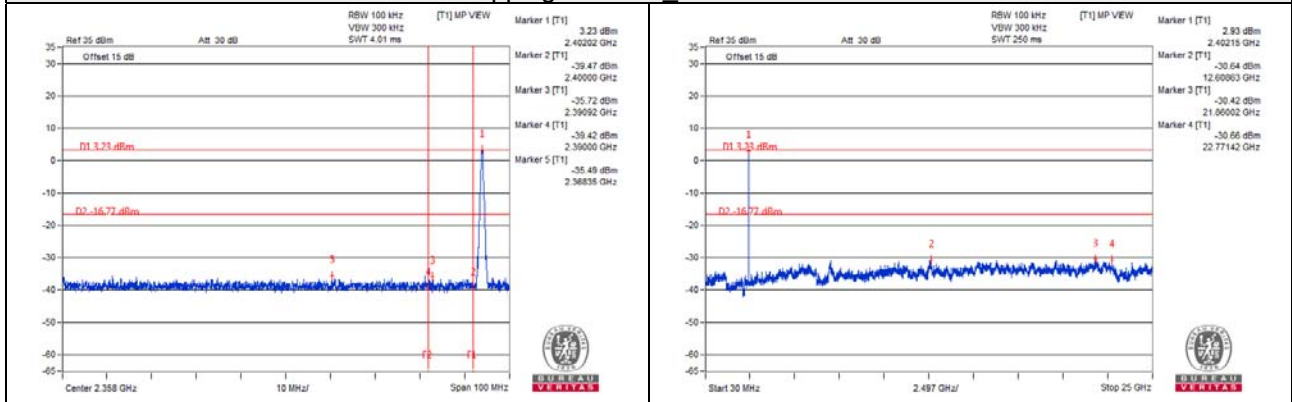


Hopping disabled High Channel

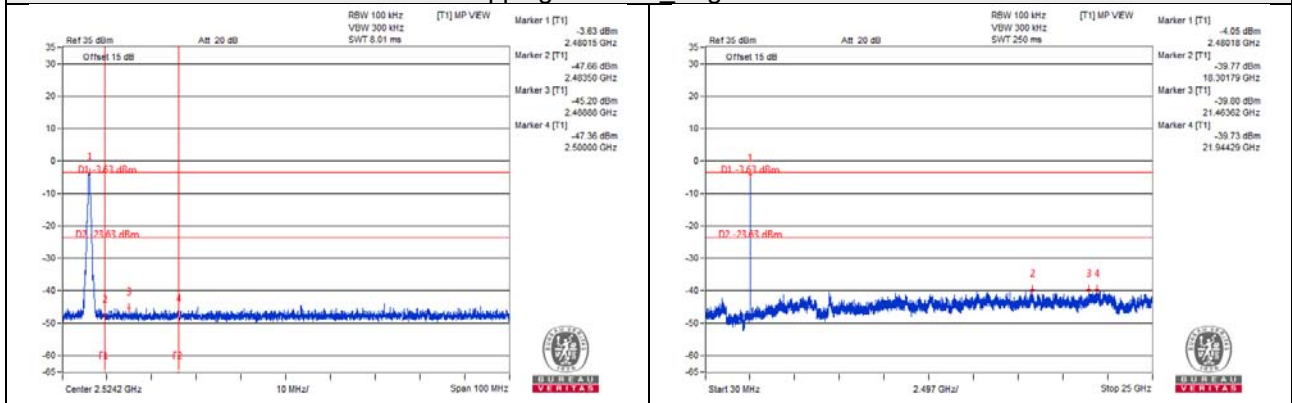

Hopping enabled Low Channel

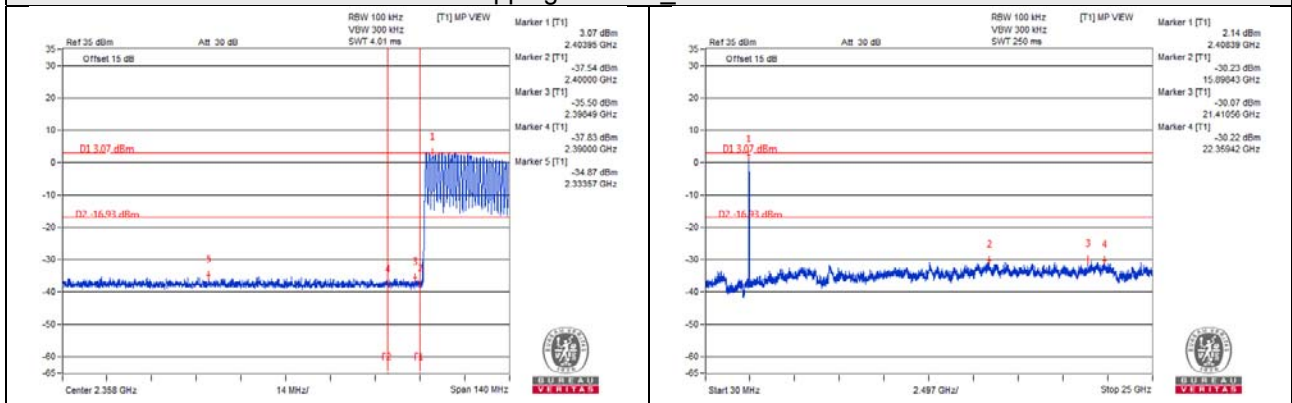



Hopping enabled High Channel

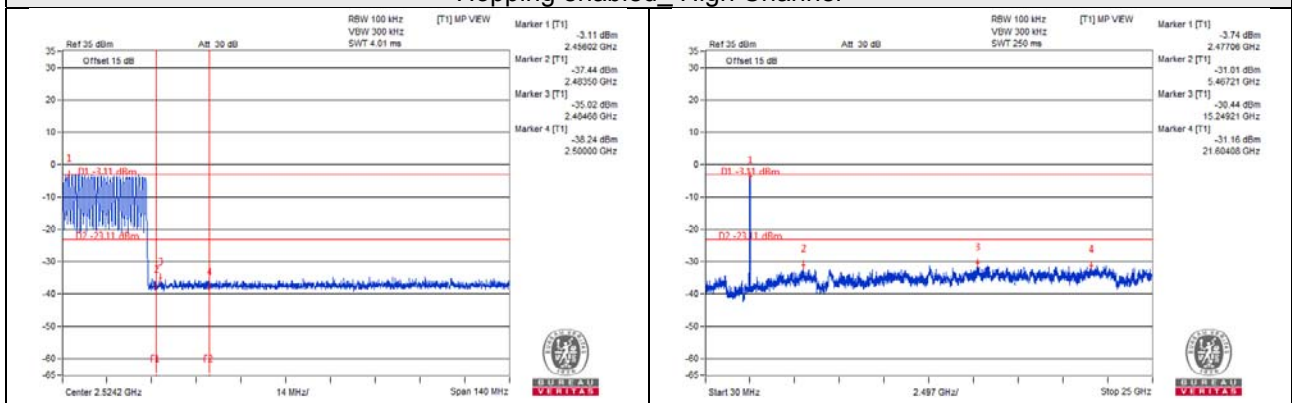





8DPSK



Hopping disabled Low Channel

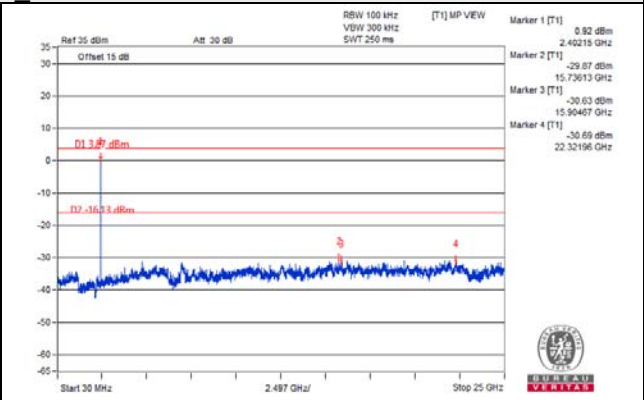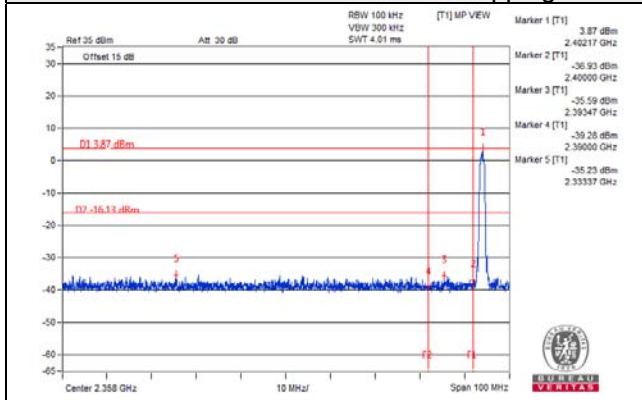



Hopping disabled High Channel

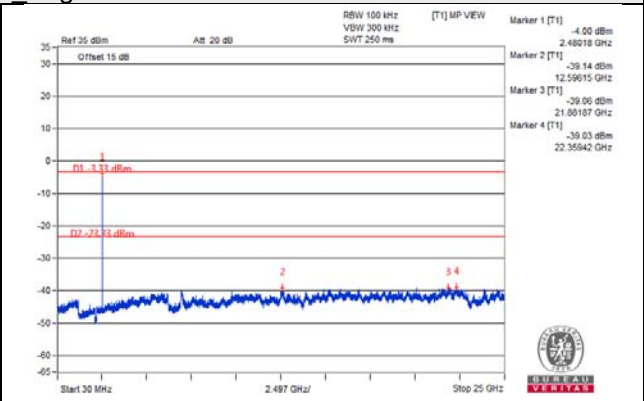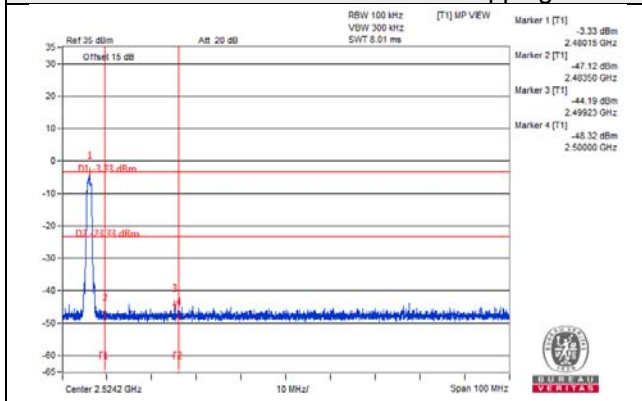

Hopping enabled Low Channel

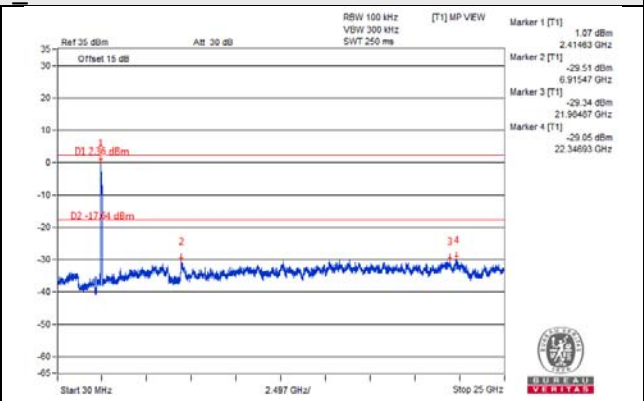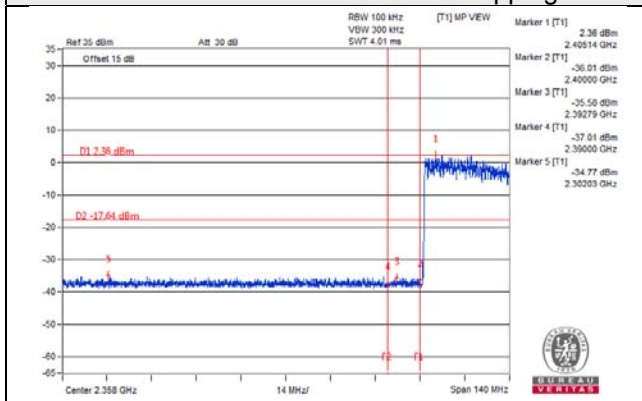

Hopping enabled High Channel

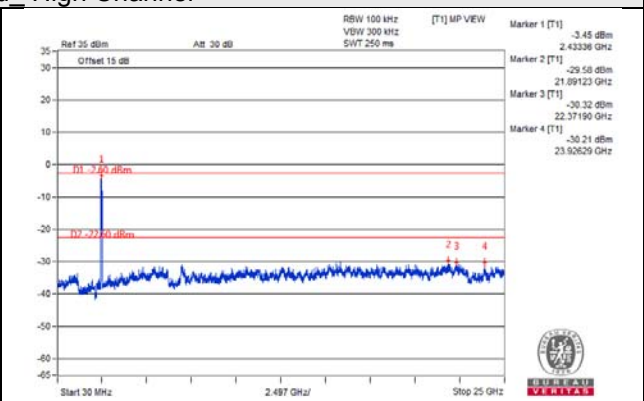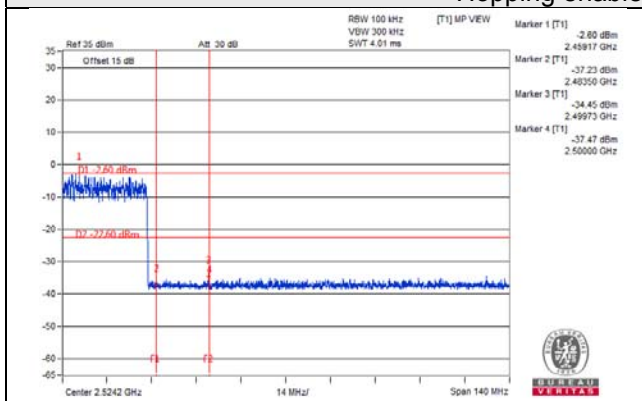

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---