

TEST REPORT
CBSD-SAS Interoperability**Applicant Name:**Skylark Wireless, LLC
4011 Garrott St.
Houston, TX 77006
USA**Date of Testing:**

11/29/2023 - 9/3/2024

Test Report Issue Date:

01/28/2025

Test Site/Location:

Element lab. Columbia, MD, USA

Test Report Serial No.:

1M2401230005-03.2AS22

FCC ID: 2AS22-FLCOCH2**APPLICANT:** Skylark Wireless, LLC**Application Type:**

Certification

Model:

FLCOCH2

EUT Type:

CBRS CPE

Frequency Range:

3550 – 3700 MHz

FCC Classification:

Citizens Broadband Customer Premise Equipment CBSDs (CBC)

FCC Rule Part(s):

Part 96

Test Procedure(s):KDB 940660 D01 v02, KDB 940660 D02 v01 WINNF-TS-0122-V1.0.2,
CBRSA-TS-9001 V.1.0.0, WINNF-19-IN-00033

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in the test procedures listed above. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**RJ Ortiz**
Executive Vice President

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 1 of 63

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Modifications.....	4
3.0	TEST EQUIPMENT CALIBRATION DATA.....	5
4.0	ENVIRONMENTAL CONDITIONS	6
5.0	EVALUATION PROCEDURE	7
6.0	TEST Summary.....	8
6.1	Summary	8
7.0	CONCLUSION	10
	APPENDIX A – TEST RESULT AND DATA	11
A1	[WINNF.FT.C.REG.1] MULTI-STEP REGISTRATION.....	11
A3	[WINNF.FT.C.REG.5] SINGLE-STEP REGISTRATION FOR CBSD WITH CPI SIGNED DATA	13
A4	[WINNF.FT.C.REG.8] MISSING REQUIRED PARAMETERS (RESPONSECODE 102)	15
A5	[WINNF.FT.C.REG.10] PENDING REGISTRATION (RESPONSECODE 200).....	16
A6	[WINNF.FT.C.REG.12] INVALID PARAMETER (RESPONSECODE 103)	17
A7	[WINNF.FT.C.REG.14] BLACKLISTED CBSD (RESPONSECODE 101)	18
A8	[WINNF.FT.C.REG.16] UNSUPPORTED SAS PROTOCOL VERSION (RESPONSECODE 100)	19
A9	[WINNF.FT.C.REG.18] GROUP ERROR (RESPONSECODE 201)	20
A10	[WINNF.FT.C.GRA.1] UNSUCCESSFUL GRANT RESPONSECODE=400 (INTERFERENCE)	21
A11	[WINNF.FT.C.GRA.2] UNSUCCESSFUL GRANT RESPONSECODE=401 (GRANT_CONFLICT).....	22
A12	[WINNF.FT.C.HBT.1] HEARTBEAT SUCCESS CASE (FIRST HEARTBEAT RESPONSE).....	23
A13	[WINNF.FT.C.HBT.3] HEARTBEAT RESPONSECODE=105 (DEREGISTER).....	25
A14	[WINNF.FT.C.HBT.4] HEARTBEAT RESPONSECODE=500 (TERMINATED_GRANT)	27
A15	[WINNF.FT.C.HBT.5] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN FIRST HEARTBEAT RESPONSE..	29
A16	[WINNF.FT.C.HBT.6] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN SUBSEQUENT HEARTBEAT RESPONSE.....	31
A17	[WINNF.FT.C.HBT.7] HEARTBEAT RESPONSECODE=502 (UNSYNC_OP_PARAM)	33
A18	[WINNF.FT.C.HBT.9] HEARTBEAT RESPONSE ABSENT (FIRST HEARTBEAT)	35
A19	[WINNF.FT.C.HBT.10] HEARTBEAT RESPONSE ABSENT (SUBSEQUENT HEARTBEAT)	37
A20	[WINNF.FT.C.RLQ.1] SUCCESSFUL RELINQUISHMENT	39
A21	[WINNF.FT.C.MES.1] REGISTRATION RESPONSE CONTAINS MEASREPORTCONFIG	41
A22	[WINNF.FT.C.DRG.1] SUCCESSFUL DEREGISTRATION.....	43
A23	[WINNF.FT.C.SCS.1] SUCCESSFUL TLS CONNECTION BETWEEN UUT AND SAS TEST HARNESS	45
A24	[WINNF.FT.C.SCS.2] TLS FAILURE DUE TO REVOKED CERTIFICATE	47
A25	[WINNF.FT.C.SCS.3] TLS FAILURE DUE TO EXPIRED SERVER CERTIFICATE	49
A26	[WINNF.FT.C.SCS.4] TLS FAILURE WHEN SAS TEST HARNESS CERTIFICATE IS ISSUED BY AN UNKNOWN CA.....	51
A27	[WINNF.FT.C.SCS.5] TLS FAILURE WHEN CERTIFICATE AT THE SAS TEST HARNESS IS CORRUPTED	53
A28	[WINNF.PT.C.HBT.1] UUT RF TRANSMIT POWER MEASUREMENT	54
A29	CPE-CBSD INITIAL SAS COMMUNICATIONS DUTY CYCLE (X OF Y)	59
	APPENDIX B – TEST LOGS	62
	APPENDIX C – TEST SETUP.....	63

FCC ID: 2AS22-FLCOCH2		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 2 of 63	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element is a CBRS Alliance (OnGo) Approved Test Lab
- Element is a WInnForum Approved Test Lab
- Element is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WInnForum Conformance and Performance Test Technical Standard.
- Element is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element facility is a registered (2451B) test laboratory with the site description on file with ISSED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: 2AS22-FLCOCH2		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 3 of 63	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Skylark Wireless, LLC. CBRS CPE FCC ID: 2AS22-FLCOCH2**. The test data contained in this report pertains only to CBSD-SAS interoperability. The EUT operates as a category B CBSD. The EUT is not a domain proxy.

Test Device Serial Number(s): FL2B000036, FL2B000061

Test Device Software Version: 2023.07.01

2.2 Device Capabilities

This device contains the following capabilities:

Band 48

This device supports the following conditional features:

	Conditional Test Case Definitions	Supported
C1	Mandatory for UUT which supports multi-step registration message	☒
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	☐
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	☒
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	☒
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	☐
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration	☐

Table 2-1. Conditional Features

2.3 Test Configuration

The EUT was connected to the SAS Test Harness developed by WINNF WG4-CBSD. The SAS Test Harness (V1.0.0.2) provided by CBRS Alliance was used. The SAS Test Harness is synchronized to UTC time.

2.4 Modifications

No modifications were made to EUT during testing.

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 4 of 63

3.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	3/15/2023	Annual	3/15/2024	US46470561
Dell	Latitude 5580	Test Harness Laptop	N/A	N/A	N/A	N/A

Table 3-1 Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date ranges care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 5 of 63

4.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 6 of 63

5.0 EVALUATION PROCEDURE

The measurement procedure described in KDB 940660 D01 v03, KDB 940660 D02 v01 and WINNF-TS-0122-V1.0.2 was used in the measurement of the EUT.

Deviation from measurement procedure.....None

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 7 of 63

6.0 TEST SUMMARY

6.1 Summary

Company Name: Skylark Wireless LLC

FCC ID: 2AS22-FLCOCH2

Table 6-1. Summary of Test Results

FCC Part Section(s)	KDB940660 D01 Section 3.3 a)	Test Case Description	WinnForum Test Case	Test Result
96.39 (c)	1	Confirm that the device will only transmit after it receives authorization from a SAS	WINNF.FT.C.REG.1 WINNF.FT.C.REG.5 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18 WINNF.FT.C.GRA.1 WINNF.FT.C.GRA.2 WINNF.FT.C.HBT.5	Pass
96.39 (c)	2	Check the device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS.	WINNF.FT.C.REG.1 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18	Pass
96.39(c)(1)	3	Confirm that the device changes its operating power and/or channel in response to a command from the SAS.	WINNF.FT.C.HBT.1	Pass
96.39	4	Confirm that the device correctly configures based on the different license classes	N/A	Pass
96.39(c)(1)	5	Confirm that the device transmits at a power level less than or equal to the maximum power level approved by the SAS.	WINNF.PT.C.HBT.1	Pass
96.39(b)(c)	6	Confirm that the device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	7	Confirm that the device transmits on the SAS specified frequency.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	8	Confirm that the device stops transmission in response to a command from the SAS, within a period as required by Part 96.	WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.4 WINNF.FT.C.HBT.6 WINNF.FT.C.HBT.7 WINNF.FT.C.HBT.10 WINNF.FT.C.RLQ.1 WINNF.FT.C.DRG.1	Pass

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 8 of 63

96.39 (c)	9	Confirm that the device sends measurements data in response to the command from the SAS.	N/A	Pass
96.39(a)	10	For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter (± 50 m) within the required time frame.	N/A	N/A
96.39 (c)	11	Confirm that the device is capable of reporting the signal level (measurement data) and frequency to SAS.	N/A	Pass
96 E	12	When CBSDs communicate through a management system, confirm compliance with all requirements.	N/A	Pass
96.39	13	When communication between the CBSD and SAS is lost: i) Describe how the CBSD would react if the communications between the device and the SAS is lost. Confirm that the CBSD stops transmission once it loses the link to the SAS. ii) Describe the process for re-establishment of the communications and confirm that the CBSD acts accordingly. iii) Confirm power-on restart process for registration (re-registration) occurs as expected. iv) Confirm the process for de-registration occurs as expected.	WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10	Pass
96.39(f)	KDB940660 D01 Section 4	SAS and Device Security Requirements	WINNF.FT.C.SCS.1 WINNF.FT.C.SCS.2 WINNF.FT.C.SCS.3 WINNF.FT.C.SCS.4 WINNF.FT.C.SCS.5	Pass
96.39(e)	N/A	The CBSD must report to the SAS which available channels of frequencies it will use	WINNF.PT.C.HBT.1 WINNF.FT.C.HBT.1 WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.4 WINNF.FT.C.HBT.5 WINNF.FT.C.HBT.7 WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10 WINNF.FT.C.RLQ.1 WINNF.FT.C.DRG.1	Pass

Notes:

- Test cases denoted as “N/A” in the table above are not applicable to the EUT and are either Optional or Conditional per Section 6 of WINNF-TS-0122.
- Please see Appendices for test data.
- Proper message formatting and protocol are verified by the Winnforum SAS Harness software. Test results may be verified via the SAS harness logs.
- As a CPE CBSD, the UUT may transmit within the spectrum grant of the associated BTS-CBSD at EUD levels at any time, and at CBSD levels within the constraints of KDB 940660 D02 without a SAS authorization.

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 9 of 63

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Skylark Wireless LLC CBRS CPE FCC ID: 2AS22-FLCOCH2** has been tested to show compliance with Part 96 and WINNF-TS-0122.

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 10 of 63


APPENDIX A – TEST RESULT AND DATA

A1 [WINNF.FT.C.REG.1] Multi-Step registration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT is in the Unregistered state CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness:	--	--
2	• The required userId, fcId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	☒	☐
3	• SAS Test Harness sends a CBSD Registration Response as follows: - cbsdId = Ci - measReportConfig shall not be included - responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 11 of 63

Test Plots:

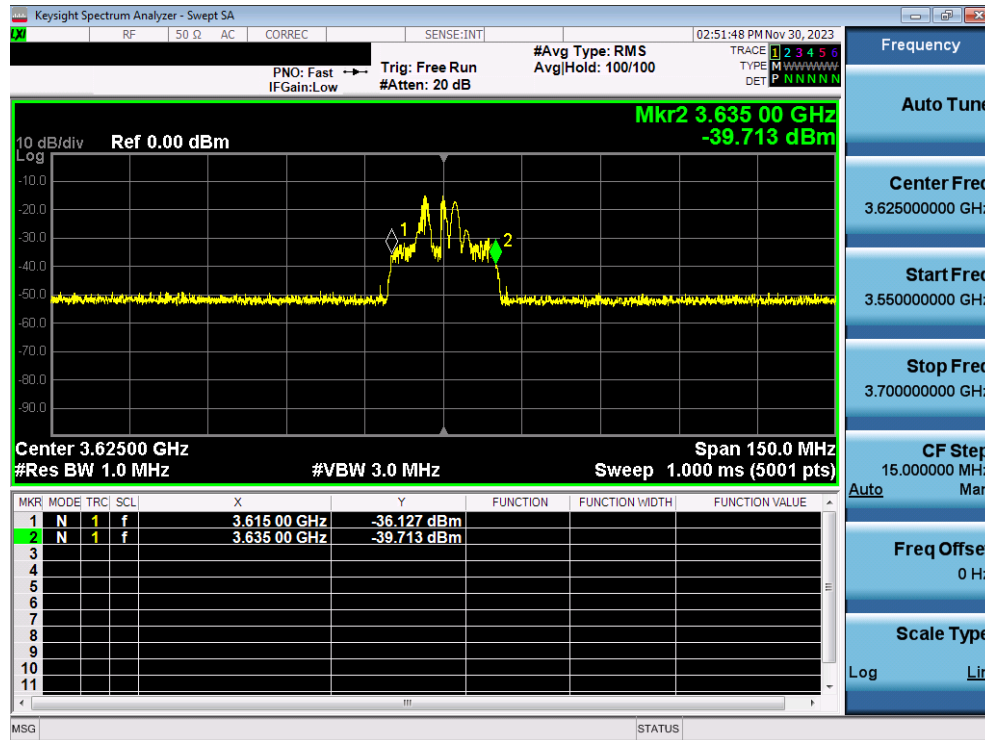


Plot 1. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.1)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 12 of 63

A3 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state • All of the required and REG-Conditional parameters shall be configured and CPI signature provided	--	--
2	CBSD sends Registration request to the SAS Test Harness: • The required userId, fcclId and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.	☒	☐
3	• SAS Test Harness sends a CBSD Registration Response as follows: - cbsdId = C - measReportConfig shall not be included - responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 13 of 63

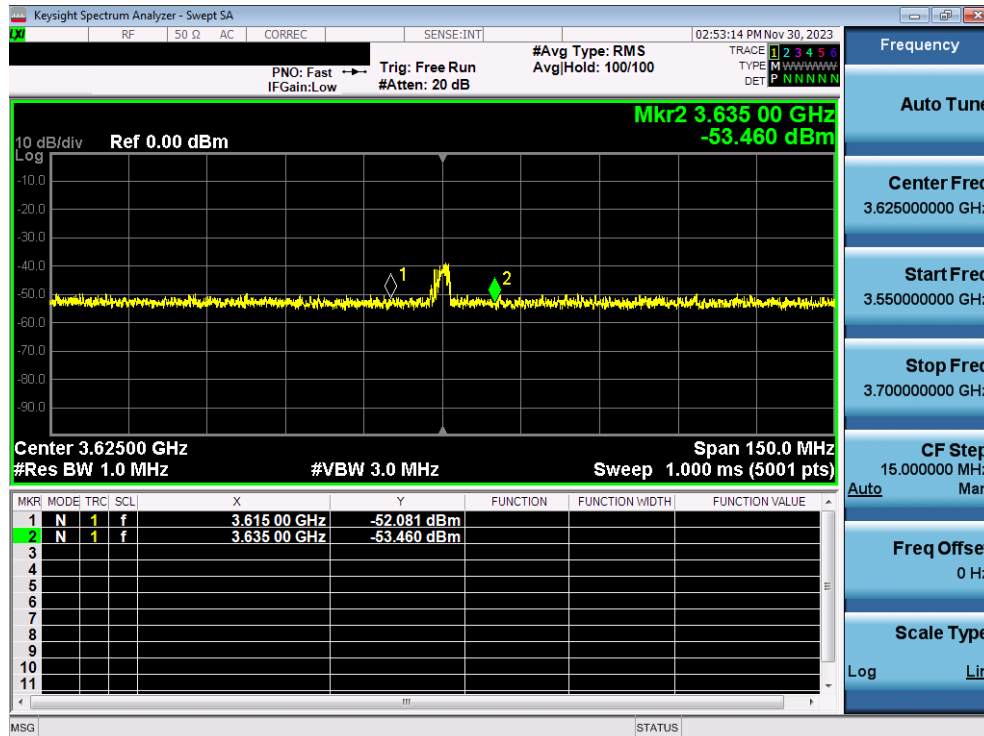


Plot 2. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.5)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 14 of 63

A4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

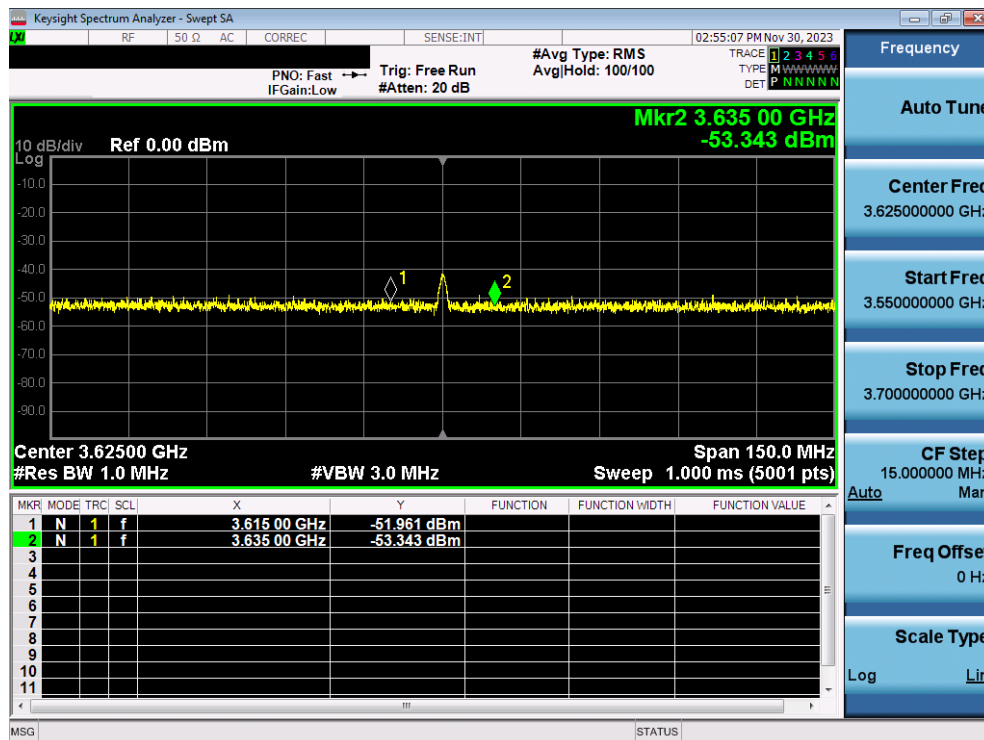


Plot 3. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.8)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 15 of 63

A5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

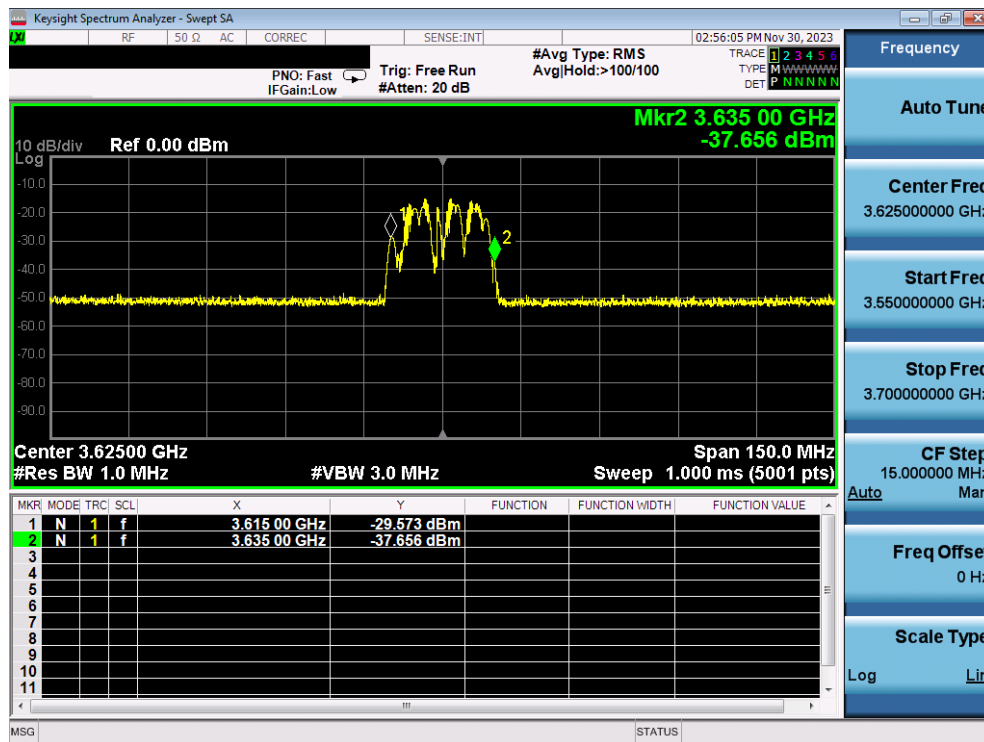


Plot 4. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.10)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 16 of 63

A6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

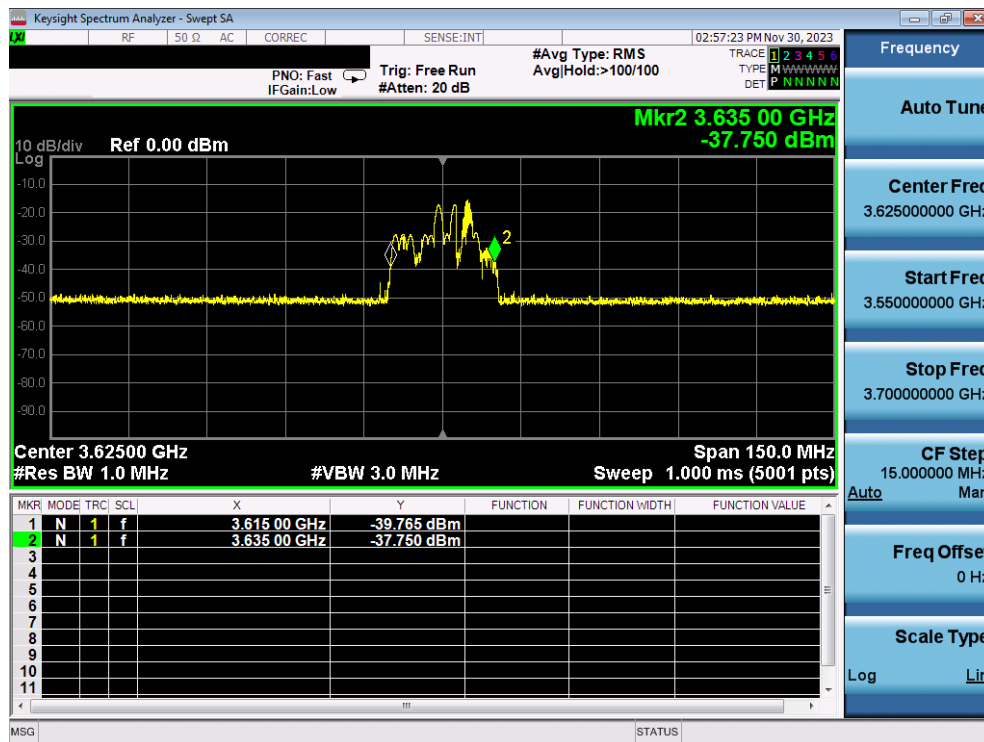


Plot 5. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.12)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 17 of 63

A7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

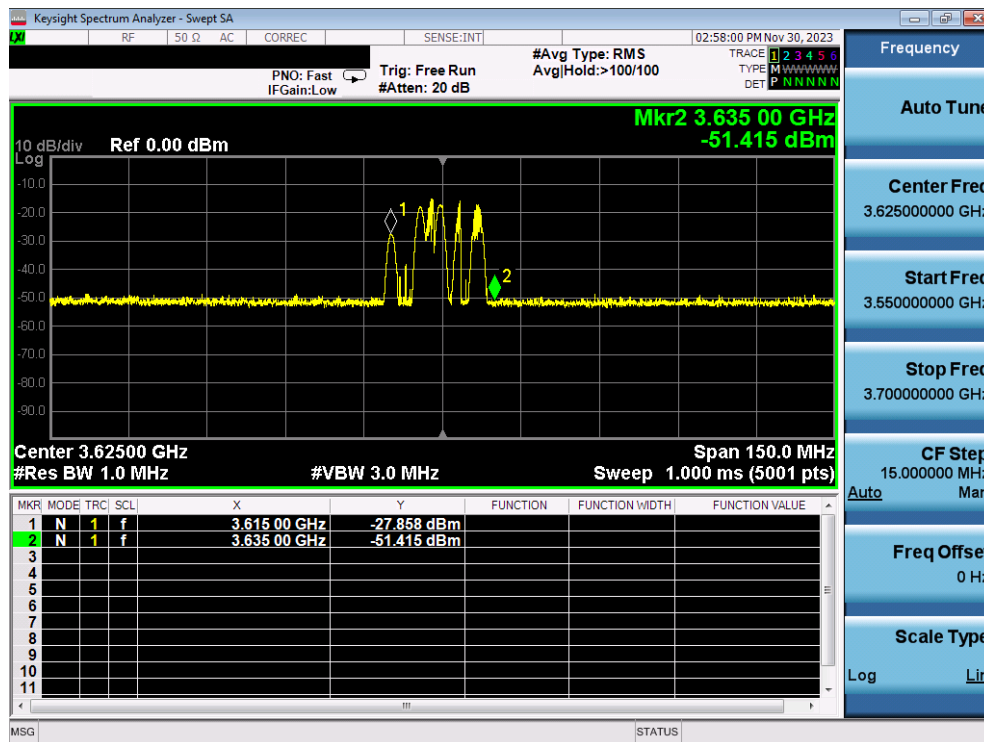


Plot 6. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.14)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 18 of 63

A8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

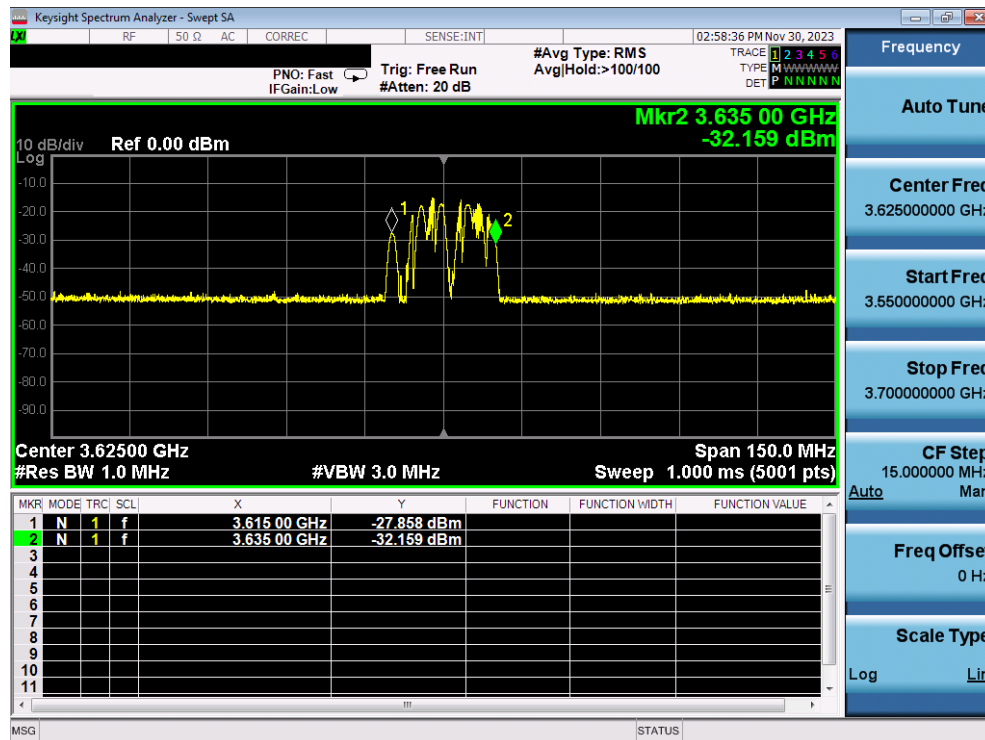


Plot 7. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.16)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 19 of 63

A9 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

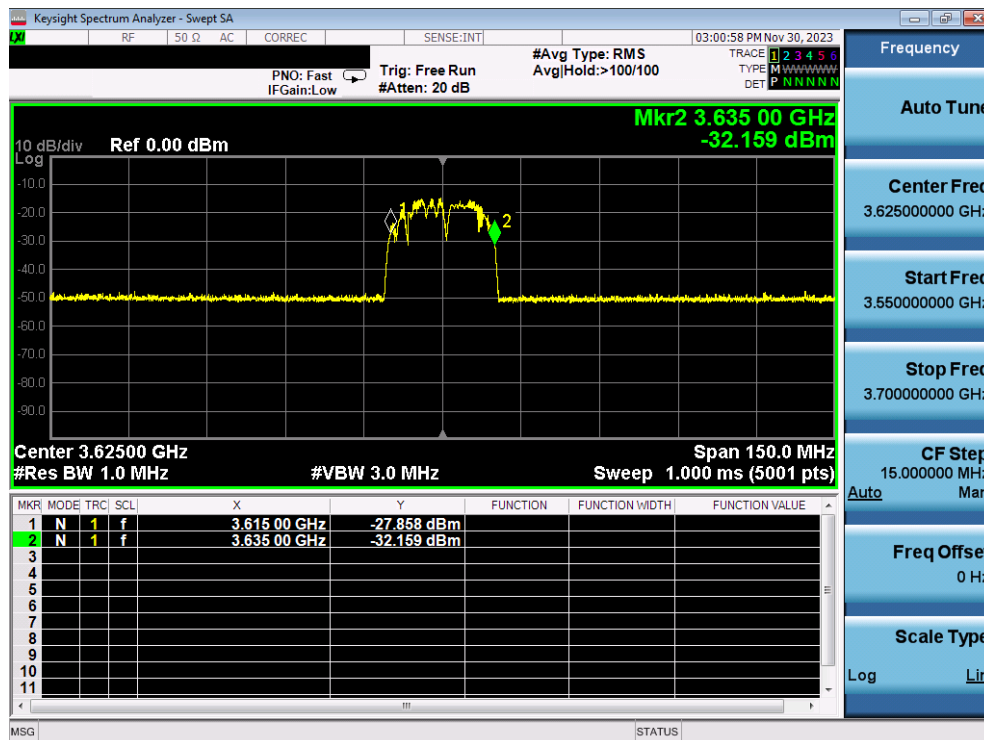


Plot 8. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.REG.18)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 20 of 63

A10 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

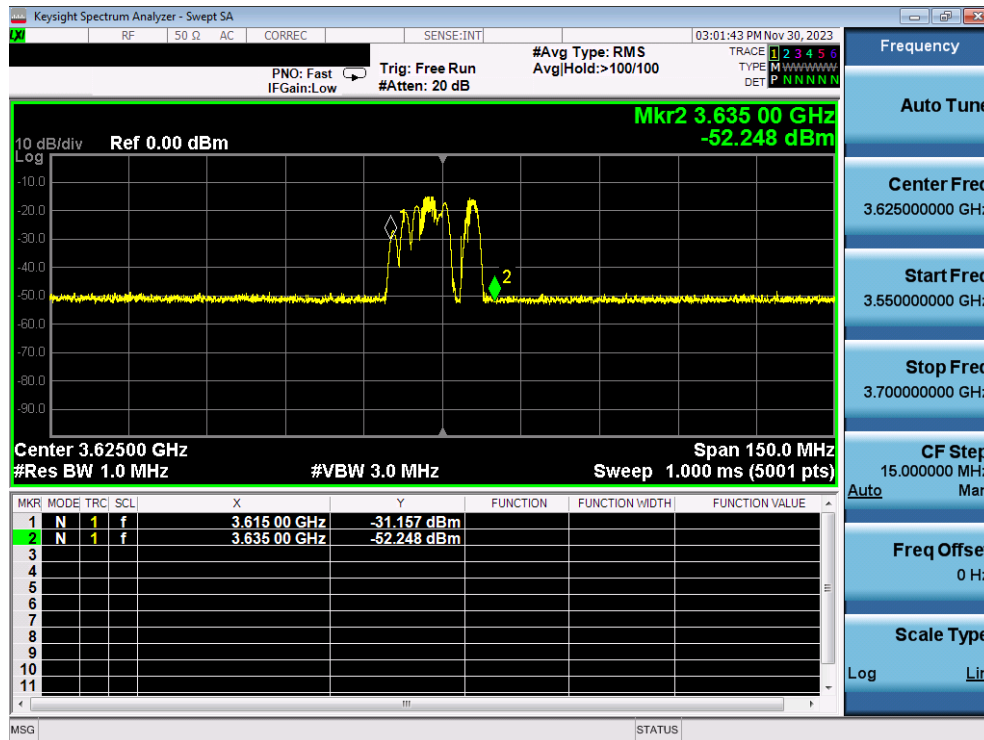


Plot 9. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.GRA.1)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 21 of 63

A11 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD	☒	☐

Test Plots:

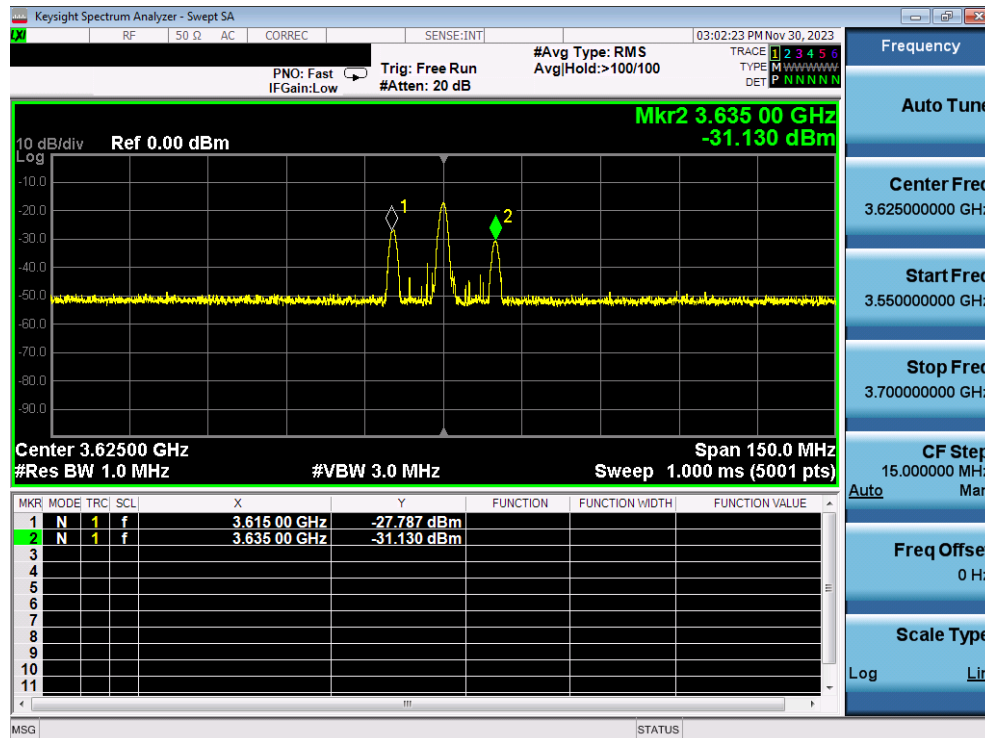

Plot 10. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.GRA.2)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 22 of 63


A12 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends a message: • If message is type Spectrum Inquiry Request, go to step 3, or • If message is type Grant Request, go to step 5	--	--
3	UUT sends Spectrum Inquiry Request. Validate: • cbsdId = C • List of frequencyRange objects sent by UUT are within the CBRS frequency range	☒	☐
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: • cbsdId = C • availableChannel is an array of availableChannel objects • responseCode = 0	--	--
5	UUT sends Grant Request message. Validate: • cbsdId = C • maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 • operationFrequencyRange, F, sent by UUT is a valid range within the CBRS band	☒	☐
6	SAS Test Harness sends a Grant Response message, including the parameters: • cbsdId = C • grantId = G = a valid grant ID • grantExpireTime = UTC time greater than duration of the test • responseCode = 0	--	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
9	For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and: • cbsdId = C • grantId = G • operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters: • cbsdId = C	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 23 of 63

	• grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0		
10	Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time prior to completion of the first heartbeat response • UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F	☒	☐

Test Plots:

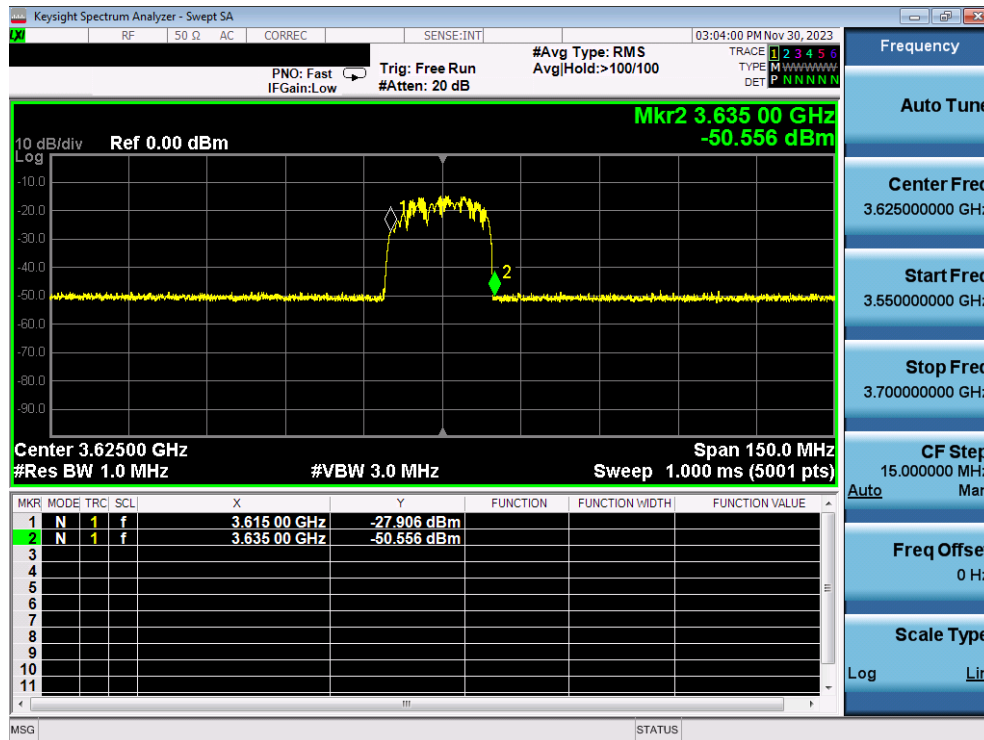

Plot 11. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.1)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 24 of 63

A13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 105 (DEREGISTER)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 25 of 63

Test Plots:

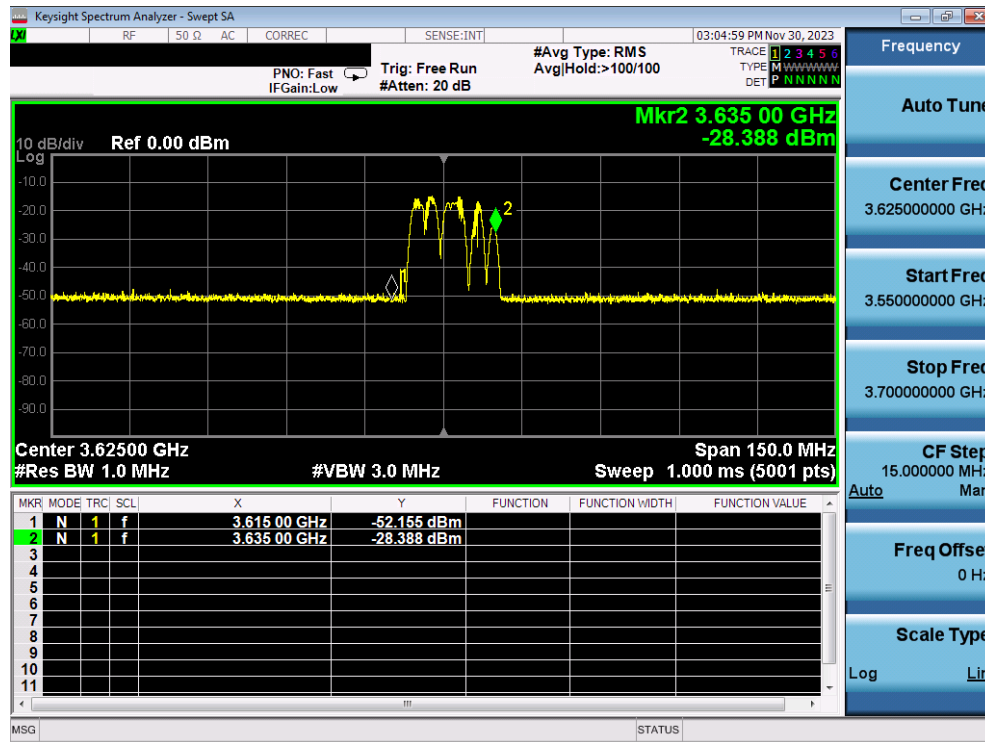

Plot 12. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.3)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 26 of 63

A14 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 500 (TERMINATED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 27 of 63

Test Plots:

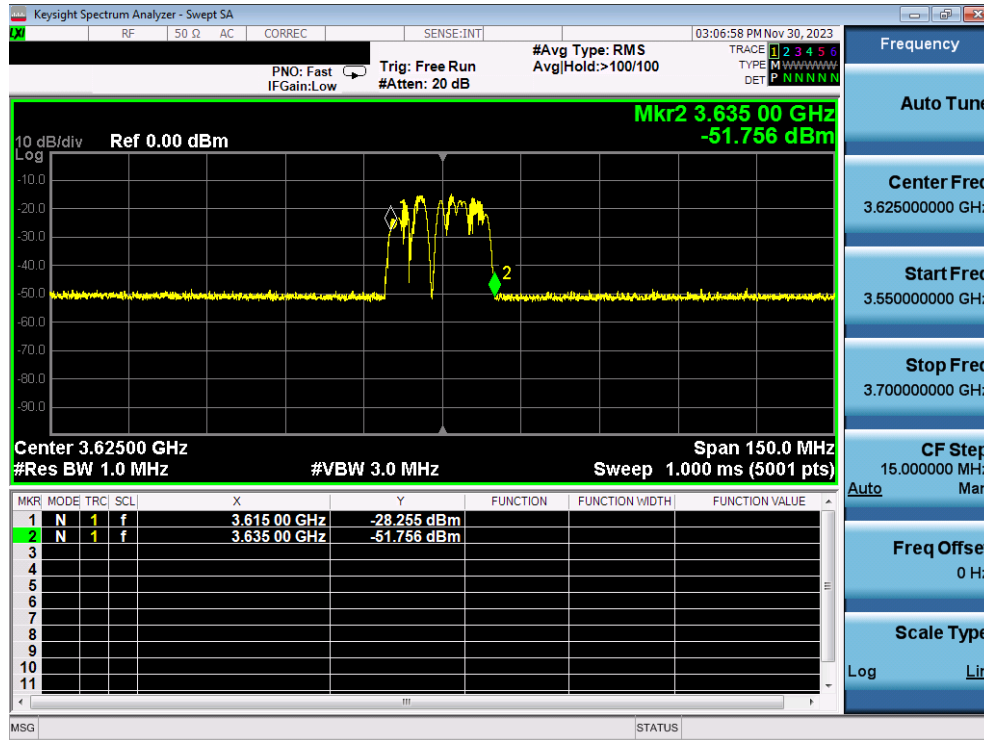

Plot 13. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.4)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 28 of 63

A15 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time.	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 29 of 63

Test Plots:

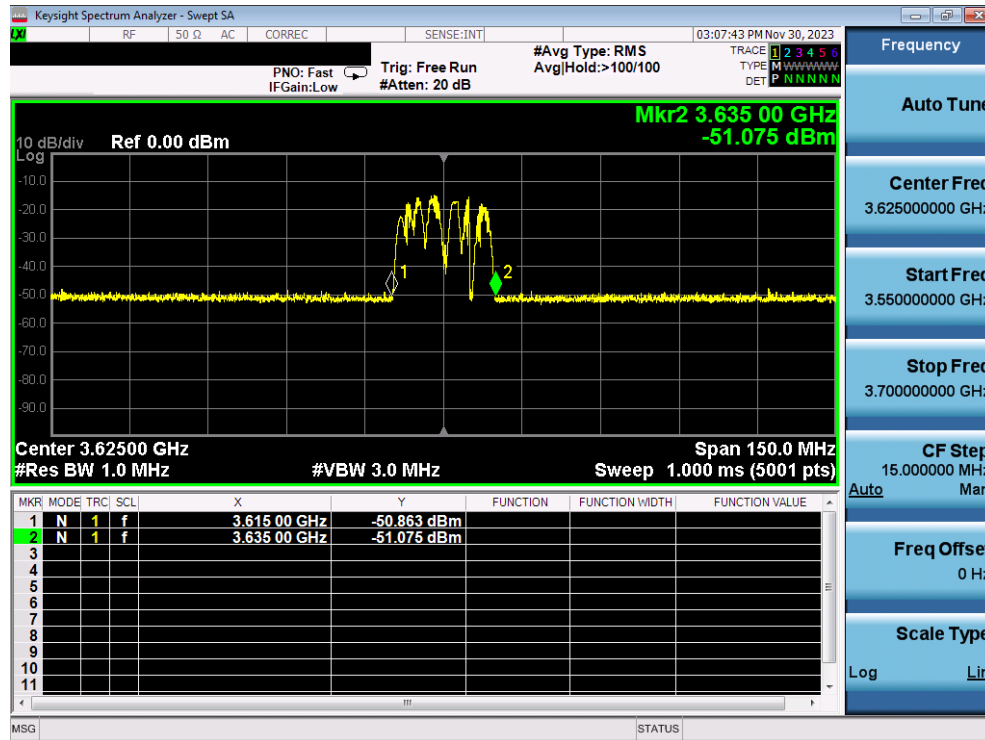

Plot 14. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.5)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 30 of 63

A16 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: • cbsdId = C • grantId = G	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 31 of 63

Test Plots:

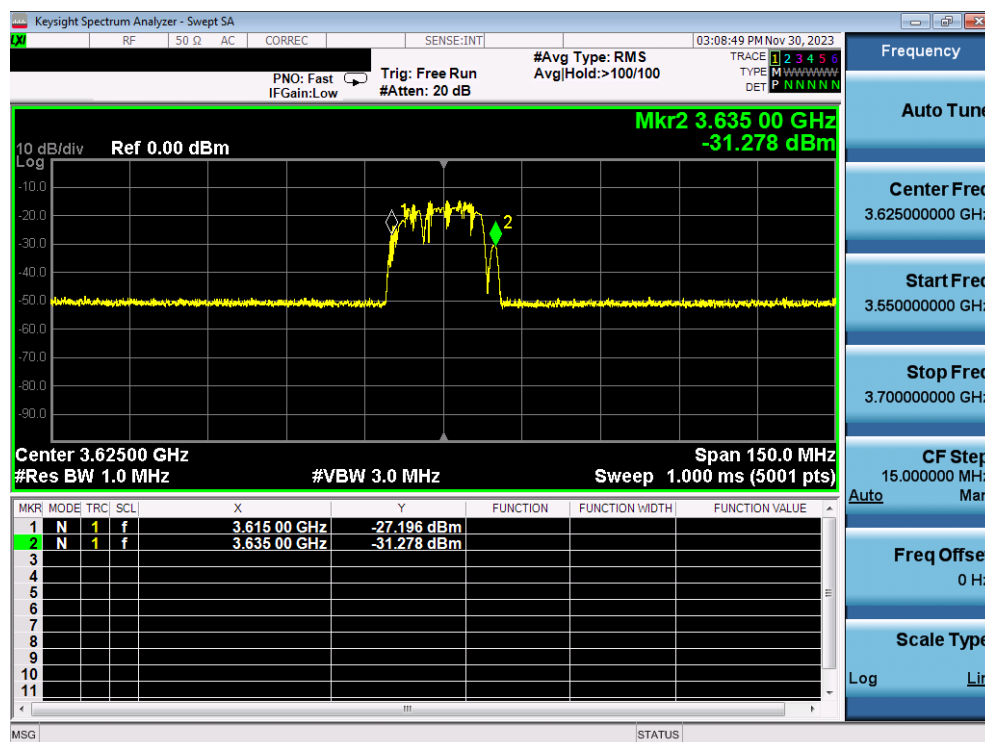

Plot 15. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.6)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 32 of 63

A17 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 502 (UNSYNC_OP_PARAM)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify: • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: - o cbsdId = C - o grantId = G	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 33 of 63

Test Plots:



Plot 16. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.7)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 34 of 63

A18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 35 of 63

Test Plots:

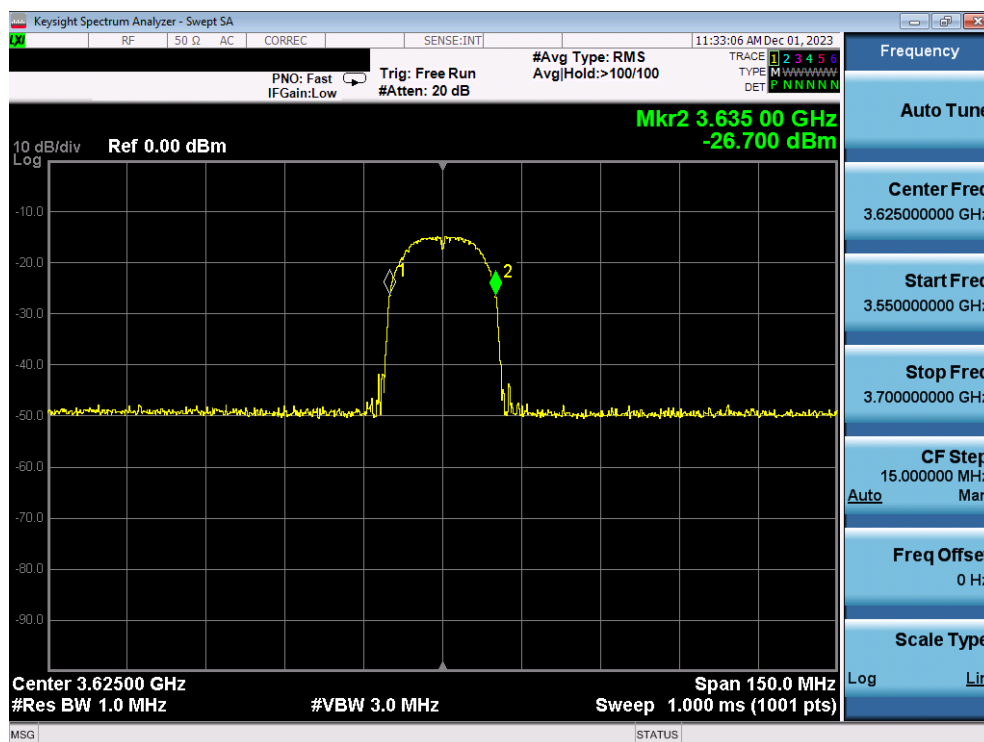

Plot 17. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.HBT.9)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 36 of 63

A19 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 37 of 63

Test Plots:

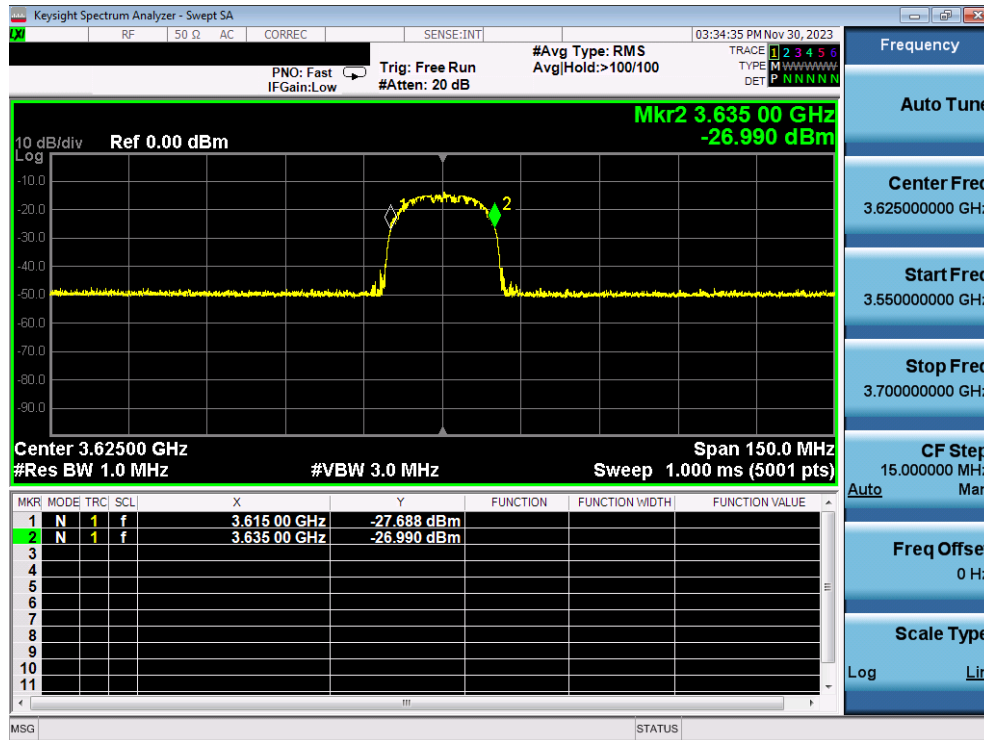

Plot 18. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD) (WINNF.FT.C.HBT.10)


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 38 of 63

A20 [WINNF.FT.C.RLQ.1] Successful Relinquishment

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G	☒	☐
3	SAS Test Harness shall approve the request with a Relinquishment Response message with parameters: • cbsdId = C • grantId = G • responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 39 of 63

Test Plots:

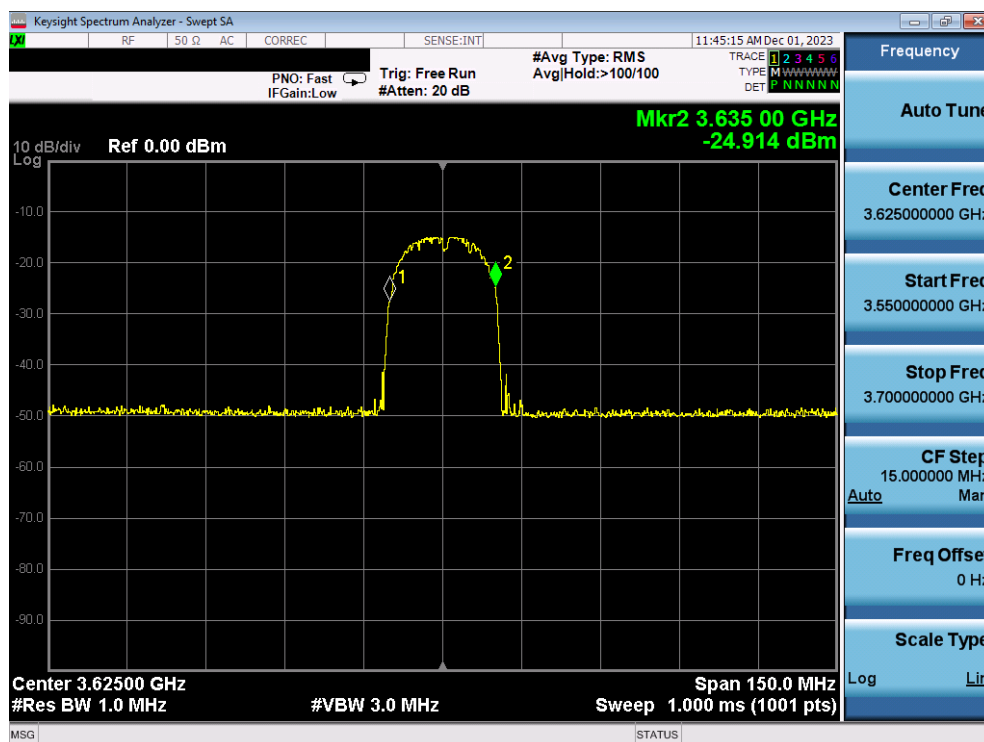

Plot 19. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.RLQ.1)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 40 of 63

A21 [WINNF.FT.C.MES.1] Registration Response contains measReportConfig

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness	--	--
2	UUT sends a Registration Request message. Validate the Registration Request message is formatted correctly, including: • userId is present and correct • fcId is present and correct • cbsdSerialNumber is present and correct • measCapability = "RECEIVED_POWER_WITHOUT_GRANT"	☒	☐
3	SAS Test Harness sends a Registration Response message, with the following parameters: • cbsdId = C = valid cbsdId for this UUT • measReportConfig= "RECEIVED_POWER_WITHOUT_GRANT" • responseCode = 0	--	--
4	UUT sends a message: • If message is type Spectrum Inquiry Request, go to step 5, or • If message is type Grant Request, go to step 7	--	--
5	UUT sends message type Spectrum Inquiry Request. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • measReport is present, and is a properly formatted rcvdPowerMeasReport.	☒	☐
6	SAS Test Harness sends a Spectrum Inquiry Response, with the following parameters: • cbsdId = C • availableChannel is an array of availableChannel objects • responseCode = 0	--	--
7	UUT sends message type Grant Request message. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • measReport is present, and is a properly formatted rcvdPowerMeasReport.	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 41 of 63

```
"measReport": {
  "rcvdPowerMeasReports": [
    {
      "measBandwidth": 10000000,
      "measFrequency": 3550000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3560000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3570000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3580000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3590000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3600000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3610000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3620000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3630000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3640000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3650000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3660000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3670000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3680000000,
      "measRcvdPower": -99
    },
    {
      "measBandwidth": 10000000,
      "measFrequency": 3690000000,
      "measRcvdPower": -99
    }
  ]
}
```

Plot 20. Measurement Report


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 42 of 63

A22 [WINNF.FT.C.DRG.1] Successful Deregistration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	UUT sends Deregistration Request to SAS Test Harness with cbsdId = C.	☒	☐
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: • cbsdId = C • responseCode = 0	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time prior to completion of the first heartbeat response	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 43 of 63

Test Plots:

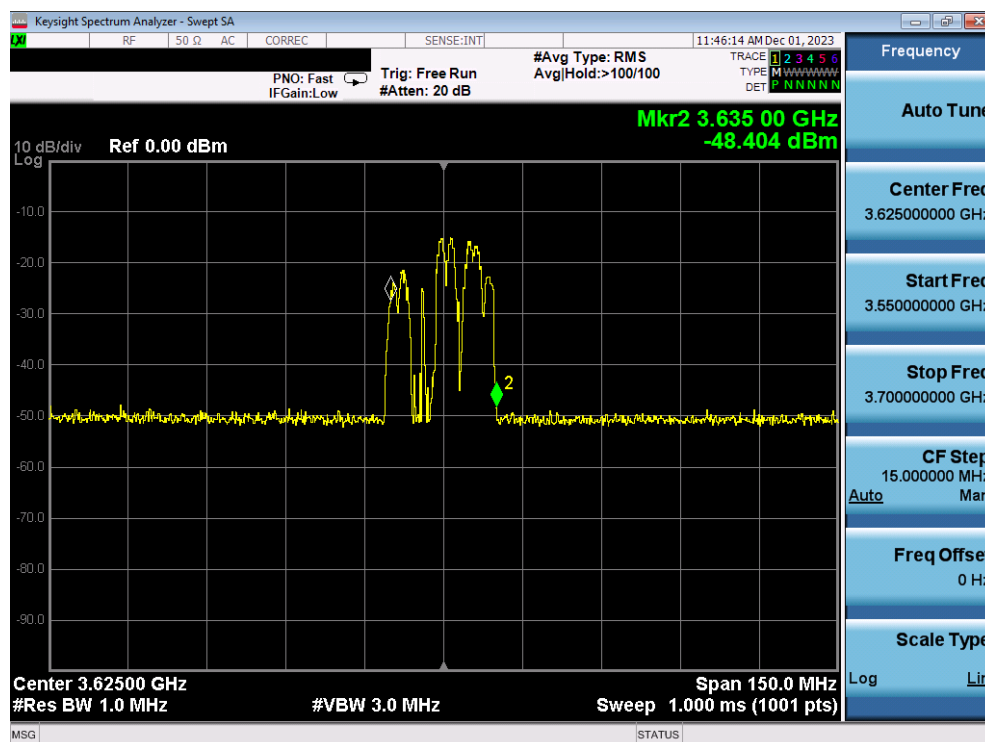

Plot 21. Conducted Measurement - UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.DRG.1)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 44 of 63


A23 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure • The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. • Configure the SAS Test Harness to accept the security procedure and establish the connection	☒	☐
2	• Make sure that Mutual authentication happens between UUT and the SAS Test Harness. • Make sure that UUT uses TLS v1.2 • Make sure that cipher suites from one of the following is selected, • TLS_RSA_WITH_AES_128_GCM_SHA256 • TLS_RSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 • TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	☒	☐
3	A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability. • UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId.	☒	☐
4	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time.	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 45 of 63



Test Plots:

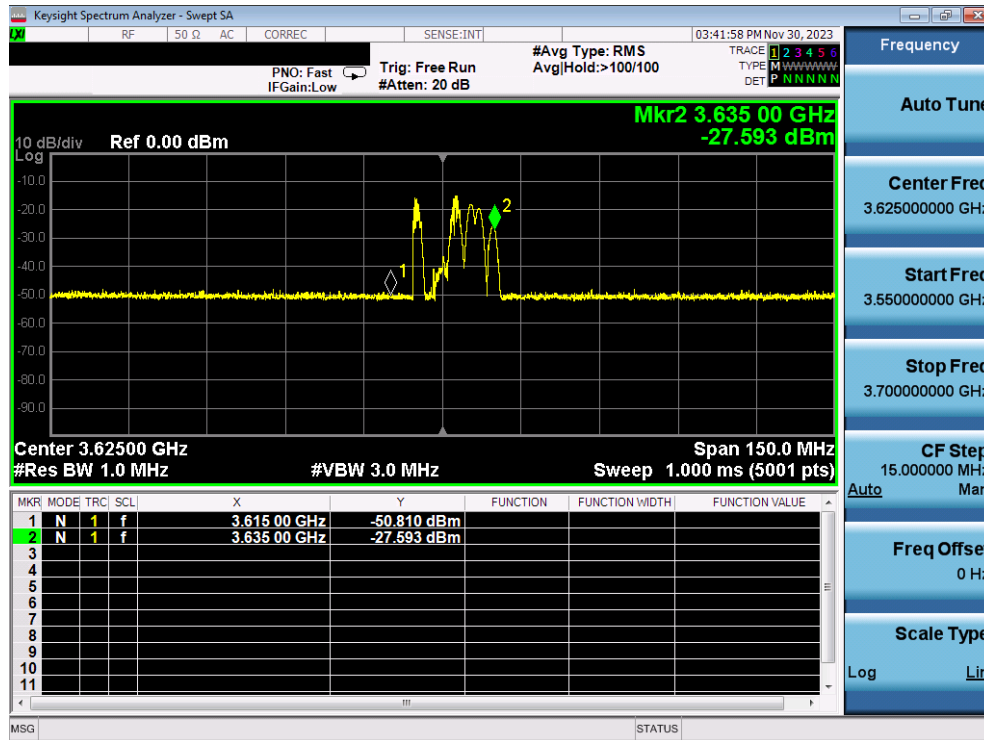

Plot 22. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.1)

No.	Time	Source	Info	Destination	Protocol	Length
11	2023-11-30 20:35:42.827796	173.59.230.214	Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message	173.59.230.213	TLSv1.2	561
12	2023-11-30 20:35:42.827904	173.59.230.213	5000 - 35194 [ACK] Seq=2085 Ack=3596 Win=2102272 Len=0	173.59.230.214	TCP	54
13	2023-11-30 20:35:42.854633	173.59.230.213	New Session Ticket, Change Cipher Spec, Encrypted Handshake Message	173.59.230.214	TLSv1.2	1576
14	2023-11-30 20:35:42.855066	173.59.230.214	35194 - 5000 [ACK] Seq=3596 Ack=4445 Win=64128 Len=0	173.59.230.213	TCP	60
15	2023-11-30 20:35:42.855067	173.59.230.214	35194 - 5000 [ACK] Seq=3596 Ack=4507 Win=64128 Len=0	173.59.230.213	TCP	60
16	2023-11-30 20:35:42.878247	173.59.230.214	35194 - 5000 [FIN, ACK] Seq=3596 Ack=4507 Win=64128 Len=0	173.59.230.213	TCP	60
17	2023-11-30 20:35:42.878300	173.59.230.213	5000 - 35194 [ACK] Seq=4507 Ack=3597 Win=2102272 Len=0	173.59.230.214	TCP	54
18	2023-11-30 20:35:42.878579	173.59.230.213	5000 - 35194 [FIN, ACK] Seq=4507 Ack=3597 Win=2102272 Len=0	173.59.230.214	TCP	54
19	2023-11-30 20:35:42.879030	173.59.230.214	35194 - 5000 [ACK] Seq=3597 Ack=4508 Win=64128 Len=0	173.59.230.213	TCP	60
31	2023-11-30 20:35:47.898392	173.59.230.214	49480 - 5000 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=752389220 TSecr=0 WS=128	173.59.230.213	TCP	74
32	2023-11-30 20:35:47.898490	173.59.230.213	5000 - 49480 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	66
33	2023-11-30 20:35:47.898944	173.59.230.214	49480 - 5000 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60
34	2023-11-30 20:35:47.899347	173.59.230.214	Client Hello	173.59.230.213	TLSv1.2	222
35	2023-11-30 20:35:47.899777	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLSv1.2	3038
36	2023-11-30 20:35:47.900688	173.59.230.214	49480 - 5000 [ACK] Seq=169 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60
37	2023-11-30 20:35:47.900688	173.59.230.214	49480 - 5000 [ACK] Seq=169 Ack=2985 Win=62720 Len=0	173.59.230.213	TCP	60
38	2023-11-30 20:35:47.905954	173.59.230.214	49480 - 5000 [ACK] Seq=169 Ack=2985 Win=64128 Len=1460 [TCP segment of a reassembled PDU]	173.59.230.213	TCP	1514
39	2023-11-30 20:35:47.905955	173.59.230.214	Certificate [TCP segment of a reassembled PDU]	173.59.230.213	TLSv1.2	1514
40	2023-11-30 20:35:47.905955	173.59.230.214	Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message	173.59.230.213	TLSv1.2	561
41	2023-11-30 20:35:47.906000	173.59.230.213	5000 - 49480 [ACK] Seq=2085 Ack=3596 Win=2102272 Len=0	173.59.230.214	TCP	54
42	2023-11-30 20:35:47.910445	173.59.230.213	New Session Ticket, Change Cipher Spec, Encrypted Handshake Message	173.59.230.214	TLSv1.2	1576
43	2023-11-30 20:35:47.915068	173.59.230.214	49480 - 5000 [ACK] Seq=3596 Ack=4445 Win=64128 Len=0	173.59.230.213	TCP	60
44	2023-11-30 20:35:47.915068	173.59.230.214	49480 - 5000 [ACK] Seq=3596 Ack=4507 Win=64128 Len=0	173.59.230.213	TCP	60
45	2023-11-30 20:35:47.915069	173.59.230.214	Application Data	173.59.230.213	TLSv1.2	228
46	2023-11-30 20:35:47.915942	173.59.230.214	Application Data	173.59.230.213	TLSv1.2	1312
47	2023-11-30 20:35:47.919961	173.59.230.213	5000 - 49480 [ACK] Seq=4507 Ack=5028 Win=2100736 Len=0	173.59.230.214	TCP	54
48	2023-11-30 20:35:47.959531	173.59.230.213	Application Data	173.59.230.214	TLSv1.2	100
49	2023-11-30 20:35:47.996138	173.59.230.214	49480 - 5000 [ACK] Seq=5028 Ack=4553 Win=64128 Len=0	173.59.230.213	TCP	60
50	2023-11-30 20:35:47.996180	173.59.230.213	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data	173.59.230.214	TLSv1.2	542
51	2023-11-30 20:35:47.997025	173.59.230.214	49480 - 5000 [ACK] Seq=5028 Ack=5041 Win=64128 Len=0	173.59.230.213	TCP	60
52	2023-11-30 20:35:48.002318	173.59.230.214	Application Data	173.59.230.213	TLSv1.2	231
53	2023-11-30 20:35:48.002318	173.59.230.214	49480 - 5000 [ACK] Seq=5205 Ack=5041 Win=64128 Len=1460 [TCP segment of a reassembled PDU]	173.59.230.213	TCP	1514
54	2023-11-30 20:35:48.002314	173.59.230.214	Application Data	173.59.230.213	TLSv1.2	670
55	2023-11-30 20:35:48.002365	173.59.230.213	5000 - 49480 [ACK] Seq=5041 Ack=7281 Win=2102272 Len=0	173.59.230.214	TCP	54
56	2023-11-30 20:35:48.003661	173.59.230.213	Application Data	173.59.230.214	TLSv1.2	100
57	2023-11-30 20:35:48.044607	173.59.230.214	49480 - 5000 [ACK] Seq=7281 Ack=5087 Win=64128 Len=0	173.59.230.213	TCP	60
58	2023-11-30 20:35:48.044650	173.59.230.213	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data	173.59.230.214	TLSv1.2	800
59	2023-11-30 20:35:48.045213	173.59.230.214	49480 - 5000 [ACK] Seq=7281 Ack=5083 Win=64128 Len=0	173.59.230.213	TCP	60
60	2023-11-30 20:35:48.080071	173.59.230.213	Application Data	173.59.230.214	TLSv1.2	221
61	2023-11-30 20:35:48.080072	173.59.230.214	Application Data	173.59.230.213	TLSv1.2	1511
62	2023-11-30 20:35:48.080964	173.59.230.213	5000 - 49480 [ACK] Seq=5833 Ack=8905 Win=2102272 Len=0	173.59.230.214	TCP	54
63	2023-11-30 20:35:48.085924	173.59.230.213	Application Data	173.59.230.214	TLSv1.2	100
64	2023-11-30 20:35:48.111793	173.59.230.214	49480 - 5000 [ACK] Seq=8005 Ack=9879 Win=64128 Len=0	173.59.230.213	TCP	60
65	2023-11-30 20:35:48.111817	173.59.230.213	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data	173.59.230.214	TLSv1.2	537
66	2023-11-30 20:35:48.112522	173.59.230.214	49480 - 5000 [ACK] Seq=8005 Ack=6362 Win=64128 Len=0	173.59.230.213	TCP	60


Plot 23. WireShark Screenshot – Successful Handshake (WINNF.FT.C.SCS.1)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 46 of 63

A24 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time	☒	☐

Test Plots:

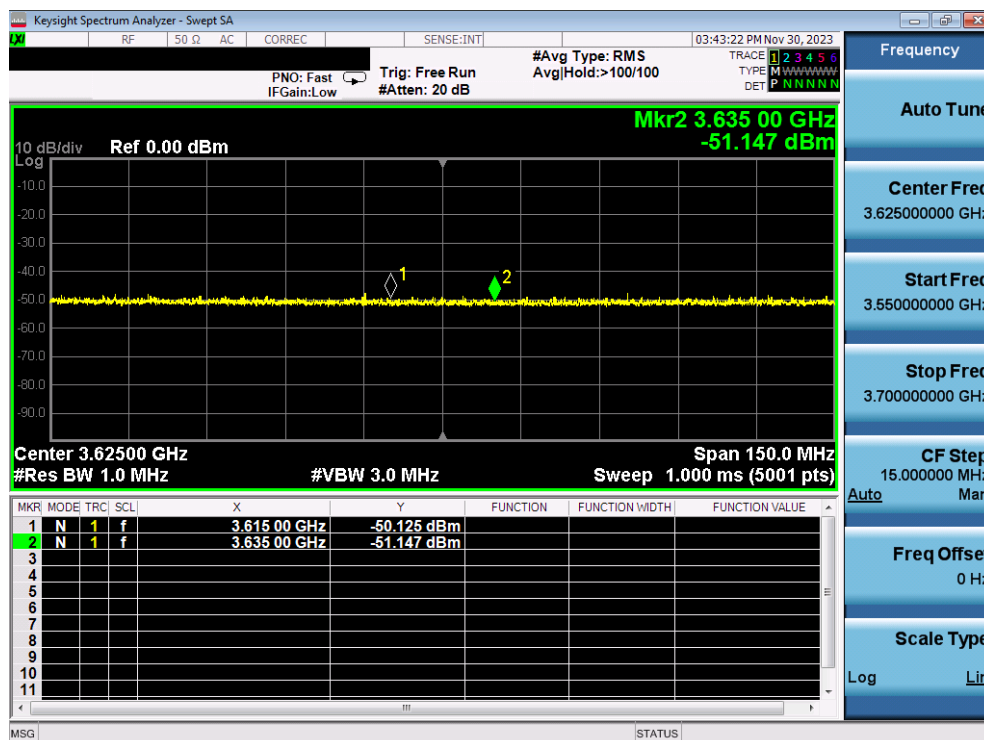

Plot 24. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.2)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 47 of 63

No.	Time	Source	Info	Destination	Protocol	Length	
38	2023-11-30 20:38:14.764558	173.59.230.214	39510 → 5000 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60	
39	2023-11-30 20:38:14.764919	173.59.230.214	Client Hello	173.59.230.213	TLShv1.2	222	
40	2023-11-30 20:38:14.765555	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLShv1.2	3175	
41	2023-11-30 20:38:14.766134	173.59.230.214	39510 → 5000 [ACK] Seq=169 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60	
42	2023-11-30 20:38:14.766135	173.59.230.214	39510 → 5000 [ACK] Seq=169 Ack=2921 Win=63360 Len=0	173.59.230.213	TCP	60	
43	2023-11-30 20:38:14.766136	173.59.230.214	39510 → 5000 [ACK] Seq=169 Ack=3122 Win=63332 Len=0	173.59.230.213	TCP	60	
44	2023-11-30 20:38:14.772200	173.59.230.214	39510 → 5000 [ACK] Seq=169 Ack=3122 Win=64128 Len=1460 [TCP segment of a reassembled PDU]	173.59.230.213	TCP	1514	
45	2023-11-30 20:38:14.772201	173.59.230.214	Certificate [TCP segment of a reassembled PDU]	173.59.230.213	TLShv1.2	1514	
46	2023-11-30 20:38:14.772202	173.59.230.214	Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message	173.59.230.213	TLShv1.2	561	
47	2023-11-30 20:38:14.772295	173.59.230.213	5000 → 39510 [ACK] Seq=3122 Ack=3596 Win=2182272 Len=0	173.59.230.214	TCP	54	
48	2023-11-30 20:38:14.792031	173.59.230.213	New Session Ticket, Change Cipher Spec, Encrypted Handshake Message	173.59.230.214	TLShv1.2	1576	
49	2023-11-30 20:38:14.792032	173.59.230.214	39510 → 5000 [ACK] Seq=3596 Ack=4582 Win=64128 Len=0	173.59.230.213	TCP	60	
50	2023-11-30 20:38:14.792032	173.59.230.214	39510 → 5000 [ACK] Seq=3596 Ack=4644 Win=64128 Len=0	173.59.230.213	TCP	60	
51	2023-11-30 20:38:14.801071	173.59.230.214	35700 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=752456120 TSecr=0 WS=128	173.59.230.213	TCP	74	
52	2023-11-30 20:38:14.801139	173.59.230.213	80 → 35700 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	66	
53	2023-11-30 20:38:14.801170	173.59.230.214	35700 → 80 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60	
54	2023-11-30 20:38:14.801770	173.59.230.214	GET /crlserver.crl HTTP/1.1	173.59.230.213	HTTP	213	
55	2023-11-30 20:38:14.852366	173.59.230.213	80 → 35700 [ACK] Seq=1 Ack=160 Win=2182272 Len=0	173.59.230.214	TCP	54	
56	2023-11-30 20:38:15.037042	173.59.230.213	Certificate Revocation List	173.59.230.214	PKIX-CRL	1569	
57	2023-11-30 20:38:15.037043	173.59.230.214	35700 → 80 [ACK] Seq=160 Ack=1516 Win=63360 Len=0	173.59.230.213	TCP	60	
58	2023-11-30 20:38:15.040240	173.59.230.214	35700 → 80 [FIN, ACK] Seq=160 Ack=1516 Win=64128 Len=0	173.59.230.213	TCP	60	
59	2023-11-30 20:38:15.040327	173.59.230.213	80 → 35700 [FIN, ACK] Seq=1516 Ack=161 Win=2182272 Len=0	173.59.230.214	TCP	54	
60	2023-11-30 20:38:15.041135	173.59.230.214	35700 → 80 [ACK] Seq=161 Ack=1517 Win=64128 Len=0	173.59.230.213	TCP	60	
61	2023-11-30 20:38:15.063626	173.59.230.214	39510 → 5000 [FIN, ACK] Seq=3596 Ack=4644 Win=64128 Len=0	173.59.230.213	TCP	60	
62	2023-11-30 20:38:15.063701	173.59.230.213	5000 → 39510 [ACK] Seq=4644 Ack=3597 Win=2182272 Len=0	173.59.230.214	TCP	54	
63	2023-11-30 20:38:15.064093	173.59.230.213	5000 → 39510 [FIN, ACK] Seq=4644 Ack=3597 Win=2182272 Len=0	173.59.230.214	TCP	54	
64	2023-11-30 20:38:15.064515	173.59.230.214	39510 → 5000 [ACK] Seq=3597 Ack=4645 Win=64128 Len=0	173.59.230.213	TCP	60	
75	2023-11-30 20:38:20.081978	173.59.230.214	45070 → 5000 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=752461404 TSecr=0 WS=128	173.59.230.213	TCP	74	
76	2023-11-30 20:38:20.082142	173.59.230.213	5000 → 45070 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	66	
77	2023-11-30 20:38:20.082966	173.59.230.214	45070 → 5000 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60	
78	2023-11-30 20:38:20.083022	173.59.230.214	Client Hello	173.59.230.213	TLShv1.2	222	
79	2023-11-30 20:38:20.083044	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLShv1.2	3175	
80	2023-11-30 20:38:20.084482	173.59.230.214	45070 → 5000 [ACK] Seq=169 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60	
81	2023-11-30 20:38:20.084484	173.59.230.214	45070 → 5000 [ACK] Seq=169 Ack=3122 Win=62592 Len=0	173.59.230.213	TCP	60	
82	2023-11-30 20:38:20.085701	173.59.230.214	Alert (Level: Fatal, Description: Certificate Revoked)	173.59.230.213	TLShv1.2	61	
83	2023-11-30 20:38:20.085762	173.59.230.214	45070 → 5000 (RST, ACK) Seq=176 Ack=3122 Win=64128 Len=0	173.59.230.213	TCP	60	
84	2023-11-30 20:38:20.088969	173.59.230.214	45082 → 5000 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=752461409 TSecr=0 WS=128	173.59.230.213	TCP	74	
85	2023-11-30 20:38:20.089739	173.59.230.213	5000 → 45082 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	66	
86	2023-11-30 20:38:20.089713	173.59.230.214	45082 → 5000 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60	
87	2023-11-30 20:38:20.089851	173.59.230.214	Client Hello	173.59.230.213	TLShv1.2	222	
88	2023-11-30 20:38:20.089710	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLShv1.2	3175	
89	2023-11-30 20:38:20.089450	173.59.230.214	45082 → 5000 [ACK] Seq=169 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60	
90	2023-11-30 20:38:20.089459	173.59.230.214	45082 → 5000 [ACK] Seq=169 Ack=3122 Win=62592 Len=0	173.59.230.213	TCP	60	
91	2023-11-30 20:38:20.090460	173.59.230.214	Alert (Level: Fatal, Description: Certificate Revoked)	173.59.230.213	TLShv1.2	61	
92	2023-11-30 20:38:20.090441	173.59.230.214	45082 → 5000 (RST, ACK) Seq=176 Ack=3122 Win=64128 Len=0	173.59.230.213	TCP	60	


Plot 25.WireShark Screenshot 1 - Failed Handshake (WINNF.TT.C.SCS.2)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 48 of 63

A25 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time	☒	☐

Test Plots:

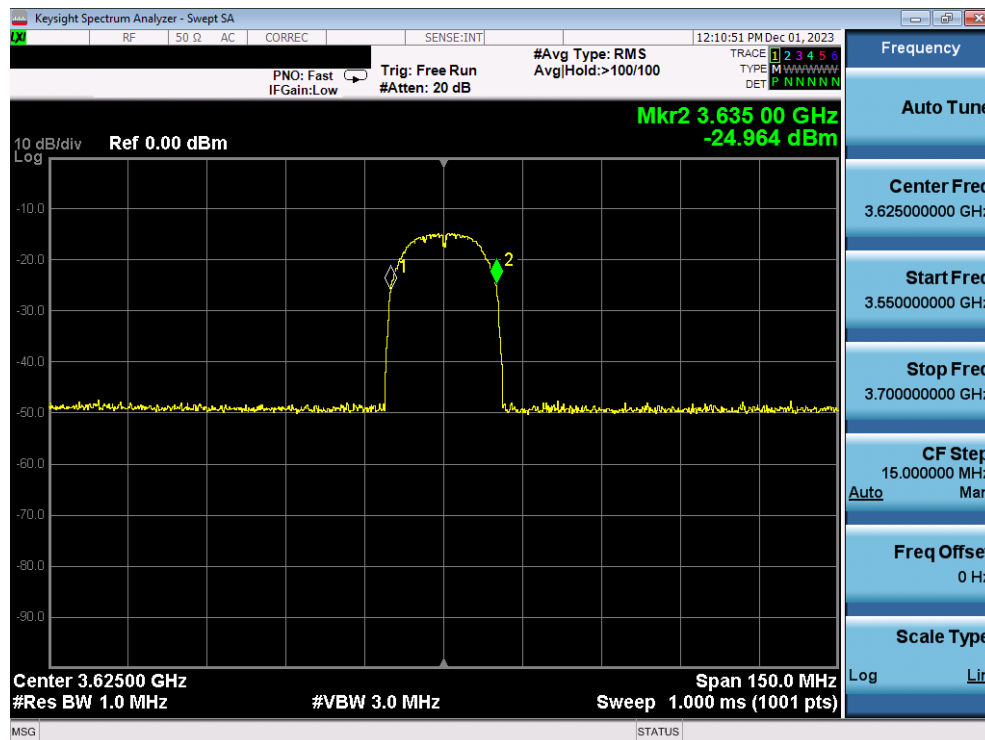

Plot 26. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.3)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 49 of 63

No.	Time	Source	Info	Destination	Protocol	Length
1	2023-12-01 17:05:30.224227	bell_d6:be:6d	who has 173.59.230.17 Tell 173.59.230.213	Broadcast	ARP	42
2	2023-12-01 17:05:30.400908	fe80::3a3a:21fff:fe...	38206 → 1900 Len=237	ff02::c	UDP	299
3	2023-12-01 17:05:30.474421	173.59.230.213	R-SEACKN * HTTP/1.1	239.255.255.250	SSDP	179
4	2023-12-01 17:05:31.043892	0.0.0.0	DHCP Discover - Transaction ID 0x440094d	255.255.255.255	DHCP	330
5	2023-12-01 17:05:31.401589	fe80::3a3a:21fff:fe...	38206 → 1900 Len=237	ff02::c	UDP	299
6	2023-12-01 17:05:31.757073	173.59.230.214	42518 → 5001 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=826093414 TSecr=0 WS=128	173.59.230.213	TCP	74
7	2023-12-01 17:05:31.757266	173.59.230.213	5001 → 42518 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	68
8	2023-12-01 17:05:31.757965	173.59.230.214	42518 → 5001 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60
9	2023-12-01 17:05:31.757966	173.59.230.214	Client Hello	173.59.230.213	TLSv1.2	198
10	2023-12-01 17:05:31.758797	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLSv1.2	3039
11	2023-12-01 17:05:31.759346	173.59.230.214	42518 → 5001 [ACK] Seq=145 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60
12	2023-12-01 17:05:31.759347	173.59.230.214	42518 → 5001 [ACK] Seq=145 Ack=2986 Win=63360 Len=0	173.59.230.213	TCP	60
13	2023-12-01 17:05:31.760853	173.59.230.214	Alert (Level: Fatal, Description: Certificate Expired)	173.59.230.213	TLSv1.2	61
14	2023-12-01 17:05:31.761189	173.59.230.214	42522 → 5001 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=826093418 TSecr=0 WS=128	173.59.230.213	TCP	74
15	2023-12-01 17:05:31.761267	173.59.230.213	5001 → 42522 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	64
16	2023-12-01 17:05:31.761276	173.59.230.213	5001 → 42518 [FIN, ACK] Seq=2986 Ack=152 Win=2182272 Len=0	173.59.230.214	TCP	54
17	2023-12-01 17:05:31.761986	173.59.230.214	42522 → 5001 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60
18	2023-12-01 17:05:31.761987	173.59.230.214	Client Hello	173.59.230.213	TLSv1.2	198
19	2023-12-01 17:05:31.762799	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLSv1.2	3039
20	2023-12-01 17:05:31.763319	173.59.230.214	42522 → 5001 [ACK] Seq=145 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60
21	2023-12-01 17:05:31.763320	173.59.230.214	42522 → 5001 [ACK] Seq=145 Ack=2986 Win=62720 Len=0	173.59.230.213	TCP	60
22	2023-12-01 17:05:31.764761	173.59.230.214	Alert (Level: Fatal, Description: Certificate Expired)	173.59.230.213	TLSv1.2	61
23	2023-12-01 17:05:31.764762	173.59.230.214	42522 → 5001 [RST, ACK] Seq=152 Ack=2986 Win=64128 Len=0	173.59.230.213	TCP	60
24	2023-12-01 17:05:31.766226	173.59.230.214	42518 → 5001 [RST, ACK] Seq=152 Ack=2987 Win=64128 Len=0	173.59.230.213	TCP	60


Plot 27.WireShark Screenshot - Failed Handshake (WINNF.FT.C.SCS.3)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 50 of 63

A26 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time	☒	☐

Test Plots:

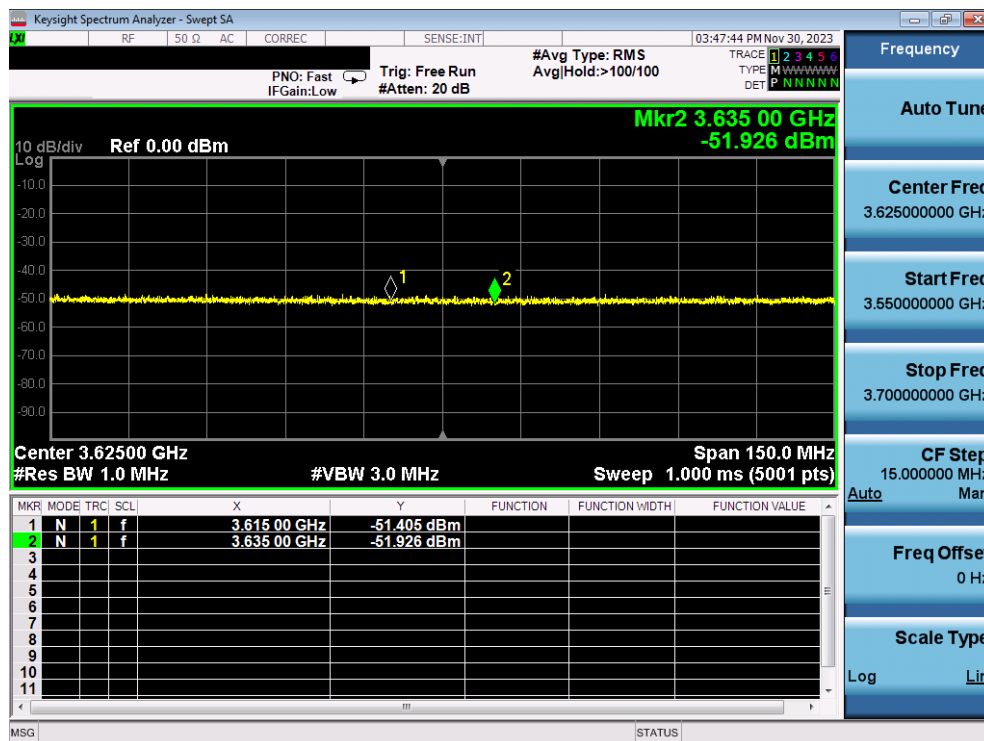

Plot 28. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.4)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 51 of 63



[p.addr == 173.59.230.214]							Expression...	
No.	Time	Source	Info	Destination	Protocol	Length		
31	2023-11-30 20:42:01.533873	173.59.230.214	33324 → 5000 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM=1 TSval=752682864 TSecr=0 WS=128	173.59.230.213	TCP	74		
32	2023-11-30 20:42:01.533211	173.59.230.213	5000 → 33324 [SYN, ACK] Seq=0 Ack=1 Win=5535 Len=0 MSS=1460 WS=256 SACK_PERM=1	173.59.230.214	TCP	66		
33	2023-11-30 20:42:01.533603	173.59.230.214	33324 → 5000 [ACK] Seq=1 Ack=1 Win=64256 Len=0	173.59.230.213	TCP	60		
34	2023-11-30 20:42:01.533604	173.59.230.214	Client Hello	173.59.230.213	TLSv1.2	222		
35	2023-11-30 20:42:01.534829	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLSv1.2	3043		
36	2023-11-30 20:42:01.534517	173.59.230.214	33324 → 5000 [ACK] Seq=169 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60		
37	2023-11-30 20:42:01.534517	173.59.230.214	33324 → 5000 [ACK] Seq=169 Ack=2990 Win=62720 Len=0	173.59.230.213	TCP	60		
38	2023-11-30 20:42:01.534950	173.59.230.214	Alert (Level: Fatal, Description: Unknown CA)	173.59.230.213	TLSv1.2	61		
39	2023-11-30 20:42:01.535157	173.59.230.213	5000 → 33324 [FIN, ACK] Seq=2990 Ack=176 Win=2182272 Len=0	173.59.230.214	TCP	54		
40	2023-11-30 20:42:01.536068	173.59.230.214	33324 → 5000 [RST, ACK] Seq=176 Ack=2991 Win=64128 Len=0	173.59.230.213	TCP	60		


Plot 29.WireShark Screenshot - Failed Handshake (WINNF.FT.C.SCS.4)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 52 of 63

A27 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • CPE UUT shall not transmit RF outside the authorized grant of the associated BTS-CBSD at any time prior	☒	☐

Test Plots:

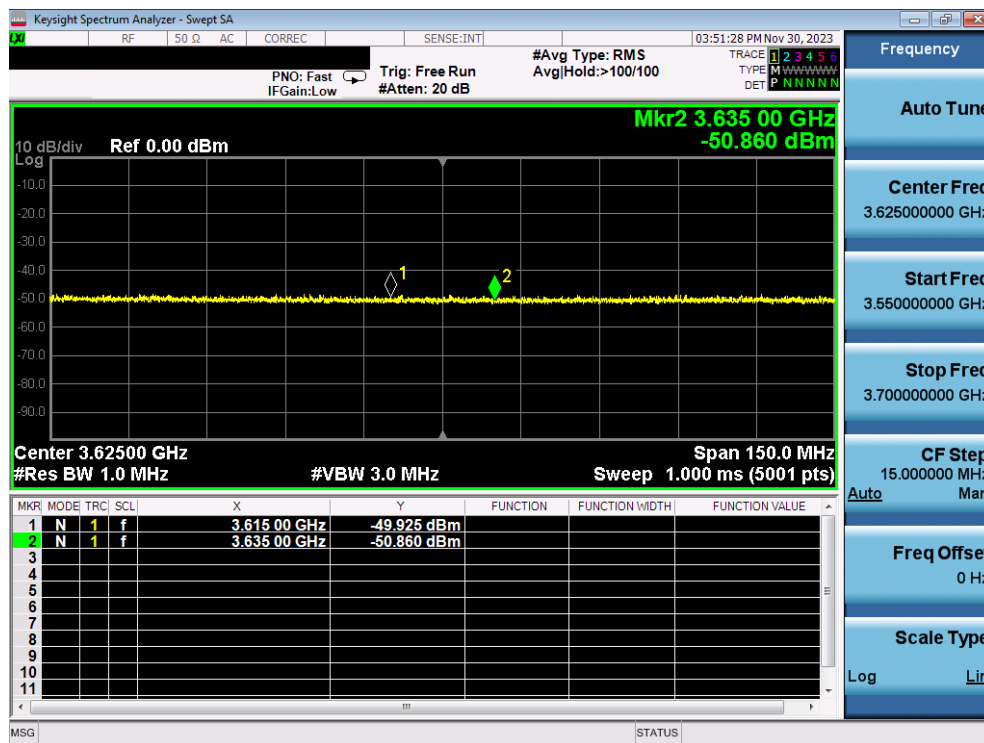

Plot 30. Conducted Measurement – UUT RF transmission range and bandwidths are less or equal to frequency range and bandwidth of compatible BTS-CBSD (WINNF.FT.C.SCS.5)

No.	Time	Source	Info	Destination	Protocol	Length
223	2023-11-30 20:45:24.578666	173.59.230.214	38834 → 5000 [SYN] Seq=0 Win=64248 Len=0 MSS=1468 SACK_PERM=1 TSval=752885989 TSecr=0 WS=128	173.59.230.213	TCP	74
224	2023-11-30 20:45:24.578938	173.59.230.213	5000 → 38834 [SYN, ACK] Seq=0 Ack=1 Win=55335 Len=0 MSS=1468 WS=256 SACK_PERM=1	173.59.230.214	TCP	66
225	2023-11-30 20:45:24.571499	173.59.230.214	38834 → 5000 [ACK] Seq=1 Win=64256 Len=0	173.59.230.213	TCP	60
226	2023-11-30 20:45:24.571491	173.59.230.214	Client Hello	173.59.230.213	TLSv1.2	222
227	2023-11-30 20:45:24.572628	173.59.230.213	Server Hello, Certificate, Certificate Request, Server Hello Done	173.59.230.214	TLSv1.2	3838
228	2023-11-30 20:45:24.573200	173.59.230.214	38834 → 5000 [ACK] Seq=169 Ack=1461 Win=64128 Len=0	173.59.230.213	TCP	60
229	2023-11-30 20:45:24.573281	173.59.230.214	38834 → 5000 [ACK] Seq=169 Ack=2985 Win=62720 Len=0	173.59.230.213	TCP	60
230	2023-11-30 20:45:24.574500	173.59.230.214	Alert (Level: Fatal, Description: Decrypt Error)	173.59.230.213	TLSv1.2	61
231	2023-11-30 20:45:24.575093	173.59.230.214	38834 → 5000 [RST, ACK] Seq=176 Ack=2985 Win=64128 Len=0	173.59.230.213	TCP	60

Plot 31. WireShark Screenshot - Failed Handshake (WINNF.FT.C.SCS.5)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 53 of 63

A28 [WINNF.PT.C.HBT.1] UUT RF Transmit Power Measurement

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT has registered with the SAS, with CBSID = C • UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i>	--	--
2	UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows: • UUT sends Heartbeat Request, including: - o cbsid = C - o grantId = G • SAS Test Harness responds with Heartbeat Response, including: - o cbsid = C - o grantId = G - o transmitExpireTime = current UTC time + 200 seconds - o responseCode = 0	--	--
3	Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method. <i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i>	☒	☐

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 54 of 63

RF Power Measurements:

Testing is performed per KDB 971168 D01 and across the transmit dynamic range of 37dBm/MHz to 27dBm/MHz for 20MHz Bandwidth.


EIRP PSD is found by adding directional antenna gain to the conducted PSD level.

Frequency [MHz]	Antenna 1 Conducted PSD [dBm/MHz]	Antenna 2 Conducted PSD [dBm/MHz]	MIMO Conducted PSD [dBm/MHz]	Directional Antenna Gain [dBi]	EIRP Density [dBm/MHz]	SAS Granted EIRP [dBm/MHz]	Margin [dB]
3625	12.82	11.52	15.23	13.00	28.23	37.00	-8.77
	9.02	6.77	11.05	13.00	24.05	32.00	-7.95
	3.79	3.20	6.51	13.00	19.51	27.00	-7.49


Table 7-1 RF Output Power Measurements (WINNF.PT.C.HBT.1)

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 55 of 63

Test Plots:

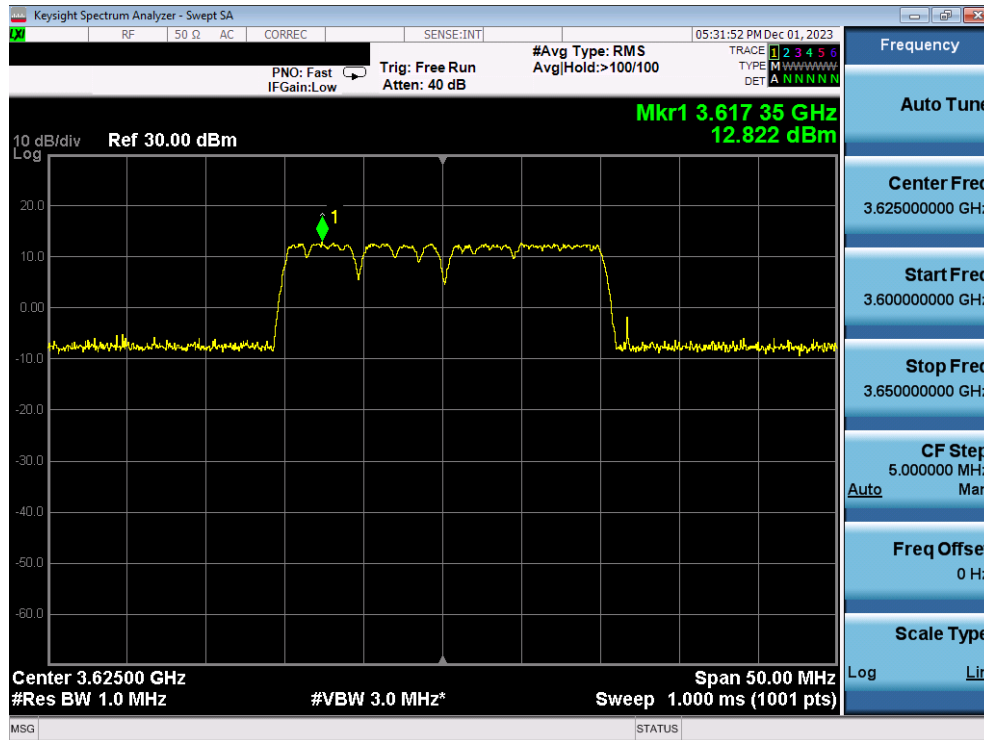


Plot 32. Conducted PSD, SAS Granted maxEIRP 37 – ANT1

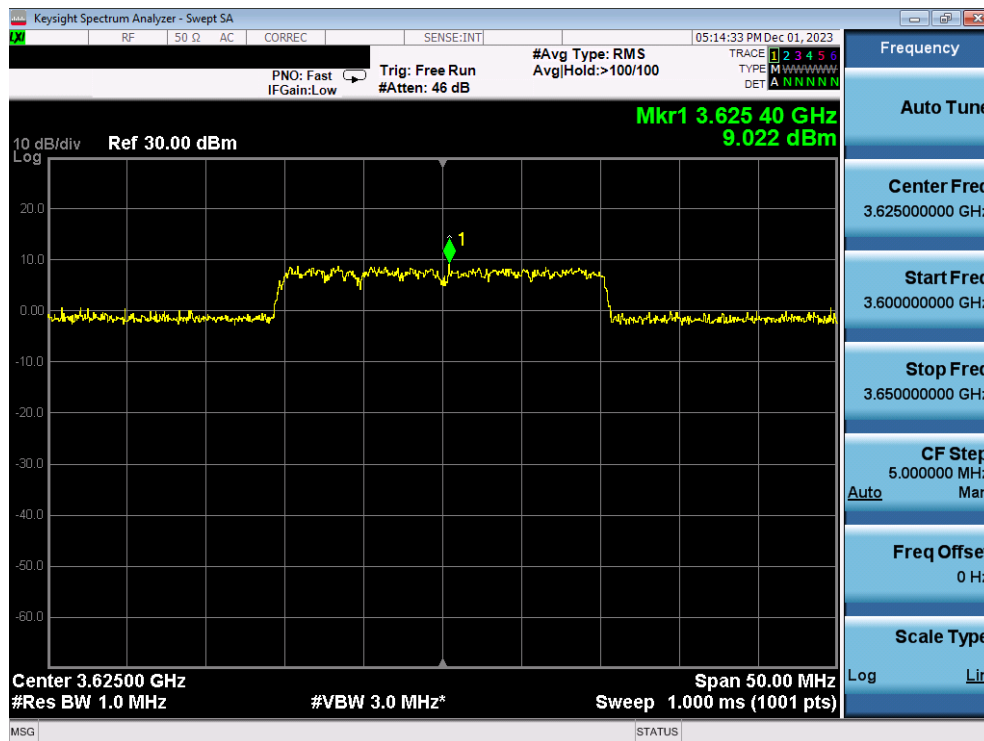


Plot 33. Conducted PSD, SAS Granted maxEIRP 32 – ANT1

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 56 of 63

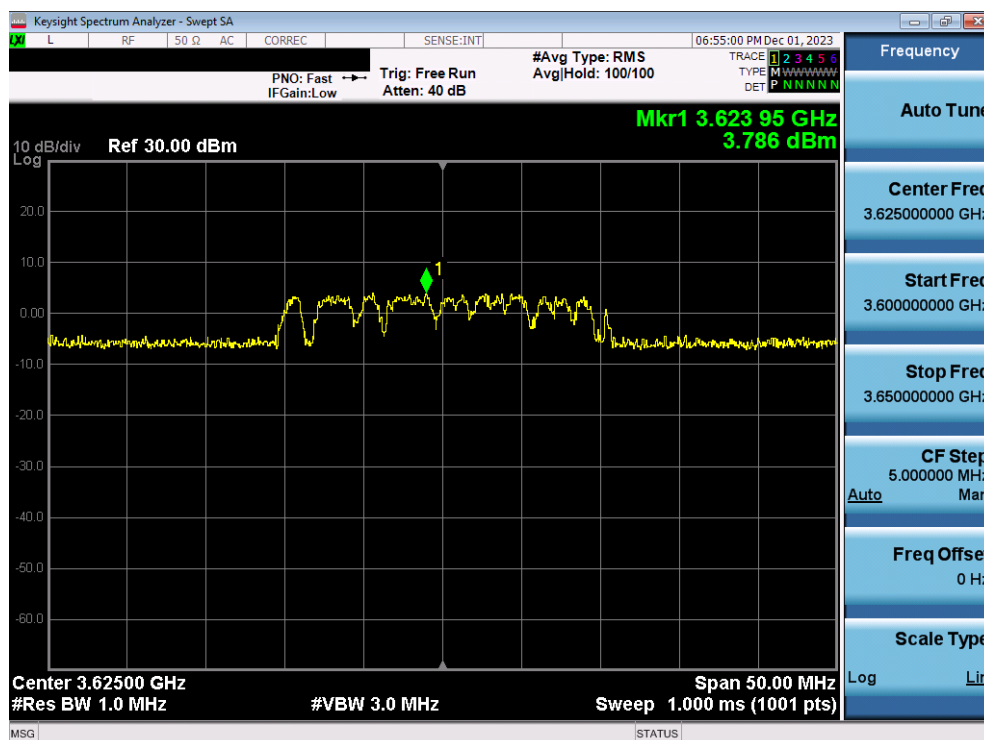


Plot 34. Conducted PSD, SAS Granted maxEIRP 27 – ANT1

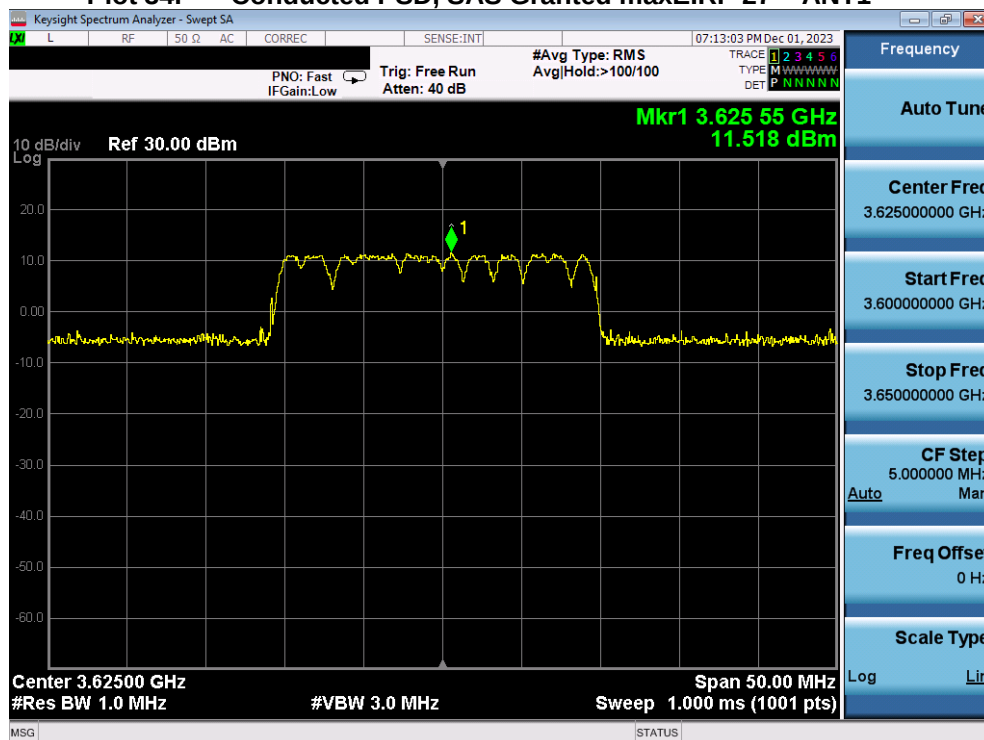


Plot 35. Conducted PSD, SAS Granted maxEIRP 37 – ANT2

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 57 of 63

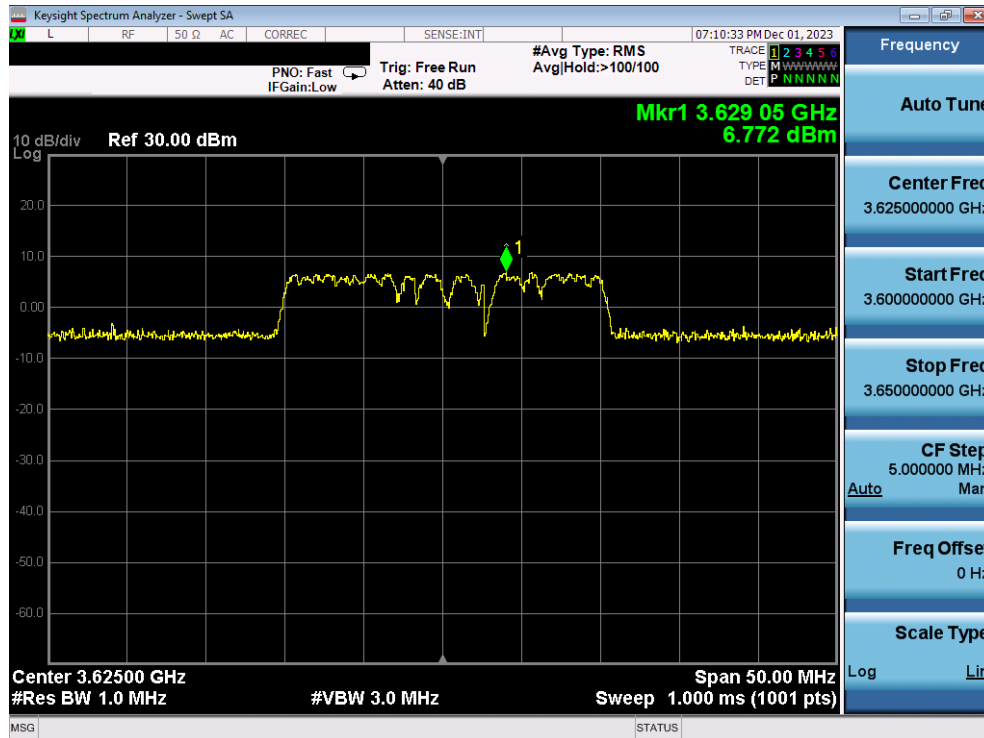

Plot 36. Conducted PSD, SAS Granted maxEIRP 32 – ANT2

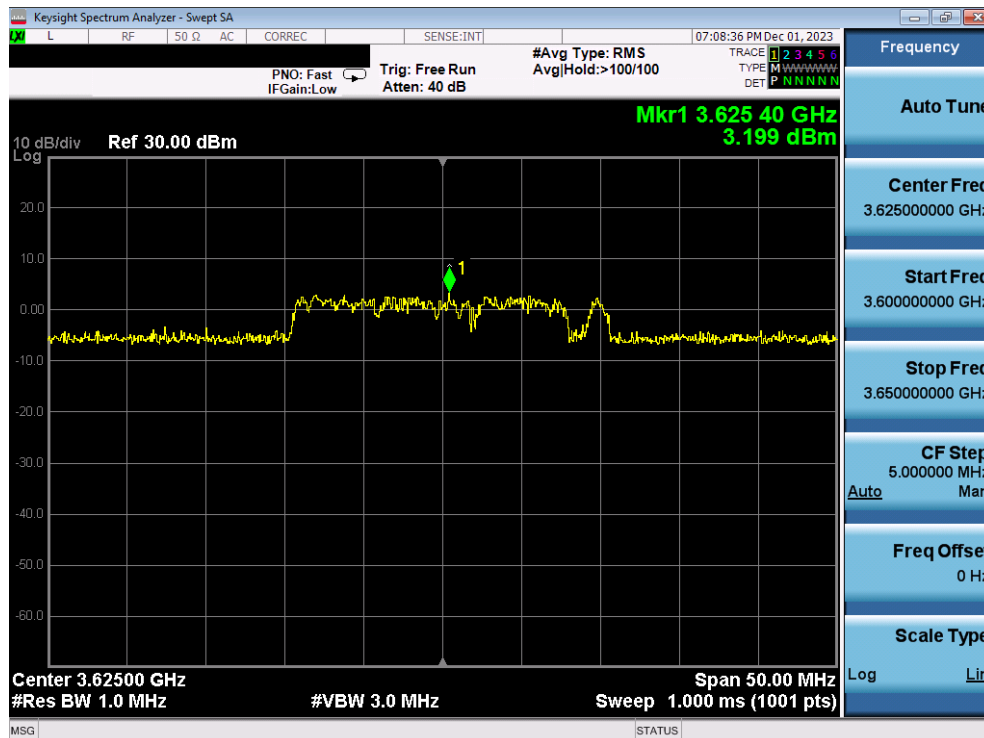

Plot 37. Conducted PSD, SAS Granted maxEIRP 27 – ANT2


FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 58 of 63

A29 CPE-CBSD Initial SAS Communications Duty Cycle (X of Y)

Testing is performed per WINNF-19-IN-00033 CBRS CPE CBSD as UUT Test Guidelines. Using a spectrum analyzer, time domain sweeps were performed at each time duration: 10s, 300s, and 3600s.


Due to limitations in the measurement equipment's available number of sweep points, observing the 3600s period with a single sweep overestimates the true value for time over 23dBm, as one sweep point is notably longer than the portion of the time the transmission is over 23dBm. A 3600s sweep was performed to determine the maximum number of connection attempts in 3600s, and a zoomed in 100s sweep was performed to more accurately represent the amount of time over 23dBm in one connection attempt.

Time allowed per KDB	Aggregate amount of time >23dB,
1s of 10s period	0.013s
10s of 300s period	3.153s
20s of 3600s period	10.500s

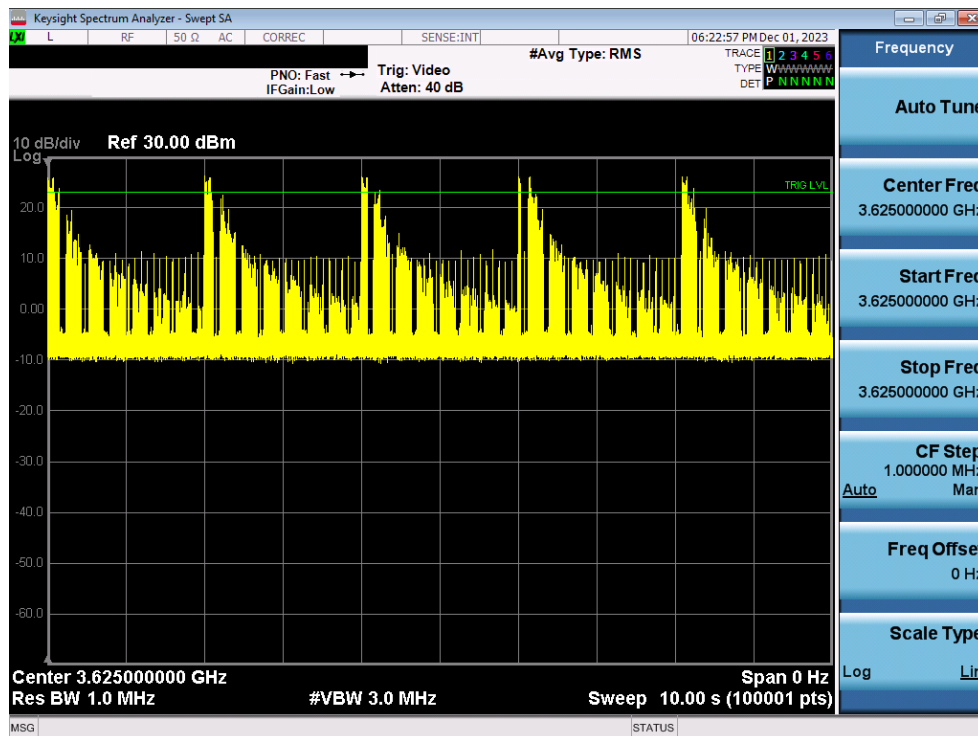


Plot 38. 10s Time Domain Sweep

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 59 of 63

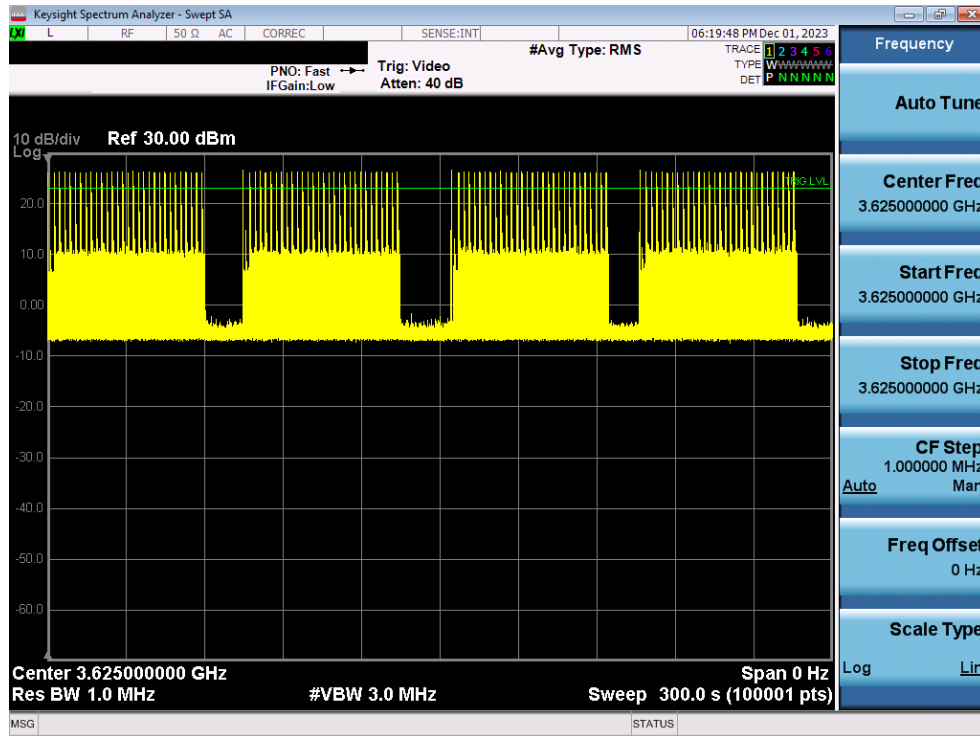


Plot 39. 300s Time Domain Sweep

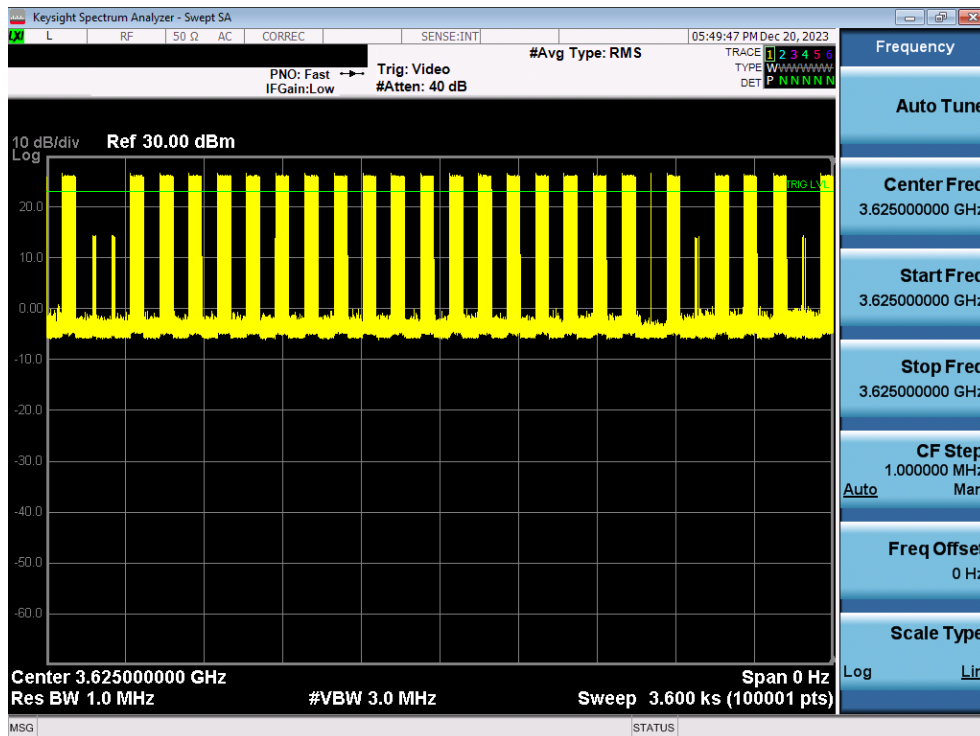

Plot 40. 3600s Time Domain Sweep

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 60 of 63

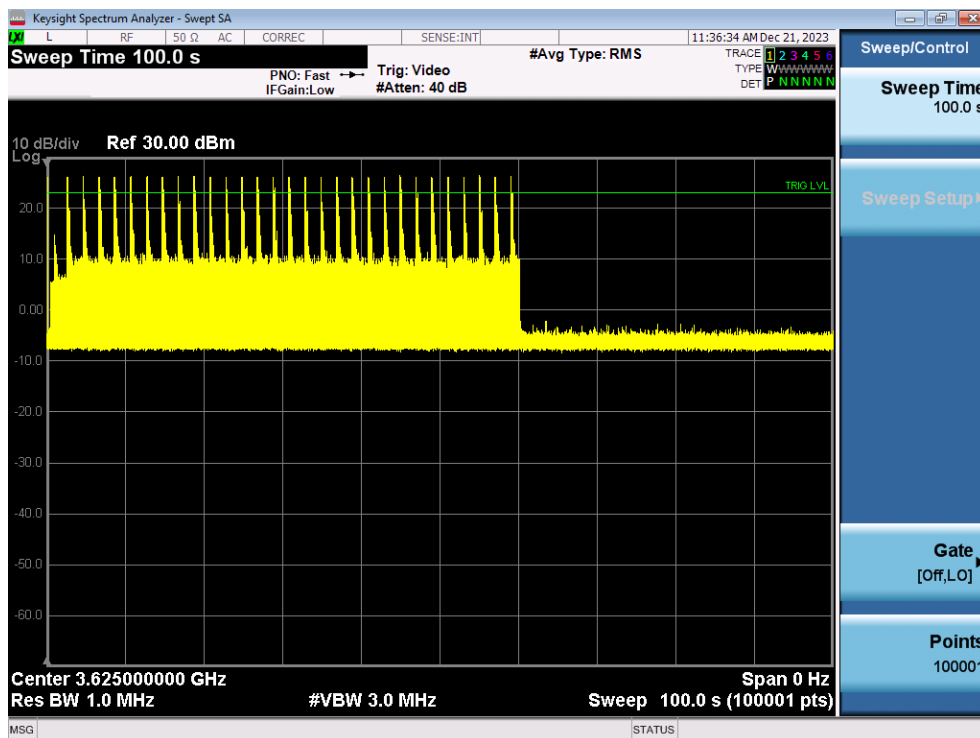

Plot 41. 100s Time Domain Sweep

FCC ID: 2AS22-FLCOCH2	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 61 of 63

APPENDIX B – TEST LOGS

Logs are available upon request

FCC ID: 2AS22-FLCOCH2		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2401230005-03.2AS22	Test Dates: 11/29/23 – 9/3/2024	EUT Type: CBRS CPE	Page 62 of 63	