

TEST REPORT

Applicant: SG Wireless Limited
Address: Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan, New Territories, Hong Kong
Equipment Type: F1 Smart Module
Model Name: SGW3201
Brand Name: SG Wireless
FCC ID: 2AS9408
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: Sep. 23, 2024
Test Date: Nov. 06, 2024 - May 16, 2025
Date of Issue: Jun. 19, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li Ganming

Checked by: Ye Hongji

Approved by: Sunny Zou
(Technical Director)

Li Ganming

Ye Hongji

Sunny Zou

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jun. 19, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments.....	9
4.2	Test Equipment List.....	9
4.3	Measurement Uncertainty.....	10
4.4	Description of Test Setup	10
4.5	Measurement Results Explanation Example.....	13
5	TEST ITEMS	14
5.1	Antenna Requirements	14
5.2	Output Power	15
5.3	Occupied Bandwidth.....	17
5.4	Conducted Spurious Emission.....	18
5.5	Band Edge (Authorized-band band-edge).....	20
5.6	Conducted Emission.....	22

5.7	Radiated Spurious Emission.....	23
5.8	Band Edge (Restricted-band band-edge).....	25
5.9	Power Spectral density (PSD)	26
ANNEX A	TEST RESULT	27
A.1	Output Power	27
A.2	Occupied Bandwidth.....	29
A.3	Conducted Spurious Emissions	31
A.4	Band Edge (Authorized-band band-edge).....	34
A.5	Conducted Emissions	35
A.6	Radiated Spurious Emission.....	37
A.7	Band Edge (Restricted-band band-edge).....	47
A.8	Power Spectral Density (PSD).....	49
ANNEX B	TEST SETUP PHOTOS	50
ANNEX C	EUT EXTERNAL PHOTOS.....	50
ANNEX D	EUT INTERNAL PHOTOS.....	50

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SG Wireless Limited
Address	Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan, New Territories, Hong Kong

2.2 Manufacturer Information

Manufacturer	SG Wireless Limited
Address	Unit 4, 5/F, Sun Fung Industrial Building, 8 Ma Kok Street, Tsuen Wan, New Territories, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	F1 Smart Module
Model Name Under Test	SGW3201
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	1.2.3
Software Version	B0.2.0b0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BLE) WIFI 802.11b, 802.11g, 802.11n(HT20/40) LoRa
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS
Modulation Type	LoRa
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Frequency Range	The frequency range used is 902.3 MHz to 914.9 MHz; The frequency block is 902 MHz - 928 MHz.
Number of Channel	64
Tested Channel	1 (902.3 MHz), 33 (908.7MHz), 64 (914.9MHz)
Antenna Type	Monopole Antenna (External)
Antenna Gain	2.0 dBi
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	902.3	33	908.7
2	902.5	34	908.9
3	902.7	35	909.1
4	902.9	36	909.3
5	903.1	37	909.5
6	903.3	38	909.7
7	903.5	39	909.9
8	903.7	40	910.1
9	903.9	41	910.3
10	904.1	42	910.5
11	904.3	43	910.7
12	904.5	44	910.9
13	904.7	45	911.1
14	904.9	46	911.3
15	905.1	47	911.5
16	905.3	48	911.7
17	905.5	49	911.9
18	905.7	50	912.1
19	905.9	51	912.3
20	906.1	52	912.5
21	906.3	53	912.7

22	906.5	54	912.9
23	906.7	55	913.1
24	906.9	56	913.3
25	907.1	57	913.5
26	907.3	58	913.7
27	907.5	59	913.9
28	907.7	60	914.1
29	907.9	61	914.3
30	908.1	62	914.5
31	908.3	63	914.7
32	908.5	64	914.9

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note}
2	Output Power	15.247(b)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	ANNEX A.8	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note²: Compared with the EUT of test report BL-SZ2430170-603, the changes of the EUT of this report as below:

1. With different model name.
2. Remove the LTE chip and security IC.

Other hardware circuit and software are the same as EUT referred in test report BL-SZ2430170-603.

Therefore, just Output Power, Radiated Spurious Emission and Band Edge(Restricted-band band-edge) was retested in this report, others test data please refer to report BL-SZ2430170-603, which was issued by Shenzhen BALUN Technology Co., Ltd. on Aug. 13, 2024.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	40% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.8°C to +26.1°C
Working Voltage of the EUT	NV (Normal Voltage)	5.0 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2024.05.22	2025.05.21
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB- 180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2024.07.28	2027.07.27
Amplifier	COM-MV	LSCX_LNA 1-12G-01	7210214	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7- 18G-01	7210209	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2023.12.06	2024.12.05
				2024.12.05	2025.12.04

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

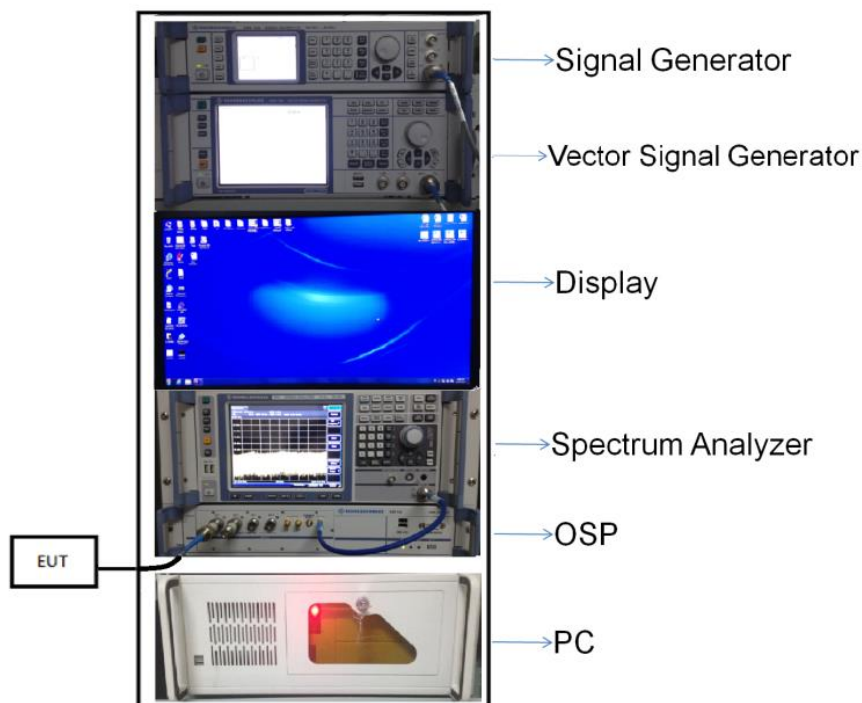


(Diagram 1)

4.4.2 For AC Power Supply Port Test

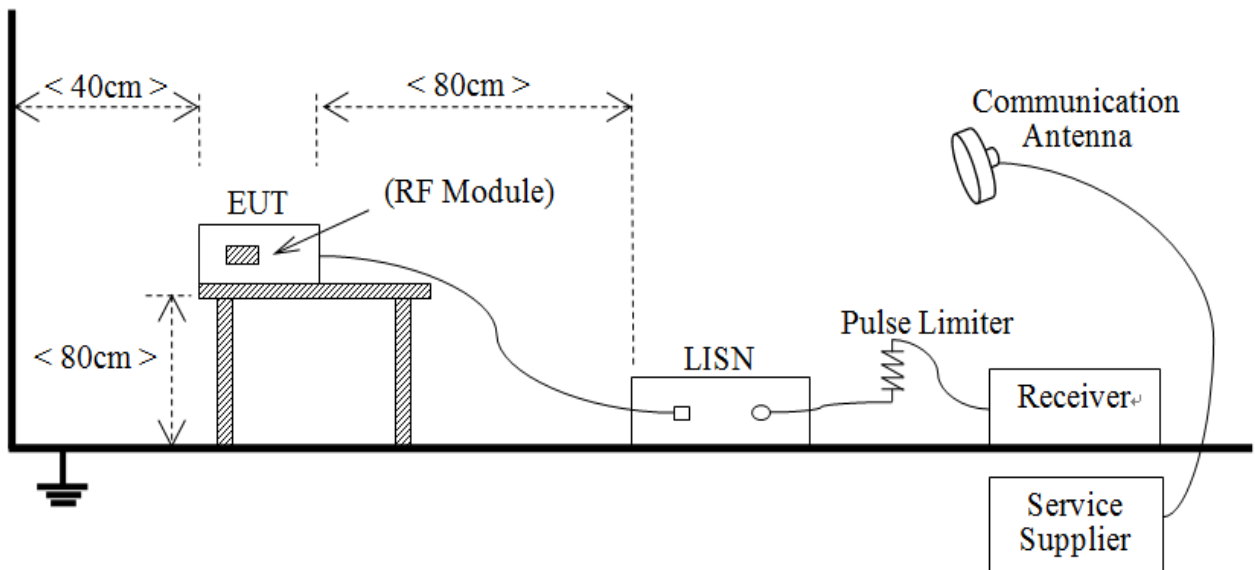


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

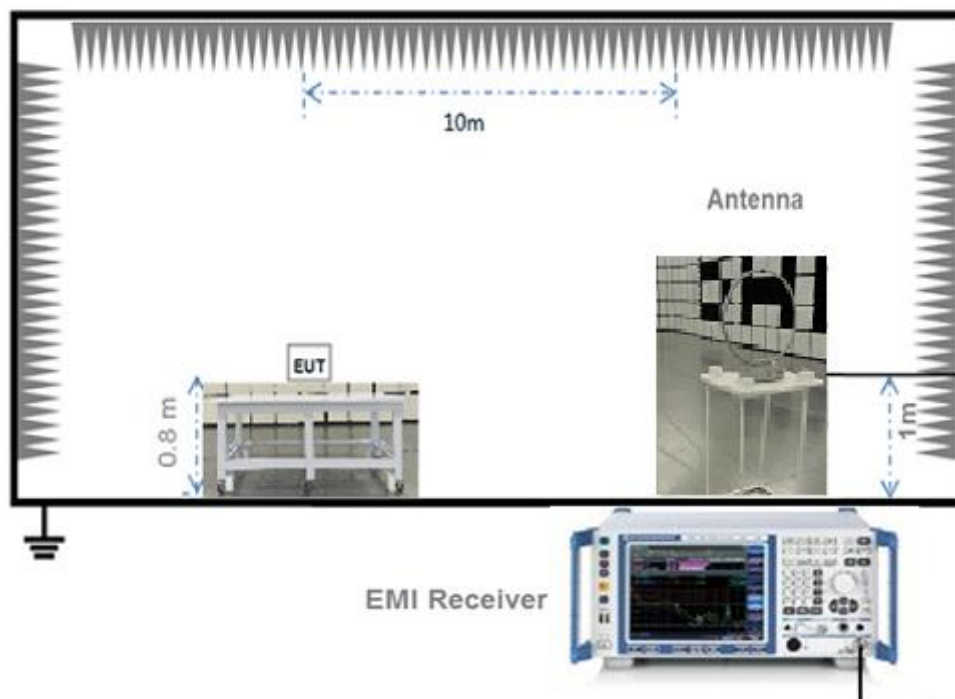


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

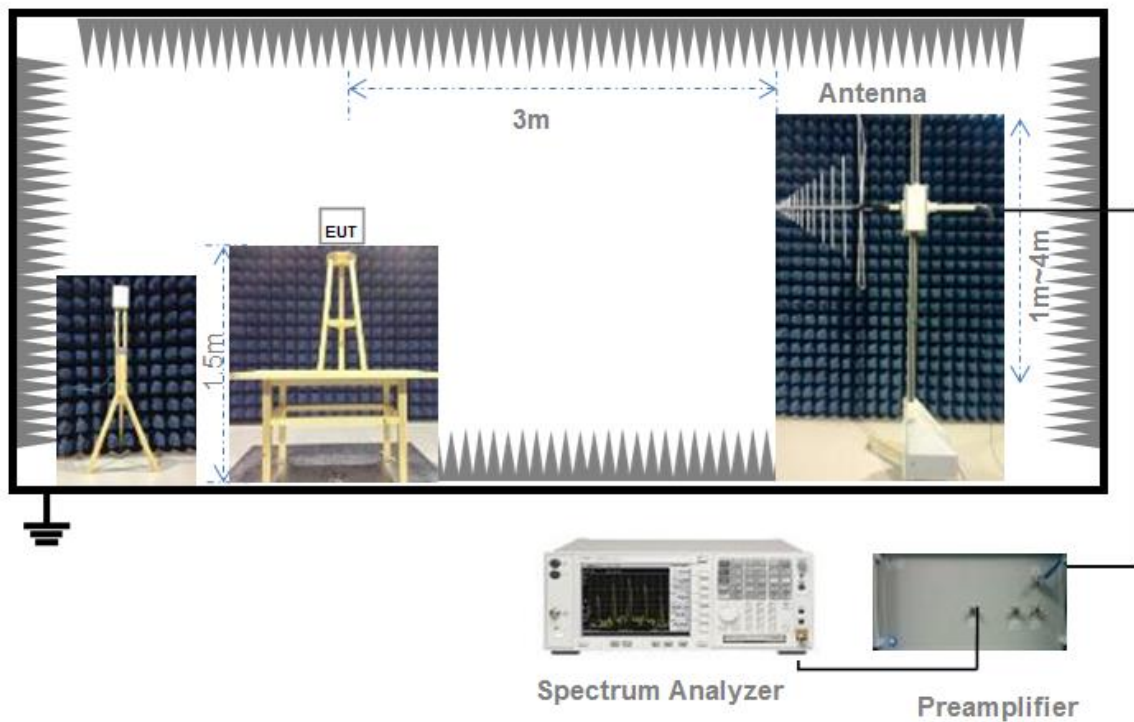

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

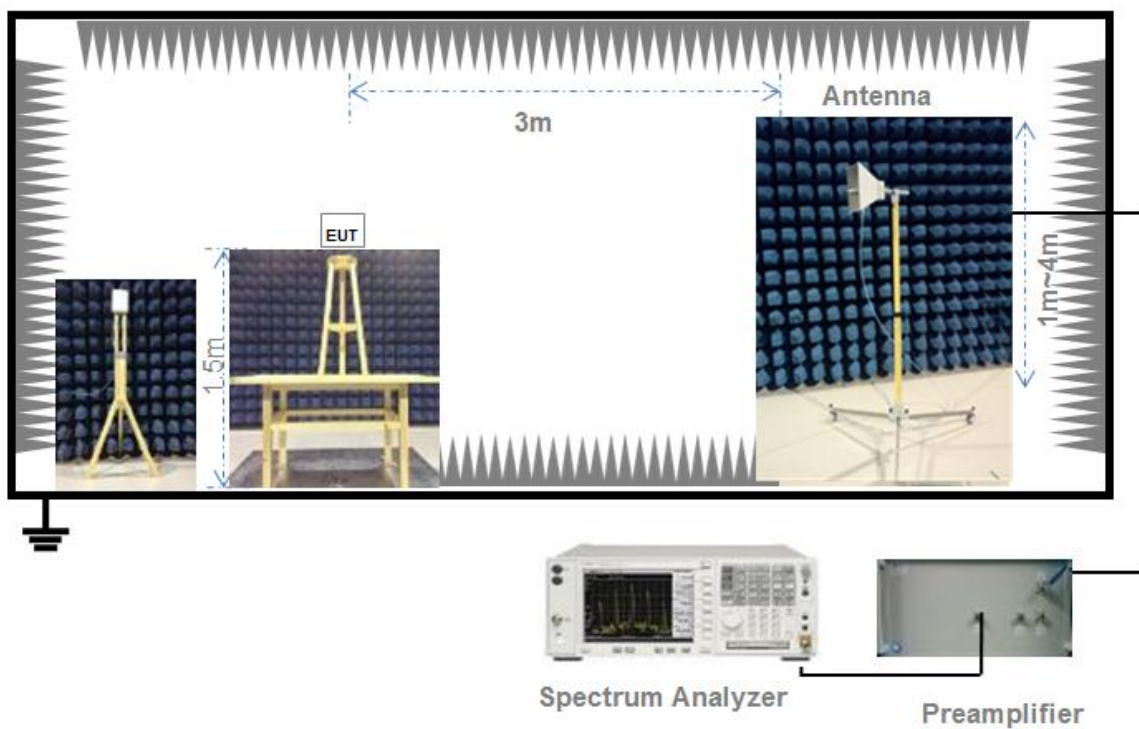

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the $RBW \geq DTS$ bandwidth.

Set $VBW \geq 3 \times RBW$.

Set span $\geq 3 \times RBW$

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT


A.1 Output Power

Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	19.28	84.64	30	1000	Pass
Middle	19.37	86.46			Pass
High	19.16	82.43			Pass

Test Plots


LOW CHANNEL

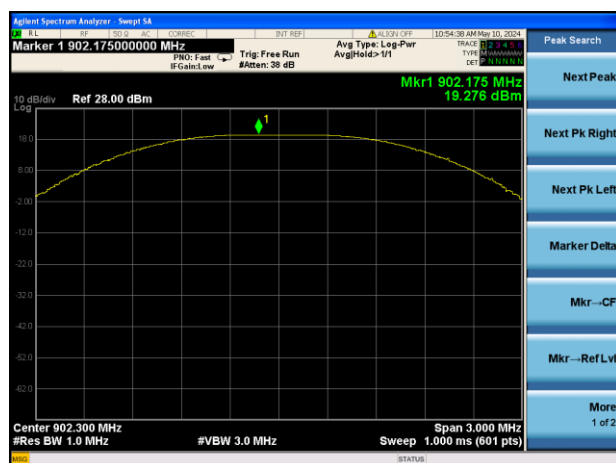

MIDDLE CHANNEL

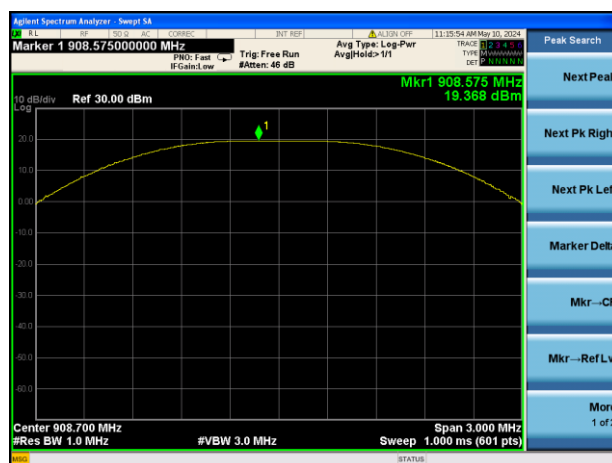

HIGH CHANNEL

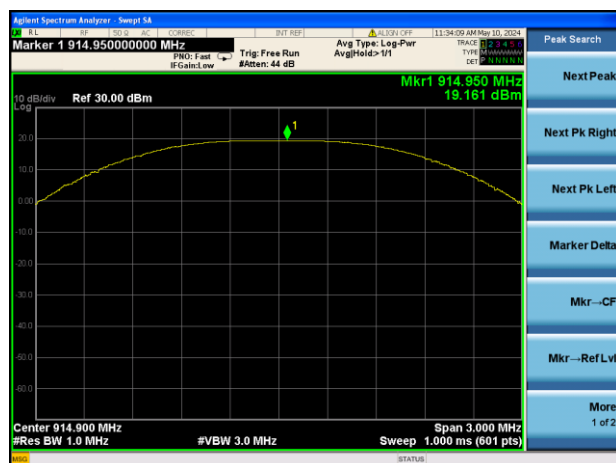


SGW3201 data:


Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	19.35	86.14	30	1000	Pass
Middle	19.23	83.81			Pass
High	19.08	80.91			Pass

Test Plots


LOW CHANNEL

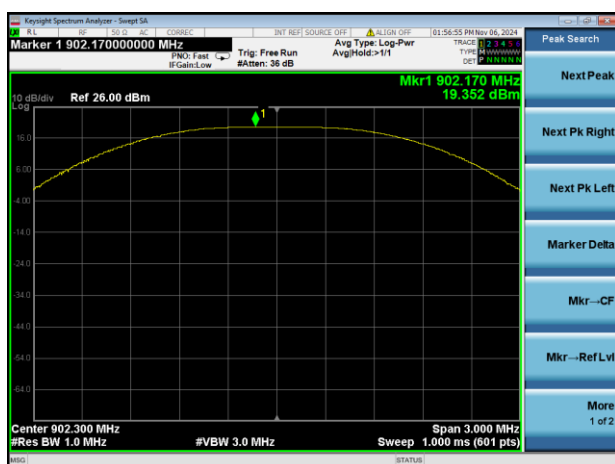

MIDDLE CHANNEL

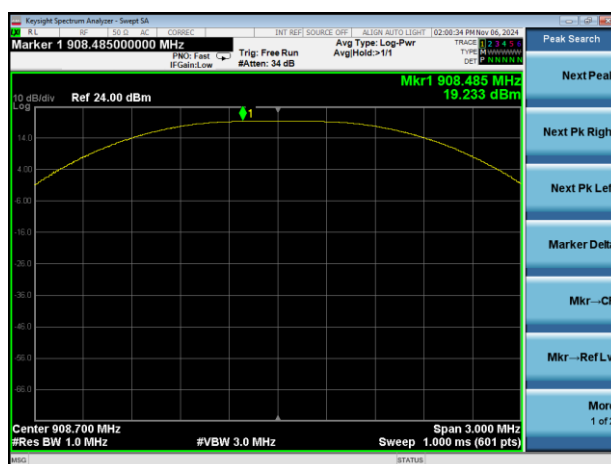

HIGH CHANNEL

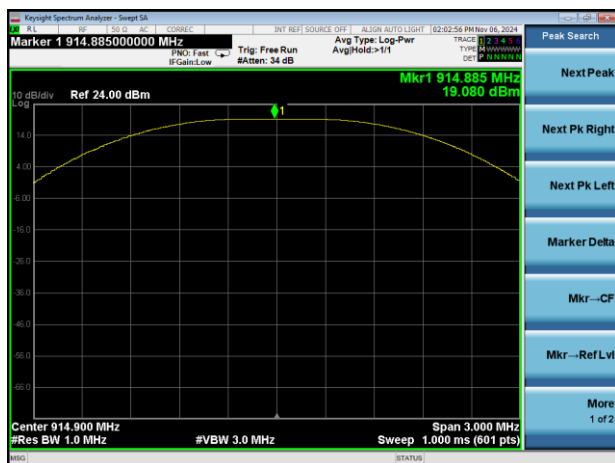

A.2 Occupied Bandwidth

Test Data

Test Mode	LoRa		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	592.470	520.330	≥500
Middle Channel	581.240	518.780	≥500
High Channel	600.040	524.590	≥500

Test Plots

6 dB Bandwidth


LOW CHANNEL






MIDDLE CHANNEL



HIGH CHANNEL

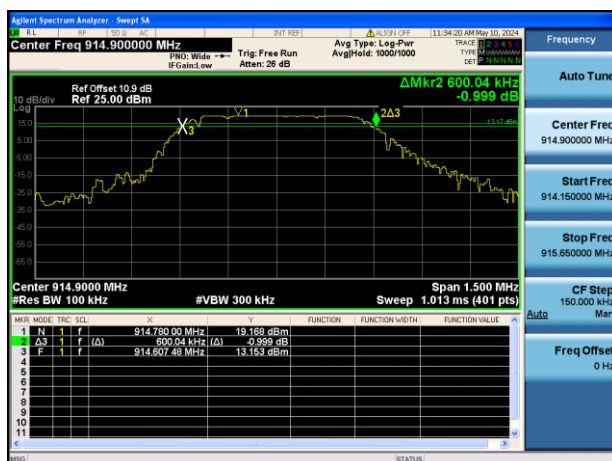

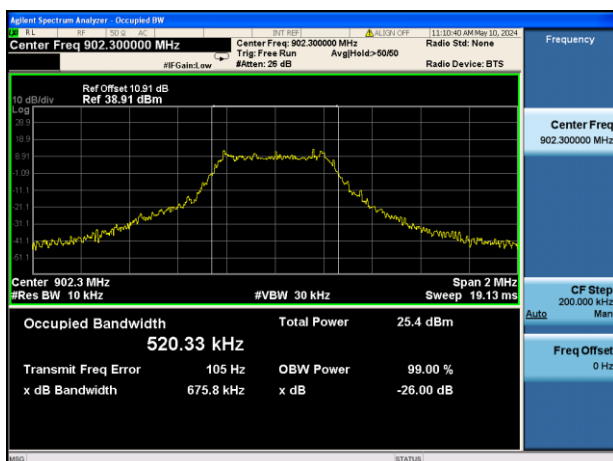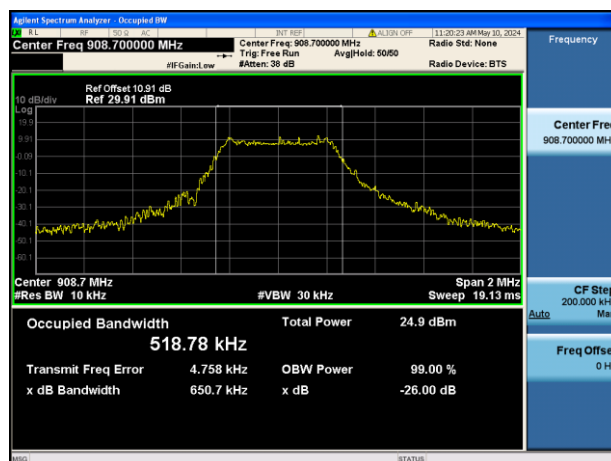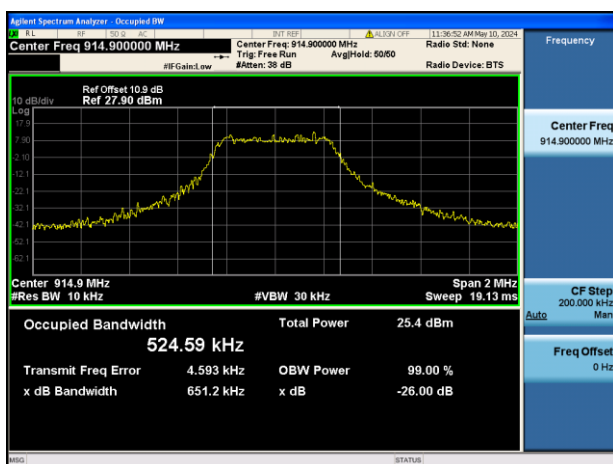99% Bandwidth**LOW CHANNEL****MIDDLE CHANNEL****HIGH CHANNEL**


A.3 Conducted Spurious Emissions

Test Data


LoRa				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-29.14	19.37	-0.63	Pass
Middle	-29.73	19.37	-0.63	Pass
High	-25.44	19.23	-0.77	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL

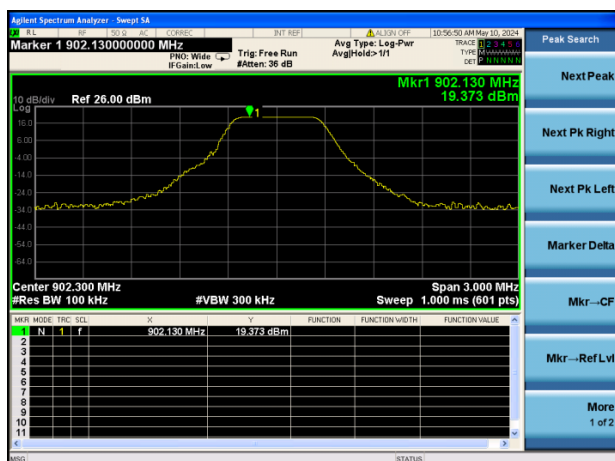


LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

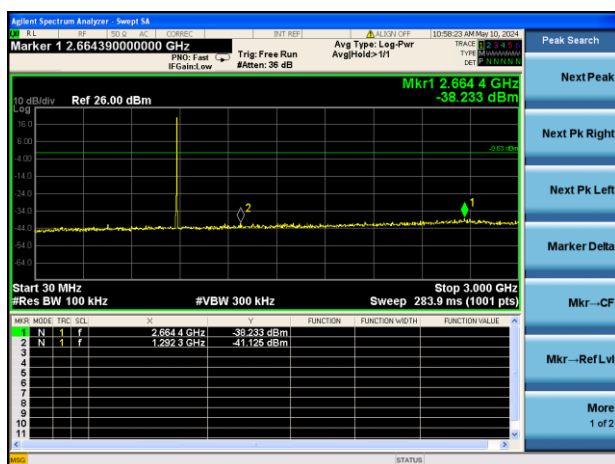


LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

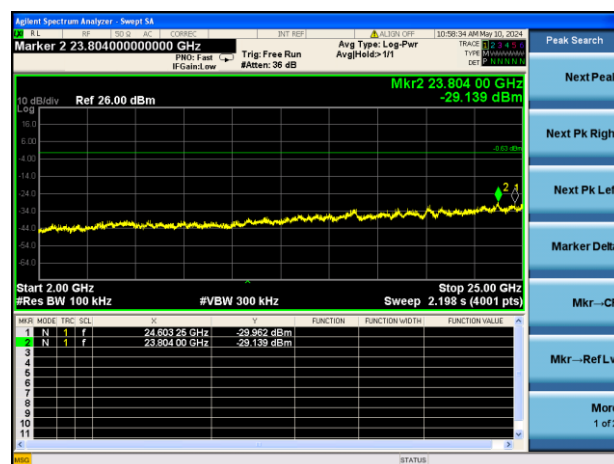


MIDDLE CHANNEL, CARRIER LEVEL

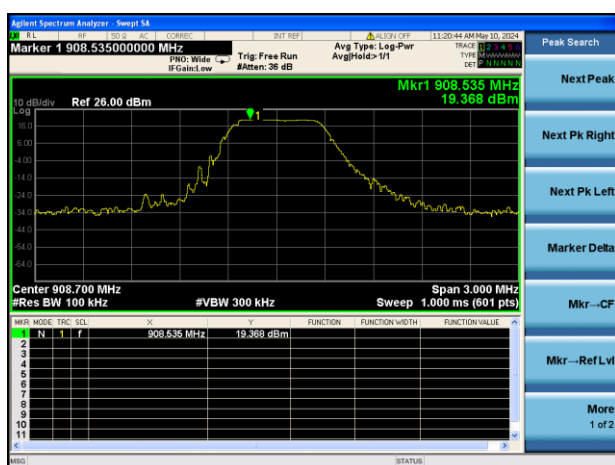


MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

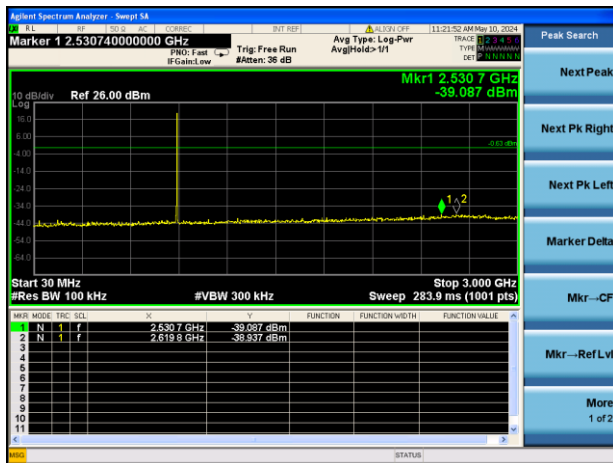


MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

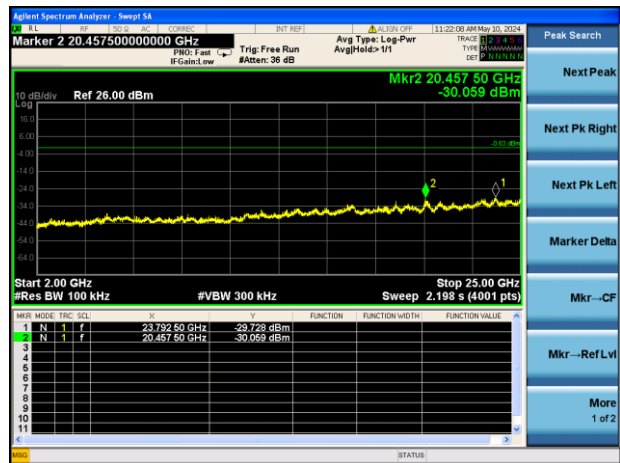


HIGH CHANNEL, CARRIER LEVEL

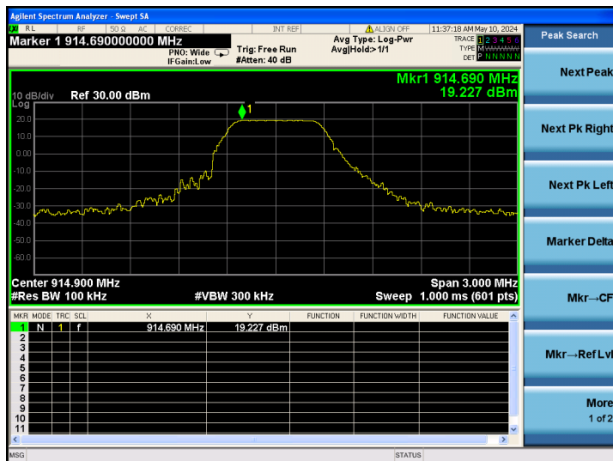

HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

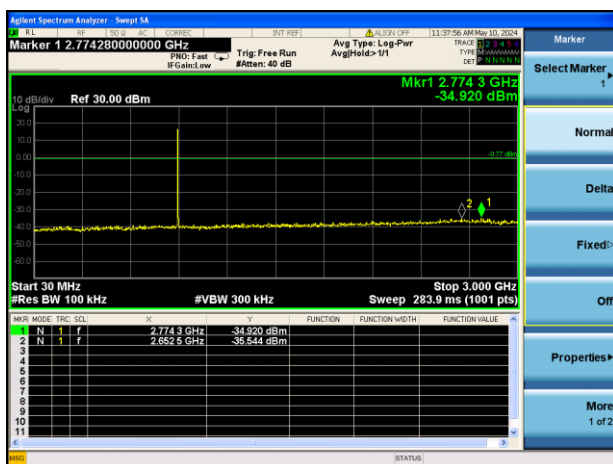

HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

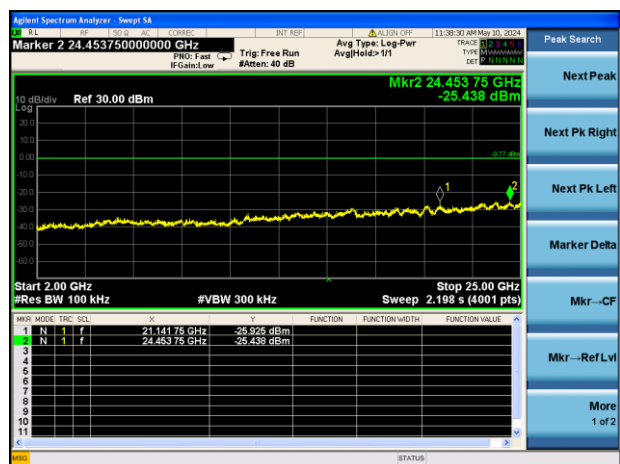

A.4 Band Edge (Authorized-band band-edge)

Note1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note2: Band-edge test alternative: $RBW=3\text{kHz}$ result = test value + $10\log(100\text{kHz}/3\text{kHz})$

Test Data


LoRa					
Channel	Measured Max. Band Edge Emission (dBm/3kHz)	Max. Band Edge Emission (dBm/100kHz)	Limit (dBm)		Verdict
			Carrier Level	Calculated 20 dBc Limit	
Low Channel	-18.26	-3.03	19.37	-0.63	Pass
High Channel	-64.74	-49.51	19.23	-0.77	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL

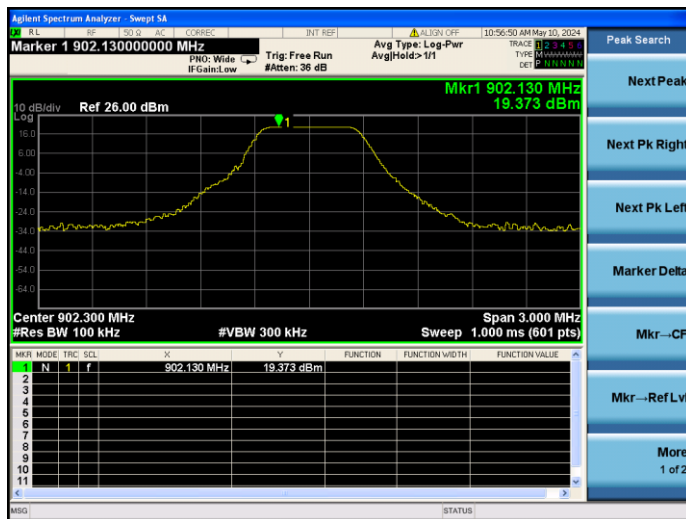


LOW CHANNEL, BAND EDGE

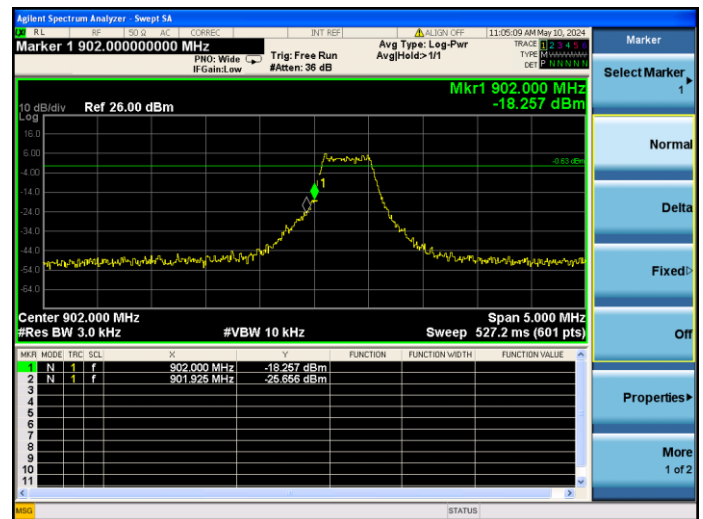

HIGH CHANNEL, CARRIER LEVEL

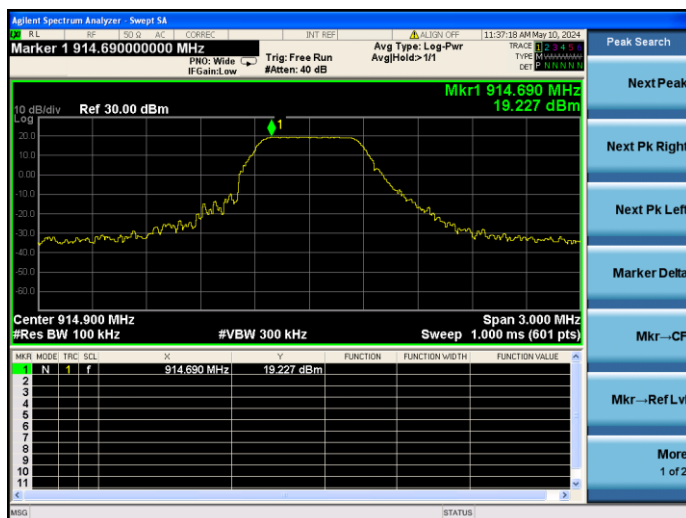

HIGH CHANNEL, BAND EDGE

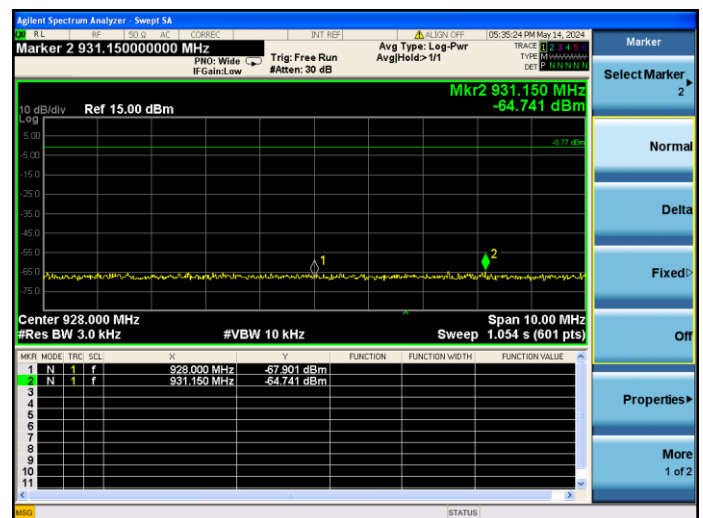

A.5 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

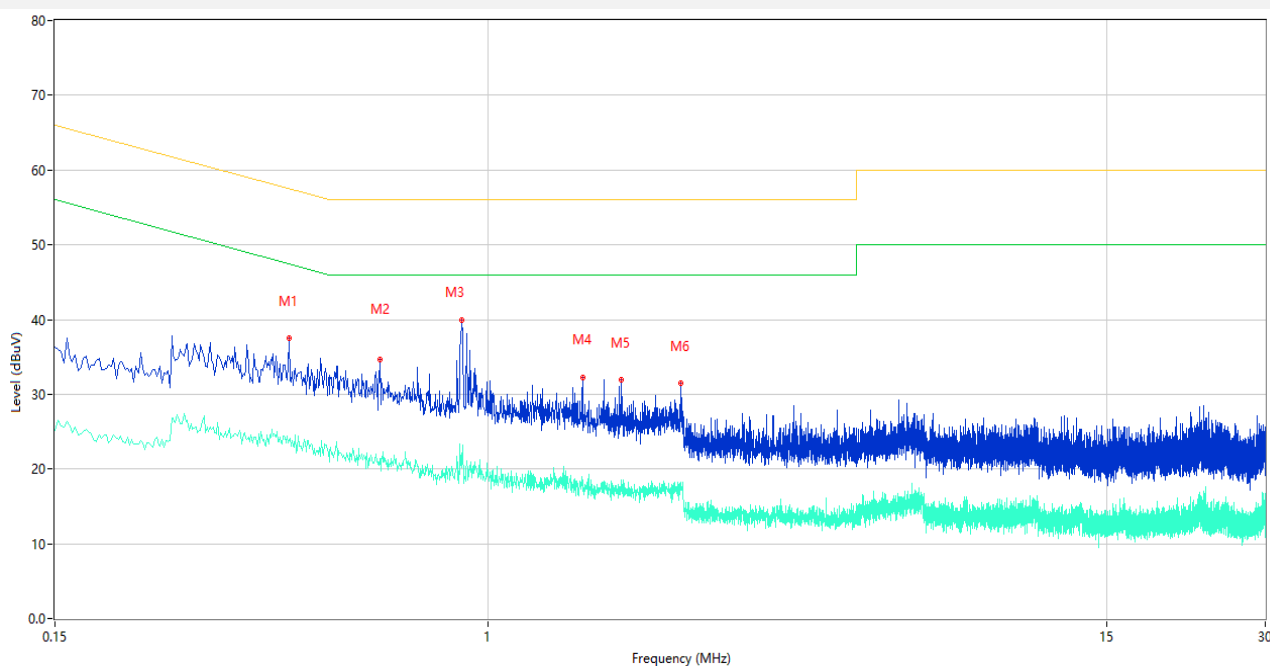

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.418	37.48	9.98	57.49	20.01	Peak	L	Pass
1**	0.418	23.86	9.98	47.49	23.63	AV	L	Pass
2	0.622	34.69	9.84	56.00	21.31	Peak	L	Pass
2**	0.622	21.33	9.84	46.00	24.67	AV	L	Pass
3	0.892	39.89	9.41	56.00	16.11	Peak	L	Pass
3**	0.892	21.05	9.41	46.00	24.95	AV	L	Pass
4	1.514	32.31	9.66	56.00	23.69	Peak	L	Pass
4**	1.514	18.50	9.66	46.00	27.50	AV	L	Pass
5	1.792	31.93	9.57	56.00	24.07	Peak	L	Pass
5**	1.792	18.49	9.57	46.00	27.51	AV	L	Pass
6	2.326	31.46	9.71	56.00	24.54	Peak	L	Pass
6**	2.326	18.12	9.71	46.00	27.88	AV	L	Pass

PHASE N

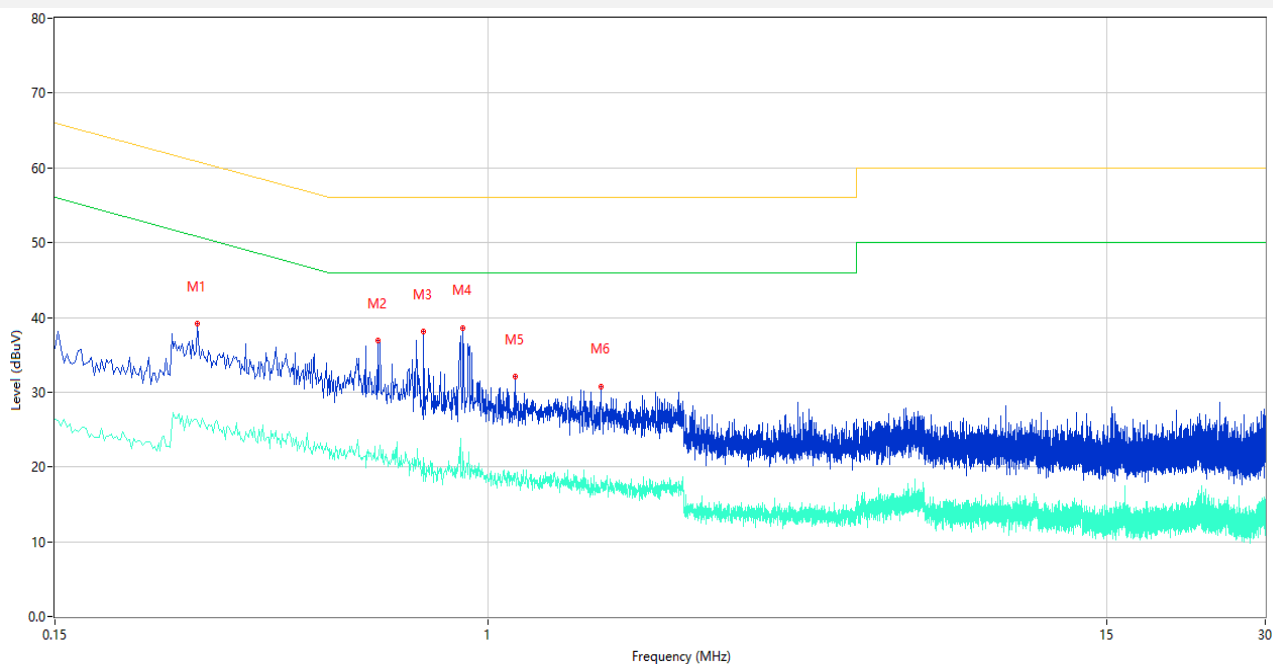

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.280	39.18	9.43	60.82	21.64	Peak	N	Pass
1**	0.280	26.29	9.43	50.82	24.53	AV	N	Pass
2	0.616	36.92	9.89	56.00	19.08	Peak	N	Pass
2**	0.616	21.43	9.89	46.00	24.57	AV	N	Pass
3	0.754	38.05	9.34	56.00	17.95	Peak	N	Pass
3**	0.754	21.22	9.34	46.00	24.78	AV	N	Pass
4	0.896	38.64	9.36	56.00	17.36	Peak	N	Pass
4**	0.896	22.02	9.36	46.00	23.98	AV	N	Pass
5	1.126	32.07	9.67	56.00	23.93	Peak	N	Pass
5**	1.126	18.88	9.67	46.00	27.12	AV	N	Pass
6	1.638	30.80	9.79	56.00	25.20	Peak	N	Pass
6**	1.638	17.97	9.79	46.00	28.03	AV	N	Pass

A.6 Radiated Spurious Emission

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note ⁴: The marked spikes near 900 MHz with circle should be ignored because they are Fundamental signal.

Test Data and Plots

LOW CHANNEL, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.249_30MHz-1GHz

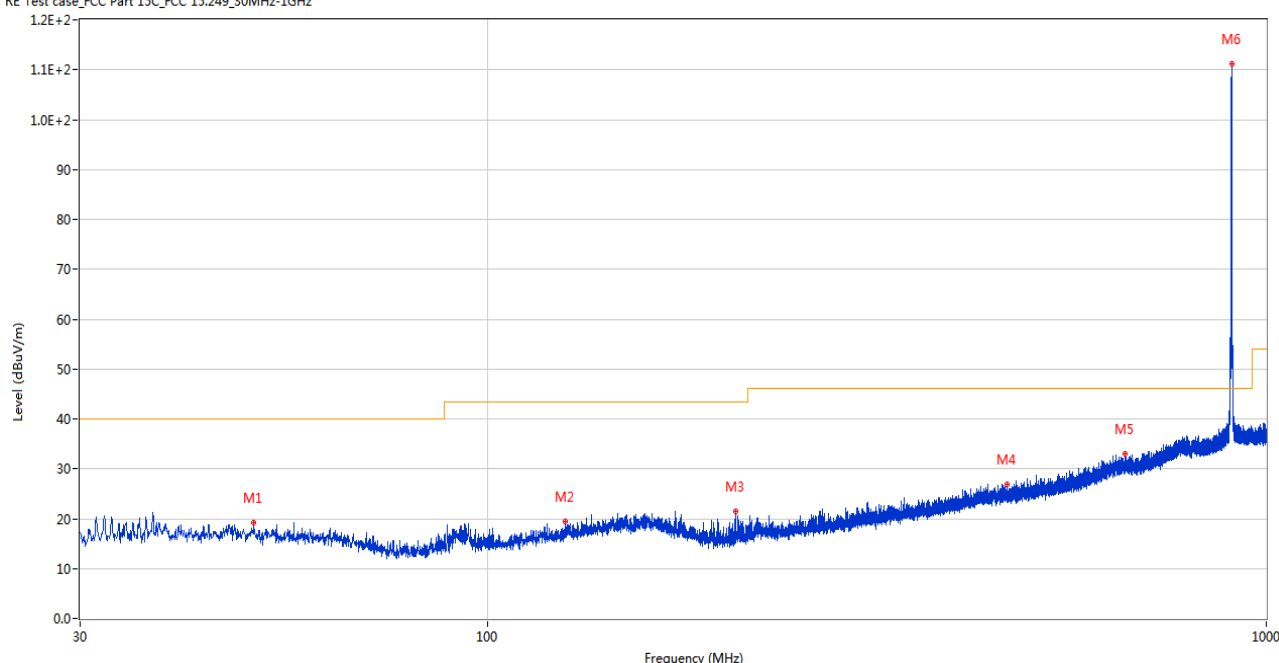

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.127	19.11	-26.10	40.0	20.89	Peak	204.00	200	Horizontal	Pass
2	126.078	19.45	-25.84	43.5	24.05	Peak	225.00	150	Horizontal	Pass
3	208.140	21.39	-27.54	43.5	22.11	Peak	257.00	200	Horizontal	Pass
4	465.288	26.93	-18.88	46.0	19.07	Peak	15.00	150	Horizontal	Pass
5	659.482	33.03	-13.04	46.0	12.97	Peak	49.00	200	Horizontal	Pass
6	902.466	111.09	-7.22	46.0	-65.09	Peak	327.00	150	Horizontal	N/A

LOW CHANNEL, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.249_30MHz-1GHz

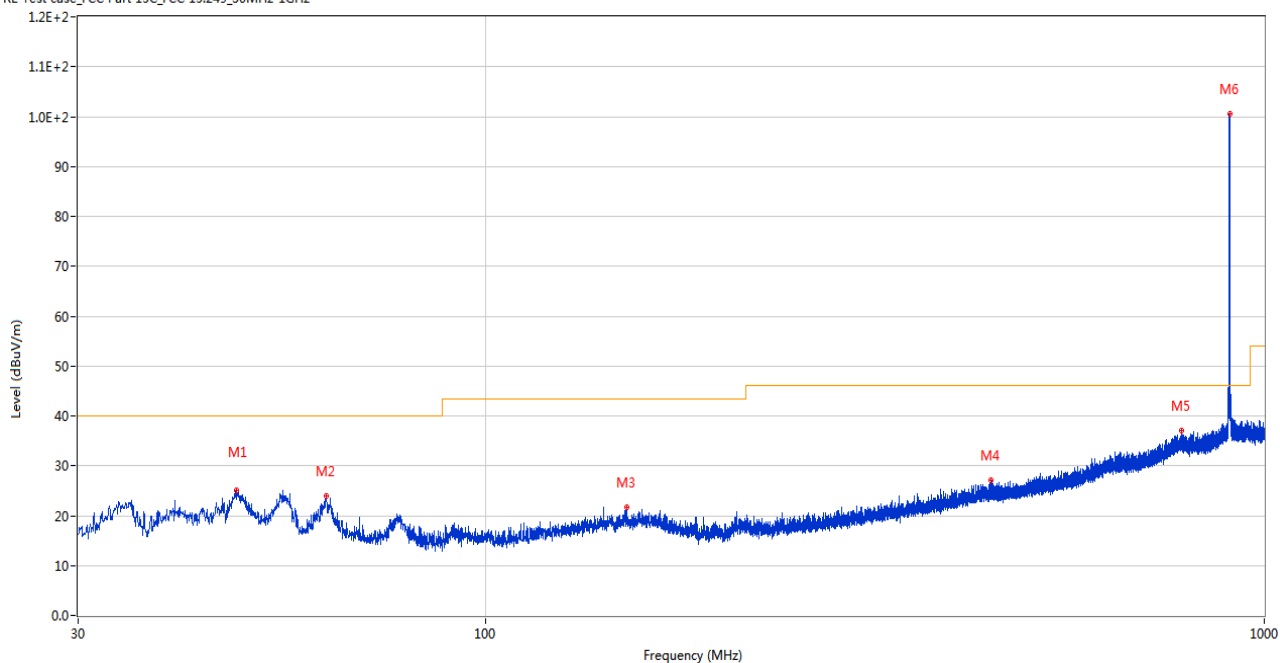

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.848	24.98	-26.01	40.0	15.02	Peak	192.00	200	Vertical	Pass
2	62.447	23.96	-27.11	40.0	16.04	Peak	190.00	200	Vertical	Pass
3	151.686	21.65	-24.11	43.5	21.85	Peak	79.00	200	Vertical	Pass
4	445.160	27.11	-19.05	46.0	18.89	Peak	77.00	150	Vertical	Pass
5	782.041	37.05	-9.51	46.0	8.95	Peak	70.00	100	Vertical	Pass
6	902.273	100.55	-7.26	46.0	-54.55	Peak	93.00	200	Vertical	N/A

MIDDLE CHANNEL, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.249_30MHz-1GHz

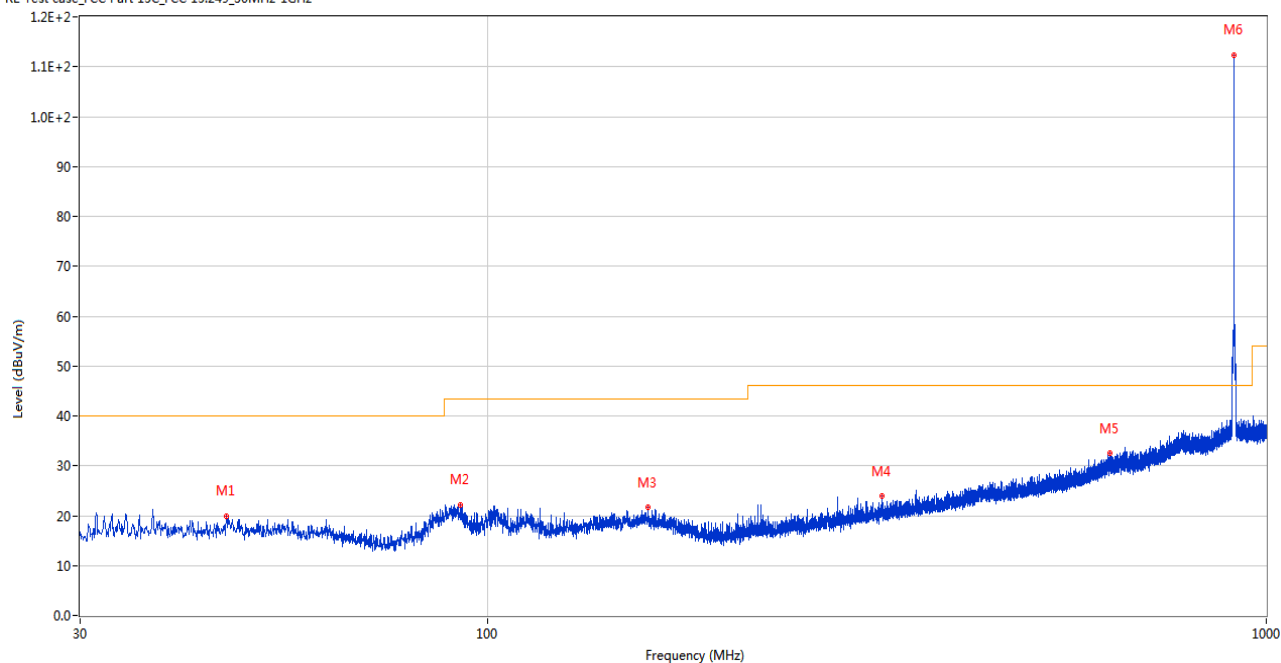

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	46.248	19.99	-26.01	40.0	20.01	Peak	45.00	200	Horizontal	Pass
2	92.371	22.25	-29.22	43.5	21.25	Peak	118.00	200	Horizontal	Pass
3	160.708	21.62	-24.12	43.5	21.88	Peak	13.00	150	Horizontal	Pass
4	320.758	23.87	-22.96	46.0	22.13	Peak	133.00	100	Horizontal	Pass
5	630.818	32.50	-13.25	46.0	13.50	Peak	3.00	150	Horizontal	Pass
6	908.674	112.41	-7.03	46.0	-66.41	Peak	306.00	200	Horizontal	N/A

MIDDLE CHANNEL, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.249_30MHz-1GHz

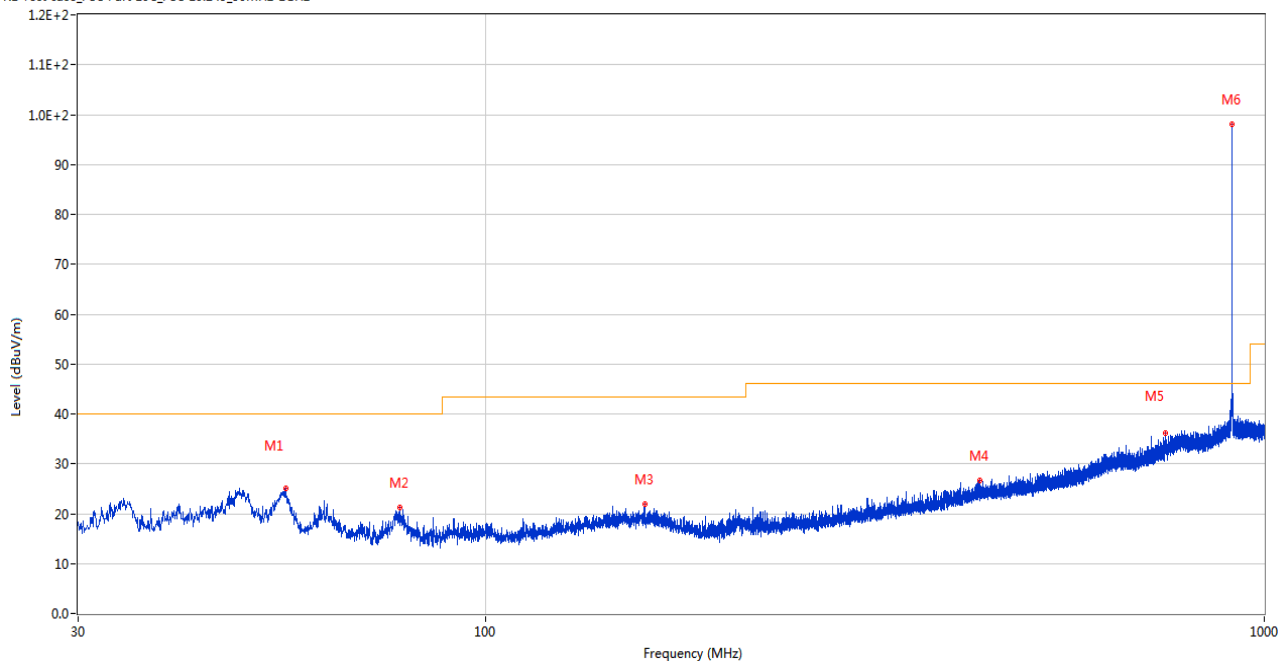

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.365	25.00	-26.36	40.0	15.00	Peak	252.00	200	Vertical	Pass
2	77.578	21.20	-29.39	40.0	18.80	Peak	281.00	150	Vertical	Pass
3	160.077	21.97	-24.03	43.5	21.53	Peak	219.00	200	Vertical	Pass
4	431.483	26.66	-19.58	46.0	19.34	Peak	317.00	150	Vertical	Pass
5	746.151	36.13	-10.60	46.0	9.87	Peak	57.00	100	Vertical	Pass
6	908.869	98.13	-7.04	46.0	-52.13	Peak	114.00	200	Vertical	N/A

HIGH CHANNEL, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.249_30MHz-1GHz

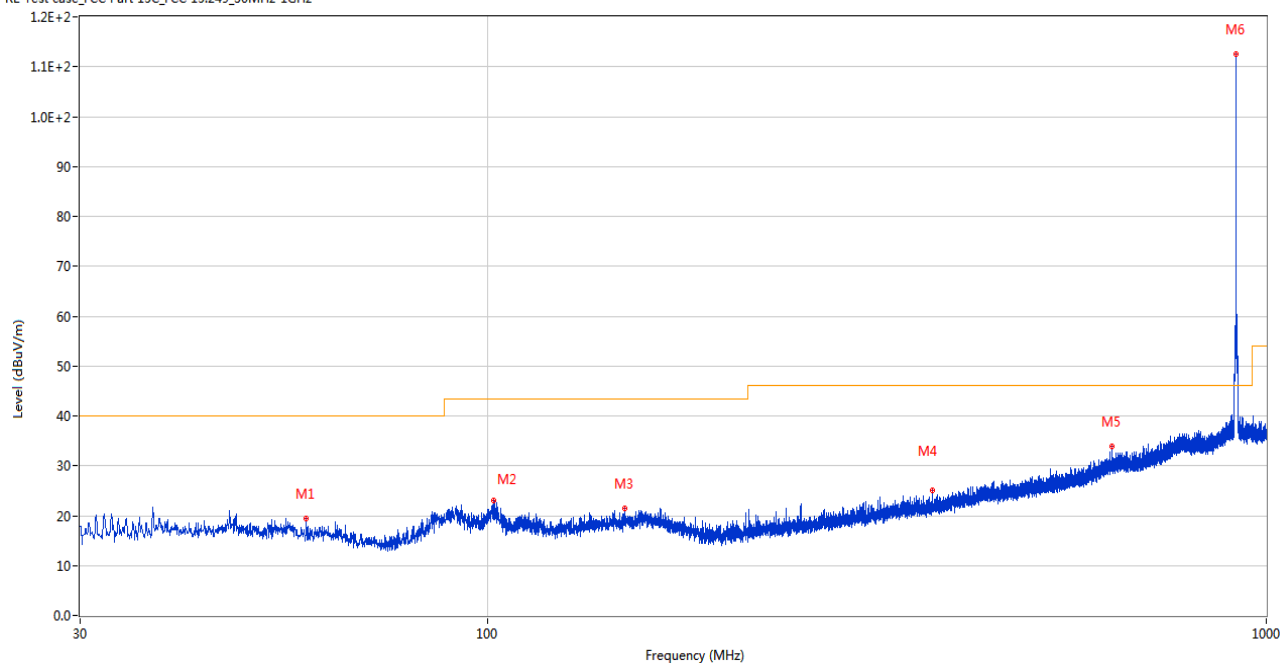

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.518	19.49	-26.64	40.0	20.51	Peak	259.00	200	Horizontal	Pass
2	102.022	23.04	-28.41	43.5	20.46	Peak	133.00	200	Horizontal	Pass
3	149.989	21.54	-24.16	43.5	21.96	Peak	270.00	150	Horizontal	Pass
4	373.041	25.11	-21.68	46.0	20.89	Peak	0.00	200	Horizontal	Pass
5	633.243	33.79	-13.26	46.0	12.21	Peak	19.00	150	Horizontal	Pass
6	914.834	112.57	-7.43	46.0	-66.57	Peak	285.00	200	Horizontal	N/A

HIGH CHANNEL, 30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.249_30MHz-1GHz

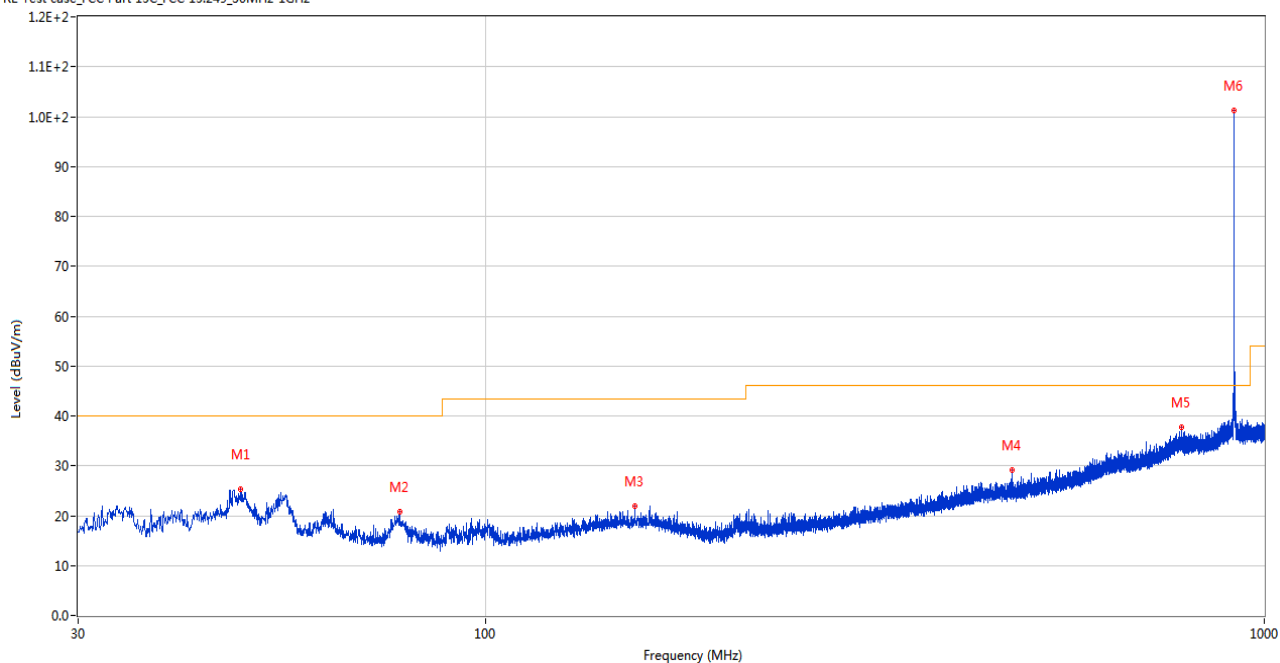

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.527	25.20	-26.00	40.0	14.80	Peak	193.00	200	Vertical	Pass
2	77.578	20.77	-29.39	40.0	19.23	Peak	300.00	200	Vertical	Pass
3	155.664	21.90	-24.15	43.5	21.60	Peak	198.00	150	Vertical	Pass
4	474.890	29.09	-18.69	46.0	16.91	Peak	141.00	200	Vertical	Pass
5	782.235	37.63	-9.50	46.0	8.37	Peak	280.00	150	Vertical	Pass
6	914.882	101.15	-7.43	46.0	-55.15	Peak	95.00	200	Vertical	N/A

LOW CHANNEL 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1804.500	42.57	-12.87	74.0	31.43	Peak	50.00	300	Horizontal	Pass
1**	1804.500	38.01	-12.87	54.0	15.99	AV	50.00	300	Horizontal	Pass
2	2706.800	45.06	-7.23	74.0	28.94	Peak	201.00	150	Horizontal	Pass
2**	2706.800	41.99	-7.23	54.0	12.01	AV	201.00	150	Horizontal	Pass
3	2911.000	49.62	-4.26	74.0	24.38	Peak	119.00	200	Horizontal	Pass
3**	2911.000	39.11	-4.26	54.0	14.89	AV	119.00	200	Horizontal	Pass
4	5081.400	52.20	-2.06	74.0	21.80	Peak	196.00	200	Horizontal	Pass
4**	5081.400	42.18	-2.06	54.0	11.82	AV	196.00	200	Horizontal	Pass
5	6610.600	55.14	0.70	74.0	18.86	Peak	268.00	150	Horizontal	Pass
5**	6610.600	45.74	0.70	54.0	8.26	AV	268.00	150	Horizontal	Pass
6	8602.150	51.02	-2.20	74.0	22.98	Peak	309.00	100	Horizontal	Pass
6**	8602.150	41.49	-2.20	54.0	12.51	AV	309.00	100	Horizontal	Pass

LOW CHANNEL 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2189.100	47.55	-9.41	74.0	26.45	Peak	259.00	300	Vertical	Pass
1**	2189.100	37.38	-9.41	54.0	16.62	AV	259.00	300	Vertical	Pass
2	2707.800	45.59	-7.14	74.0	28.41	Peak	224.00	150	Vertical	Pass
2**	2707.800	43.15	-7.14	54.0	10.85	AV	224.00	150	Vertical	Pass
3	3609.200	45.19	-6.52	74.0	28.81	Peak	0.00	200	Vertical	Pass
3**	3609.200	41.37	-6.52	54.0	12.63	AV	0.00	200	Vertical	Pass
4	5065.400	52.21	-2.16	74.0	21.79	Peak	42.00	150	Vertical	Pass
4**	5065.400	41.98	-2.16	54.0	12.02	AV	42.00	200	Vertical	Pass
5	6977.400	55.65	1.73	74.0	18.35	Peak	125.00	200	Vertical	Pass
5**	6977.400	45.12	1.73	54.0	8.88	AV	125.00	200	Vertical	Pass
6	9808.900	52.36	-0.04	74.0	21.64	Peak	360.00	100	Vertical	Pass
6**	9808.900	41.64	-0.04	54.0	12.36	AV	360.00	100	Vertical	Pass

MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.300	45.93	-14.30	74.0	28.07	Peak	253.00	300	Horizontal	Pass
1**	1195.300	35.73	-14.30	54.0	18.27	AV	253.00	300	Horizontal	Pass
2	1818.000	42.50	-12.96	74.0	31.50	Peak	78.00	150	Horizontal	Pass
2**	1818.000	38.15	-12.96	54.0	15.85	AV	78.00	300	Horizontal	Pass
3	2725.500	46.64	-6.69	74.0	27.36	Peak	244.00	300	Horizontal	Pass
3**	2725.500	44.90	-6.69	54.0	9.10	AV	244.00	150	Horizontal	Pass
4	4584.200	50.35	-3.70	74.0	23.65	Peak	286.00	150	Horizontal	Pass
4**	4584.200	41.78	-3.70	54.0	12.22	AV	286.00	200	Horizontal	Pass
5	6801.600	54.84	1.49	74.0	19.16	Peak	340.00	200	Horizontal	Pass
5**	6801.600	45.22	1.49	54.0	8.78	AV	340.00	150	Horizontal	Pass
6	8642.650	50.80	-1.84	74.0	23.20	Peak	90.00	200	Horizontal	Pass
6**	8642.650	40.86	-1.84	54.0	13.14	AV	90.00	200	Horizontal	Pass

MIDDLE CHANNEL 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1999.000	46.90	-11.78	74.0	27.10	Peak	219.00	300	Vertical	Pass
1**	1999.000	35.60	-11.78	54.0	18.40	AV	219.00	300	Vertical	Pass
2	2726.800	47.79	-6.78	74.0	26.21	Peak	196.00	150	Vertical	Pass
2**	2726.800	45.05	-6.78	54.0	8.95	AV	196.00	150	Vertical	Pass
3	3634.800	46.12	-5.83	74.0	27.88	Peak	342.00	200	Vertical	Pass
3**	3634.800	43.59	-5.83	54.0	10.41	AV	342.00	200	Vertical	Pass
4	5510.400	52.96	-0.88	74.0	21.04	Peak	96.00	150	Vertical	Pass
4**	5510.400	44.52	-0.88	54.0	9.48	AV	96.00	200	Vertical	Pass
5	6628.400	54.61	0.00	74.0	19.39	Peak	226.00	300	Vertical	Pass
5**	6628.400	45.06	0.00	54.0	8.94	AV	226.00	300	Vertical	Pass
6	8177.950	47.56	-2.17	74.0	26.44	Peak	170.00	150	Vertical	Pass
6**	8177.950	43.87	-2.17	54.0	10.13	AV	170.00	150	Vertical	Pass

HIGH CHANNEL 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1829.900	41.69	-12.56	74.0	32.31	Peak	296.00	300	Horizontal	Pass
1**	1829.900	39.33	-12.56	54.0	14.67	AV	296.00	300	Horizontal	Pass
2	2744.900	45.71	-6.86	74.0	28.29	Peak	342.00	150	Horizontal	Pass
2**	2744.900	42.01	-6.86	54.0	11.99	AV	342.00	150	Horizontal	Pass
3	3660.400	45.63	-5.68	74.0	28.37	Peak	34.00	200	Horizontal	Pass
3**	3660.400	42.44	-5.68	54.0	11.56	AV	34.00	200	Horizontal	Pass
4	4534.000	49.49	-3.69	74.0	24.51	Peak	241.00	300	Horizontal	Pass
4**	4534.000	41.60	-3.69	54.0	12.40	AV	241.00	300	Horizontal	Pass
5	6334.000	54.19	-0.28	74.0	19.81	Peak	308.00	150	Horizontal	Pass
5**	6334.000	45.36	-0.28	54.0	8.64	AV	308.00	150	Horizontal	Pass
6	8589.850	50.83	-2.12	74.0	23.17	Peak	168.00	200	Horizontal	Pass
6**	8589.850	41.04	-2.12	54.0	12.96	AV	168.00	200	Horizontal	Pass

HIGH CHANNEL 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1999.000	42.79	-11.78	74.0	31.21	Peak	67.00	300	Vertical	Pass
1**	1999.000	38.55	-11.78	54.0	15.45	AV	67.00	300	Vertical	Pass
2	2744.500	48.44	-6.91	74.0	25.56	Peak	181.00	300	Vertical	Pass
2**	2744.500	44.80	-6.91	54.0	9.20	AV	181.00	300	Vertical	Pass
3	3659.400	46.91	-5.58	74.0	27.09	Peak	185.00	150	Vertical	Pass
3**	3659.400	44.80	-5.58	54.0	9.20	AV	185.00	300	Vertical	Pass
4	5094.400	52.57	-2.12	74.0	21.43	Peak	74.00	300	Vertical	Pass
4**	5094.400	43.07	-2.12	54.0	10.93	AV	74.00	150	Vertical	Pass
5	6515.200	54.64	-0.33	74.0	19.36	Peak	208.00	150	Vertical	Pass
5**	6515.200	44.61	-0.33	54.0	9.39	AV	208.00	200	Vertical	Pass
6	7913.950	50.94	-2.43	74.0	23.06	Peak	268.00	200	Vertical	Pass
6**	7913.950	41.17	-2.43	54.0	12.83	AV	268.00	150	Vertical	Pass

SGW3201 data:

LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.700	43.93	74.0	30.07	Peak	143.00	150	Horizontal	Pass
1**	1328.700	32.60	54.0	21.40	AV	143.00	150	Horizontal	Pass
2	1788.700	44.40	74.0	29.60	Peak	268.00	150	Horizontal	Pass
2**	1788.700	34.18	54.0	19.82	AV	268.00	150	Horizontal	Pass
3	1804.500	42.19	74.0	31.81	Peak	75.00	150	Horizontal	Pass
3**	1804.500	38.42	54.0	15.58	AV	75.00	150	Horizontal	Pass
4	2707.100	47.80	74.0	26.20	Peak	342.00	150	Horizontal	Pass
4**	2707.100	43.76	54.0	10.24	AV	342.00	150	Horizontal	Pass
5	4401.000	49.94	74.0	24.06	Peak	334.00	150	Horizontal	Pass
5**	4401.000	40.49	54.0	13.51	AV	334.00	150	Horizontal	Pass
6	8731.300	51.22	74.0	22.78	Peak	189.00	150	Horizontal	Pass
6**	8731.300	41.48	54.0	12.52	AV	189.00	150	Horizontal	Pass

LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1163.600	47.50	74.0	26.50	Peak	53.00	150	Vertical	Pass
1**	1163.600	37.08	54.0	16.92	AV	53.00	150	Vertical	Pass
2	1804.600	41.78	74.0	32.22	Peak	335.00	150	Vertical	Pass
2**	1804.600	37.51	54.0	16.49	AV	335.00	150	Vertical	Pass
3	2357.200	48.25	74.0	25.75	Peak	255.00	150	Vertical	Pass
3**	2357.200	38.62	54.0	15.38	AV	255.00	150	Vertical	Pass
4	2706.800	46.75	74.0	27.25	Peak	124.00	150	Vertical	Pass
4**	2706.800	43.83	54.0	10.17	AV	124.00	150	Vertical	Pass
5	3609.400	47.44	74.0	26.56	Peak	296.00	150	Vertical	Pass
5**	3609.400	42.61	54.0	11.39	AV	296.00	150	Vertical	Pass
6	6806.400	54.46	74.0	19.54	Peak	134.00	150	Vertical	Pass
6**	6806.400	46.32	54.0	7.68	AV	134.00	150	Vertical	Pass
1	1467.915	42.02	74.0	31.98	Peak	263.00	200	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data and Plots

LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	613.954	42.03	6.27	54.0	11.97	Peak	71.00	150	Horizontal	Pass
2	612.296	43.39	6.23	54.0	10.61	Peak	264.00	150	Horizontal	Pass

HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1200.520	44.28	-12.46	54.0	9.72	Peak	123.00	150	Horizontal	Pass
2	1001.040	41.95	-12.54	54.0	12.05	Peak	309.00	150	Horizontal	Pass

HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	960.647	45.09	9.55	54.0	8.91	Peak	153.00	150	Horizontal	Pass
2	999.260	46.62	10.04	54.0	7.38	Peak	333.00	150	Horizontal	Pass

SGW3201 data:

HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1000.160	47.03	54.0	6.97	Peak	37.00	150	Horizontal	Pass
2	1162.120	49.76	54.0	4.24	Peak	49.00	150	Horizontal	Pass

HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	975.627	43.81	54.0	10.19	Peak	310.00	150	Horizontal	Pass
2	994.207	45.01	54.0	8.99	Peak	248.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data


LoRa			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	6.86	8	Pass
Middle Channel	6.13	8	Pass
High Channel	5.61	8	Pass

Test Plots


LOW CHANNEL



MIDDLE CHANNEL

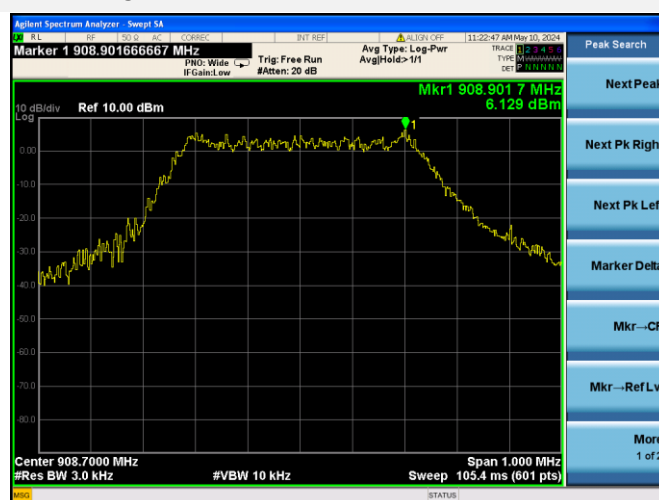

HIGH CHANNEL

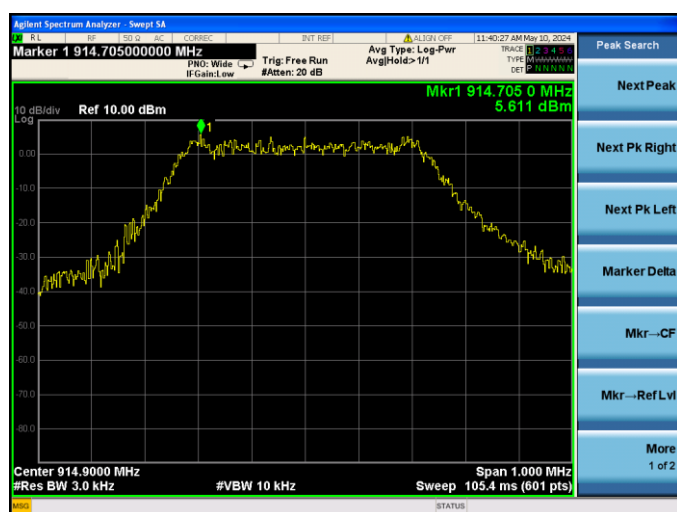

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2460357-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2460357-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2460357-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--