

RF TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Wireless Headphones

ISSUED TO
Tiinlab Corporation

No. 3333, Liuxian Avenue, Tower A, 35th Floor, Tanglang City,
Nanshan District, Shenzhen, Guangdong, P.R. China



Tested by:
Ye Hongji

Date: Jul. 08, 2021

Approved by:
Liao Jianming
(Technical Director)

Date: Jul. 08, 2021

Report No.: BL-SZ2160267-602

EUT Name: Wireless Headphones

Model Name: ES303

Brand Name: 1MORE

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2ASDIES303-R

Test conclusion: Pass

Test Date: Jun. 21, 2021 ~ Jul. 01, 2021

Date of Issue: Jul. 08, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jul. 08, 2021</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information.....	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS.....	9
3.1	Test Standards	9
3.2	Verdict	9
4	GENERAL TEST CONFIGURATIONS.....	10
4.1	Test Environments	10
4.2	Test Equipment List.....	10
4.3	Measurement Uncertainty	10
4.4	Description of Test Setup	11
4.4.1	For Antenna Port Test	11
4.4.2	For AC Power Supply Port Test	11
4.4.3	For Radiated Test (Below 30 MHz)	12
4.4.4	For Radiated Test (30 MHz-1 GHz)	12
4.4.5	For Radiated Test (Above 1 GHz).....	13
4.5	Measurement Results Explanation Example.....	14
4.5.1	For conducted test items:	14
5	TEST ITEMS.....	15

5.1	Antenna Requirements.....	15
5.1.1	Relevant Standards.....	15
5.1.2	Antenna Anti-Replacement Construction	15
5.1.3	Antenna Gain	15
5.2	Frequency Hopping Systems	16
5.2.1	Relevant Standards.....	16
5.2.2	Description of the systems	16
5.3	Number of Hopping Frequencies	18
5.3.1	Limit.....	18
5.3.2	Test Setup.....	18
5.3.3	Test Procedure.....	18
5.3.4	Test Result	18
5.4	Peak Output Power and E.I.R.P.....	19
5.4.1	Test Limit.....	19
5.4.2	Test Setup.....	19
5.4.3	Test Procedure.....	19
5.4.4	Test Result	19
5.5	Occupied Bandwidth	20
5.5.1	Limit.....	20
5.5.2	Test Setup.....	20
5.5.3	Test Procedure.....	20
5.5.4	Test Result	20
5.6	Carrier Frequency Separation	21
5.6.1	Limit.....	21
5.6.2	Test Setup.....	21
5.6.3	Test Procedure.....	21
5.6.4	Test Result	21
5.7	Time of Occupancy (Dwell time)	22
5.7.1	Limit.....	22
5.7.2	Test Setup.....	22
5.7.3	Test Procedure.....	22
5.7.4	Test Result	23
5.8	Conducted Spurious Emission & Authorized-band band-edge	24

5.8.1	Limit.....	24
5.8.2	Test Setup	24
5.8.3	Test Procedure	24
5.8.4	Test Result	24
5.9	Conducted Emission	25
5.9.1	Limit.....	25
5.9.2	Test Setup	25
5.9.3	Test Procedure	25
5.9.4	Test Result	25
5.10	Radiated Spurious Emission	26
5.10.1	Limit	26
5.10.2	Test Setup	26
5.10.3	Test Procedure	26
5.10.4	Test Result	27
5.11	Band Edge (Restricted-band band-edge).....	28
5.11.1	Limit	28
5.11.2	Test Setup	28
5.11.3	Test Procedure	28
5.11.4	Test Result	28
ANNEX A	TEST RESULT	29
A.1	Number of Hopping Frequency	29
A.2	Peak Output Power	30
A.3	20 dB and 99% bandwidth	33
A.4	Hopping Frequency Separation.....	38
A.5	Average Time of Occupancy	39
A.6	Conducted Spurious Emissions & Authorized-band band-edge	42
A.7	Conducted Emissions.....	49
A.8	Radiated Spurious Emission	51
A.9	Band Edge (Restricted-band band-edge).....	69
ANNEX B	TEST SETUP PHOTOS	72
ANNEX C	EUT EXTERNAL PHOTOS	72
ANNEX D	EUT INTERNAL PHOTOS	72

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Tiinlab Corporation
Address	No. 3333, Liuxian Avenue, Tower A, 35th Floor, Tanglang City, Nanshan District, Shenzhen, Guangdong, P.R. China

2.2 Manufacturer Information

Manufacturer	Tiinlab Corporation
Address	No. 3333, Liuxian Avenue, Tower A, 35th Floor, Tanglang City, Nanshan District, Shenzhen, Guangdong, P.R. China

2.3 Factory Information

Factory	Hunan voc Acoustics Technology Co, Ltd
Address	5&A7 Building, State Industrial Park, Jiulong Industrial Zone, Xingchao Village, Yanling County, Zhuzhou City, Hunan Province China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Wireless Headphones
Model Name Under Test	ES303
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V3.0
Software Version	v0.8.5
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE)
-----------------------------------	------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	FPC Antenna
Antenna Gain	-1.42 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.6 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	AB1562 Lab Test Tool-1.4.10		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 61
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

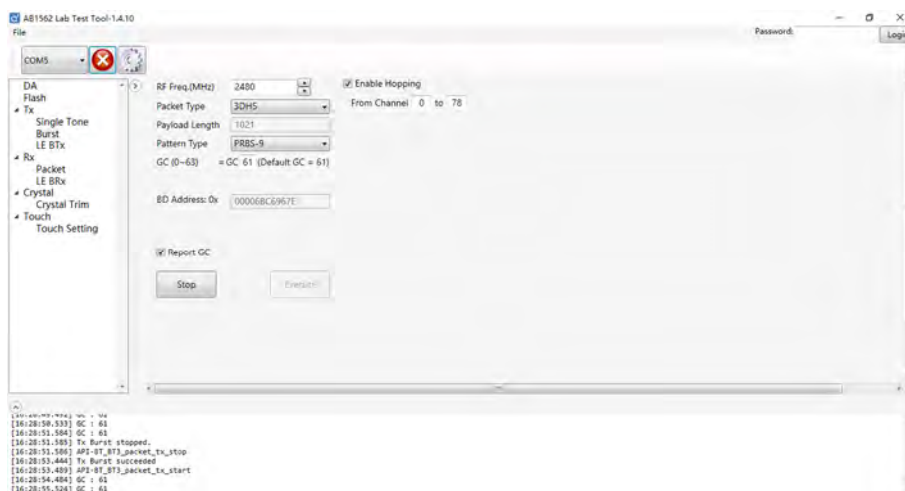

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power an	15.247(b)	Low/Middle/Hig h	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/Hig h	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/Hig h	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/Hig h	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/Hig h	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/Hig h	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.21 dB
Power Spectral Density, conducted	±1.25 dB
Unwanted Emissions, conducted	±1.26 dB
All emissions, radiated	±3.86 dB
Temperature	±1°C
Humidity	±4%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

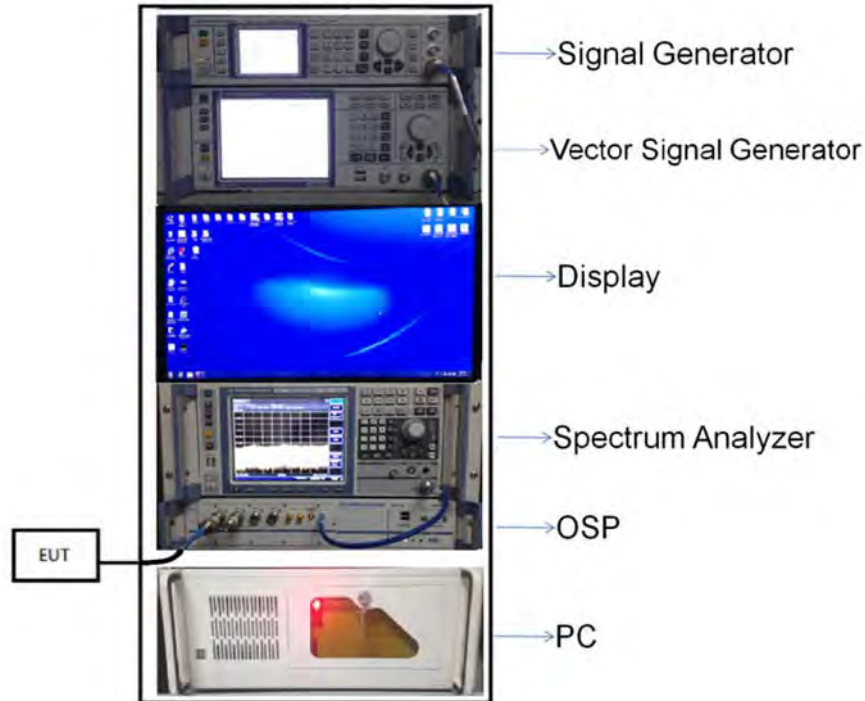


(Diagram 1)

4.4.2 For AC Power Supply Port Test

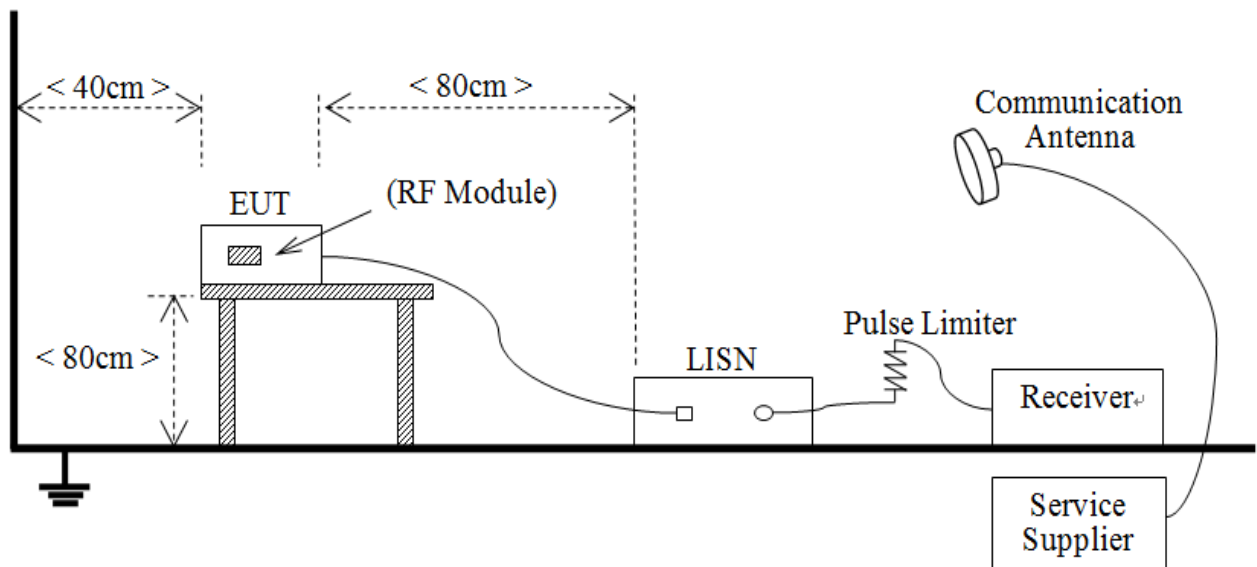


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

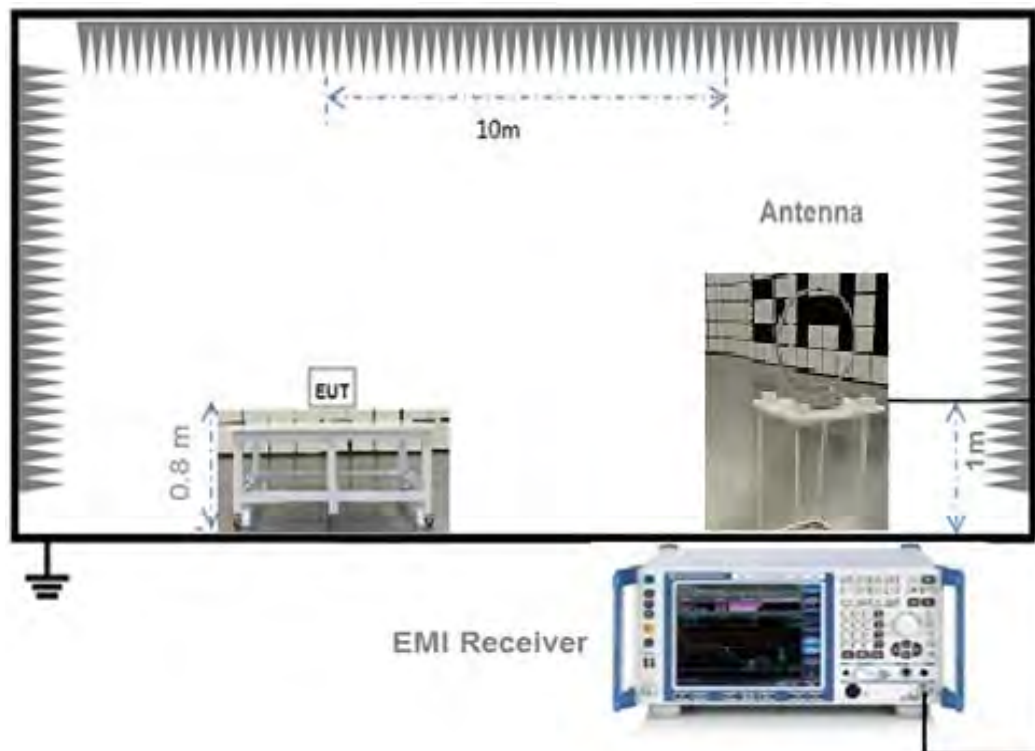


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

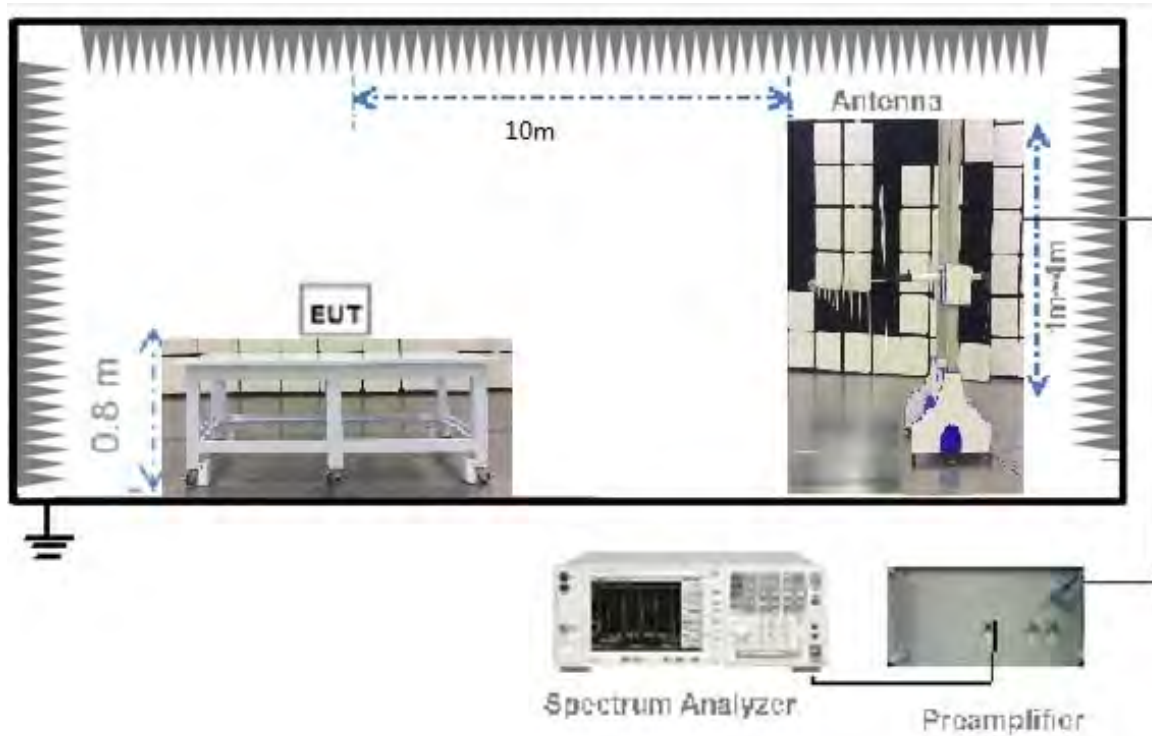

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

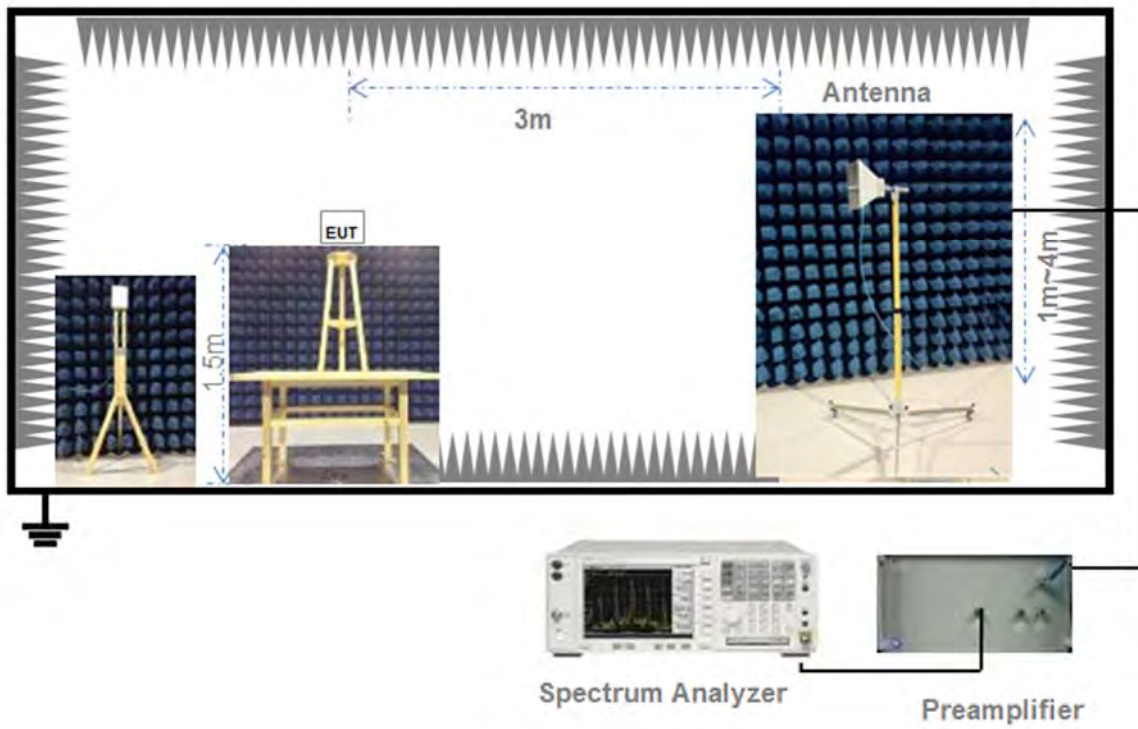

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.


For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents

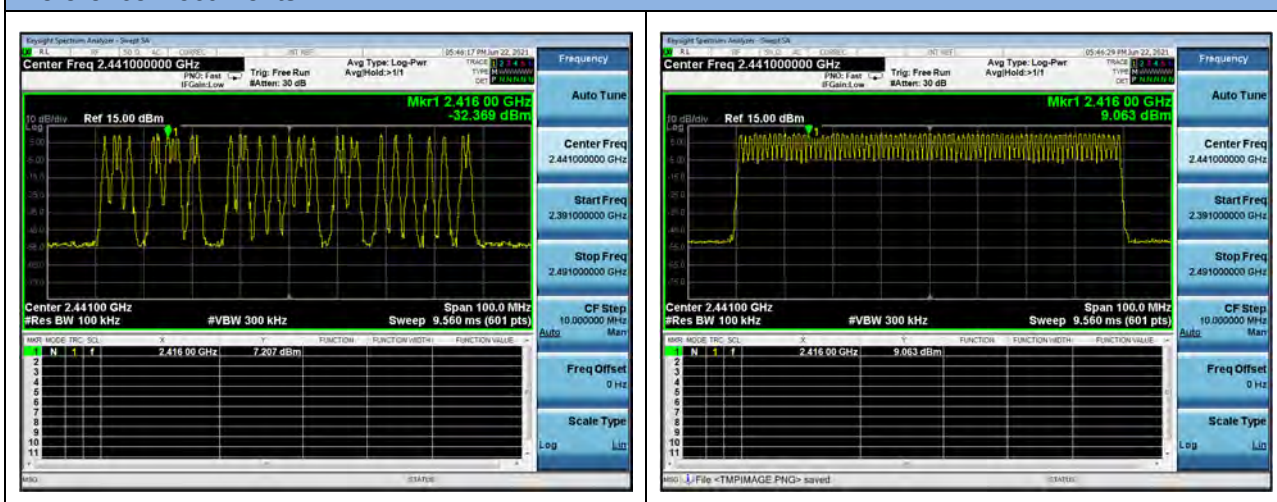

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

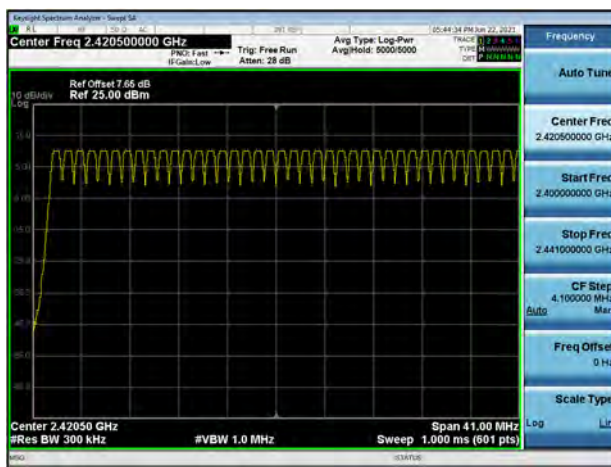


GFSK 2.4415 GHz ~ 2.4835 GHz



8-DPSK 2.4 GHz ~ 2.4415 GHz

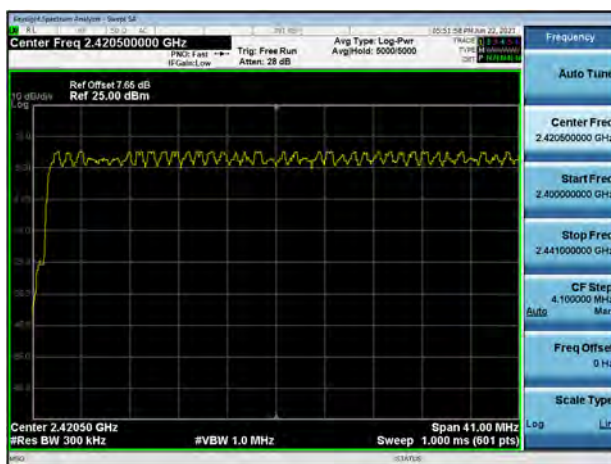

8-DPSK 2.4415 GHz ~ 2.4835 GHz

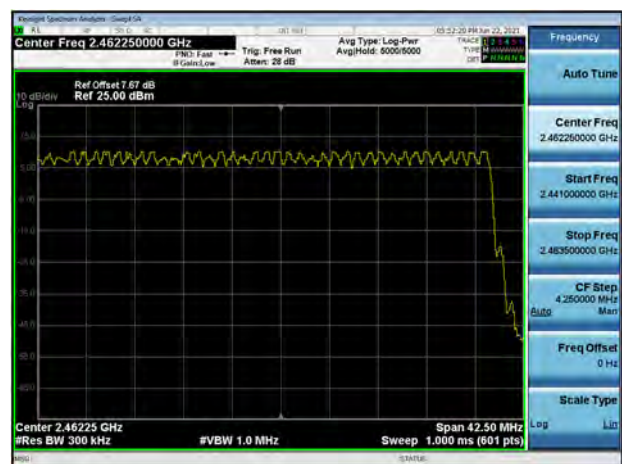

A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	10.24	10.56	21	125	Pass
Middle	10.28	10.68			Pass
High	10.15	10.36			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	10.23	10.53	10.31	10.74	21	125	Pass
Middle	10.26	10.62	10.35	10.84			Pass
High	10.15	10.35	10.25	10.59			Pass

Test plots

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL




$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL

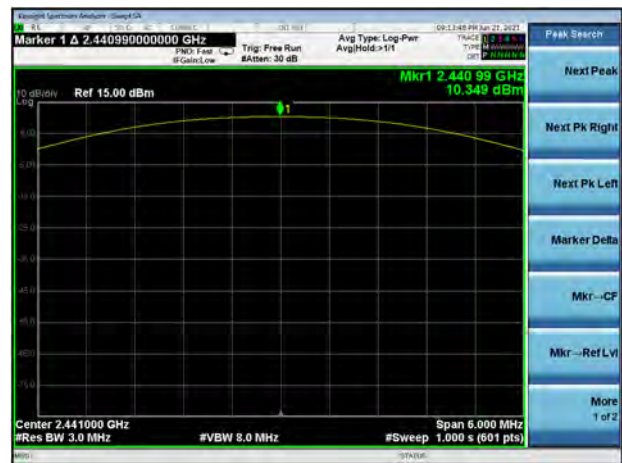

8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.965000	0.887620
Middle	0.965000	0.888390
High	0.965000	0.888350
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.250000	1.159700
Middle	1.250000	1.165700
High	1.255000	1.170400
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.275000	1.162000
Middle	1.285000	1.166500
High	1.290000	1.174900

Test plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



Keysight Spectrum Analyzer - Single S2

2.4797 GHz 2.4800 GHz 2.4803 GHz

Center Freq 2.480000000 GHz

PW: Wide → Trg: Free Run Atten: 18 dB

Avg Type: Log-Pwr

Auto Tune

Center Freq 2.480000000 GHz

Start Freq 2.478500000 GHz

Stop Freq 2.481500000 GHz

CF Step 300.000 GHz

Auto

Freq Offset 0 Hz

Scale Type Lin

Log

Span 3.000 MHz

Sweep 500.0 ms (0.01 pts)

Ref Offset 7.6 dB

Ref 15.90 dBm

DMkr2 1.255 MHz

0.067 dB

X9

2d3

Center 2.480000 GHz

Res BW 30 kHz

VBW 91 kHz

#Sweep 500.0 ms (0.01 pts)

Span 3.000 MHz

Marker 1: 2.4798830 GHz (A) -8.284 dBm

Marker 2: 2.4799125 MHz (A) -0.067 dB

Marker 3: 2.4799385 GHz (A) -11.828 dBm

Marker 4: 2.4799645 GHz (A) -11.828 dBm

Marker 5: 2.4799905 GHz (A) -11.828 dBm

Marker 6: 2.4800165 GHz (A) -11.828 dBm

Marker 7: 2.4800425 GHz (A) -11.828 dBm

Marker 8: 2.4800685 GHz (A) -11.828 dBm

Marker 9: 2.4800945 GHz (A) -11.828 dBm

Marker 10: 2.4801205 GHz (A) -11.828 dBm

Marker 11: 2.4801465 GHz (A) -11.828 dBm

Marker 12: 2.4801725 GHz (A) -11.828 dBm

Marker 13: 2.4801985 GHz (A) -11.828 dBm

Marker 14: 2.4802245 GHz (A) -11.828 dBm

Marker 15: 2.4802505 GHz (A) -11.828 dBm

Marker 16: 2.4802765 GHz (A) -11.828 dBm

Marker 17: 2.4803025 GHz (A) -11.828 dBm

Marker 18: 2.4803285 GHz (A) -11.828 dBm

Marker 19: 2.4803545 GHz (A) -11.828 dBm

Marker 20: 2.4803805 GHz (A) -11.828 dBm

Marker 21: 2.4804065 GHz (A) -11.828 dBm

Marker 22: 2.4804325 GHz (A) -11.828 dBm

Marker 23: 2.4804585 GHz (A) -11.828 dBm

Marker 24: 2.4804845 GHz (A) -11.828 dBm

Marker 25: 2.4805105 GHz (A) -11.828 dBm

Marker 26: 2.4805365 GHz (A) -11.828 dBm

Marker 27: 2.4805625 GHz (A) -11.828 dBm

Marker 28: 2.4805885 GHz (A) -11.828 dBm

Marker 29: 2.4806145 GHz (A) -11.828 dBm

Marker 30: 2.4806405 GHz (A) -11.828 dBm

Marker 31: 2.4806665 GHz (A) -11.828 dBm

Marker 32: 2.4806925 GHz (A) -11.828 dBm

Marker 33: 2.4807185 GHz (A) -11.828 dBm

Marker 34: 2.4807445 GHz (A) -11.828 dBm

Marker 35: 2.4807705 GHz (A) -11.828 dBm

Marker 36: 2.4807965 GHz (A) -11.828 dBm

Marker 37: 2.4808225 GHz (A) -11.828 dBm

Marker 38: 2.4808485 GHz (A) -11.828 dBm

Marker 39: 2.4808745 GHz (A) -11.828 dBm

Marker 40: 2.4809005 GHz (A) -11.828 dBm

Marker 41: 2.4809265 GHz (A) -11.828 dBm

Marker 42: 2.4809525 GHz (A) -11.828 dBm

Marker 43: 2.4809785 GHz (A) -11.828 dBm

Marker 44: 2.4810045 GHz (A) -11.828 dBm

Marker 45: 2.4810305 GHz (A) -11.828 dBm

Marker 46: 2.4810565 GHz (A) -11.828 dBm

Marker 47: 2.4810825 GHz (A) -11.828 dBm

Marker 48: 2.4811085 GHz (A) -11.828 dBm

Marker 49: 2.4811345 GHz (A) -11.828 dBm

Marker 50: 2.4811605 GHz (A) -11.828 dBm

Marker 51: 2.4811865 GHz (A) -11.828 dBm

Marker 52: 2.4812125 GHz (A) -11.828 dBm

Marker 53: 2.4812385 GHz (A) -11.828 dBm

Marker 54: 2.4812645 GHz (A) -11.828 dBm

Marker 55: 2.4812905 GHz (A) -11.828 dBm

Marker 56: 2.4813165 GHz (A) -11.828 dBm

Marker 57: 2.4813425 GHz (A) -11.828 dBm

Marker 58: 2.4813685 GHz (A) -11.828 dBm

Marker 59: 2.4813945 GHz (A) -11.828 dBm

Marker 60: 2.4814205 GHz (A) -11.828 dBm

Marker 61: 2.4814465 GHz (A) -11.828 dBm

Marker 62: 2.4814725 GHz (A) -11.828 dBm

Marker 63: 2.4814985 GHz (A) -11.828 dBm

Marker 64: 2.4815245 GHz (A) -11.828 dBm

Marker 65: 2.4815505 GHz (A) -11.828 dBm

Marker 66: 2.4815765 GHz (A) -11.828 dBm

Marker 67: 2.4816025 GHz (A) -11.828 dBm

Marker 68: 2.4816285 GHz (A) -11.828 dBm

Marker 69: 2.4816545 GHz (A) -11.828 dBm

Marker 70: 2.4816805 GHz (A) -11.828 dBm

Marker 71: 2.4817065 GHz (A) -11.828 dBm

Marker 72: 2.4817325 GHz (A) -11.828 dBm

Marker 73: 2.4817585 GHz (A) -11.828 dBm

Marker 74: 2.4817845 GHz (A) -11.828 dBm

Marker 75: 2.4818105 GHz (A) -11.828 dBm

Marker 76: 2.4818365 GHz (A) -11.828 dBm

Marker 77: 2.4818625 GHz (A) -11.828 dBm

Marker 78: 2.4818885 GHz (A) -11.828 dBm

Marker 79: 2.4819145 GHz (A) -11.828 dBm

Marker 80: 2.4819405 GHz (A) -11.828 dBm

Marker 81: 2.4819665 GHz (A) -11.828 dBm

Marker 82: 2.4819925 GHz (A) -11.828 dBm

Marker 83: 2.4820185 GHz (A) -11.828 dBm

Marker 84: 2.4820445 GHz (A) -11.828 dBm

Marker 85: 2.4820705 GHz (A) -11.828 dBm

Marker 86: 2.4820965 GHz (A) -11.828 dBm

Marker 87: 2.4821225 GHz (A) -11.828 dBm

Marker 88: 2.4821485 GHz (A) -11.828 dBm

Marker 89: 2.4821745 GHz (A) -11.828 dBm

Marker 90: 2.4822005 GHz (A) -11.828 dBm

Marker 91: 2.4822265 GHz (A) -11.828 dBm

Marker 92: 2.4822525 GHz (A) -11.828 dBm

Marker 93: 2.4822785 GHz (A) -11.828 dBm

Marker 94: 2.4823045 GHz (A) -11.828 dBm

Marker 95: 2.4823305 GHz (A) -11.828 dBm

Marker 96: 2.4823565 GHz (A) -11.828 dBm

Marker 97: 2.4823825 GHz (A) -11.828 dBm

Marker 98: 2.4824085 GHz (A) -11.828 dBm

Marker 99: 2.4824345 GHz (A) -11.828 dBm

Marker 100: 2.4824605 GHz (A) -11.828 dBm

Marker 101: 2.4824865 GHz (A) -11.828 dBm

Marker 102: 2.4825125 GHz (A) -11.828 dBm

Marker 103: 2.4825385 GHz (A) -11.828

Keysight Spectrum Analyzer - Setup SA

Center Freq 2.402000000 GHz

Ref Offset 7.61 dB
Ref 15.00 dBm

DMkr2 1.275 MHz
-0.055 dB

Auto Tune

Center Freq 2.402000000 GHz

Start Freq 2.400500000 GHz

Stop Freq 2.403500000 GHz

CF Step 300.000 MHz

Auto

Freq Offset 0 Hz

Scale Type Lin

Log

Span 3.000 MHz
#Res BW 30 kHz
VBW 91 kHz
#Sweep 500.0 ms (601 pts)

Marker	F	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	(A)	2.402155 GHz	(A) 7.344 dBm
2	Δ3	1	(A)	1.275 MHz	(A) -0.055 dB
3	F	1	(A)	2.401350 GHz	(A) -12.892 dBm
4					
5					
6					
7					
8					
9					
10					
11					

Keysight Spectrum Analyzer - dmw452A

Center Freq 2.441000000 GHz

Ref Offset 7.7 dB
Ref 15.00 dBm

DMkr2 1.285 MHz
0.520 dB

Trig: Free Run
Avg/Hold: 20/20
Attenu: 18 dB

Span 3.000 MHz
BW 30 kHz
VBW 91 kHz
Sweep 500.0 ms (601 pts)

CF Step 300.000 MHz
Auto

	1	2	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	2.441 155 GHz (A)	7.480 dBm	
2	A3	1	1.285 MHz (A)	0.520 dB	
3	F	1	2.440 345 GHz (A)	-13.262 dBm	
4					
5					
6					
7					
8					
9					
10					
11					

Log

Keysight Spectrum Analyzer - Setup 2A

Center Freq 2.480000000 GHz

Ref Offset 7.6 dB
Ref 15.90 dBm

DMkr2 1.290 MHz
-0.354 dB

Center 2.480000 GHz
Res BW 300 kHz
VBW 91 kHz
Span 3.000 MHz
#Sweep 500.0 ms (601 pts)

Marker	Frequency (GHz)	Amplitude (dBm)	Function	Function Width	Function Value
1	2.480 150 GHz (A)	7.339 dBm			
2	Δ 1 1 (A)	1.290 MHz (A)	-0.354 dB		
3	F 1 1 (A)	2.479 345 GHz (A)	-12.834 dBm		

99% Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1	0.643333	Pass
8-DPSK	1	0.860000	Pass

Test Plots

GFSK



8-DPSK




A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37500	120.000	0.4	Pass
DH 3	1.63000	260.800	0.4	Pass
DH 5	2.87800	306.987	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37830	121.056	0.4	Pass
DH 3	1.63000	260.800	0.4	Pass
DH 5	2.88500	307.733	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37330	59.728	0.4	Pass
DH 3	1.63000	130.400	0.4	Pass
DH 5	2.87800	153.493	0.4	Pass

Test Plots


GFSK DH1

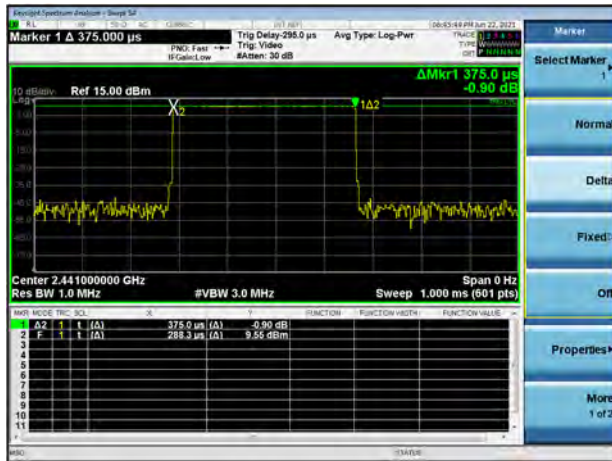


GFSK DH3

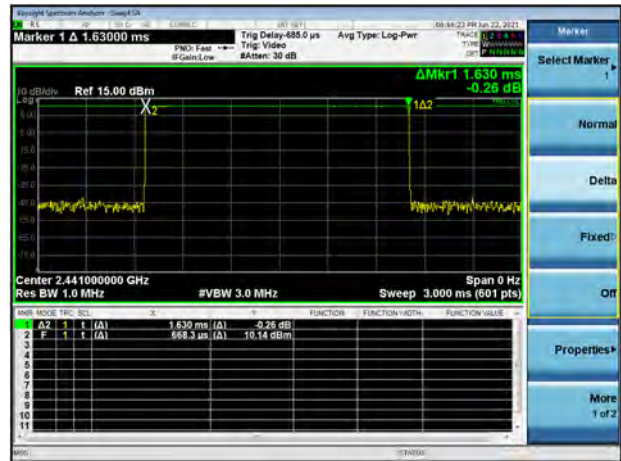


GFSK DH5

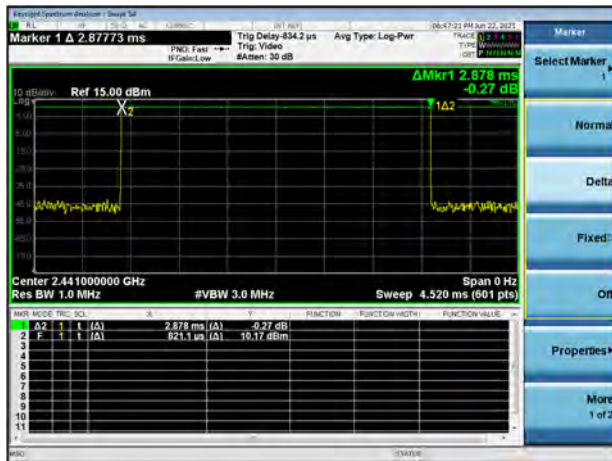


8-DPSK DH1

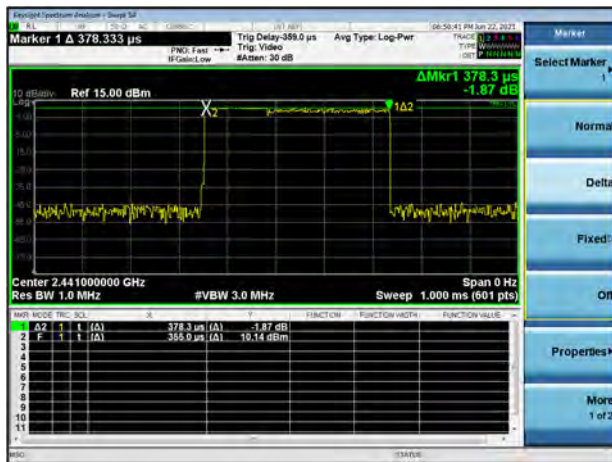


8-DPSK DH3

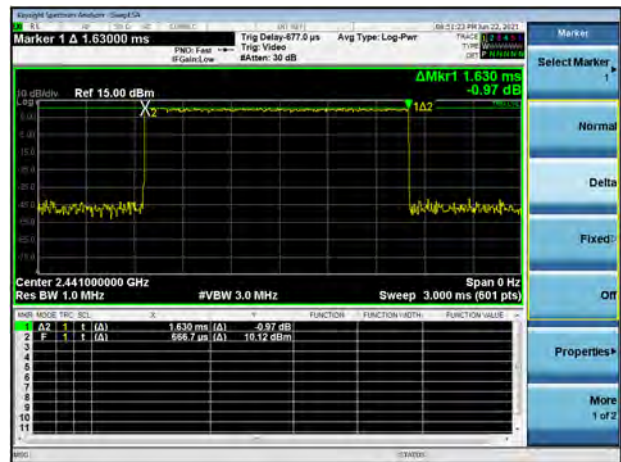


8-DPSK DH5

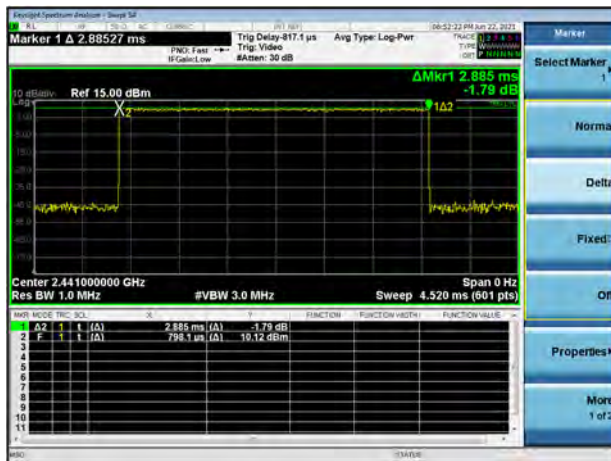


AFH Mode DH1

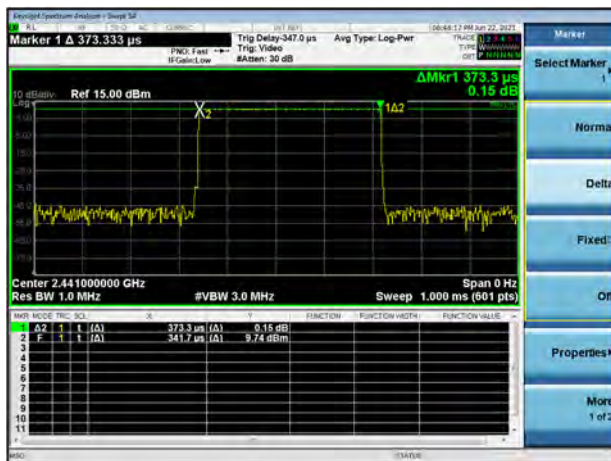

AFH Mode DH3

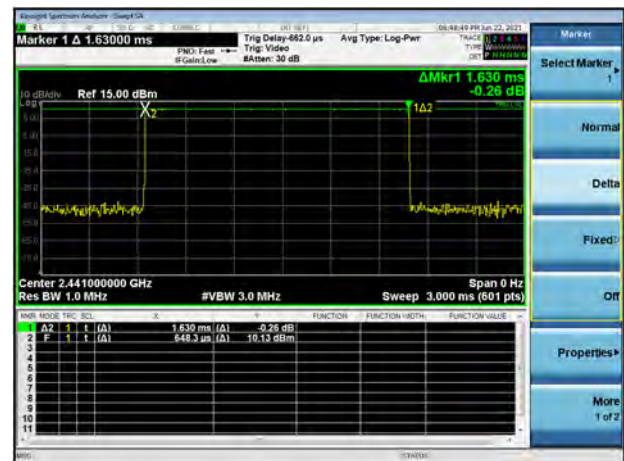

AFH Mode DH5

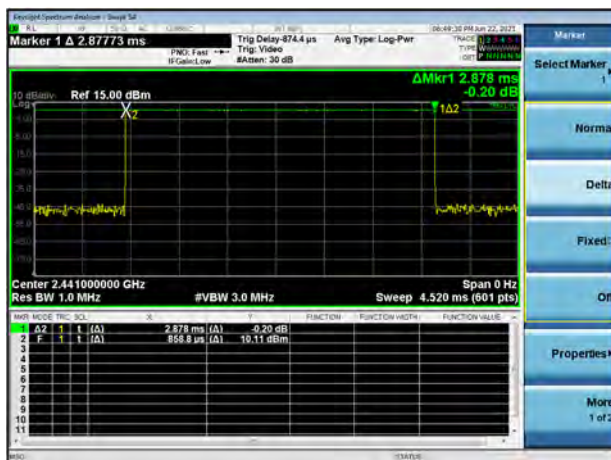

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.586	10.110	-9.890	Pass
Middle	-36.594	10.226	-9.774	Pass
High	-35.280	10.169	-9.831	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.726	10.114	-9.886	Pass
Middle	-36.542	10.205	-9.795	Pass
High	-34.764	10.156	-9.844	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-35.613	10.146	-9.854	Pass
8-DPSK	-35.180	10.242	-9.758	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL



GFSK LOW CHANNEL, BAND EDGE

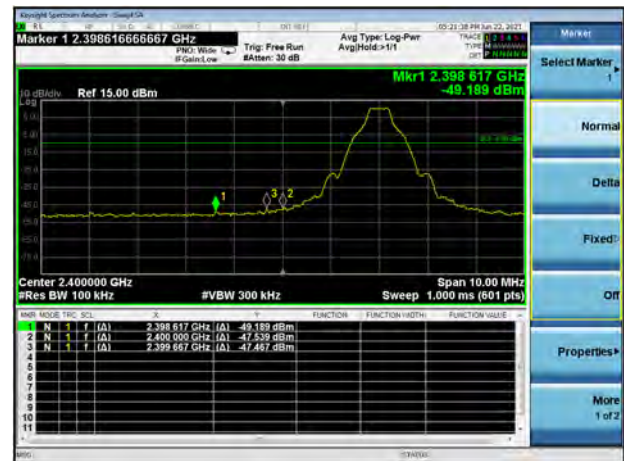

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

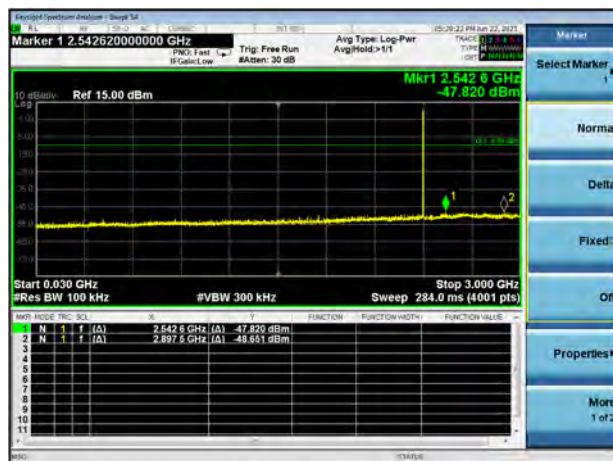


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



GFSK MIDDLE CHANNEL, CARRIER LEVEL



GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

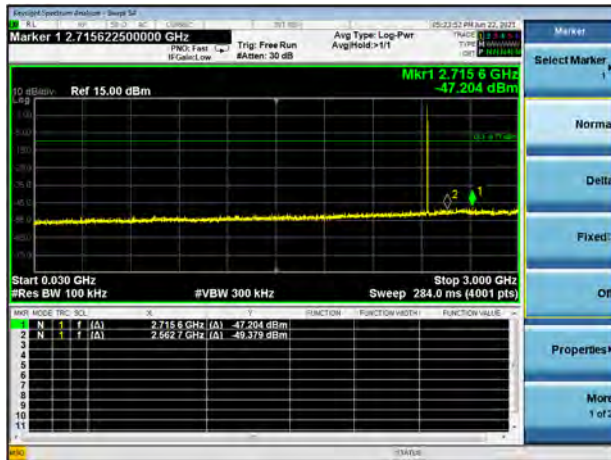

GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE



GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

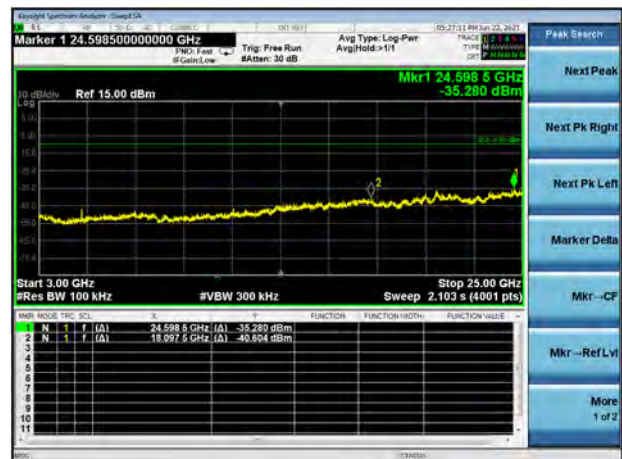


8-DPSK LOW CHANNEL, CARRIER LEVEL



8-DPSK LOW CHANNEL, BAND EDGE



8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

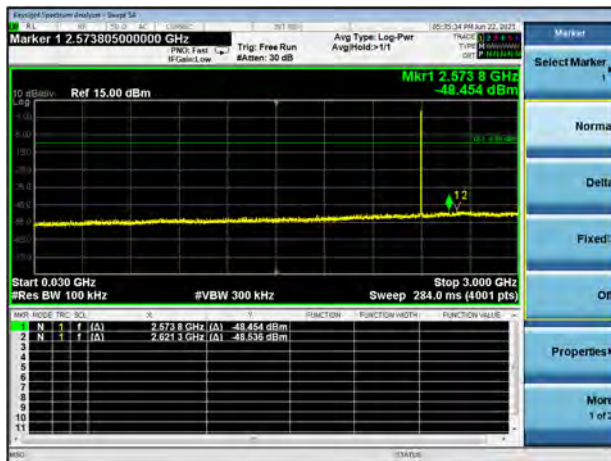


8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



8-DPSK MIDDLE CHANNEL, CARRIER LEVEL



8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

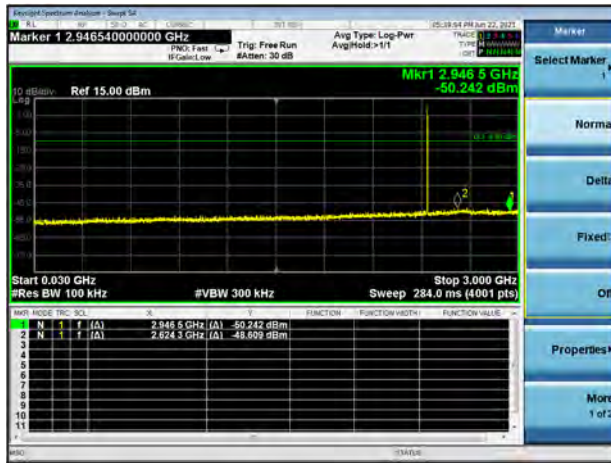


8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



8-DPSK HIGH CHANNEL, CARRIER LEVEL



8-DPSK HIGH CHANNEL, BAND EDGE

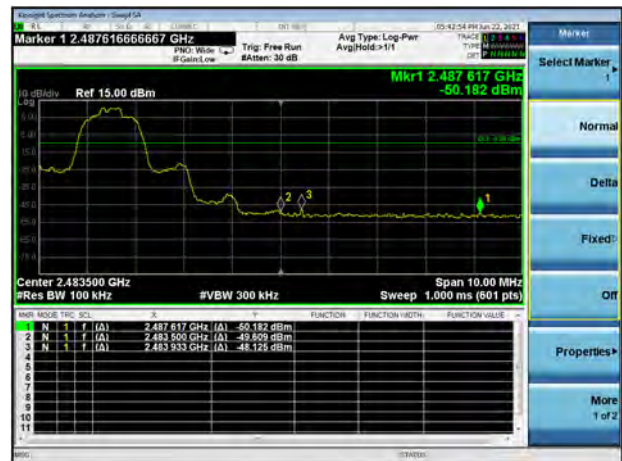


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



GFSK HOPPING, CARRIER LEVEL

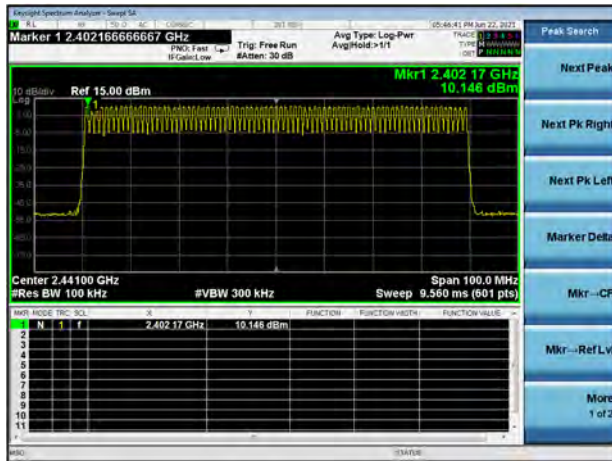


GFSK HOPPING BAND EDGE (LOW)




GFSK HOPPING BAND EDGE (HIGH)




GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

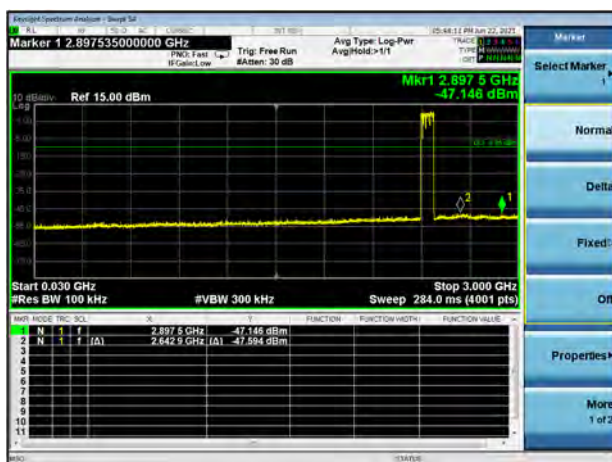

GFSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

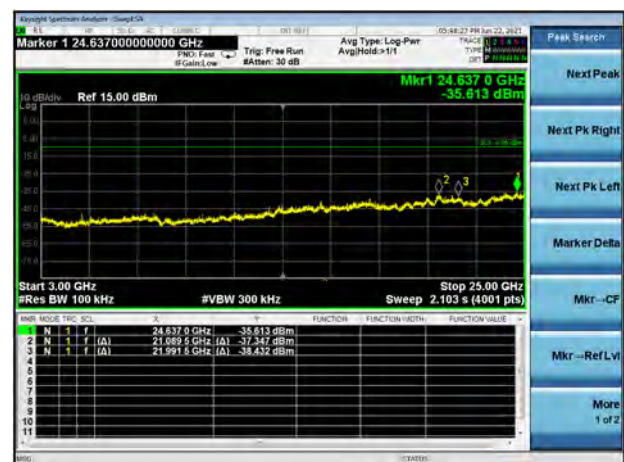

8-DPSK HOPPING, CARRIER LEVEL

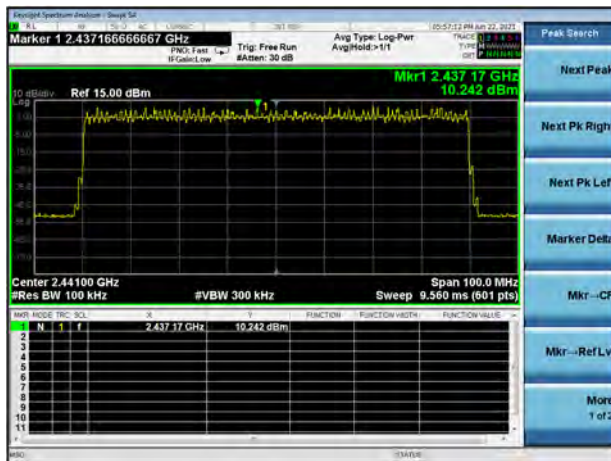


8-DPSK Hopping BAND EDGE (LOW)




8-DPSK Hopping BAND EDGE (HIGH)



8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

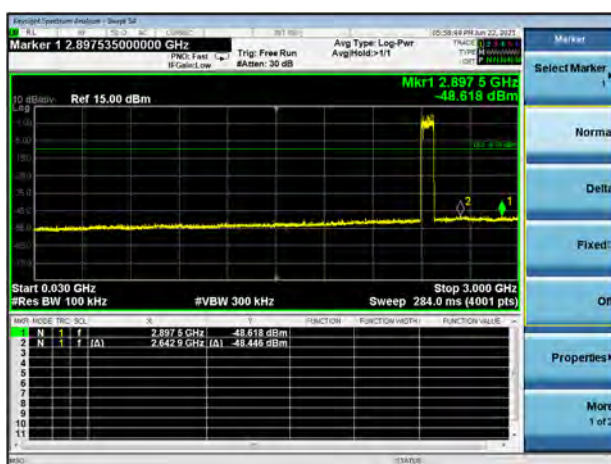

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

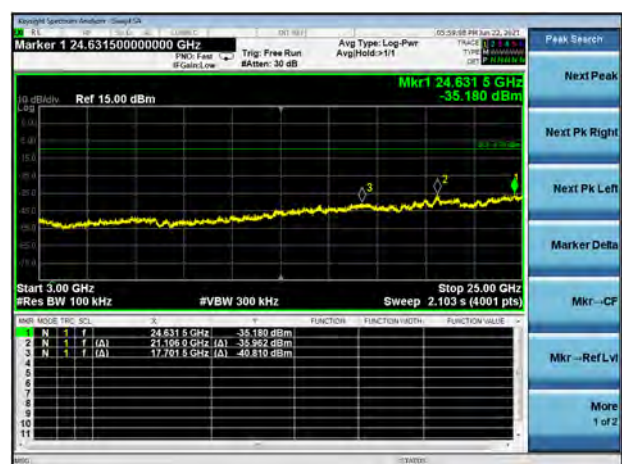

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBUV) = Original reading level of Spectrum Analyzer (dBUV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

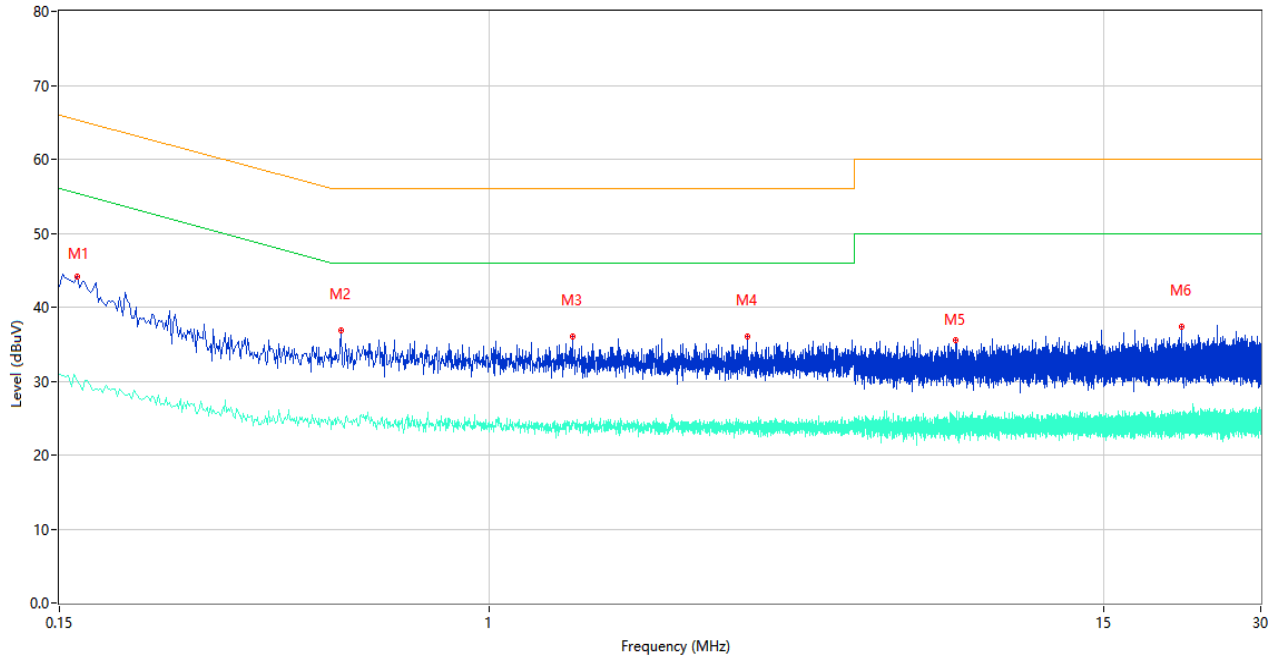

No.	Frequency (MHz)	Results (dBUV)	Factor (dB)	Limit (dBUV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	44.08	10.40	65.36	-21.28	Peak	L	Pass
1**	0.162	30.07	10.40	55.36	-25.29	AV	L	Pass
2	0.520	36.79	10.30	56.00	-19.21	Peak	L	Pass
2**	0.520	24.67	10.30	46.00	-21.33	AV	L	Pass
3	1.440	35.99	10.25	56.00	-20.01	Peak	L	Pass
3**	1.440	24.57	10.25	46.00	-21.43	AV	L	Pass
4	3.120	36.00	10.28	56.00	-20.00	Peak	L	Pass
4**	3.120	24.60	10.28	46.00	-21.40	AV	L	Pass
5	7.826	35.52	10.35	60.00	-24.48	Peak	L	Pass
5**	7.826	24.58	10.35	50.00	-25.42	AV	L	Pass
6	21.156	37.35	10.57	60.00	-22.65	Peak	L	Pass
6**	21.156	25.15	10.57	50.00	-24.85	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

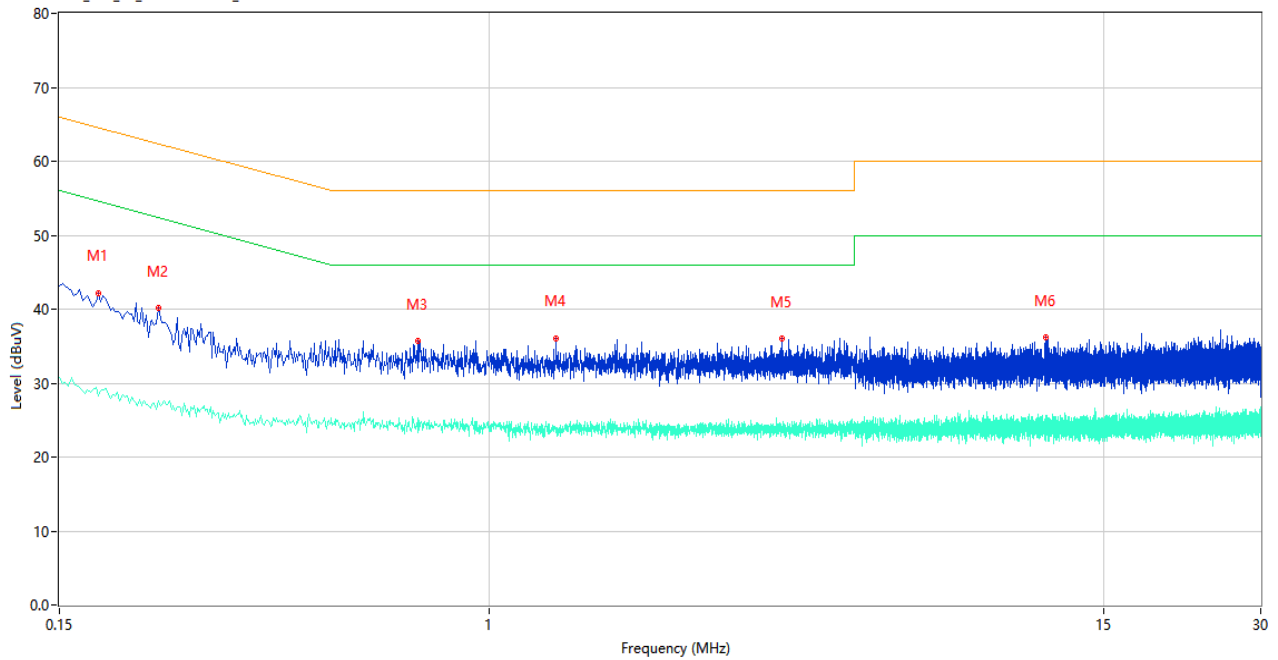

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.178	42.22	10.39	64.58	-22.36	Peak	N	Pass
1**	0.178	28.22	10.39	54.58	-26.36	AV	N	Pass
2	0.232	40.10	10.36	62.38	-22.28	Peak	N	Pass
2**	0.232	27.63	10.36	52.38	-24.75	AV	N	Pass
3	0.728	35.70	10.27	56.00	-20.30	Peak	N	Pass
3**	0.728	25.36	10.27	46.00	-20.64	AV	N	Pass
4	1.340	36.09	10.24	56.00	-19.91	Peak	N	Pass
4**	1.340	23.54	10.24	46.00	-22.46	AV	N	Pass
5	3.624	36.05	10.30	56.00	-19.95	Peak	N	Pass
5**	3.624	23.69	10.30	46.00	-22.31	AV	N	Pass
6	11.622	36.17	10.38	60.00	-23.83	Peak	N	Pass
6**	11.622	25.18	10.38	50.00	-24.82	AV	N	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT H

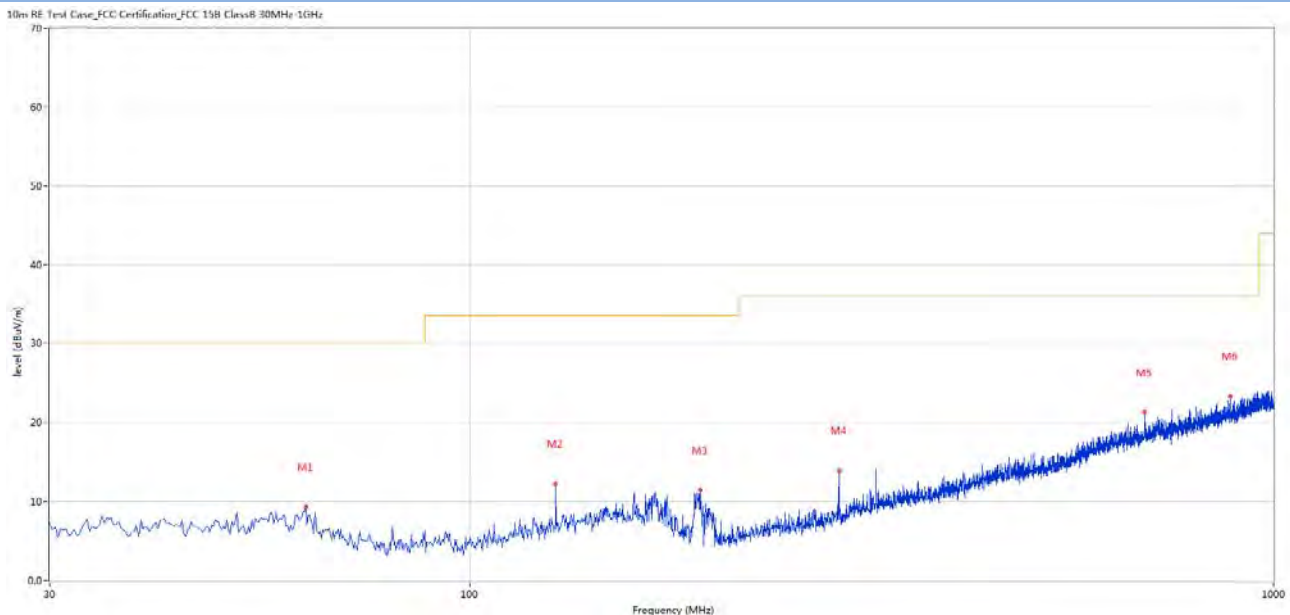

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	62.487	9.33	-28.36	30.0	-20.67	Peak	357.00	100	Horizontal	Pass
2	127.946	12.25	-27.34	33.5	-21.25	Peak	9.00	100	Horizontal	Pass
3	193.404	11.46	-29.50	33.5	-22.04	Peak	225.00	200	Horizontal	Pass
4	287.956	13.94	-26.09	36.0	-22.06	Peak	360.00	200	Horizontal	Pass
5	690.890	21.22	-16.09	36.0	-14.78	Peak	317.00	100	Horizontal	Pass
6	883.629	23.30	-12.98	36.0	-12.70	Peak	37.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

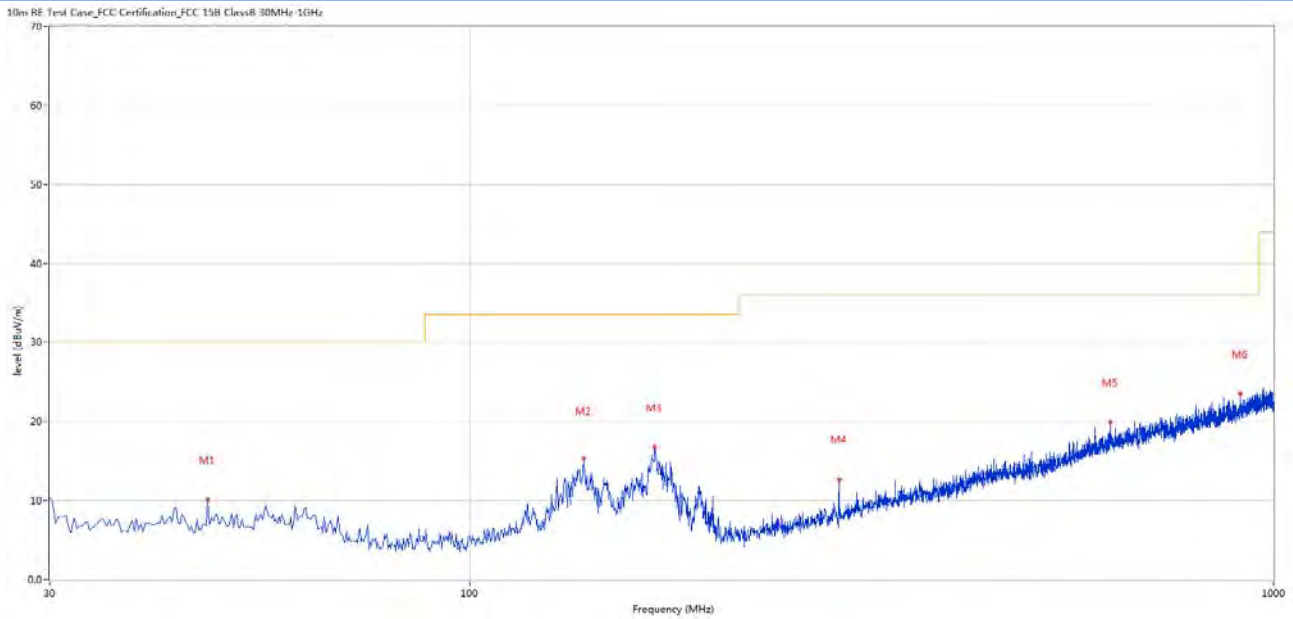

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.213	10.09	-27.06	30.0	-19.91	Peak	126.00	100	Vertical	Pass
2	138.613	15.29	-26.42	33.5	-18.21	Peak	240.00	200	Vertical	Pass
3	169.888	16.71	-26.71	33.5	-16.79	Peak	240.00	200	Vertical	Pass
4	287.956	12.63	-26.09	36.0	-23.37	Peak	136.00	100	Vertical	Pass
5	626.643	19.86	-17.21	36.0	-16.14	Peak	33.00	200	Vertical	Pass
6	908.115	23.43	-12.27	36.0	-12.57	Peak	360.00	200	Vertical	Pass


Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

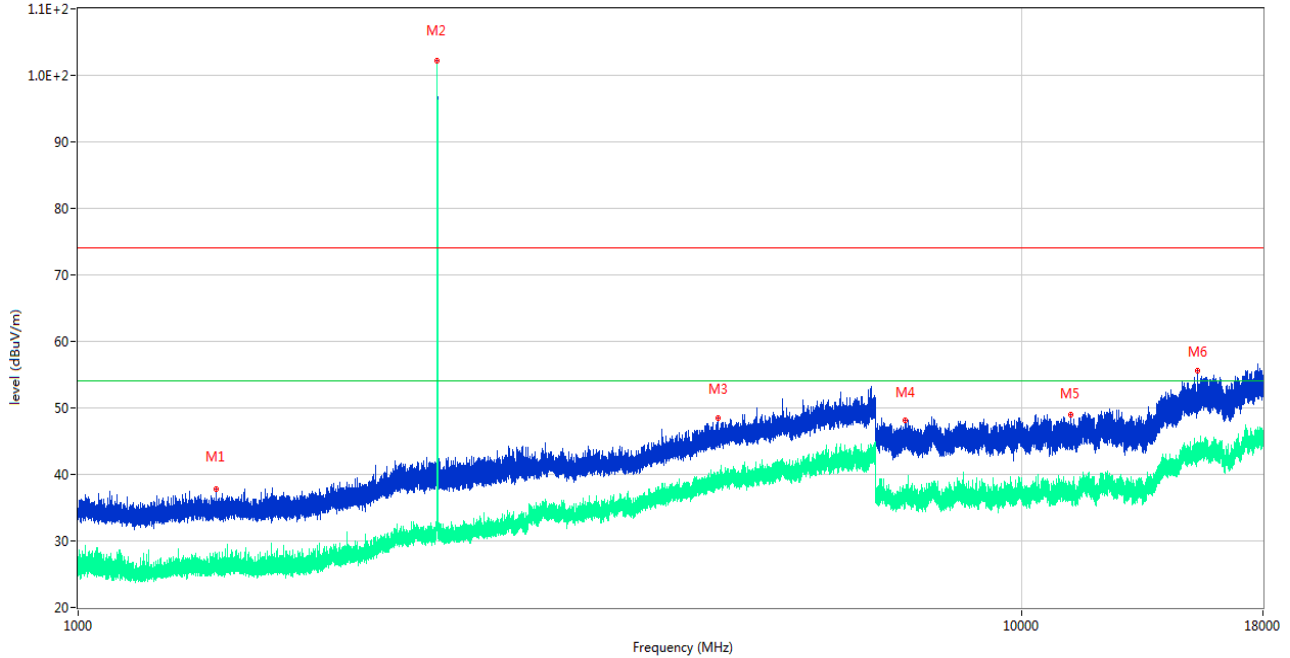

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1401.500	37.79	-14.90	74.0	-36.21	Peak	44.00	150	Horizontal	Pass
1**	1401.500	26.45	-14.90	54.0	-27.55	AV	44.00	150	Horizontal	Pass
2	2401.800	102.19	-10.75	74.0	28.19	Peak	81.00	150	Horizontal	N/A
2**	2401.800	100.30	-10.75	54.0	46.30	AV	81.00	150	Horizontal	N/A
3	4760.400	48.40	-2.16	74.0	-25.60	Peak	271.00	150	Horizontal	Pass
3**	4760.400	38.95	-2.16	54.0	-15.05	AV	271.00	150	Horizontal	Pass
4	7527.275	48.17	17.41	74.0	-25.83	Peak	362.00	150	Horizontal	Pass
4**	7527.275	36.05	17.41	54.0	-17.95	AV	362.00	150	Horizontal	Pass
5	11259.888	49.07	18.04	74.0	-24.93	Peak	286.00	150	Horizontal	Pass
5**	11259.888	37.60	18.04	54.0	-16.40	AV	286.00	150	Horizontal	Pass
6	15343.237	55.52	22.39	74.0	-18.48	Peak	284.00	150	Horizontal	Pass
6**	15343.237	43.37	22.39	54.0	-10.63	AV	284.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

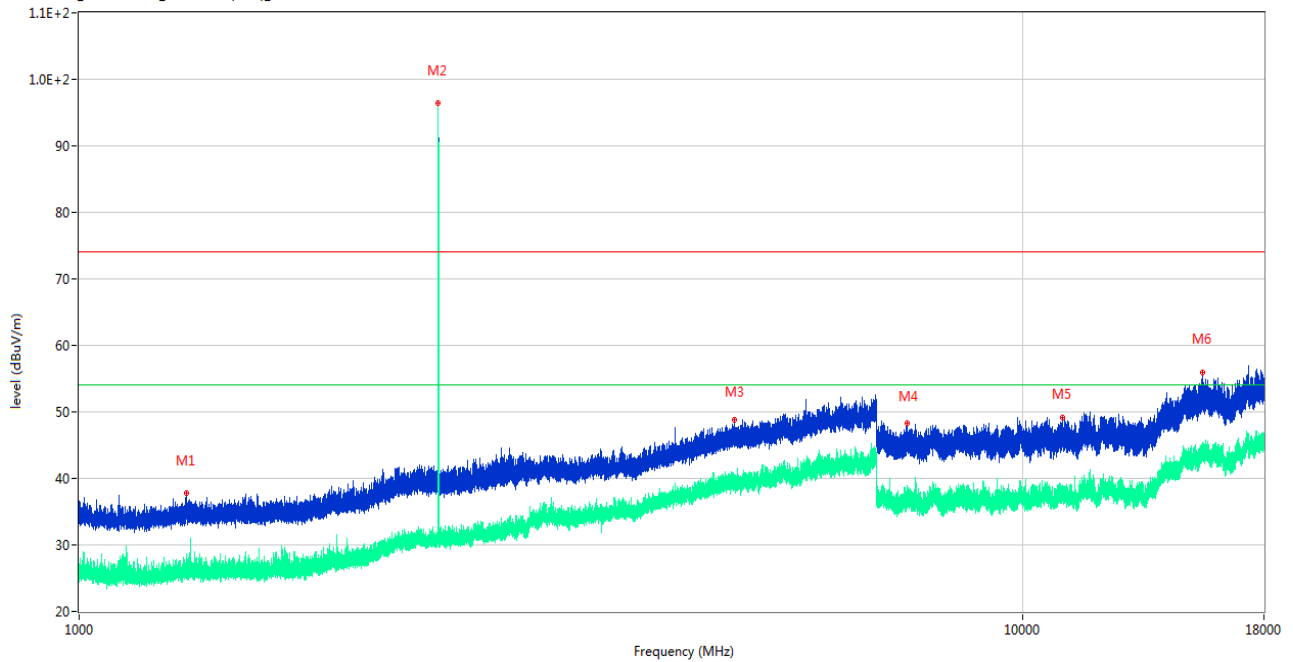

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.400	37.81	-14.73	74.0	-36.19	Peak	104.00	150	Vertical	Pass
1**	1300.400	26.81	-14.73	54.0	-27.19	AV	104.00	150	Vertical	Pass
2	2401.900	96.49	-10.74	74.0	22.49	Peak	181.00	150	Vertical	N/A
2**	2401.900	95.19	-10.74	54.0	41.19	AV	181.00	150	Vertical	N/A
3	4949.000	48.77	-1.67	74.0	-25.23	Peak	238.00	150	Vertical	Pass
3**	4949.000	39.30	-1.67	54.0	-14.70	AV	238.00	150	Vertical	Pass
4	7536.763	48.39	17.63	74.0	-25.61	Peak	313.00	150	Vertical	Pass
4**	7536.763	37.03	17.63	54.0	-16.97	AV	313.00	150	Vertical	Pass
5	11019.537	49.10	18.93	74.0	-24.90	Peak	342.00	150	Vertical	Pass
5**	11019.537	37.32	18.93	54.0	-16.68	AV	342.00	150	Vertical	Pass
6	15498.112	55.97	23.94	74.0	-18.03	Peak	118.00	150	Vertical	Pass
6**	15498.112	43.30	23.94	54.0	-10.70	AV	118.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

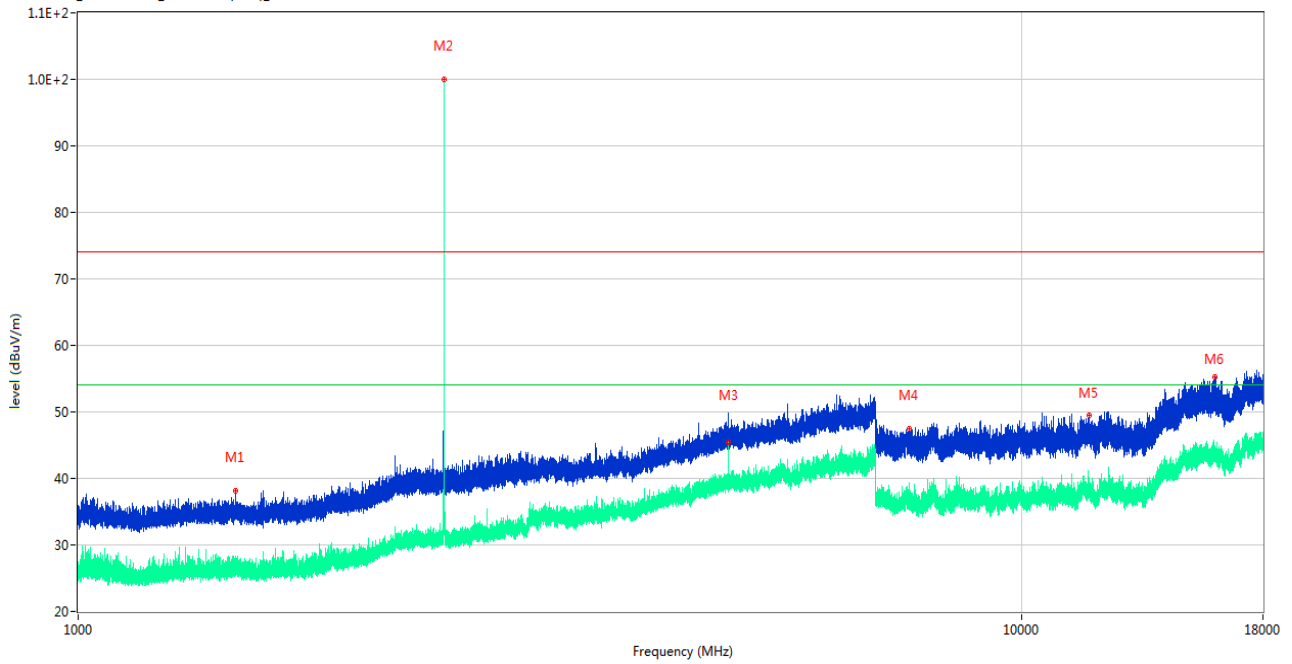

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1467.100	38.15	-14.89	74.0	-35.85	Peak	254.00	150	Horizontal	Pass
1**	1467.100	26.56	-14.89	54.0	-27.44	AV	254.00	150	Horizontal	Pass
2	2440.800	100.03	-10.52	74.0	26.03	Peak	85.00	150	Horizontal	N/A
2**	2440.800	99.25	-10.52	54.0	45.25	AV	85.00	150	Horizontal	N/A
3	4882.200	49.02	-1.18	74.0	-24.98	Peak	114.00	150	Horizontal	Pass
3**	4882.200	45.35	-1.18	54.0	-8.65	AV	114.00	150	Horizontal	Pass
4	7599.437	47.42	16.96	74.0	-26.58	Peak	362.00	150	Horizontal	Pass
4**	7599.437	36.69	16.96	54.0	-17.31	AV	362.00	150	Horizontal	Pass
5	11769.338	49.43	18.78	74.0	-24.57	Peak	73.00	150	Horizontal	Pass
5**	11769.338	38.14	18.78	54.0	-15.86	AV	73.00	150	Horizontal	Pass
6	15990.038	55.28	24.01	74.0	-18.72	Peak	351.00	150	Horizontal	Pass
6**	15990.038	43.86	24.01	54.0	-10.14	AV	351.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

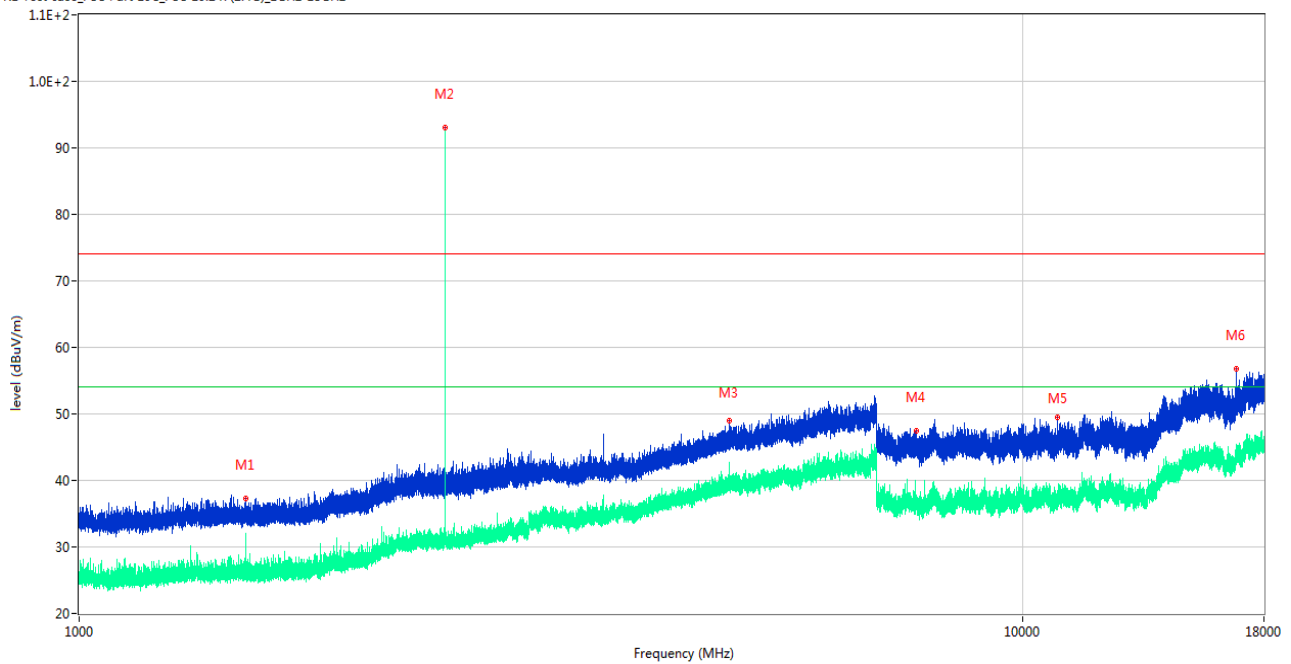

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.200	37.32	-15.20	74.0	-36.68	Peak	14.00	150	Vertical	Pass
1**	1500.200	29.42	-15.20	54.0	-24.58	AV	14.00	150	Vertical	Pass
2	2440.800	92.99	-10.52	74.0	18.99	Peak	161.00	150	Vertical	N/A
2**	2440.800	91.15	-10.52	54.0	37.15	AV	161.00	150	Vertical	N/A
3	4882.400	49.03	-1.17	74.0	-24.97	Peak	183.00	150	Vertical	Pass
3**	4882.400	40.96	-1.17	54.0	-13.04	AV	183.00	150	Vertical	Pass
4	7717.025	47.48	16.85	74.0	-26.52	Peak	162.00	150	Vertical	Pass
4**	7717.025	36.35	16.85	54.0	-17.65	AV	162.00	150	Vertical	Pass
5	10885.562	49.43	18.35	74.0	-24.57	Peak	238.00	150	Vertical	Pass
5**	10885.562	37.20	18.35	54.0	-16.80	AV	238.00	150	Vertical	Pass
6	16840.012	56.71	23.40	74.0	-17.29	Peak	361.00	150	Vertical	Pass
6**	16840.012	45.36	23.40	54.0	-8.64	AV	361.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

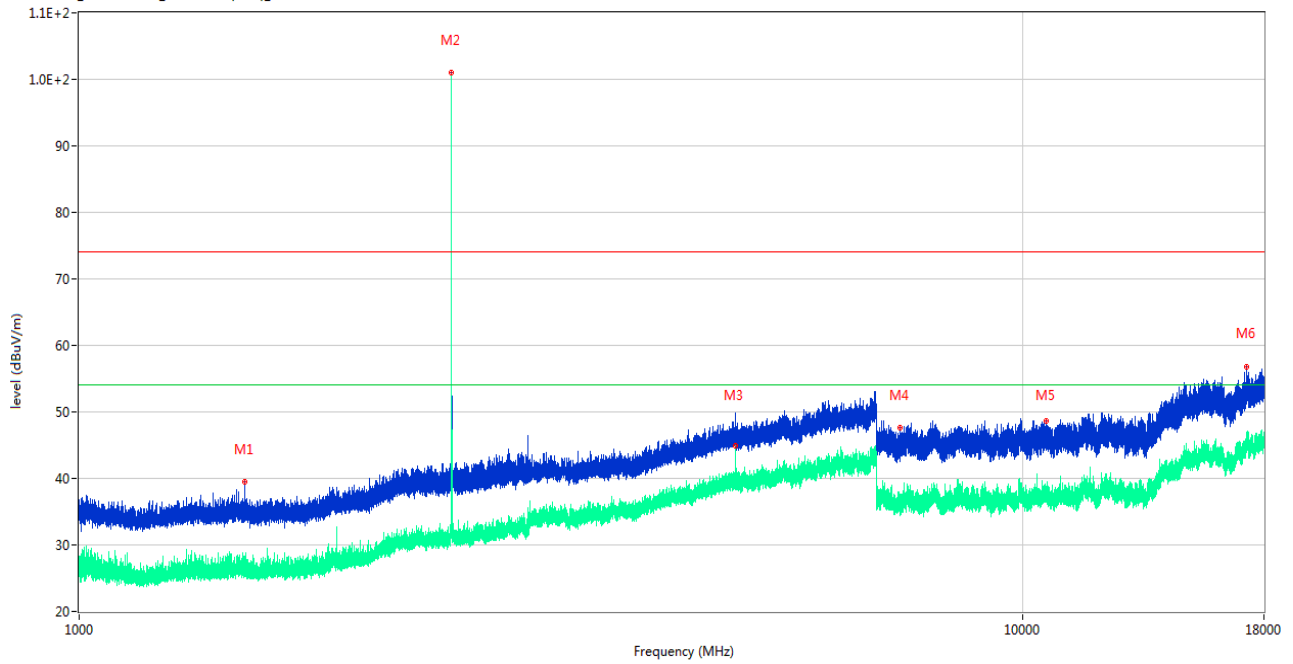

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.700	39.49	-15.02	74.0	-34.51	Peak	192.00	150	Horizontal	Pass
1**	1496.700	27.71	-15.02	54.0	-26.29	AV	192.00	150	Horizontal	Pass
2	2479.800	100.93	-10.36	74.0	26.93	Peak	85.00	150	Horizontal	N/A
2**	2479.800	99.63	-10.36	54.0	45.63	AV	85.00	150	Horizontal	N/A
3	4960.400	48.16	-1.70	74.0	-25.84	Peak	96.00	150	Horizontal	Pass
3**	4960.400	44.90	-1.70	54.0	-9.10	AV	96.00	150	Horizontal	Pass
4	7411.412	47.59	17.25	74.0	-26.41	Peak	347.00	150	Horizontal	Pass
4**	7411.412	36.33	17.25	54.0	-17.67	AV	347.00	150	Horizontal	Pass
5	10570.463	48.72	18.38	74.0	-25.28	Peak	77.00	150	Horizontal	Pass
5**	10570.463	36.91	18.38	54.0	-17.09	AV	77.00	150	Horizontal	Pass
6	17241.901	56.84	24.21	74.0	-17.16	Peak	57.00	150	Horizontal	Pass
6**	17241.901	45.72	24.21	54.0	-8.28	AV	57.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

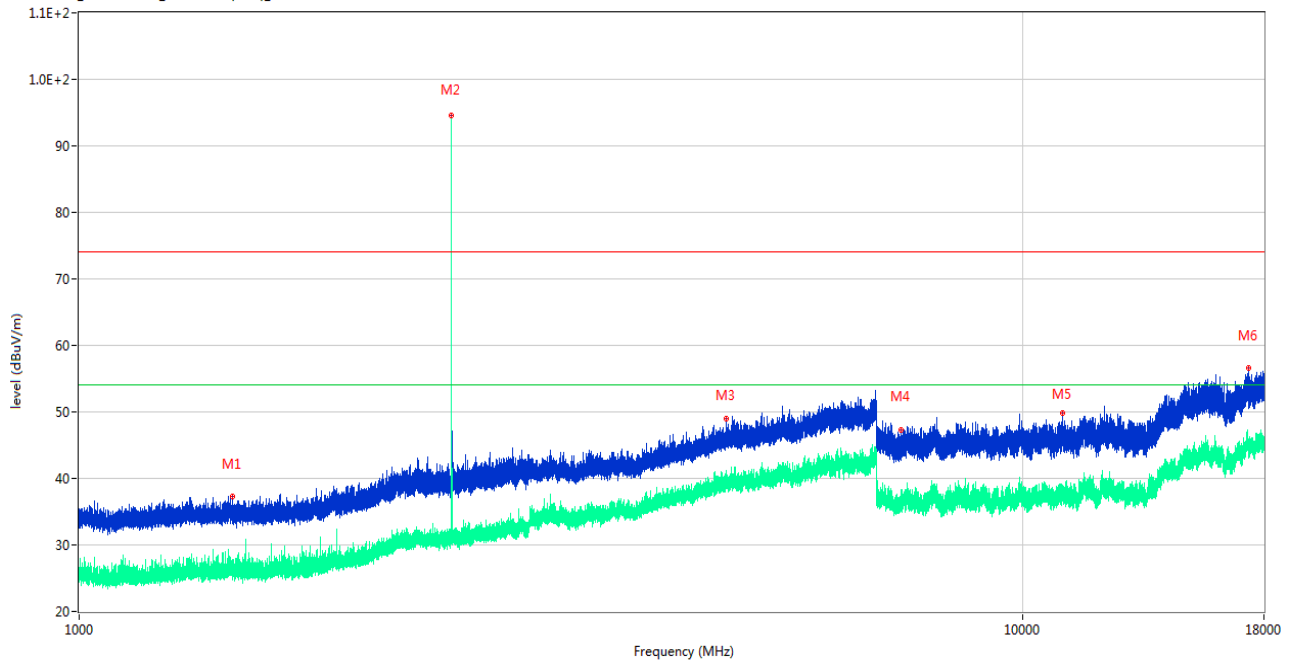

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1453.500	37.28	-14.73	74.0	-36.72	Peak	3.00	150	Vertical	Pass
1**	1453.500	25.95	-14.73	54.0	-28.05	AV	3.00	150	Vertical	Pass
2	2479.800	94.60	-10.36	74.0	20.60	Peak	164.00	150	Vertical	N/A
2**	2479.800	92.21	-10.36	54.0	38.21	AV	164.00	150	Vertical	N/A
3	4850.200	48.93	-1.29	74.0	-25.07	Peak	331.00	150	Vertical	Pass
3**	4850.200	38.80	-1.29	54.0	-15.20	AV	331.00	150	Vertical	Pass
4	7431.538	47.23	17.16	74.0	-26.77	Peak	10.00	150	Vertical	Pass
4**	7431.538	35.66	17.16	54.0	-18.34	AV	10.00	150	Vertical	Pass
5	11017.813	49.80	18.94	74.0	-24.20	Peak	166.00	150	Vertical	Pass
5**	11017.813	38.09	18.94	54.0	-15.91	AV	166.00	150	Vertical	Pass
6	17317.501	56.64	24.36	74.0	-17.36	Peak	-2.00	150	Vertical	Pass
6**	17317.501	45.72	24.36	54.0	-8.28	AV	-2.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

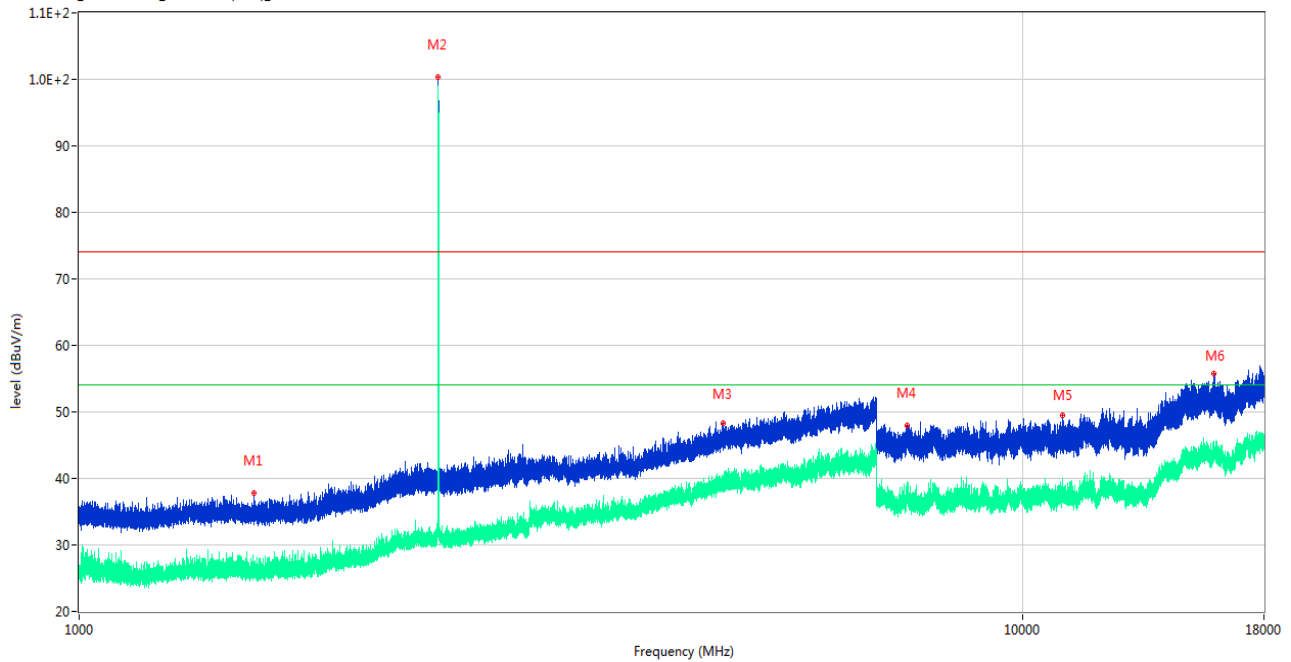

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1532.200	37.84	-15.08	74.0	-36.16	Peak	38.00	150	Horizontal	Pass
1**	1532.200	26.16	-15.08	54.0	-27.84	AV	38.00	150	Horizontal	Pass
2	2401.900	100.38	-10.74	74.0	26.38	Peak	82.00	150	Horizontal	N/A
2**	2401.900	97.16	-10.74	54.0	43.16	AV	82.00	150	Horizontal	N/A
3	4809.600	48.28	-1.41	74.0	-25.72	Peak	24.00	150	Horizontal	Pass
3**	4809.600	38.51	-1.41	54.0	-15.49	AV	24.00	150	Horizontal	Pass
4	7534.462	48.02	17.55	74.0	-25.98	Peak	0.00	150	Horizontal	Pass
4**	7534.462	38.72	17.55	54.0	-15.28	AV	0.00	150	Horizontal	Pass
5	11010.625	49.52	18.97	74.0	-24.48	Peak	100.00	150	Horizontal	Pass
5**	11010.625	37.43	18.97	54.0	-16.57	AV	100.00	150	Horizontal	Pass
6	15917.325	55.81	23.59	74.0	-18.19	Peak	100.00	150	Horizontal	Pass
6**	15917.325	44.47	23.59	54.0	-9.53	AV	100.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

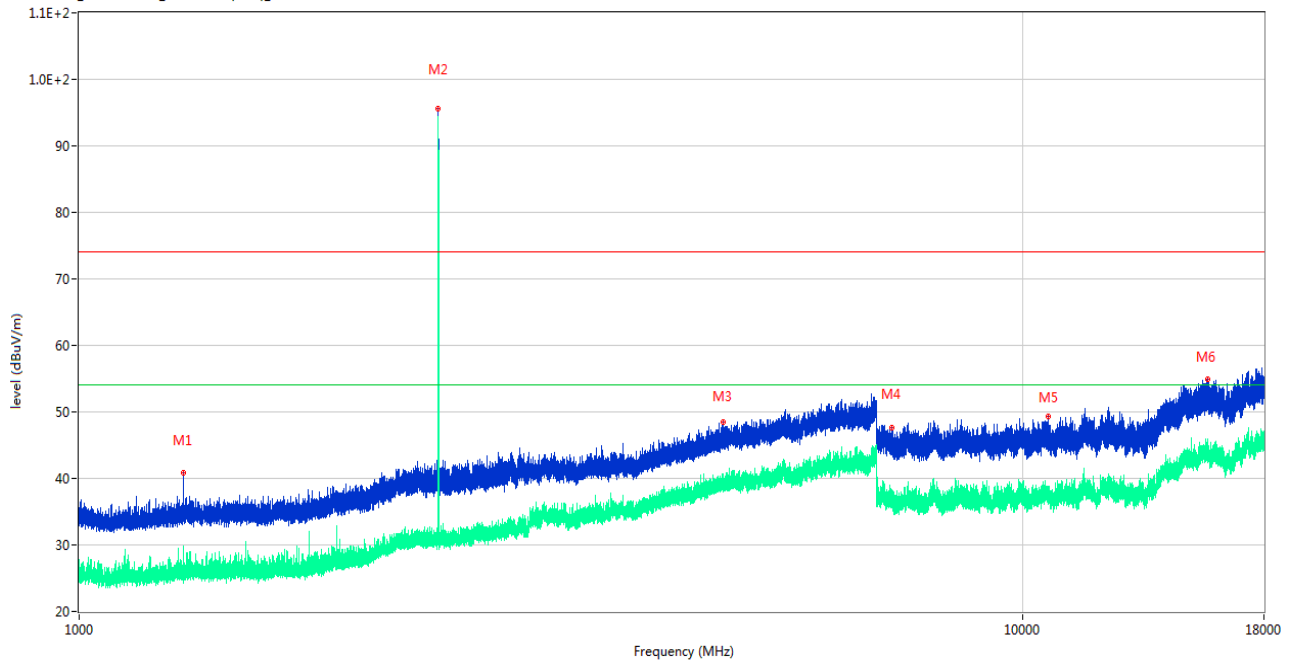

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.200	40.78	-14.87	74.0	-33.22	Peak	72.00	150	Vertical	Pass
1**	1288.200	27.53	-14.87	54.0	-26.47	AV	72.00	150	Vertical	Pass
2	2402.200	95.61	-10.73	74.0	21.61	Peak	185.00	150	Vertical	N/A
2**	2402.200	92.76	-10.73	54.0	38.76	AV	185.00	150	Vertical	N/A
3	4810.600	48.52	-1.41	74.0	-25.48	Peak	21.00	150	Vertical	Pass
3**	4810.600	39.52	-1.41	54.0	-14.48	AV	21.00	150	Vertical	Pass
4	7255.587	47.63	17.09	74.0	-26.37	Peak	271.00	150	Vertical	Pass
4**	7255.587	37.19	17.09	54.0	-16.81	AV	271.00	150	Vertical	Pass
5	10626.525	49.26	18.40	74.0	-24.74	Peak	326.00	150	Vertical	Pass
5**	10626.525	37.08	18.40	54.0	-16.92	AV	326.00	150	Vertical	Pass
6	15702.600	54.89	23.56	74.0	-19.11	Peak	145.00	150	Vertical	Pass
6**	15702.600	45.80	23.56	54.0	-8.20	AV	145.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

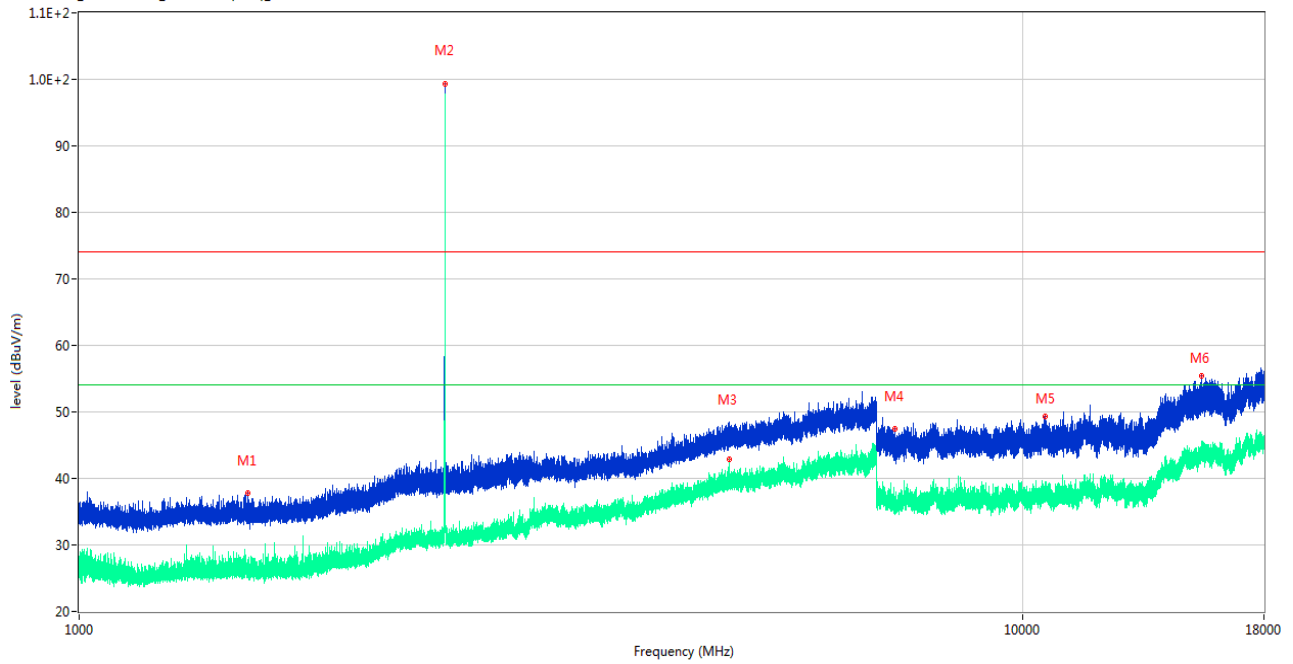

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1508.700	37.71	-15.03	74.0	-36.29	Peak	125.00	150	Horizontal	Pass
1**	1508.700	26.44	-15.03	54.0	-27.56	AV	125.00	150	Horizontal	Pass
2	2440.900	99.37	-10.52	74.0	25.37	Peak	89.00	150	Horizontal	N/A
2**	2440.900	96.17	-10.52	54.0	42.17	AV	89.00	150	Horizontal	N/A
3	4882.000	46.77	-1.18	74.0	-27.23	Peak	140.00	150	Horizontal	Pass
3**	4882.000	42.94	-1.18	54.0	-11.06	AV	140.00	150	Horizontal	Pass
4	7313.375	47.42	16.96	74.0	-26.58	Peak	233.00	150	Horizontal	Pass
4**	7313.375	36.12	16.96	54.0	-17.88	AV	233.00	150	Horizontal	Pass
5	10554.075	49.35	18.30	74.0	-24.65	Peak	158.00	150	Horizontal	Pass
5**	10554.075	38.05	18.30	54.0	-15.95	AV	158.00	150	Horizontal	Pass
6	15466.613	55.43	23.57	74.0	-18.57	Peak	348.00	150	Horizontal	Pass
6**	15466.613	43.46	23.57	54.0	-10.54	AV	348.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

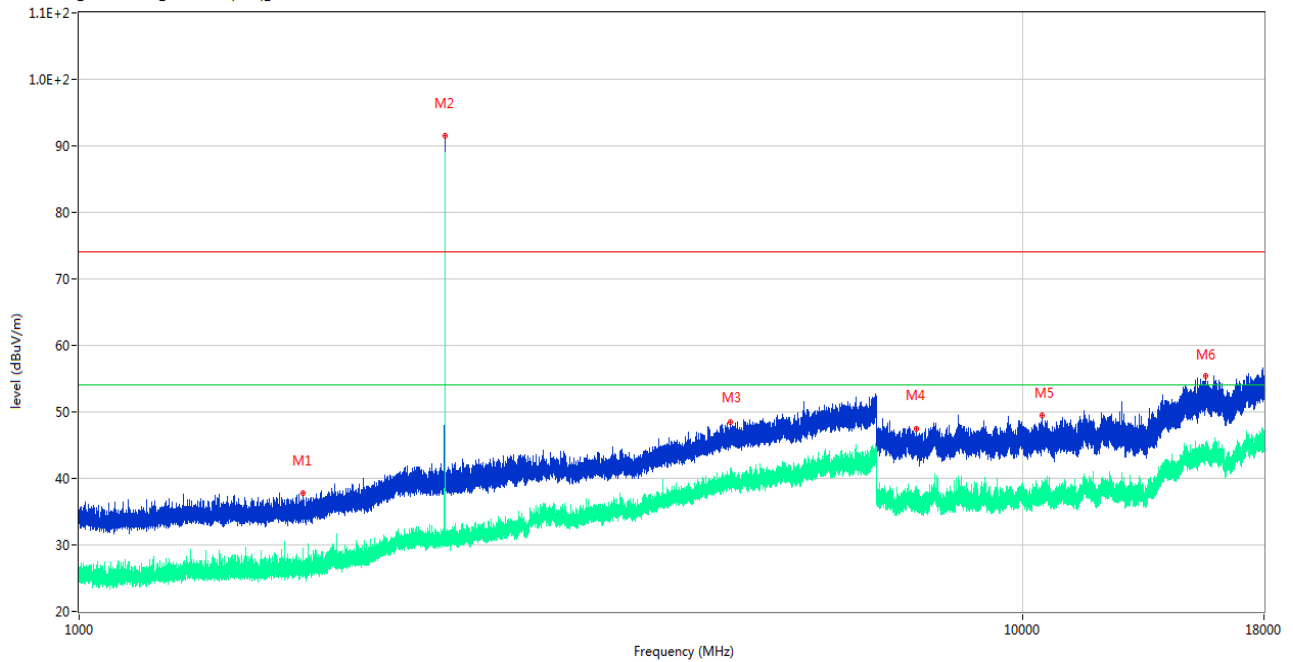

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1725.100	37.74	-15.05	74.0	-36.26	Peak	266.00	150	Vertical	Pass
1**	1725.100	27.73	-15.05	54.0	-26.27	AV	266.00	150	Vertical	Pass
2	2441.000	91.52	-10.52	74.0	17.52	Peak	159.00	150	Vertical	N/A
2**	2441.000	89.01	-10.52	54.0	35.01	AV	159.00	150	Vertical	N/A
3	4896.400	48.40	-1.02	74.0	-25.60	Peak	24.00	150	Vertical	Pass
3**	4896.400	39.59	-1.02	54.0	-14.41	AV	24.00	150	Vertical	Pass
4	7708.400	47.46	17.03	74.0	-26.54	Peak	355.00	150	Vertical	Pass
4**	7708.400	35.78	17.03	54.0	-18.22	AV	355.00	150	Vertical	Pass
5	10480.474	49.49	18.60	74.0	-24.51	Peak	0.00	150	Vertical	Pass
5**	10480.474	36.96	18.60	54.0	-17.04	AV	0.00	150	Vertical	Pass
6	15617.549	55.47	23.46	74.0	-18.53	Peak	101.00	150	Vertical	Pass
6**	15617.549	43.91	23.46	54.0	-10.09	AV	101.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

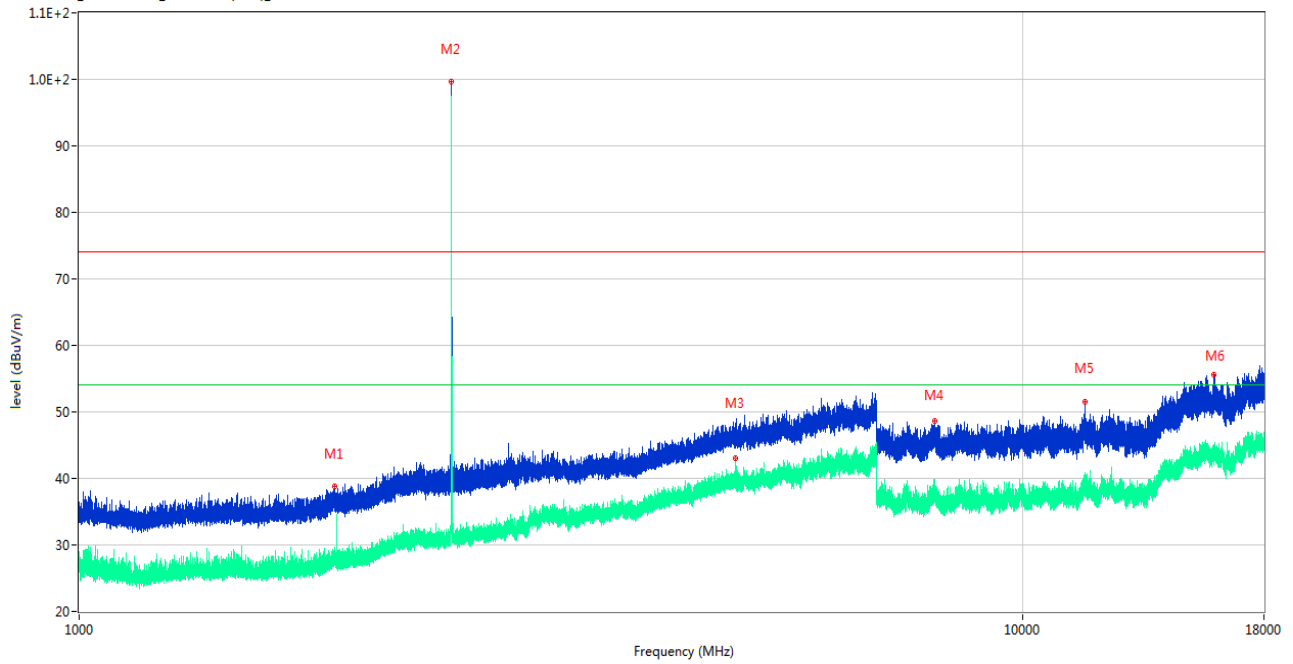

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1866.500	38.74	-13.66	74.0	-35.26	Peak	181.00	150	Horizontal	Pass
1**	1866.500	27.37	-13.66	54.0	-26.63	AV	181.00	150	Horizontal	Pass
2	2479.900	99.61	-10.36	74.0	25.61	Peak	83.00	150	Horizontal	N/A
2**	2479.900	97.47	-10.36	54.0	43.47	AV	83.00	150	Horizontal	N/A
3	4960.600	46.63	-1.68	74.0	-27.37	Peak	0.00	150	Horizontal	Pass
3**	4960.600	42.99	-1.68	54.0	-11.01	AV	0.00	150	Horizontal	Pass
4	8058.000	48.66	18.34	74.0	-25.34	Peak	0.00	150	Horizontal	Pass
4**	8058.000	36.51	18.34	54.0	-17.49	AV	0.00	150	Horizontal	Pass
5	11625.588	51.54	20.27	74.0	-22.46	Peak	184.00	150	Horizontal	Pass
5**	11625.588	38.59	20.27	54.0	-15.41	AV	184.00	150	Horizontal	Pass
6	15939.637	55.65	23.90	74.0	-18.35	Peak	33.00	150	Horizontal	Pass
6**	15939.637	43.75	23.90	54.0	-10.25	AV	33.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

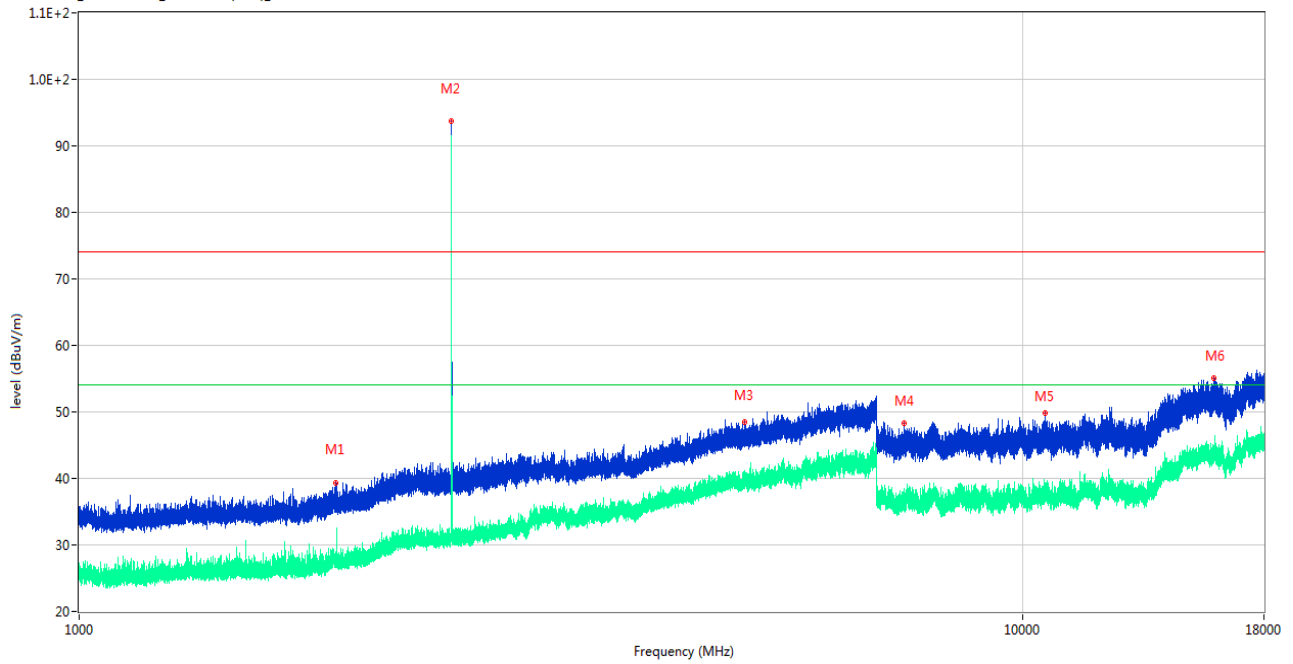


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1870.500	39.26	-13.68	74.0	-34.74	Peak	298.00	150	Vertical	Pass
1**	1870.500	26.84	-13.68	54.0	-27.16	AV	298.00	150	Vertical	Pass
2	2479.800	93.67	-10.36	74.0	19.67	Peak	163.00	150	Vertical	N/A
2**	2479.800	90.41	-10.36	54.0	36.41	AV	163.00	150	Vertical	N/A
3	5065.600	48.41	-0.42	74.0	-25.59	Peak	0.00	150	Vertical	Pass
3**	5065.600	40.04	-0.42	54.0	-13.96	AV	0.00	150	Vertical	Pass
4	7476.675	48.26	17.56	74.0	-25.74	Peak	118.00	150	Vertical	Pass
4**	7476.675	36.70	17.56	54.0	-17.30	AV	118.00	150	Vertical	Pass
5	10551.775	49.79	18.29	74.0	-24.21	Peak	0.00	150	Vertical	Pass
5**	10551.775	37.45	18.29	54.0	-16.55	AV	0.00	150	Vertical	Pass
6	15912.863	55.14	23.51	74.0	-18.86	Peak	216.00	150	Vertical	Pass
6**	15912.863	44.90	23.51	54.0	-9.10	AV	216.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

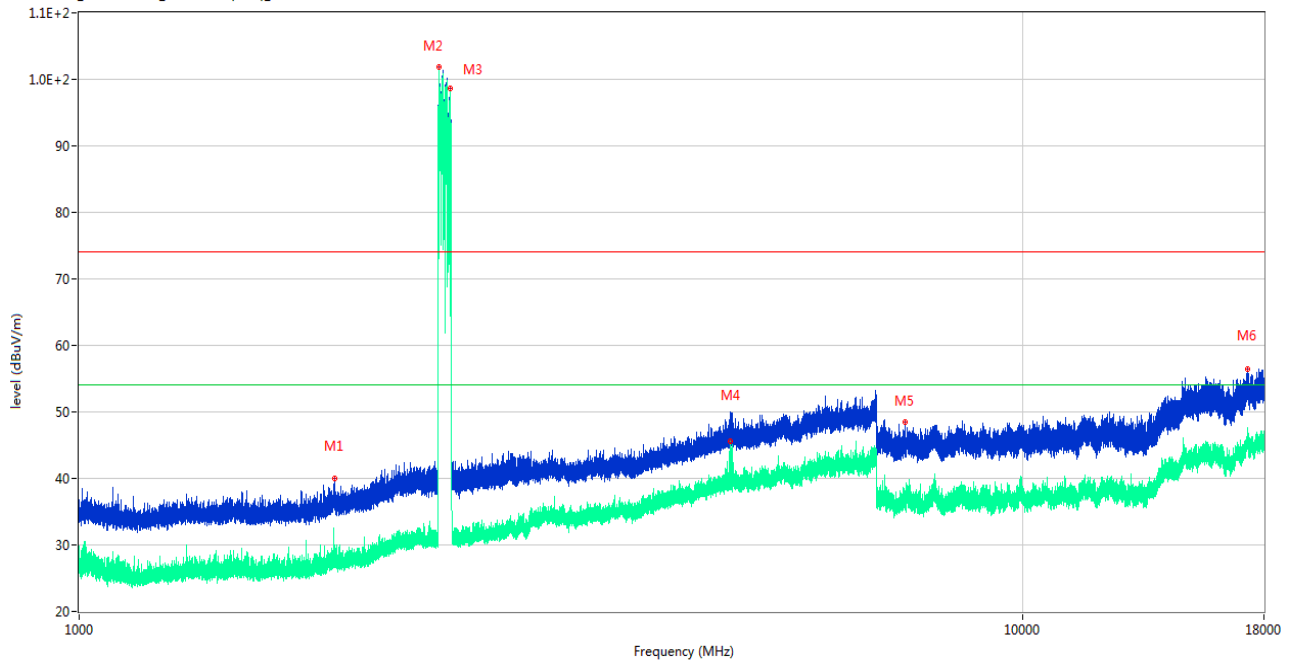

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.700	40.07	-13.48	74.0	-33.93	Peak	167.00	150	Horizontal	Pass
1**	1863.700	28.17	-13.48	54.0	-25.83	AV	167.00	150	Horizontal	Pass
2	2406.800	101.79	-10.68	74.0	27.79	Peak	85.00	150	Horizontal	N/A
2**	2406.800	99.56	-10.68	54.0	45.56	AV	85.00	150	Horizontal	N/A
3	2469.800	98.58	-10.69	74.0	24.58	Peak	73.00	150	Horizontal	N/A
3**	2469.800	95.88	-10.69	54.0	41.88	AV	73.00	150	Horizontal	N/A
4	4899.800	48.23	-0.92	74.0	-25.77	Peak	109.00	150	Horizontal	Pass
4**	4899.800	45.51	-0.92	54.0	-8.49	AV	109.00	150	Horizontal	Pass
5	7499.388	48.50	16.94	74.0	-25.50	Peak	356.00	150	Horizontal	Pass
5**	7499.388	36.07	16.94	54.0	-17.93	AV	356.00	150	Horizontal	Pass
6	17278.386	56.38	24.48	74.0	-17.62	Peak	348.00	150	Horizontal	Pass
6**	17278.386	44.94	24.48	54.0	-9.06	AV	348.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

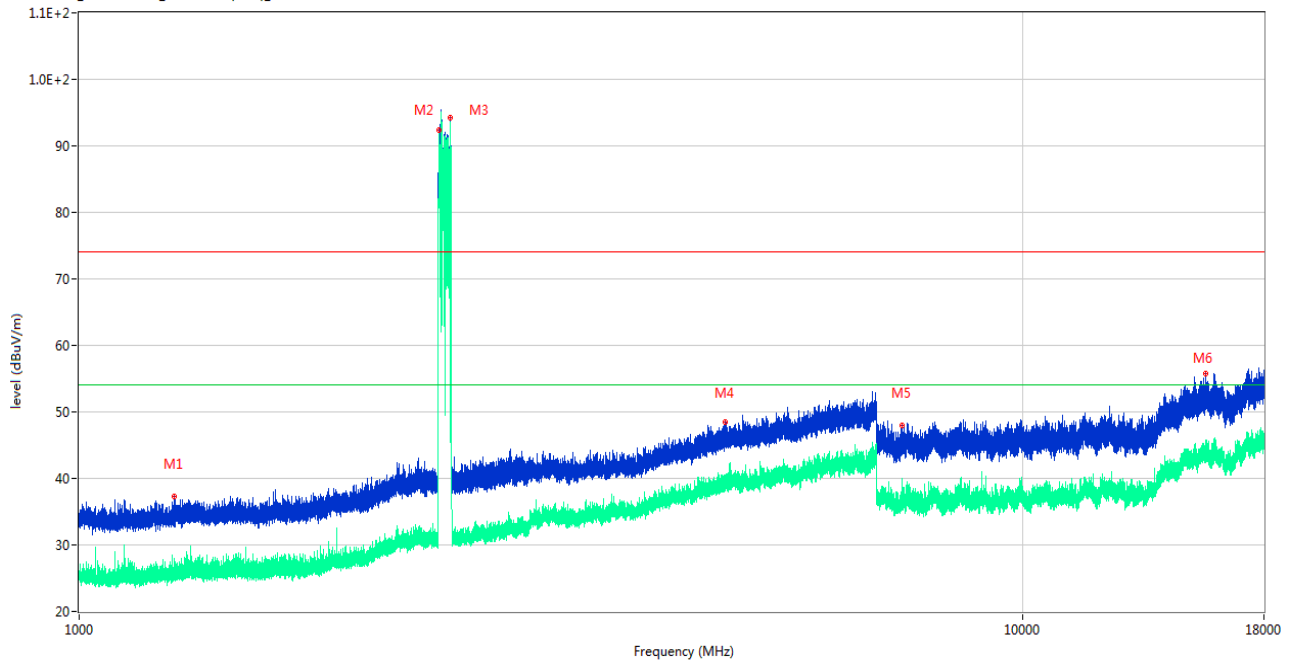

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1260.800	37.21	-14.87	74.0	-36.79	Peak	0.00	150	Vertical	Pass
1**	1260.800	25.38	-14.87	54.0	-28.62	AV	0.00	150	Vertical	Pass
2	2407.900	92.31	-10.58	74.0	18.31	Peak	154.00	150	Vertical	N/A
2**	2407.900	90.55	-10.58	54.0	36.55	AV	154.00	150	Vertical	N/A
3	2475.200	94.18	-10.52	74.0	20.18	Peak	160.00	150	Vertical	N/A
3**	2475.200	93.61	-10.52	54.0	39.61	AV	160.00	150	Vertical	N/A
4	4840.200	48.46	-1.32	74.0	-25.54	Peak	329.00	150	Vertical	Pass
4**	4840.200	39.08	-1.32	54.0	-14.92	AV	329.00	150	Vertical	Pass
5	7447.925	47.90	16.96	74.0	-26.10	Peak	362.00	150	Vertical	Pass
5**	7447.925	35.71	16.96	54.0	-18.29	AV	362.00	150	Vertical	Pass
6	15619.912	55.68	23.45	74.0	-18.32	Peak	127.00	150	Vertical	Pass
6**	15619.912	44.73	23.45	54.0	-9.27	AV	127.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

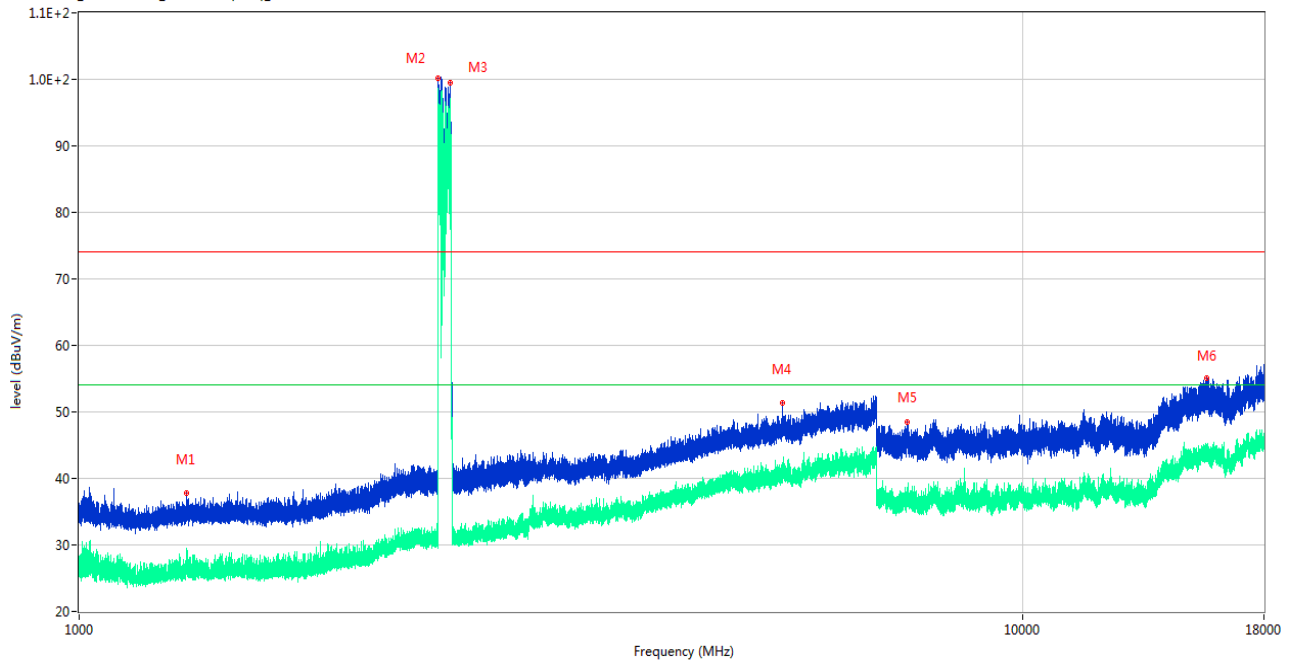

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.200	37.71	-14.73	74.0	-36.29	Peak	336.00	150	Horizontal	Pass
1**	1300.200	29.57	-14.73	54.0	-24.43	AV	336.00	150	Horizontal	Pass
2	2401.800	100.19	-10.75	74.0	26.19	Peak	92.00	150	Horizontal	N/A
2**	2401.800	96.73	-10.75	54.0	42.73	AV	92.00	150	Horizontal	N/A
3	2473.900	99.51	-10.60	74.0	25.51	Peak	85.00	150	Horizontal	N/A
3**	2473.900	96.18	-10.60	54.0	42.18	AV	85.00	150	Horizontal	N/A
4	5563.800	51.38	0.45	74.0	-22.62	Peak	10.00	150	Horizontal	Pass
4**	5563.800	40.87	0.45	54.0	-13.13	AV	10.00	150	Horizontal	Pass
5	7530.438	48.43	17.40	74.0	-25.57	Peak	292.00	150	Horizontal	Pass
5**	7530.438	37.87	17.40	54.0	-16.13	AV	292.00	150	Horizontal	Pass
6	15648.263	55.03	23.53	74.0	-18.97	Peak	94.00	150	Horizontal	Pass
6**	15648.263	43.71	23.53	54.0	-10.29	AV	94.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

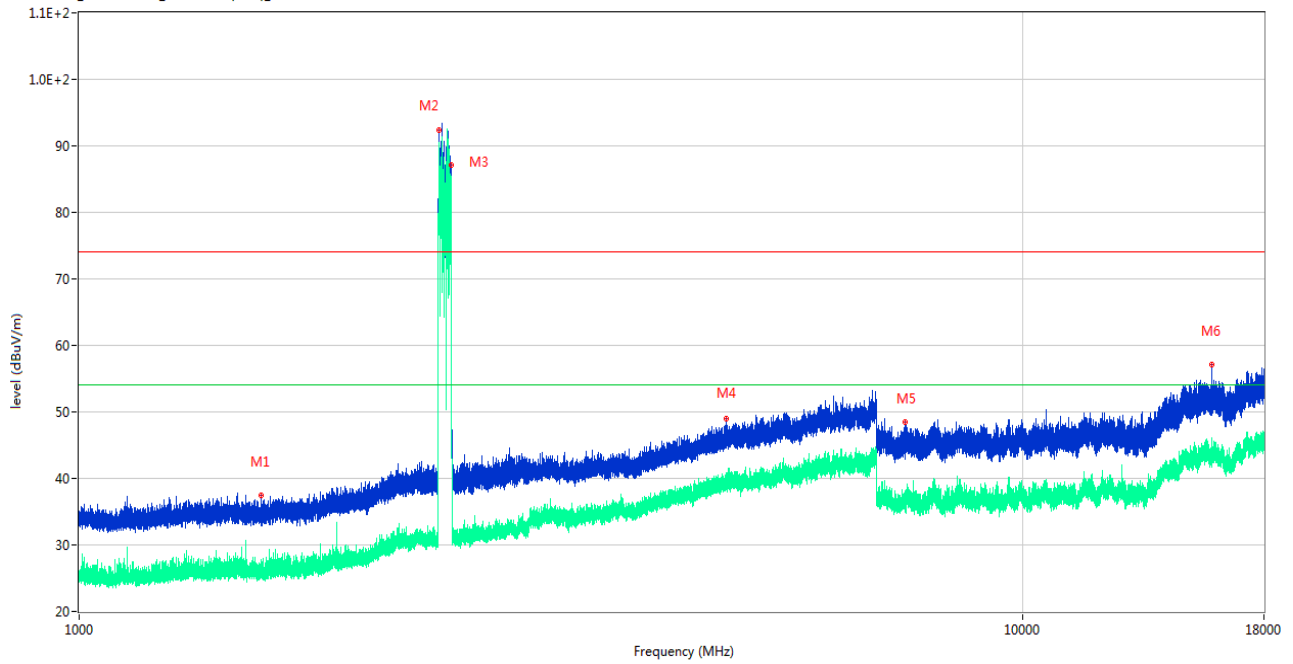

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1560.300	37.45	-15.13	74.0	-36.55	Peak	138.00	150	Vertical	Pass
1**	1560.300	26.21	-15.13	54.0	-27.79	AV	138.00	150	Vertical	Pass
2	2405.000	92.35	-10.76	74.0	18.35	Peak	262.00	150	Vertical	N/A
2**	2405.000	90.43	-10.76	54.0	36.43	AV	262.00	150	Vertical	N/A
3	2475.900	87.04	-10.48	74.0	13.04	Peak	236.00	150	Vertical	N/A
3**	2475.900	83.48	-10.48	54.0	29.48	AV	236.00	150	Vertical	N/A
4	4852.000	49.01	-1.45	74.0	-24.99	Peak	307.00	150	Vertical	Pass
4**	4852.000	39.59	-1.45	54.0	-14.41	AV	307.00	150	Vertical	Pass
5	7495.075	48.40	17.07	74.0	-25.60	Peak	156.00	150	Vertical	Pass
5**	7495.075	36.42	17.07	54.0	-17.58	AV	156.00	150	Vertical	Pass
6	15847.500	57.16	23.48	74.0	-16.84	Peak	284.00	150	Vertical	Pass
6**	15847.500	42.47	23.48	54.0	-11.53	AV	284.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	52.800	31.47	74	21.200	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	53.145	31.40	74	20.855	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	52.950	31.47	74	21.05	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	53.136	31.40	74	20.864	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	52.916	31.47	74	21.084	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	53.169	31.40	74	20.831	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	53.154	31.47	74	20.846	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	53.084	31.40	74	20.916	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL, PEAK

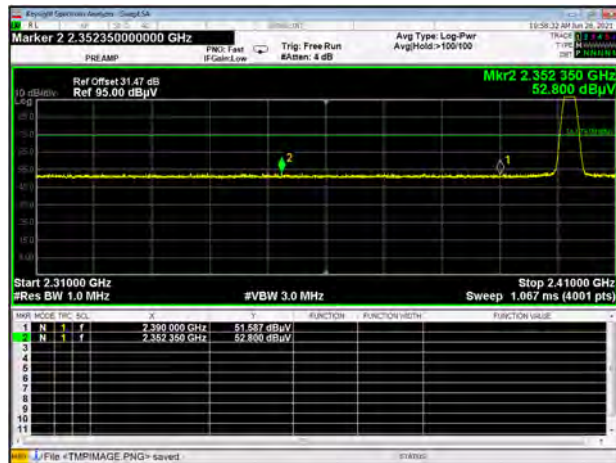

GFSK HIGH CHANNEL, PEAK



8-DPSK LOW CHANNEL, PEAK

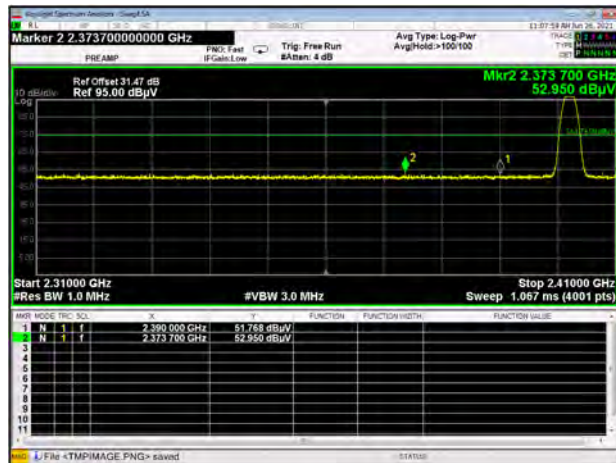


8-DPSK HIGH CHANNEL, PEAK



Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

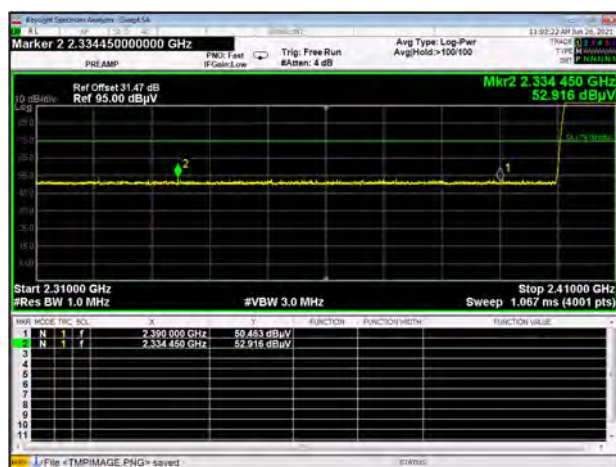

GFSK HIGH FREQUENCY BAND, PEAK



8-DPSK LOW FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2160267-AR-2.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2160267-AW-2.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2160267-AI-2.PDF".

--END OF REPORT--