



## FCC PART 15 SUBPART C TEST REPORT

**Report Reference No..... :** CTL2002201041-WF

Compiled by  
( position+printed name+signature) Happy Guo  
(File administrators)

*Happy Guo*

Supervised by  
( position+printed name+signature) Nice Nong  
(Test Engineer)

*NICE NONG*

Approved by  
( position+printed name+signature) Ivan Xie  
(Manager)

*Ivan Xie*

**Test Firm..... :** Shenzhen CTL Testing Technology Co., Ltd.

Address..... : Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road,  
Nanshan District, Shenzhen, China 518055

**Applicant's name ..... :** TESCO Technologies

Address..... : 375 W. Padonia Rd.Lutherville-Timonium, MD 21093 United States

**Test specification:**

Standard ..... : FCC Part 15C

Master TRF ..... : Dated 2011-01

**Test item description ..... :** wireless chargepad

**FCC ID ..... :** 2ASH9-WRLSCPD

Trade Mark..... : ventev

Model/Type reference ..... : FC30, FC30A, 230163, 236940, 279961, 238302, 267043,  
233073, 283105, 232846

Transmit Frequency ..... : 115~205KHz

Antenna type..... : Loop antenna

Date of receipt of test item ..... : Feb. 23, 2020

Date of sampling ..... : Feb. 23, 2020

Date of Test Date ..... : Feb. 23, 2020–Mar. 17, 2020

Data of Issue..... : Mar. 17, 2020

Result..... : **Pass**

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**TEST REPORT**

<b>Test Report No. :</b>	<b>CTL2002201041-WF</b>	Mar. 17, 2020
		Date of issue

Equipment under Test : wireless chargepad

Type / Model(s) : FC30, FC30A, 230163, 236940, 279961, 238302, 267043, 233073, 283105, 232846

**Applicant** : **TESSCO Technologies**

Address : 375 W. Padonia Rd.Lutherville-Timonium, MD 21093 United States

**Manufacturer 1** : **Shenzhen Powerqi Technology Co., Ltd.**

Address : 2nd&3rd Floor, A4 Building, A Area, Fangxing Science and Technology Park, No.13 Baonan Road, Longgang Street, Longgang District, Shenzhen, China

**Manufacturer 2** : **SEOSIN ELECTRONICS VINA CO.,LTD**

Address : Chau Son Industrial Park, Le Chan Street, Le Hong Phong Ward, Phu Ly City, Ha Nam Province, Viet Nam

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

The test results presented in this report relate only to the object tested.  
This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

## Contents

FCC PART 15 SUBPART C TEST REPORT .....	1
<b><u>1. TEST STANDARDS .....</u></b>	<b><u>4</u></b>
<b><u>2. SUMMARY .....</u></b>	<b><u>5</u></b>
2.1. General Remarks	5
2.2. Equipment Under Test	5
2.3. Short description of the Equipment under Test (EUT)	5
2.4. EUT operation mode	5
2.5. EUT configuration	5
2.6. Related Submittal(s) / Grant (s)	5
2.7. Modifications	6
2.8. Summary of Test Results	6
<b><u>3. TEST ENVIRONMENT .....</u></b>	<b><u>7</u></b>
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Environmental conditions	7
3.4. Statement of the measurement uncertainty	8
3.5. Equipments Used during the Test	8
<b><u>4. TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>9</u></b>
4.1. AC Power Conducted Emission	9
4.2. Radiated Emission	12
4.3. 20dB Bandwidth/99% Bandwidth	17
<b><u>5. TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>18</u></b>
<b><u>6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>19</u></b>

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.207,15.209, 15.215\(c\)](#)

[ANSI C63.10-2013](#)

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	Feb. 23, 2020
Testing commenced on	:	Feb. 23, 2020
Testing concluded on	:	Mar. 16, 2020

### 2.2. Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input checked="" type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V/9V

### 2.3. Short description of the Equipment under Test (EUT)

wireless chargepad work frequency range 115-205 KHz.

For more details, refer to the user's manual of the EUT.

Serial number: FC30, FC30A, 230163, 236940, 279961, 238302, 267043, 233073, 283105, 232846

### 2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting mode for testing.

Test Mode	Note
Mode 1	Powered by DC 5V 2A
Mode 2	Powered by DC 9V 1.67A

Note: We have tested all test mode, only recorded the worst case mode 2 in the report.

### 2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

<input checked="" type="radio"/> Mobile Phone	Manufacturer :	APPLE
	Model No. :	iPhone 8
<input checked="" type="radio"/> AC adapter	Manufacturer :	MEIZU
	Model No. :	UP1220

### 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID:2ASH9-WRLSCPD filing to comply with FCC Part 15, Subpart C Rules.

## 2.7. Modifications

No modifications were implemented to meet testing criteria.

## 2.8. Summary of Test Results

The EUT is night light with wireless charger, The test summary of the EUT listed as below:

	Test Standards	Test Result
Electric Field Radiated Emissions	FCC Part 15 C (Section15.209)	PASS
20dB Bandwidth/99% Bandwidth	FCC Part 15 C (Section15.215(c))	PASS
Conducted Emissions	FCC Part 15 C (Section15.207)	PASS

Remark: The measurement uncertainty is not included in the test result.

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L7497**

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No. 4343.01**

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **IC Registration No.: 9618B**

##### **CAB identifier: CN0041**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

##### **FCC-Registration No.: 399832**

##### **Designation No.: CN1216**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

### 3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.5. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2019/05/21	2020/05/20
LISN	R&S	ENV216	3560.6550.1 2	2019/05/21	2020/05/20
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2019/05/23	2020/05/22
EMI Test Receiver	R&S	ESCI	1166.5950.0 3	2019/05/21	2020/05/20
Spectrum Analyzer	Agilent	N9020A	US46220290	2019/05/20	2020/05/19
Spectrum Analyzer	Keysight	N9020A	MY53420874	2019/05/20	2020/05/19
Controller	EM Electronics	EM 1000	060859	2019/05/21	2020/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2019/05/23	2020/05/22
Active Loop Antenna	Da Ze	ZN30900A	/	2019/05/23	2020/05/22
Amplifier	Agilent	8449B	3008A02306	2019/05/21	2020/05/20
Amplifier	Agilent	8447D	2944A10176	2019/05/21	2020/05/20
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/05/22	2020/05/21
Spectrum Analyzer	RS	FSP	1164.4391.3 8	2019/05/20	2020/05/19

The calibration interval was one year

## 4. TEST CONDITIONS AND RESULTS

### 4.1. AC Power Conducted Emission

#### TEST CONFIGURATION

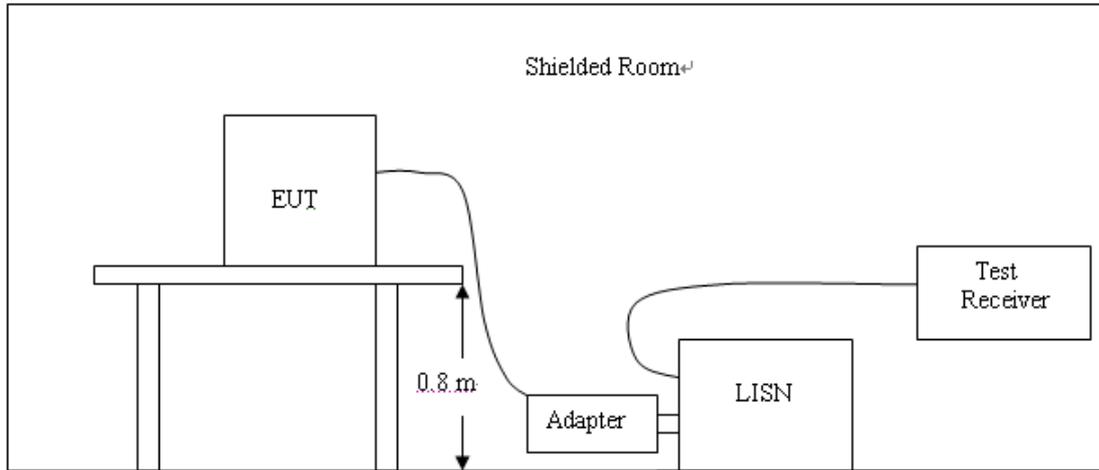

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.  
Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

**TEST RESULTS**

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

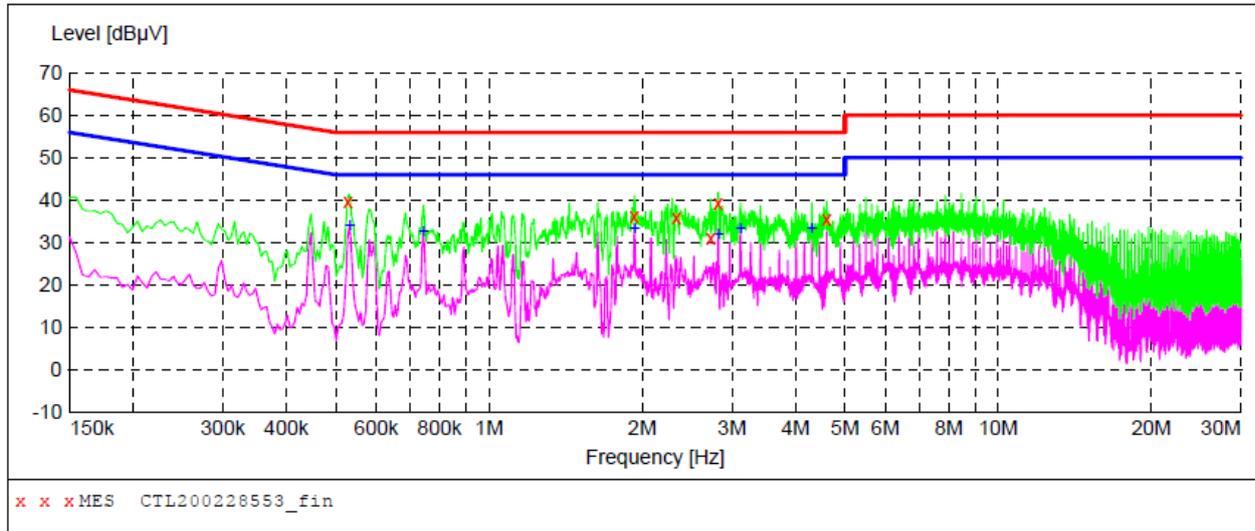

**MEASUREMENT RESULT: "CTL200228553\_fin"**

2020-2-28 15:58

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.528000	39.60	11.2	56	16.4	QP	L1	GND
1.927500	36.00	11.2	56	20.0	QP	L1	GND
2.337000	35.70	11.3	56	20.3	QP	L1	GND
2.724000	31.00	11.3	56	25.0	QP	L1	GND
2.823000	39.40	11.3	56	16.6	QP	L1	GND
4.605000	35.50	11.3	56	20.5	QP	L1	GND


**MEASUREMENT RESULT: "CTL200228553\_fin2"**

2020-2-28 15:58

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.532500	34.20	11.2	46	11.8	AV	L1	GND
0.744000	32.80	11.2	46	13.2	AV	L1	GND
1.932000	33.50	11.2	46	12.5	AV	L1	GND
2.823000	32.00	11.3	46	14.0	AV	L1	GND
3.120000	33.50	11.3	46	12.5	AV	L1	GND
4.308000	33.60	11.3	46	12.4	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

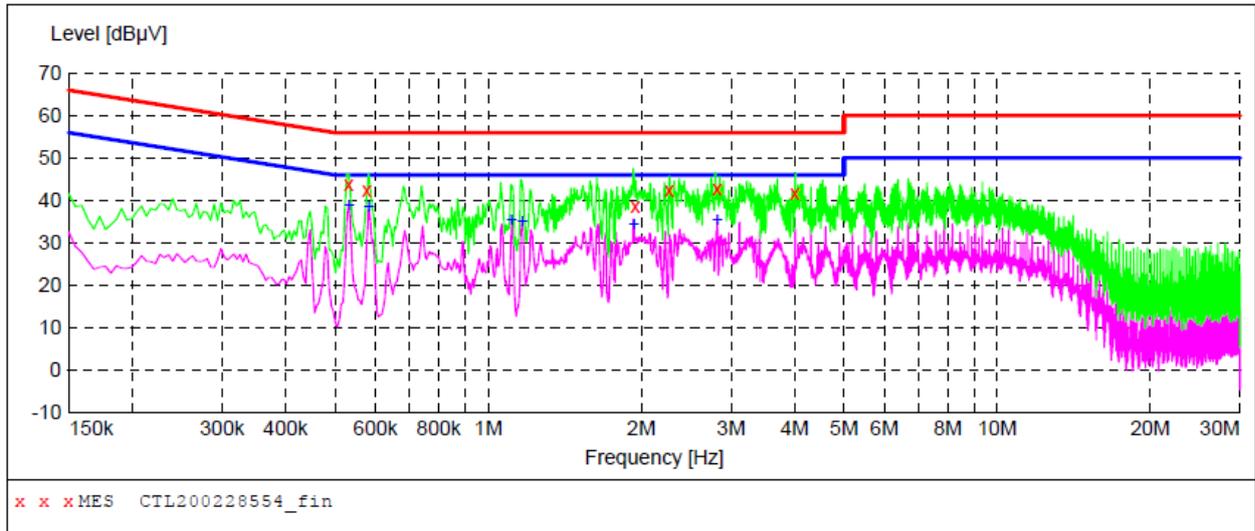

**MEASUREMENT RESULT: "CTL200228554\_fin"**

2020-2-28 16:02

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.532500	43.90	11.2	56	12.1	QP	N	GND
0.577500	42.50	11.2	56	13.5	QP	N	GND
1.945500	38.70	11.2	56	17.3	QP	N	GND
2.269500	42.30	11.3	56	13.7	QP	N	GND
2.818500	42.80	11.3	56	13.2	QP	N	GND
4.006500	41.70	11.3	56	14.3	QP	N	GND

**MEASUREMENT RESULT: "CTL200228554\_fin2"**


2020-2-28 16:02

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.532500	38.90	11.2	46	7.1	AV	N	GND
0.582000	38.50	11.2	46	7.5	AV	N	GND
1.113000	35.40	11.2	46	10.6	AV	N	GND
1.167000	35.30	11.2	46	10.7	AV	N	GND
1.932000	34.60	11.2	46	11.4	AV	N	GND
2.818500	35.60	11.3	46	10.4	AV	N	GND


## 4.2. Radiated Emission

### TEST CONFIGURATION

Radiated Emission Test Set-Up  
Frequency range 9KHz – 30MHz

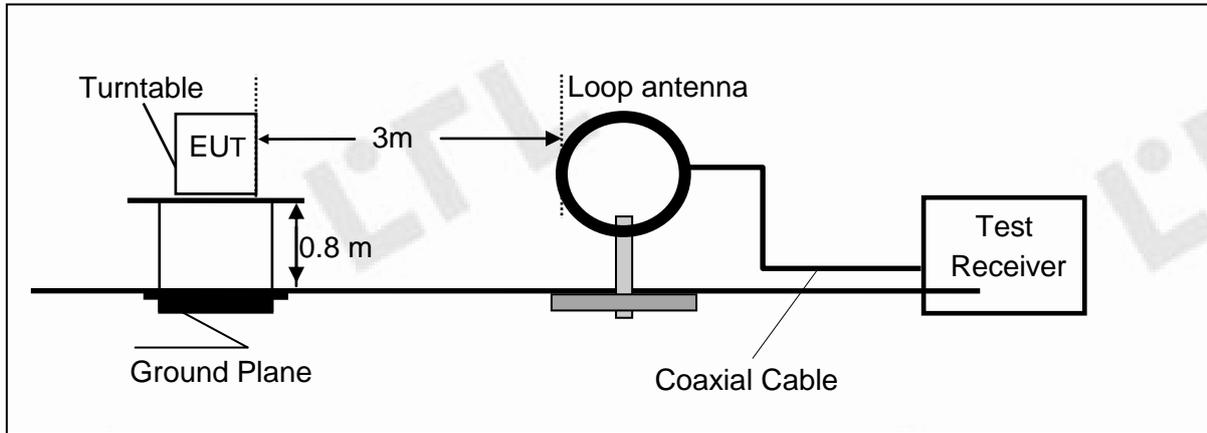

Frequency range 30MHz – 1000MHz

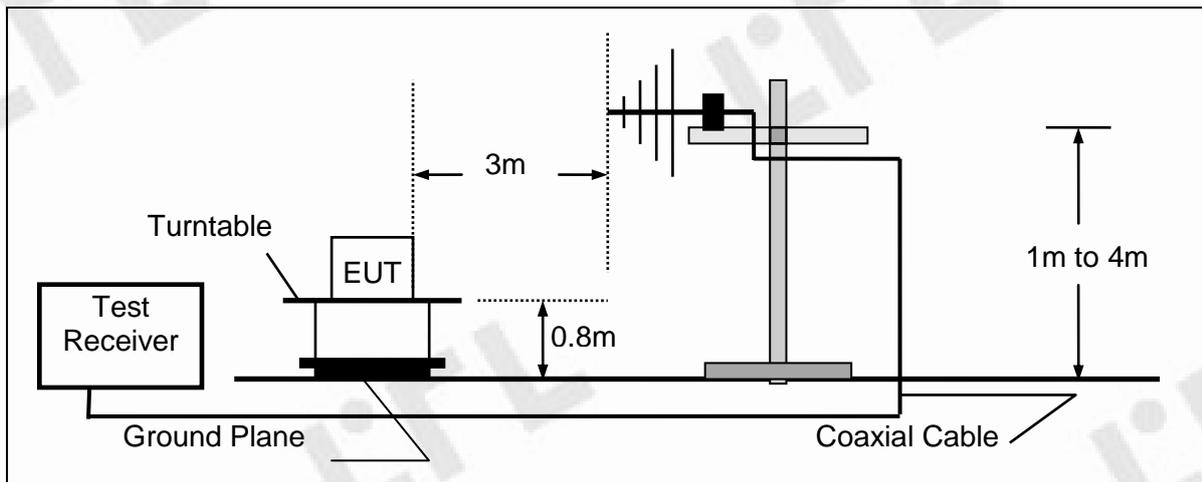

**TEST PROCEDURE**

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

**9k~30MHz:**

Frequency Range (MHz)	E-field Strength Limit @ 30m (mV/m)	E-field Strength Limit @ 3m (dB $\mu$ V/m)
0.009-0.490	2400/F(kHz)	129-94
0.490-1.705	24000/F(kHz)	74-63
1.705-30	30	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

$$\text{Extrapolation(dB)} = 40 \log_{10}(\text{Measurement Distance} / \text{Specification Distance})$$

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) dBuV/m = 20\*log(uV/m)

**30M~1GHz:**

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

**TEST RESULTS****WORST-CASE RADIATED EMISSION BELOW 30 MHz**


Frequency (MHz)	Reading (dB $\mu$ V/m)	Polar Loop	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dB $\mu$ V/m)	Limits at 3m (dB $\mu$ V/m)	Detector Mode
0.1204(F)	48.16	Loop	23.64	0.01	71.81	105.99	PK
0.1204(F)	42.99	Loop	23.64	0.01	66.64	85.99	AV
0.110	34.68	Loop	23.55	0.01	58.24	106.78	PK
0.110	30.94	Loop	23.55	0.01	54.5	86.78	AV
0.495	32.26	Loop	25.07	-0.17	57.16	73.71	QP
1.175	34.81	Loop	27.12	-0.25	61.68	66.20	QP
2.266	35.07	Loop	23.91	-0.24	58.74	69.54	QP

- Remark:
1. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
  2. The test limit distance is 3m limit.
  3. PK means Peak Value, QP means Quasi Peak Value, AV means Average Value.
  4. F means Fundamental Frequency.

**Radiated Emission Test Data 30-1000MHz:**

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas. Time	IF Bandw.		
Frequency	Frequency					
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	100 kHz	vulb 9168	

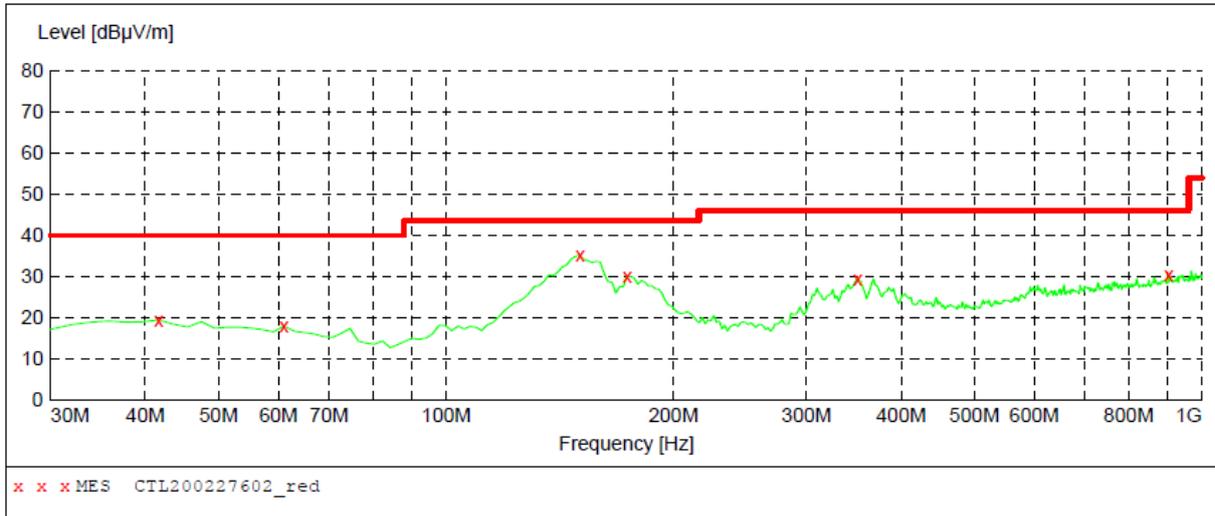


**MEASUREMENT RESULT: "CTL200227602\_red"**

2020-2-27 9:02

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	19.40	14.1	40.0	20.6	---	0.0	0.00	HORIZONTAL
61.040000	17.90	12.9	40.0	22.1	---	0.0	0.00	HORIZONTAL
150.280000	35.10	15.1	43.5	8.4	---	0.0	0.00	HORIZONTAL
173.560000	30.10	13.8	43.5	13.4	---	0.0	0.00	HORIZONTAL
350.100000	29.40	15.8	46.0	16.6	---	0.0	0.00	HORIZONTAL
903.000000	30.30	25.3	46.0	15.7	---	0.0	0.00	HORIZONTAL

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	100 kHz	vulb 9168

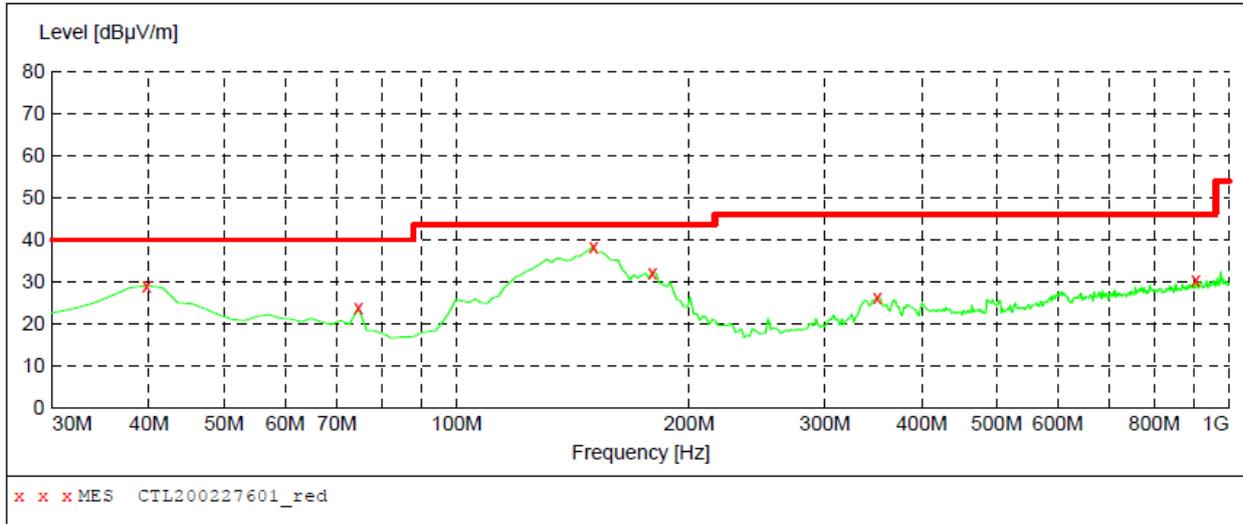


**MEASUREMENT RESULT: "CTL200227601\_red"**

2020-2-27 9:00

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
39.700000	29.00	14.2	40.0	11.0	---	0.0	0.00	VERTICAL
74.620000	23.70	10.6	40.0	16.3	---	0.0	0.00	VERTICAL
150.280000	38.40	15.1	43.5	5.1	---	0.0	0.00	VERTICAL
179.380000	32.20	12.9	43.5	11.3	---	0.0	0.00	VERTICAL
350.100000	26.30	15.8	46.0	19.7	---	0.0	0.00	VERTICAL
904.940000	30.30	25.3	46.0	15.7	---	0.0	0.00	VERTICAL

### 4.3. 20dB Bandwidth/99% Bandwidth

#### TEST CONFIGURATION



#### TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30Hz RBW and 91Hz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### LIMIT

The 20dB bandwidth shall be less than 80% of the permitted frequency band.

#### TEST RESULTS





### 5. Test Setup Photos of the EUT





## 6. External and Internal Photos of the EUT

### External photos

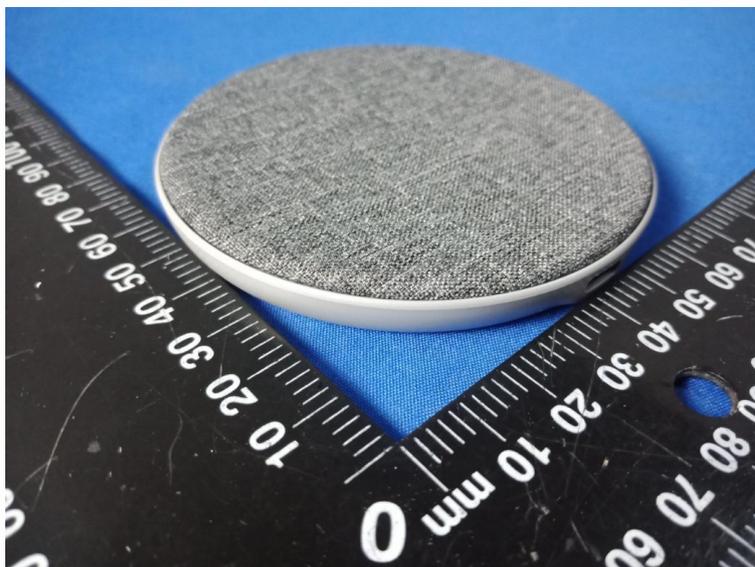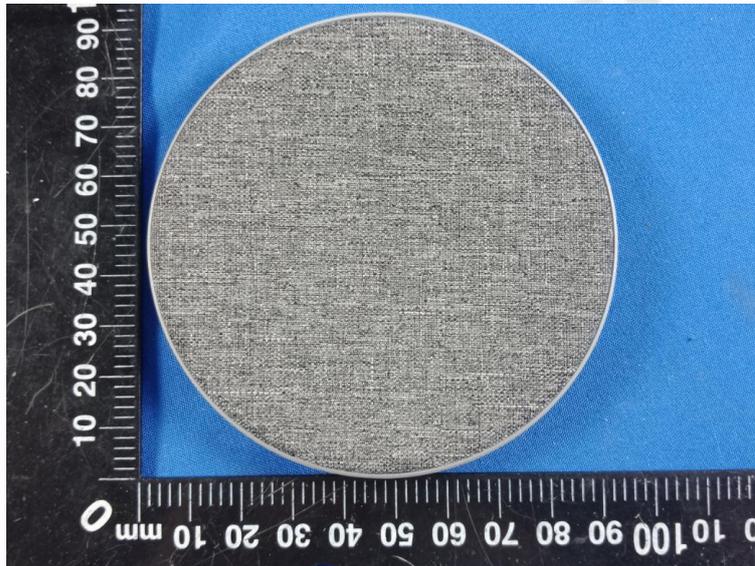




Internal photos

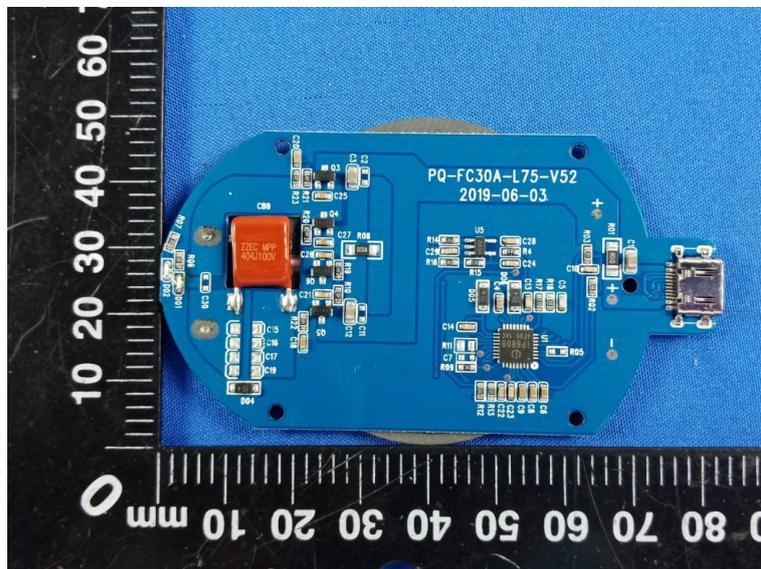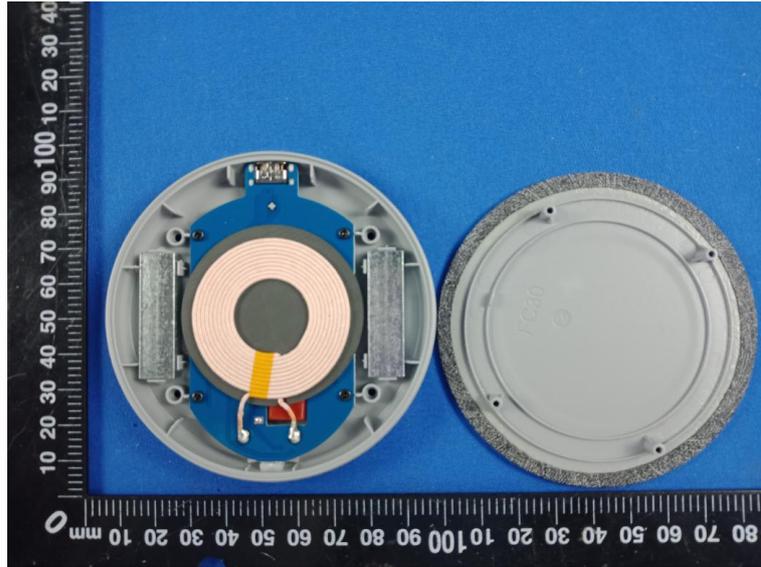

Antenna

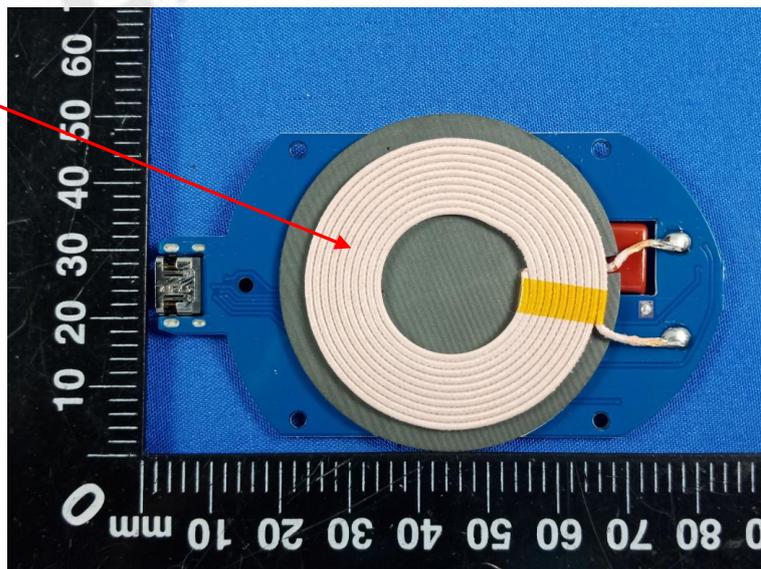

.....End of Report.....