

**Test Plot119#: LTE Band 12\_Body Right\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.779$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.143 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.323 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.065 W/kg**

Maximum value of SAR (measured) = 0.172 W/kg

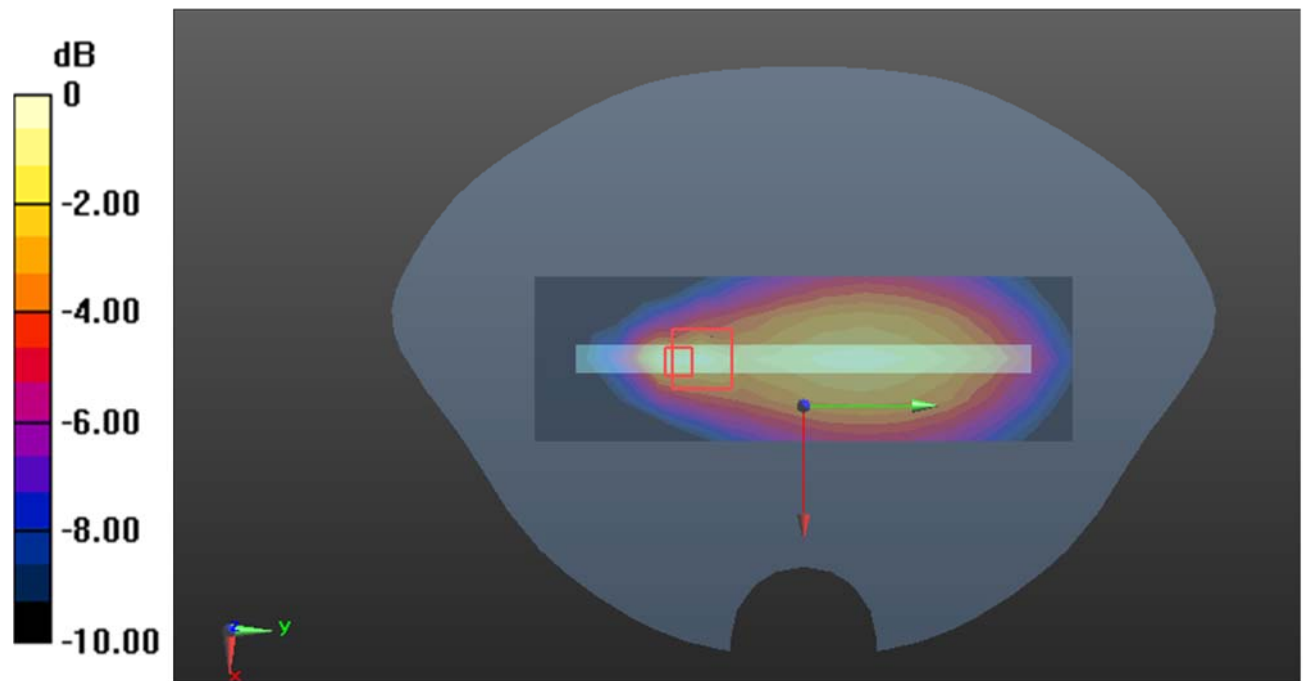

0 dB = 0.172 W/kg = -7.64 dB dBW/kg

**Test Plot120#: LTE Band 12\_Body Right\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.779$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.60 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.320 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.066 W/kg**

Maximum value of SAR (measured) = 0.169 W/kg

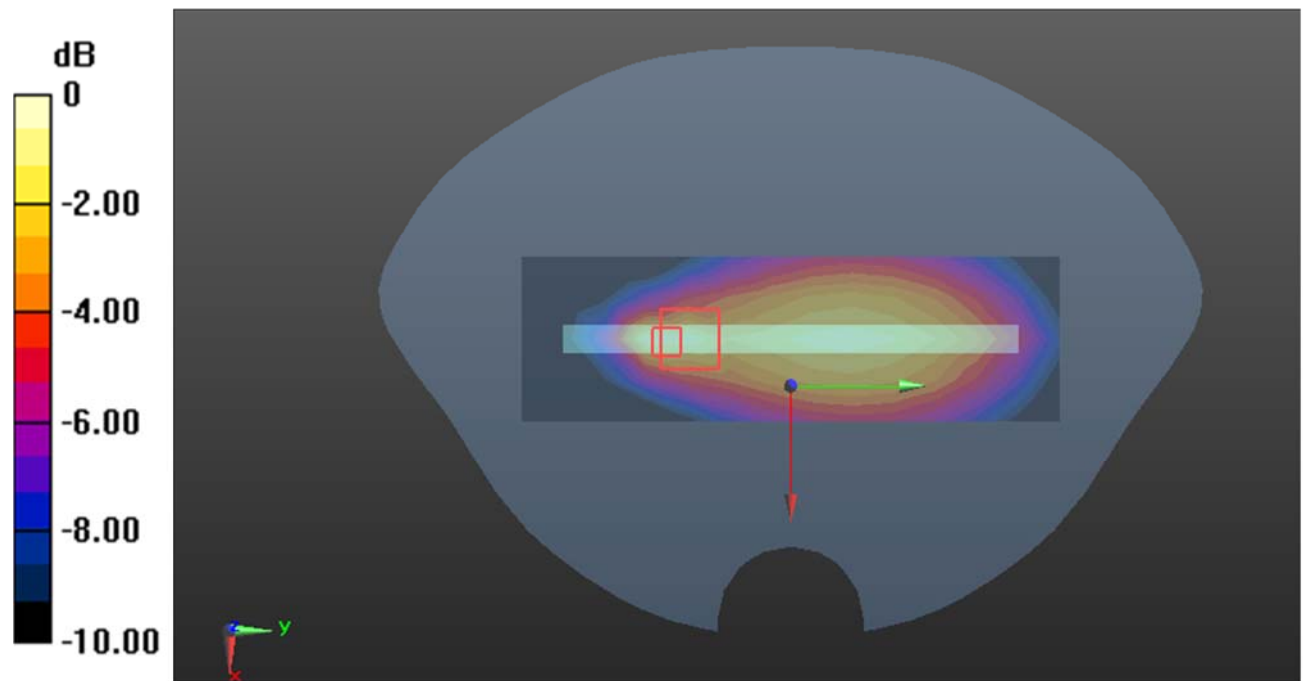

0 dB = 0.169 W/kg = -7.72 dB dBW/kg

**Test Plot121#: LTE Band 12\_Body Bottom\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.779$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.905 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.195 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg

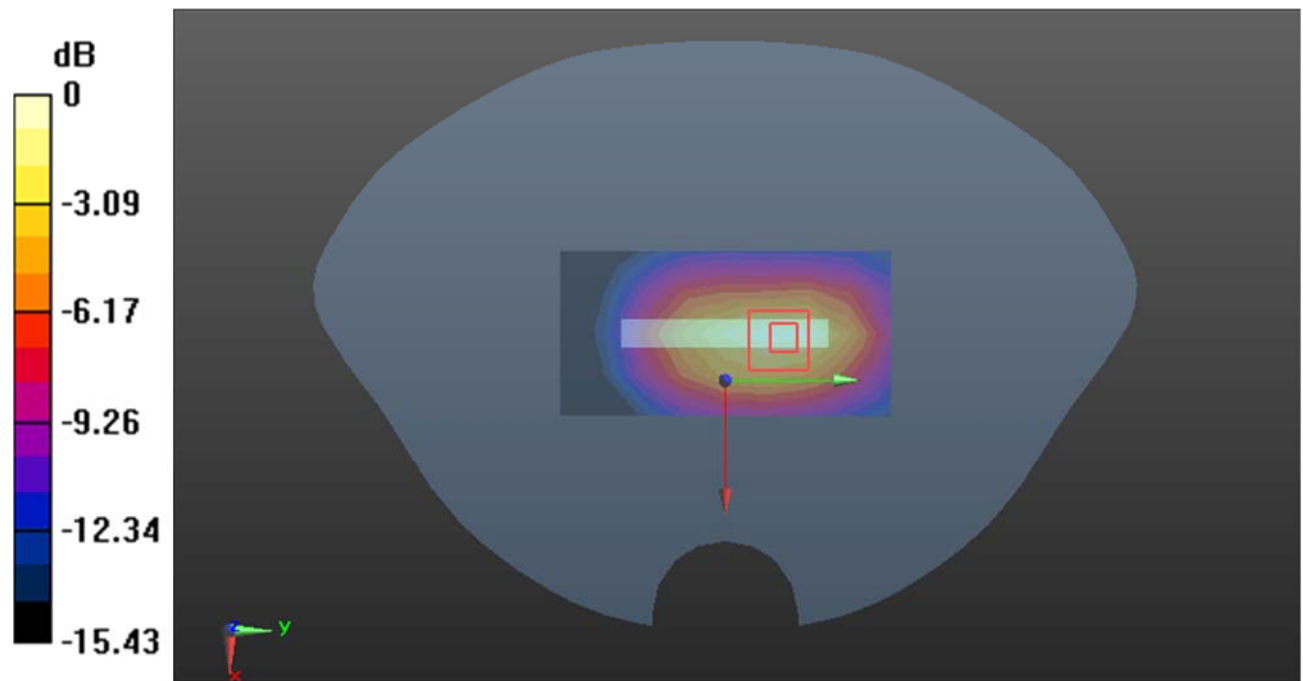

0 dB = 0.123 W/kg = -9.10 dB dBW/kg

**Test Plot122#: LTE Band 12\_Body Bottom\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.779$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0863 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.813 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0918 W/kg

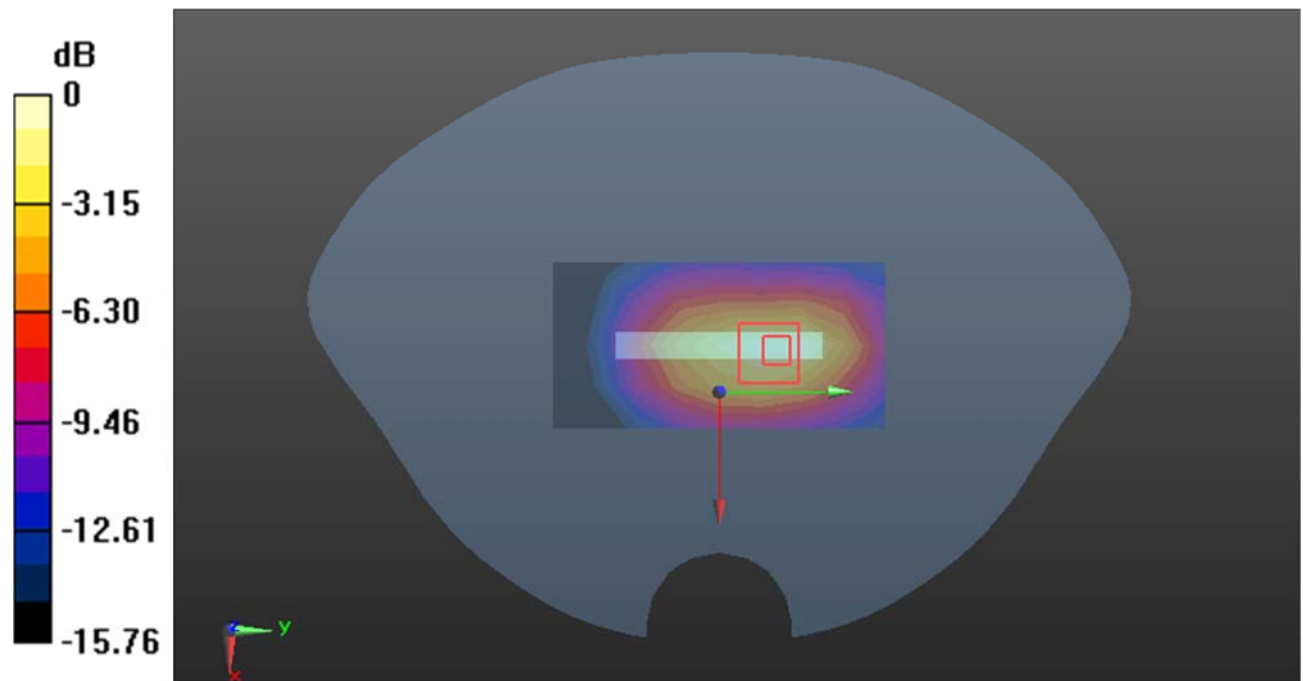

0 dB = 0.0918 W/kg = -10.37 dB dBW/kg

**Test Plot123#: LTE Band 28\_Head Left Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0492 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.400 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0610 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0514 W/kg

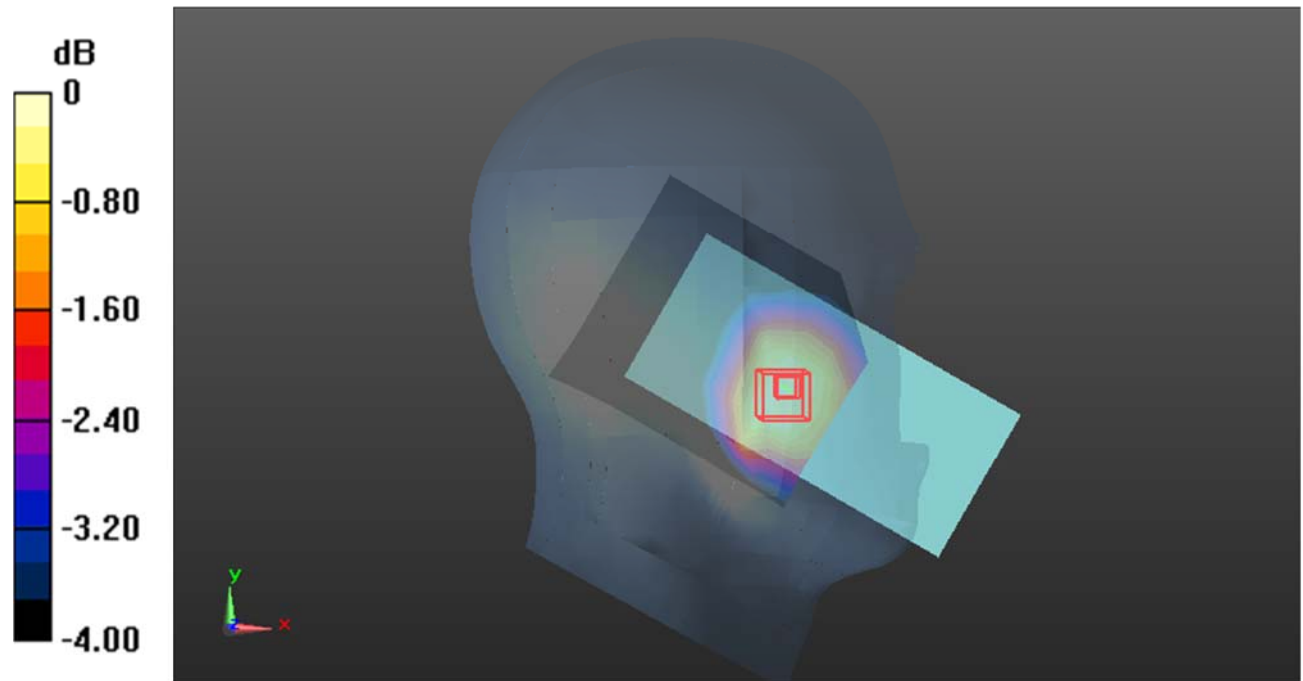

0 dB = 0.0514 W/kg = -12.89 dB dBW/kg

**Test Plot124#: LTE Band 28\_Head Left Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=719.5$  MHz;  $\sigma=0.873$  S/m;  $\epsilon_r=42.498$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0407 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.021 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0520 W/kg

**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0417 W/kg

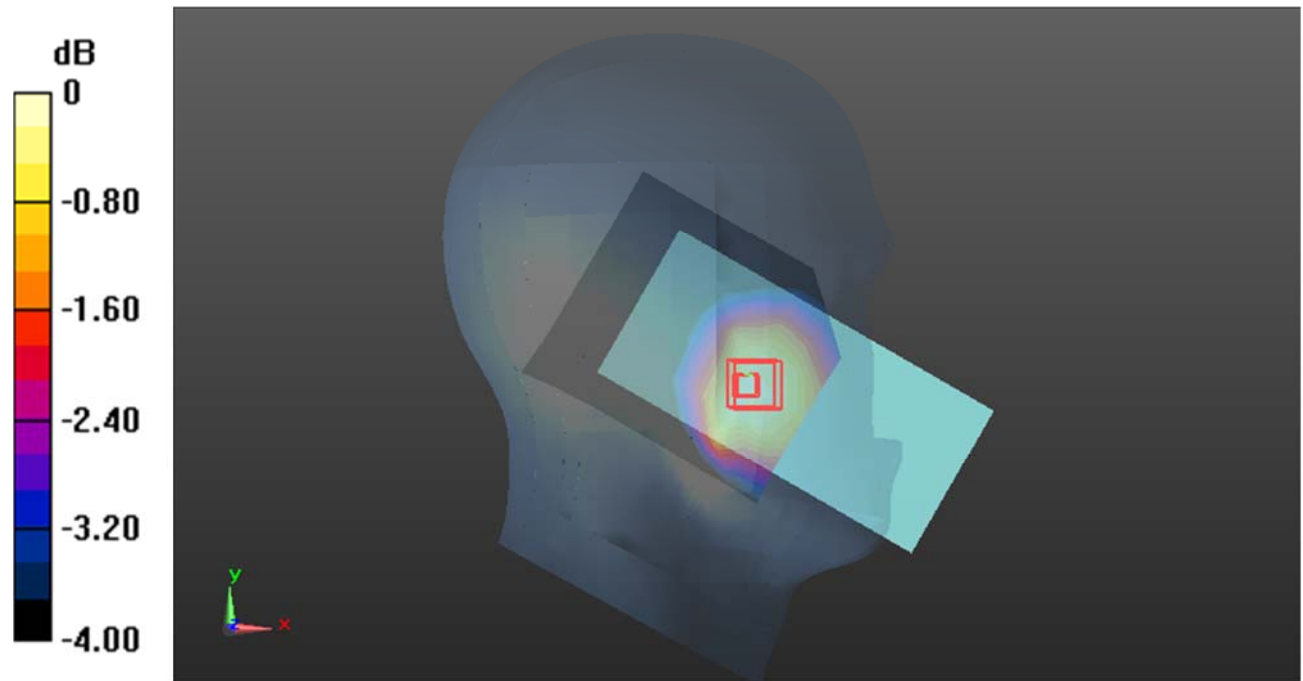

0 dB = 0.0417 W/kg = -13.80 dB dBW/kg

**Test Plot125#: LTE Band 28\_Head Left Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0542 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.260 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0690 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0592 W/kg

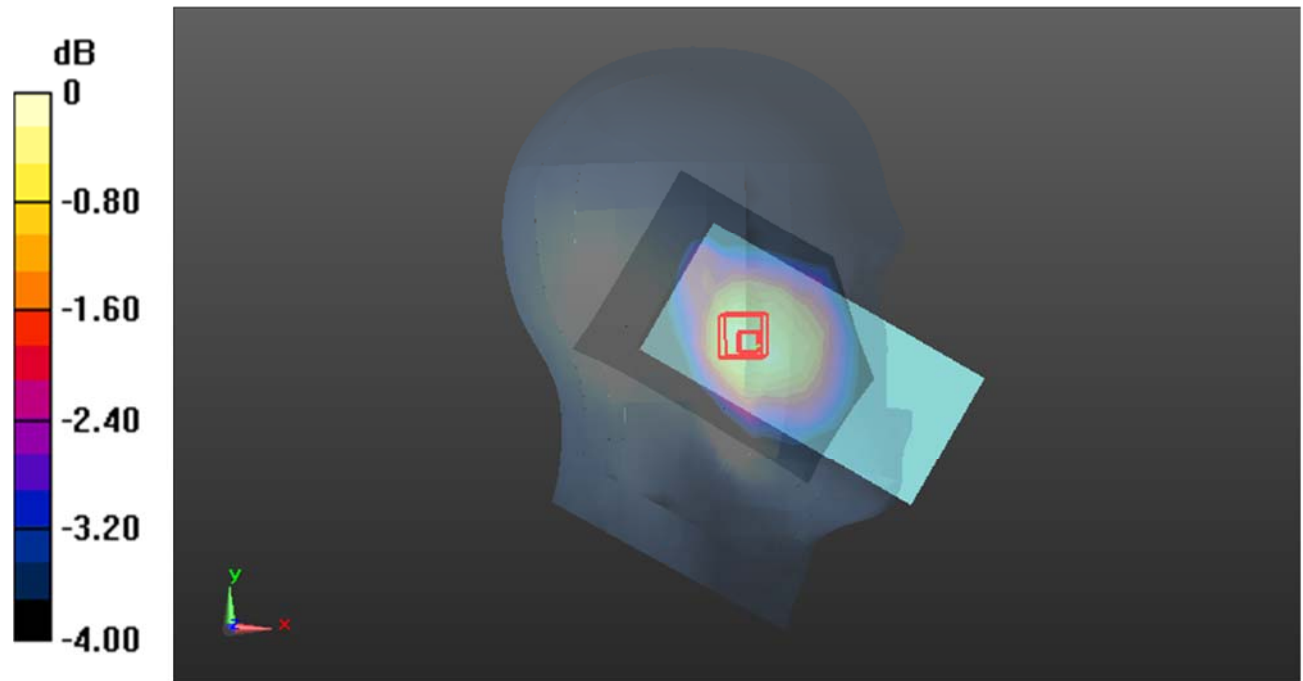

0 dB = 0.0592 W/kg = -12.28 dB dBW/kg

**Test Plot126#: LTE Band 28\_Head Left Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0428 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.618 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0520 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0455 W/kg

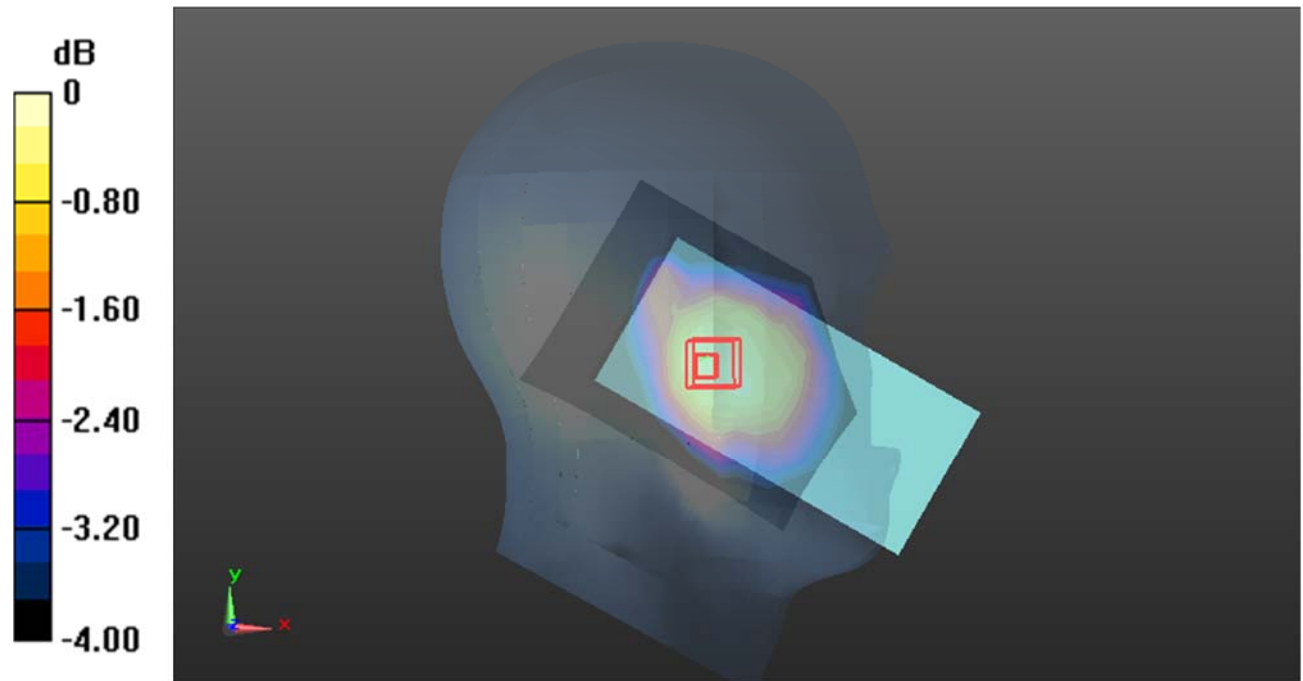

0 dB = 0.0455 W/kg = -13.42 dB dBW/kg



**Test Plot127#: LTE Band 28\_Head Right Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.111 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.333 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.135 W/kg

**SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.114 W/kg

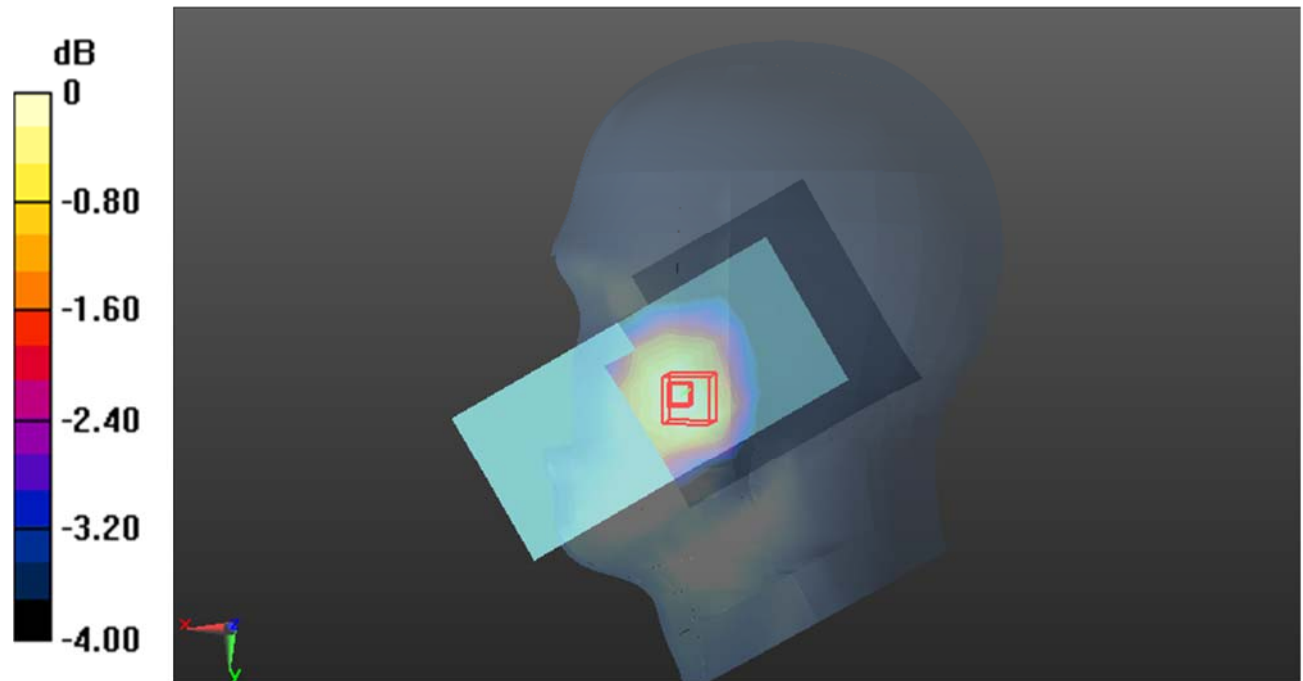

0 dB = 0.114 W/kg = -9.43 dB dBW/kg

**Test Plot128#: LTE Band 28\_Head Right Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0891 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.019 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.0953 W/kg

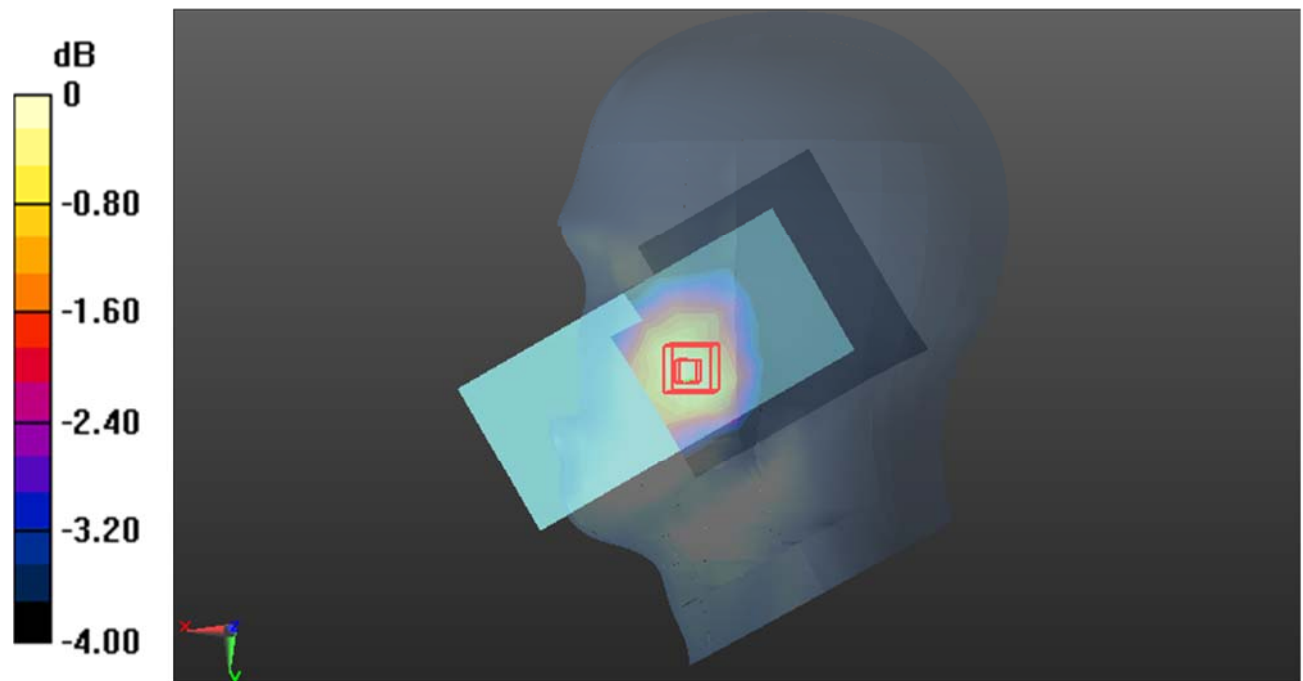

0 dB = 0.0953 W/kg = -10.21 dB dBW/kg

**Test Plot129#: LTE Band 28\_Head Right Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0324 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.928 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0354 W/kg

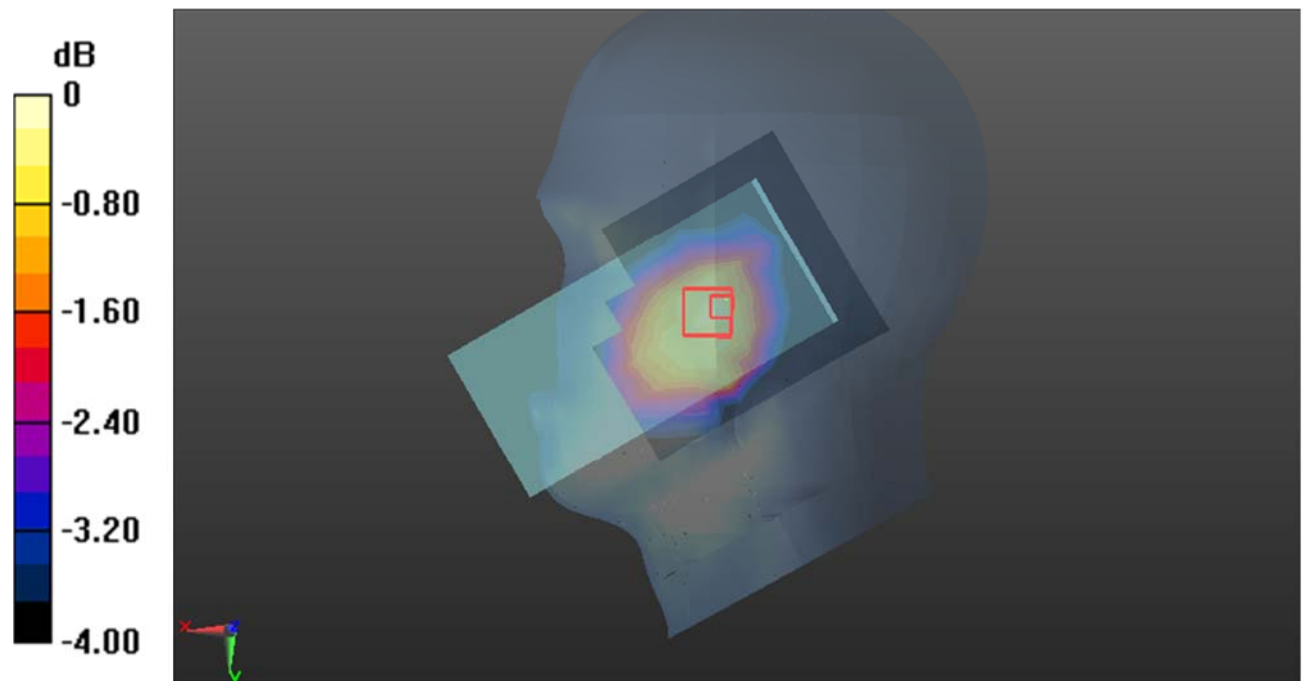

0 dB = 0.0354 W/kg = -14.51 dB dBW/kg

**Test Plot130#: LTE Band 28\_Head Right Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0274 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.487 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0283 W/kg

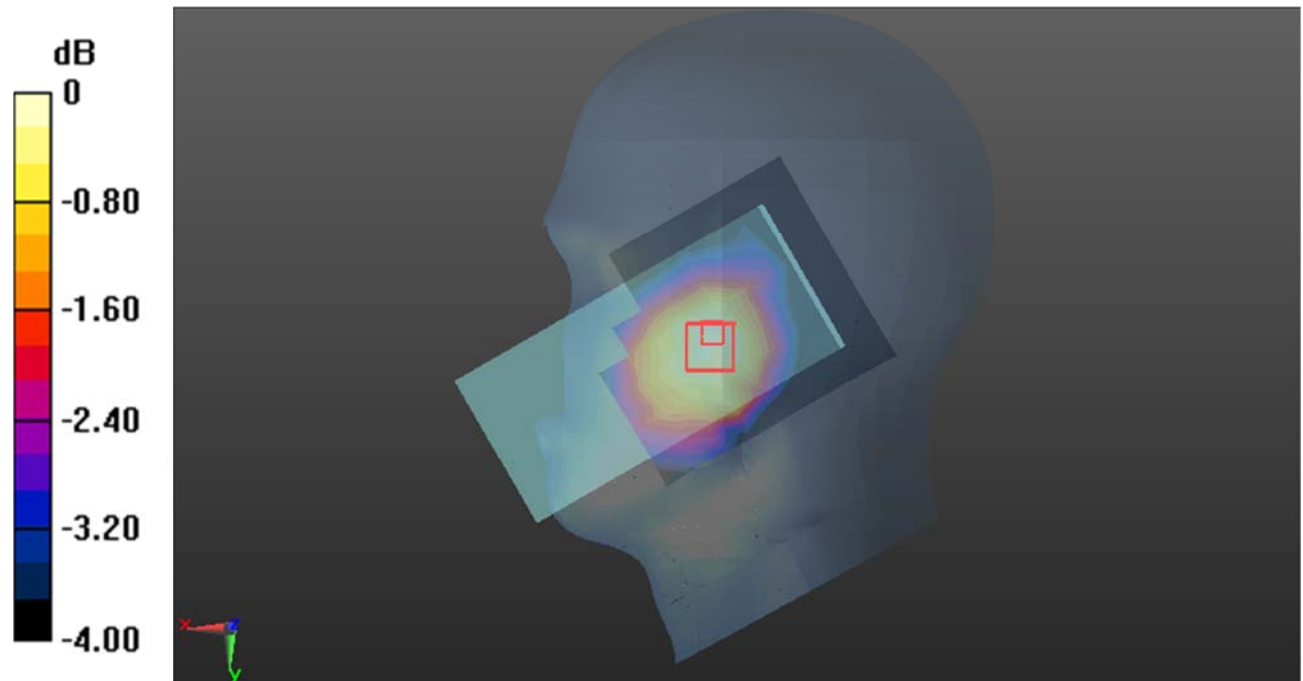

0 dB = 0.0283 W/kg = -15.48 dB dBW/kg

**Test Plot131#: LTE Band 28\_Body Front\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.122 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.145 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.125 W/kg

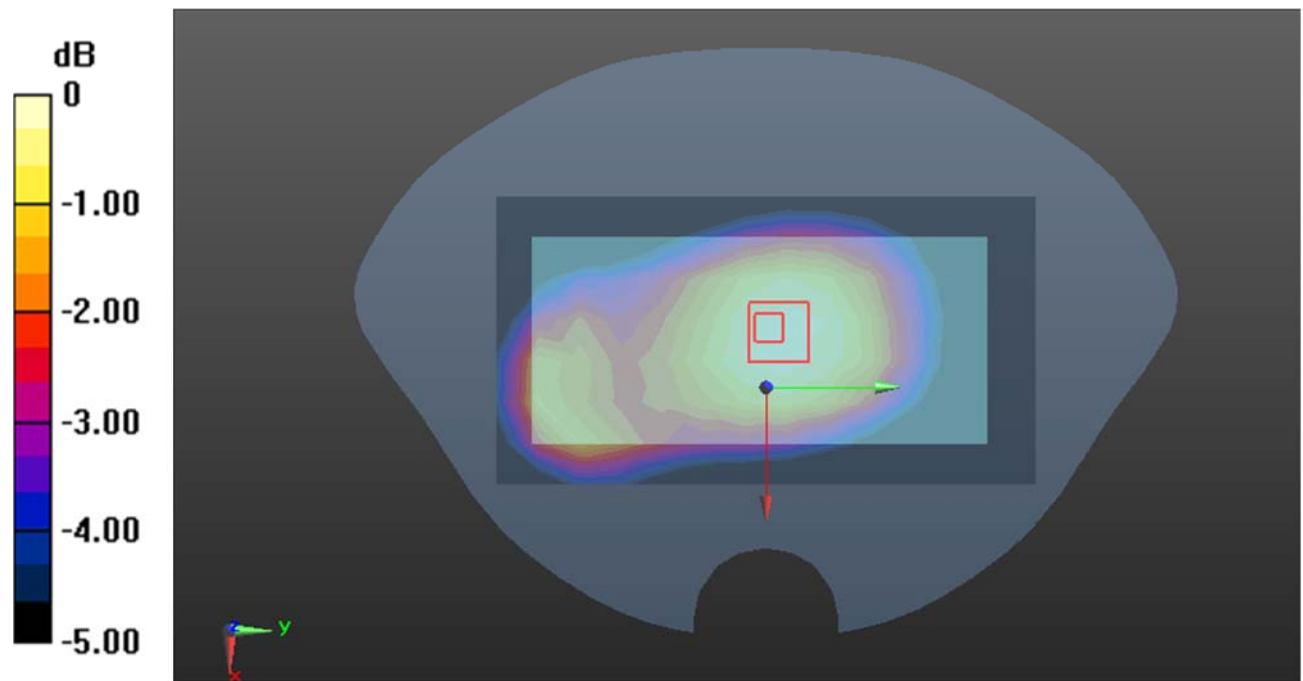

0 dB = 0.125 W/kg = -9.03 dB dBW/kg

**Test Plot132#: LTE Band 28\_Body Front\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=719.5$  MHz;  $\sigma=0.873$  S/m;  $\epsilon_r=42.498$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.103 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.23 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.104 W/kg

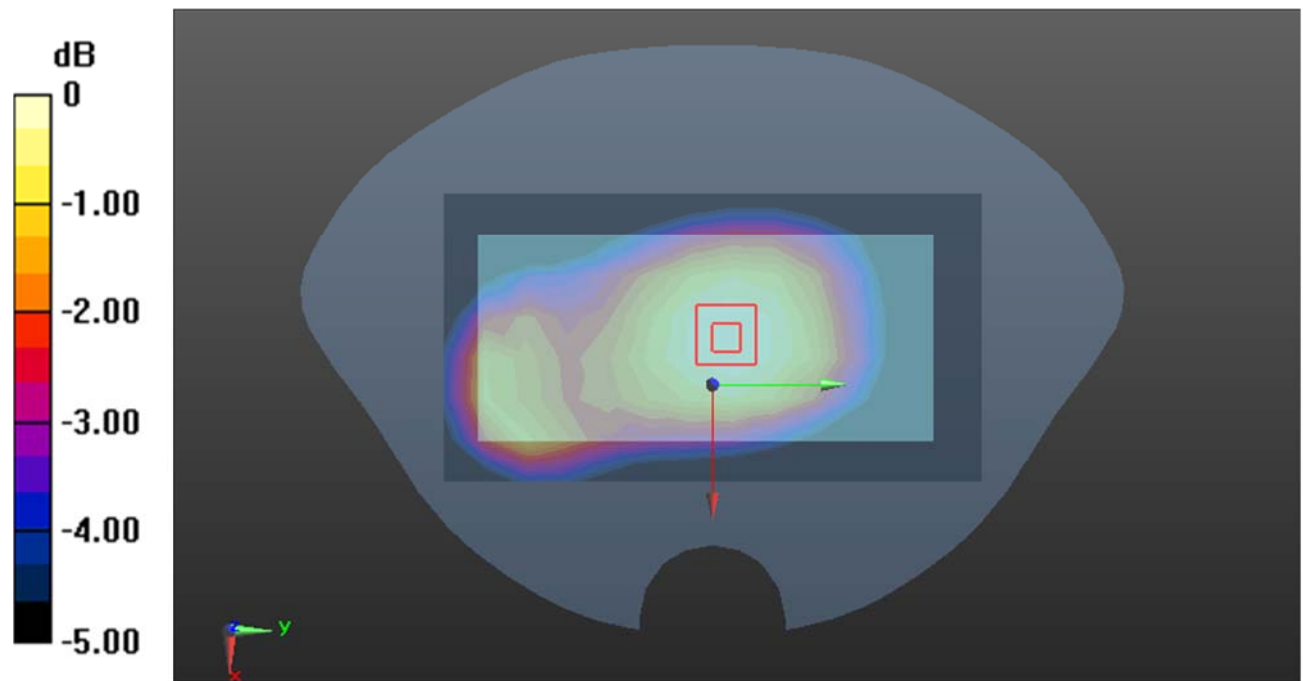

0 dB = 0.104 W/kg = -9.83 dB dBW/kg

**Test Plot133#: LTE Band 28\_Body Back\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.189 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.35 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.190 W/kg

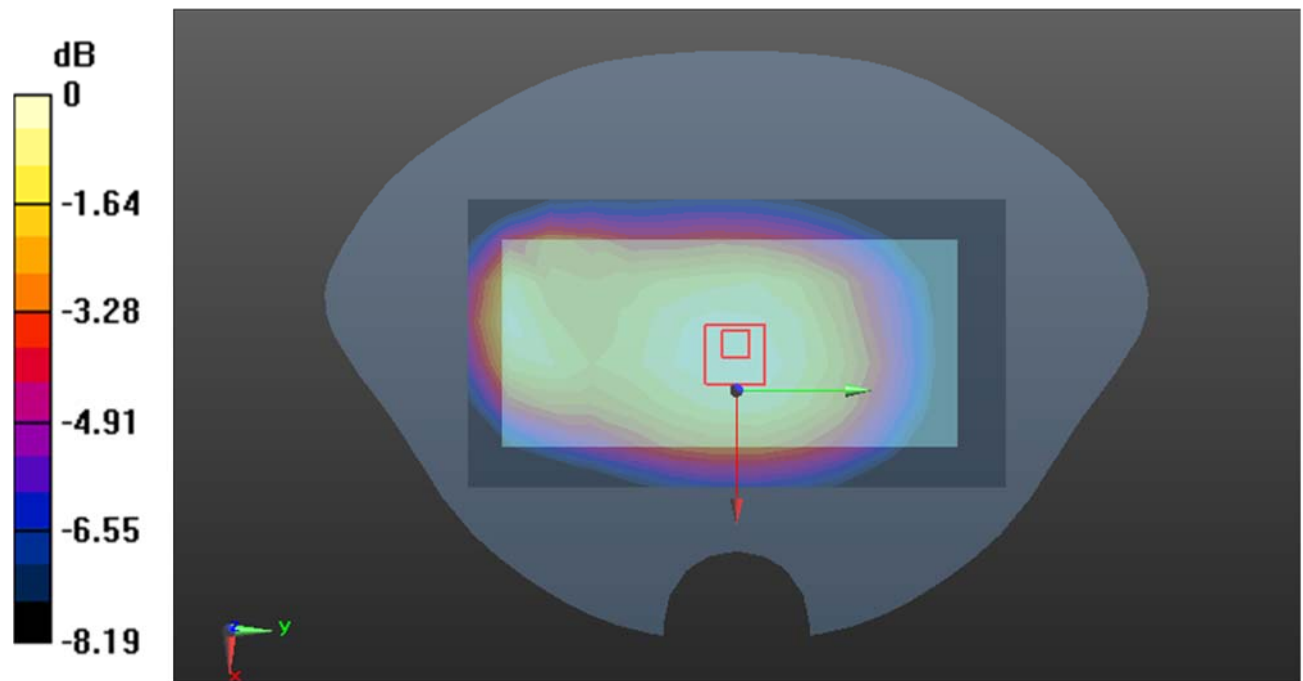

0 dB = 0.190 W/kg = -7.21 dB dBW/kg

**Test Plot134#: LTE Band 28\_Body Back\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.155 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.73 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

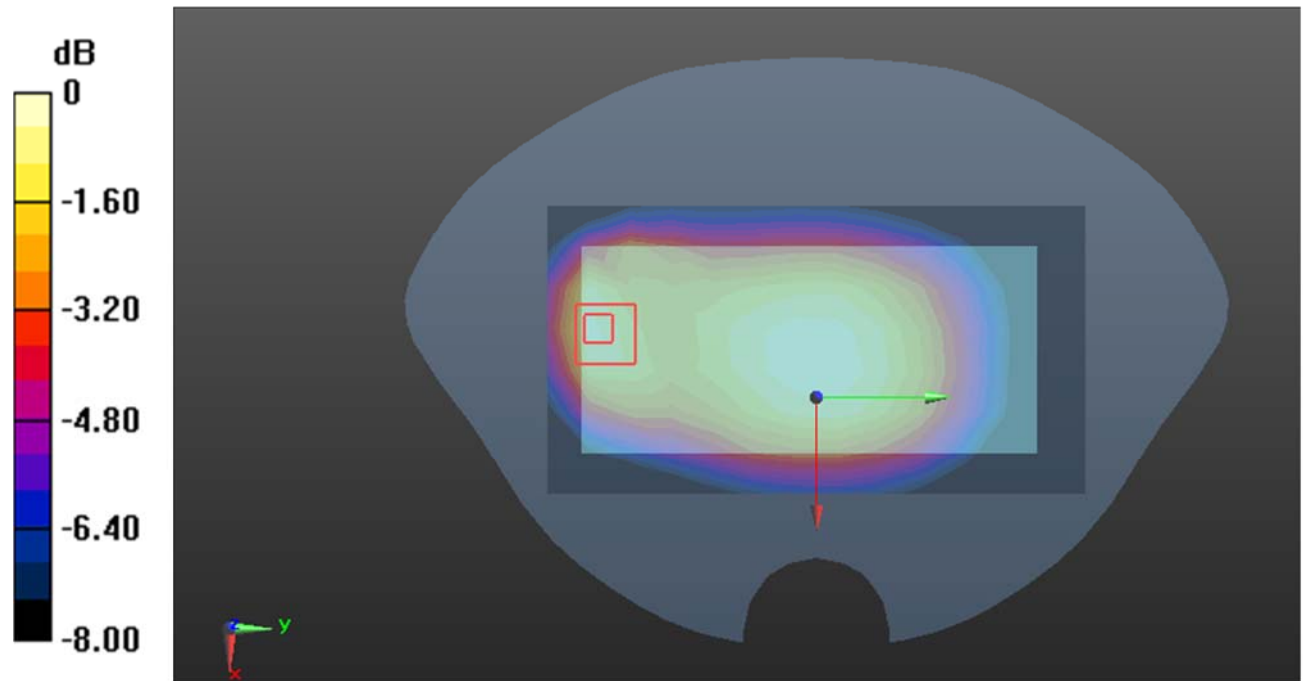

0 dB = 0.158 W/kg = -8.01 dB dBW/kg



**Test Plot135#: LTE Band 28\_Body Left\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.114 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.03 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.117 W/kg

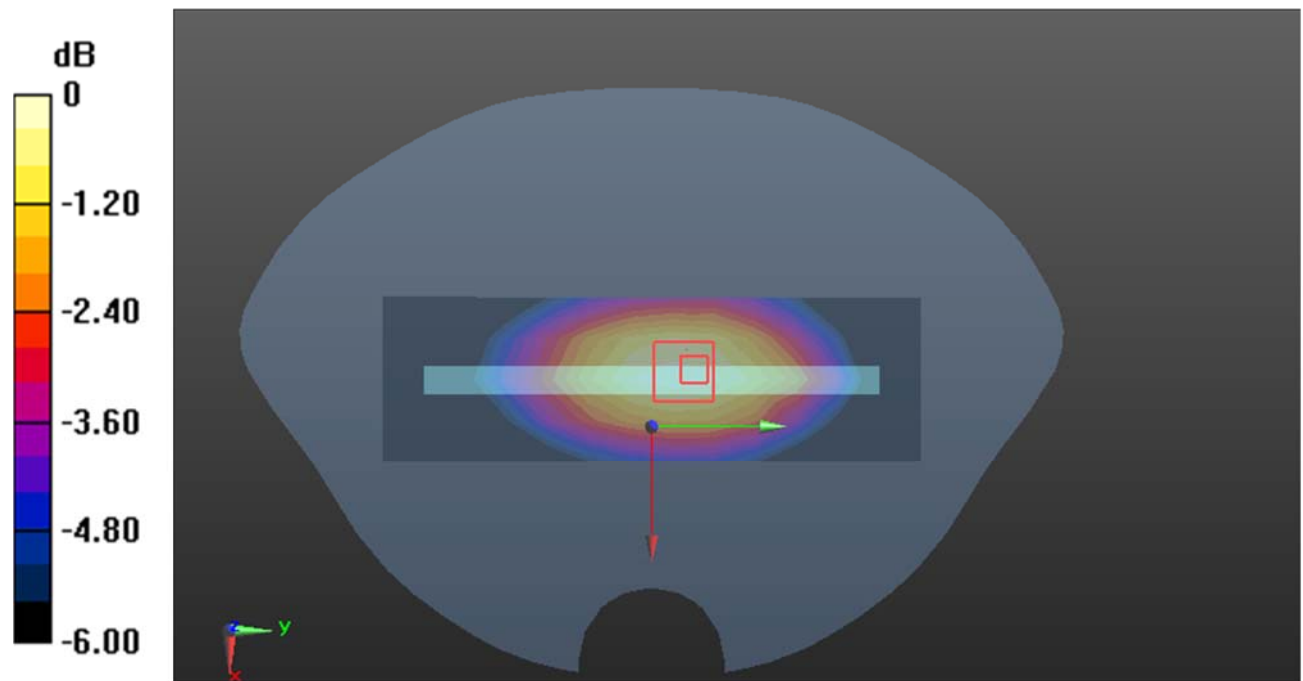

**Test Plot136#: LTE Band 28\_Body Left\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0966 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.78 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.0969 W/kg

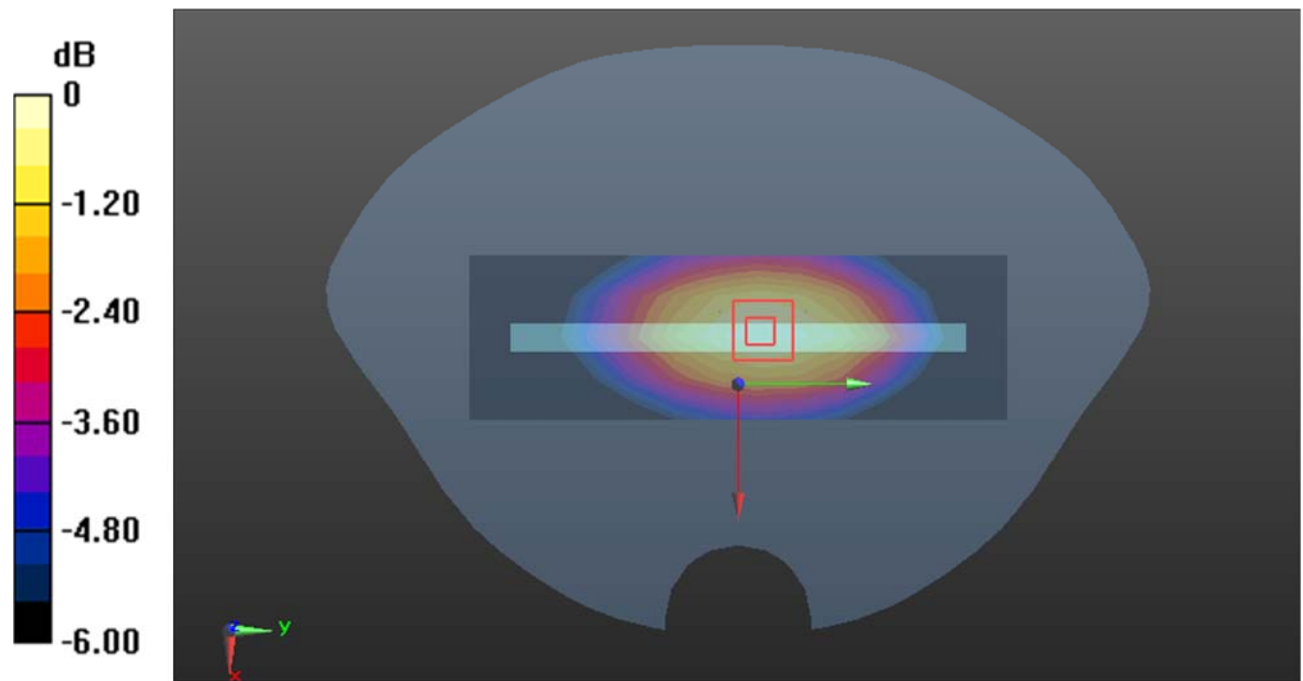

0 dB = 0.0969 W/kg = -10.14 dB dBW/kg

**Test Plot137#: LTE Band 28\_Body Right\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.209 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.01 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.268 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 0.215 W/kg

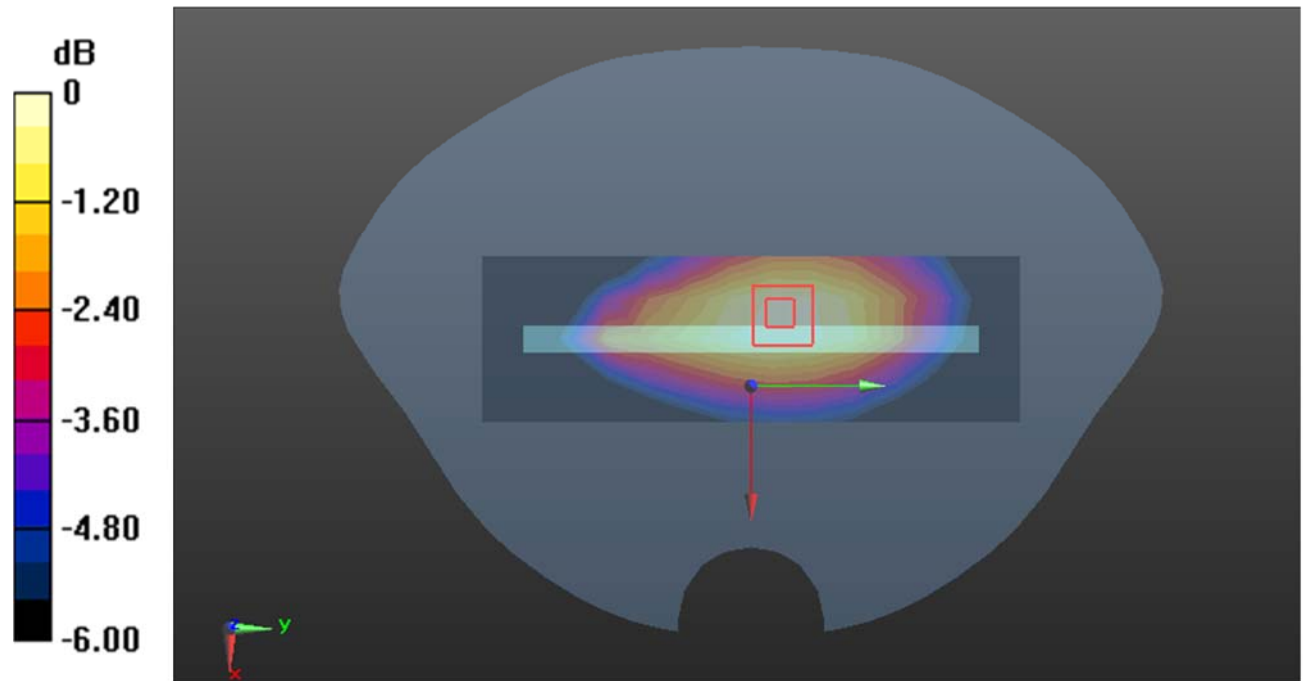

0 dB = 0.215 W/kg = -6.68 dB dBW/kg

**Test Plot138#: LTE Band 28\_Body Right\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.172 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.116 W/kg**

Maximum value of SAR (measured) = 0.184 W/kg

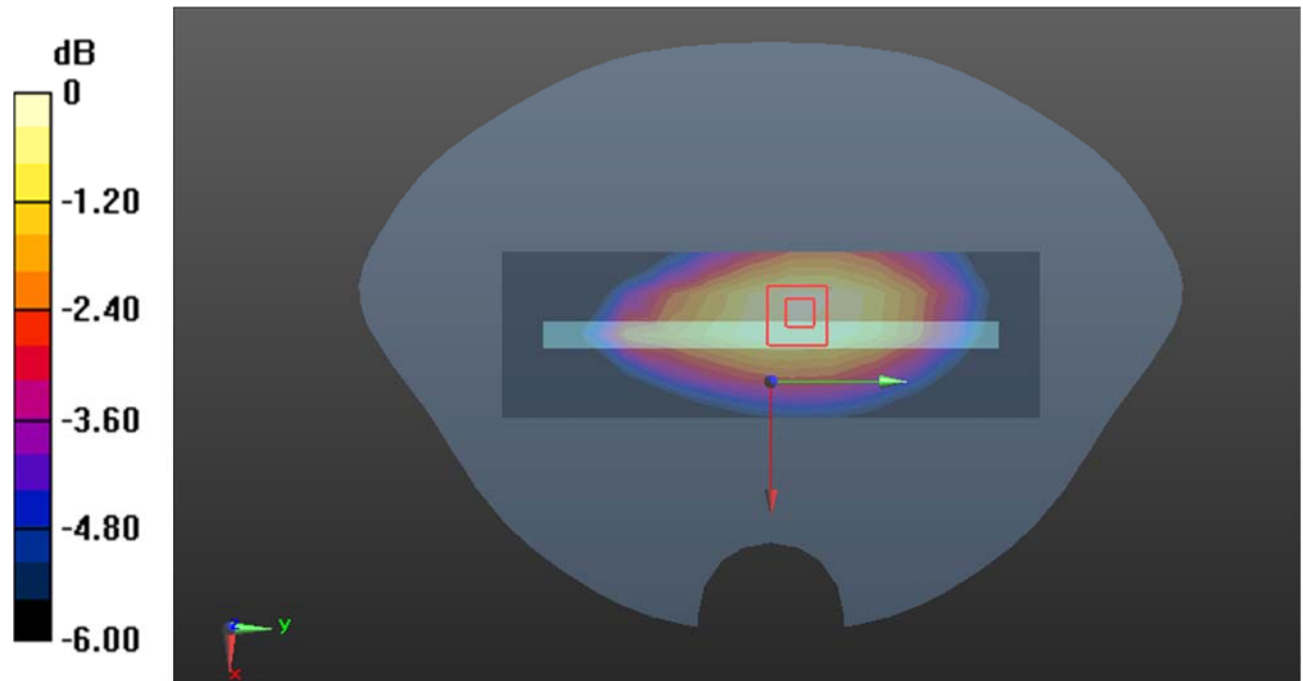

0 dB = 0.184 W/kg = -7.35 dB dBW/kg

**Test Plot139#: LTE Band 28\_Body Bottom\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=719.5$  MHz;  $\sigma=0.873$  S/m;  $\epsilon_r=42.498$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.141 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.222 W/kg

**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.140 W/kg

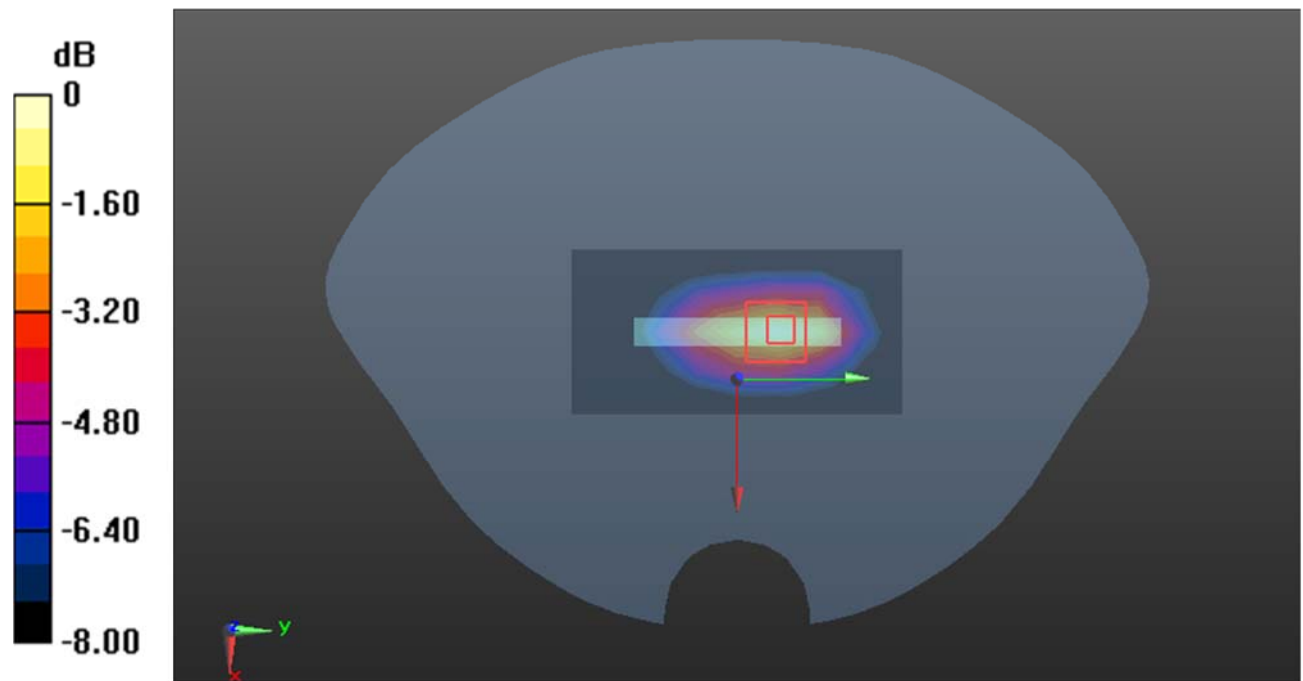

0 dB = 0.140 W/kg = -8.54 dB dBW/kg

**Test Plot140#: LTE Band 28\_Body Bottom\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 719.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 719.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.498$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @719.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.28 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

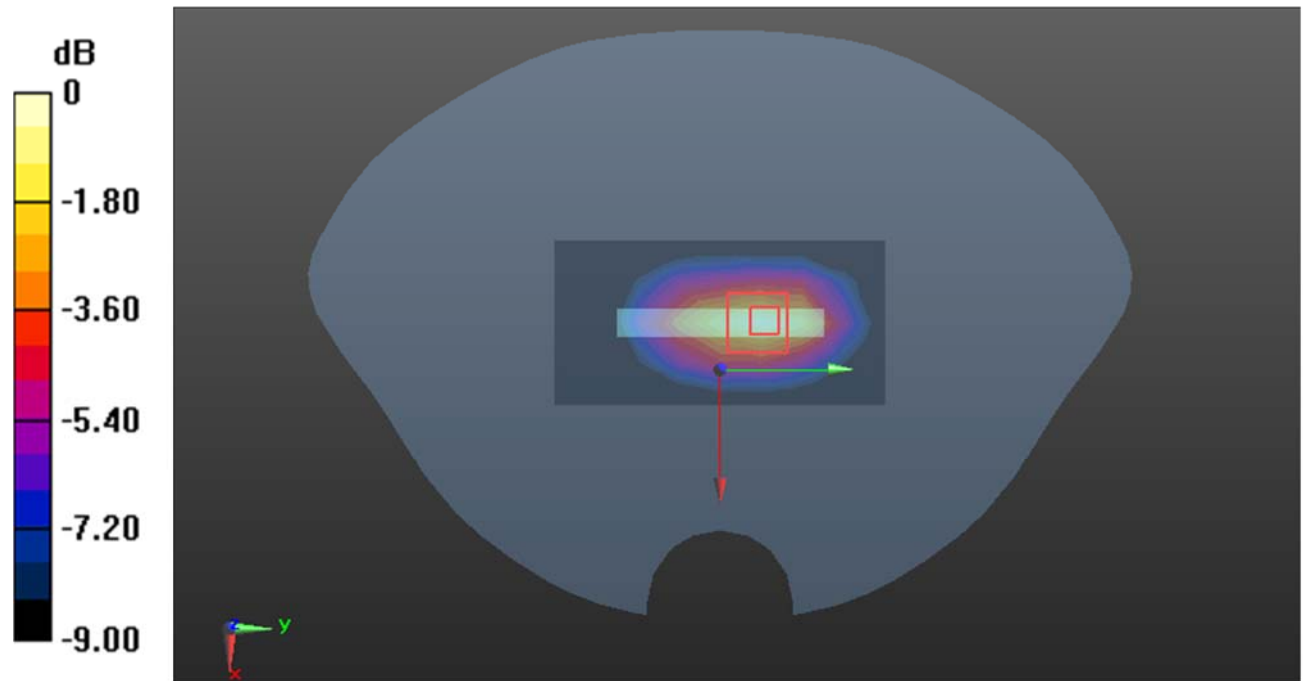

0 dB = 0.115 W/kg = -9.39 dB dBW/kg

**Test Plot141#: LTE Band 41\_Head Left Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.568 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.474 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.884 W/kg

**SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.606 W/kg

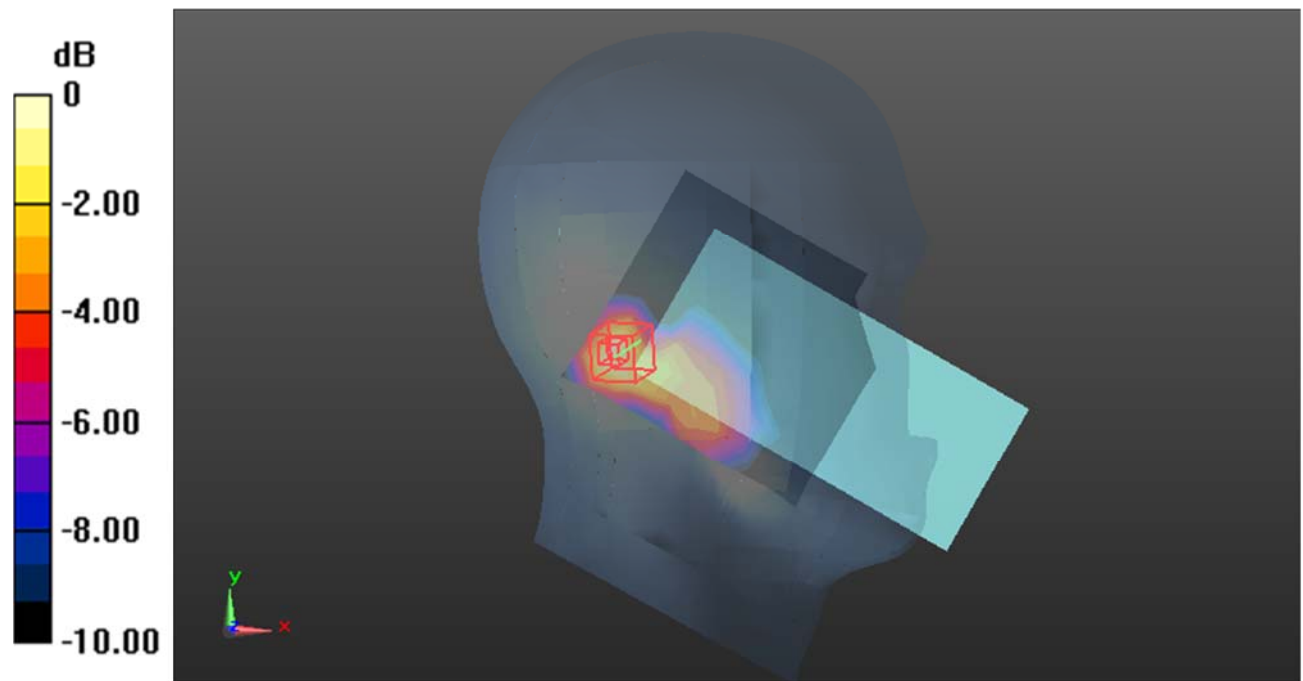

0 dB = 0.606 W/kg = -2.18 dB dBW/kg

**Test Plot142#: LTE Band 41\_Head Left Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.419 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.484 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.703 W/kg

**SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.194 W/kg**

Maximum value of SAR (measured) = 0.484 W/kg

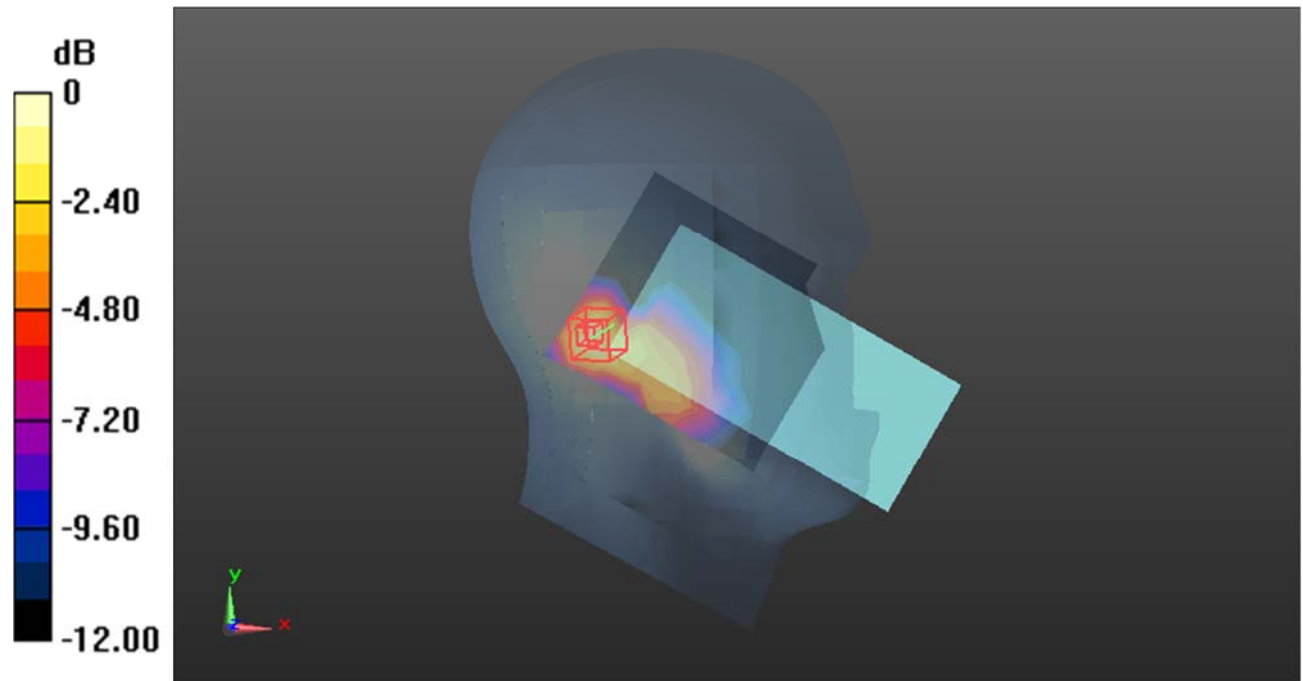

0 dB = 0.484 W/kg = -3.15 dB dBW/kg



**Test Plot143#: LTE Band 41\_Head Left Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.739 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.776 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.298 W/kg**

Maximum value of SAR (measured) = 0.722 W/kg

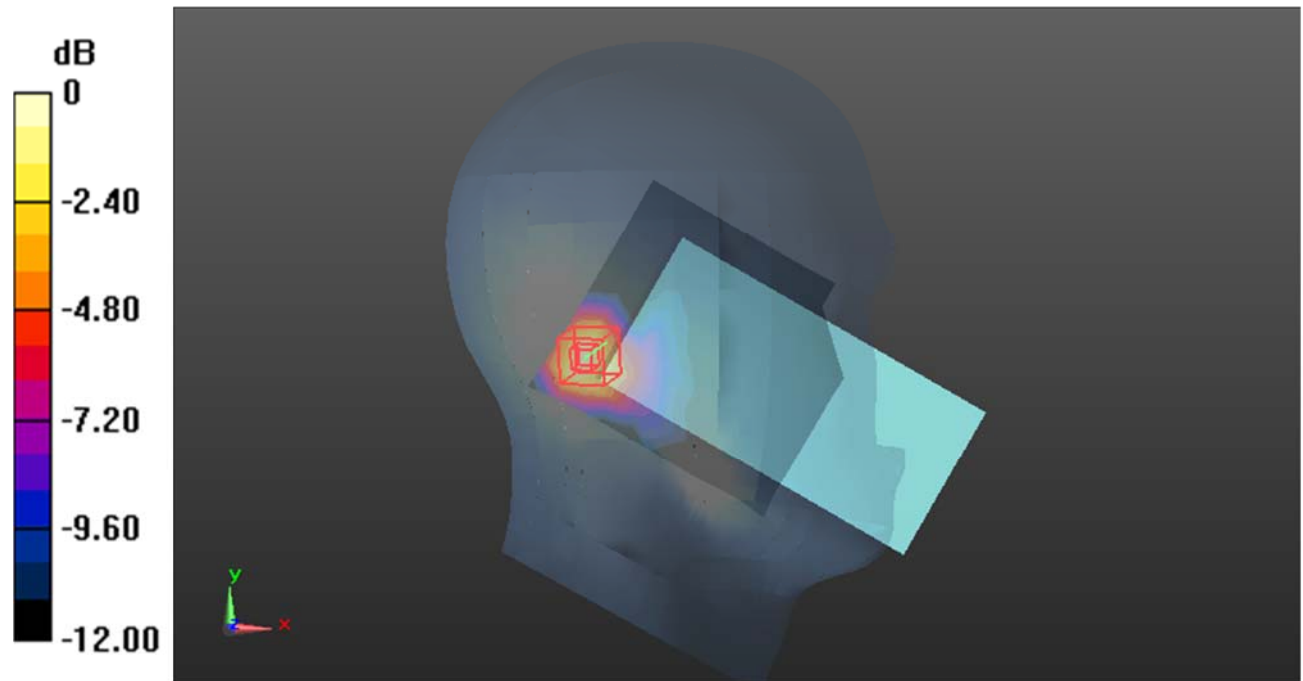

0 dB = 0.722 W/kg = -1.41 dB dBW/kg

**Test Plot144#: LTE Band 41\_Head Left Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.618 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.304 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.235 W/kg**

Maximum value of SAR (measured) = 0.583 W/kg

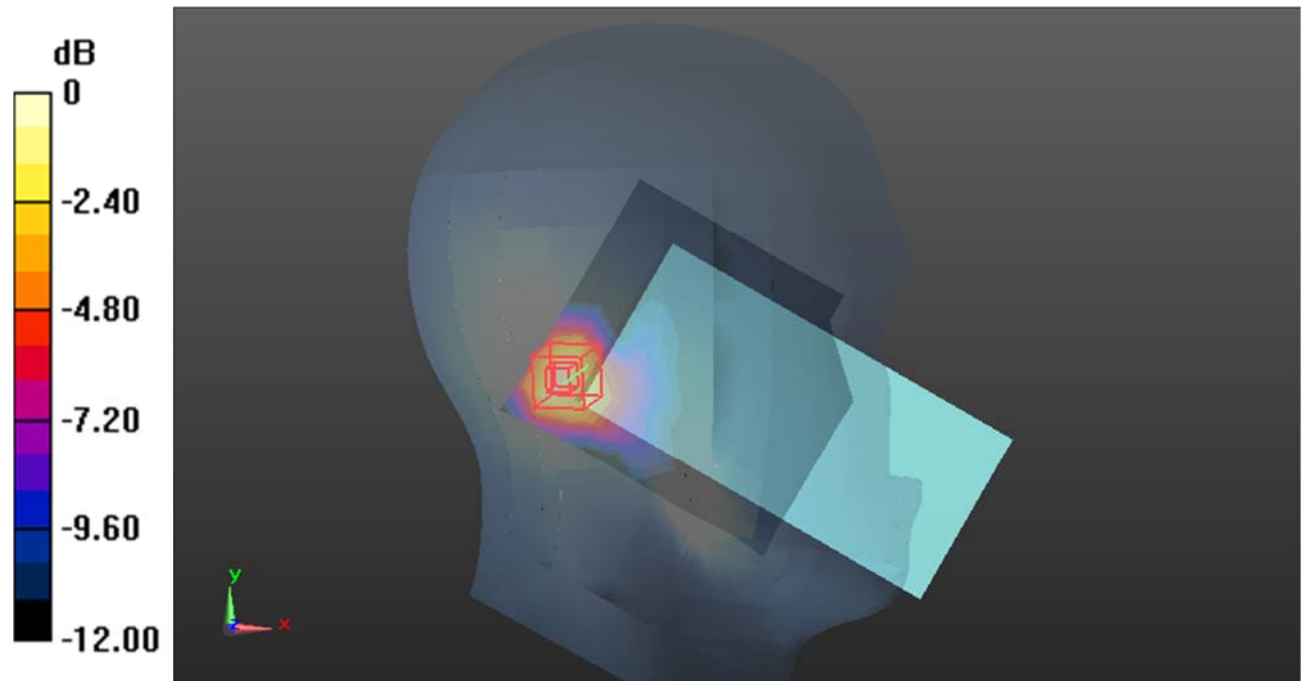

0 dB = 0.583 W/kg = -2.34 dB dBW/kg

**Test Plot145#: LTE Band 41\_Head Right Cheek\_1RB\_Low****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2565 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2565$  MHz;  $\sigma = 1.907$  S/m;  $\epsilon_r = 38.993$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2565 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.37 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.857 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.60 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.566 W/kg**

Maximum value of SAR (measured) = 1.43 W/kg

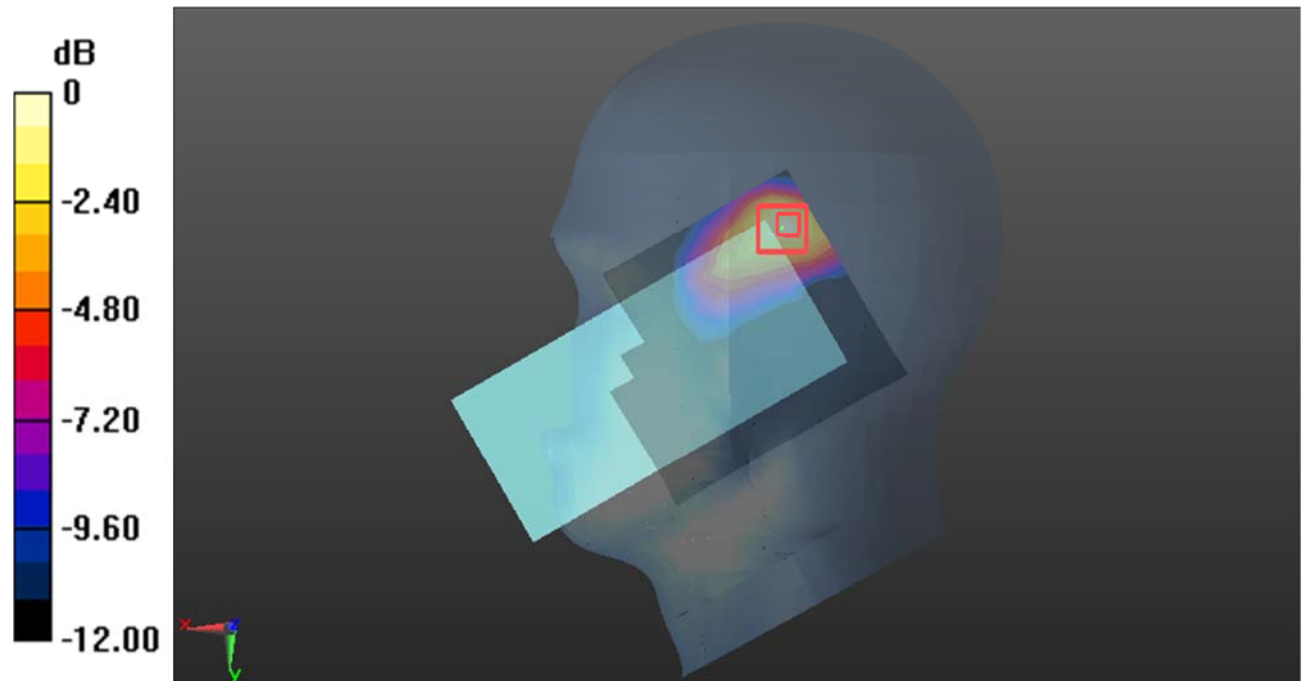

0 dB = 1.43 W/kg = 1.55 dB dBW/kg

**Test Plot146#: LTE Band 41\_Head Right Cheek\_1RB\_2585 MHz****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2585 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2585$  MHz;  $\sigma = 1.926$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2585 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.40 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.116 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.79 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.612 W/kg**

Maximum value of SAR (measured) = 1.58 W/kg

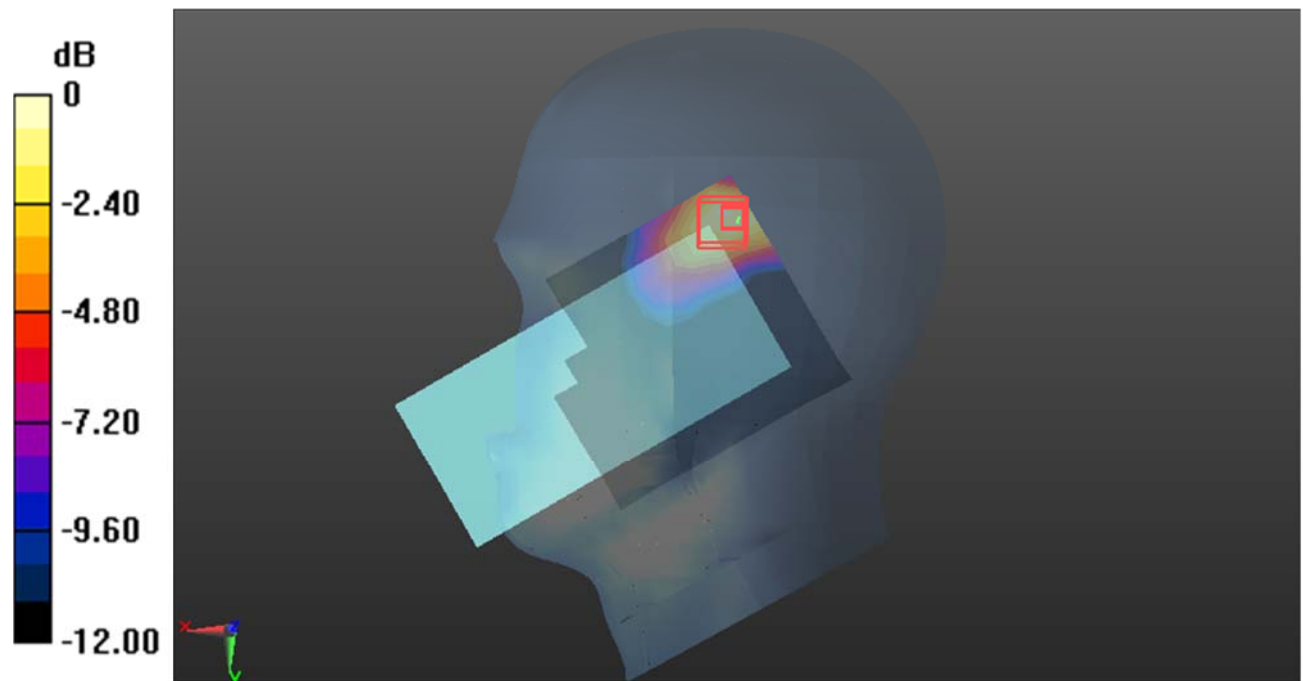

0 dB = 1.58 W/kg = 1.99 dB dBW/kg

**Test Plot147#: LTE Band 41\_Head Right Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.21 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.104 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.21 W/kg

**SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.479 W/kg**

Maximum value of SAR (measured) = 1.23 W/kg

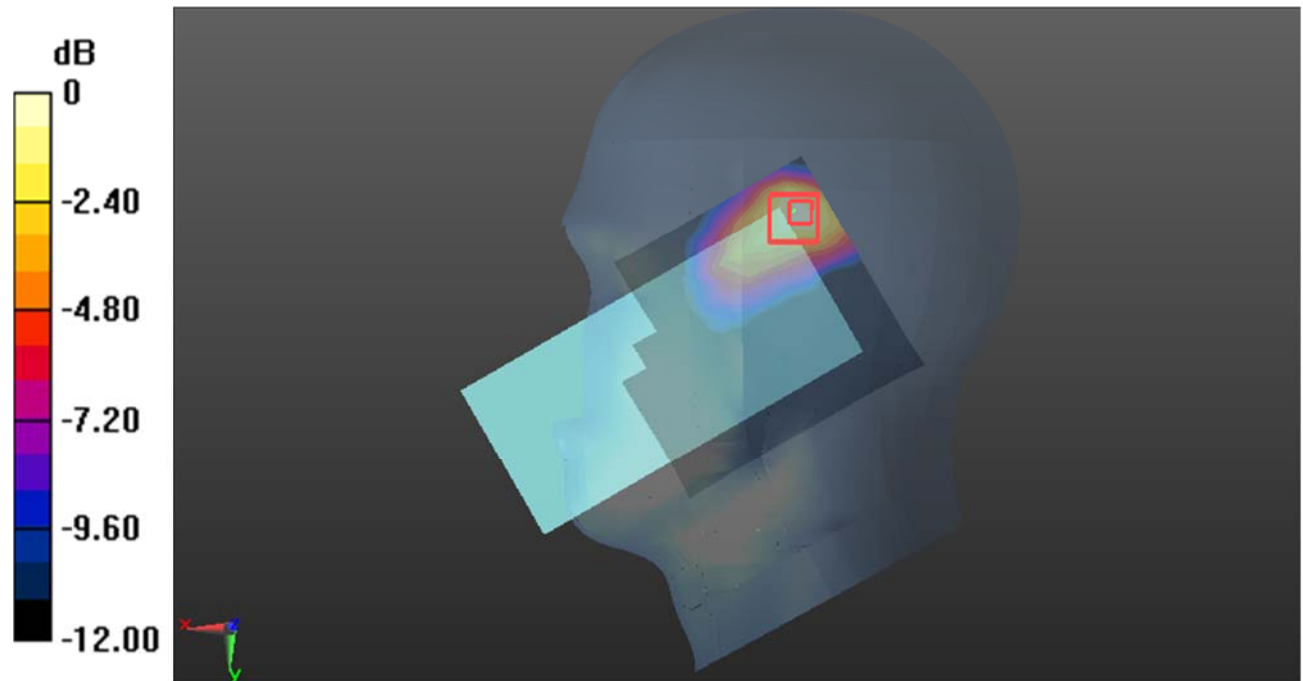

0 dB = 1.23 W/kg = 0.90 dB dBW/kg

**Test Plot148#: LTE Band 41\_Head Right Cheek\_1RB\_High****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2645$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 38.808$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2645 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.13 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.981 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.08 W/kg

**SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.450 W/kg**

Maximum value of SAR (measured) = 1.14 W/kg

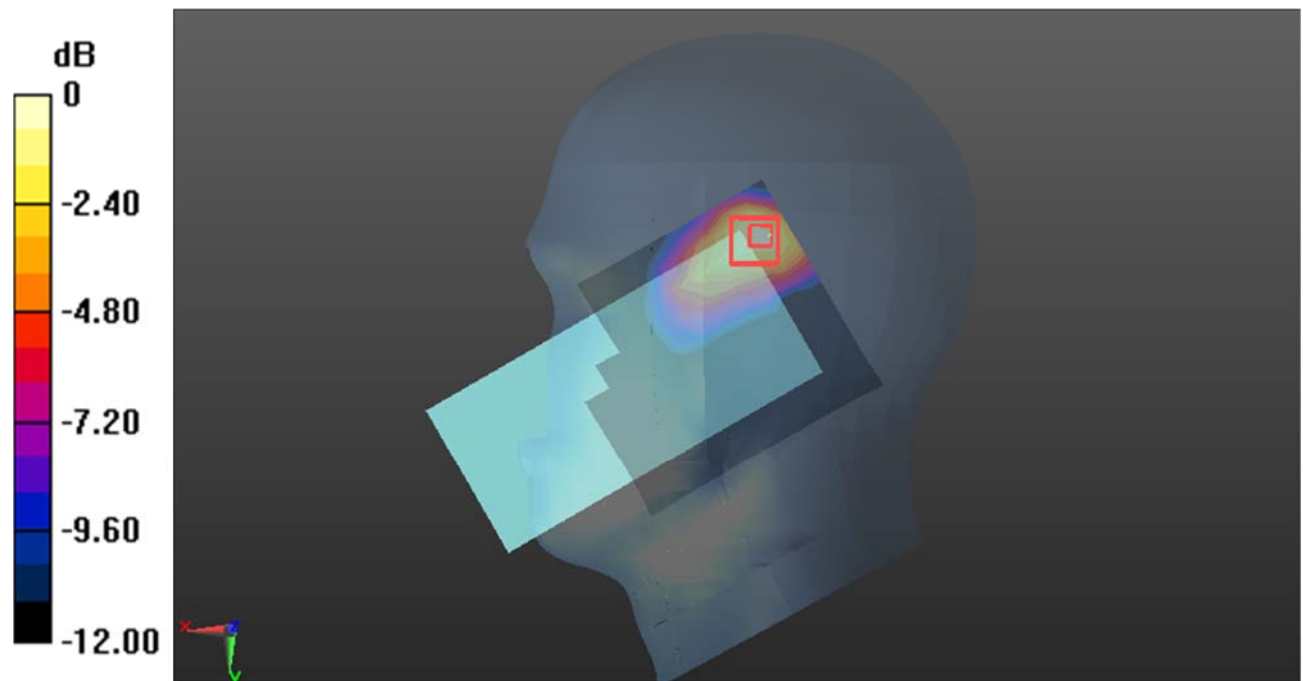

0 dB = 1.14 W/kg = 0.57 dB dBW/kg

**Test Plot149#: LTE Band 41\_Head Right Cheek\_50%RB\_Low****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2565 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2565$  MHz;  $\sigma = 1.907$  S/m;  $\epsilon_r = 38.993$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2565 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.18 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.387 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.11 W/kg

**SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.473 W/kg**

Maximum value of SAR (measured) = 1.23 W/kg

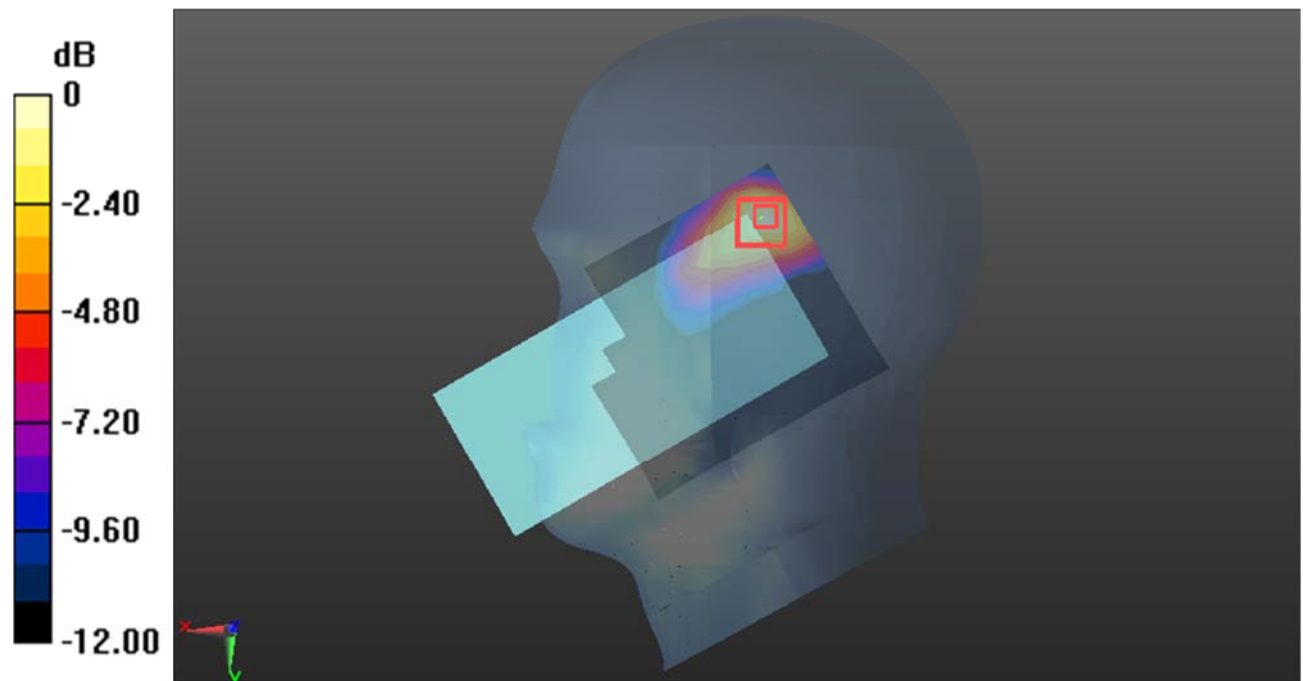

0 dB = 1.23 W/kg = 0.90 dB dBW/kg

**Test Plot150#: LTE Band 41\_Head Right Cheek\_50%RB\_2585 MHz****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2585 MHz;Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2585$  MHz;  $\sigma = 1.926$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2585 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.03 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.230 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.791 W/kg; SAR(10 g) = 0.405 W/kg**

Maximum value of SAR (measured) = 0.984 W/kg

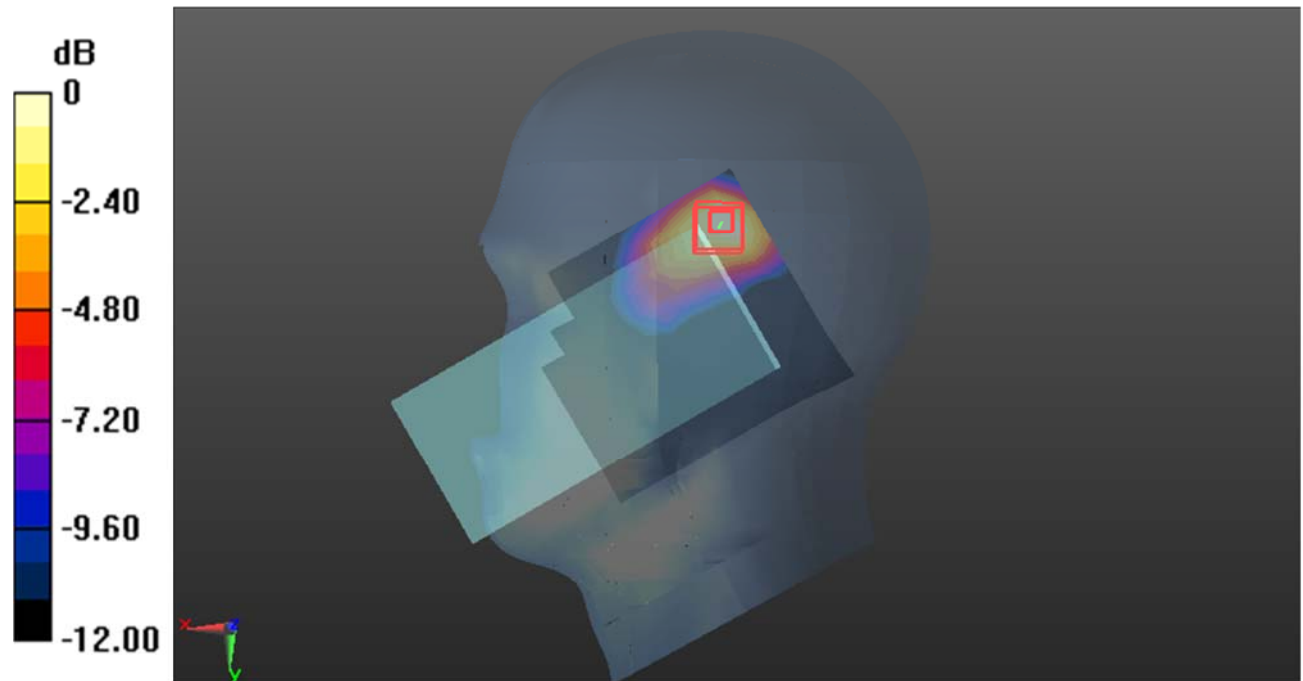

0 dB = 0.984 W/kg = -0.07 dB dBW/kg



**Test Plot151#: LTE Band 41\_Head Right Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.960 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.754 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.380 W/kg**

Maximum value of SAR (measured) = 0.992 W/kg

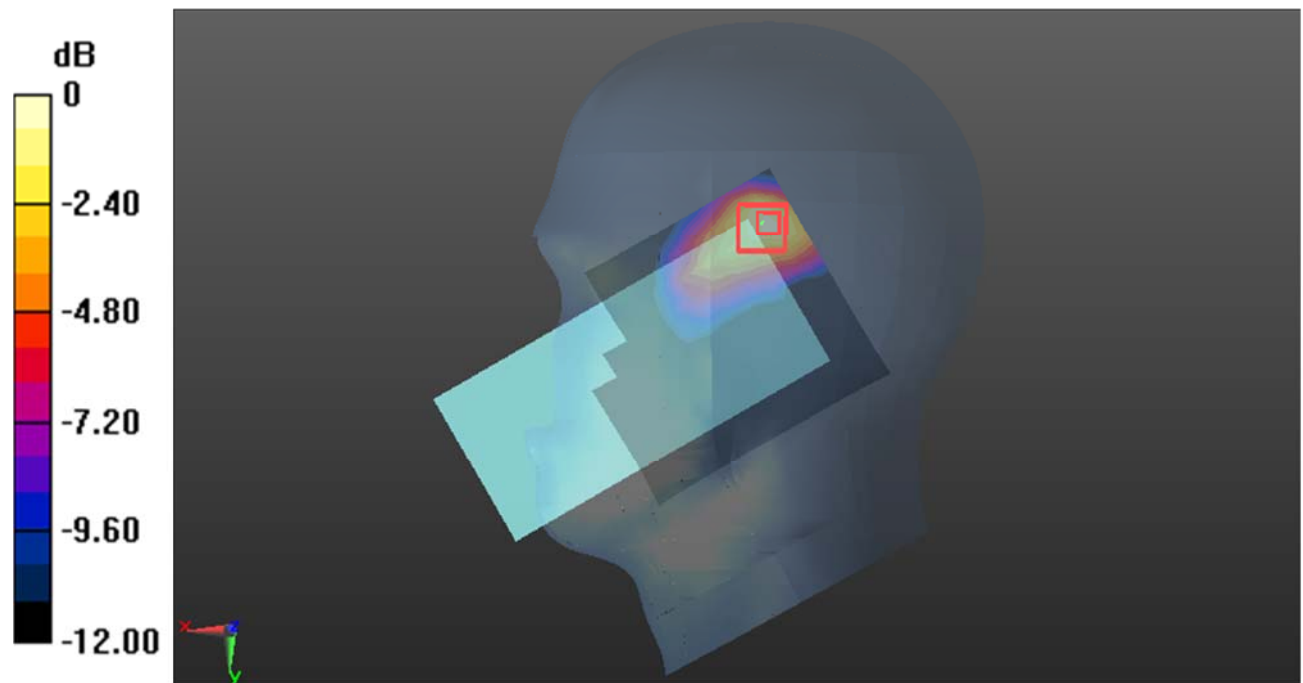

0 dB = 0.992 W/kg = -0.03 dB dBW/kg

**Test Plot152#: LTE Band 41\_Head Right Cheek\_50%RB\_High****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2645$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 38.808$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2645 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.844 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.479 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.344 W/kg**

Maximum value of SAR (measured) = 0.893 W/kg

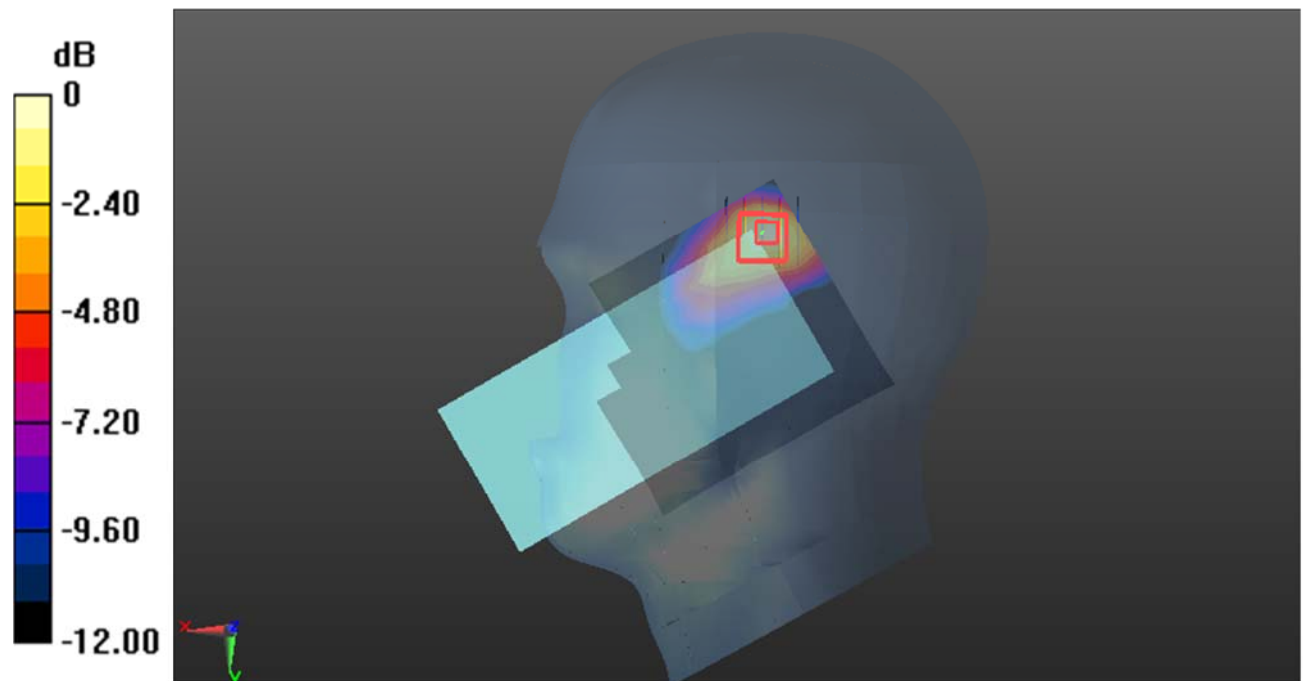

0 dB = 0.893 W/kg = -0.49 dB dBW/kg

**Test Plot153#: LTE Band 41\_Head Right Cheek\_100%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.958 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.754 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.384 W/kg**

Maximum value of SAR (measured) = 0.994 W/kg

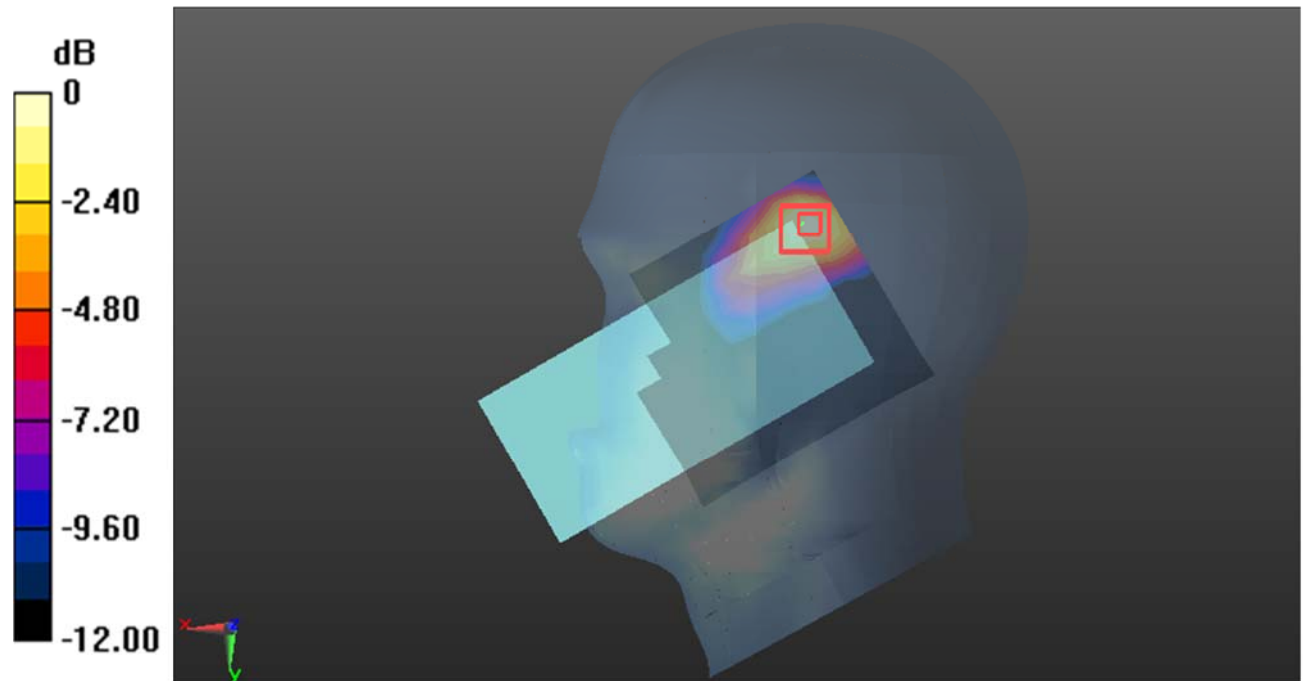

0 dB = 0.994 W/kg = -0.03 dB dBW/kg

**Test Plot154#: LTE Band 41\_Head Right Tilt\_1RB\_Low****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2565 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2565$  MHz;  $\sigma = 1.907$  S/m;  $\epsilon_r = 38.993$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2565 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.435 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.64 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.542 W/kg**

Maximum value of SAR (measured) = 1.56 W/kg

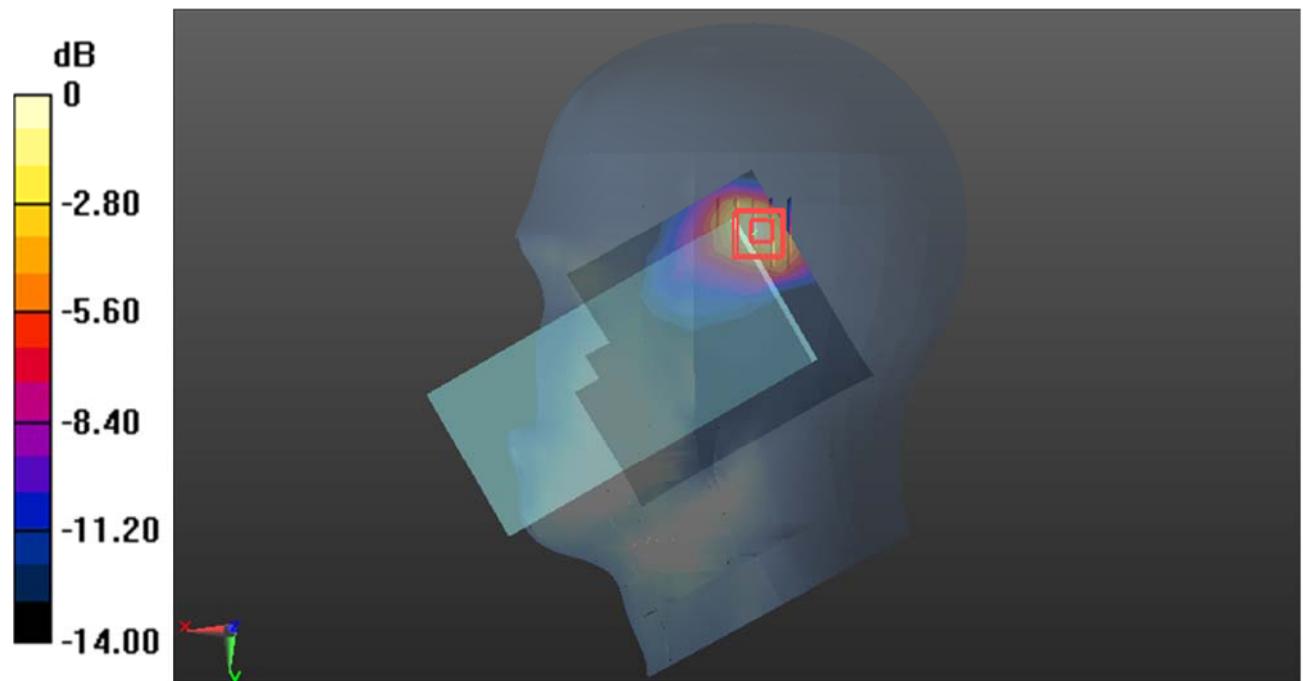

0 dB = 1.56 W/kg = 1.93 dB dBW/kg

**Test Plot155#: LTE Band 41\_Head Right Tilt\_1RB\_2585 MHz****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2585 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2585$  MHz;  $\sigma = 1.926$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2585MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.46 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.630 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.87 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.550 W/kg**

Maximum value of SAR (measured) = 1.68 W/kg

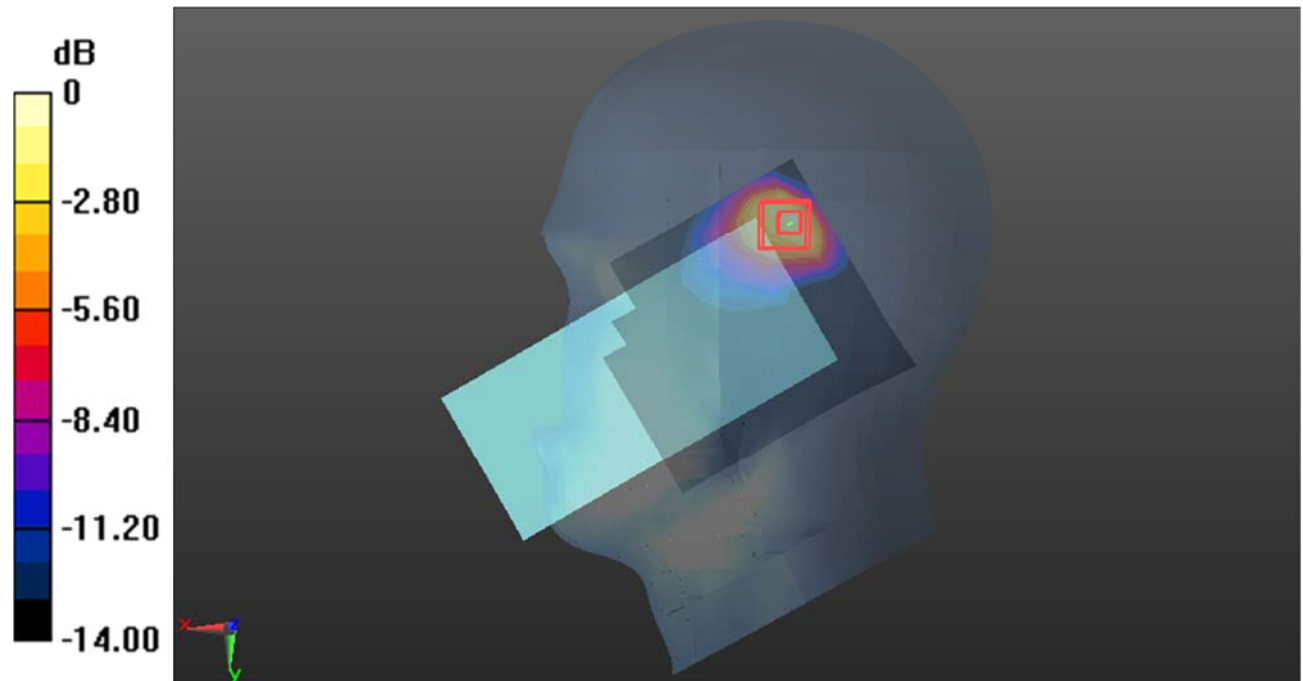

0 dB = 1.68 W/kg = 2.25 dB dBW/kg

**Test Plot156#: LTE Band 41\_Head Right Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.38 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.221 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 2.29 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.484 W/kg**

Maximum value of SAR (measured) = 1.39 W/kg

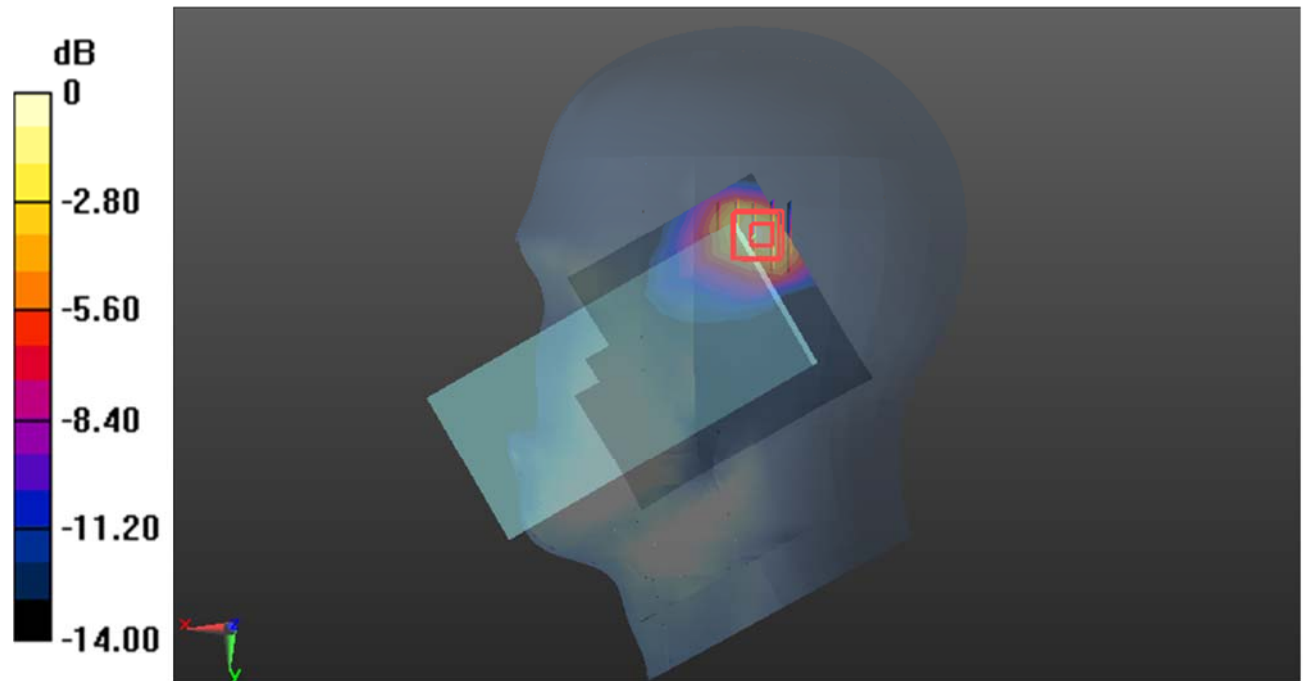

**Test Plot157#: LTE Band 41\_Head Right Tilt\_1RB\_High****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2645$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 38.808$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2645 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.00 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.587 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.02 W/kg

**SAR(1 g) = 0.874 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

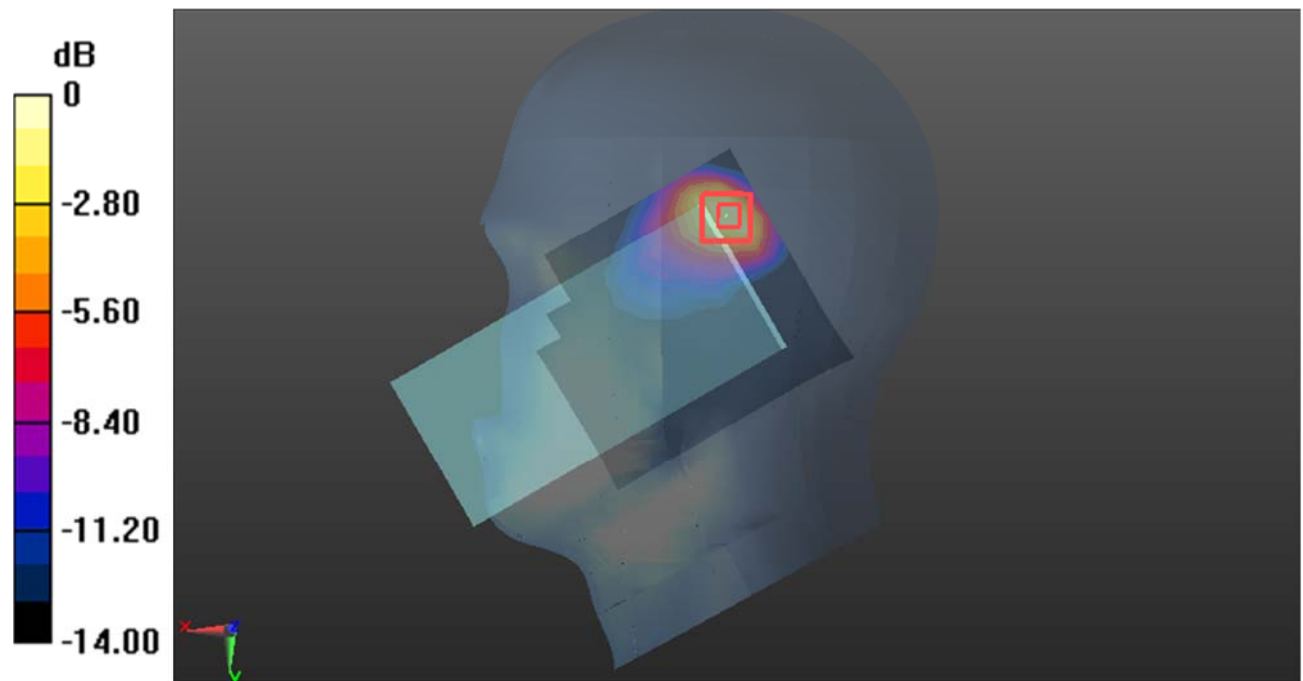

0 dB = 1.20 W/kg = 0.79 dB dBW/kg

**Test Plot158#: LTE Band 41\_Head Right Tilt\_50%RB\_Low****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2565 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2565$  MHz;  $\sigma = 1.907$  S/m;  $\epsilon_r = 38.993$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2565 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.25 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.754 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.433 W/kg**

Maximum value of SAR (measured) = 1.25 W/kg

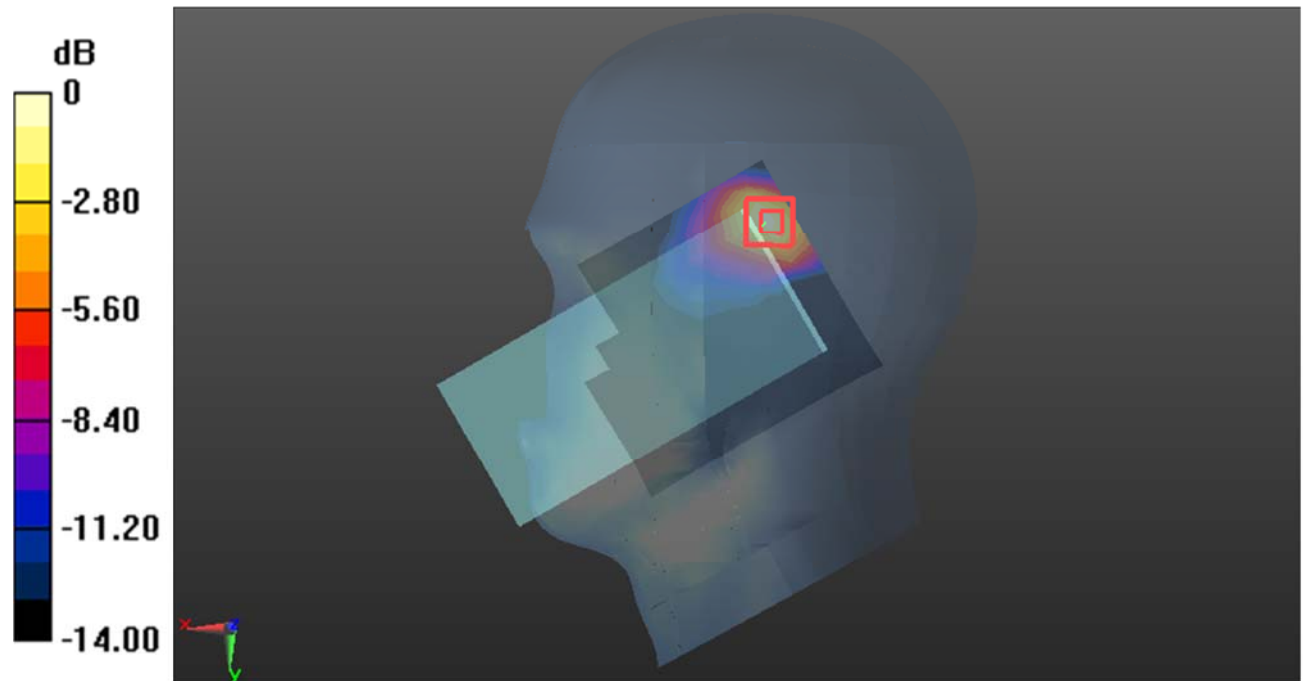

0 dB = 1.25 W/kg = 0.97 dB dBW/kg



**Test Plot159#: LTE Band 41\_Head Right Tilt\_50%RB\_2585 MHz****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2585 MHz;Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2585$  MHz;  $\sigma = 1.926$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2585 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.17 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.565 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.437 W/kg**

Maximum value of SAR (measured) = 1.34 W/kg

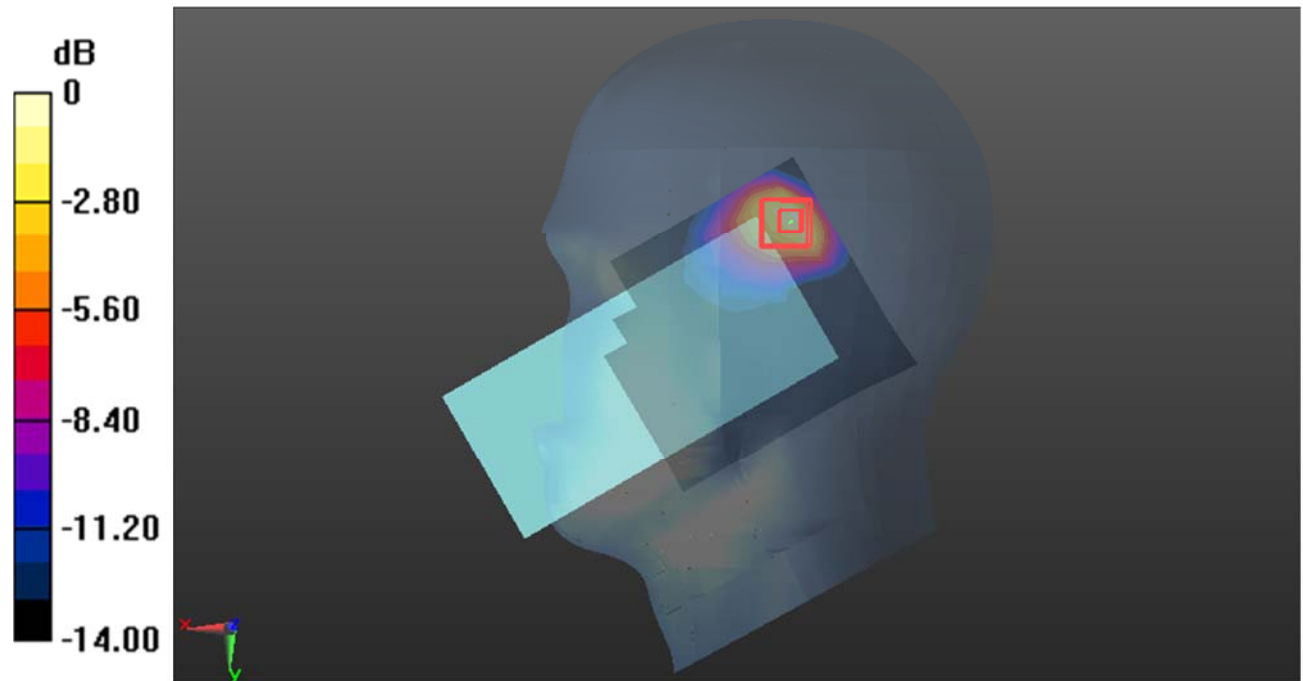

0 dB = 1.34 W/kg = 1.27 dB dBW/kg

**Test Plot160#: LTE Band 41\_Head Right Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.08 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.387 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.372 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

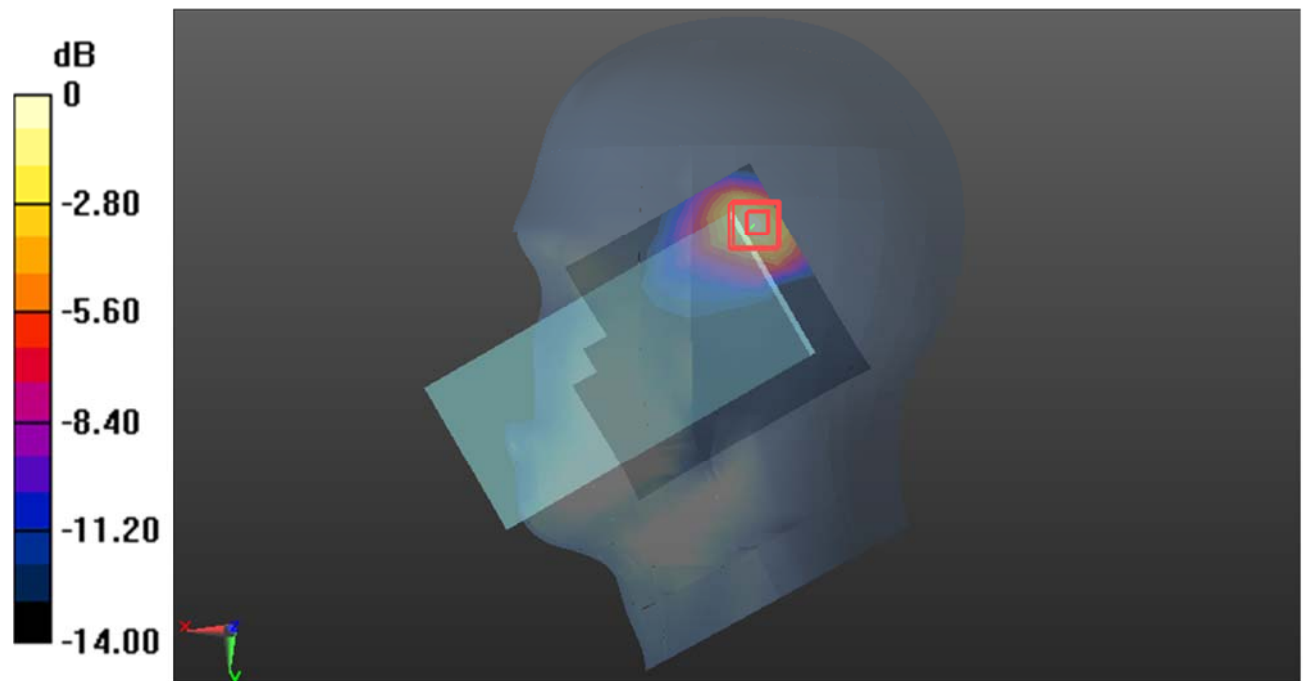

0 dB = 1.08 W/kg = 0.33 dB dBW/kg

**Test Plot161#: LTE Band 41\_Head Right Tilt\_50%RB\_High****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2645 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2645$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 38.808$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2645 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.701 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.33 W/kg

**SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.443 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

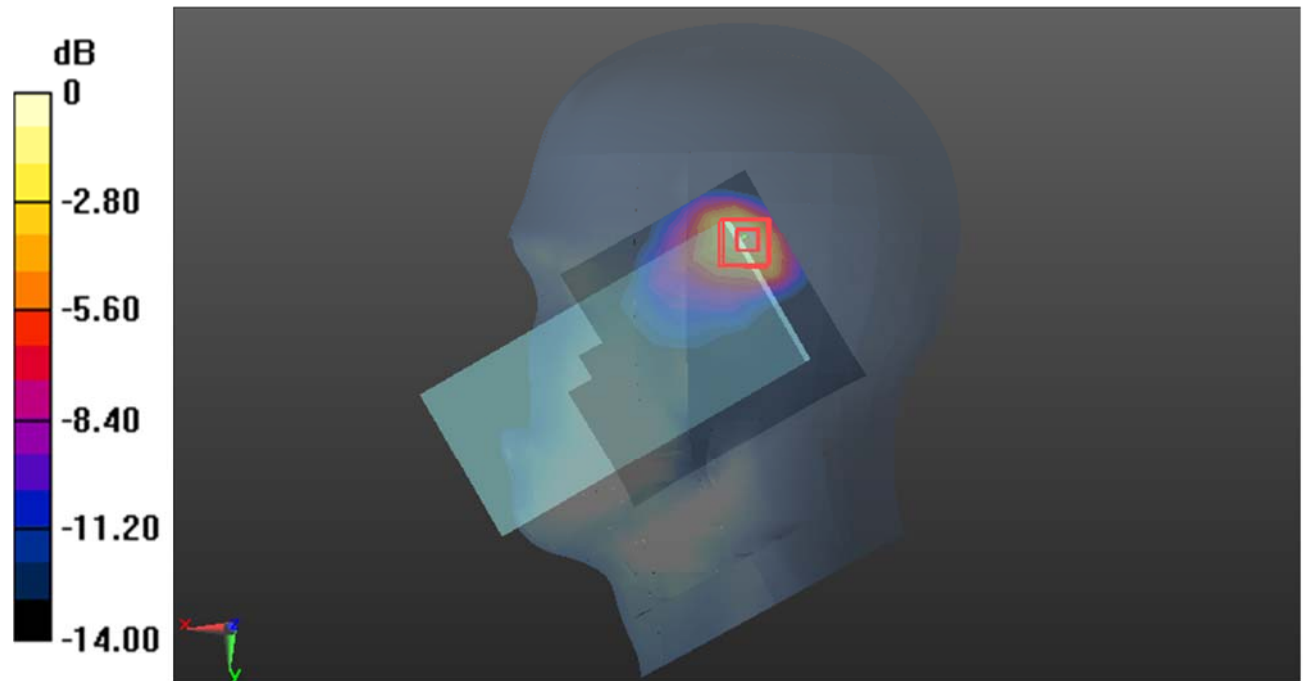

0 dB = 1.31 W/kg = 1.17 dB dBW/kg

**Test Plot162#: LTE Band 41\_Head Right Tilt\_100%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.424 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.84 W/kg

**SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.370 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

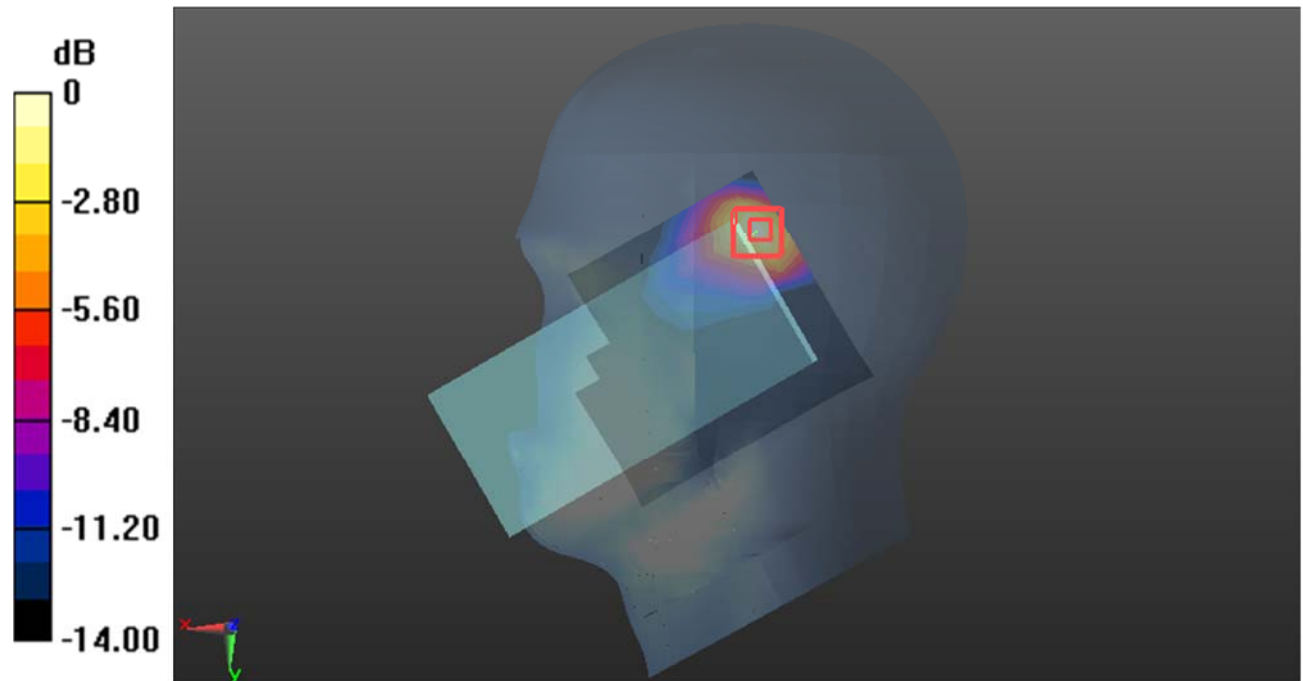

0 dB = 1.08 W/kg = 0.33 dB dBW/kg

**Test Plot163#: LTE Band 41\_Body Front\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.283 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.868 V/m; Power Drift = -00 dB

Peak SAR (extrapolated) = 0.448 W/kg

**SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.129 W/kg**

Maximum value of SAR (measured) = 0.287 W/kg

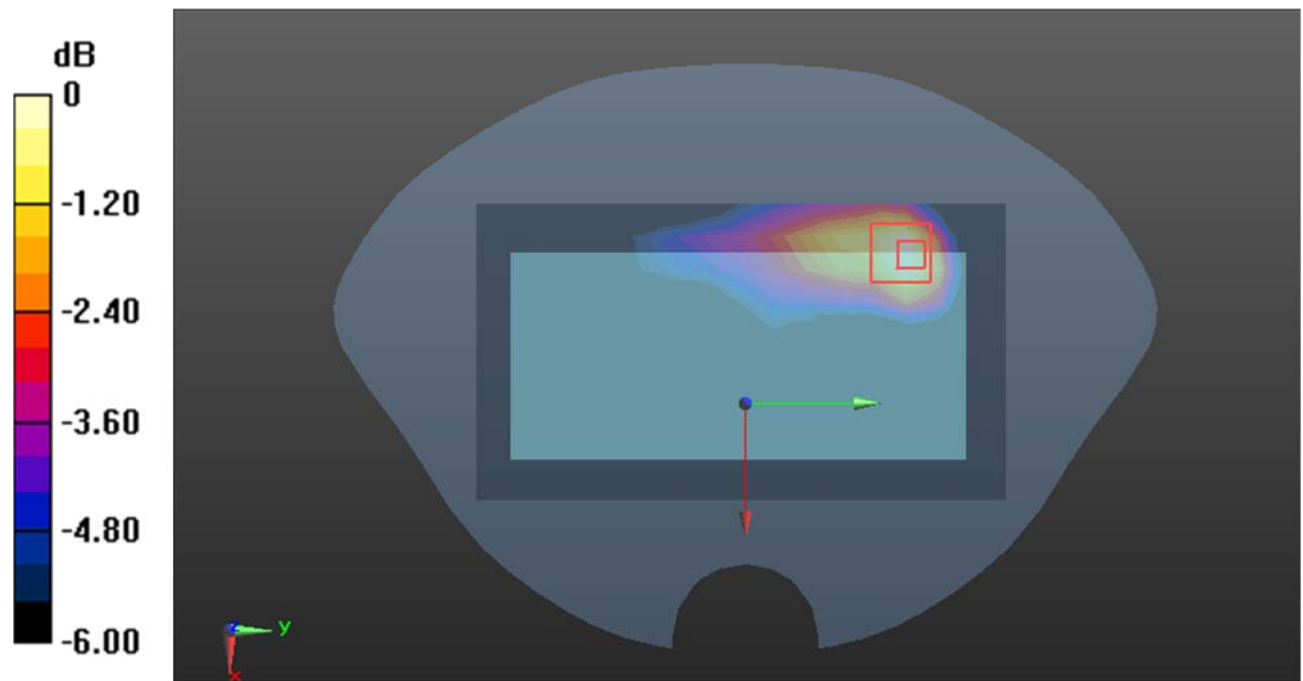

0 dB = 0.287 W/kg = -5.42 dB dBW/kg

**Test Plot164#: LTE Band 41\_Body Front\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.278 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.910 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.475 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.286 W/kg

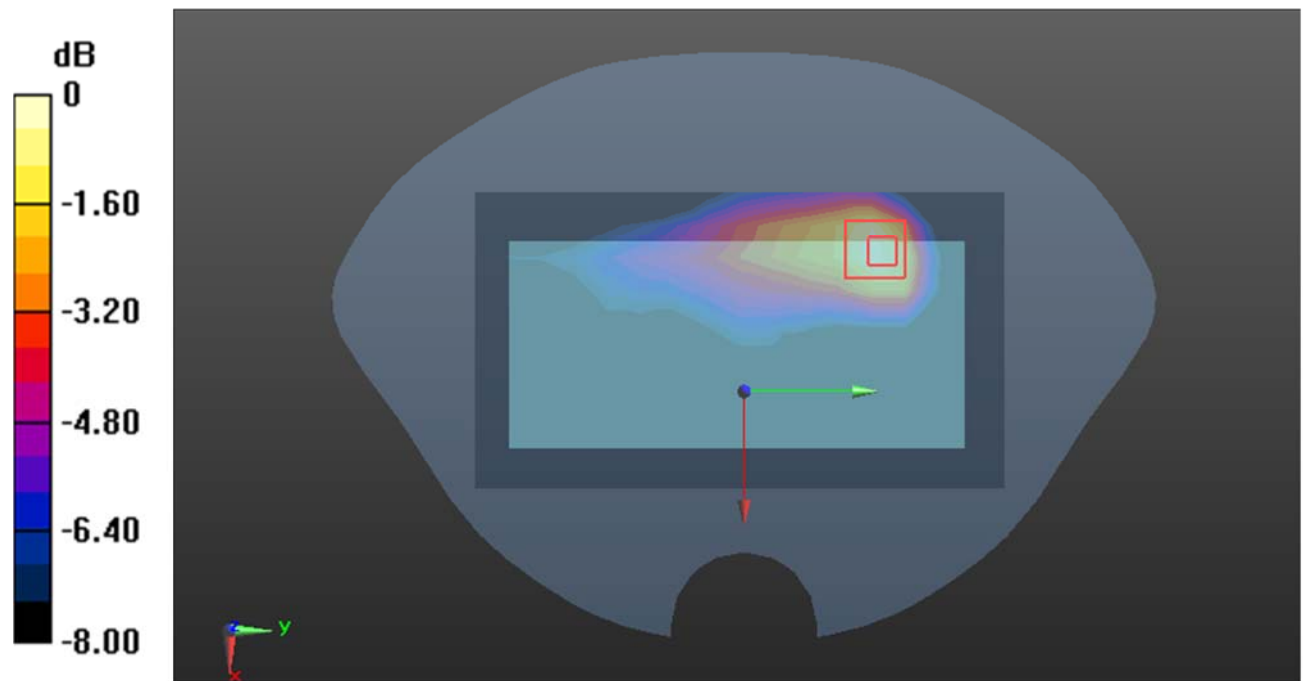

0 dB = 0.286 W/kg = -5.44 dB dBW/kg

**Test Plot165#: LTE Band 41\_Body Back\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.404 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.899 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.697 W/kg

**SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.432 W/kg

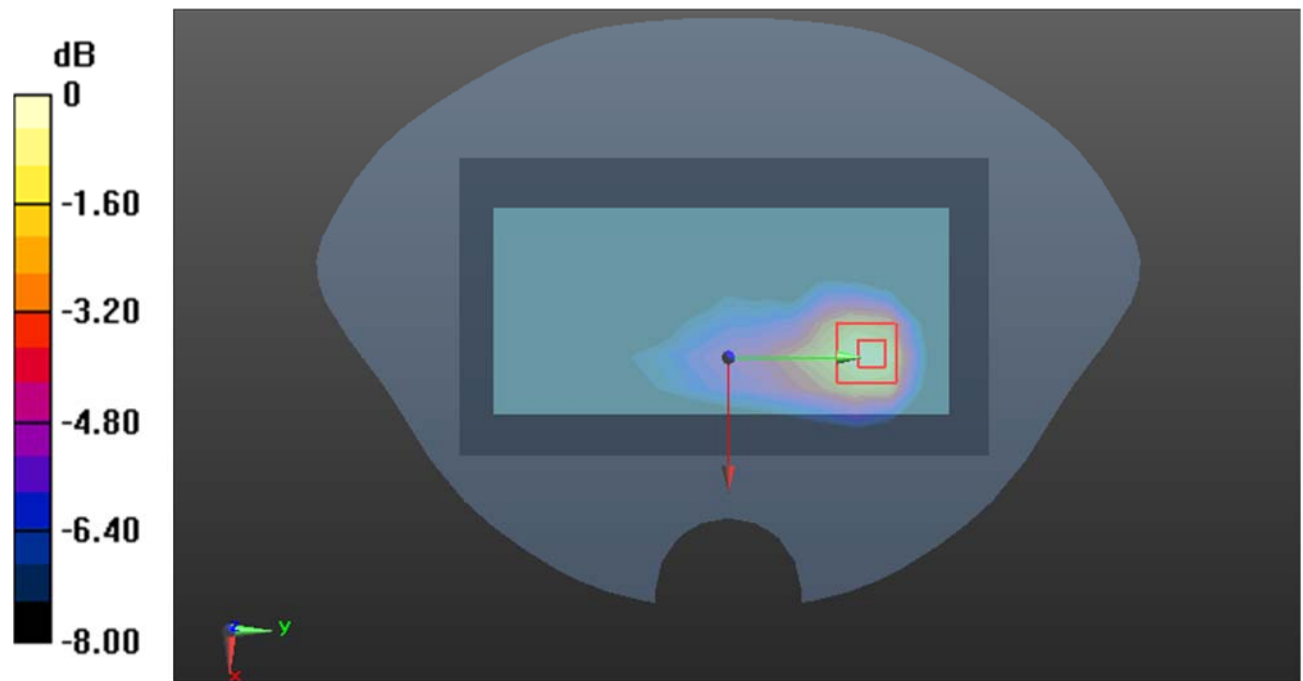

0 dB = 0.432 W/kg = -3.65 dB dBW/kg

**Test Plot166#: LTE Band 41\_Body Back\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.316 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.153 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.560 W/kg

**SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.137 W/kg**

Maximum value of SAR (measured) = 0.347 W/kg

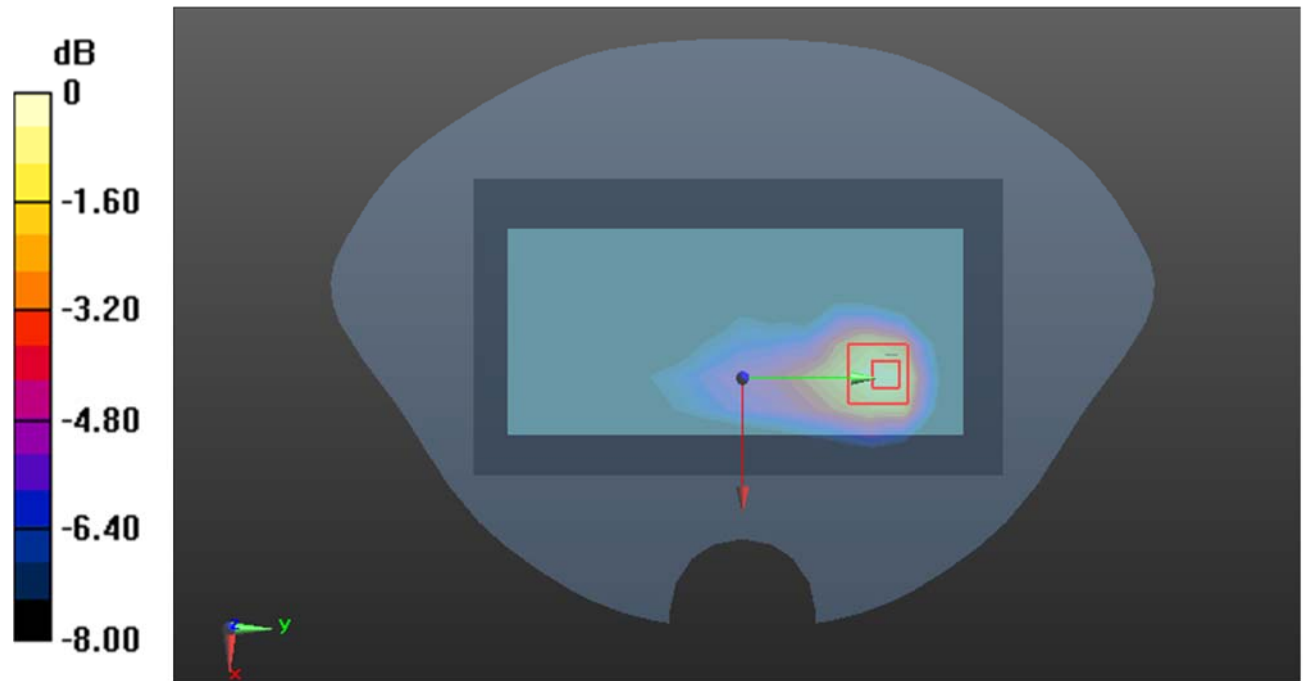

0 dB = 0.347 W/kg = -4.60 dB dBW/kg



**Test Plot167#: LTE Band 41\_Body Left\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.269 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.803 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.281 W/kg

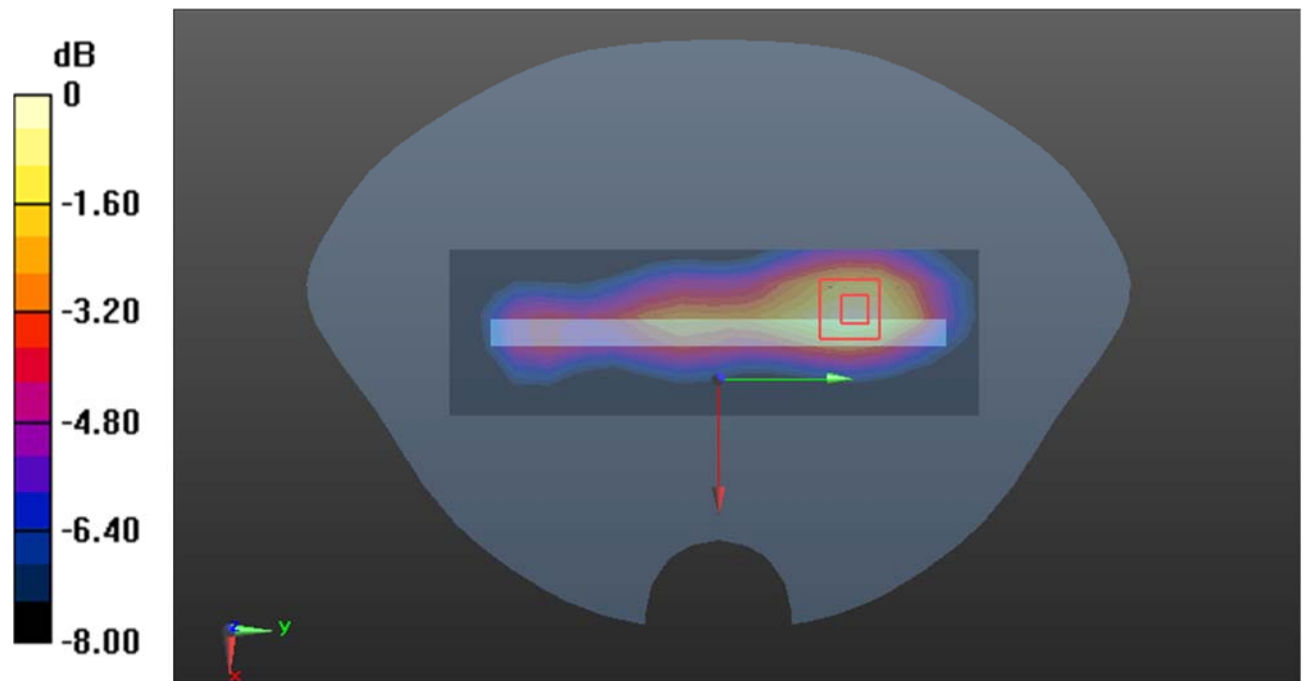

0 dB = 0.281 W/kg = -5.51 dB dBW/kg

**Test Plot168#: LTE Band 41\_Body Left\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.227 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.223 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.244 W/kg

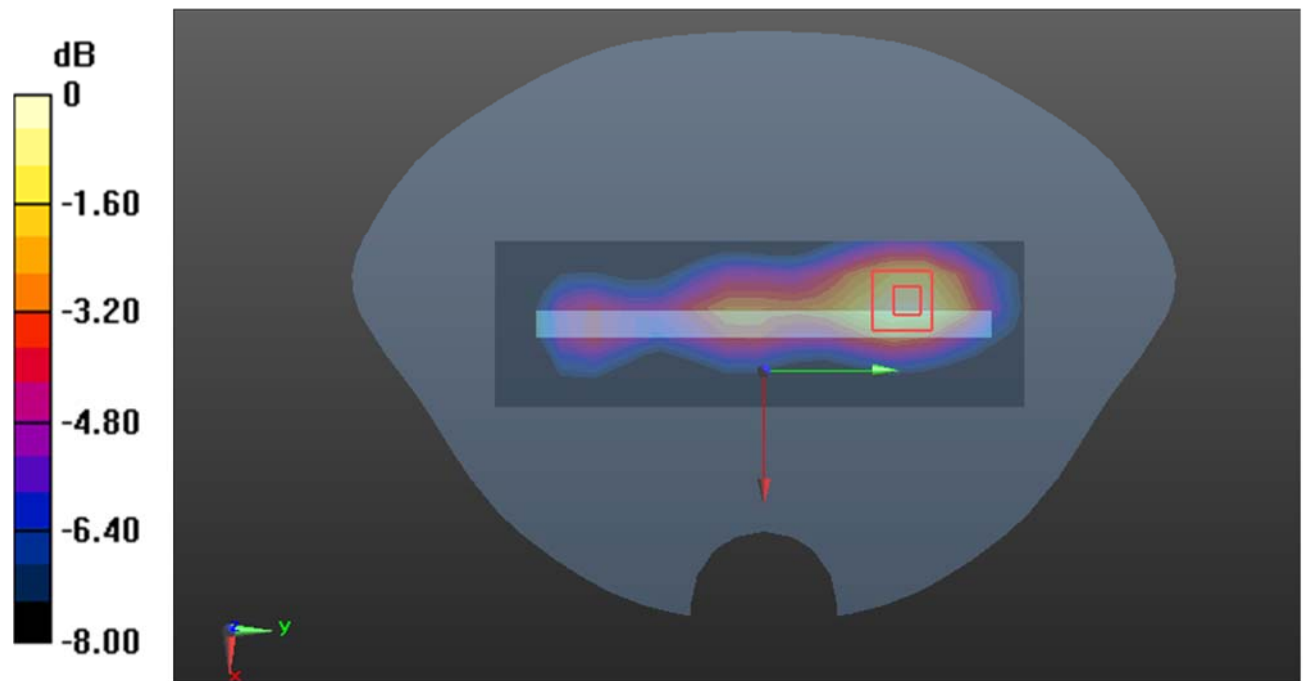

0 dB = 0.244 W/kg = -6.13 dB dBW/kg

**Test Plot169#: LTE Band 41\_Body Right\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.58  
 Medium parameters used:  $f=2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x17x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.321 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.457 W/kg

**SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.309 W/kg

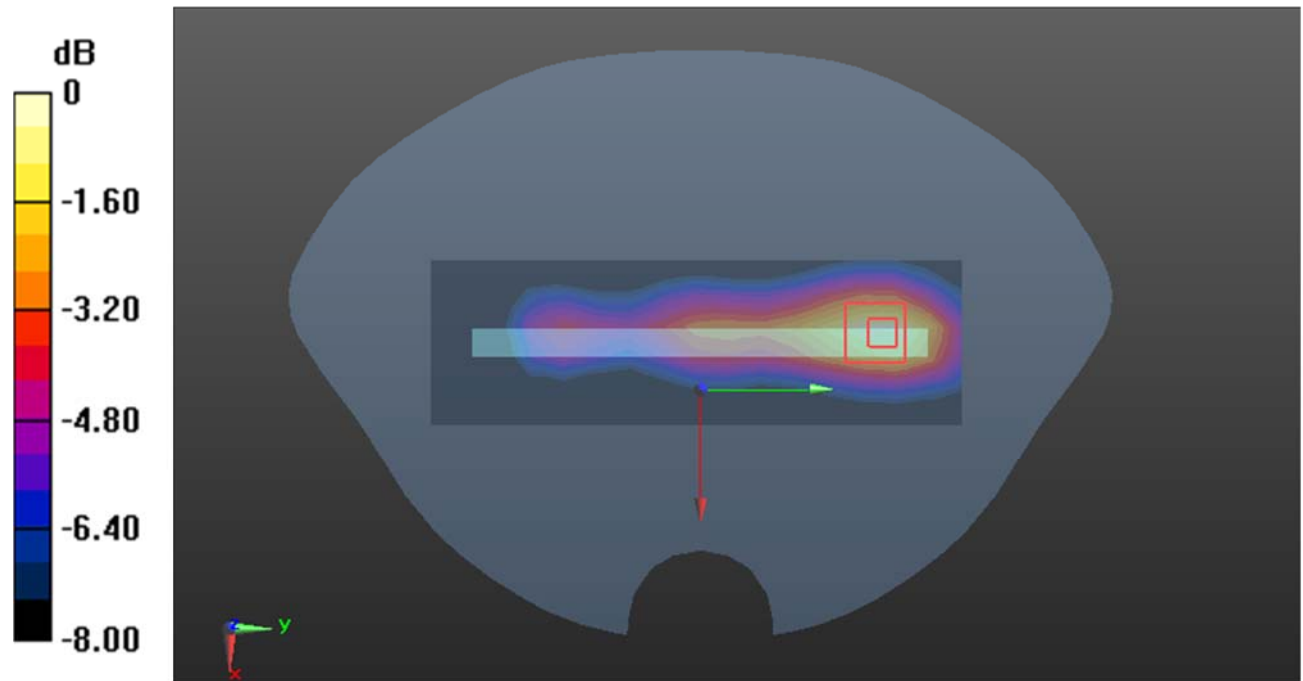

0 dB = 0.309 W/kg = -5.10 dB dBW/kg

**Test Plot170#: LTE Band 41\_Body Right\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.236 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.333 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.370 W/kg

**SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.251 W/kg

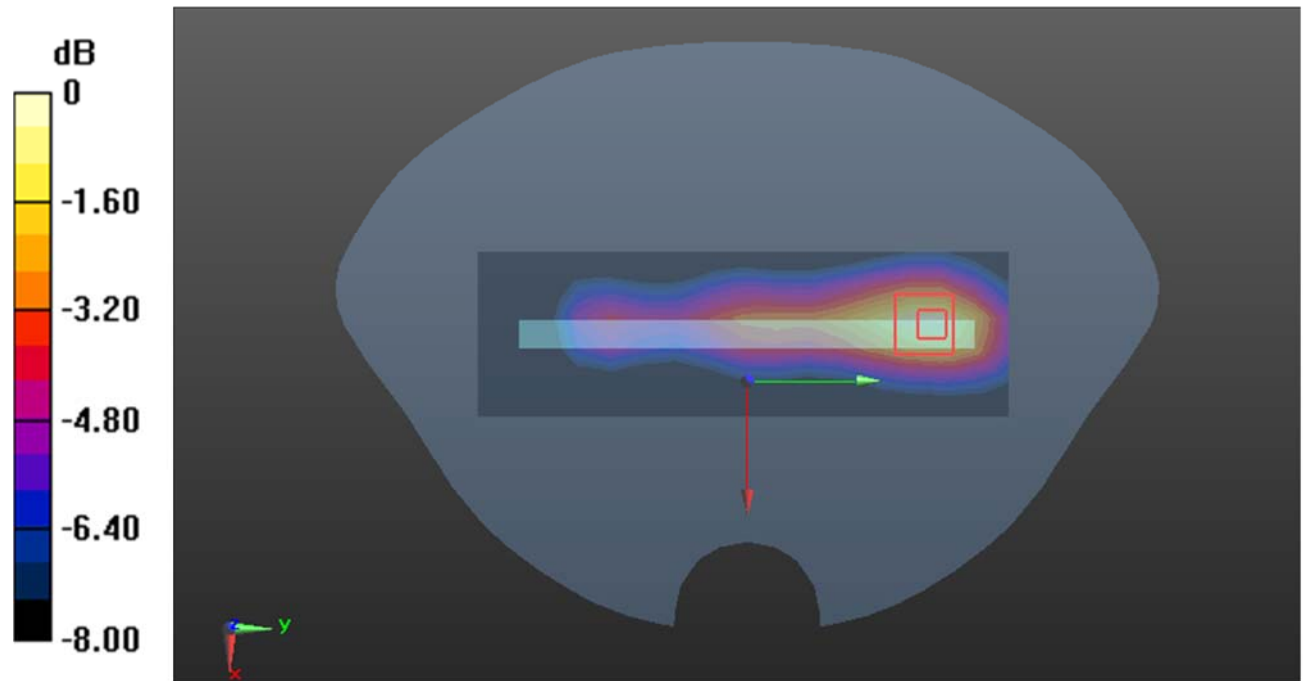

0 dB = 0.251 W/kg = -6.00 dB dBW/kg

**Test Plot171#: LTE Band 41\_Body Top\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.503 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.864 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.894 W/kg

**SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.199 W/kg**

Maximum value of SAR (measured) = 0.575 W/kg

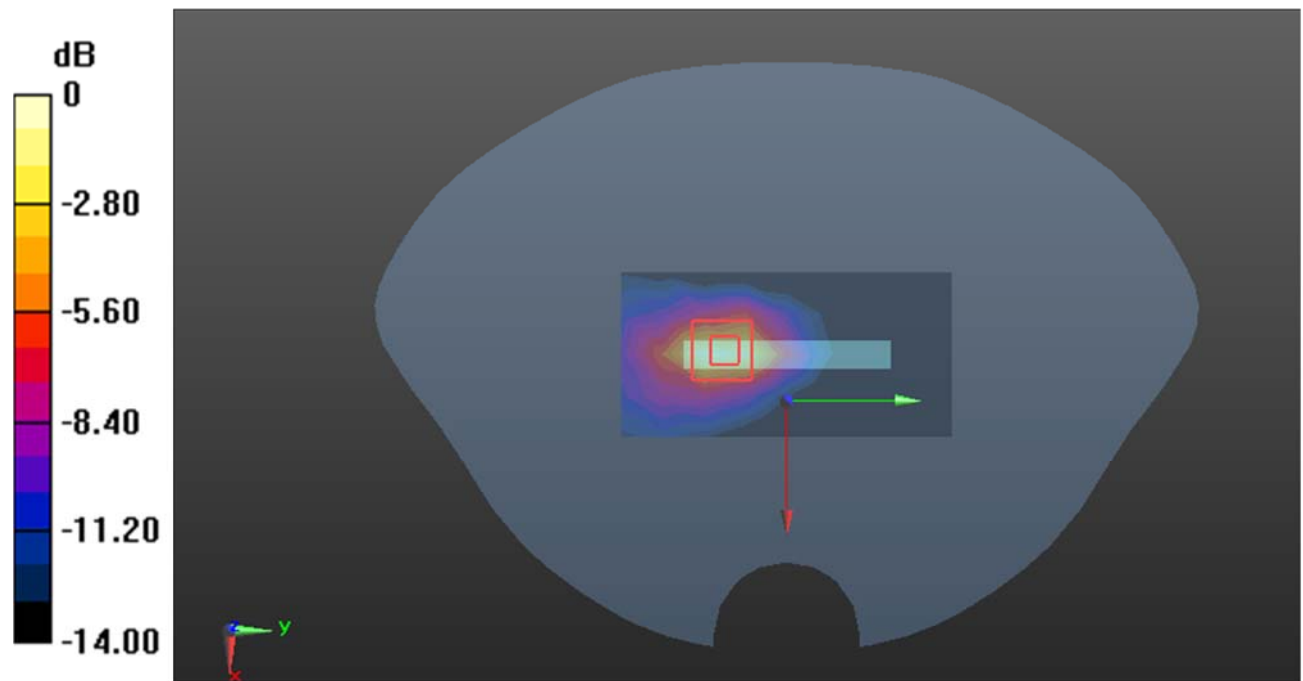

0 dB = 0.575 W/kg = -2.40 dB dBW/kg

**Test Plot172#: LTE Band 41\_Body Top\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.956$  S/m;  $\epsilon_r = 38.886$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @2605 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.393 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.676 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.711 W/kg

**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.449 W/kg

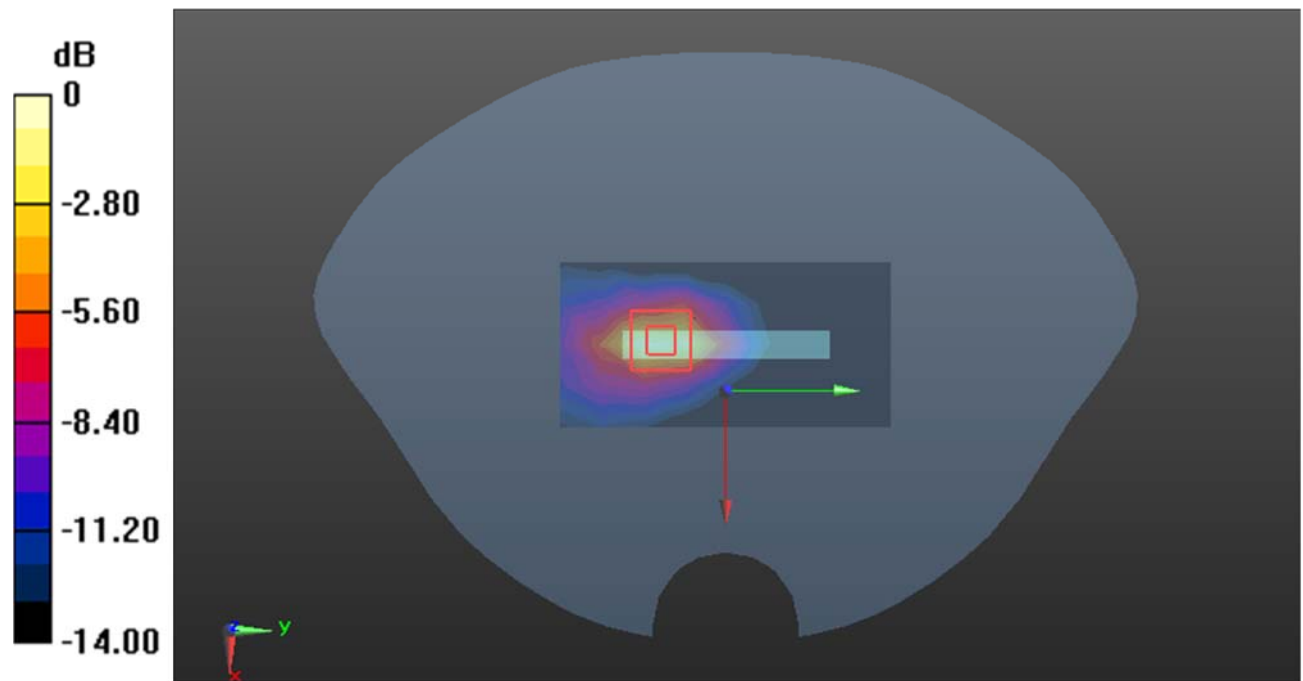

0 dB = 0.449 W/kg = -3.48 dB dBW/kg

**Test Plot173#: LTE Band 66\_Head Left Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.514 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.51 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.732 W/kg

**SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.304 W/kg**

Maximum value of SAR (measured) = 0.564 W/kg

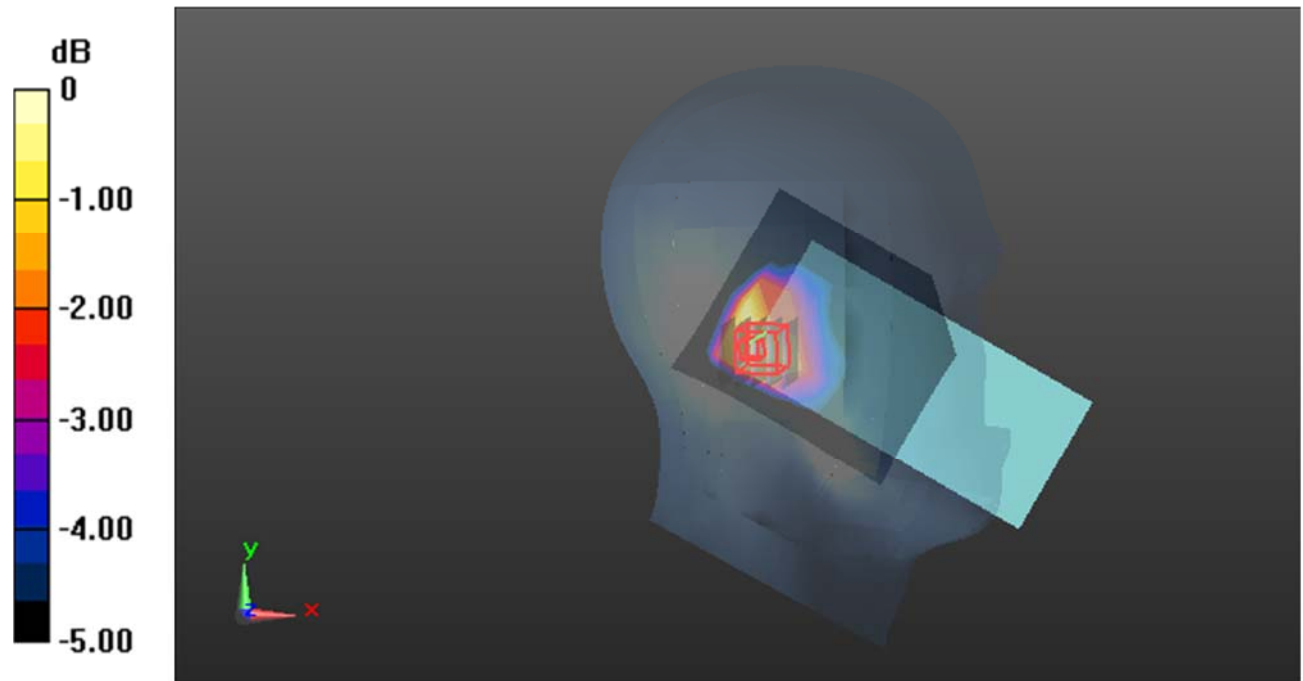

0 dB = 0.564 W/kg = -2.49 dB dBW/kg

**Test Plot174#: LTE Band 66\_Head Left Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.390 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.06 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.561 W/kg

**SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.429 W/kg

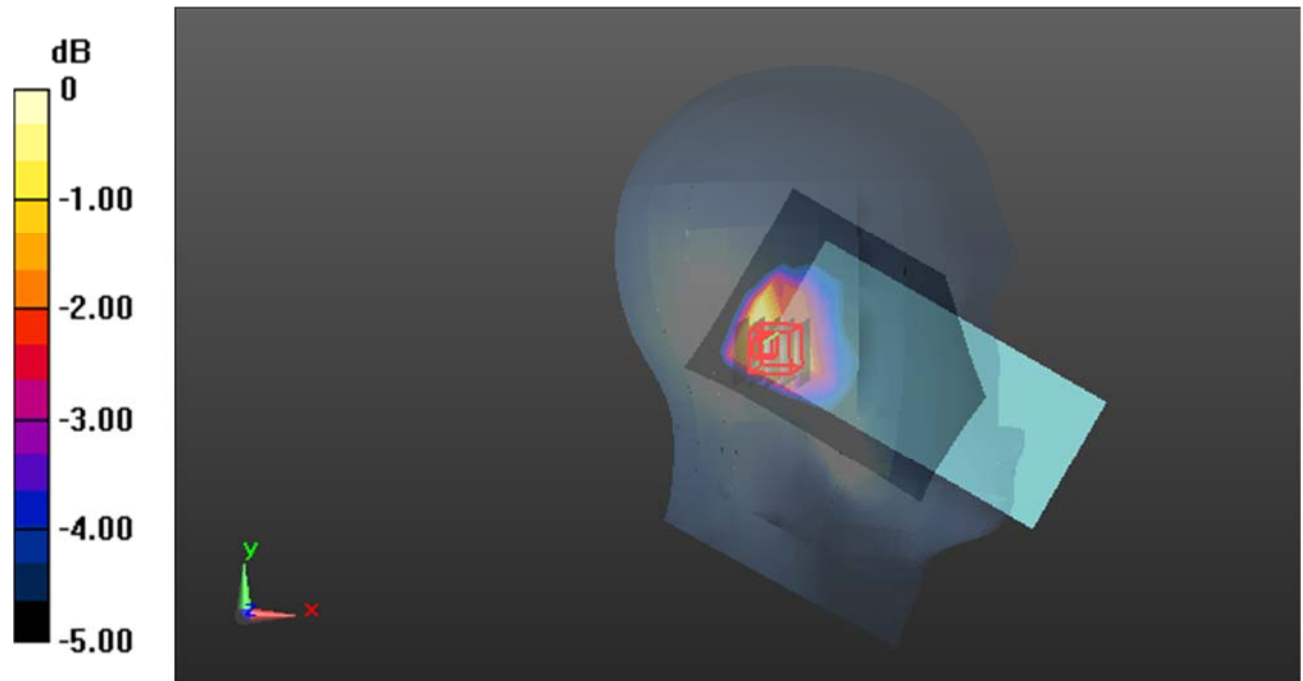

0 dB = 0.429 W/kg = -3.68 dB dBW/kg



**Test Plot175#: LTE Band 66\_Head Left Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.529 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.43 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.795 W/kg

**SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.280 W/kg**

Maximum value of SAR (measured) = 0.589 W/kg

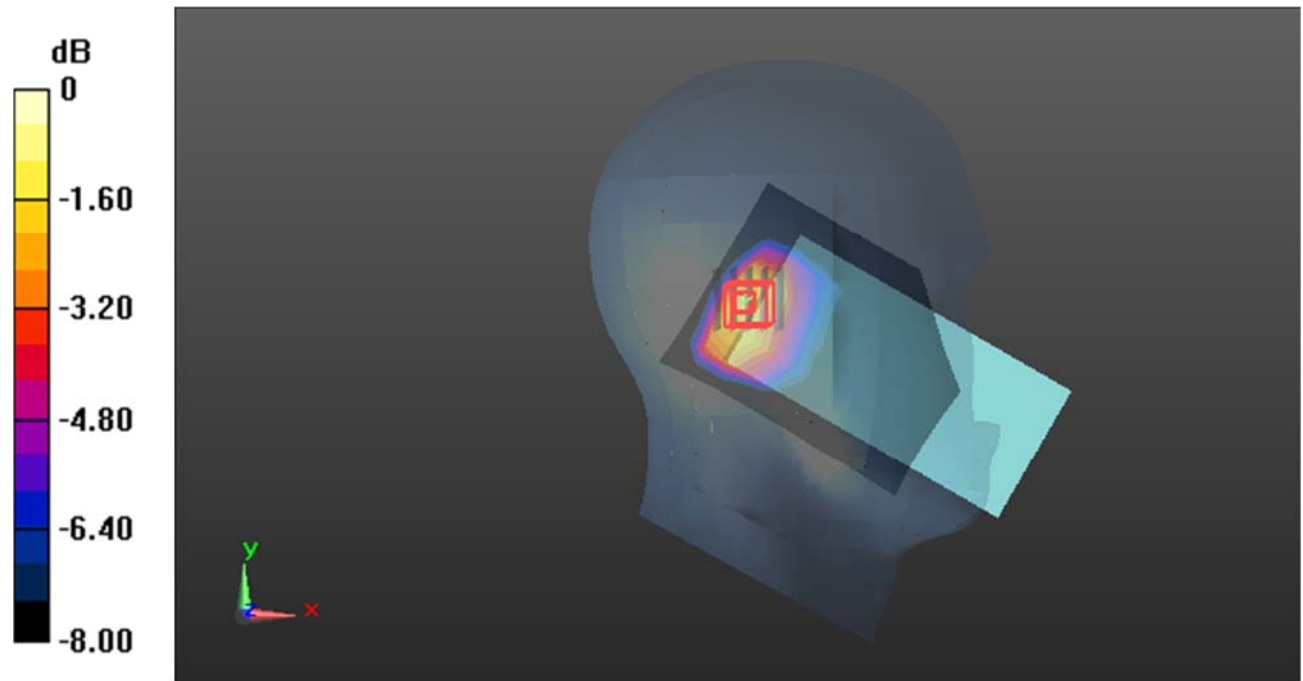

0 dB = 0.589 W/kg = -2.30 dB dBW/kg

**Test Plot176#: LTE Band 66\_Head Left Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.381 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.88 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.623 W/kg

**SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.210 W/kg**

Maximum value of SAR (measured) = 0.452 W/kg

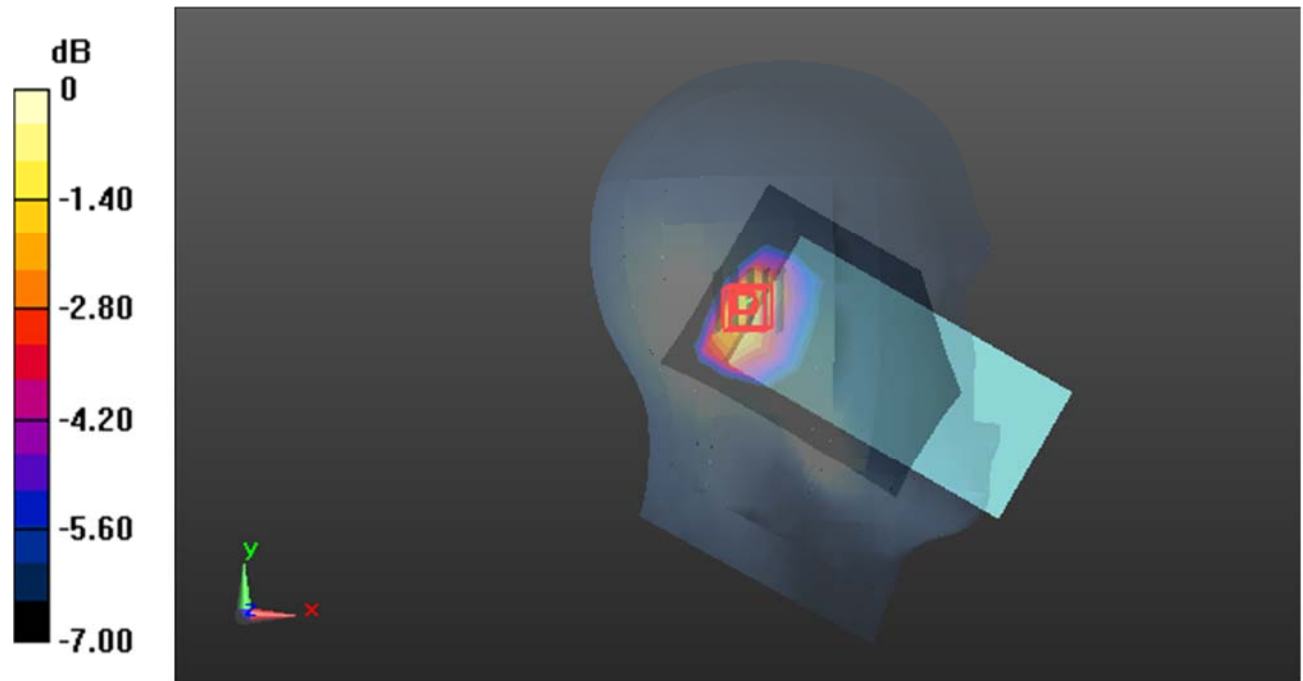

**Test Plot177#: LTE Band 66\_Head Right Cheek\_1RB\_Low****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1720$  MHz;  $\sigma = 1.312$  S/m;  $\epsilon_r = 40.649$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1720 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.33 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.00 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.640 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

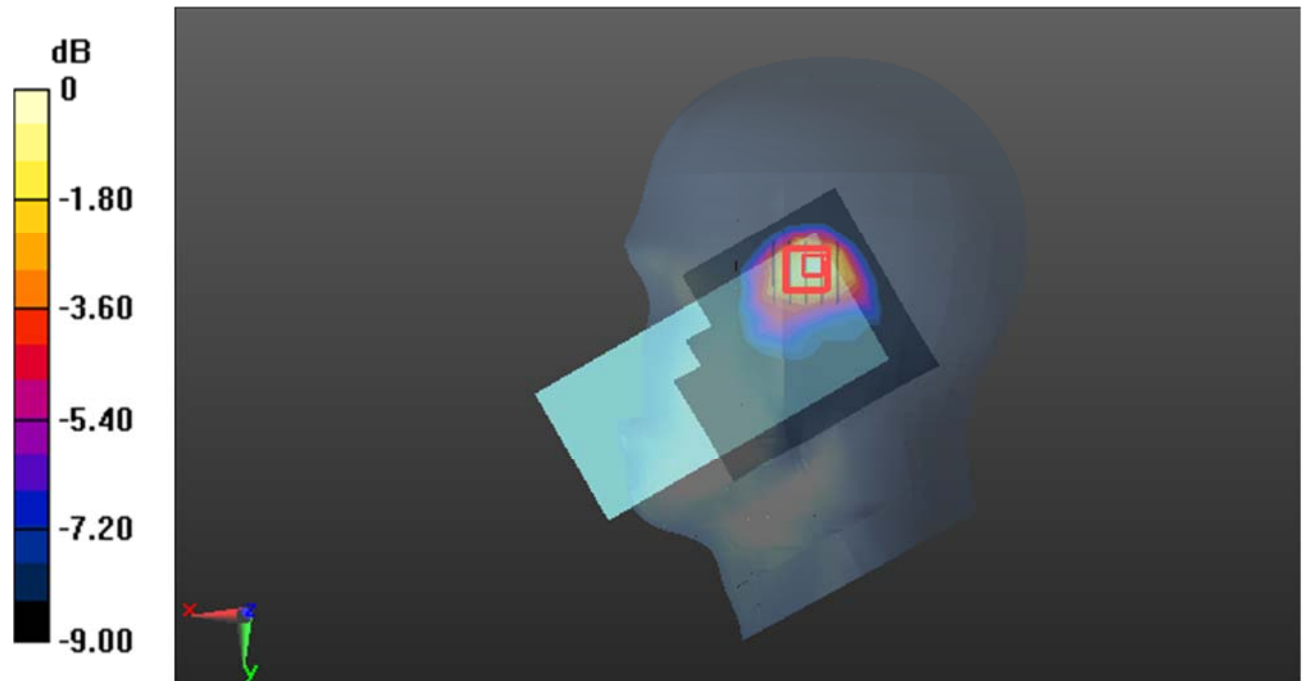

0 dB = 1.28 W/kg = 1.07 dB dBW/kg

**Test Plot178#: LTE Band 66\_Head Right Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.00 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.600 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

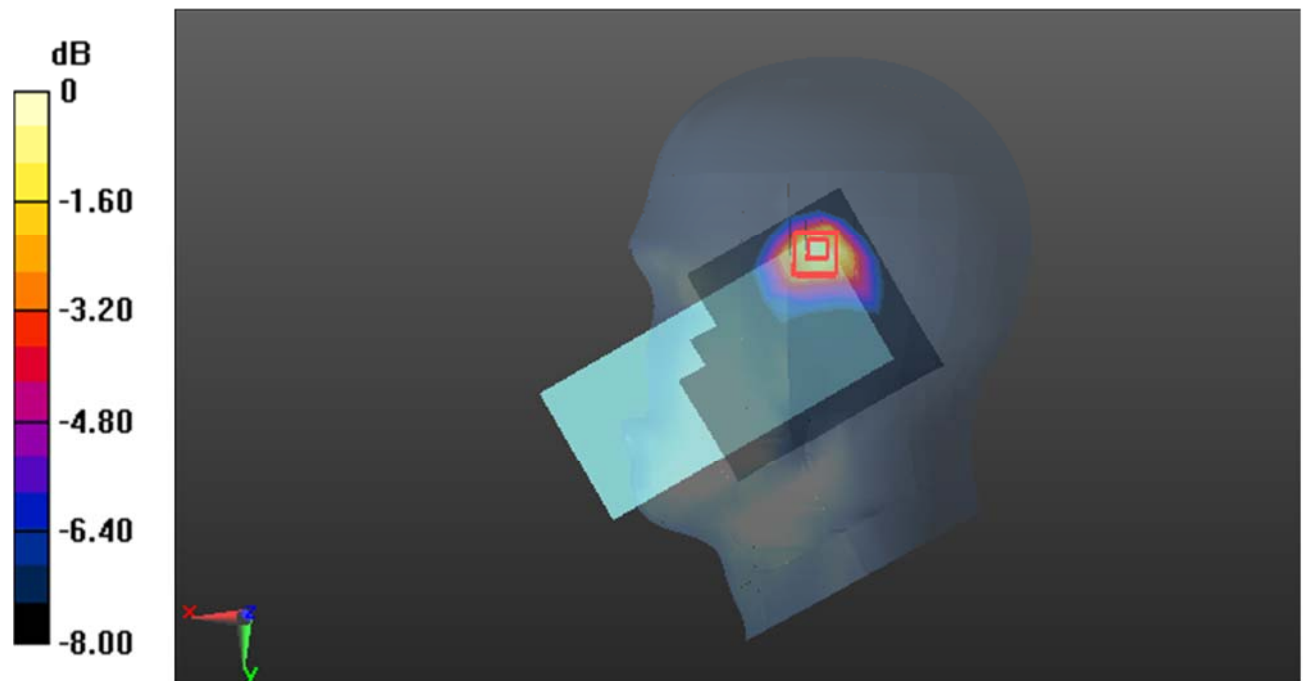

0 dB = 1.31 W/kg = 1.17 dB dBW/kg

**Test Plot179#: LTE Band 66\_Head Right Cheek\_1RB\_High****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=1770$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 40.318$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1770 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.40 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.645 W/kg**

Maximum value of SAR (measured) = 1.37 W/kg

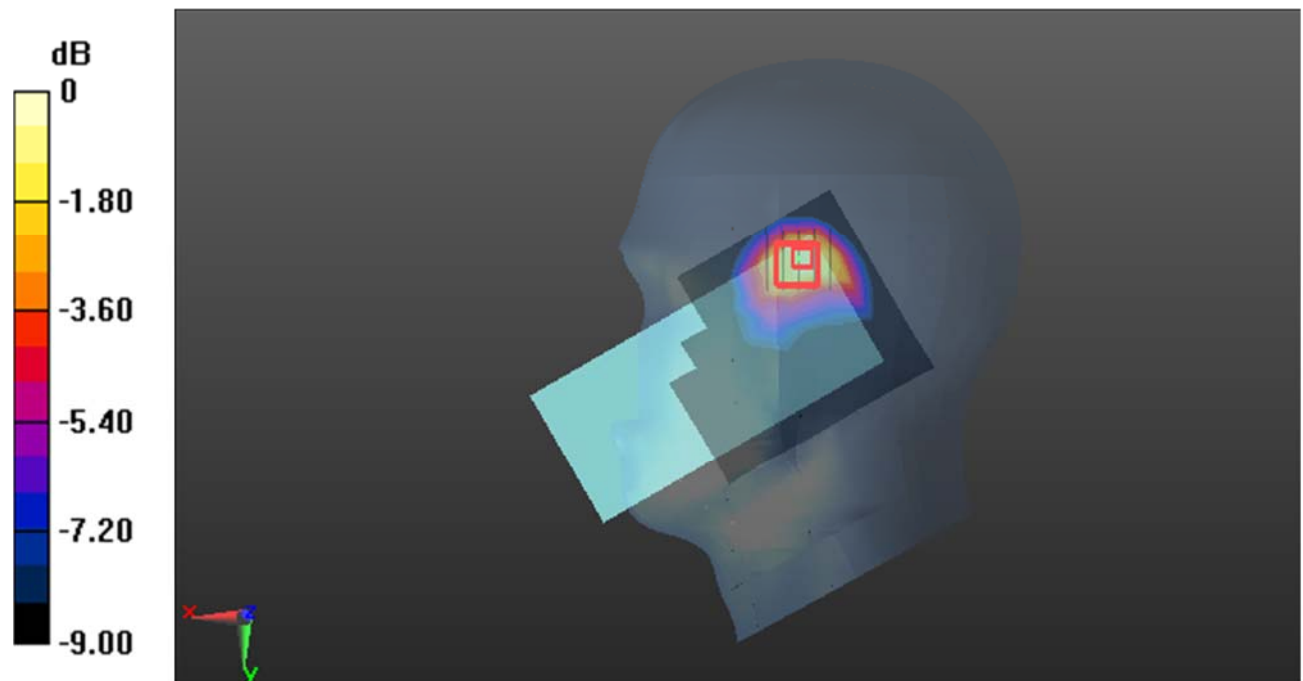

**Test Plot180#: LTE Band 66\_Head Right Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.860 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.57 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.412 W/kg**

Maximum value of SAR (measured) = 0.843 W/kg

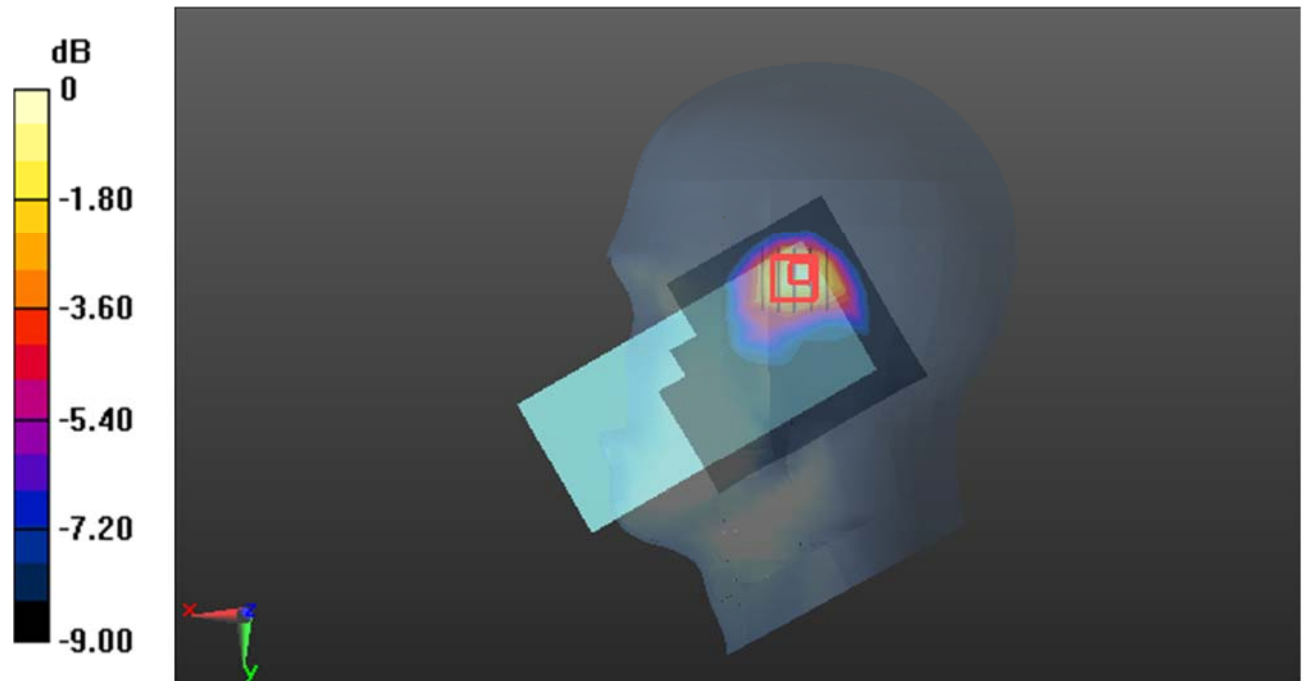

0 dB = 0.843 W/kg = -0.74 dB dBW/kg

**Test Plot181#: LTE Band 66\_Head Right Cheek\_100%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.916 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.95 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.434 W/kg**

Maximum value of SAR (measured) = 0.884 W/kg

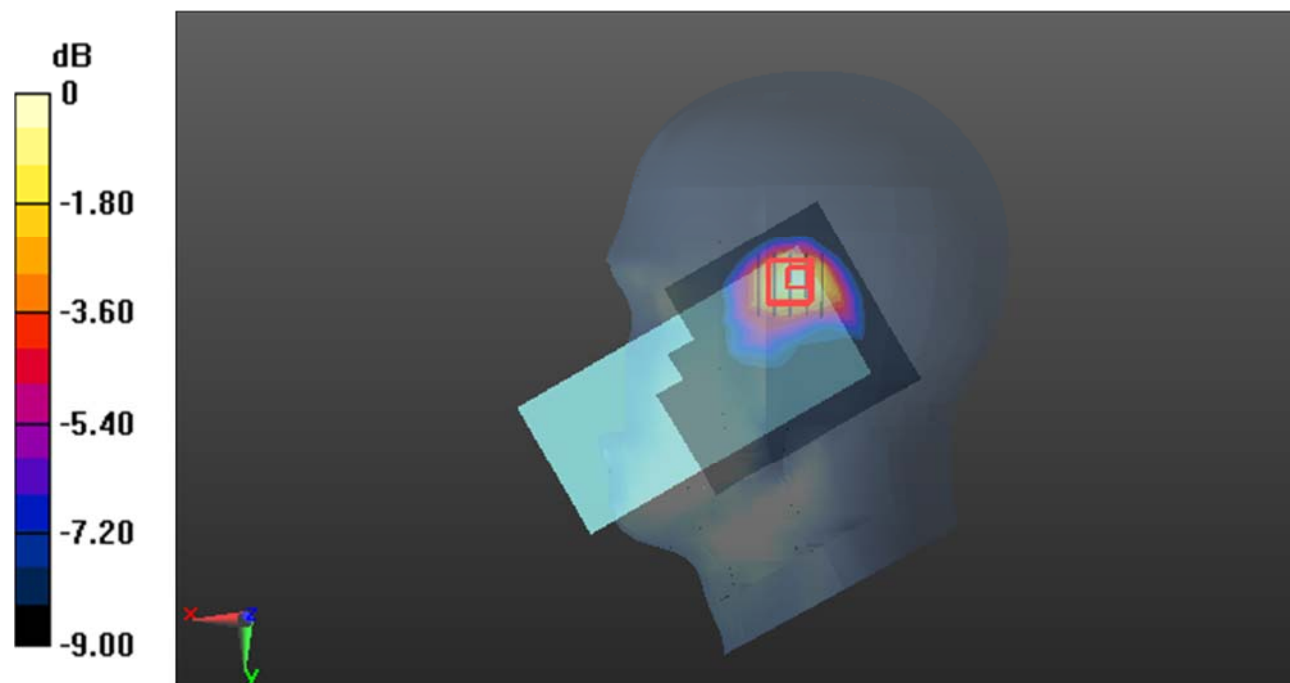

0 dB = 0.884 W/kg = -0.54 dB dBW/kg

**Test Plot182#: LTE Band 66\_Head Right Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.867 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.703 W/kg; SAR(10 g) = 0.385 W/kg**

Maximum value of SAR (measured) = 0.859 W/kg

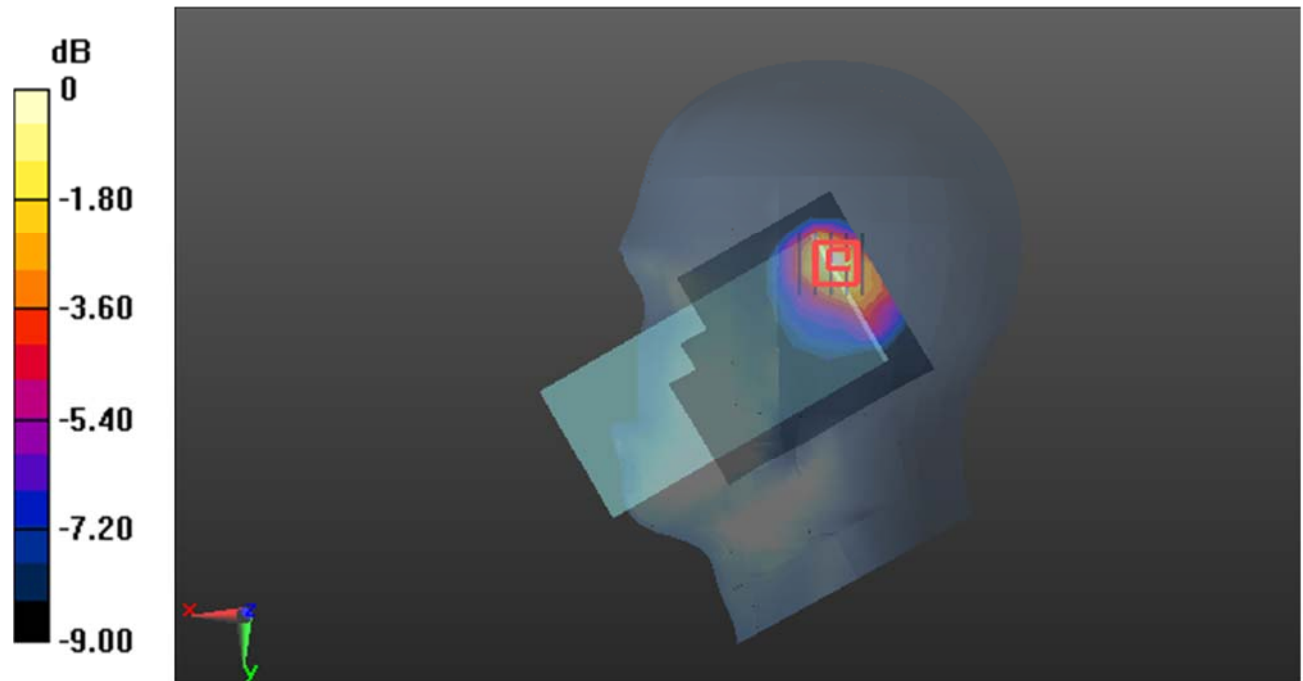

0 dB = 0.859 W/kg = -0.66 dB dBW/kg



**Test Plot183#: LTE Band 66\_Head Right Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.658 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.84 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.999 W/kg

**SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.284 W/kg**

Maximum value of SAR (measured) = 0.642 W/kg

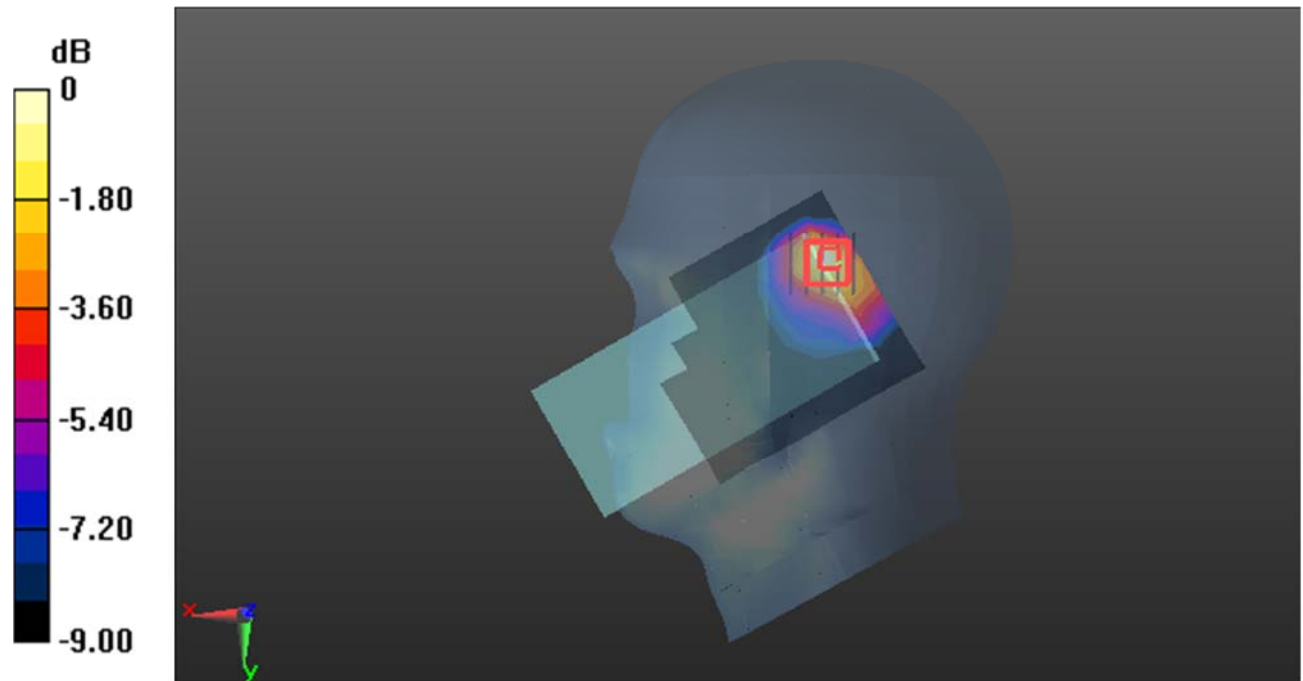

0 dB = 0.642 W/kg = -1.92 dB dBW/kg

**Test Plot184#: LTE Band 66\_Body Front\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.730 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.150 W/kg**

Maximum value of SAR (measured) = 0.296 W/kg

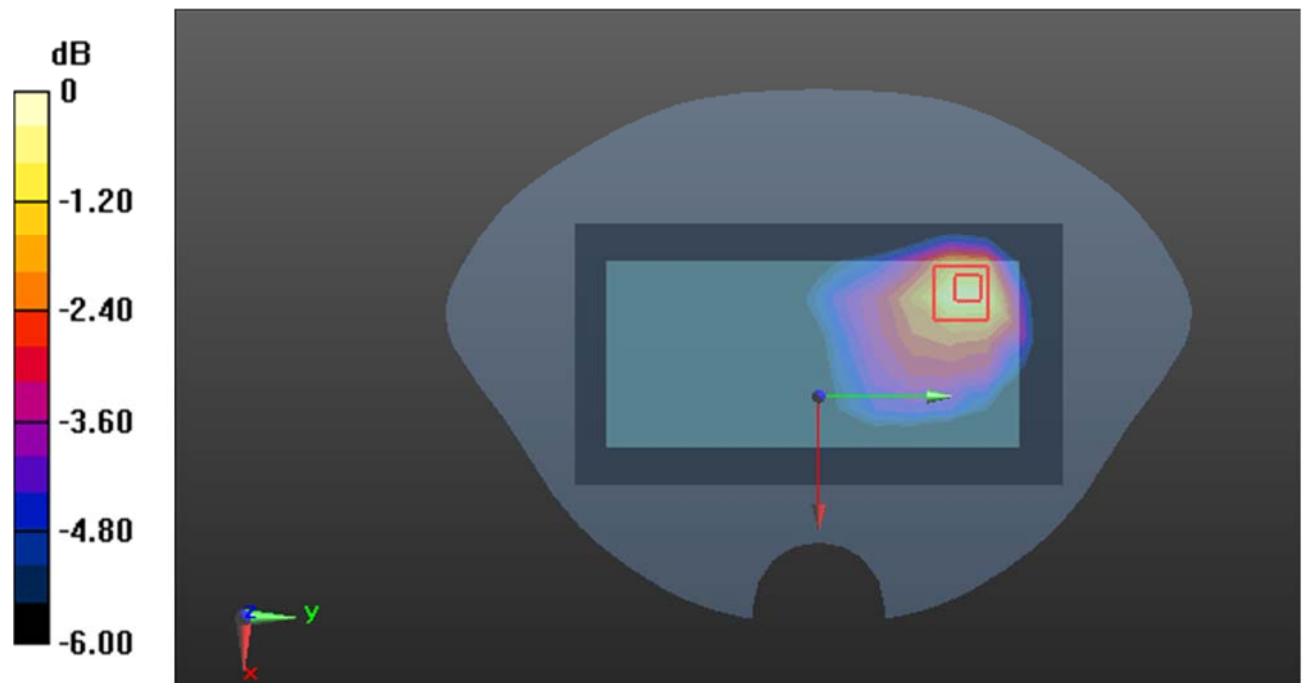

**Test Plot185#: LTE Band 66\_Body Front\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.605 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.219 W/kg

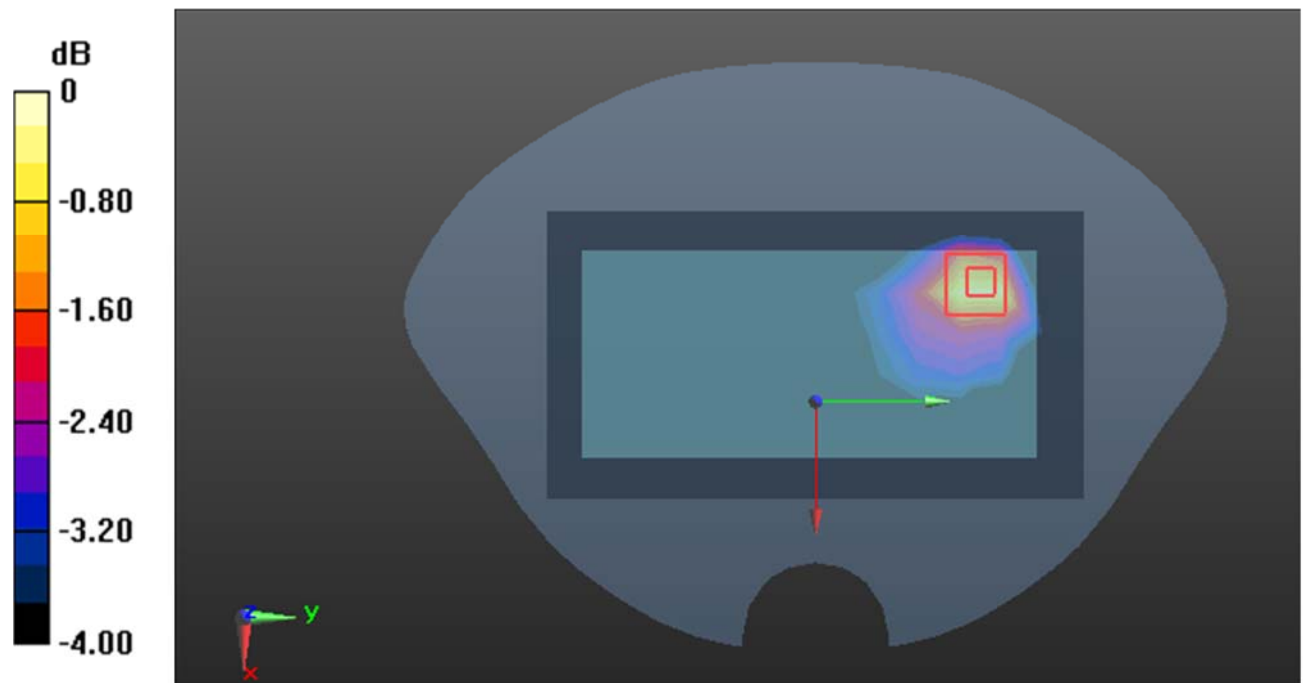

0 dB = 0.219 W/kg = -6.60 dB dBW/kg

**Test Plot186#: LTE Band 66\_Body Back\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 W/kg


**Zoom Scan (6x6x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.186 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.519 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.355 W/kg

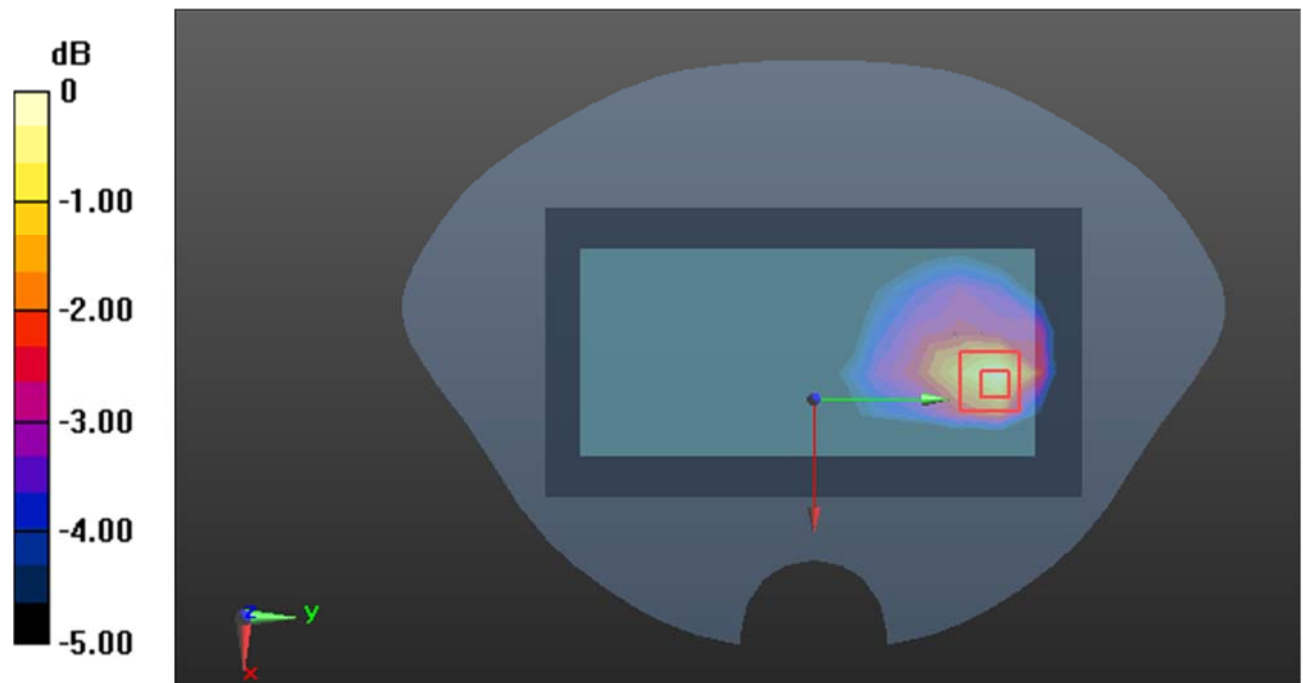

0 dB = 0.355 W/kg = -4.50 dB dBW/kg

**Test Plot187#: LTE Band 66\_Body Back\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.179 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.405 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.277 W/kg

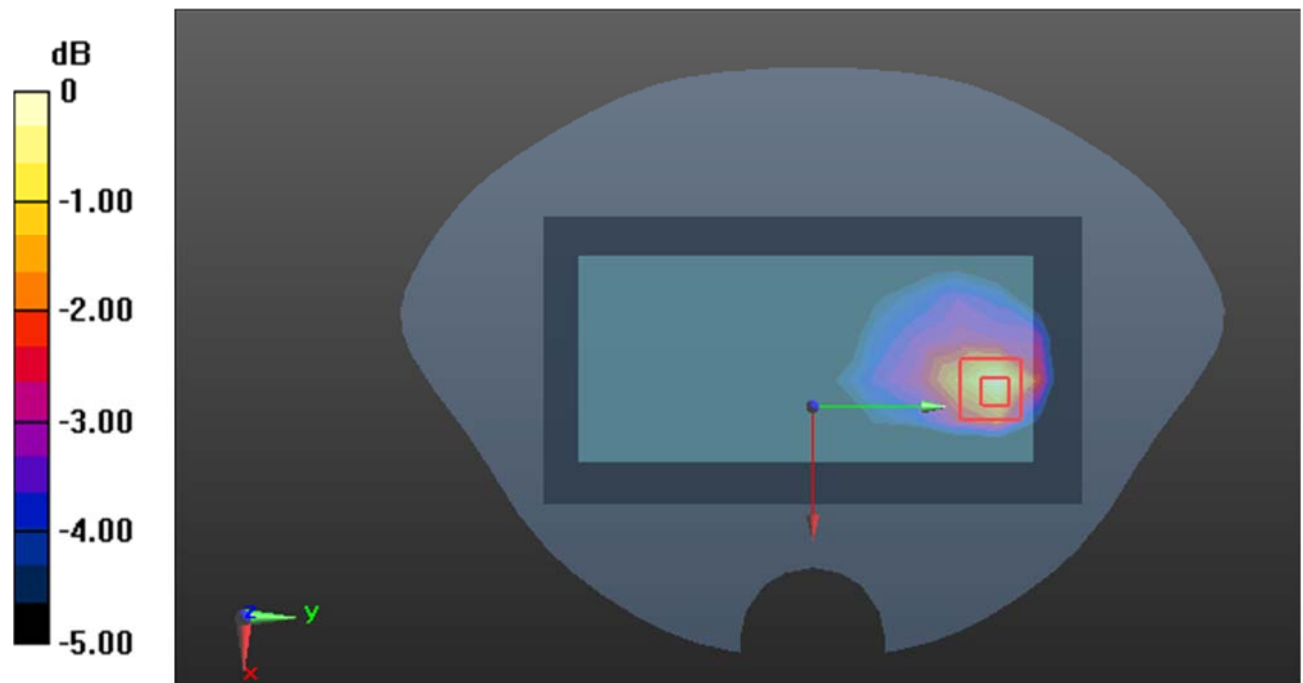

0 dB = 0.277 W/kg = -5.58 dB dBW/kg

**Test Plot188#: LTE Band 66\_Body Left\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.172 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.727 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.246 W/kg

**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.179 W/kg

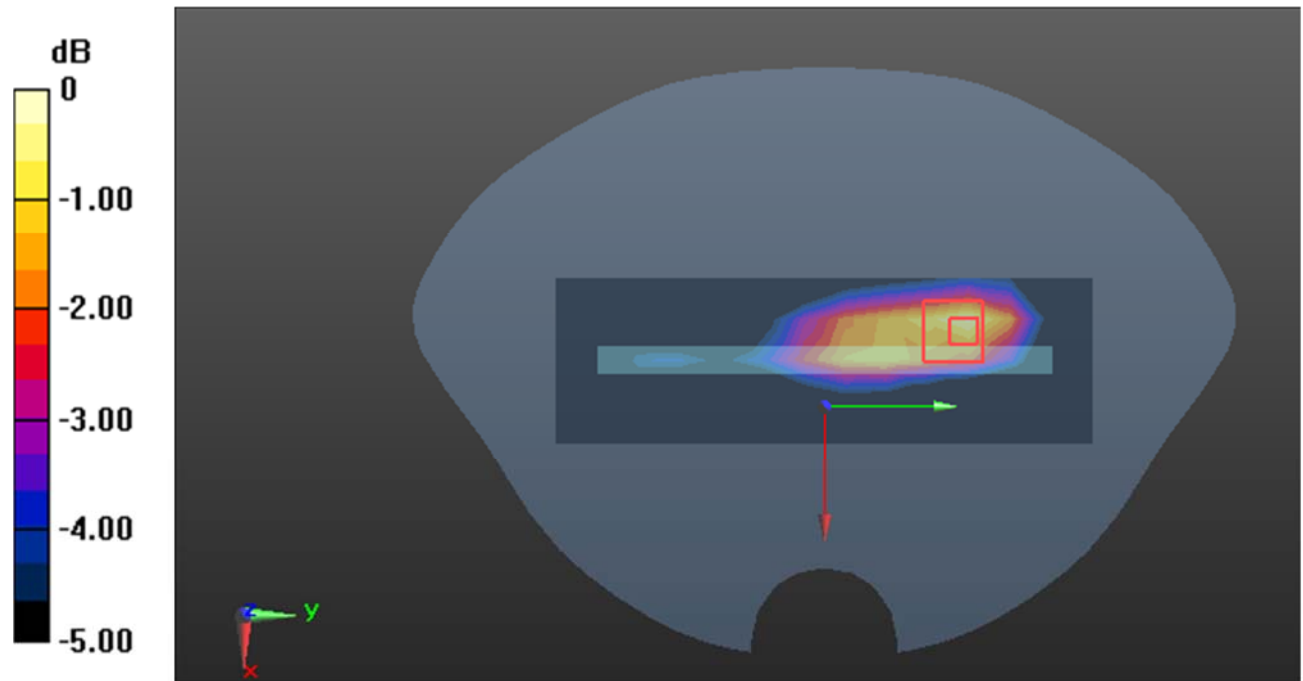

0 dB = 0.179 W/kg = -7.47 dB dBW/kg

**Test Plot189#: LTE Band 66\_Body Left\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.133 W/kg


**Zoom Scan (5x6x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.742 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.196 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

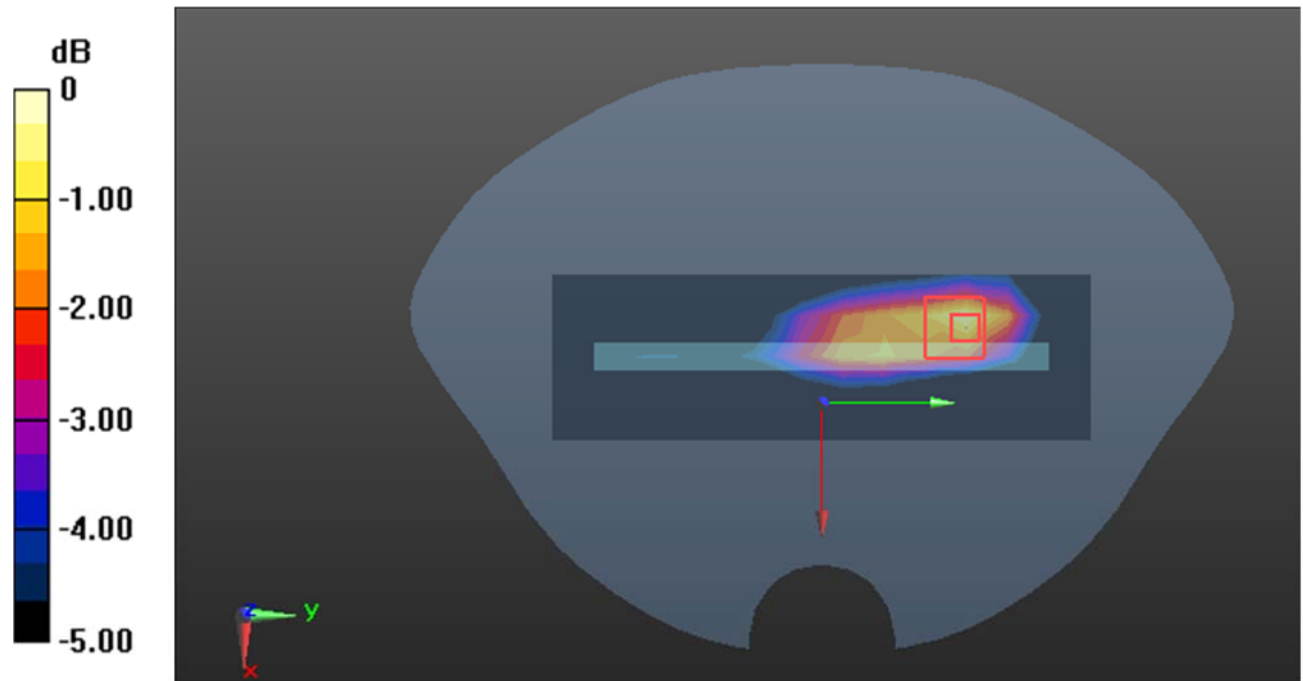

0 dB = 0.141 W/kg = -8.51 dB dBW/kg

**Test Plot190#: LTE Band 66\_Body Top\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.286 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.26 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.407 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.124 W/kg**

Maximum value of SAR (measured) = 0.287 W/kg

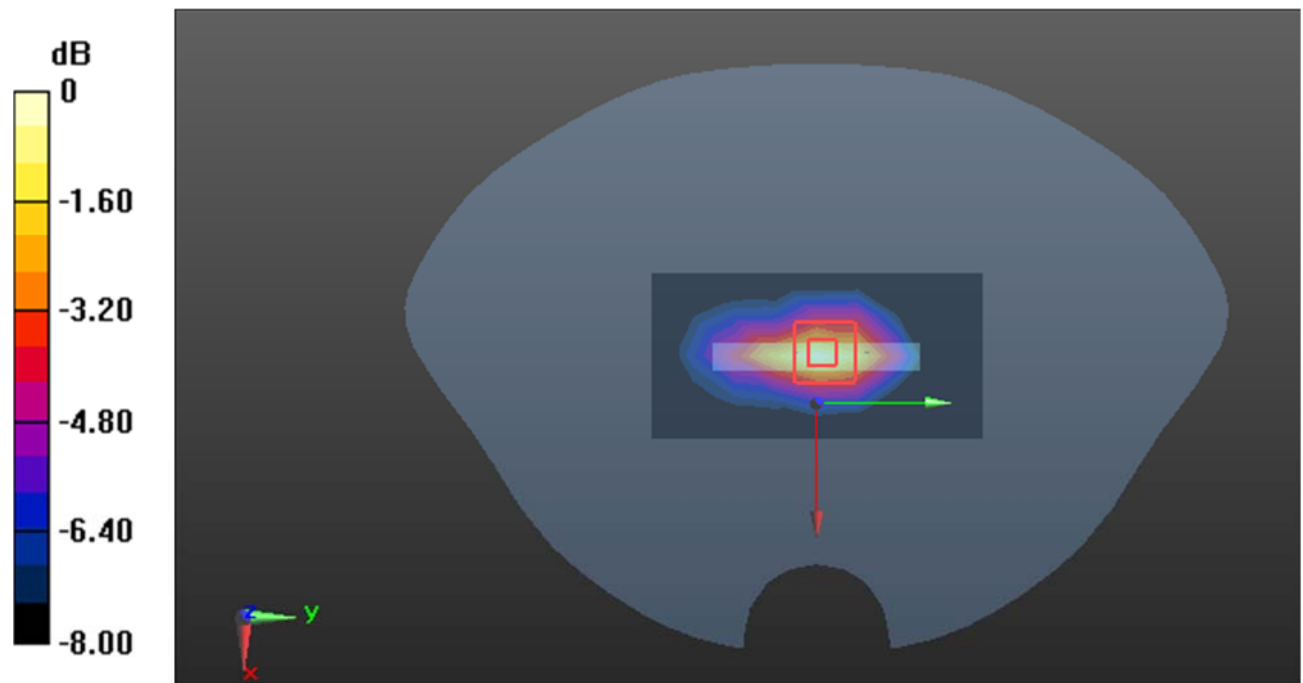

0 dB = 0.287 W/kg = -5.42 dB dBW/kg



**Test Plot191#: LTE Band 66\_Body Top\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.323$  S/m;  $\epsilon_r = 40.567$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @1745 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.210 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.293 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

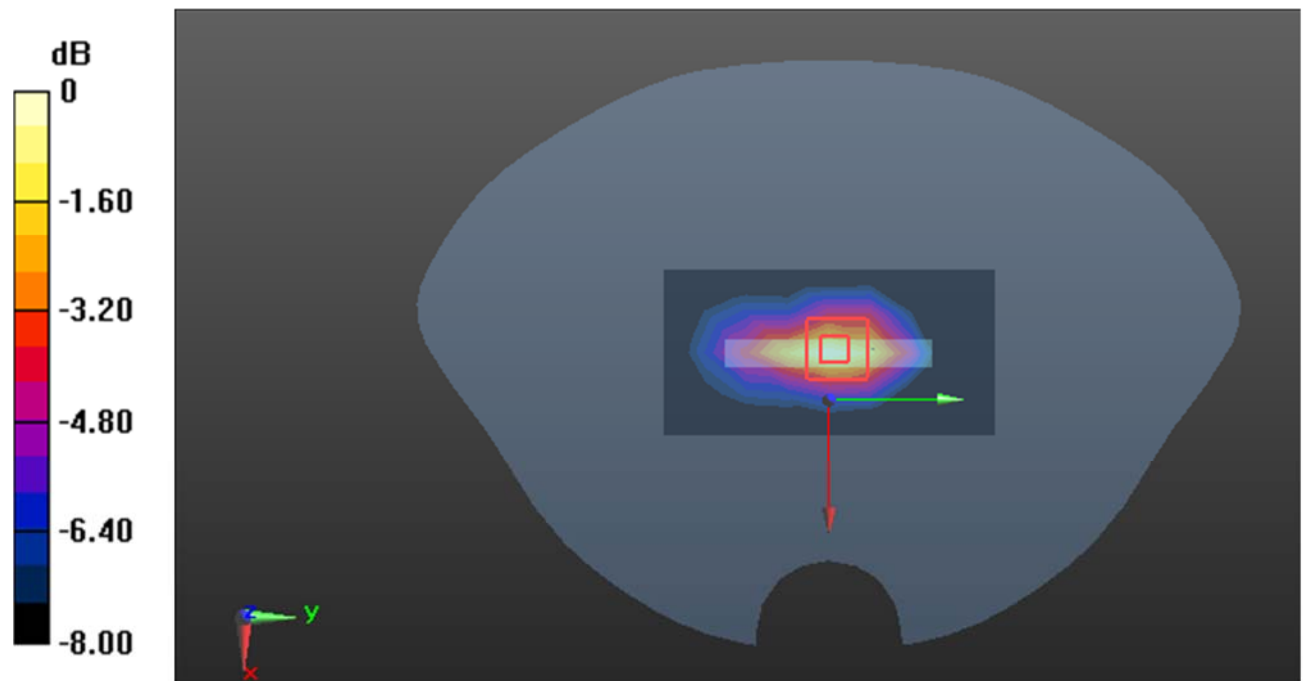

0 dB = 0.205 W/kg = -6.88 dB dBW/kg

**Test Plot192#: LTE Band 71\_Head Left Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0280 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.280 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0277 W/kg

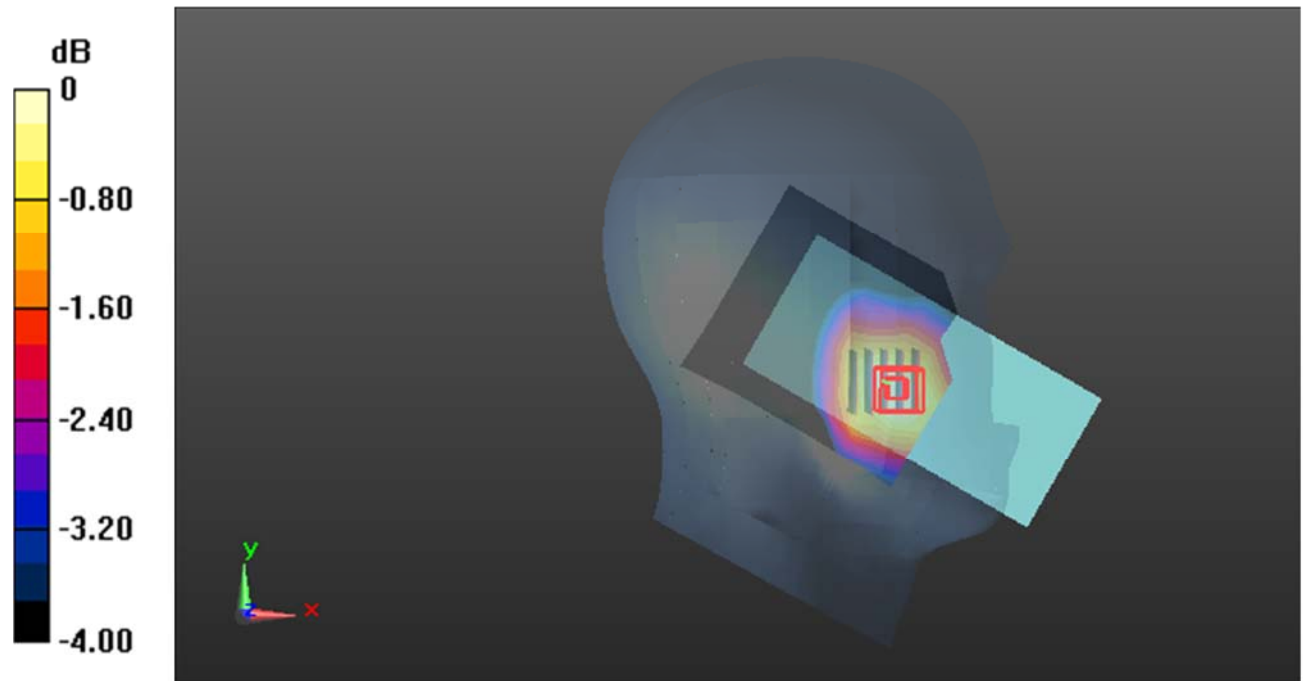

0 dB = 0.0277 W/kg = -15.58 dB dBW/kg

**Test Plot193#: LTE Band 71\_Head Left Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0256 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.509 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0260 W/kg

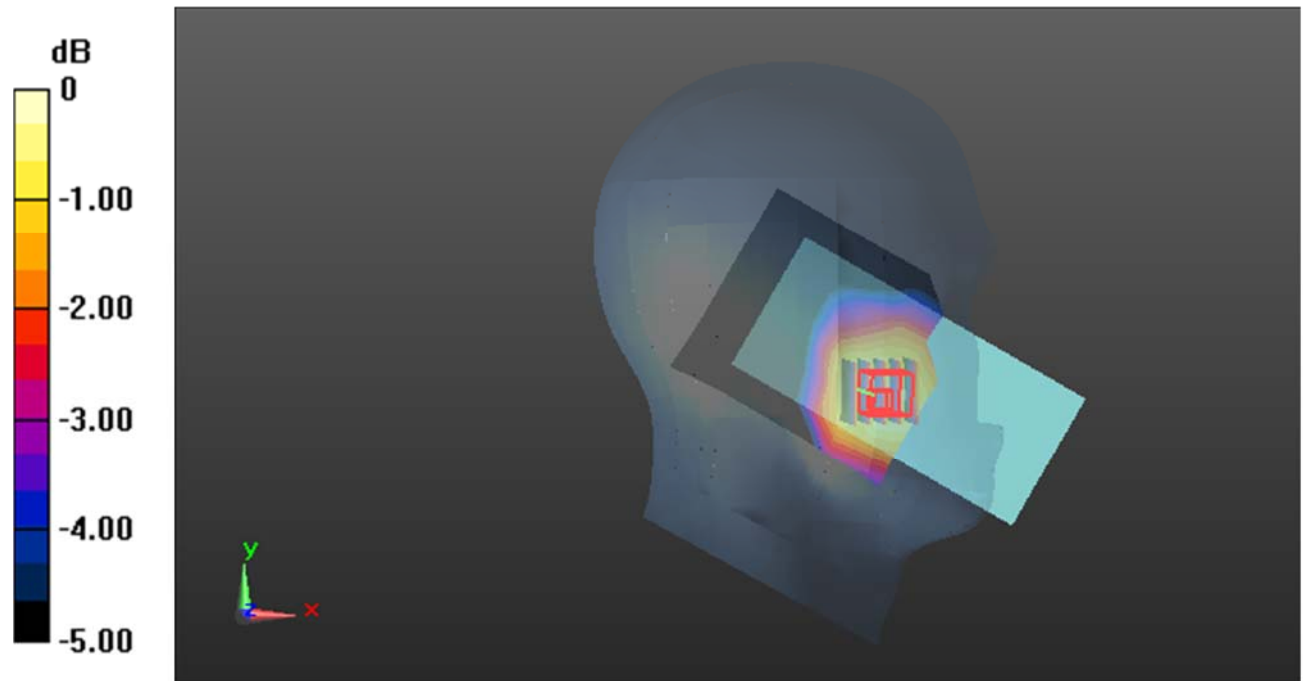

0 dB = 0.0260 W/kg = -15.85 dB dBW/kg

**Test Plot194#: LTE Band 71\_Head Left Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0182 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.912 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0240 W/kg

**SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0189 W/kg

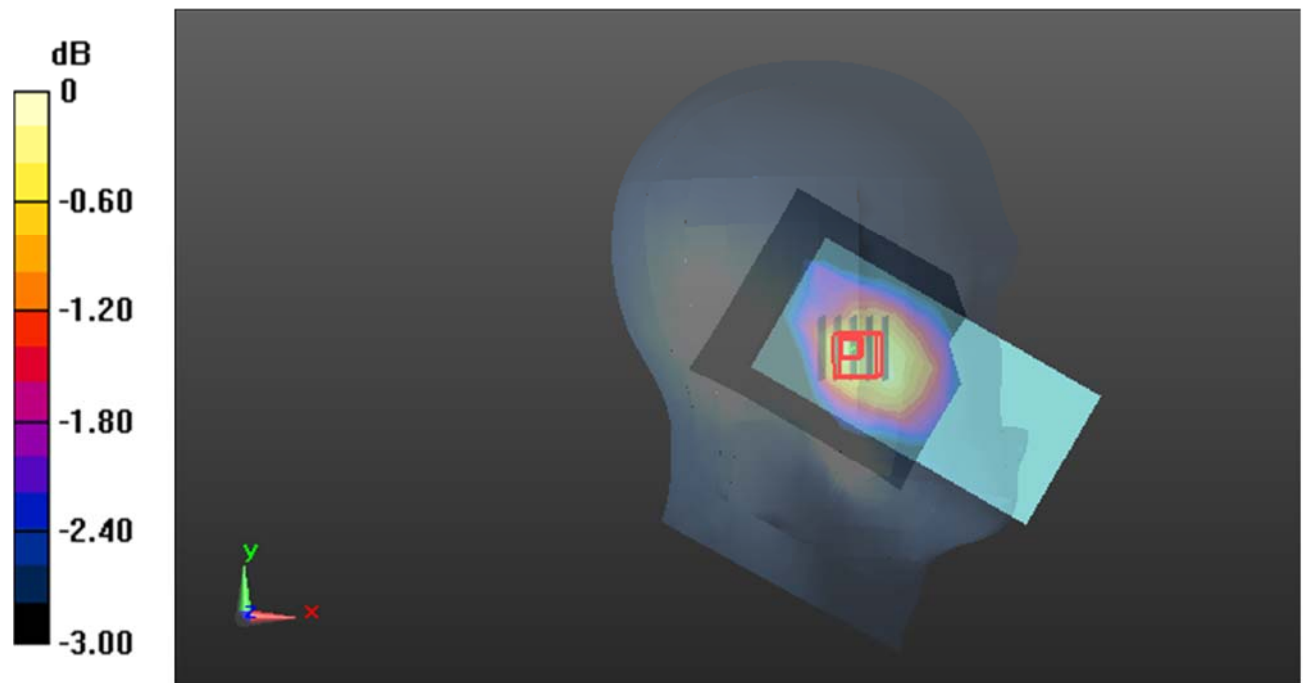

0 dB = 0.0189 W/kg = -17.24 dB dBW/kg

**Test Plot195#: LTE Band 71\_Head Left Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0152 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.443 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0190 W/kg

**SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.010 W/kg**

Maximum value of SAR (measured) = 0.0153 W/kg

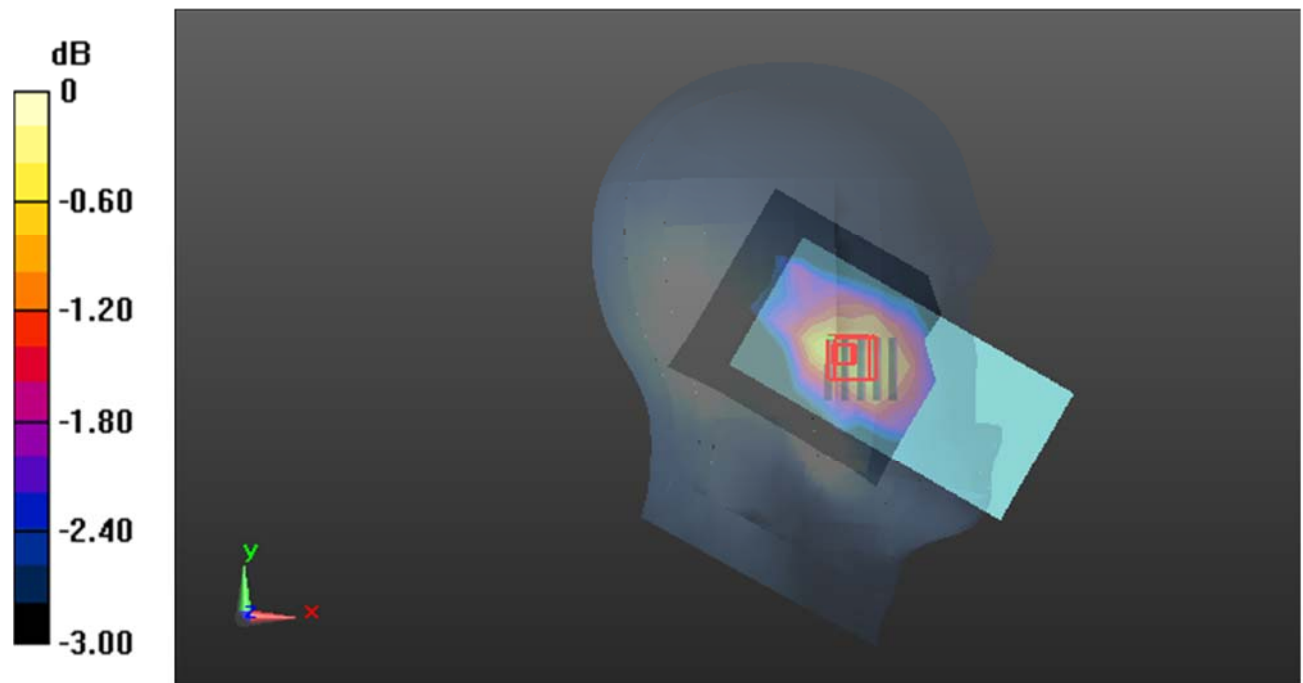

0 dB = 0.0153 W/kg = -18.15 dB dBW/kg

**Test Plot196#: LTE Band 71\_Head Right Cheek\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0361 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.169 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0420 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0358 W/kg

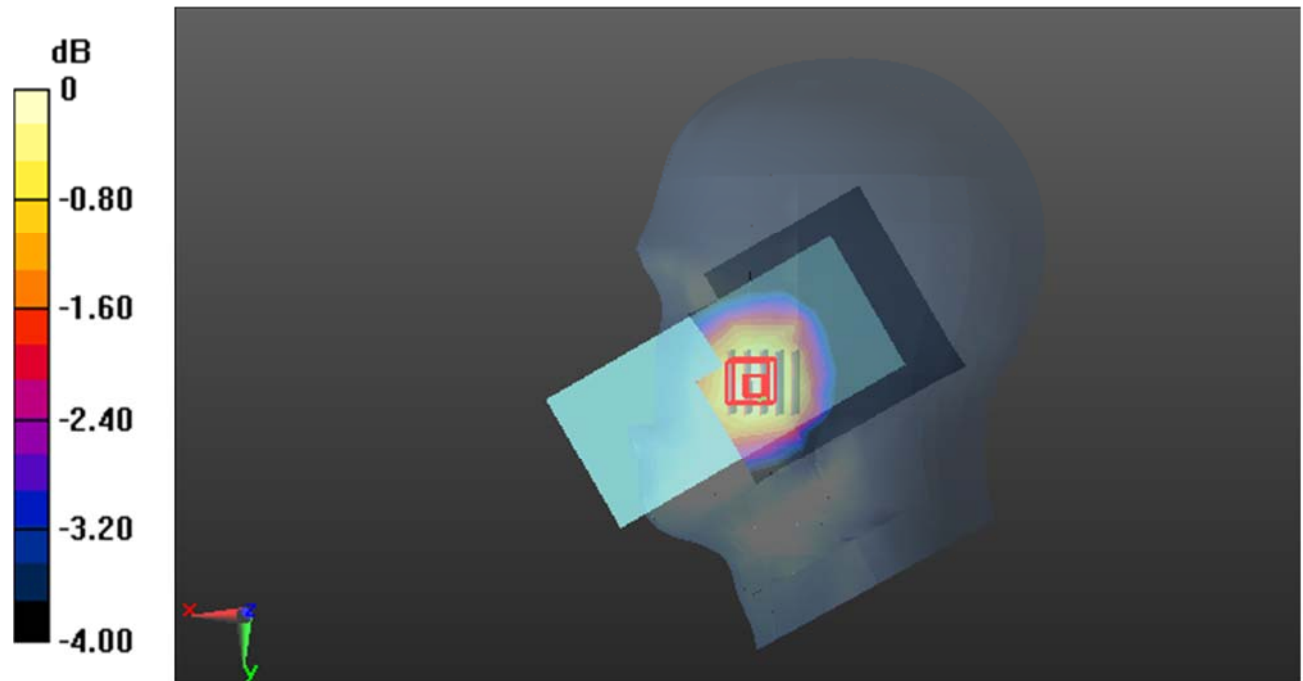

0 dB = 0.0358 W/kg = -14.46 dB dBW/kg

**Test Plot197#: LTE Band 71\_Head Right Cheek\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0295 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.042 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0295 W/kg

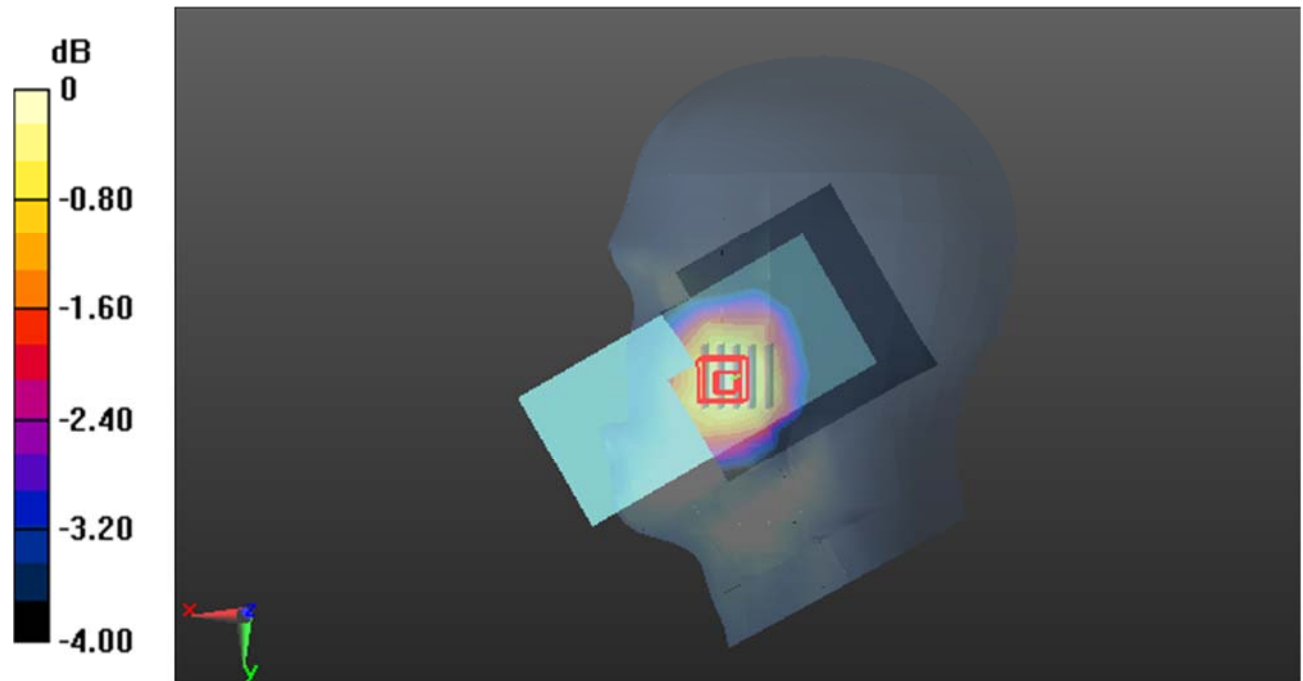

0 dB = 0.0295 W/kg = -15.30 dB dBW/kg

**Test Plot198#: LTE Band 71\_Head Right Tilt\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0204 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.883 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0240 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0206 W/kg

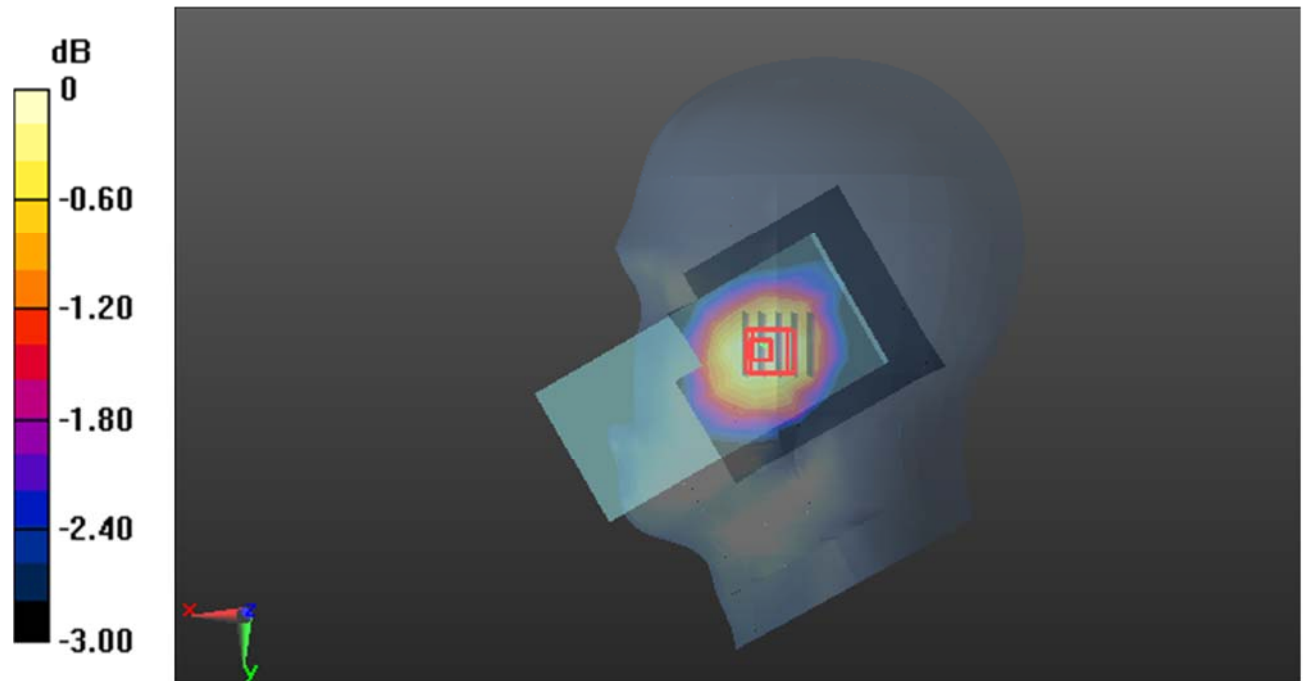

0 dB = 0.0206 W/kg = -16.86 dB dBW/kg



**Test Plot199#: LTE Band 71\_Head Right Tilt\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma=0.847$  S/m;  $\epsilon_r=42.899$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0164 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.184 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.0190 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0164 W/kg

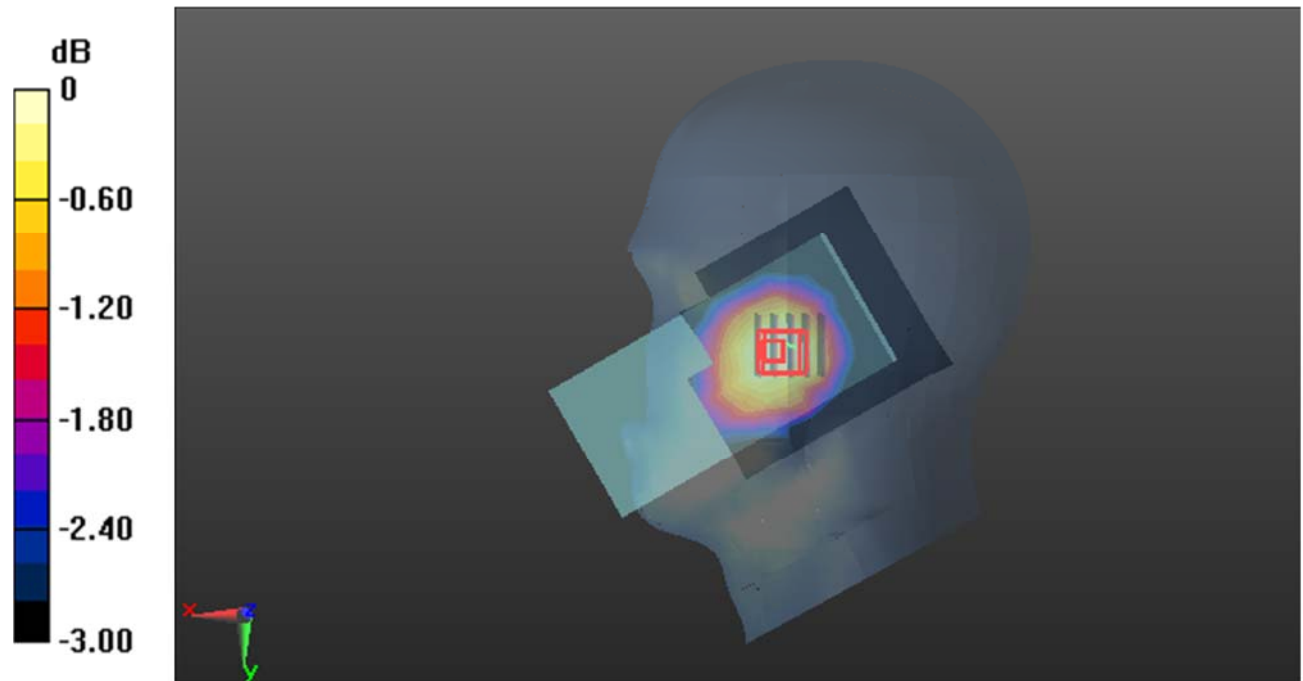

0 dB = 0.0164 W/kg = -17.85 dB dBW/kg

**Test Plot200#: LTE Band 71\_Body Front\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma=0.847$  S/m;  $\epsilon_r=42.899$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0557 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.860 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0596 W/kg

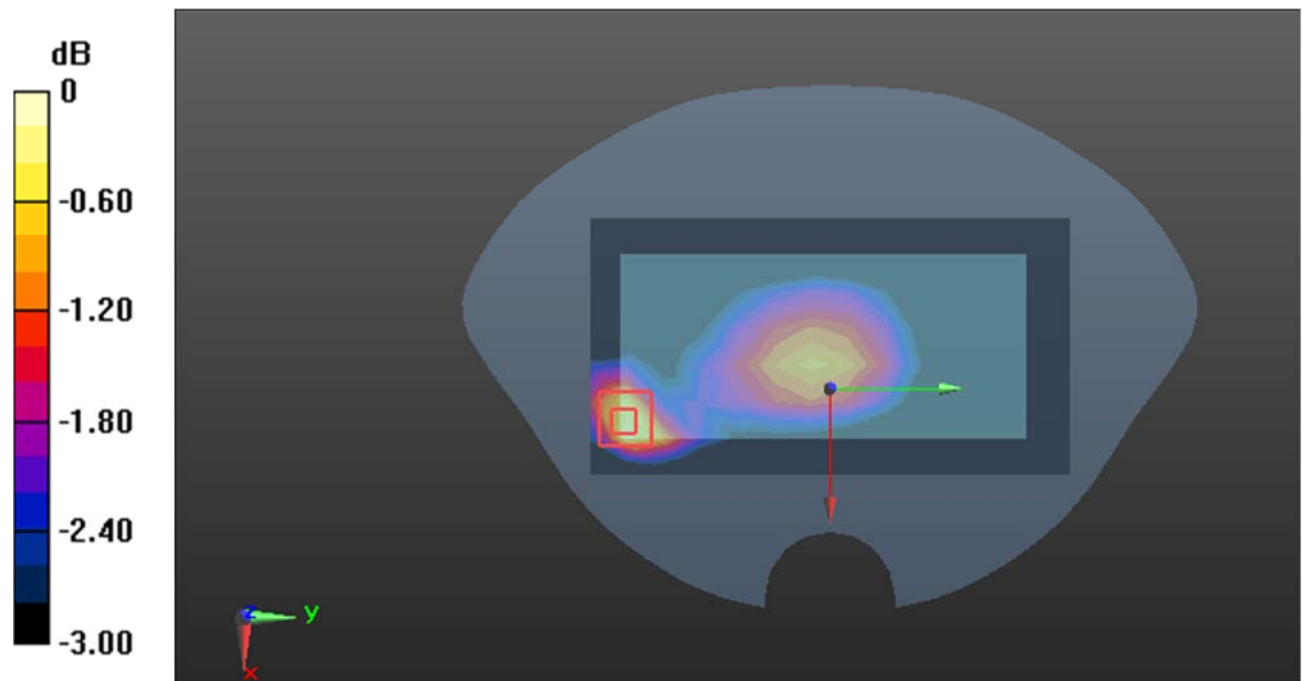

0 dB = 0.0596 W/kg = -12.25 dB dBW/kg

**Test Plot201#: LTE Band 71\_Body Front\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma=0.847$  S/m;  $\epsilon_r=42.899$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0464 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.019 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0700 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0480 W/kg

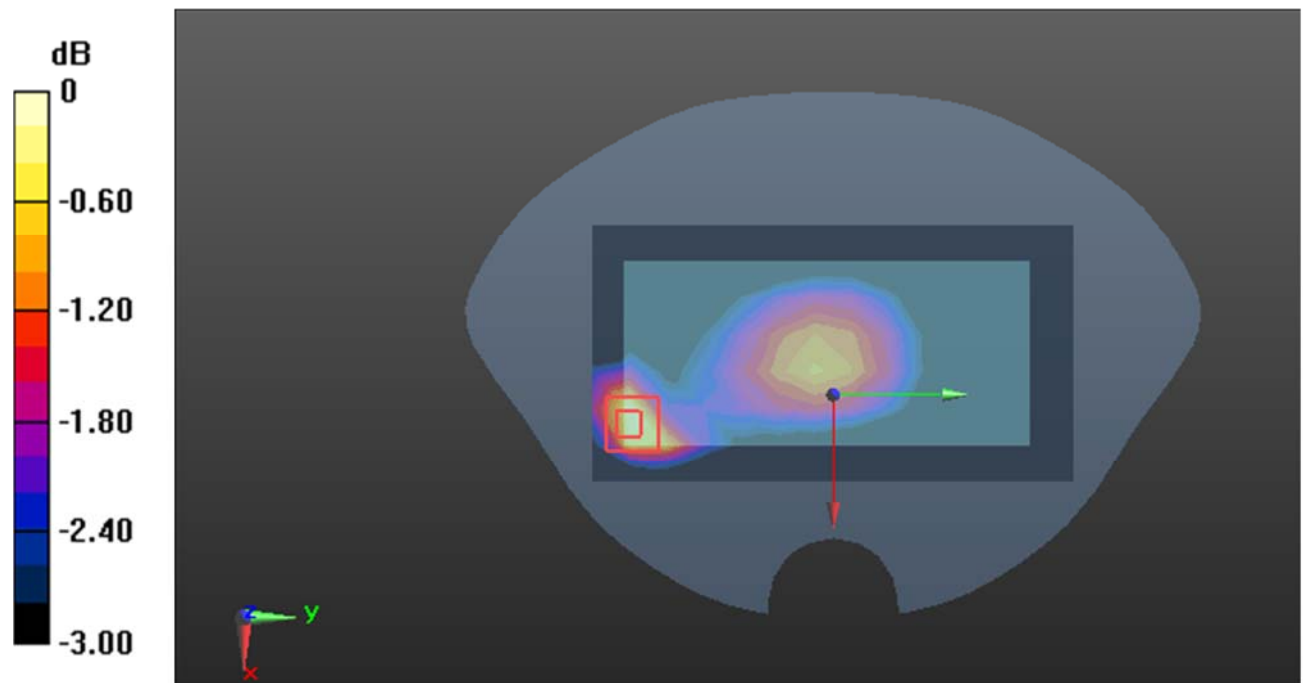

**Test Plot202#: LTE Band 71\_Body Back\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.155 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.75 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.176 W/kg

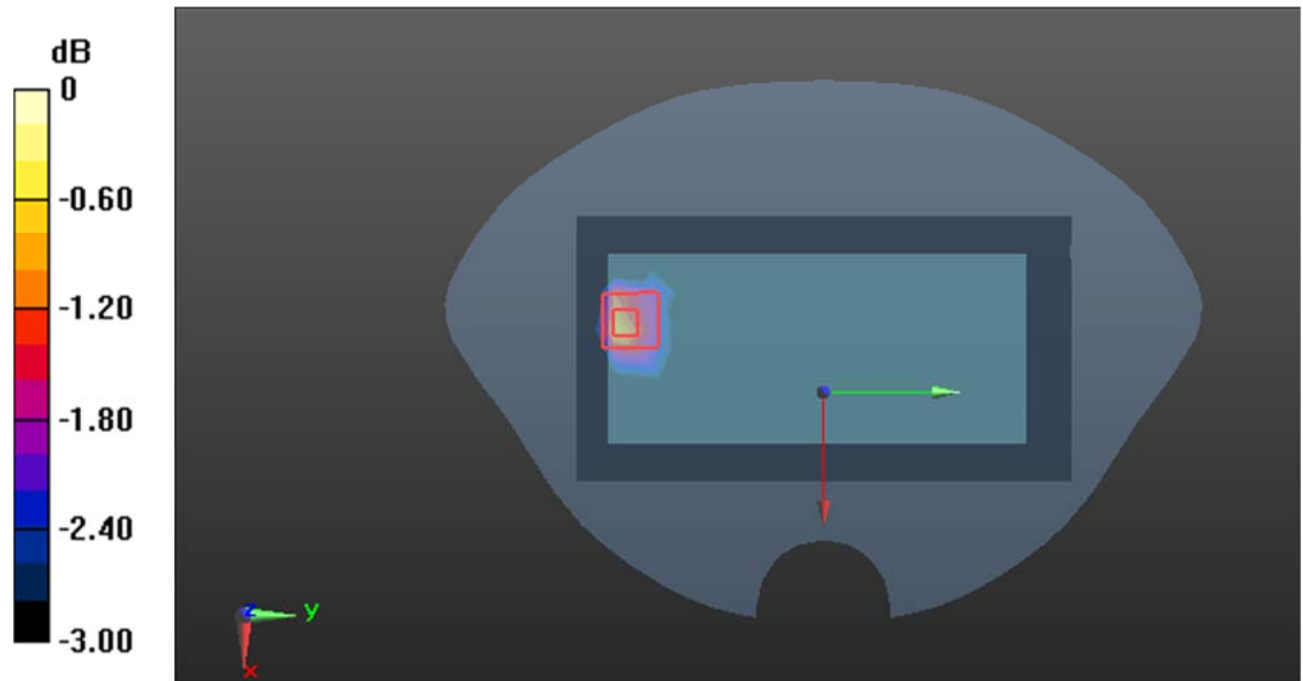

0 dB = 0.176 W/kg = -7.54 dB dBW/kg

**Test Plot203#: LTE Band 71\_Body Back\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.140 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.589 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.065 W/kg**

Maximum value of SAR (measured) = 0.143 W/kg

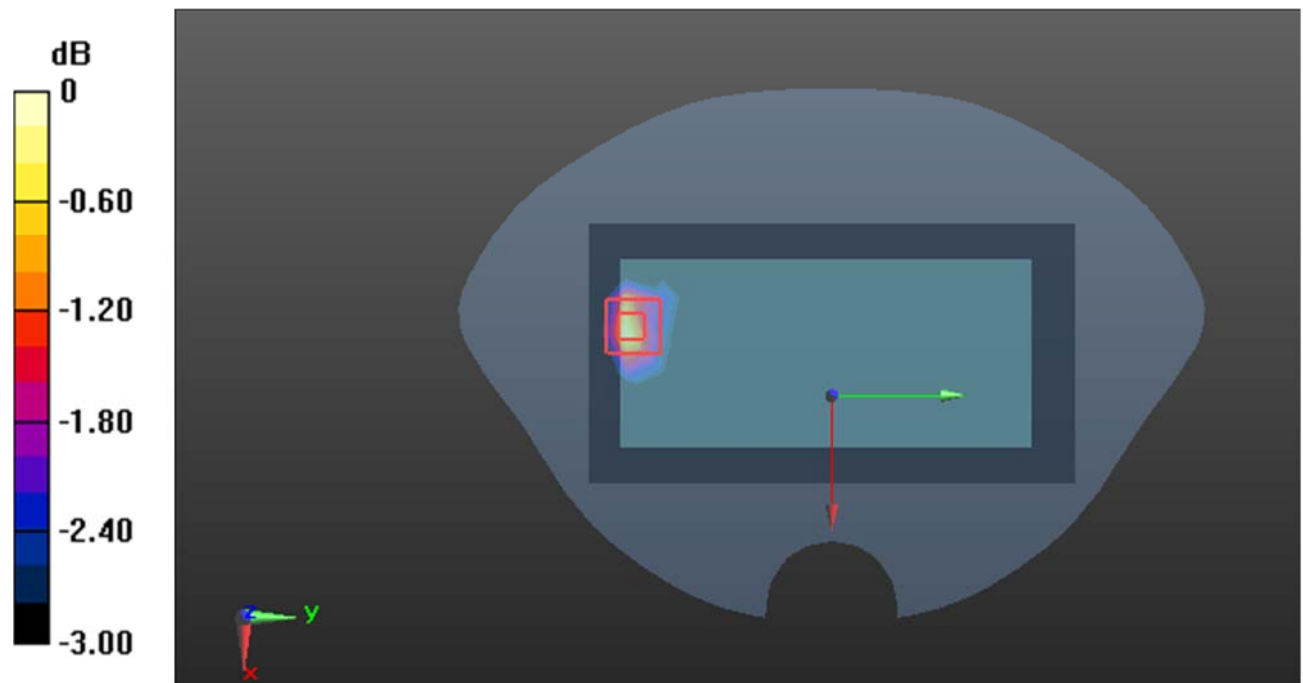

0 dB = 0.143 W/kg = -8.45 dB dBW/kg

**Test Plot204#: LTE Band 71\_Body Left\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.123 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.60 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.119 W/kg

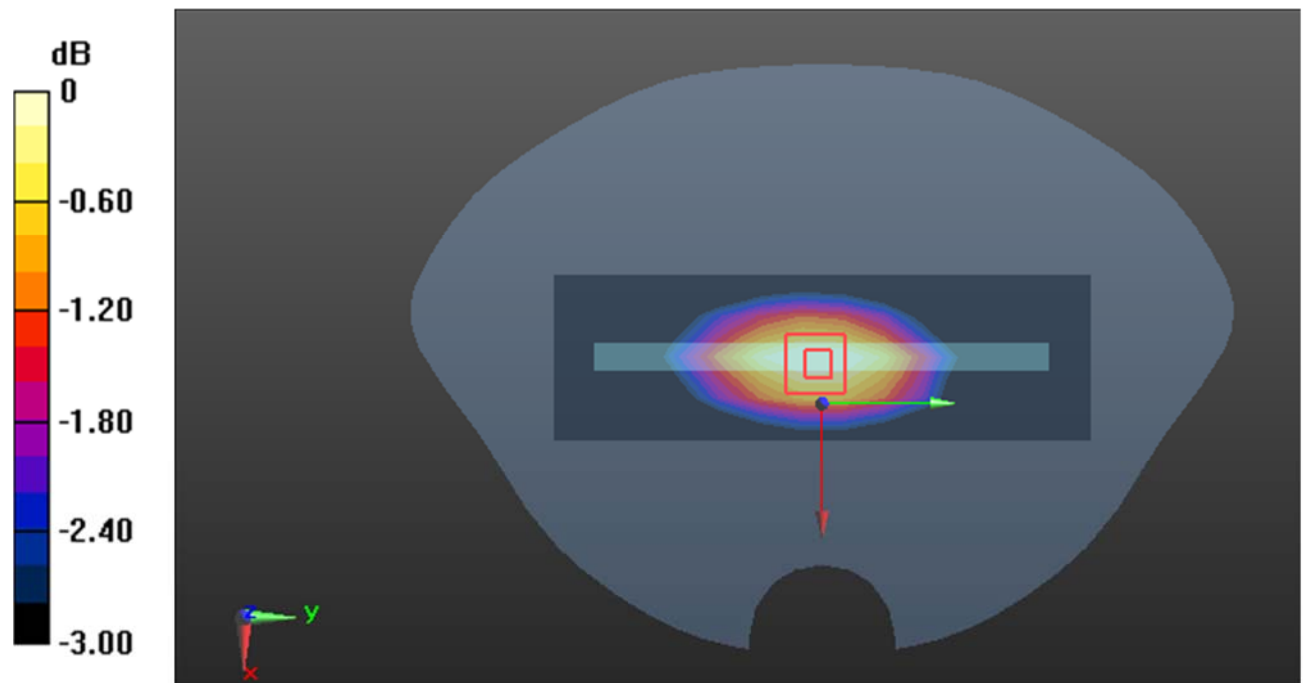

0 dB = 0.119 W/kg = -9.24 dB dBW/kg

**Test Plot205#: LTE Band 71\_Body Left\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.101 W/kg

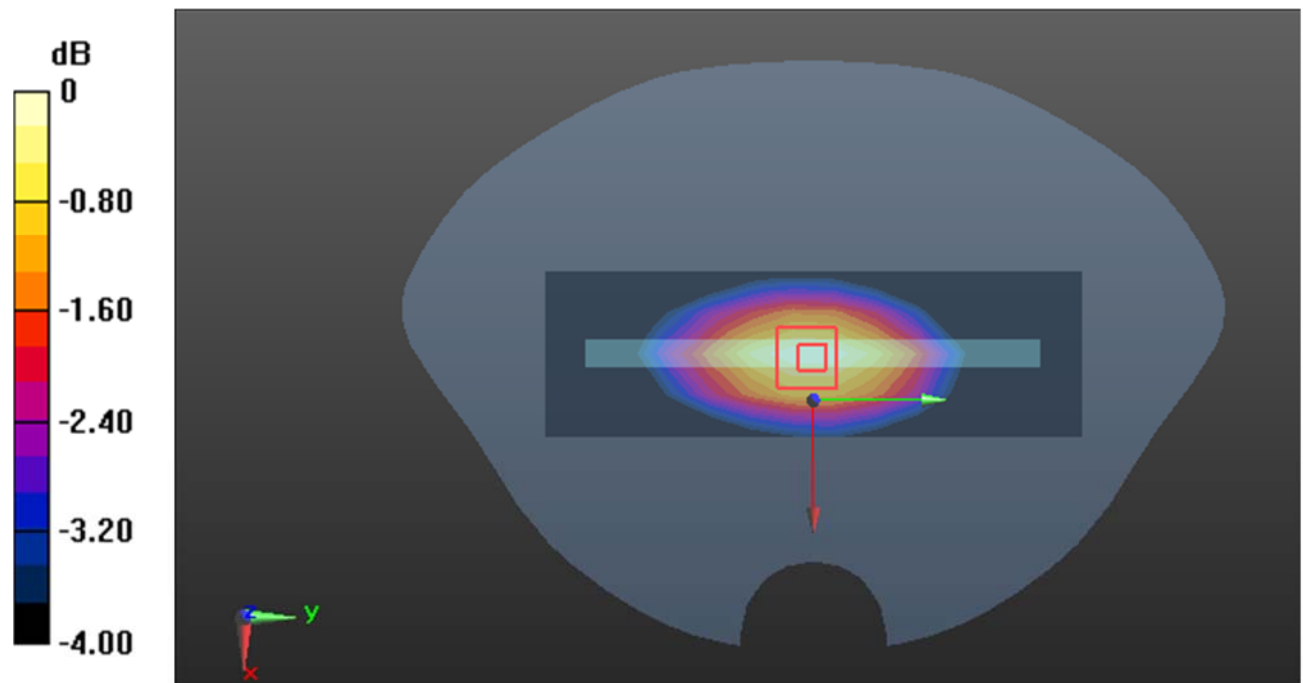

0 dB = 0.101 W/kg = -9.96 dB dBW/kg

**Test Plot206#: LTE Band 71\_Body Right\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.251 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.60 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.306 W/kg

**SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.158 W/kg**

Maximum value of SAR (measured) = 0.250 W/kg

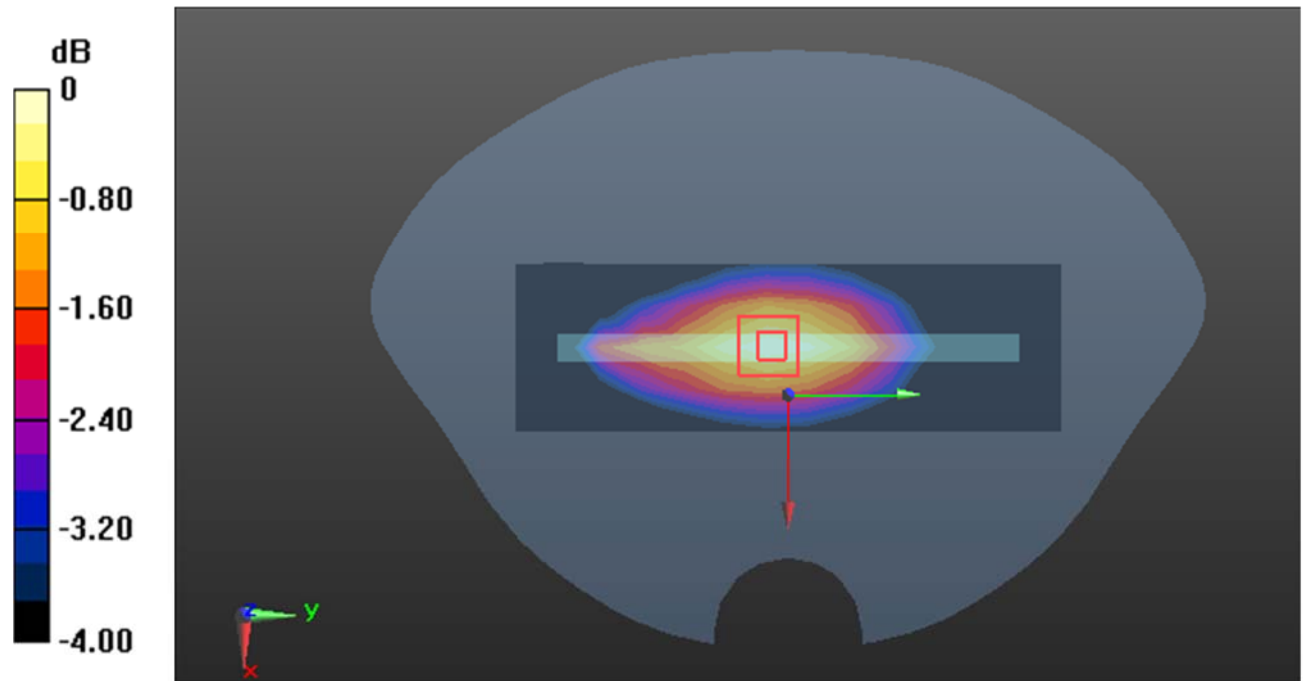

0 dB = 0.250 W/kg = -6.02 dB dBW/kg



**Test Plot207#: LTE Band 71\_Body Right\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.203 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.89 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.251 W/kg

**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

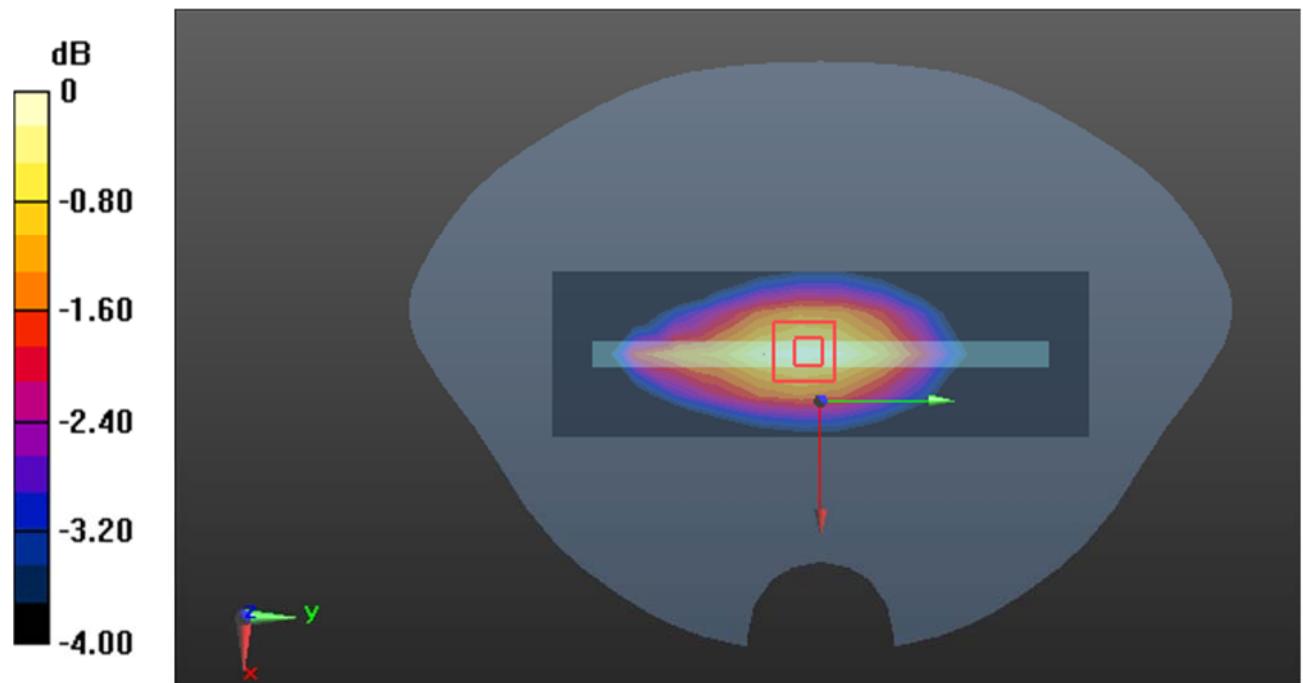

0 dB = 0.205 W/kg = -6.88 dB dBW/kg

**Test Plot208#: LTE Band 71\_Body Bottom\_1RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.122 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.153 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

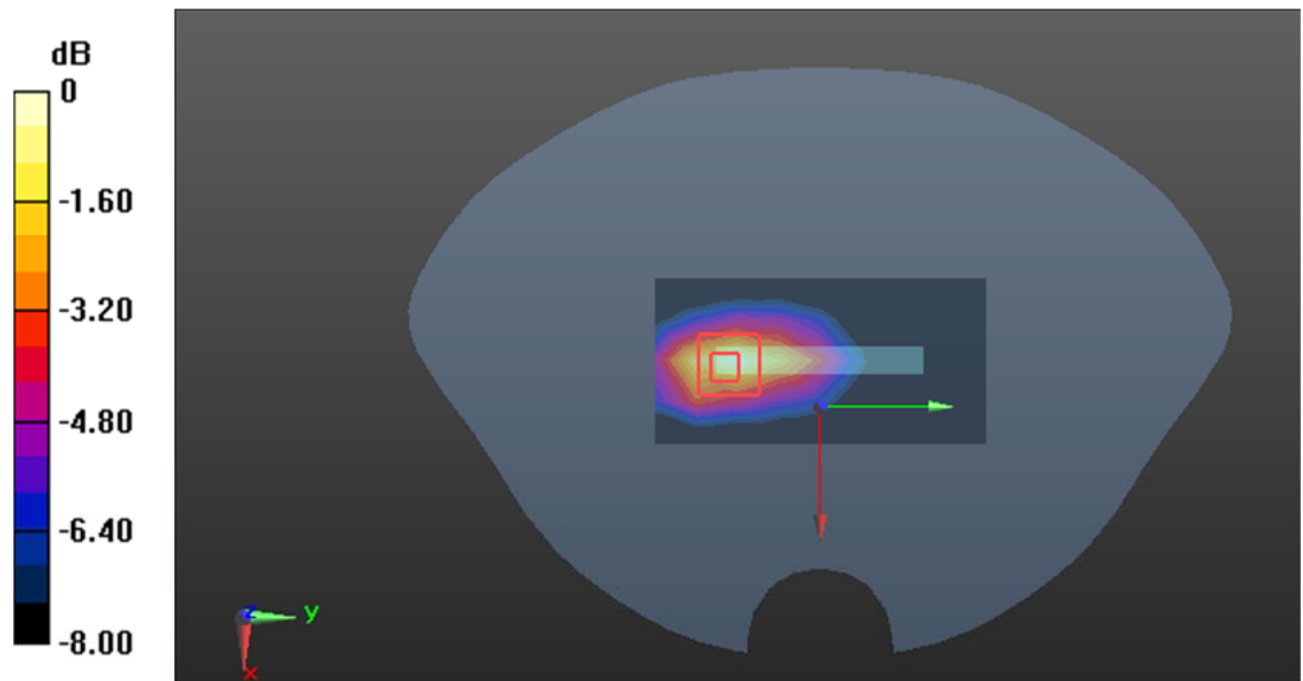

0 dB = 0.122 W/kg = -9.14 dB dBW/kg

**Test Plot209#: LTE Band 71\_Body Bottom\_50%RB\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.847$  S/m;  $\epsilon_r = 42.899$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @680.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0849 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.476 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.152 W/kg

**SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0990 W/kg

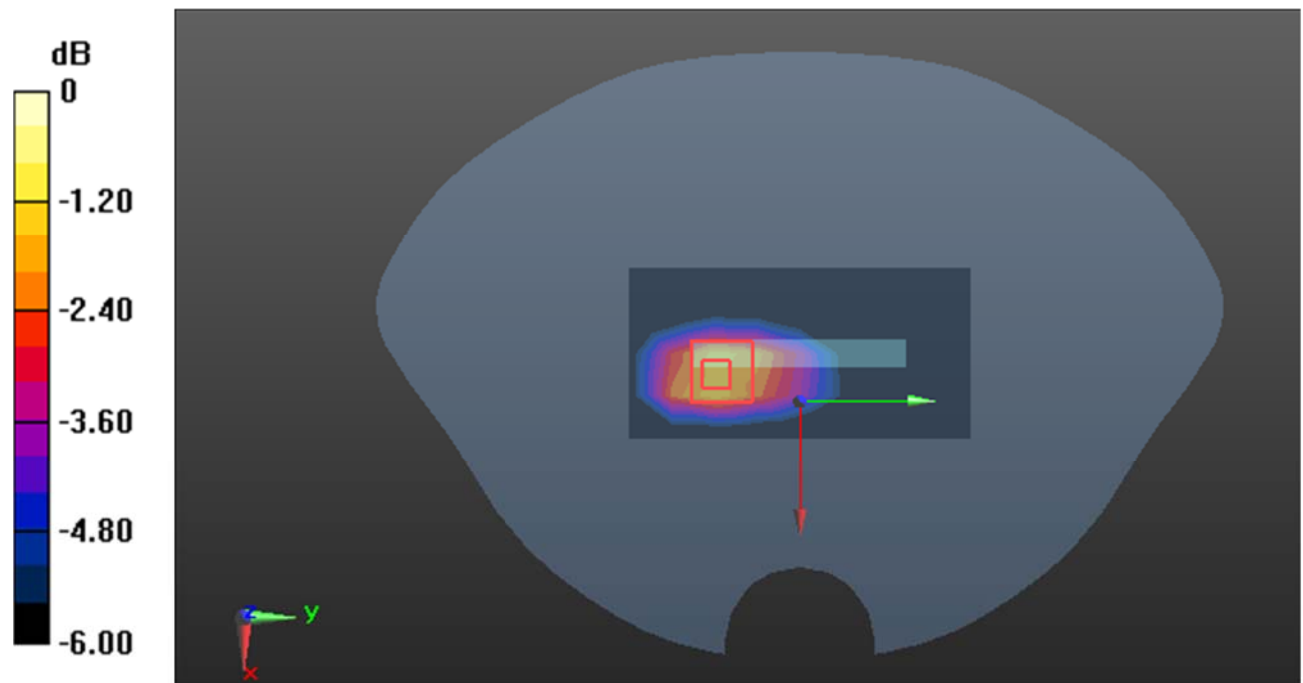

0 dB = 0.0990 W/kg = -10.04 dB dBW/kg

**Test Plot 210#: 2.4G WiFi \_ Head Left Cheek\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.685 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.454 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.276 W/kg**

Maximum value of SAR (measured) = 0.682 W/kg

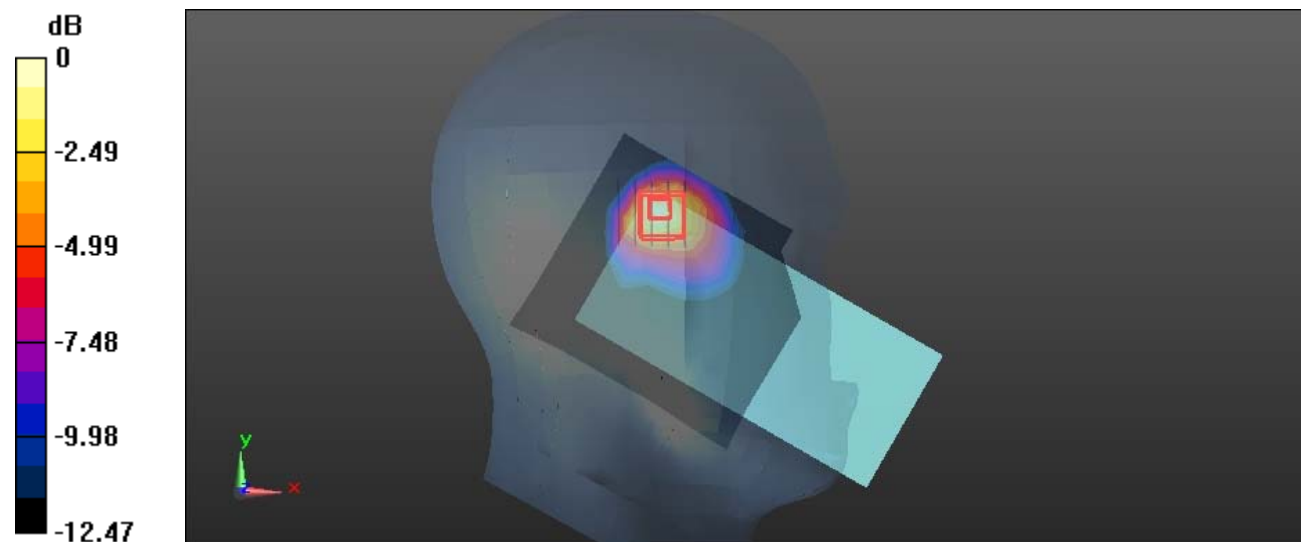

0 dB = 0.682 W/kg = -1.66 dBW/kg

**Test Plot 211#: 2.4G WiFi\_ Head Left Tilt\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.445 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.761 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.726 W/kg

**SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.168 W/kg**

Maximum value of SAR (measured) = 0.440 W/kg

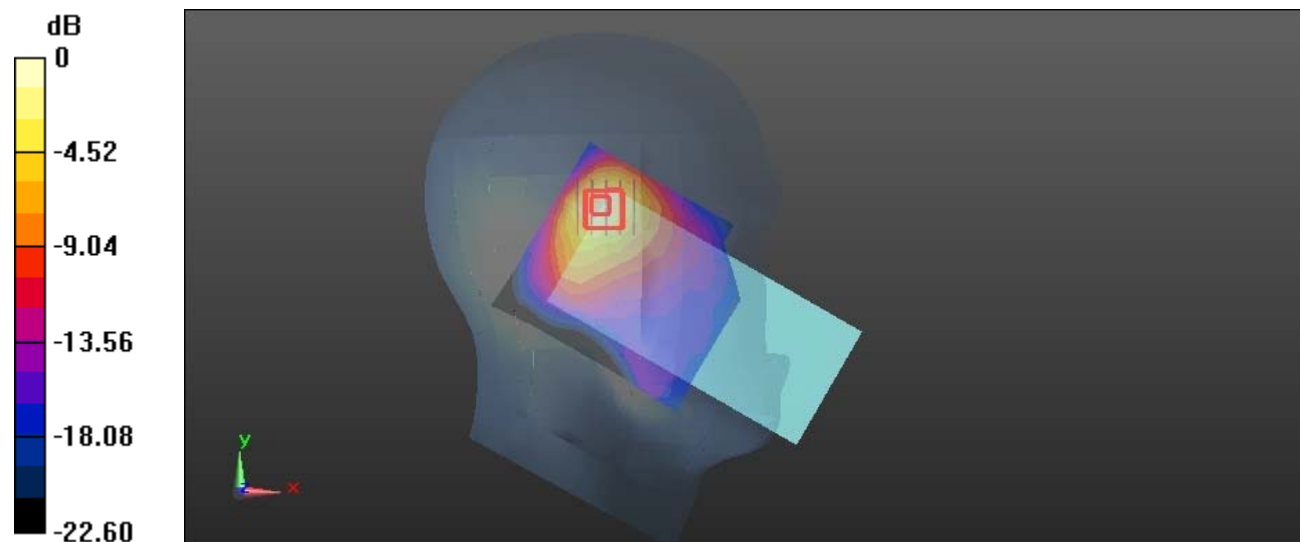

0 dB = 0.440 W/kg = -3.57 dBW/kg

**Test Plot 212#: 2.4G WiFi\_ Head Right Cheek\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.317 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.711 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.464 W/kg

**SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.145 W/kg**

Maximum value of SAR (measured) = 0.313 W/kg

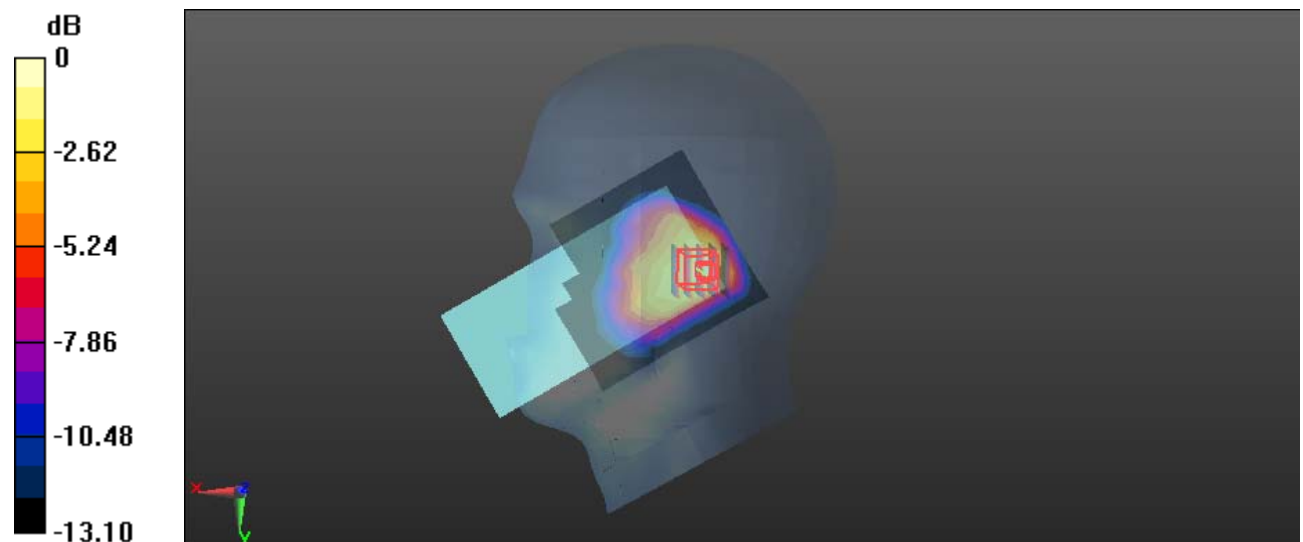

0 dB = 0.313 W/kg = -5.04 dBW/kg

**Test Plot 213#: 2.4G WiFi\_ Head Right Tilt\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.214 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.719 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.228 W/kg

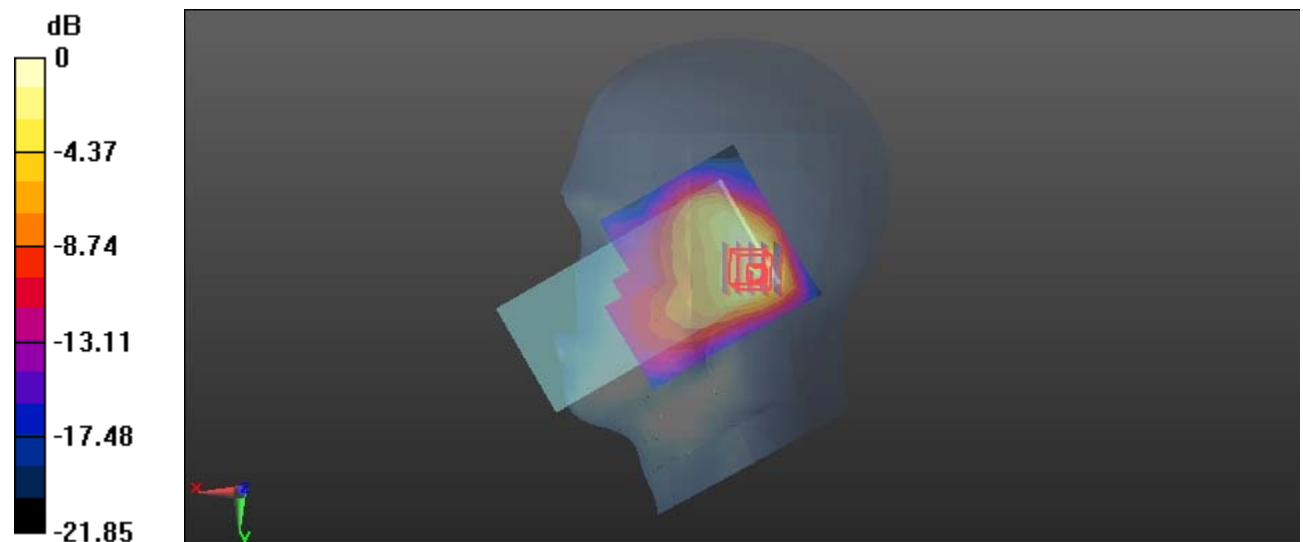

**Test Plot 214#: 2.4G WiFi\_Body Front\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.145 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.973 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 0.234 W/kg

**SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.157 W/kg

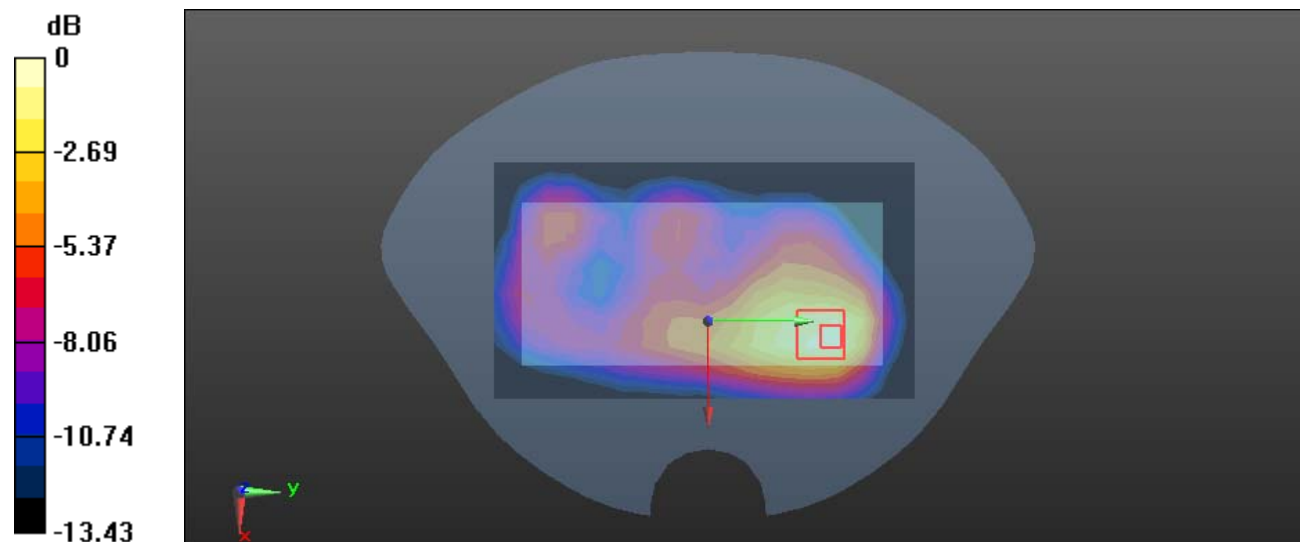



**Test Plot 215#: 2.4G WiFil\_ Body Back\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.187 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.699 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.332 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.191 W/kg

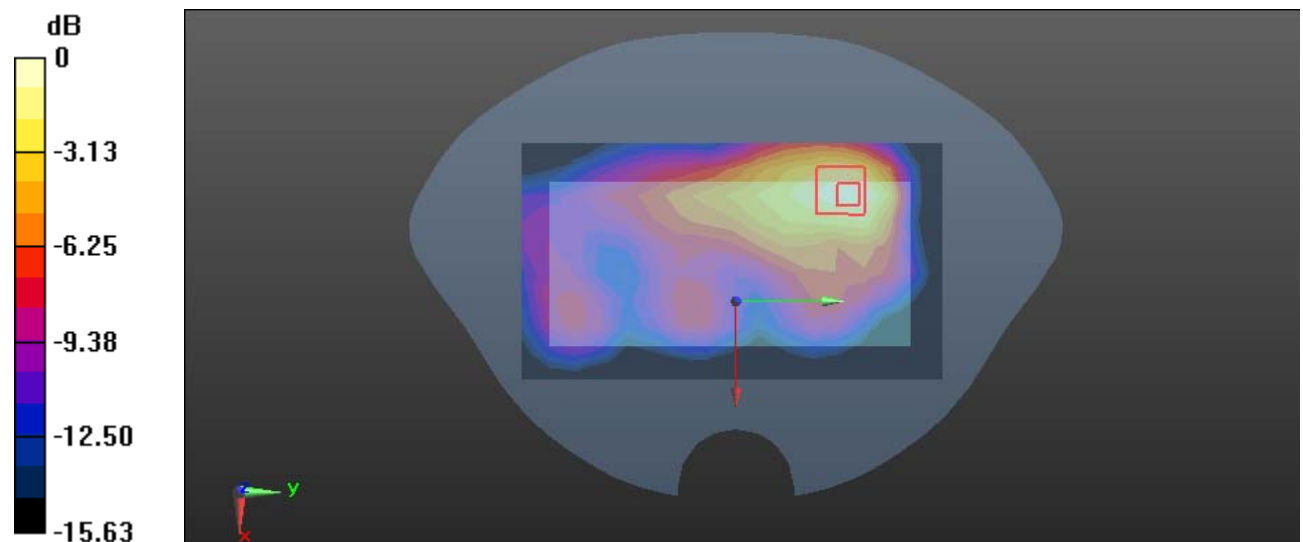

**Test Plot 216#: 2.4G WiFi\_Body Right\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0990 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.572 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.158 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.107 W/kg

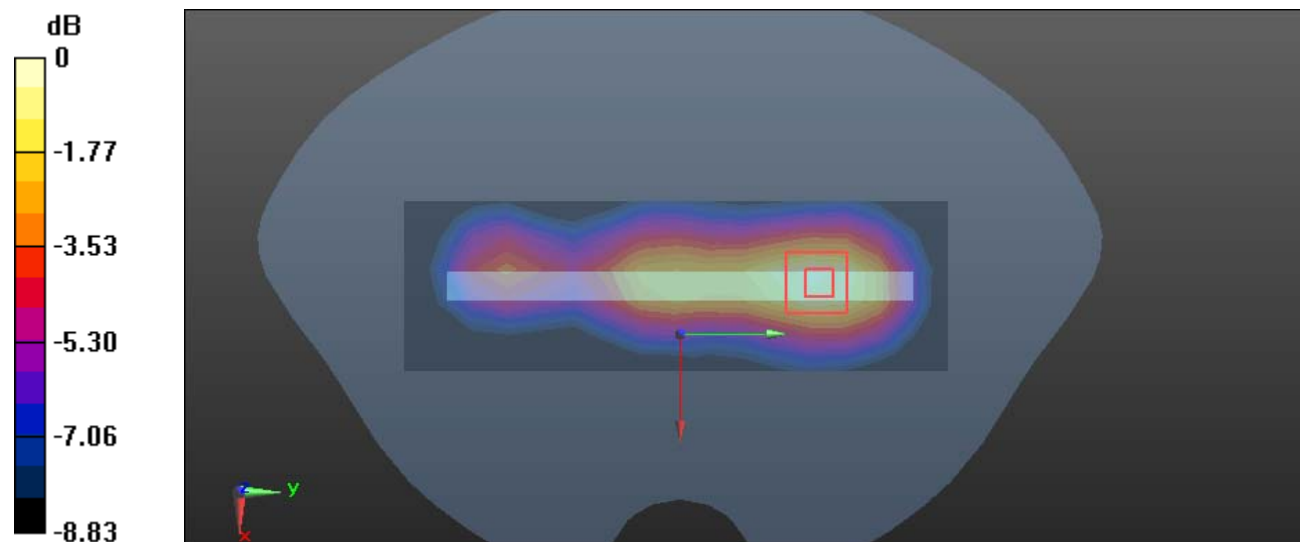

0 dB = 0.107 W/kg = -9.71 dBW/kg

**Test Plot 217#: 2.4G WiFi\_Body Top\_Middle****DUT: Phone; Type: GRAVITY G65; Serial: 2FUL-1**

Communication System: 802.11 b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2437 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0414 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.189 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0720 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0470 W/kg

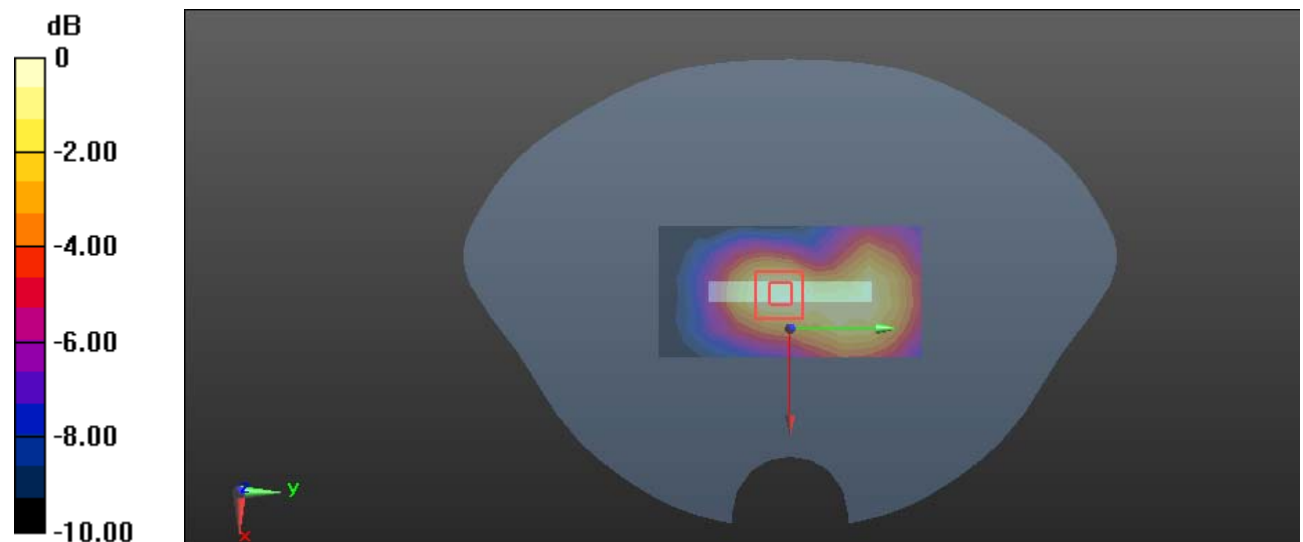

0 dB = 0.0470 W/kg = -13.28 dBW/kg