

FCC Part 15C&RSS-247 TEST REPORT

FCC ID: 2AT9N-WS-L

IC: 25357-WSL

Product : ROCKY
Model Name : WS-L
Brand : N/A
Report No. : NCT24043268-1

Prepared for

Wet Sounds Inc.

2975 Louise Street, Rosenberg, TX 77471, United States

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China**

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Wet Sounds Inc.
Address : 2975 Louise Street, Rosenberg, TX 77471, United States
Manufacture's name : Wet Sounds Inc.
Address : 2975 Louise Street, Rosenberg, TX 77471, United States
Product name : ROCKY
Model name : WS-L
Additional model : N/A
Model difference : N/A
Standards : FCC CFR47 Part 15 Section 15.247
RSS-247 Issue 3: August 2023
Test procedure : ANSI C63.10:2013
RSS-GEN, Issue 5: March 2019
Date of test : Jul. 02, 2024 to Nov 15, 2024
Date of Issue : Nov 15, 2024
Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Hugh Zhang

Hugh Zhang / Engineer

Technical Manager:

Henry Wang

Henry Wang / Manager



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	6
3 TEST FACILITY	7
4 GENERAL INFORMATION	8
4.1 GENERAL DESCRIPTION OF E.U.T.	8
4.2 CHANNEL LIST	9
4.3 TEST SETUP CONFIGURATION	10
4.4 TEST MODE	10
5 EQUIPMENT DURING TEST	11
5.1 EQUIPMENTS LIST	11
5.2 MEASUREMENT UNCERTAINTY	13
5.3 DESCRIPTION OF SUPPORT UNITS	13
6 CONDUCTED EMISSION	14
6.1 E.U.T. OPERATION	14
6.2 EUT SETUP	14
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
6.4 MEASUREMENT PROCEDURE:	15
6.5 CONDUCTED EMISSION LIMIT	15
6.6 MEASUREMENT DESCRIPTION	15
6.7 CONDUCTED EMISSION TEST RESULT	15
7 RADIATED SPURIOUS EMISSIONS	20
7.1 EUT OPERATION	20
7.2 TEST SETUP	21
7.3 SPECTRUM ANALYZER SETUP	22
7.4 TEST PROCEDURE	23
7.5 SUMMARY OF TEST RESULTS	24
8 MAXIMUM PEAK OUTPUT POWER TEST	33
8.1 TEST STANDARD AND LIMIT	33
8.2 TEST SETUP	33

8.3 TEST PROCEDURE	33
8.4 TEST DATA	34
9 20DB OCCUPY BANDWIDTH & 99% OCB TEST	35
9.1 TEST STANDARD	35
9.2 TEST SETUP	35
9.3 TEST PROCEDURE	35
9.4 TEST DATA	36
10 CARRIER FREQUENCY SEPARATION TEST	38
10.1 TEST STANDARD AND LIMIT	38
10.2 TEST SETUP	38
10.3 TEST PROCEDURE	38
10.4 TEST DATA	39
11 NUMBER OF HOPPING CHANNEL TEST	40
11.1 TEST STANDARD AND LIMIT	40
11.2 TEST SETUP	40
11.3 TEST PROCEDURE	40
11.4 TEST DATA	41
12 DWELL TIME TEST	42
12.1 TEST STANDARD AND LIMIT	42
12.2 TEST SETUP	42
12.3 TEST PROCEDURE	42
12.4 TEST DATA	43
13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	45
13.1 TEST STANDARD AND LIMIT	45
13.2 TEST SETUP	45
13.3 TEST PROCEDURE	45
13.4 TEST DATA	46
FOR 47 CFR PART 15C SECTION 15.247(A)(1) REQUIREMENT	48
14 ANTENNA REQUIREMENT	50
14.1 TEST STANDARD AND REQUIREMENT	50
14.2 ANTENNA CONNECTED CONSTRUCTION	50
15 APPENDIX I -- TEST SETUP PHOTOGRAPH	51



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions and Restricted Bandedge	15.205(a) 15.209 15.247(d) RSS-Gen.6.13 RSS-Gen.8.10	PASS
Conducted Unwanted emissions and Band edge	15.247(d) 15.205(a) RSS-247 5.5	PASS
Conduct Emission	15.207 RSS-Gen 8.8	PASS
20dB Bandwidth & 99% OCB	15.247(a)(1) RSS-247.5.1(2) RSS-Gen.6.7	PASS
Maximum Peak Output Power	15.247(b)(1) RSS-247.5.4(4)	PASS
Frequency Separation	15.247(a)(1) RSS-247.5.1(4)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)RSS-247.5.1(4)	PASS
Dwell time	15.247(a)(1)(iii)RSS-247.5.1(5)	PASS
Antenna Requirement	15.203 RSS-Gen 6.8	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

4 General Information

4.1 General Description of E.U.T.

Product Name	:	ROCKY
Model Name	:	WS-L
Sample ID	:	240625049
Sample(s) Status:	:	Engineer sample
Additional model	:	N/A
Model difference	:	N/A
Operating frequency	:	2403.5-2477.3MHz
Number of Channels	:	49 channels
Type of Modulation	:	FSK
Antenna installation	:	Discrete Dipole Antenna
Antenna Gain	:	2.30 dBi
Power supply	:	DC 21.9V by battery
Hardware Version	:	CP0002-A0972
Software Version	:	FW5642-A0967
Battery information	:	Model: 18650 Nominal Voltage: 21.9V Nominal Capacity: 113.88Wh Input: 26Vdc/2.3A Output: 21.9Vdc/5.2A
Adapter 1 information	:	Manufacturer: Dong Guan City GangQi Electronic Co., Ltd Product name: SWITCHING ADAPER Model: GQ48-260230-E2 Input: 100-240V~, 50/60Hz 1.5A Max Output: 26.0Vdc/2.3A 59.8W
Adapter 2 information	:	Manufacturer: GME Technology (Shenzhen) Co., Ltd Product name: Switching Power Adapter Model: GME72C-260230FDR Input: 100-240V~, 50/60Hz 1.5A Output: 26.0Vdc/2.3A 59.8W
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes FSK have been tested. 49 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.



Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2403.5	18	2431.2	36	2458.9
01	2405.1	19	2432.7	37	2460.4
02	2406.6	20	2434.3	38	2461.9
03	2408.1	21	2435.8	39	2463.5
04	2409.7	22	2437.4	40	2465.0
05	2411.2	23	2438.9	41	2466.6
06	2412.8	24	2440.4	42	2468.1
07	2414.3	25	2442.0	43	2469.6
08	2415.8	26	2443.5	44	2471.2
09	2417.4	27	2445.0	45	2472.7
10	2418.9	28	2446.6	46	2474.2
11	2420.4	29	2448.1	47	2475.8
12	2422.0	30	2449.6	48	2477.3
13	2423.5	31	2451.2		
14	2425.1	32	2452.7		
15	2426.6	33	2454.3		
16	2428.1	34	2455.8		
17	2429.7	35	2.457.3		


Channel	Frequency(MHz)
0	2403.5
24	2440.4
48	2477.3

4.3 Test Setup Configuration


Conducted Emission



Radiated Emission



Radiated Emission(above 1GHz)



Conducted Spurious



4.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	Hoff-SXC-XDT_SAT
Power level setup	≤16dBm

5 Equipment During Test

5.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/17	2025/6/16
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2024/6/17	2025/6/16
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNWARZBECK	2024/6/17	2025/6/16
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	CHNWARZBECK	2024/6/17	2025/6/16

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/17	2025/6/16
Power Sensor	TR1029-2	512364	Techoy	2024/6/17	2025/6/16
RF Swith	TR1029-1	512364	Techoy	2024/6/17	2025/6/16
Cable	DA800-4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800-11000MM	NA	DA	2024/6/17	2025/6/16

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	ROCKY	N/A	WS-L	N/A	EUT
E-2	Notebook	Lenovo	300-15SK	GB14477457	AE

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207& RSS-Gen [8.8]
Test Method: : ANSI C63.10:2013
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :

Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.12 kPa
Test Voltage : AC 120V/60Hz


6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

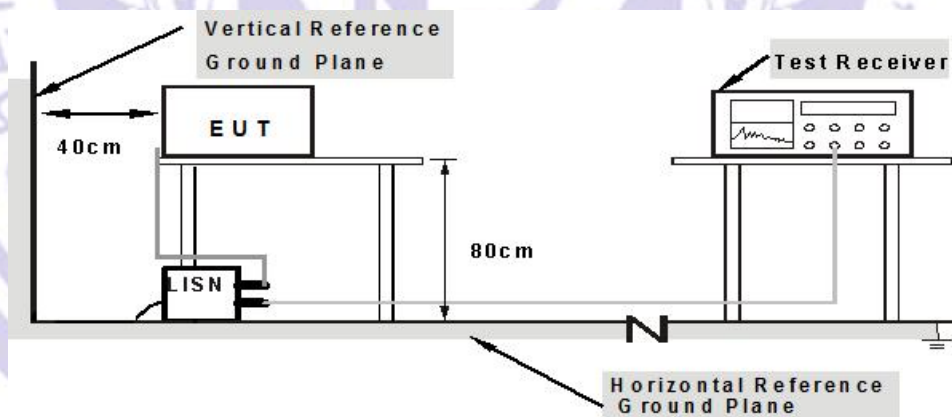

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

6.3 Test SET-UP (Block Diagram of Configuration)

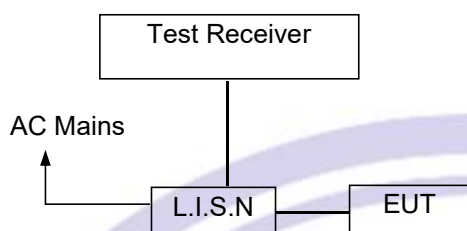

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.7 Conducted Emission Test Result

Pass

Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (FSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	High	Adapter:	GQ48-260230-E2
----------	------	----------	----------------


Test plot for L

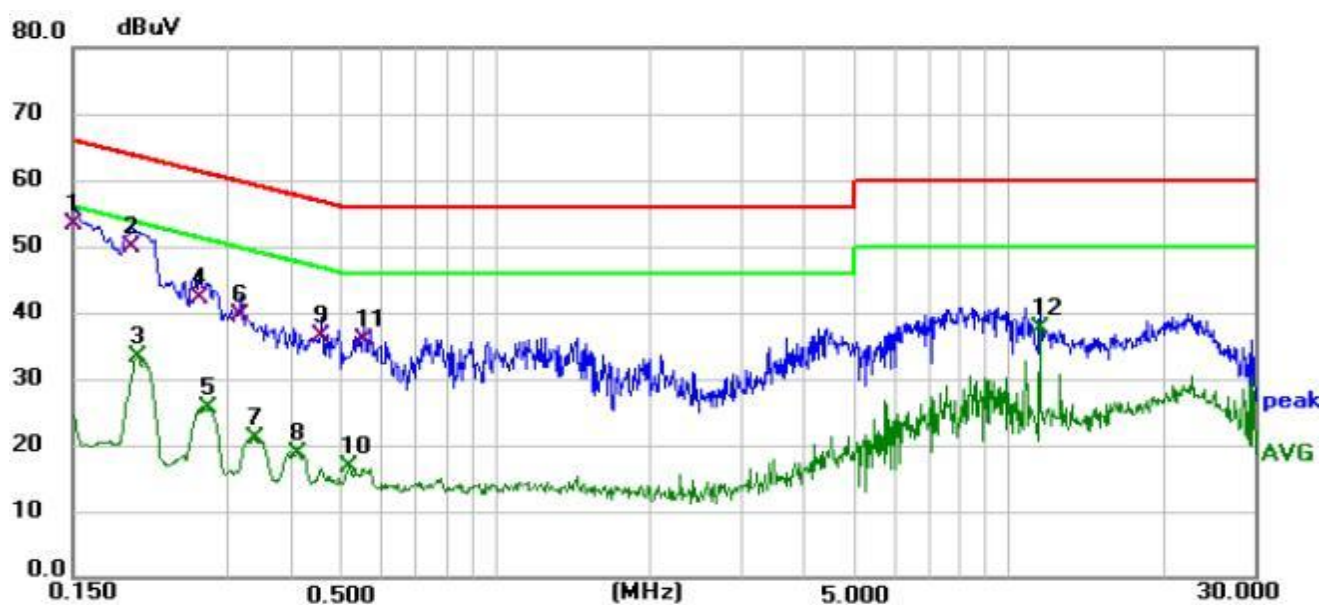

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	42.48	10.90	53.38	66.00	-12.62	QP
2	0.195	38.85	11.02	49.87	63.83	-13.96	QP
3	0.201	22.27	11.04	33.31	53.57	-20.26	AVG
4	0.264	31.12	10.96	42.08	61.30	-19.22	QP
5	0.276	14.60	10.95	25.55	50.94	-25.39	AVG
6	0.318	28.62	10.90	39.52	59.76	-20.24	QP
7	0.339	10.13	10.86	20.99	49.23	-28.24	AVG
8	0.411	8.01	10.73	18.74	47.63	-28.89	AVG
9	0.459	25.64	10.68	36.32	56.71	-20.39	QP
10	0.518	6.08	10.64	16.72	46.00	-29.28	AVG
11	0.554	25.05	10.67	35.72	56.00	-20.28	QP
12	11.440	26.53	11.10	37.63	50.00	-12.37	AVG

Channel:	High	Adapter:	GQ48-260230-E2
----------	------	----------	----------------


Test plot for N

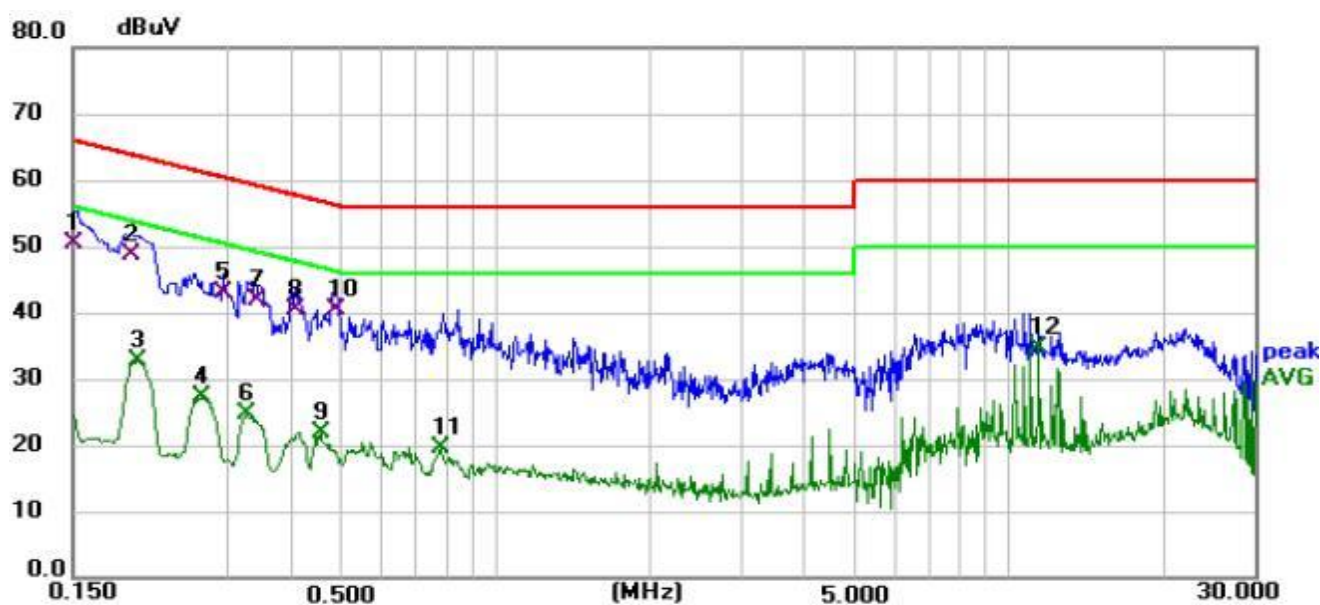

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	39.47	10.88	50.35	66.00	-15.65	QP
2	* 0.195	37.73	11.02	48.75	63.83	-15.08	QP
3	0.201	21.67	11.05	32.72	53.57	-20.85	AVG
4	0.267	16.35	10.91	27.26	51.21	-23.95	AVG
5	0.294	31.99	10.91	42.90	60.41	-17.51	QP
6	0.327	13.78	10.86	24.64	49.53	-24.89	AVG
7	0.345	31.00	10.84	41.84	59.08	-17.24	QP
8	0.408	29.61	10.75	40.36	57.69	-17.33	QP
9	0.456	11.28	10.70	21.98	46.77	-24.79	AVG
10	0.489	29.63	10.67	40.30	56.18	-15.88	QP
11	0.779	8.63	10.86	19.49	46.00	-26.51	AVG
12	11.380	23.57	11.08	34.65	50.00	-15.35	AVG

Channel:	High	Adapter:	GME72C-260230FDR
----------	------	----------	------------------


Test plot for L

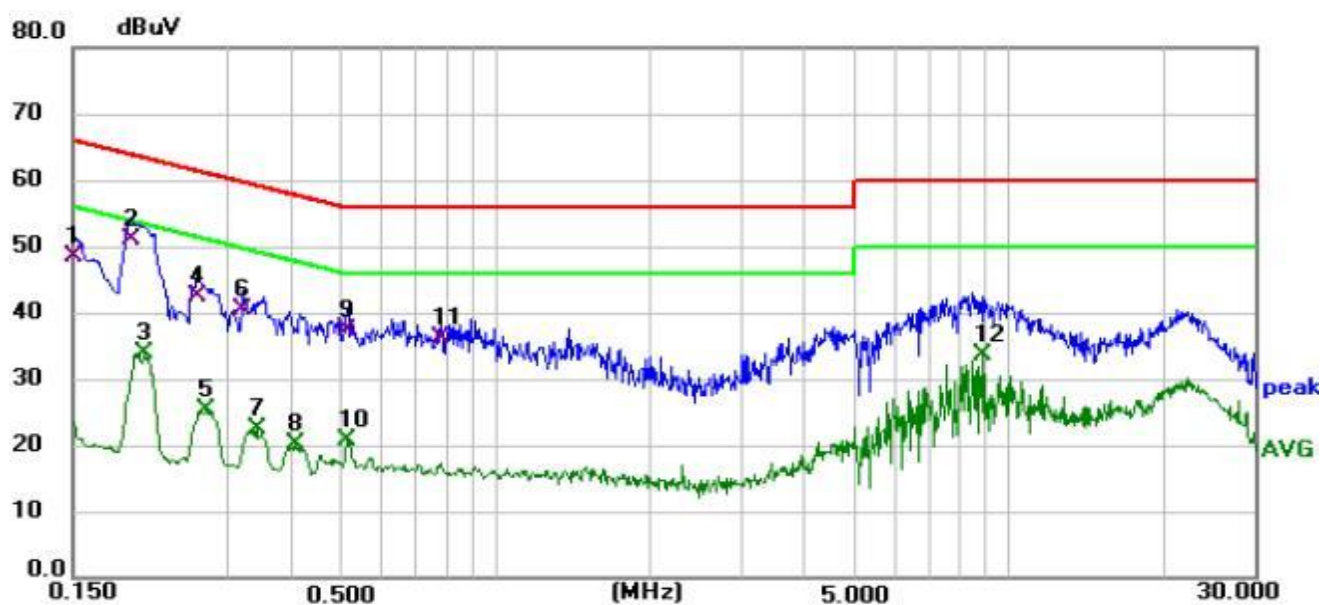

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	37.66	10.90	48.56	66.00	-17.44	QP
2	* 0.195	39.84	11.02	50.86	63.83	-12.97	QP
3	0.207	22.78	11.03	33.81	53.32	-19.51	AVG
4	0.261	31.38	10.96	42.34	61.40	-19.06	QP
5	0.273	14.44	10.95	25.39	51.03	-25.64	AVG
6	0.321	29.41	10.89	40.30	59.68	-19.38	QP
7	0.342	11.48	10.86	22.34	49.15	-26.81	AVG
8	0.408	9.35	10.73	20.08	47.69	-27.61	AVG
9	0.513	26.68	10.64	37.32	56.00	-18.68	QP
10	0.513	10.06	10.64	20.70	46.00	-25.30	AVG
11	0.783	25.36	10.84	36.20	56.00	-19.80	QP
12	8.900	22.41	11.02	33.43	50.00	-16.57	AVG

Channel:	High	Adapter:	GME72C-260230FDR
----------	------	----------	------------------

Test plot for N

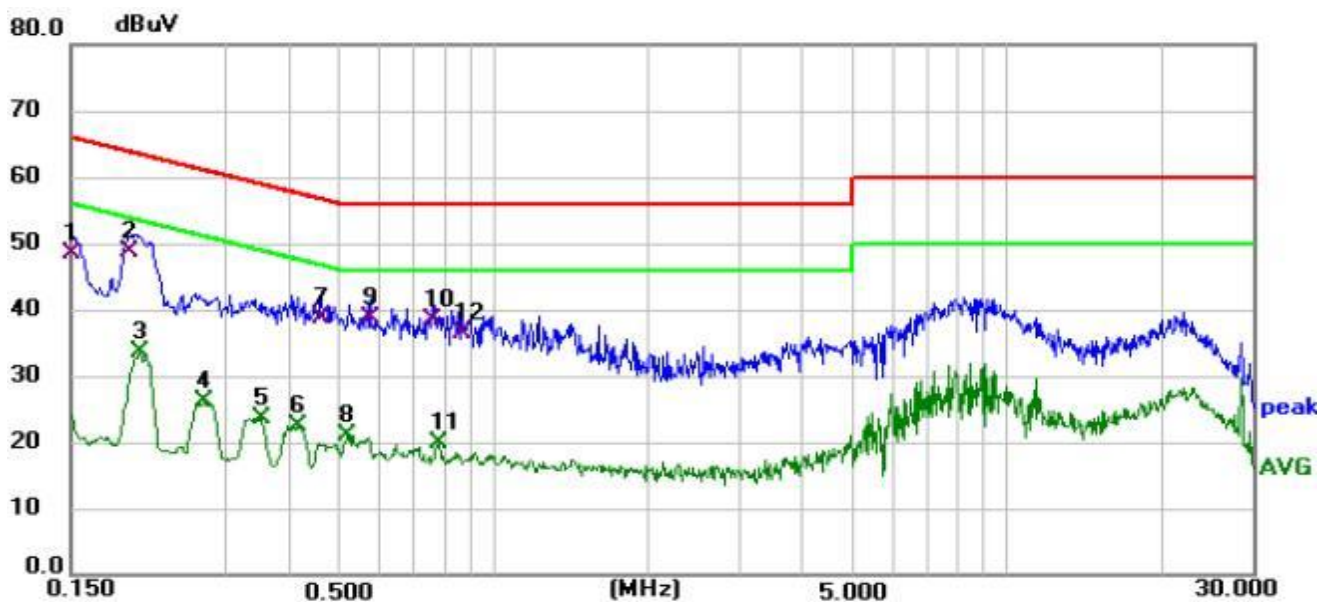

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	37.54	10.88	48.42	66.00	-17.58	QP
2	* 0.195	37.61	11.02	48.63	63.83	-15.20	QP
3	0.204	22.46	11.04	33.50	53.45	-19.95	AVG
4	0.273	15.23	10.91	26.14	51.03	-24.89	AVG
5	0.351	12.81	10.83	23.64	48.94	-25.30	AVG
6	0.417	11.63	10.74	22.37	47.51	-25.14	AVG
7	0.462	28.02	10.70	38.72	56.66	-17.94	QP
8	0.518	10.25	10.66	20.91	46.00	-25.09	AVG
9	0.572	27.93	10.67	38.60	56.00	-17.40	QP
10	0.761	27.60	10.85	38.45	56.00	-17.55	QP
11	0.779	8.90	10.86	19.76	46.00	-26.24	AVG
12	0.869	25.51	10.94	36.45	56.00	-19.55	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247& RSS-247 [5.5]
Test Method : ANSI C63.10:2013
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

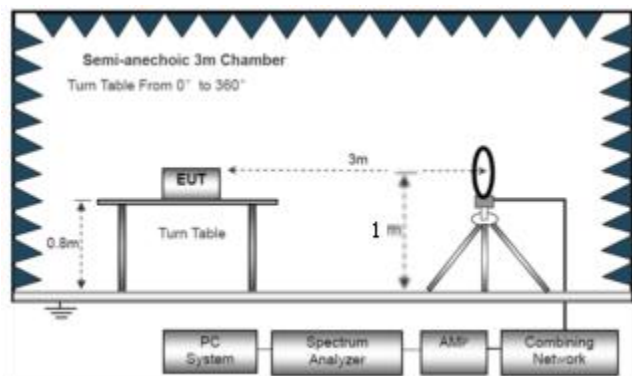

The test setup for emission measurement from 30 MHz to 1 GHz.

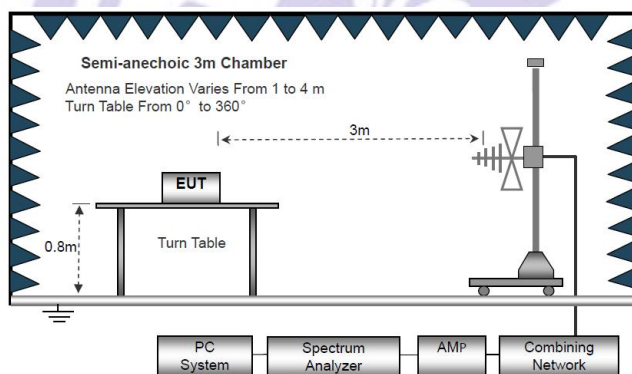

The test setup for emission measurement above 1 GHz.

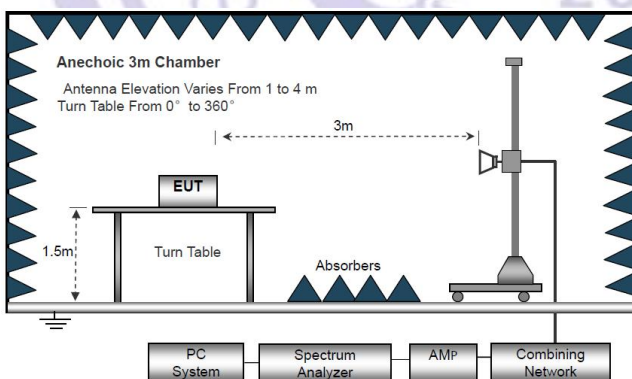

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);


Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, High Channel (2477.3MHz) Worst case FSK for record:

Channel:	High	Adapter	GQ48-260230-E2
----------	------	---------	----------------

Test plot for Horizontal

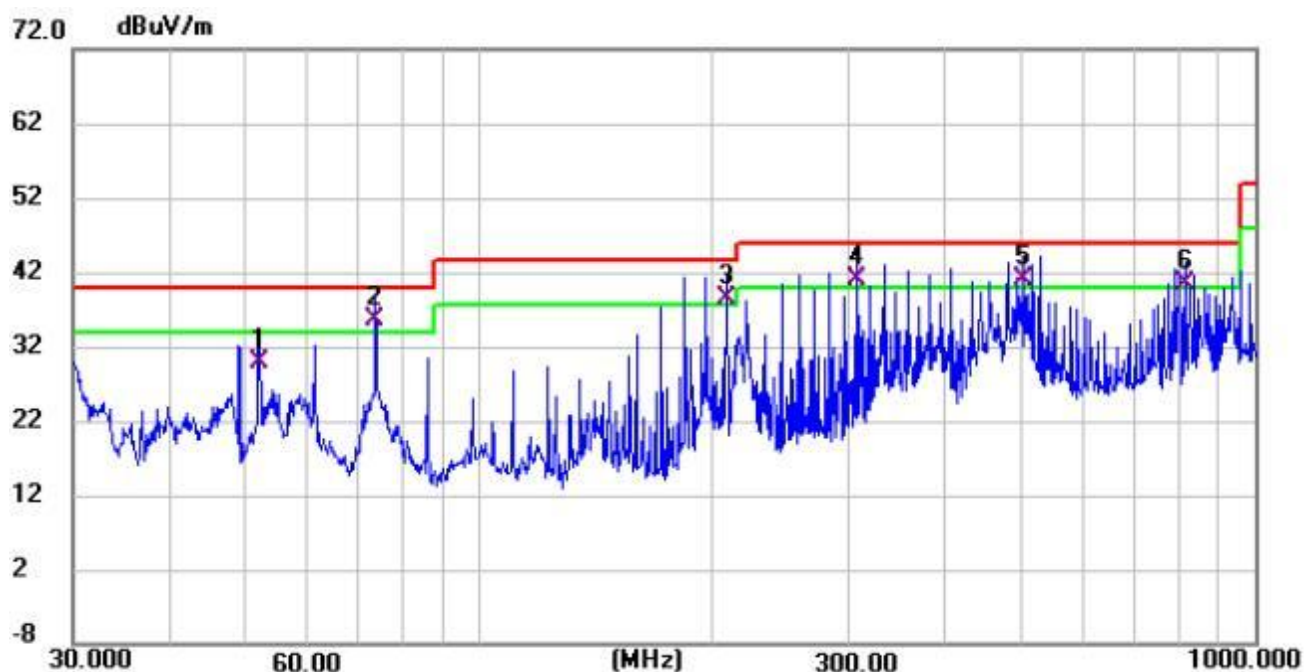


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	52.208	17.69	12.17	29.86	40.00	-10.14	QP
2	* 73.617	27.56	7.90	35.46	40.00	-4.54	QP
3	! 209.313	27.13	11.35	38.48	43.50	-5.02	QP
4	! 307.831	26.72	14.38	41.10	46.00	-4.90	QP
5	! 504.706	22.45	18.64	41.09	46.00	-4.91	QP
6	! 813.111	17.43	22.90	40.33	46.00	-5.67	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-Preamplifier Factor

Channel:	High	Adapter	GQ48-260230-E2
----------	------	---------	----------------

Test plot for Vertical

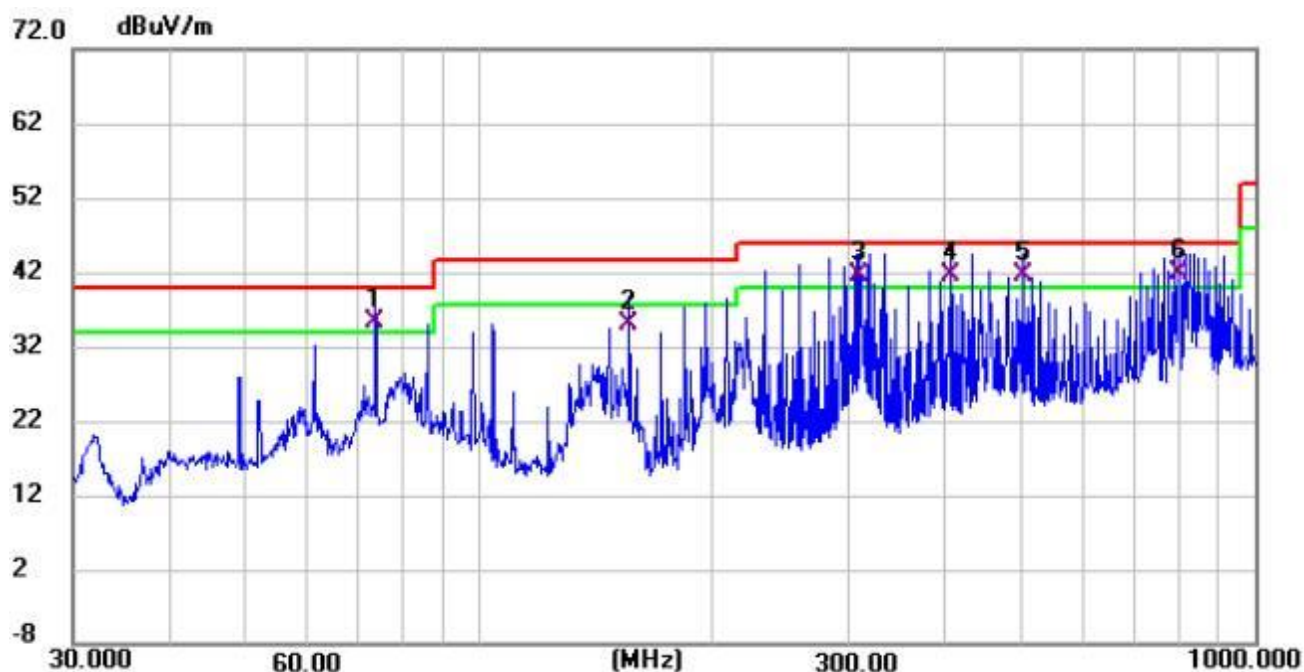


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	73.617	27.36	7.80	35.16	40.00	-4.84	QP
2	156.458	26.63	8.47	35.10	43.50	-8.40	QP
3 !	309.998	27.01	14.43	41.44	46.00	-4.56	QP
4 !	406.088	24.72	16.81	41.53	46.00	-4.47	QP
5 !	504.706	22.87	18.64	41.51	46.00	-4.49	QP
6 *	798.980	18.94	22.79	41.73	46.00	-4.27	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-Preamplifier Factor

Channel:	High	Adapter	GME72C-260230FDR
----------	------	---------	------------------

Test plot for Horizontal

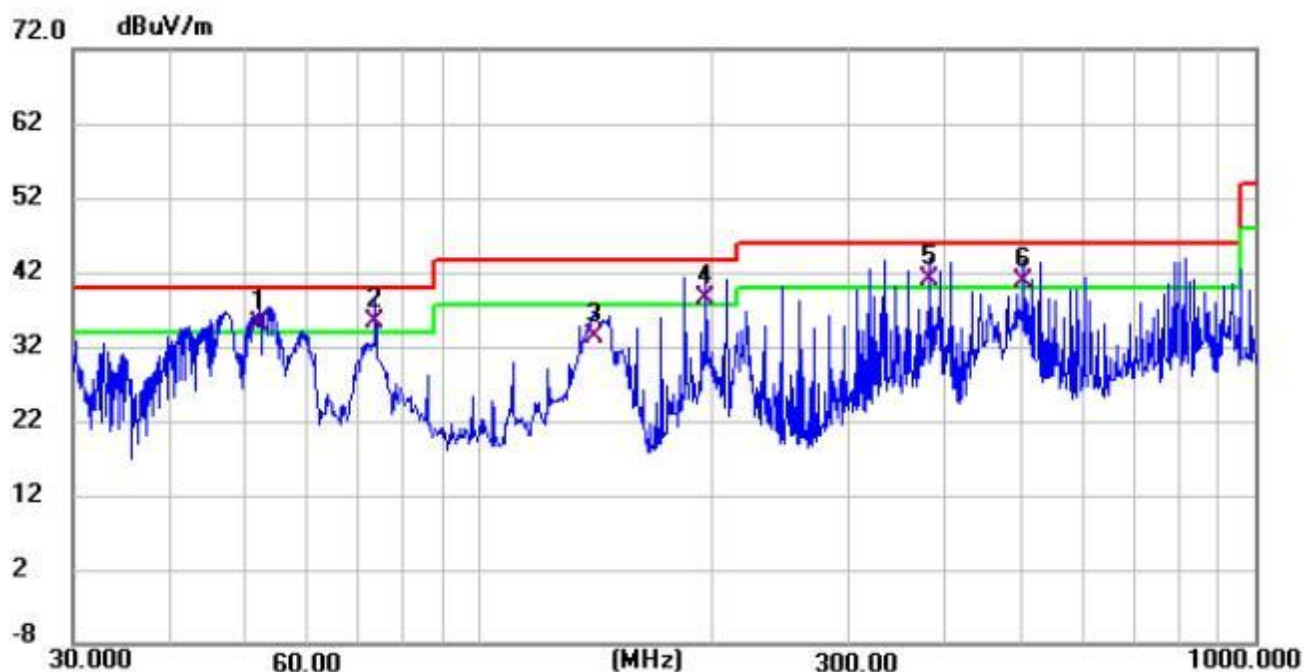


No.		Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	!	52.208	22.94	12.17	35.11	40.00	-4.89	QP
2	*	73.617	27.27	7.90	35.17	40.00	-4.83	QP
3		140.835	25.43	7.89	33.32	43.50	-10.18	QP
4	!	196.510	27.68	10.77	38.45	43.50	-5.05	QP
5	!	381.249	24.63	16.23	40.86	46.00	-5.14	QP
6	!	504.706	21.99	18.64	40.63	46.00	-5.37	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - Preamp Factor

Channel:	High	Adapter	GME72C-260230FDR
----------	------	---------	------------------

Test plot for Vertical

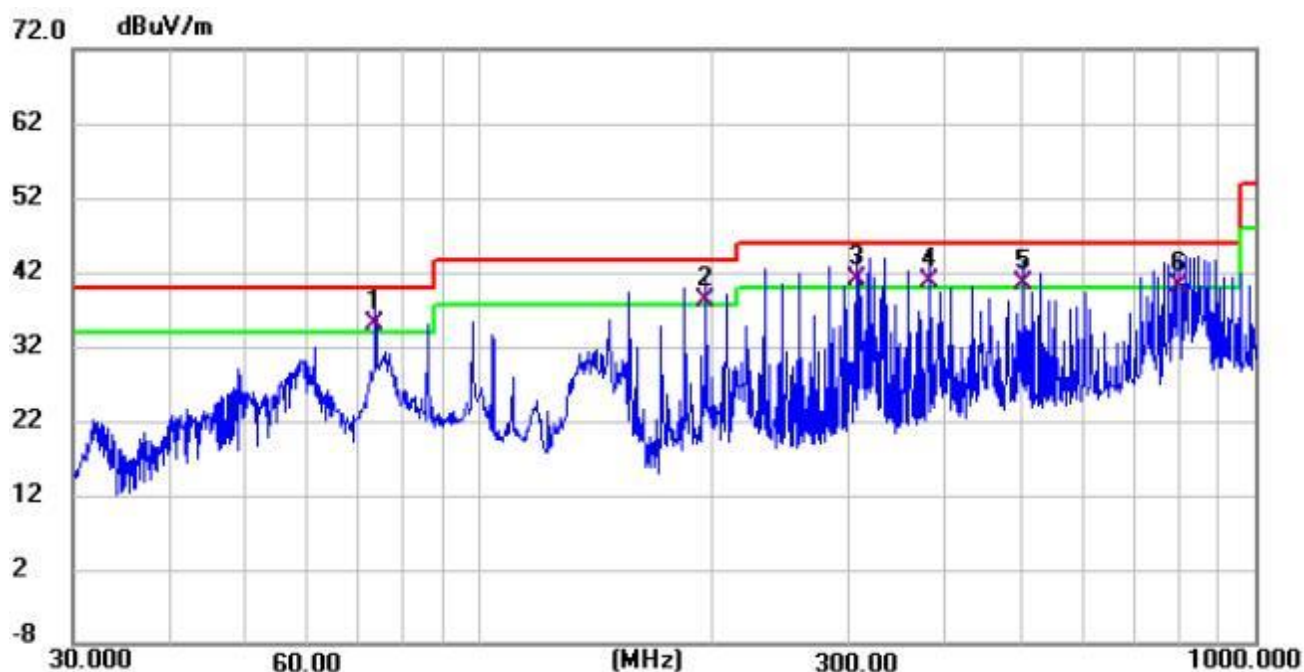

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	73.617	27.32	7.80	35.12	40.00	-4.88	QP
2 !	196.510	27.34	10.77	38.11	43.50	-5.39	QP
3 !	307.831	26.63	14.38	41.01	46.00	-4.99	QP
4 !	381.249	24.36	16.23	40.59	46.00	-5.41	QP
5 !	504.706	21.84	18.64	40.48	46.00	-5.52	QP
6 !	798.980	17.46	22.79	40.25	46.00	-5.75	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - Preamp Factor

Test Frequency 1GHz-25GHz

SKAA(FSK)mode have been tested, and the worst result(FSK) was report as below
FSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2403.5MHz									
V	4807	50.42	34.12	5.03	32.39	53.72	74	-20.28	Pk
V	4807	40.33	34.12	5.03	32.39	43.63	54	-10.37	AV
V	7210.5	41.56	32.54	6.29	35.86	51.17	74	-22.83	Pk
V	7210.5	32.42	32.54	6.29	35.86	42.03	54	-11.97	AV
V	9614	40.66	32.98	7.55	38.4	53.63	74	-20.37	Pk
V	9614	30.52	32.98	7.55	38.4	43.49	54	-10.51	AV
V	12017.5	38.03	32.09	8.93	39	53.87	74	-20.13	Pk
V	12017.5	29.58	32.09	8.93	39	45.42	54	-8.58	AV
H	4807	52.10	34.12	5.03	32.39	55.40	74	-18.60	Pk
H	4807	41.70	34.12	5.03	32.39	45.00	54	-9.00	AV
H	7210.5	42.31	32.54	6.29	35.86	51.92	74	-22.08	Pk
H	7210.5	33.41	32.54	6.29	35.86	43.02	54	-10.98	AV
H	9614	40.31	32.98	7.55	38.4	53.28	74	-20.72	Pk
H	9614	32.18	32.98	7.55	38.4	45.15	54	-8.85	AV
H	12017.5	40.07	32.09	8.93	39	55.91	74	-18.09	Pk
H	12017.5	30.74	32.09	8.93	39	46.58	54	-7.42	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2440.4MHz									
V	4880.8	51.32	34.07	5.09	32.59	54.93	74	-19.07	Pk
V	4880.8	39.69	34.07	5.09	32.59	43.30	54	-10.70	AV
V	7321.2	42.00	32.63	6.34	35.96	51.67	74	-22.33	Pk
V	7321.2	33.03	32.63	6.34	35.96	42.70	54	-11.30	AV
V	9761.6	41.11	32.92	7.59	38.4	54.18	74	-19.82	Pk
V	9761.6	32.19	32.92	7.59	38.4	45.26	54	-8.74	AV
V	12202	39.72	31.96	8.88	39.04	55.68	74	-18.32	Pk
V	12202	30.23	31.96	8.88	39.04	46.19	54	-7.81	AV
H	4880.8	50.57	34.07	5.09	32.59	54.18	74	-19.82	Pk
H	4880.8	40.38	34.07	5.09	32.59	43.99	54	-10.01	AV
H	7321.2	42.11	32.63	6.34	35.96	51.78	74	-22.22	Pk
H	7321.2	33.81	32.63	6.34	35.96	43.48	54	-10.52	AV
H	9761.6	41.37	32.92	7.59	38.4	54.44	74	-19.56	Pk
H	9761.6	30.37	32.92	7.59	38.4	43.44	54	-10.56	AV
H	12202	38.71	31.96	8.88	39.04	54.67	74	-19.33	Pk
H	12202	28.90	31.96	8.88	39.04	44.86	54	-9.14	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2477.3MHz									
V	4954.6	50.33	34.02	5.15	32.8	54.26	74	-19.74	Pk
V	4954.6	40.62	34.02	5.15	32.8	44.55	54	-9.45	AV
V	7431.9	41.60	32.71	6.4	36.05	51.34	74	-22.66	Pk
V	7431.9	33.57	32.71	6.4	36.05	43.31	54	-10.69	AV
V	9909.2	40.74	32.86	7.62	38.4	53.90	74	-20.10	Pk
V	9909.2	31.52	32.86	7.62	38.4	44.68	54	-9.32	AV
V	12386.5	39.37	31.82	8.84	39.08	55.47	74	-18.53	Pk
V	12386.5	28.61	31.82	8.84	39.08	44.71	54	-9.29	AV
H	4954.6	50.18	34.02	5.15	32.8	54.11	74	-19.89	Pk
H	4954.6	41.50	34.02	5.15	32.8	45.43	54	-8.57	AV
H	7431.9	43.29	32.71	6.4	36.05	53.03	74	-20.97	Pk
H	7431.9	33.20	32.71	6.4	36.05	42.94	54	-11.06	AV
H	9909.2	41.94	32.86	7.62	38.4	55.10	74	-18.90	Pk
H	9909.2	31.00	32.86	7.62	38.4	44.16	54	-9.84	AV
H	12386.5	39.08	31.82	8.84	39.08	55.18	74	-18.82	Pk
H	12386.5	28.93	31.82	8.84	39.08	45.03	54	-8.97	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

SKAA (FSK) mode have been tested, and the worst result(FSK) was report as below

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detector Type	Result
FSK	Low Channel: 2403.5MHz									
	H	2390	55.22	35.17	3.48	27.49	51.02	74	PK	PASS
	H	2390	47.15	35.17	3.48	27.49	42.95	54	AV	PASS
	H	2400	55.62	35.16	3.49	27.52	51.47	74	PK	PASS
	H	2400	45.56	35.16	3.49	27.52	41.41	54	AV	PASS
	V	2390	56.99	35.17	3.48	27.49	52.79	74	PK	PASS
	V	2390	47.22	35.17	3.48	27.49	43.02	54	AV	PASS
	V	2400	56.60	35.16	3.49	27.52	52.45	74	PK	PASS
	V	2400	45.27	35.16	3.49	27.52	41.12	54	AV	PASS
	High Channel: 2477.3MHz									
	H	2483.5	56.66	35.11	3.56	27.75	52.86	74	PK	PASS
	H	2483.5	46.53	35.11	3.56	27.75	42.73	54	AV	PASS
	H	2500	57.49	35.1	3.57	27.8	53.76	74	PK	PASS
	H	2500	47.20	35.1	3.57	27.8	43.47	54	AV	PASS
	V	2483.5	56.01	35.11	3.56	27.75	52.21	74	PK	PASS
	V	2483.5	57.23	35.11	3.56	27.75	53.43	54	AV	PASS
	V	2500	57.09	35.1	3.57	27.8	53.36	74	PK	PASS
	V	2500	47.29	35.1	3.57	27.8	43.56	54	AV	PASS

Remark:


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

8 Maximum Peak Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1) & RSS-247.5.4(4)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.2 Test Setup




8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
 - EIRP=Peak Output Power+Antenna Gain

8.4 Test Data

Modulation	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
FSK	0	17.295	53.641	None	20.97	PASS
	24	16.879	48.742	None		PASS
	48	17.045	50.641	None		PASS


Modulation	Channel	Peak Output Power (dBm)	Peak Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Max. Avg. Power (dBm)	Result
FSK	0	17.295	20.97	19.595	36.02	None	PASS
	24	16.879	20.97	19.179	36.02	None	PASS
	48	17.045	20.97	19.345	36.02	None	PASS

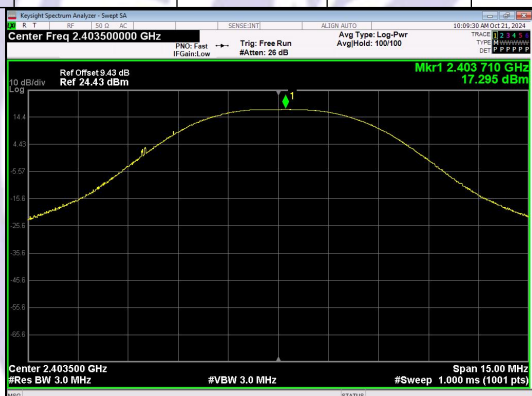

Peak Output Power
FSK_Channel 00



Peak Output Power
FSK_Channel 24

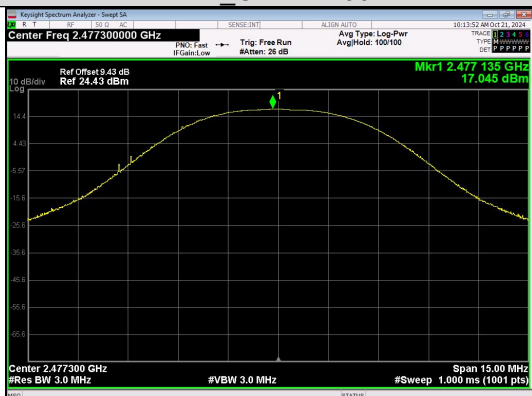


Peak Output Power
FSK_Channel 48

9 20DB Occupy Bandwidth & 99% OCB Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(2) RSS-Gen 6.7
---------------	---

9.2 Test Setup



9.3 Test Procedure


Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


9.4 Test Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	99% Bandwidth (MHz)	Result
FSK	Lowest	2.333	2.3733	Pass
	Middle	2.194	2.3430	
	Highest	2.212	2.3732	

99% Bandwidth

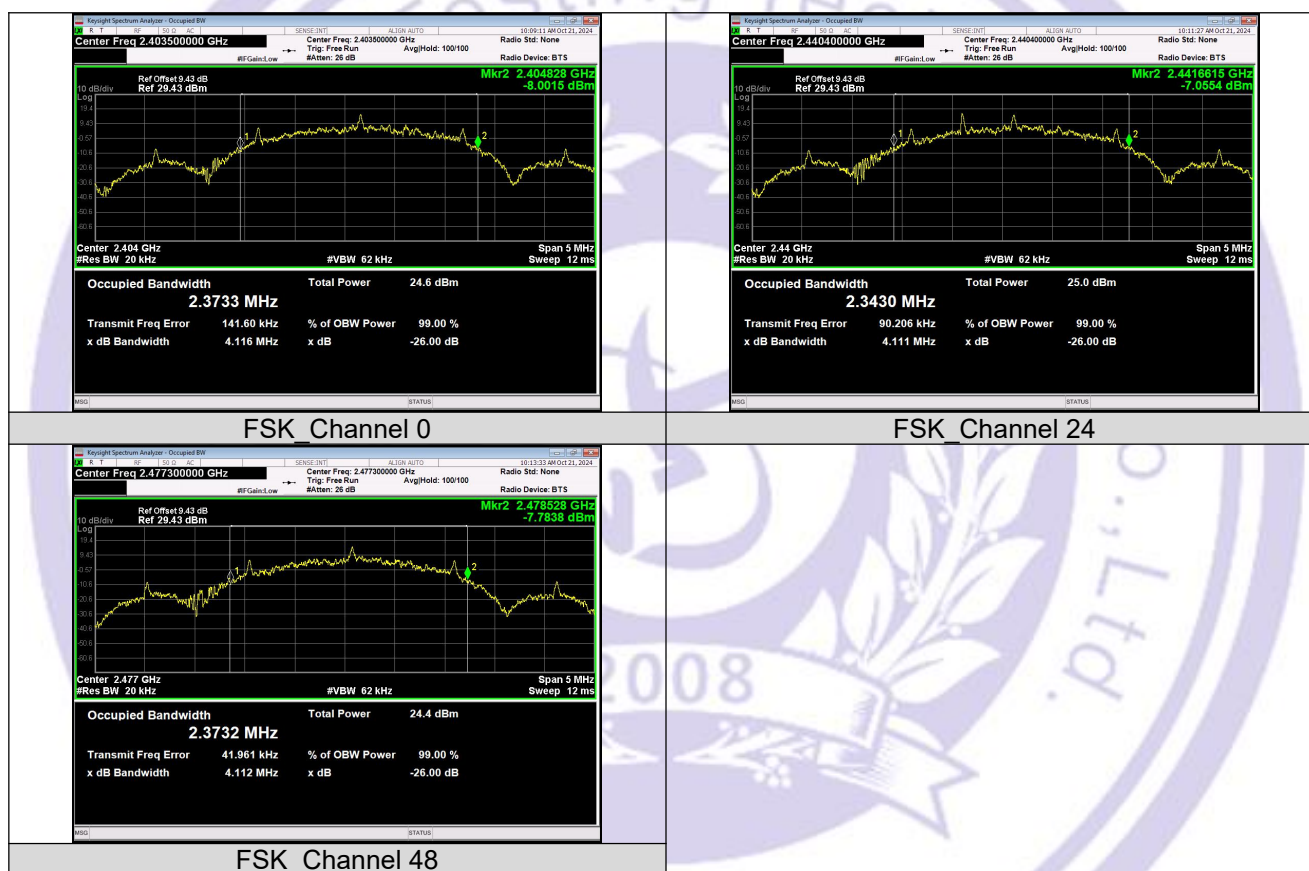

20dB Emission

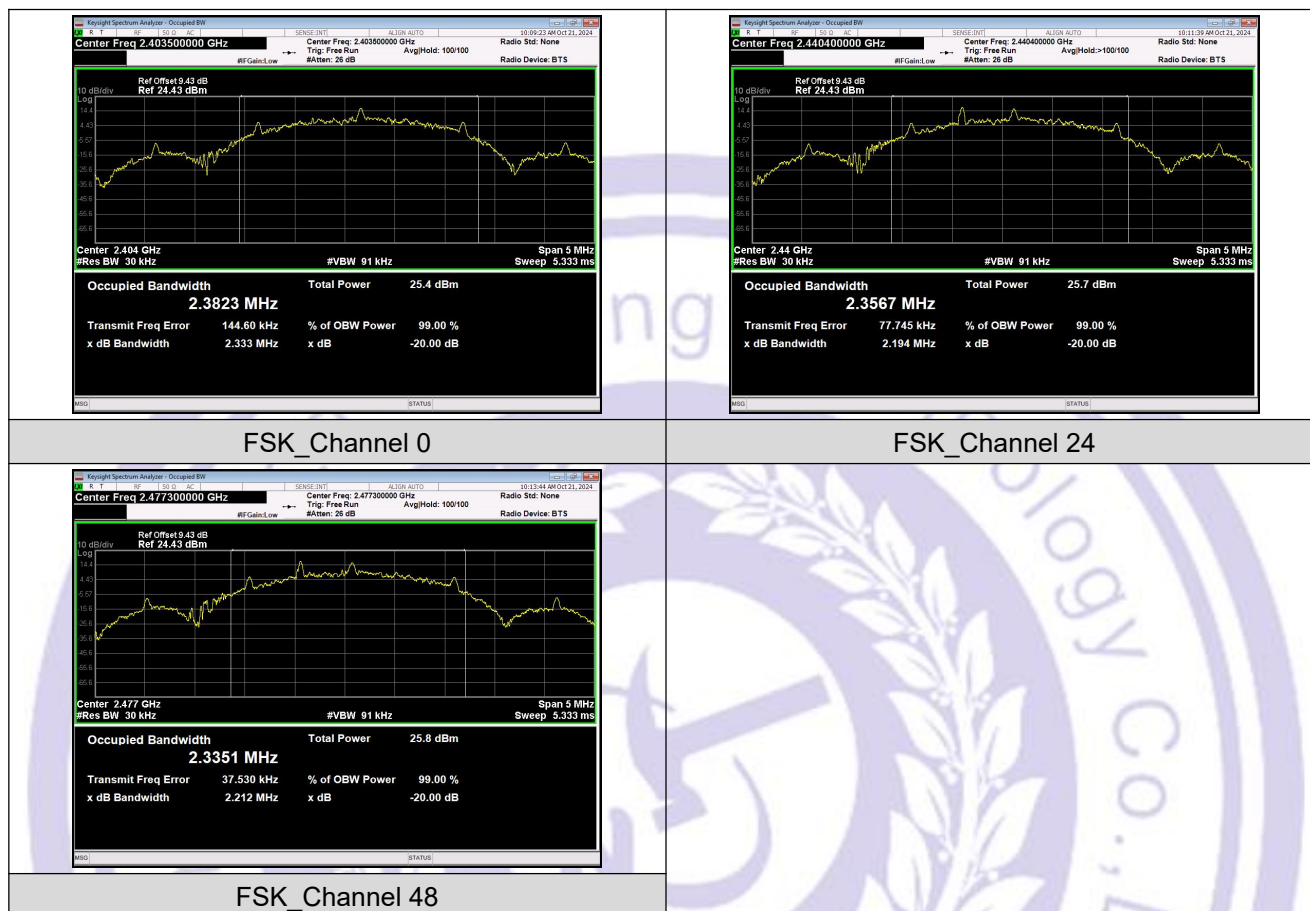


10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	FSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test worst mode

Modulation	Channel	Separation (MHz)	Limit(MHz)	Result
FSK	0	1.5242	1.477	PASS
FSK	24	2.0462	1.463	PASS
FSK	48	2.0617	1.561	PASS




11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	≥15 channels

11.2 Test Setup




11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

11.4 Test Data

Mode	Frequency (MHz)	Num of Hopping Frequencies		Verdict
		ANT1	Limit	
FSK	HOPP	49	≥ 15	Pass

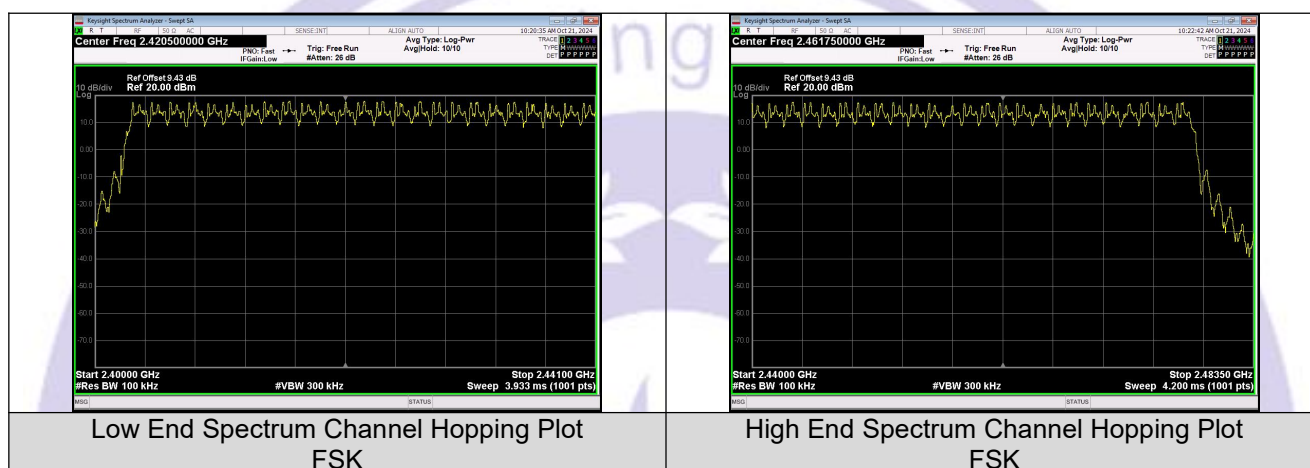


12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	0.4 sec

12.2 Test Setup




12.3 Test Procedure


The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

12.4 Test Data

Modulation	Channel	Pulse Width (ms)	Number of Pulses in 19.6 seconds	Dwell Time (ms)	Limit (ms)	Result
FSK	CH0 (2403.5MHz)	4.73	72	340.56	< 400	PASS
	CH24 (2440.4MHz)	4.73	72	340.56		PASS
	CH48 (2477.3MHz)	4.72	72	339.84		PASS

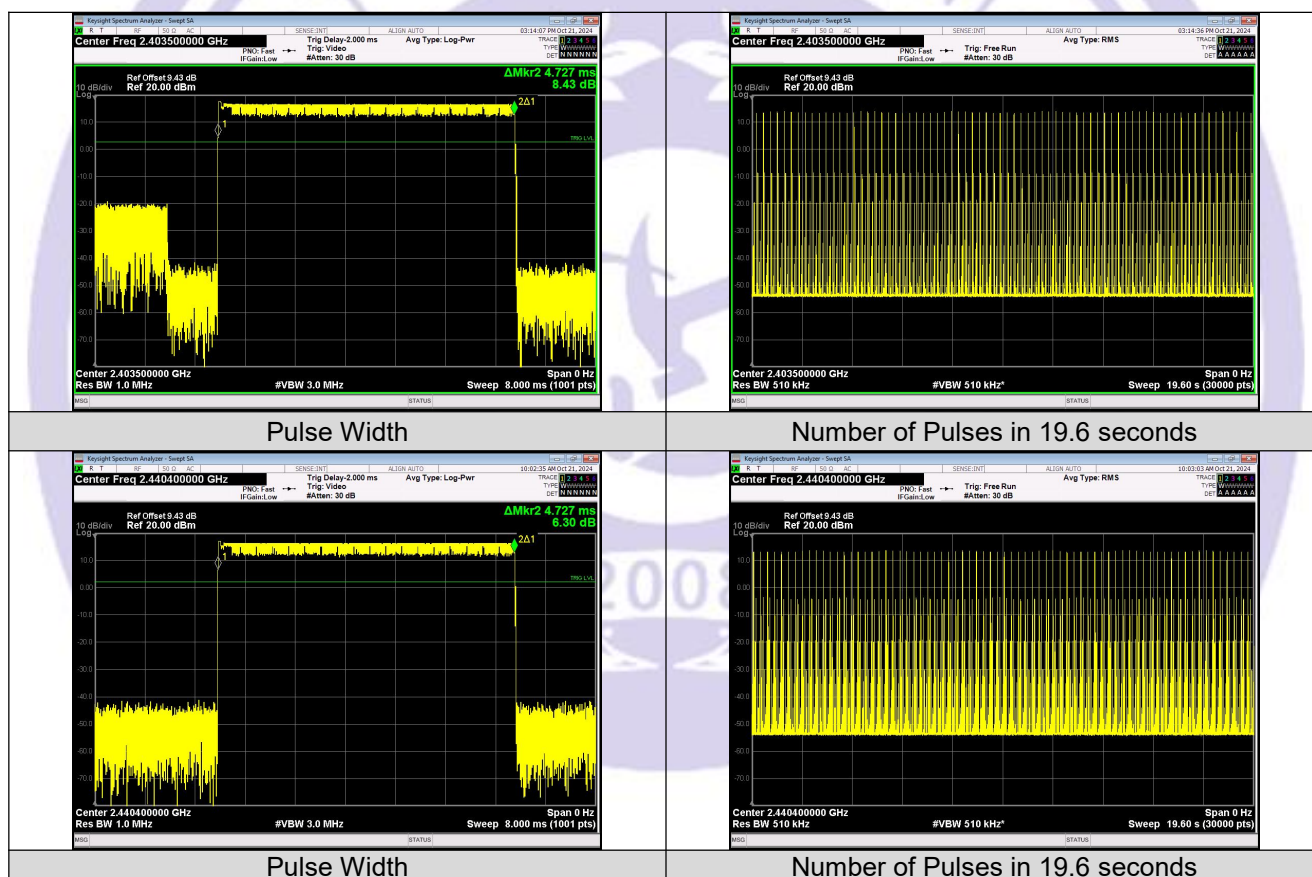

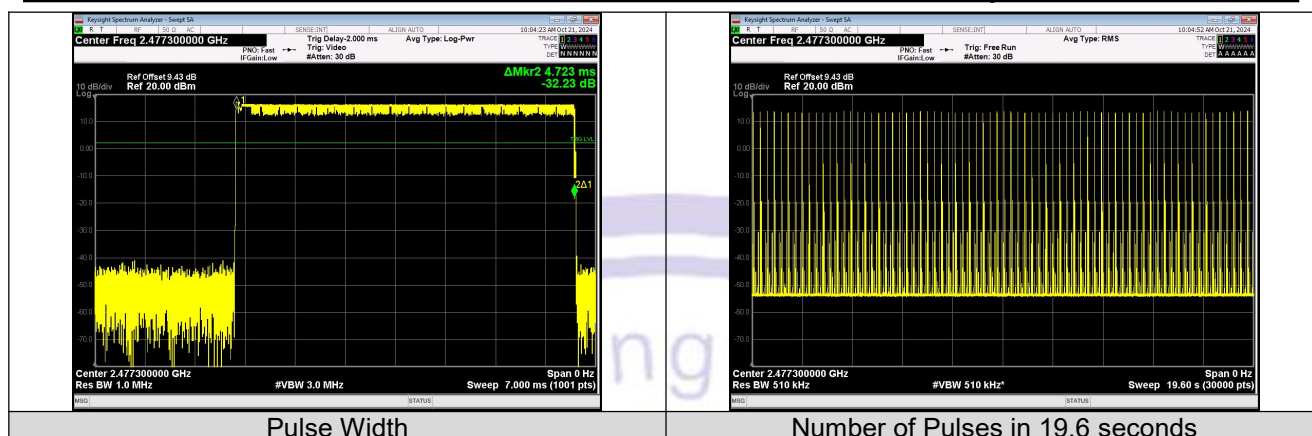


13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d) & RSS-247 5.5
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


13.4 Test Data



Non-Hopping

Modulation	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
FSK	0	2397.80	-32.474	-2.59	-29.884	PASS
		2398.55	-25.780	-2.59	-23.190	PASS
		2400.00	-30.129	-2.59	-27.539	PASS
	24	21137.7	-43.725	-3.09	-40.635	PASS
		2483.50	-30.553	-2.95	-27.603	PASS
		2485.86	-42.207	-2.95	-39.257	PASS

Hopping

Modulation	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
FSK	48	2400.00	-23.442	-2.41	-21.032	PASS
		2483.50	-31.522	-2.86	-28.662	PASS

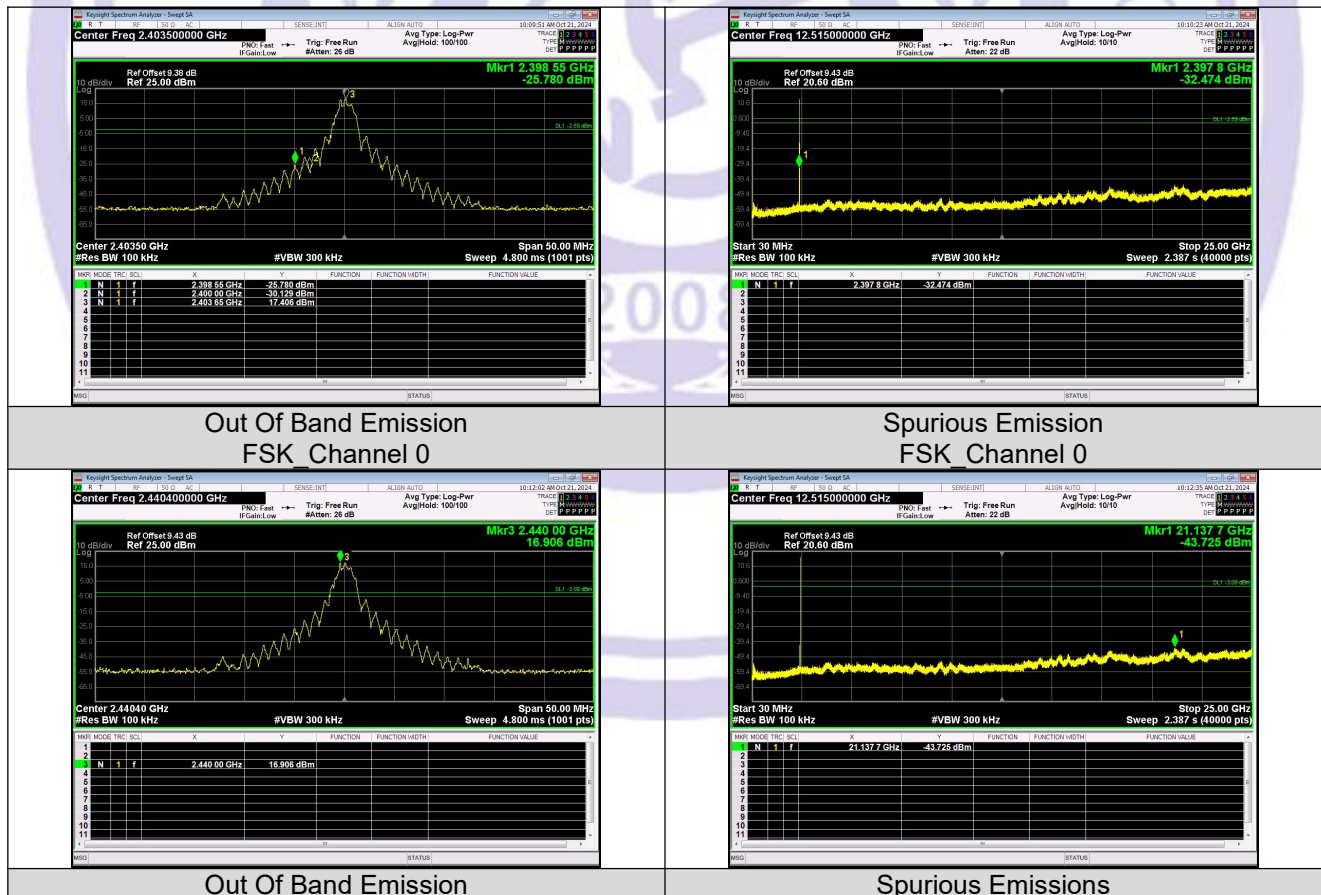

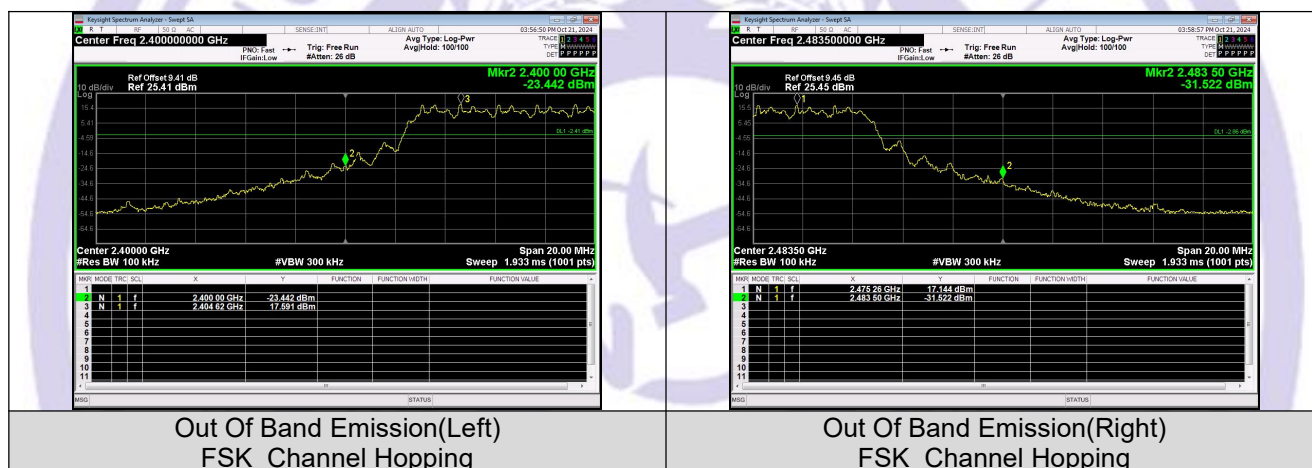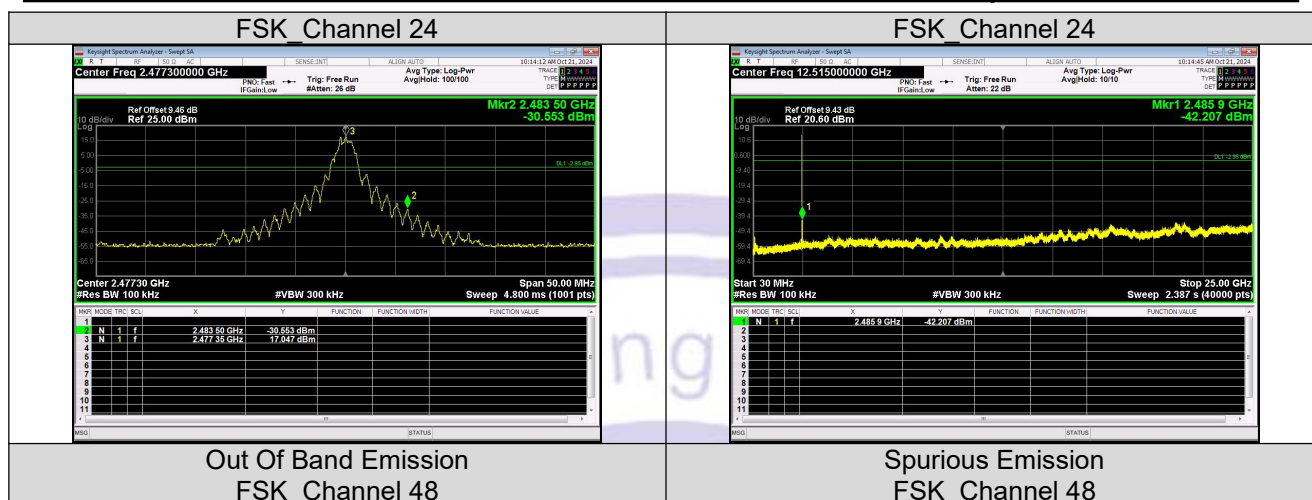

13.PSEUDORANDOM FREQUENCY HOPPING SEQUENCE

For 47 CFR Part 15C section 15.247(a)(1) requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5 and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register

is initialized with nine ones.

Number of shift register stages: 9


Length of pseudo-random sequence: $2^9 - 1 = 511$

bits Longest sequence of zeros: 8 (non-inverted signal)

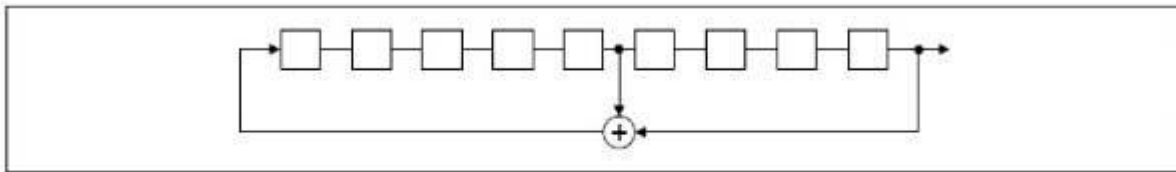

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

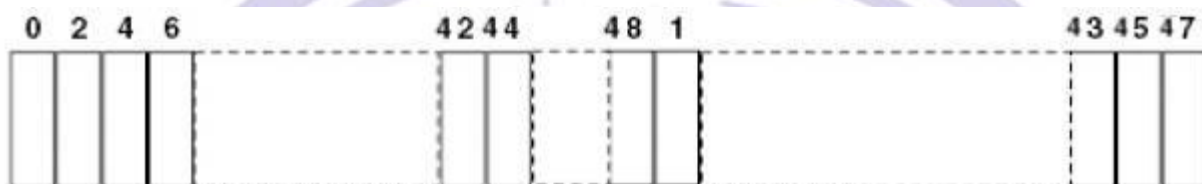

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c) & RSS-Gen 6.8
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is Discrete Dipole Antenna which permanently attached, and the best case gain of the antenna is 2.30 dBi. It complies with the standard requirement.

15 APPENDIX I -- TEST SETUP PHOTOGRAPH

Please see the attachment for details.



16 APPENDIX II -- EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

