



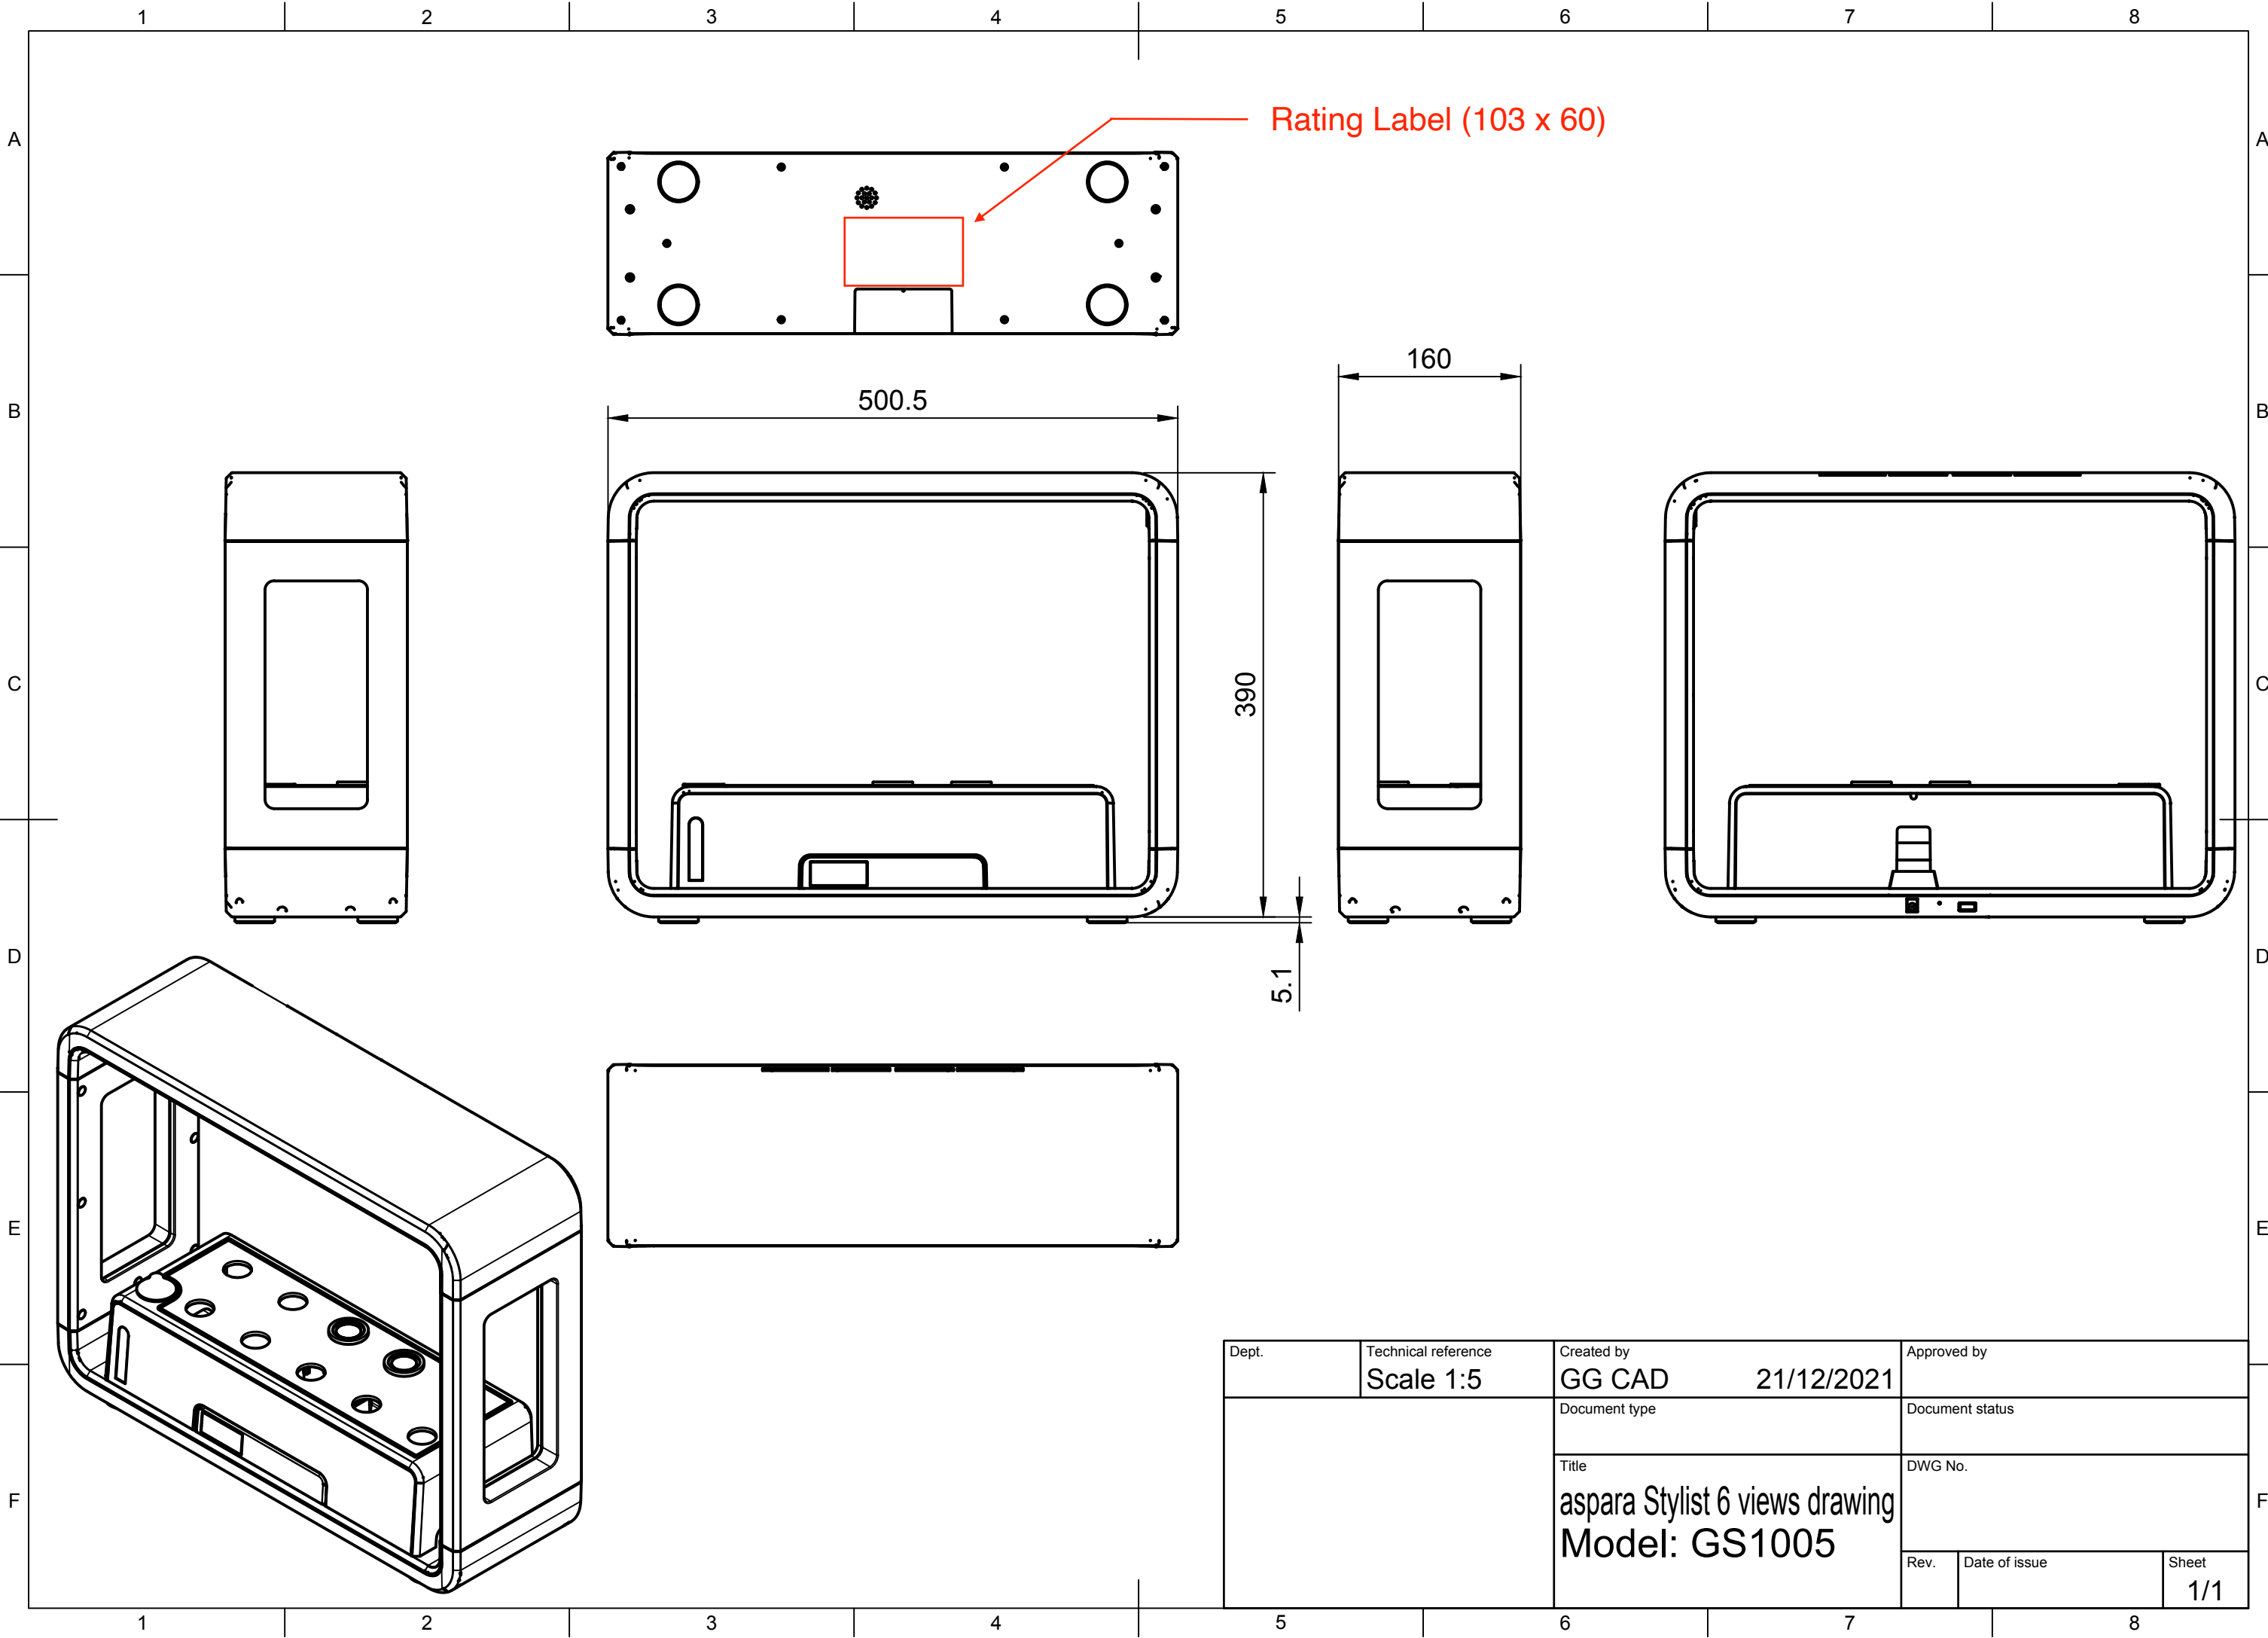

Dept.	Technical reference Scale 1:5	Created by GG CAD 21/12/2021	Approved by	
		Document type	Document status	
		Title aspara Stylist 6 views drawing Model: GS1005	DWG No.	
		Rev.	Date of issue	Sheet 1/1

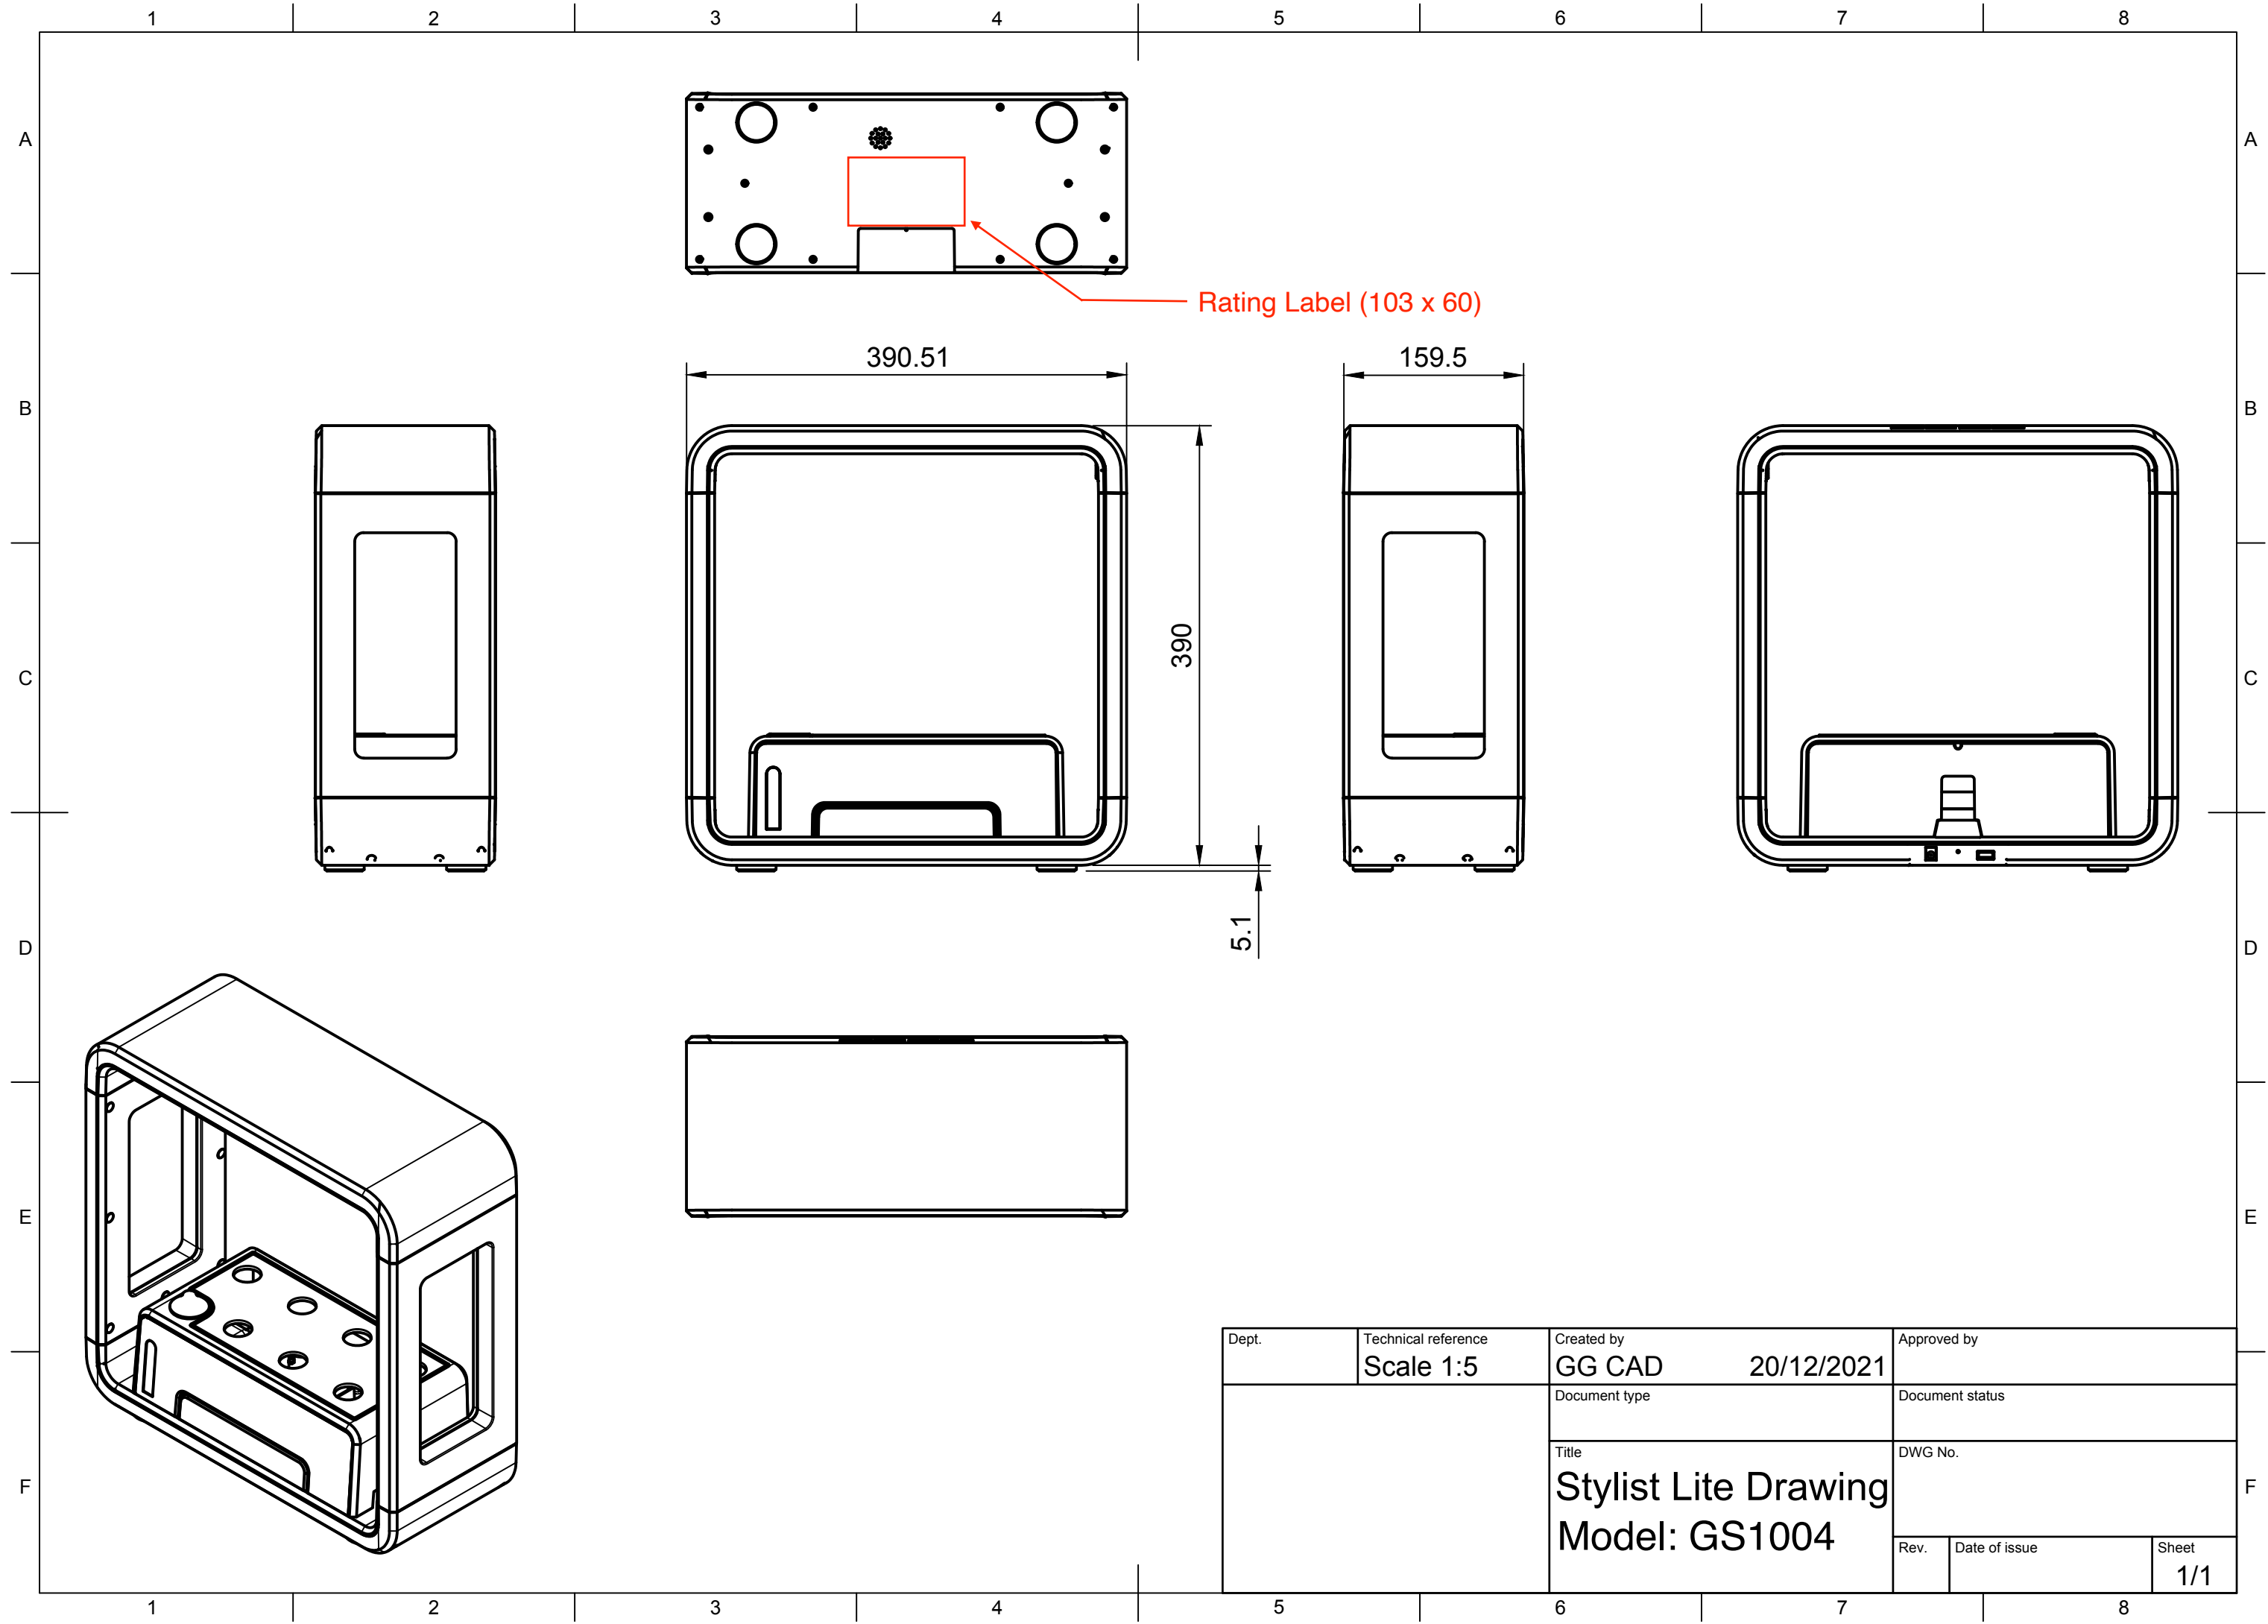

Dept.	Technical reference Scale 1:5	Created by GG CAD 20/12/2021	Approved by	
			Document type	
			Document status	
			DWG No.	
			Rev.	
			Date of issue	Sheet 1/1

GS1005

Label on the bottom

103 X 60 mm

DC IN

Reset



Horticultural LED luminaire Model: GS1005



Intertek
5014528

Rated: 24VDC, 60W
CONFORMS TO UL STD. 8800 & UL STD. 153
CERTIFIED TO CSA STD. C22.2 NO. 250.4
MMYY Made in China

FCC ID: 2ATARA0AS0001 IC: 25300-0A50001

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received,
including interference that may cause undesired operation.



Warning:
• To reduce the risk of fire or electric shock,
DO NOT remove any of the appliance's covers or panels: There are
NO user-serviceable parts inside.
• Must be used with power adaptor and power cord from aspara®.
• DO NOT use unauthorized attachments with the appliance.

Attention
• Pour réduire le risque de choc électrique,
NE retirez AUCUN des couvercles ou panneaux de l'appareil. Il n'y
a AUCUNE pièce réparable par l'utilisateur à l'intérieur.
• Doit être utilisé avec l'adaptateur d'alimentation et le cordon
d'alimentation d'aspara
• NE PAS utiliser d'accessoires non autorisés avec l'appareil.

SUITABLE FOR DAMP LOCATIONS
CONVIENT AUX EMPLACEMENTS HUMIDES
DO NOT SUBMERSE
NE PAS IMMERGER
NOT FOR INTRACANOPY USE
PAS POUR L'UTILISATION D'INTRACANOPIE
For use with Class 2, 24VDC, max 2.5A power supply.
Pour une utilisation avec une alimentation de classe 2,
24V CC, max 2,5 A.
SUITABLE FOR OPERATION IN AMBIENT
NOT EXCEEDING 40°C
PEUT ÊTRE UTILISÉ À UNE TEMPÉRATURE AMBIANTE
N'EXCÉDANT PAS 40°C

GS1004

Label on the bottom

103 X 60 mm

DC IN

Reset



Horticultural LED luminaire Model: GS1004



Intertek
5014528

Rated: 24VDC, 36W
CONFORMS TO UL STD. 8800 & UL STD. 153
CERTIFIED TO CSA STD. C22.2 NO. 250.4
MMYY Made in China

FCC ID: 2ATARA0AS0001 IC: 25300-0A50001

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received,
including interference that may cause undesired operation.



Warning:
• To reduce the risk of fire or electric shock,
DO NOT remove any of the appliance's covers or panels: There are
NO user-serviceable parts inside.
• Must be used with power adaptor and power cord from aspara®.
• DO NOT use unauthorized attachments with the appliance.

Attention
• Pour réduire le risque de choc électrique,
NE retirez AUCUN des couvercles ou panneaux de l'appareil. Il n'y
a AUCUNE pièce réparable par l'utilisateur à l'intérieur.
• Doit être utilisé avec l'adaptateur d'alimentation et le cordon
d'alimentation d'aspara
• NE PAS utiliser d'accessoires non autorisés avec l'appareil.

SUITABLE FOR DAMP LOCATIONS
CONVIENT AUX EMPLACEMENTS HUMIDES
DO NOT SUBMERSE
NE PAS IMMERGER
NOT FOR INTRACANOPY USE
PAS POUR L'UTILISATION D'INTRACANOPIE
For use with Class 2, 24VDC, max 1.5A power supply.
Pour une utilisation avec une alimentation de classe 2,
24V CC, max 1,5 A.
SUITABLE FOR OPERATION IN AMBIENT
NOT EXCEEDING 40°C
PEUT ÊTRE UTILISÉ À UNE TEMPÉRATURE AMBIANTE
N'EXCÉDANT PAS 40°C