

FCC Test Report

Report No.: 2405U58689EB

Applicant: SHENZHEN COBAN ELECTRONICS CO., LTD

Address: 5/F, Block 22, Wisdomland Business Park, Guankou 2nd Road,
Nantou, Nanshan District ,Shenzhen, Guangdong, China.518052.

Product Name: GPS TRACKER

Product Model: 407

Multiple Models: GPS-407, BN-407

Trade Mark: BAANOOL, 

FCC ID: 2ATUK-BN-407

Standards: FCC CFR Title 47 Part 2, 22H, 24E, 27

Test Date: 2024-07-01 to 2024-07-13

Test Result: Complied

Issue Date: 2024-07-16

Reviewed by:

Abel chen

Approved by:

Jacob Kong

Abel Chen
Project Engineer

Jacob Kong
Manager

Prepared by:

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen,
Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-07-16	Original

Contents

1	General Information	4
1.1	Client Information.....	4
1.2	Product Description of EUT	4
1.3	Measurement Uncertainty	5
1.4	Laboratory Location	5
1.5	Test Methodology.....	5
2	Description of Measurement.....	6
2.1	Test Frequency of Low/Middle/High Channels	6
2.2	Test Configuration for LTE bands	6
2.3	Test Auxiliary Equipment	7
2.4	Test Setup.....	8
2.5	Test Procedure.....	10
2.6	Measurement Method.....	11
2.7	Measurement Equipment	12
3	Test Results	13
3.1	Test Summary.....	13
3.2	Limit	14
3.3	RF Conducted Test Data	19
3.3.1	RF Output Power&ERP/EIRP.....	19
3.3.2	Peak-to-average ratio (PAR)	26
3.3.3	26dB and 99% Bandwidth	28
3.3.4	Conducted Spurious Emissions.....	28
3.3.5	Out of band emission, Band Edge.....	28
3.3.6	FREQUENCY STABILITY	29
3.4	Radiated Spurious emission Test Data.....	33
4	Test Setup Photo.....	35
5	E.U.T Photo	36

1 General Information

1.1 Client Information

Applicant:	SHENZHEN COBAN ELECTRONICS CO., LTD
Address:	5/F, Block 22, Wisdomland Business Park, Guankou 2nd Road, Nantou, Nanshan District ,Shenzhen, Guangdong, China.518052.
Manufacturer:	SHENZHEN COBAN ELECTRONICS CO., LTD
Address:	602 &702, Bldg. C2, Xinqiao Industrial Park, Tongfuyu Industrial Area, Xinhe Avenue, Gonghe Community, Shajing Sub-District, Bao'an District, Shenzhen, Guangdong, China

1.2 Product Description of EUT

The EUT is a GPS TRACKER that contains BLE and LTE radios, this report covers the full testing of the LTE radio.

Sample Serial number	2MY6-2 for RE test, 2MY6-3 for RF conducted test (assigned by WATC)				
Sample Received Date	2024-06-14				
Sample Status	Good Condition				
Frequency Range	Band	TX Frequency (MHz)	RX Frequency (MHz)	Max. Conducted Power (dBm)	Antenna Gain [#] (dBi)
Maximum Conducted Power	LTE B2	1850-1910	1930-1990	23.37	0.59
Antenna Gain	LTE B4	1710-1755	2110-2155	22.32	-0.84
	LTE B5	824-849	869-894	23.48	-0.04
	LTE B7	2500-2570	2620-2690	22.56	0.62
Modulation Technology	QPSK, 16QAM				
UE Category	LTE Cat-1				
Power Supply	DC 3.7V from battery or DC 5V from Micro-USB port				
Adapter Information	N/A				
Modification	Sample No Modification by the test lab				

1.3 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Emissions, Conducted		1.75dB
Conducted Power		0.74dB
Frequency Error		150Hz
Bandwidth		0.34%
<p>Note 1: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.</p> <p>Note 2: The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)</p>		

1.4 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: qa@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.5 Test Methodology

FCC CFR Title 47 Part 2, 22H, 24E, 27

ANSI C63.26-2015

FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

FCC KDB 971168 D02 Misc Rev Approv License Devices v02r02

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

2 Description of Measurement

2.1 Test Frequency of Low/Middle/High Channels

Band	Bandwidth (MHz)	Low Channel (MHz)	Middle Channel (MHz)	High Channel (MHz)
LTE B2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE B4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE B5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE B7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560

2.2 Test Configuration for LTE bands

Test Items	Band	Bandwidth (MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
RF Output Power ERP/EIRP	2	√	√	√	√	√	√	√	√	√	√	√	√	√	√
	4	√	√	√	√	√	√	√	√	√	√	√	√	√	√
	5	√	√	√	√	-	-	√	√	√	√	√	√	√	√
	7	-	-	√	√	√	√	√	√	√	√	√	√	√	√
Peak-to-Average Ratio	2				√			√	√	√		√	√	√	√
	4				√			√	√	√		√	√	√	√
	5				√	-	-	√	√	√		√	√	√	√
	7	-	-		√			√	√	√		√	√	√	√
26dB and 99% Bandwidth	2	√	√	√	√	√	√	√	√			√	√	√	√
	4	√	√	√	√	√	√	√	√			√	√	√	√
	5	√	√	√	√	-	-	√	√			√	√	√	√
	7	-	-	√	√	√	√	√	√			√	√	√	√
Band Edge	2	√	√	√	√	√	√	√	√	√		√	√		√
	4	√	√	√	√	√	√	√	√	√		√	√		√
	5	√	√	√	√	-	-	√	√	√		√	√		√
	7	-	-	√	√	√	√	√	√	√		√	√		√
Conducted Spurious Emission	2	√	√	√	√	√	√	√		√		√	√	√	√
	4	√	√	√	√	√	√	√		√		√	√	√	√
	5	√	√	√	√	-	-	√		√		√	√	√	√
	7	-	-	√	√	√	√	√		√		√	√	√	√
Frequency Stability	2	√						√	√			√	√		√
	4	√						√	√			√	√		√

	5				√	-	-	√	√			√		√	
	7	-	-	√				√	√			√	√		√
Radiated Spurious Emission	2	√						√		√			√	√	√
	4	√						√		√			√	√	√
	5	√				-	-	√		√			√	√	√
	7	-	-	√				√		√			√	√	√

Note:

1. "√" means the configuration was chosen for testing
2. "-" means the not support the bandwidth

Worst-Case Configuration:

For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report

For radiated emissions, measurement was investigated from 30MHz to 10 times of fundamental, the worst case bandwidth, RB size and modulation test data was recorded.


2.3 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
MEIZU	adapter	unknown	unknown


2.4 Test Setup

1) Radiated emission measurement:

30MHz-1GHz (3m SAC)

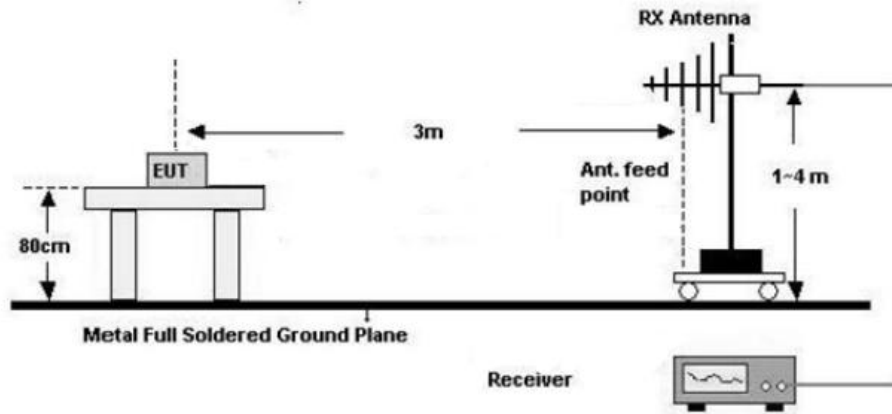


Above 1GHz (3m FAC)

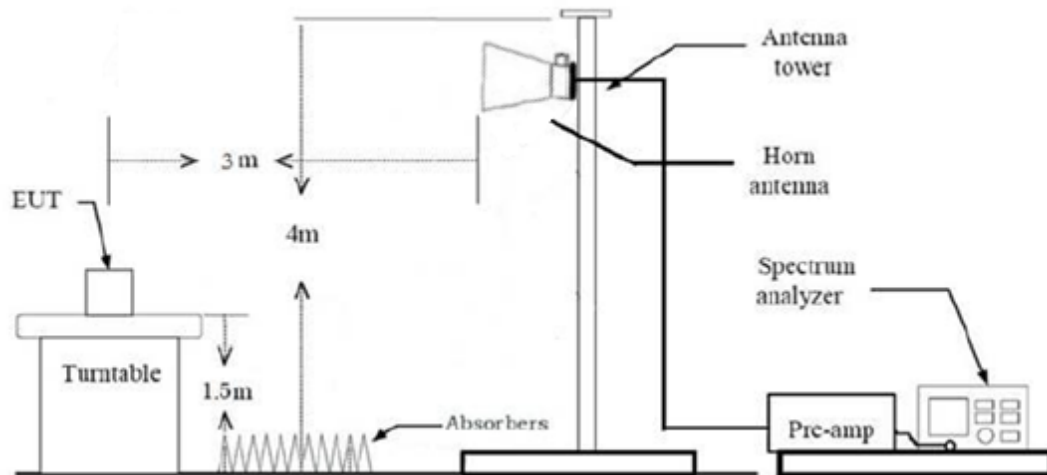


2) RF Conducted Test


For RF Output Power test

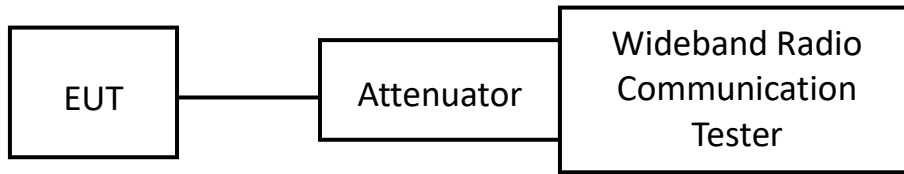

For Bandwidth/Band edge/ PAR/Conducted spurious emissions Test

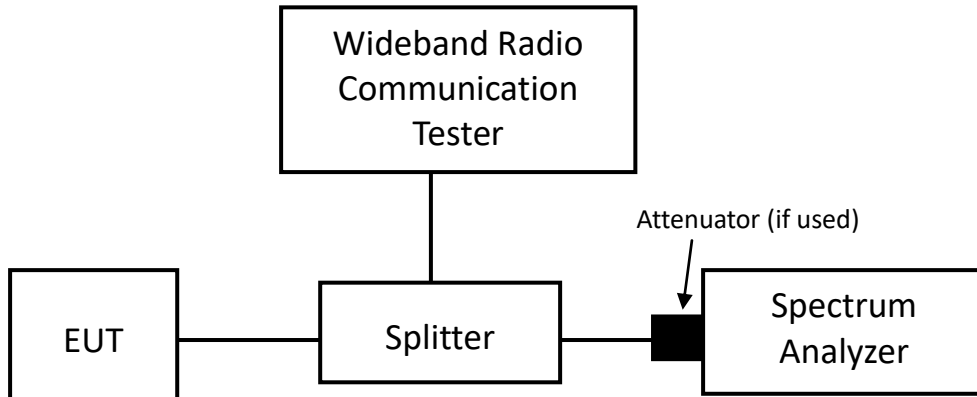

For Frequency Stability test

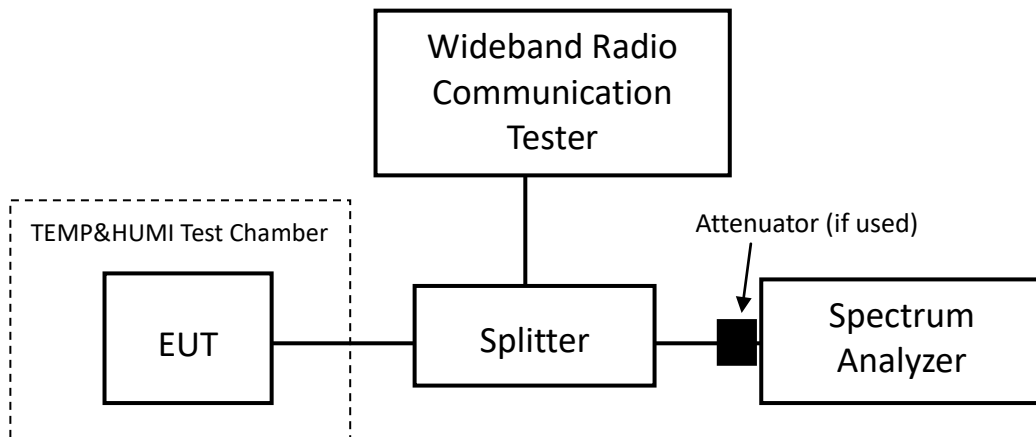

2.5 Test Procedure

Radiated Emission Procedure:

a) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

b) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Wideband Radio Communication Tester or Spectrum analyzer) through Attenuator and RF cable.
2. The cable assembly insertion loss of 7dB (including 6.0 dB Splitter and 1.0 dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 1.0dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.6 Measurement Method

Description of Test	Measurement Method
RF Output Power	ANSI C63.26-2015 section 5.2
ERP/EIRP	ANSI C63.26-2015 section 5.2.5.5
Peak-to-Average Ratio	ANSI C63.26-2015 section 5.2.3.4
26dB and 99% Bandwidth	ANSI C63.26-2015 section 5.4
Band Edge	ANSI C63.26-2015 section 5.7.3
Conducted Spurious Emissions	ANSI C63.26-2015 section 5.7.4
Frequency Stability	ANSI C63.26-2015 section 5.6
Radiated Spurious Emissions	ANSI C63.26-2015 section 5.5.4

2.7 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2024/6/4	2025/6/3
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2024/6/4	2025/6/3
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2024/6/4	2025/6/3
COM-POWER	preamplifier	PAM-118A	18040152	2024/6/4	2025/6/3
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2026/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2026/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2026/7/9
N/A	Coaxial Cable	NO.9	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.14	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.15	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.16	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.17	N/A	2024/6/4	2025/6/3
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2024/6/4	2025/6/3
BACL	TEMP&HUMI Test Chamber	BTH-150	30022	2023/7/12	2024/7/11
HP	Power Splitter	11667A	1610A	2023/7/26	2024/7/25
FLUKE	Digital Multimeter	15B+	N/A	2024/6/6	2025/6/5
ROHDE& SCHWARZ	WIDEBAND RADIO COMMUNICATION TESTER	CMW500	116218	2023/9/12	2024/9/11

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Compliance
FCC§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53;	26dB and 99% Bandwidth	Compliance
FCC§ 2.1051; § 22.917; § 24.238; §27.53; §90.691	Conducted Spurious Emissions	Compliance
FCC§ 22.917; § 24.238; §27.53;	Out of band emission, Band Edge	Compliance
FCC§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance
FCC§ 2.1053; § 22.917; § 24.238; §27.53;	Radiated Spurious Emissions	Compliance

3.2 Limit

Test items	Limit																																				
RF Output Power	<p>FCC §22.913:</p> <p>(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.</p> <p>(d) Power measurement. Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:</p> <p>(1) A Commission-approved average power technique (see FCC Laboratory's Knowledge Database); or</p> <p>(2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.</p>																																				
Unwanted Emissions (Out of band emission and spurious)	<p>FCC §22.917:</p> <p>(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.</p> <p>(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:</p> <p>(1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.</p> <p>(2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz</p>																																				
Frequency stability	<p>FCC §22.355:</p> <p>Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.</p> <table><tr><th colspan="4">Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services</th></tr><tr><th>Frequency range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile >3 watts (ppm)</th><th>Mobile ≤3 watts (ppm)</th></tr><tr><td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr><tr><td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr><tr><td>450 to 512</td><td>2.5</td><td>5.0</td><td>5.0</td></tr><tr><td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr><tr><td>928 to 929</td><td>5.0</td><td>n/a</td><td>n/a</td></tr><tr><td>929 to 960</td><td>1.5</td><td>n/a</td><td>n/a</td></tr><tr><td>2110 to 2220</td><td>10.0</td><td>n/a</td><td>n/a</td></tr></table>	Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services				Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5.0	821 to 896	1.5	2.5	2.5	928 to 929	5.0	n/a	n/a	929 to 960	1.5	n/a	n/a	2110 to 2220	10.0	n/a	n/a
Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services																																					
Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)																																		
25 to 50	20.0	20.0	50.0																																		
50 to 450	5.0	5.0	50.0																																		
450 to 512	2.5	5.0	5.0																																		
821 to 896	1.5	2.5	2.5																																		
928 to 929	5.0	n/a	n/a																																		
929 to 960	1.5	n/a	n/a																																		
2110 to 2220	10.0	n/a	n/a																																		

Test items	Limit
RF Output Power	<p>FCC §24.232:</p> <p>(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.</p> <p>(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.</p>
Unwanted Emissions (Out of band emission and spurious)	<p>FCC §24.238:</p> <p>The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.</p> <p>(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.</p> <p>(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.</p> <p>(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.</p> <p>(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.</p>
Frequency stability	<p>FCC §24.235:</p> <p>The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.</p>

Test items	Limit
RF Output Power	<p>FCC §27.50:</p> <p>(a)(3) Mobile and portable stations.</p> <p>(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.</p> <p>(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.</p> <p>(iii) Automatic transmit power control. Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.</p> <p>(iv) Prohibition on external vehicle-mounted antennas. The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.</p> <p>(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.</p> <p>(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.</p> <p>(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.</p> <p>(h) The following power limits shall apply in the BRS and EBS:</p> <p>(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.</p>

<p>Unwanted Emissions (Out of band emission and spurious)</p>	<p>FCC §27.53:</p> <p>(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:</p> <p>(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:</p> <p>(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;</p> <p>(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;</p> <p>(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.</p> <p>(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:</p> <p>(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;</p> <p>(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;</p> <p>(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;</p> <p>(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;</p> <p>(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;</p> <p>(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.</p>
--	---

	<p>(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.</p> <p>(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.</p> <p>(h) AWS emission limits (1) <i>General protection levels.</i> Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.</p> <p>(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.</p>
Frequency stability	<p>FCC §27.54:</p> <p>The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.</p>

3.3 RF Conducted Test Data

Test Date:	2024-07-01~2024-07-03	Test By:	Ryan Zhang
Environment condition:	Temperature: 23.1~23.6°C; Relative Humidity:57~66%; ATM Pressure: 100.5~101.3kPa		

3.3.1 RF Output Power&ERP/EIRP

LTE Band 2

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	23.17	23.27	23.25	23.76	23.86	23.84
		RB1#3	23.09	23.26	23.21	23.68	23.85	23.80
		RB1#5	23.37	23.25	23.11	23.96	23.84	23.70
		RB3#0	23.13	23.02	22.99	23.72	23.61	23.58
		RB3#3	22.99	23.07	23.04	23.58	23.66	23.63
		RB6#0	22.12	22.07	22.10	22.71	22.66	22.69
	16QAM	RB1#0	21.62	21.70	21.89	22.21	22.29	22.48
		RB1#3	21.91	21.81	21.91	22.50	22.40	22.50
		RB1#5	21.35	21.51	21.43	21.94	22.10	22.02
		RB3#0	22.14	22.20	22.28	22.73	22.79	22.87
		RB3#3	22.11	22.28	22.24	22.70	22.87	22.83
		RB6#0	21.12	21.08	21.02	21.71	21.67	21.61
3.0	QPSK	RB1#0	22.70	22.72	22.56	23.29	23.31	23.15
		RB1#8	22.48	22.62	22.56	23.07	23.21	23.15
		RB1#14	22.63	22.57	22.56	23.22	23.16	23.15
		RB6#0	21.82	21.91	21.76	22.41	22.50	22.35
		RB6#9	21.96	21.89	21.97	22.55	22.48	22.56
		RB15#0	22.02	22.01	22.04	22.61	22.60	22.63
	16QAM	RB1#0	21.91	21.83	21.87	22.50	22.42	22.46
		RB1#8	21.83	21.84	21.84	22.42	22.43	22.43
		RB1#14	21.82	21.77	21.81	22.41	22.36	22.40
		RB6#0	20.59	20.65	20.75	21.18	21.24	21.34
		RB6#9	20.67	20.61	20.63	21.26	21.20	21.22
		RB15#0	20.88	20.85	21.04	21.47	21.44	21.63
5.0	QPSK	RB1#0	22.80	22.91	22.92	23.39	23.50	23.51
		RB1#13	23.03	22.88	22.97	23.62	23.47	23.56

		RB1#24	22.68	22.70	22.77	23.27	23.29	23.36
		RB15#0	21.76	21.77	21.70	22.35	22.36	22.29
		RB15#10	21.82	21.83	21.89	22.41	22.42	22.48
		RB25#0	21.88	21.90	21.86	22.47	22.49	22.45
	16QAM	RB1#0	21.17	21.22	21.13	21.76	21.81	21.72
		RB1#13	21.08	21.01	21.04	21.67	21.60	21.63
		RB1#24	21.20	21.16	21.03	21.79	21.75	21.62
		RB15#0	20.71	20.76	20.82	21.30	21.35	21.41
		RB15#10	20.69	20.59	20.53	21.28	21.18	21.12
		RB25#0	20.97	20.82	20.98	21.56	21.41	21.57
10.0	QPSK	RB1#0	22.99	22.83	22.78	23.58	23.42	23.37
		RB1#25	22.83	22.78	22.73	23.42	23.37	23.32
		RB1#49	22.29	22.49	22.37	22.88	23.08	22.96
		RB25#0	21.44	21.58	21.64	22.03	22.17	22.23
		RB25#25	21.51	21.58	21.67	22.10	22.17	22.26
		RB50#0	21.63	21.50	21.42	22.22	22.09	22.01
	16QAM	RB1#0	21.87	22.00	21.88	22.46	22.59	22.47
		RB1#13	22.07	22.03	22.16	22.66	22.62	22.75
		RB1#26	21.57	21.77	21.85	22.16	22.36	22.44
		RB15#0	20.85	20.90	21.04	21.44	21.49	21.63
		RB15#12	20.69	20.65	20.62	21.28	21.24	21.21
		RB27#0	20.77	20.73	20.84	21.36	21.32	21.43
15.0	QPSK	RB1#0	22.20	22.32	22.35	22.79	22.91	22.94
		RB1#38	22.39	22.41	22.49	22.98	23.00	23.08
		RB1#74	22.57	22.56	22.57	23.16	23.15	23.16
		RB36#0	21.56	21.48	21.46	22.15	22.07	22.05
		RB36#39	21.46	21.45	21.50	22.05	22.04	22.09
		RB75#0	21.31	21.40	21.55	21.90	21.99	22.14
	16QAM	RB1#0	21.84	21.84	21.78	22.43	22.43	22.37
		RB1#13	21.82	21.84	21.84	22.41	22.43	22.43
		RB1#26	21.85	21.88	21.79	22.44	22.47	22.38
		RB15#0	21.30	21.47	21.49	21.89	22.06	22.08
		RB15#12	21.56	21.50	21.54	22.15	22.09	22.13
		RB27#0	20.79	20.77	20.84	21.38	21.36	21.43
20.0	QPSK	RB1#0	22.31	22.43	22.58	22.90	23.02	23.17
		RB1#50	22.56	22.55	22.51	23.15	23.14	23.10
		RB1#99	22.63	22.54	22.64	23.22	23.13	23.23
		RB50#0	21.41	21.35	21.34	22.00	21.94	21.93
		RB50#50	21.35	21.33	21.46	21.94	21.92	22.05
		RB100#0	21.41	21.37	21.25	22.00	21.96	21.84

	16QAM	RB1#0	22.02	21.97	21.90	22.61	22.56	22.49
		RB1#13	22.35	22.21	22.03	22.94	22.80	22.62
		RB1#26	22.02	22.02	22.01	22.61	22.61	22.60
		RB15#0	21.30	21.35	21.28	21.89	21.94	21.87
		RB15#12	21.57	21.41	21.47	22.16	22.00	22.06
		RB27#0	20.61	20.56	20.71	21.20	21.15	21.30
Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB) For Band2: Antenna Gain = 0.59dBi Cable Loss=0dB Limit: EIRP≤33dBm								

LTE Band 4

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	22.32	22.28	22.23	21.48	21.44	21.39
		RB1#3	22.22	22.28	22.14	21.38	21.44	21.30
		RB1#5	22.24	22.22	22.29	21.40	21.38	21.45
		RB3#0	22.10	22.20	22.11	21.26	21.36	21.27
		RB3#3	22.16	22.16	22.25	21.32	21.32	21.41
		RB6#0	21.19	21.17	21.27	20.35	20.33	20.43
	16QAM	RB1#0	20.60	20.65	20.60	19.76	19.81	19.76
		RB1#3	21.04	21.01	21.02	20.20	20.17	20.18
		RB1#5	21.11	20.95	21.00	20.27	20.11	20.16
		RB3#0	20.91	20.73	20.71	20.07	19.89	19.87
		RB3#3	20.84	20.86	20.81	20.00	20.02	19.97
		RB6#0	20.22	20.06	20.20	19.38	19.22	19.36
3.0	QPSK	RB1#0	22.01	22.12	22.14	21.17	21.28	21.30
		RB1#8	22.16	22.14	22.29	21.32	21.30	21.45
		RB1#14	22.10	22.11	22.14	21.26	21.27	21.30
		RB6#0	21.02	21.11	20.97	20.18	20.27	20.13
		RB6#9	21.04	21.22	21.29	20.20	20.38	20.45
		RB15#0	21.31	21.16	21.17	20.47	20.32	20.33
	16QAM	RB1#0	21.46	21.42	21.52	20.62	20.58	20.68
		RB1#8	21.48	21.41	21.31	20.64	20.57	20.47
		RB1#14	21.37	21.49	21.48	20.53	20.65	20.64
		RB6#0	20.13	20.14	20.01	19.29	19.30	19.17
		RB6#9	20.40	20.45	20.33	19.56	19.61	19.49

		RB15#0	20.17	20.27	20.18	19.33	19.43	19.34
5.0	QPSK	RB1#0	22.16	22.08	22.12	21.32	21.24	21.28
		RB1#13	21.99	22.12	22.12	21.15	21.28	21.28
		RB1#24	22.11	22.19	22.23	21.27	21.35	21.39
		RB15#0	21.11	21.16	21.18	20.27	20.32	20.34
		RB15#10	21.10	21.22	21.18	20.26	20.38	20.34
		RB25#0	21.02	21.17	21.23	20.18	20.33	20.39
	16QAM	RB1#0	20.75	20.69	20.69	19.91	19.85	19.85
		RB1#13	20.91	20.83	20.71	20.07	19.99	19.87
		RB1#24	20.89	20.87	20.92	20.05	20.03	20.08
		RB15#0	20.25	20.19	20.23	19.41	19.35	19.39
		RB15#10	21.28	21.26	21.26	20.44	20.42	20.42
		RB25#0	20.37	20.40	20.24	19.53	19.56	19.40
10.0	QPSK	RB1#0	21.98	22.14	22.16	21.14	21.30	21.32
		RB1#25	22.12	22.16	22.03	21.28	21.32	21.19
		RB1#49	22.08	22.03	22.10	21.24	21.19	21.26
		RB25#0	21.25	21.25	21.29	20.41	20.41	20.45
		RB25#25	21.19	21.25	21.13	20.35	20.41	20.29
		RB50#0	21.28	21.23	21.39	20.44	20.39	20.55
	16QAM	RB1#0	20.97	20.85	20.72	20.13	20.01	19.88
		RB1#13	21.24	21.04	21.08	20.40	20.20	20.24
		RB1#26	21.33	21.38	21.43	20.49	20.54	20.59
		RB15#0	20.31	20.24	20.20	19.47	19.40	19.36
		RB15#12	20.24	20.20	20.01	19.40	19.36	19.17
		RB27#0	20.18	20.26	20.10	19.34	19.42	19.26
15.0	QPSK	RB1#0	22.15	22.17	22.26	21.31	21.33	21.42
		RB1#38	22.18	22.24	22.11	21.34	21.40	21.27
		RB1#74	22.17	22.09	22.15	21.33	21.25	21.31
		RB36#0	21.08	21.07	21.10	20.24	20.23	20.26
		RB36#39	21.21	21.18	21.09	20.37	20.34	20.25
		RB75#0	21.08	21.19	21.26	20.24	20.35	20.42
	16QAM	RB1#0	21.55	21.48	21.47	20.71	20.64	20.63
		RB1#13	21.49	21.41	21.30	20.65	20.57	20.46
		RB1#26	21.14	21.31	21.29	20.30	20.47	20.45
		RB15#0	21.25	21.23	21.15	20.41	20.39	20.31
		RB15#12	21.12	21.07	21.04	20.28	20.23	20.20
		RB27#0	20.18	20.14	19.97	19.34	19.30	19.13
20.0	QPSK	RB1#0	21.88	21.82	21.85	21.04	20.98	21.01
		RB1#50	21.90	21.76	21.68	21.06	20.92	20.84
		RB1#99	21.55	21.48	21.50	20.71	20.64	20.66

		RB50#0	20.85	20.89	20.84	20.01	20.05	20.00
		RB50#50	21.07	21.02	21.10	20.23	20.18	20.26
		RB100#0	21.28	21.07	21.17	20.44	20.23	20.33
	16QAM	RB1#0	21.15	21.16	21.03	20.31	20.32	20.19
		RB1#13	21.15	21.05	20.94	20.31	20.21	20.10
		RB1#26	20.96	20.97	20.98	20.12	20.13	20.14
		RB15#0	20.76	20.86	20.84	19.92	20.02	20.00
		RB15#12	20.95	20.92	20.96	20.11	20.08	20.12
		RB27#0	20.09	20.12	20.10	19.25	19.28	19.26

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB)

For Band4: Antenna Gain = -0.84dBi

Cable Loss=0dB

Limit: EIRP≤30dBm

LTE Band 5

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	23.15	23.27	23.27	20.96	21.08	21.08
		RB1#3	23.12	23.26	23.18	20.93	21.07	20.99
		RB1#5	23.28	23.32	23.32	21.09	21.13	21.13
		RB3#0	23.27	23.38	23.48	21.08	21.19	21.29
		RB3#3	23.44	23.31	23.19	21.25	21.12	21.00
		RB6#0	22.24	22.16	22.35	20.05	19.97	20.16
	16QAM	RB1#0	22.28	22.31	22.46	20.09	20.12	20.27
		RB1#3	22.28	22.26	22.32	20.09	20.07	20.13
		RB1#5	22.40	22.24	22.22	20.21	20.05	20.03
		RB3#0	22.28	22.27	22.25	20.09	20.08	20.06
		RB3#3	22.39	22.40	22.49	20.20	20.21	20.30
		RB6#0	21.08	21.22	21.13	18.89	19.03	18.94
3.0	QPSK	RB1#0	22.96	22.99	23.05	20.77	20.80	20.86
		RB1#8	23.01	22.98	22.99	20.82	20.79	20.80
		RB1#14	23.24	23.05	23.09	21.05	20.86	20.90
		RB6#0	22.28	22.16	22.28	20.09	19.97	20.09
		RB6#9	22.13	22.13	22.25	19.94	19.94	20.06
		RB15#0	22.26	22.18	22.31	20.07	19.99	20.12
	16QAM	RB1#0	22.49	22.42	22.45	20.30	20.23	20.26

		RB1#8	22.34	22.33	22.38	20.15	20.14	20.19
		RB1#14	22.28	22.25	22.32	20.09	20.06	20.13
		RB6#0	21.16	21.09	21.11	18.97	18.90	18.92
		RB6#9	21.31	21.16	21.07	19.12	18.97	18.88
		RB15#0	21.30	21.26	21.30	19.11	19.07	19.11
5.0	QPSK	RB1#0	23.05	23.11	23.01	20.86	20.92	20.82
		RB1#13	23.28	23.15	23.21	21.09	20.96	21.02
		RB1#24	22.98	23.11	23.23	20.79	20.92	21.04
		RB15#0	22.25	22.17	22.15	20.06	19.98	19.96
		RB15#10	21.99	22.08	22.05	19.80	19.89	19.86
		RB25#0	22.10	22.12	22.14	19.91	19.93	19.95
	16QAM	RB1#0	21.73	21.72	21.81	19.54	19.53	19.62
		RB1#13	21.78	21.70	21.71	19.59	19.51	19.52
		RB1#24	21.56	21.68	21.50	19.37	19.49	19.31
		RB15#0	21.55	21.42	21.55	19.36	19.23	19.36
		RB15#10	21.35	21.42	21.40	19.16	19.23	19.21
		RB25#0	21.26	21.46	21.46	19.07	19.27	19.27
10.0	QPSK	RB1#0	23.11	23.21	23.24	20.92	21.02	21.05
		RB1#25	23.12	22.99	22.92	20.93	20.80	20.73
		RB1#49	23.03	23.00	23.05	20.84	20.81	20.86
		RB25#0	22.22	22.16	22.16	20.03	19.97	19.97
		RB25#25	22.18	22.06	22.06	19.99	19.87	19.87
		RB50#0	22.09	22.11	22.15	19.90	19.92	19.96
	16QAM	RB1#0	22.36	22.28	22.17	20.17	20.09	19.98
		RB1#13	22.62	22.61	22.63	20.43	20.42	20.44
		RB1#26	22.47	22.41	22.39	20.28	20.22	20.20
		RB15#0	21.19	21.18	21.28	19.00	18.99	19.09
		RB15#12	21.41	21.56	21.56	19.22	19.37	19.37
		RB27#0	21.39	21.38	21.32	19.20	19.19	19.13
Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd) - Cable Loss(dB) For Band5: Antenna Gain =-0.04dBi = -2.19dBd (0dBd=2.15dBi) Cable Loss=0dB Limit: ERP≤38.45dBm								

LTE Band 7

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	22.44	22.31	22.34	23.06	22.93	22.96
		RB1#13	22.21	22.34	22.35	22.83	22.96	22.97
		RB1#24	22.33	22.41	22.50	22.95	23.03	23.12
		RB15#0	21.40	21.42	21.42	22.02	22.04	22.04
		RB15#10	21.40	21.50	21.39	22.02	22.12	22.01
		RB25#0	21.26	21.45	21.45	21.88	22.07	22.07
	16QAM	RB1#0	21.00	20.94	20.96	21.62	21.56	21.58
		RB1#13	21.18	21.12	21.00	21.80	21.74	21.62
		RB1#24	21.09	21.17	21.13	21.71	21.79	21.75
		RB15#0	20.47	20.46	20.44	21.09	21.08	21.06
		RB15#10	21.49	21.47	21.46	22.11	22.09	22.08
		RB25#0	20.59	20.65	20.53	21.21	21.27	21.15
10.0	QPSK	RB1#0	22.24	22.43	22.38	22.86	23.05	23.00
		RB1#25	22.33	22.44	22.28	22.95	23.06	22.90
		RB1#49	22.37	22.26	22.36	22.99	22.88	22.98
		RB25#0	21.55	21.54	21.55	22.17	22.16	22.17
		RB25#25	21.44	21.50	21.42	22.06	22.12	22.04
		RB50#0	21.56	21.44	21.68	22.18	22.06	22.30
	16QAM	RB1#0	21.18	21.08	21.01	21.80	21.70	21.63
		RB1#13	21.45	21.26	21.28	22.07	21.88	21.90
		RB1#26	21.61	21.60	21.70	22.23	22.22	22.32
		RB15#0	20.60	20.52	20.49	21.22	21.14	21.11
		RB15#12	20.54	20.45	20.29	21.16	21.07	20.91
		RB27#0	20.43	20.49	20.36	21.05	21.11	20.98
15.0	QPSK	RB1#0	22.39	22.41	22.56	23.01	23.03	23.18
		RB1#38	22.47	22.47	22.40	23.09	23.09	23.02
		RB1#74	22.44	22.35	22.40	23.06	22.97	23.02
		RB36#0	21.35	21.32	21.31	21.97	21.94	21.93
		RB36#39	21.41	21.48	21.31	22.03	22.10	21.93
		RB75#0	21.37	21.44	21.55	21.99	22.06	22.17
	16QAM	RB1#0	21.77	21.72	21.71	22.39	22.34	22.33
		RB1#13	21.74	21.63	21.57	22.36	22.25	22.19
		RB1#26	21.43	21.59	21.56	22.05	22.21	22.18
		RB15#0	21.52	21.50	21.45	22.14	22.12	22.07
		RB15#12	21.32	21.33	21.32	21.94	21.95	21.94

		RB27#0	20.43	20.35	20.19	21.05	20.97	20.81
20.0	QPSK	RB1#0	22.12	22.09	22.06	22.74	22.71	22.68
		RB1#50	22.20	21.98	21.96	22.82	22.60	22.58
		RB1#99	21.84	21.75	21.79	22.46	22.37	22.41
		RB50#0	21.14	21.17	21.07	21.76	21.79	21.69
		RB50#50	21.32	21.25	21.34	21.94	21.87	21.96
		RB100#0	21.50	21.30	21.44	22.12	21.92	22.06
	16QAM	RB1#0	21.44	21.39	21.24	22.06	22.01	21.86
		RB1#13	21.37	21.32	21.22	21.99	21.94	21.84
		RB1#26	21.21	21.27	21.20	21.83	21.89	21.82
		RB15#0	21.05	21.15	21.12	21.67	21.77	21.74
		RB15#12	21.19	21.19	21.26	21.81	21.81	21.88
		RB27#0	20.37	20.38	20.38	20.99	21.00	21.00
Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB) For Band4: Antenna Gain = 0.625dBi Cable Loss=0dB Limit: EIRP≤33dBm								

3.3.2 Peak-to-average ratio (PAR)

LTE Band 2 10MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	8.69	6.86	6.87	13	Pass
QPSK (50RB Size)	9.71	6.55	9.74	13	Pass
16QAM (1RB Size)	6.69	8.83	9.62	13	Pass
16QAM (27RB Size)	8.69	6.86	6.87	13	Pass

LTE Band 4 10MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	7.32	9.04	8.88	13	Pass
QPSK (50RB Size)	9.53	7.59	8.78	13	Pass
16QAM (1RB Size)	7.04	6.71	6.58	13	Pass
16QAM (27RB Size)	7.32	9.04	8.88	13	Pass

LTE Band 5 10MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	7.10	6.28	5.70	13	Pass
QPSK (50RB Size)	6.86	5.41	9.00	13	Pass
16QAM (1RB Size)	7.50	7.21	8.72	13	Pass
16QAM (27RB Size)	7.10	6.28	5.70	13	Pass

LTE Band 7 10MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.51	6.95	7.50	13	Pass
QPSK (50RB Size)	9.06	8.53	6.09	13	Pass
16QAM (1RB Size)	8.99	8.57	5.32	13	Pass
16QAM (27RB Size)	5.51	6.95	7.50	13	Pass

3.3.3 26dB and 99% Bandwidth

Test Data and Plots of 26dB and 99% Bandwidth please refer Appendix A.

3.3.4 Conducted Spurious Emissions

Test Data and Plots of Conducted Spurious Emissions please refer Appendix C.

3.3.5 Out of band emission, Band Edge

Test Plots of Band Edge please refer Appendix B

3.3.6 FREQUENCY STABILITY

QPSK:

Band 2:

1.4 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	1850.912400	1909.354750	1850	1910
-20		1850.598198	1909.181436	1850	1910
-10		1850.137353	1909.330773	1850	1910
0		1850.367873	1909.087650	1850	1910
10		1850.121511	1909.323352	1850	1910
20		1850.341724	1909.650234	1850	1910
30		1850.604347	1909.789555	1850	1910
40		1850.141923	1909.103629	1850	1910
50		1850.476308	1909.628357	1850	1910
20	3.2	1850.598992	1909.905438	1850	1910
	4.3	1850.609274	1909.923327	1850	1910

Band 4:

1.4 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	1710.954807	1754.996376	1710	1755
-20		1710.688592	1754.297839	1710	1755
-10		1710.466520	1754.879520	1710	1755
0		1710.766133	1754.256178	1710	1755
10		1710.604674	1754.457201	1710	1755
20		1710.318568	1754.131311	1710	1755
30		1710.025238	1754.689798	1710	1755
40		1710.590829	1754.228450	1710	1755
50		1710.800033	1754.303789	1710	1755
20	3.2	1710.794205	1754.791616	1710	1755
	4.3	1710.960398	1754.889127	1710	1755

Band 5:

10.0 MHz Middle Channel, $f_o = 836.5\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	5.93	0.00709	2.5
-20		6.71	0.00802	2.5
-10		6.36	0.00760	2.5
0		3.78	0.00452	2.5
10		5.71	0.00683	2.5
20		4.81	0.00575	2.5
30		6.24	0.00746	2.5
40		6.6	0.00789	2.5
50		4.79	0.00573	2.5
20	3.2	5.91	0.00707	2.5
	4.3	6.12	0.00732	2.5

Band 7:

5 MHz Bandwidth					
Temperature (°C)	Power Supplied (V_{DC})	F_L (MHz)	F_H (MHz)	F_L Limit (MHz)	F_H Limit (MHz)
-30	3.7	2500.797397	2569.796784	2500	2570
-20		2500.162993	2569.925873	2500	2570
-10		2500.573417	2569.471071	2500	2570
0		2500.120734	2569.122474	2500	2570
10		2500.466058	2569.383294	2500	2570
20		2500.469083	2569.175193	2500	2570
30		2500.358473	2569.370374	2500	2570
40		2500.040652	2569.086162	2500	2570
50		2500.909159	2569.160261	2500	2570
20	3.2	2500.951251	2569.229351	2500	2570
	4.3	2500.873470	2569.578334	2500	2570

16QAM:

Band 2:

1.4 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	1850.453756	1909.825071	1850	1910
-20		1850.342913	1909.730591	1850	1910
-10		1850.344560	1909.383519	1850	1910
0		1850.836235	1909.785110	1850	1910
10		1850.187822	1909.046580	1850	1910
20		1850.300242	1909.726367	1850	1910
30		1850.610936	1909.464268	1850	1910
40		1850.619641	1909.295433	1850	1910
50		1850.112347	1909.475270	1850	1910
20	3.2	1850.258299	1909.057561	1850	1910
	4.3	1850.684013	1909.073195	1850	1910

Band 4:

1.4 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	1710.877685	1754.436791	1710	1755
-20		1710.576975	1754.156728	1710	1755
-10		1710.210925	1754.513978	1710	1755
0		1710.857012	1754.205713	1710	1755
10		1710.401237	1754.006597	1710	1755
20		1710.468020	1754.820783	1710	1755
30		1710.373956	1754.626404	1710	1755
40		1710.556565	1754.506344	1710	1755
50		1710.647164	1754.618494	1710	1755
20	3.2	1710.330205	1754.821198	1710	1755
	4.3	1710.819006	1754.689236	1710	1755

Band 5:

10.0 MHz Middle Channel, $f_o = 836.5\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	6.84	0.00818	2.5
-20		4.59	0.00549	2.5
-10		5.96	0.00712	2.5
0		5.27	0.00630	2.5
10		6.00	0.00717	2.5
20		4.91	0.00587	2.5
30		4.86	0.00581	2.5
40		4.43	0.00530	2.5
50		5.14	0.00614	2.5
20	3.2	4.29	0.00513	2.5
	4.3	3.98	0.00476	2.5

Band 7:

5 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	3.7	2500.149004	2569.721521	2500	2570
-20		2500.529034	2569.393935	2500	2570
-10		2500.075311	2569.148264	2500	2570
0		2500.166852	2569.867799	2500	2570
10		2500.957401	2569.207399	2500	2570
20		2500.839163	2569.735902	2500	2570
30		2500.804449	2569.555746	2500	2570
40		2500.333265	2569.448462	2500	2570
50		2500.315728	2569.582661	2500	2570
20	3.2	2500.323790	2569.895799	2500	2570
	4.3	2500.646553	2569.535054	2500	2570

3.4 Radiated Spurious emission Test Data

Test Date:	2024-07-13	Test By:	Bard Huang
Environment condition:	Temperature: 23.5°C; Relative Humidity:66%; ATM Pressure: 99.9kPa		

Frequency (MHz)	Reading level (dBμV)	Polar (H/V)	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	EIRP CF	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)	Remark
LTE Band 2									
Low Channel(1850.7MHz)									
3701.400	59.47	horizontal	-2.57	56.90	95.20	-38.30	-13.00	-25.30	Peak
3701.400	59.33	vertical	-2.57	56.76	95.20	-38.44	-13.00	-25.44	Peak
Middle Channel(1880MHz)									
3760.000	48.41	horizontal	-2.69	45.72	95.20	-49.48	-13.00	-36.48	Peak
3760.000	48.60	vertical	-2.69	45.91	95.20	-49.29	-13.00	-36.29	Peak
High Channel(1909.3MHz)									
3818.600	61.74	horizontal	-2.78	58.96	95.20	-36.24	-13.00	-23.24	Peak
3818.600	57.84	vertical	-2.78	55.06	95.20	-40.14	-13.00	-27.14	Peak
LTE Band 4									
Low Channel(1710.7MHz)									
5132.100	66.28	horizontal	0.71	66.99	95.20	-28.21	-13.00	-15.21	Peak
5132.100	65.15	vertical	0.71	65.86	95.20	-29.34	-13.00	-16.34	Peak
Middle Channel(1732.5MHz)									
3465.000	71.66	horizontal	-2.68	68.98	95.20	-26.22	-13.00	-13.22	Peak
3465.000	70.20	vertical	-2.68	67.52	95.20	-27.68	-13.00	-14.68	Peak
High Channel(1754.3MHz)									
3508.600	80.76	horizontal	-2.71	78.05	95.20	-17.15	-13.00	-4.15	Peak
3508.600	79.22	vertical	-2.71	76.51	95.20	-18.69	-13.00	-5.69	Peak
LTE Band 5									
Low Channel(824.7MHz)									
2474.100	75.10	horizontal	-2.76	72.34	95.20	-22.86	-13.00	-9.86	Peak
2474.100	64.59	vertical	-2.76	61.83	95.20	-33.37	-13.00	-20.37	Peak
Middle Channel(836.5MHz)									
2509.500	68.38	horizontal	-2.72	65.66	95.20	-29.54	-13.00	-16.54	Peak
2509.500	60.38	vertical	-2.72	57.66	95.20	-37.54	-13.00	-24.54	Peak
High Channel(848.3MHz)									
2544.900	71.37	horizontal	-2.73	68.64	95.20	-26.56	-13.00	-13.56	Peak
2544.900	63.36	vertical	-2.73	60.63	95.20	-34.57	-13.00	-21.57	Peak

LTE Band 7									
Low Channel(2502.5MHz)									
5005.000	54.98	horizontal	0.36	55.34	95.20	-39.86	-25.00	-14.86	Peak
5005.000	52.42	vertical	0.36	52.78	95.20	-42.42	-25.00	-17.42	Peak
Middle Channel(2535MHz)									
5070.000	53.05	horizontal	0.47	53.52	95.20	-41.68	-25.00	-16.68	Peak
5070.000	49.65	vertical	0.47	50.12	95.20	-45.08	-25.00	-20.08	Peak
High Channel(2567.5MHz)									
5135.000	46.70	horizontal	0.73	47.43	95.20	-47.77	-25.00	-22.77	Peak
5135.000	48.42	vertical	0.73	49.15	95.20	-46.05	-25.00	-21.05	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain

Margin = Result – Limit

According to ANSI C63.26-2015 section 5.2.7:

$EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.

Test was performed on 3meters distance, so

Result = Corrected Amplitude + $20\log(3) - 104.8$

= Corrected Amplitude - 95.2

The emission levels of other frequencies that were lower than the limit 20dB, not show in test report.

4 Test Setup Photo

Please refer to the attachment 2405U58689E Test Setup photo.

5 E.U.T Photo

Please refer to the attachment 2405U58689E External photo and 2405U58689E Internal photo.

---End of Report---