


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX G Mode Channel 01	Polarization	Vertical
-----------	----------------------	--------------	----------

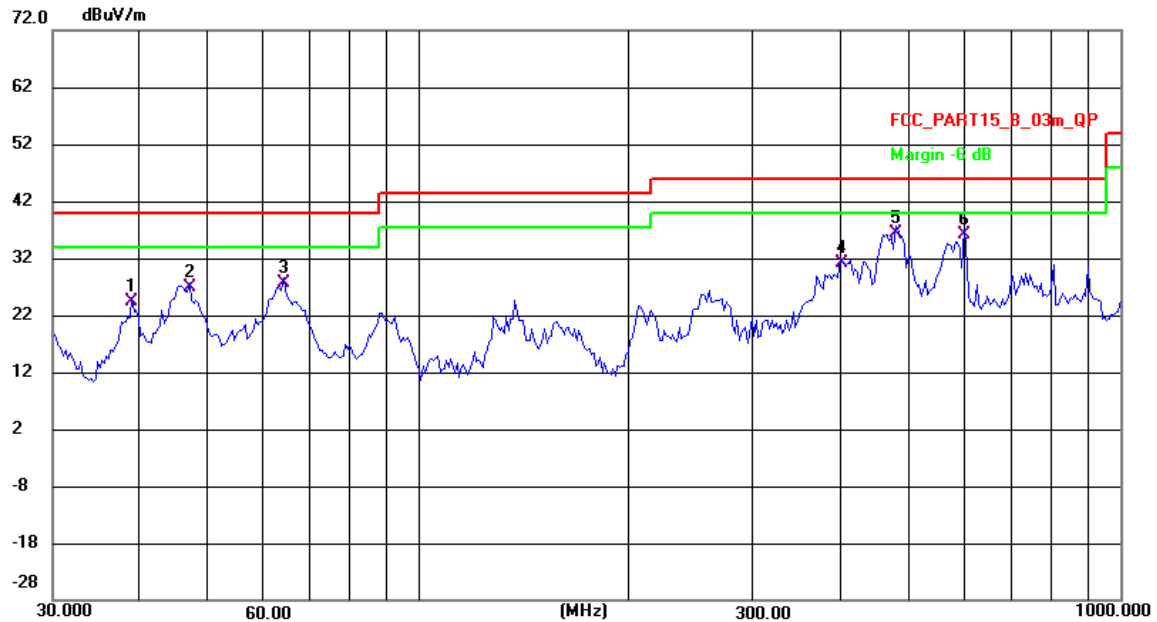


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.9081	46.58	-22.26	24.32	40.00	-15.68	QP	100	97	P	
2	47.0371	48.94	-22.15	26.79	40.00	-13.21	QP	191	40	P	
3	64.0800	50.88	-23.15	27.73	40.00	-12.27	QP	163	105	P	
4	401.1050	50.27	-19.19	31.08	46.00	-14.92	QP	200	348	P	
5 *	478.1394	53.70	-17.21	36.49	46.00	-9.51	QP	100	169	P	
6	598.7067	50.05	-13.82	36.23	46.00	-9.77	QP	208	202	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

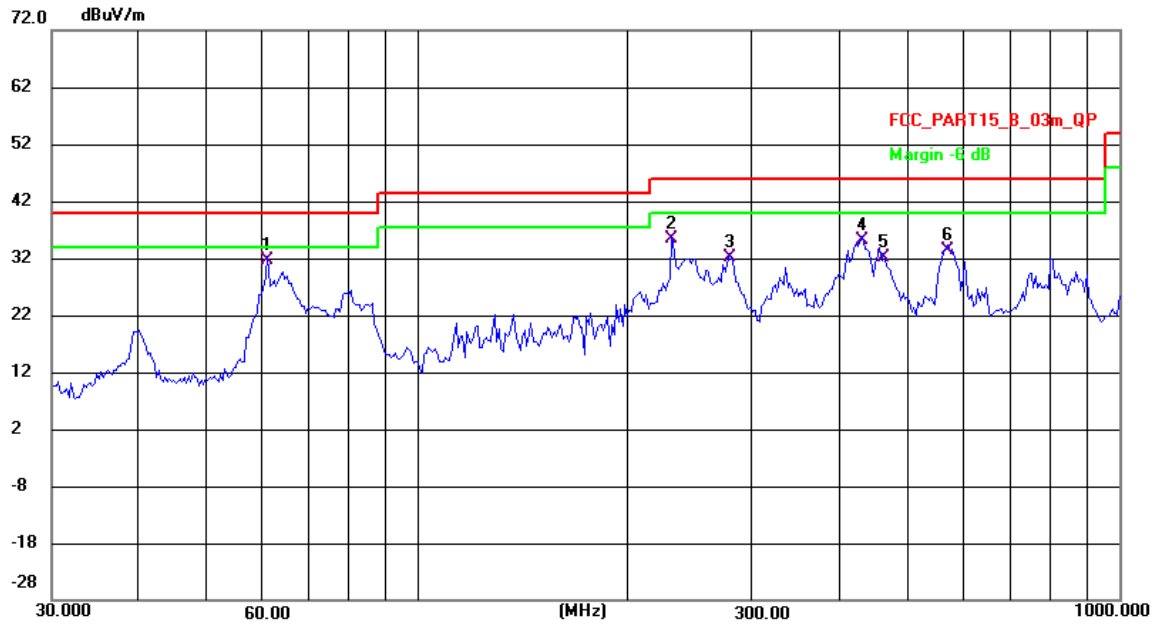

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	61.0041	54.27	-22.68	31.59	40.00	-8.41	QP	199	349	P	
2	230.2295	60.37	-25.00	35.37	46.00	-10.63	QP	200	117	P	
3	278.3308	54.85	-22.64	32.21	46.00	-13.79	QP	173	355	P	
4	430.3053	53.42	-18.24	35.18	46.00	-10.82	QP	100	269	P	
5	461.6313	49.68	-17.54	32.14	46.00	-13.86	QP	126	276	P	
6	569.9688	48.22	-14.75	33.47	46.00	-12.53	QP	208	306	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIXD -RADIATED EMISSION- ABOVE 1000MHZ

Test Result of Radiated Spurious at Band edges.

Note: All test plots below include both horizontal and vertical

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX B Mode 2412 MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	70.93	-21.47	49.46	74.00	-24.54	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	72.93	-26.12	46.81	74.00	-27.19	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	73.52	-21.47	52.05	74.00	-21.95	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	72.85	-26.12	46.73	74.00	-27.27	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX B Mode 2462 MHz			
1	2483.5	H	73.69	-25.29	48.40	74.00	-25.60	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	72.93	-25.29	47.64	74.00	-26.36	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.

2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.

Result=Reading + Correct Factor.

Margin= Result-Limit.

3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX G Mode 2412 MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	73.59	-21.47	52.12	74.00	-21.88	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	72.93	-26.12	46.81	74.00	-27.19	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.56	-21.47	53.09	74.00	-20.91	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	73.58	-26.12	47.46	74.00	-23.91	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX G Mode 2462 MHz			
1	2483.5	H	75.89	-25.29	50.60	74.00	-23.40	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	74.86	-25.29	49.57	74.00	-24.43	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX N(HT20) Mode 2412 MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.85	-21.47	54.38	74.00	-19.62	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	76.05	-26.12	49.93	74.00	-24.07	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.86	-21.47	53.39	74.00	-20.61	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	73.94	-26.12	47.82	74.00	-26.18	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX N(HT20) Mode 2462 MHz			
1	2483.5	H	75.84	-25.29	50.55	74.00	-23.45	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	72.64	-25.29	47.35	74.00	-26.65	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX N(HT40) Mode 2422 MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	70.85	-21.47	49.38	74.00	-24.62	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	69.89	-26.12	43.77	74.00	-30.23	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	73.56	-21.47	52.09	74.00	-21.91	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	72.31	-26.12	46.19	74.00	-27.81	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX N(HT40) Mode 2452 MHz			
1	2483.5	H	78.36	-25.29	53.07	74.00	-20.93	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.31	-25.29	54.02	74.00	-19.98	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

ABOVE 1000 MHz

Note: All the modes have been tested and recorded worst mode in the report.

Modulation Type:802.11b

Channel 1 / 2412 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4824.00	H	58.63	51.3	-1.88	56.75	49.42	74	54	-17.25
7236.00	H	42.58	---	7.8	50.38	---	74	54	-23.62
---	H	---	---	---	---	---	---	---	---
4824.00	V	55.12	---	-1.88	53.24	---	74	54	-20.76
7236.00	V	42.52	---	7.8	50.32	---	74	54	-23.68
---	V	---	---	---	---	---	---	---	---

Channel 6 / 2437 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4874.00	H	57.25	52.31	-1.59	55.66	50.72	74	54	-18.34
7311.00	H	43.05	---	8.1	51.15	---	74	54	-22.85
---	H	---	---	---	---	---	---	---	---
4874.00	V	55.95	---	-1.59	54.36	---	74	54	-19.64
7311.00	V	42.58	---	8.1	50.68	---	74	54	-23.32
---	V	---	---	---	---	---	---	---	---

Channel 11 / 2462 MHz

Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4924.00	H	58.63	52	-1.3	57.33	50.7	74	54	-16.67
7386.00	H	42.05	---	9	51.05	---	74	54	-22.95
---	H	---	---	---	---	---	---	---	---
4924.00	V	54.85	---	-1.3	53.55	---	74	54	-20.45
7386.00	V	42.63	---	9	51.63	---	74	54	-22.37
---	V	---	---	---	---	---	---	---	---

Notes:

- 1). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 2). Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3). Worst case data at 1Mbps at IEEE 802.11b.
- 4). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit


APPENDIXE - BANDWIDTH

1. DTS Bandwidth

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	7.12	2408.44	2415.56	0.5	PASS
	2437	7.60	2432.96	2440.56	0.5	PASS
	2462	9.08	2457.44	2466.52	0.5	PASS
11G	2412	15.08	2404.44	2419.52	0.5	PASS
	2437	16.32	2428.84	2445.16	0.5	PASS
	2462	15.08	2454.44	2469.52	0.5	PASS
11N20SISO	2412	15.08	2404.48	2419.56	0.5	PASS
	2437	17.56	2428.20	2445.76	0.5	PASS
	2462	17.60	2453.20	2470.80	0.5	PASS
11N40SISO	2422	30.80	2409.12	2439.92	0.5	PASS
	2437	35.68	2418.84	2454.52	0.5	PASS
	2452	25.04	2444.48	2469.52	0.5	PASS


Test Graphs

11B_Ant1_2412

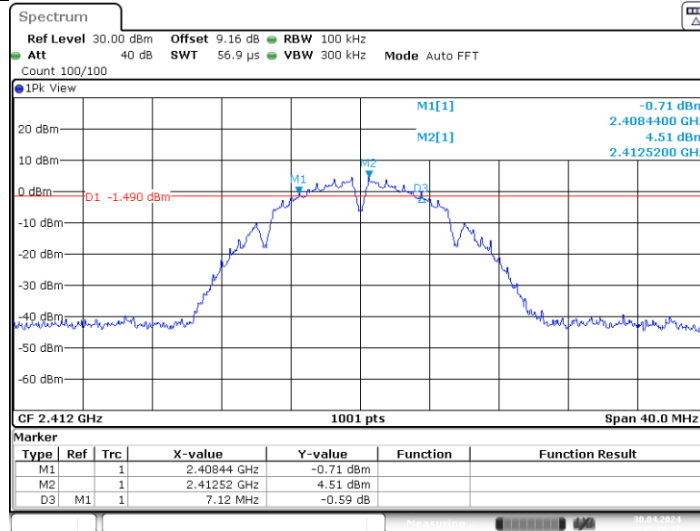


Date: 30.APR.2024 12:10:17

11B_Ant1_2437

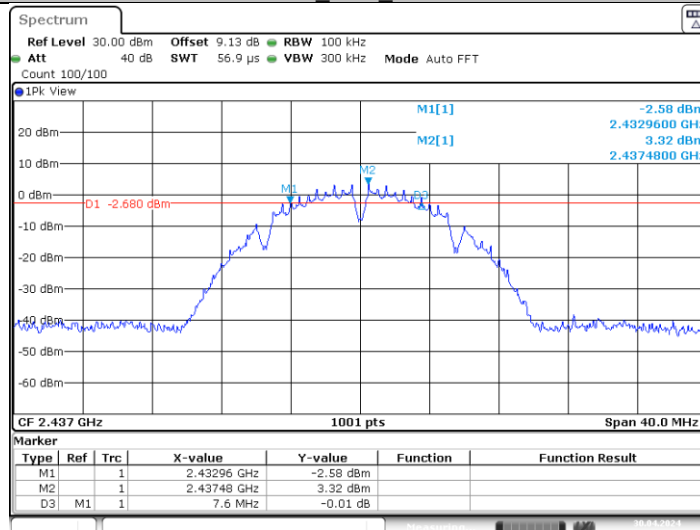


Date: 30.APR.2024 12:14:24

11B_Ant1_2462

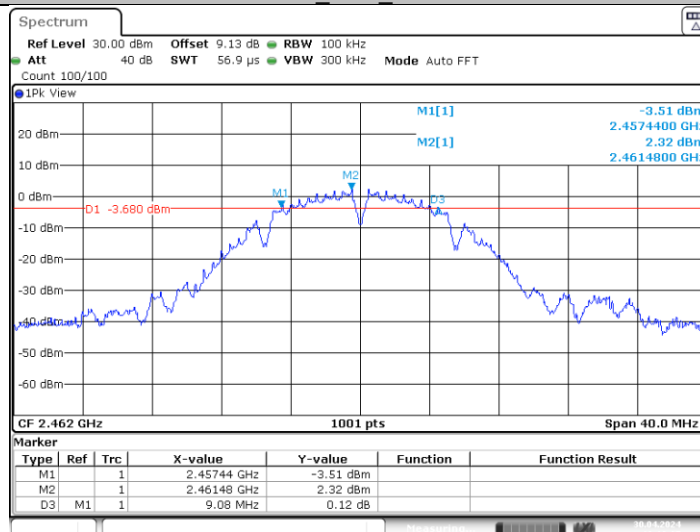


Date: 30.APR.2024 12:16:25

11G_Ant1_2412

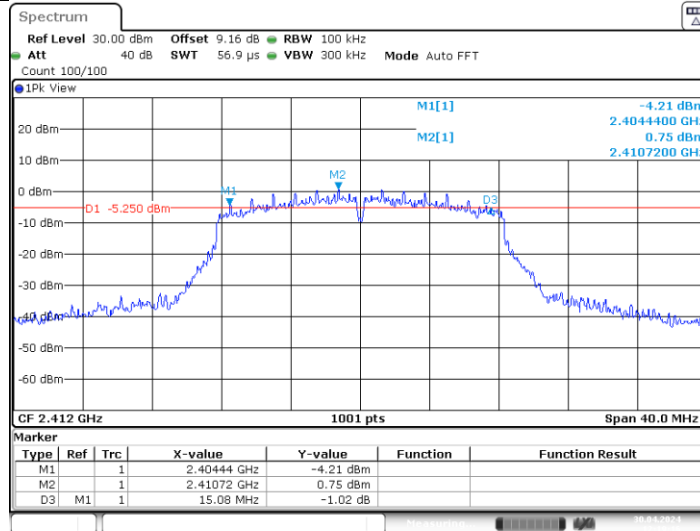


Date: 30.APR.2024 12:19:16

11G_Ant1_2437

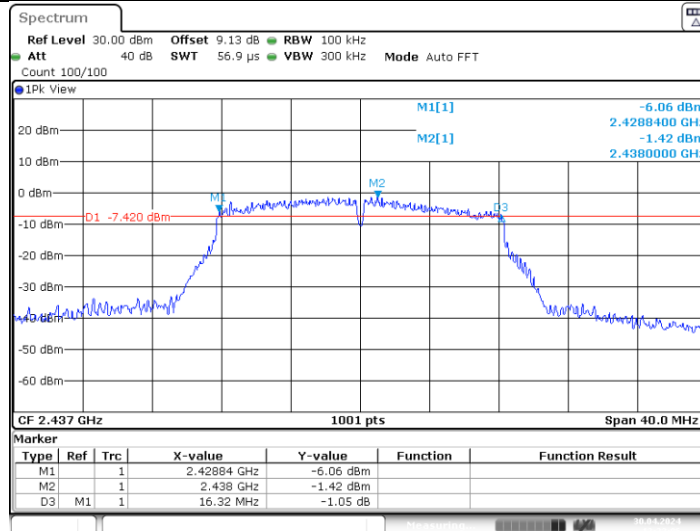


Date: 30.APR.2024 12:22:07

11G_Ant1_2462

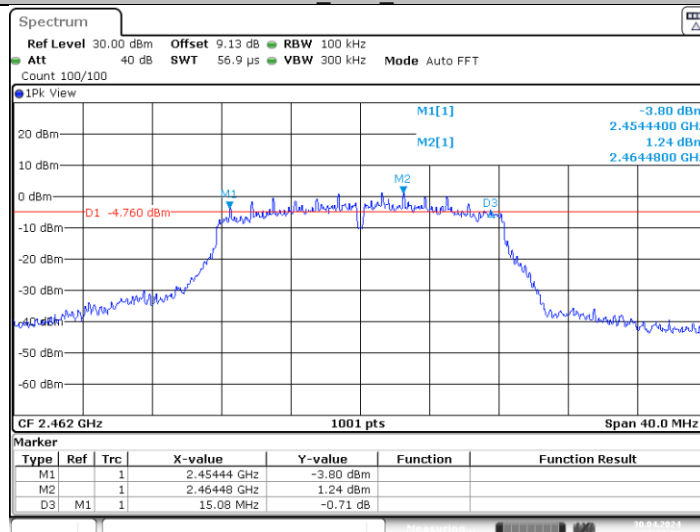


Date: 30.APR.2024 12:23:55


11N20SISO_Ant1_2412

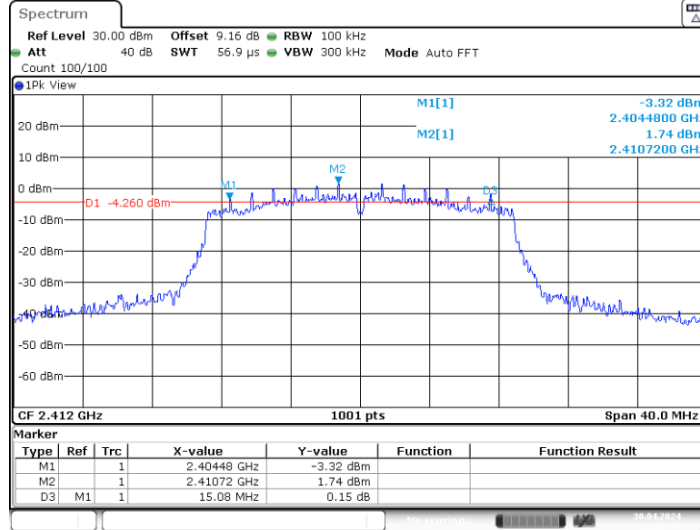


11N20SISO_Ant1_2437

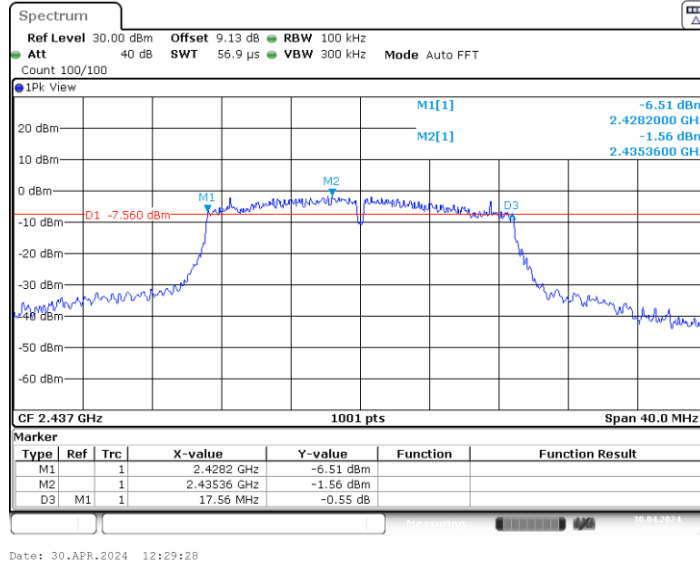

11N20SISO_Ant1_2462

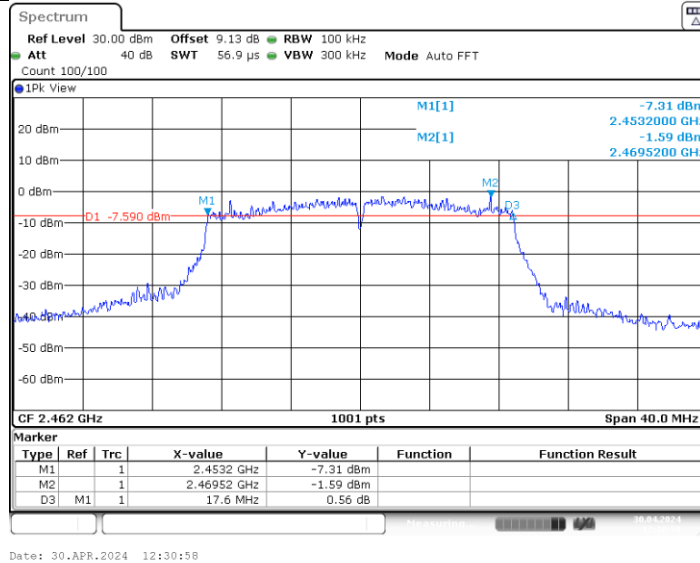


11N40SISO_Ant1_2422

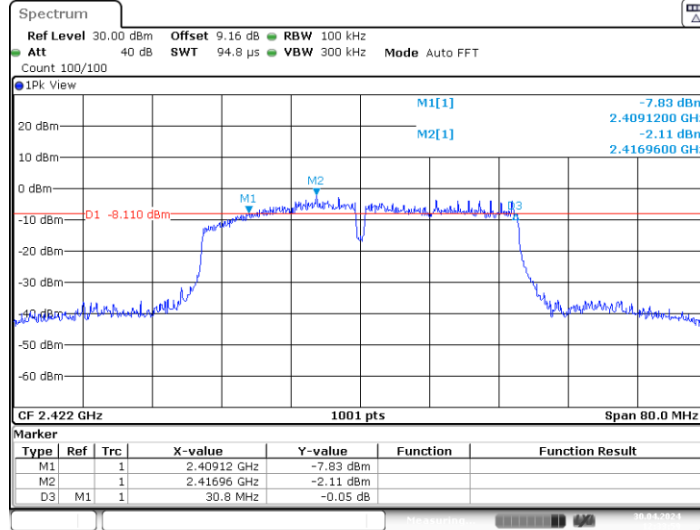


Date: 30.APR.2024 12:33:59

11N40SISO_Ant1_2437

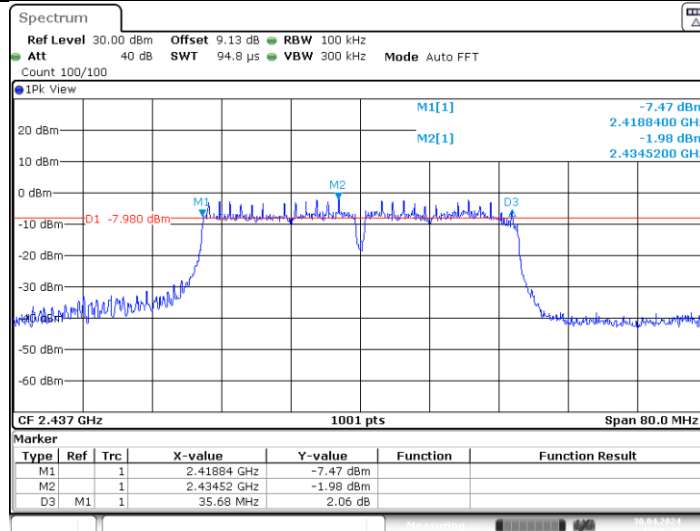

Date: 30.APR.2024 12:36:38

11N40SISO_Ant1_2452

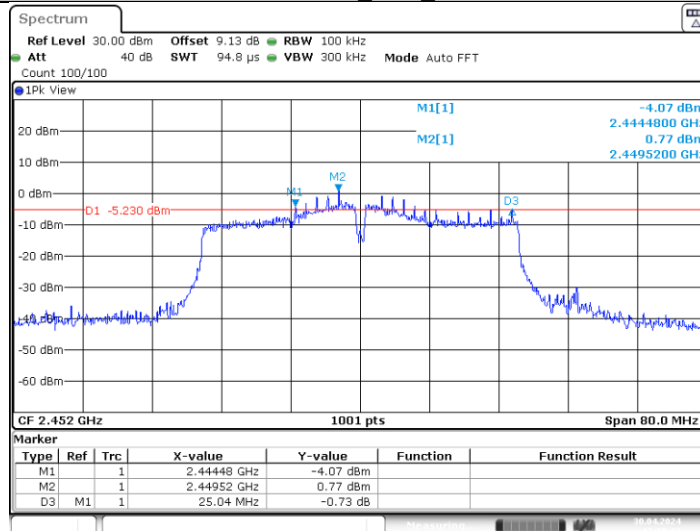

Date: 30.APR.2024 12:38:11


APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	Frequency[MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]
11B	2412	11.84	99.76	0.01	11.85	≤30.00
	2437	11.95	99.64	0.02	11.97	≤30.00
	2462	11.78	99.64	0.02	11.80	≤30.00
11G	2412	11.83	97.90	0.09	11.92	≤30.00
	2437	11.85	97.20	0.12	11.97	≤30.00
	2462	11.58	97.20	0.12	11.70	≤30.00
11N20SISO	2412	11.58	97.01	0.13	11.71	≤30.00
	2437	11.65	97.01	0.13	11.78	≤30.00
	2462	11.58	97.01	0.13	11.71	≤30.00
11N40SISO	2422	12.01	95.59	0.20	12.21	≤30.00
	2437	12.02	95.59	0.20	12.22	≤30.00
	2452	12.30	95.59	0.20	12.50	≤30.00

DC Factor = $10 \cdot \log(1 / \text{Duty Cycle})$


TEST GRAPHS AVERAGE

11B_Ant1_2412

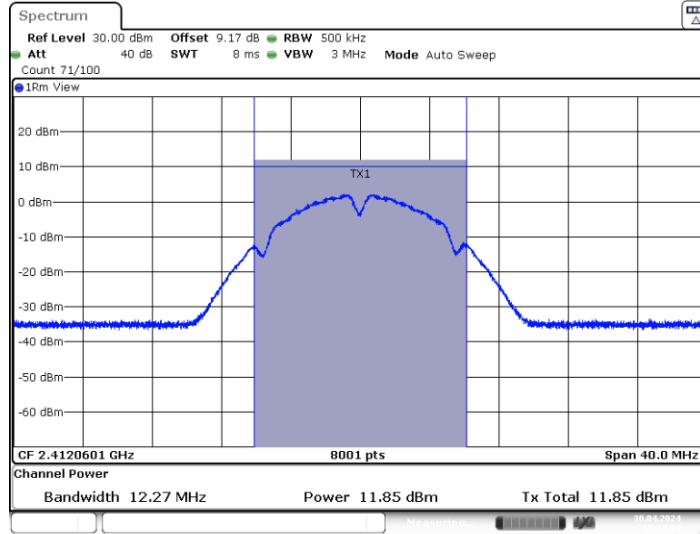


Date: 30.APR.2024 12:13:19

11B_Ant1_2437

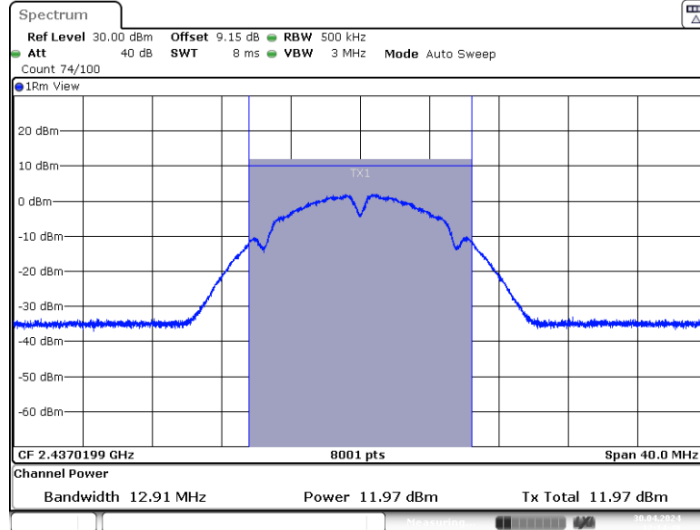


Date: 30.APR.2024 12:14:39

11B_Ant1_2462

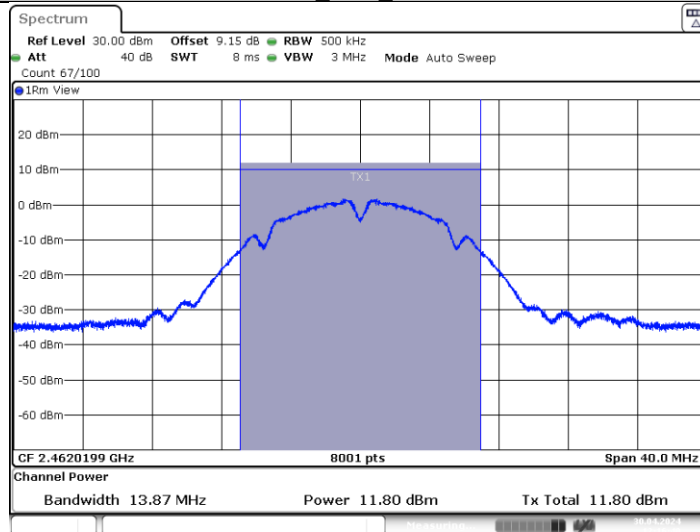


Date: 30.APR.2024 12:16:40

11G_Ant1_2412

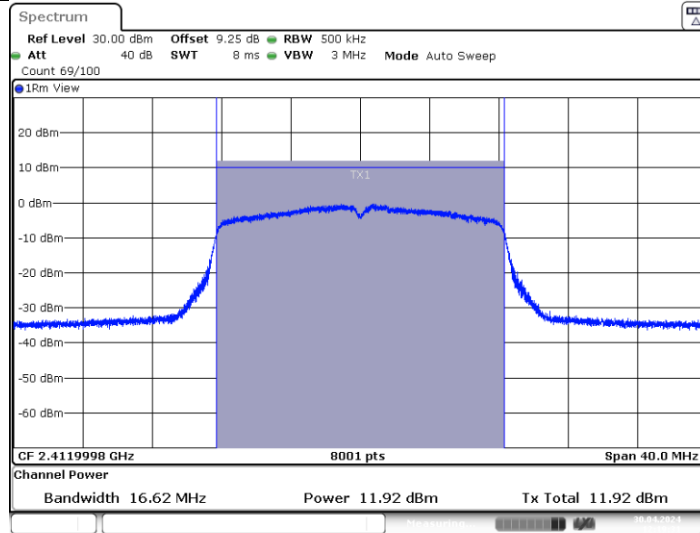


Date: 30.APR.2024 12:19:31

11G_Ant1_2437

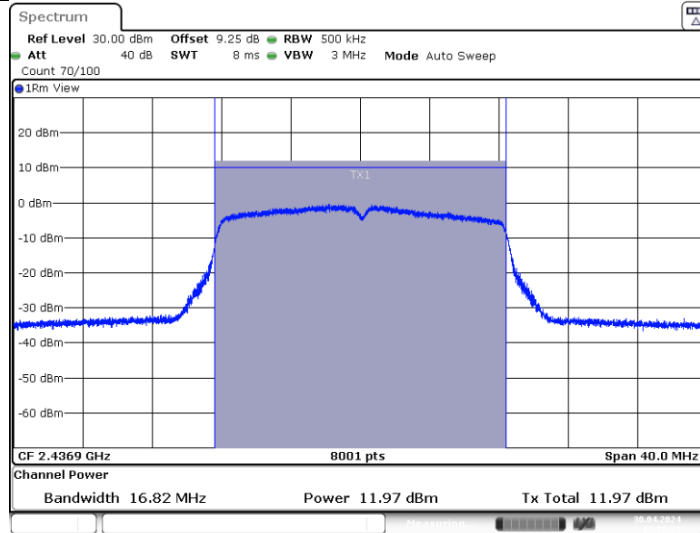


Date: 30.APR.2024 12:22:21

11G_Ant1_2462

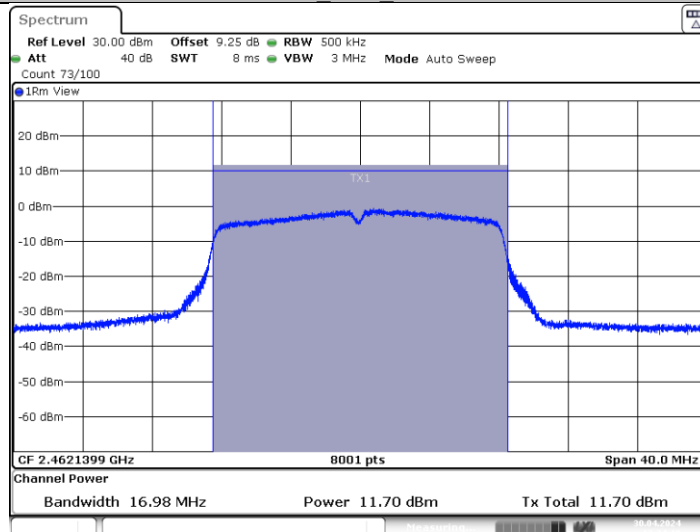


Date: 30.APR.2024 12:24:10

11N20SISO_Ant1_2412

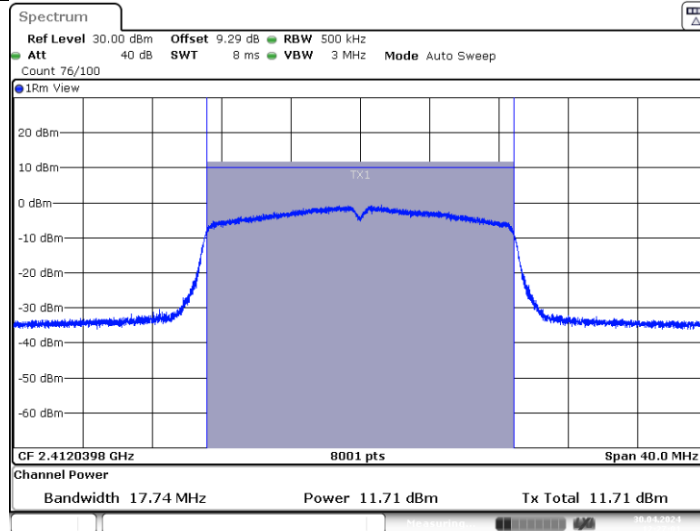


Date: 30.APR.2024 12:27:02

11N20SISO_Ant1_2437

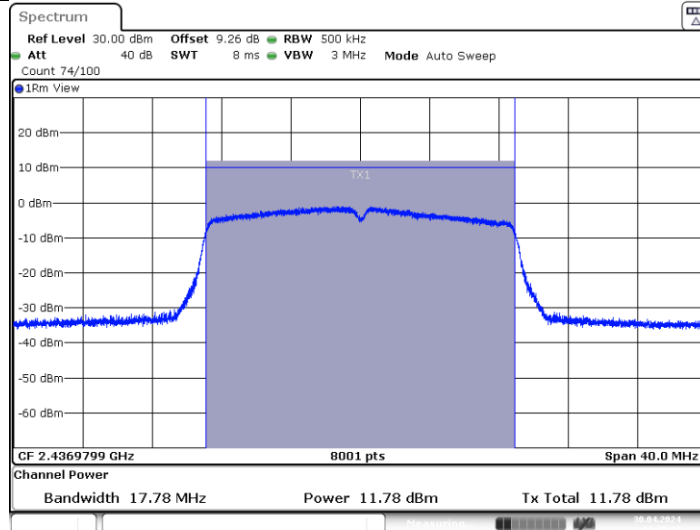


Date: 30.APR.2024 12:29:42

11N20SISO_Ant1_2462

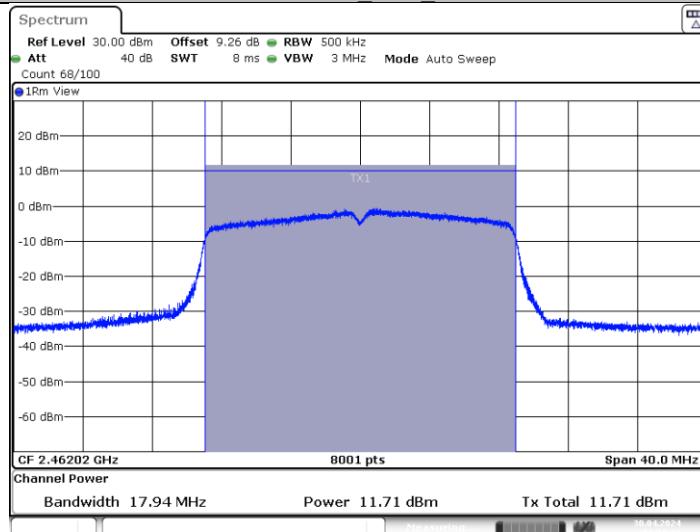


Date: 30.APR.2024 12:31:13

11N40SISO_Ant1_2422

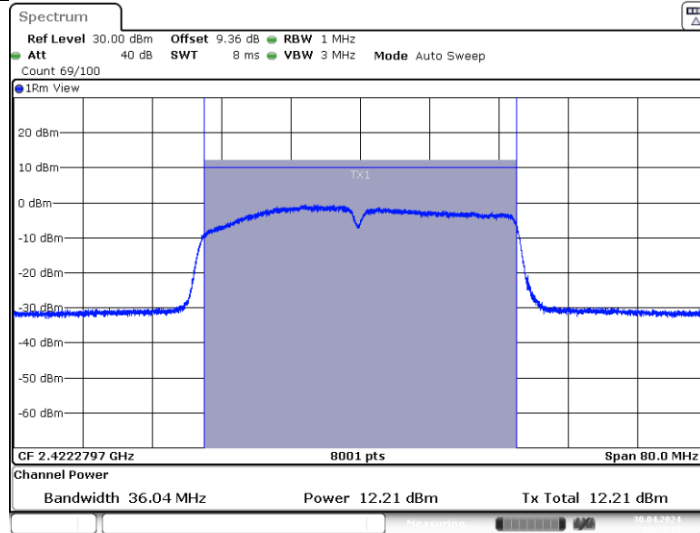


Date: 30.APR.2024 12:34:13

11N40SISO_Ant1_2437

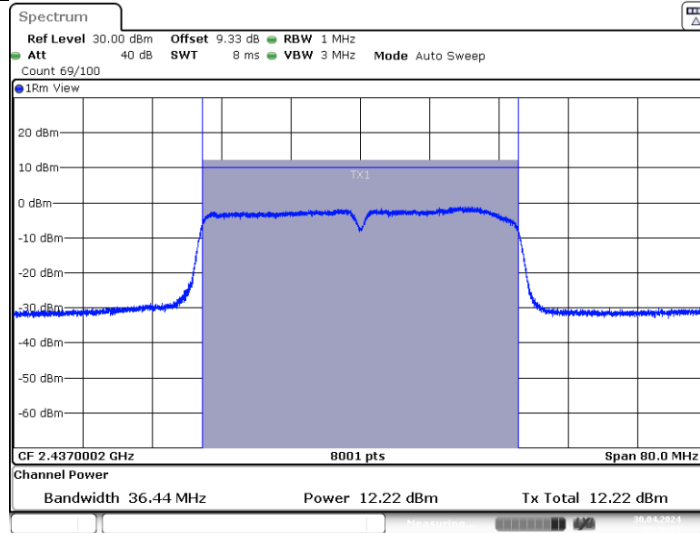

Date: 30.APR.2024 12:36:53

11N40SISO_Ant1_2452

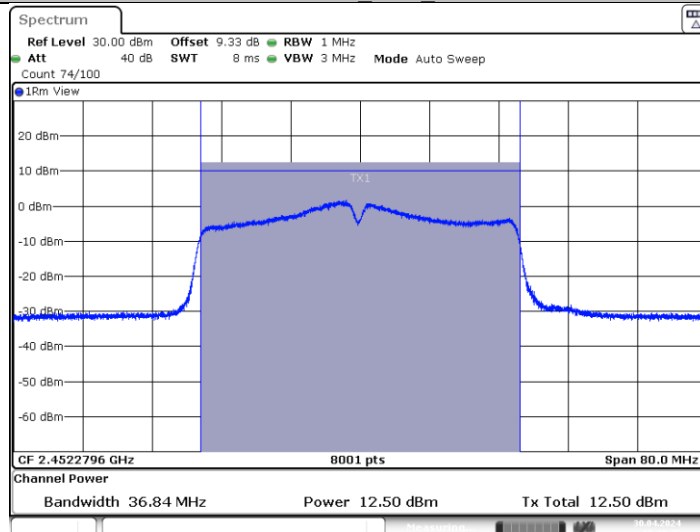

Date: 30.APR.2024 12:38:25


APPENDIXG - CONDUCTED SPURIOUS EMISSIONS

1. Conducted Spurious Emission


TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	30~1000	6.29	-54.55	≤-23.71	PASS
		1000~26500	6.29	-45.85	≤-23.71	PASS
	2437	30~1000	3.98	-55.3	≤-26.02	PASS
		1000~26500	3.98	-46.85	≤-26.02	PASS
	2462	30~1000	4.07	-54.3	≤-25.93	PASS
		1000~26500	4.07	-45.69	≤-25.93	PASS
11G	2412	30~1000	-0.34	-55.71	≤-30.34	PASS
		1000~26500	-0.34	-46.11	≤-30.34	PASS
	2437	30~1000	1.37	-56.29	≤-28.63	PASS
		1000~26500	1.37	-46.25	≤-28.63	PASS
	2462	30~1000	1.59	-54.7	≤-28.41	PASS
		1000~26500	1.59	-44.99	≤-28.41	PASS
11N20SISO	2412	30~1000	1.78	-55.54	≤-28.22	PASS
		1000~26500	1.78	-46.74	≤-28.22	PASS
	2437	30~1000	1.22	-54.64	≤-28.78	PASS
		1000~26500	1.22	-45.5	≤-28.78	PASS
	2462	30~1000	1.64	-55.92	≤-28.36	PASS
		1000~26500	1.64	-46.87	≤-28.36	PASS
11N40SISO	2422	30~1000	-0.58	-55.15	≤-30.58	PASS
		1000~26500	-0.58	-46.4	≤-30.58	PASS
	2437	30~1000	-1.67	-53.95	≤-31.67	PASS
		1000~26500	-1.67	-45.99	≤-31.67	PASS
	2452	30~1000	0.78	-54.15	≤-29.22	PASS
		1000~26500	0.78	-46.62	≤-29.22	PASS

Test Graphs


11B_Ant1_2412_30~1000

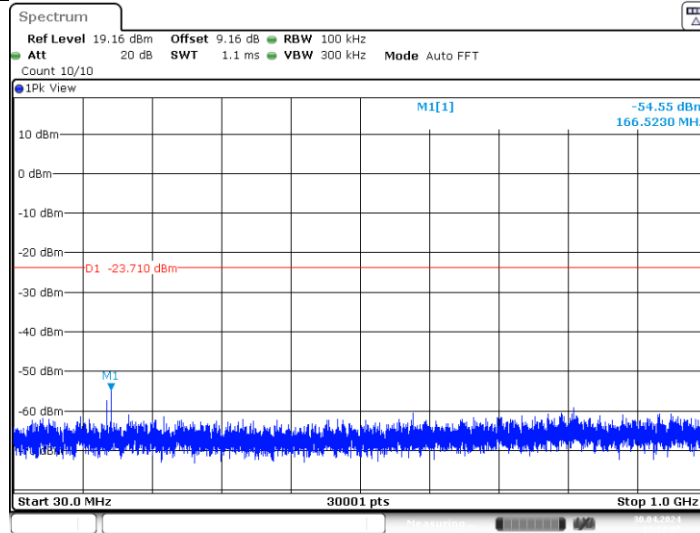


11B_Ant1_2412_1000~26500

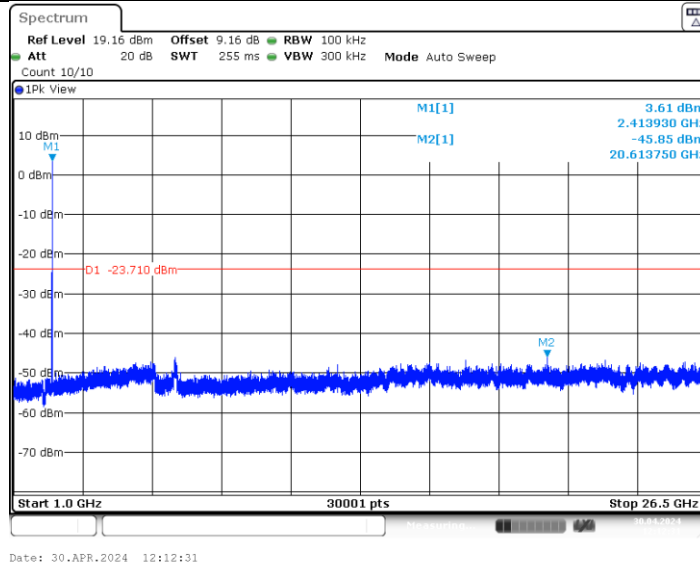


11B_Ant1_2437_30~1000

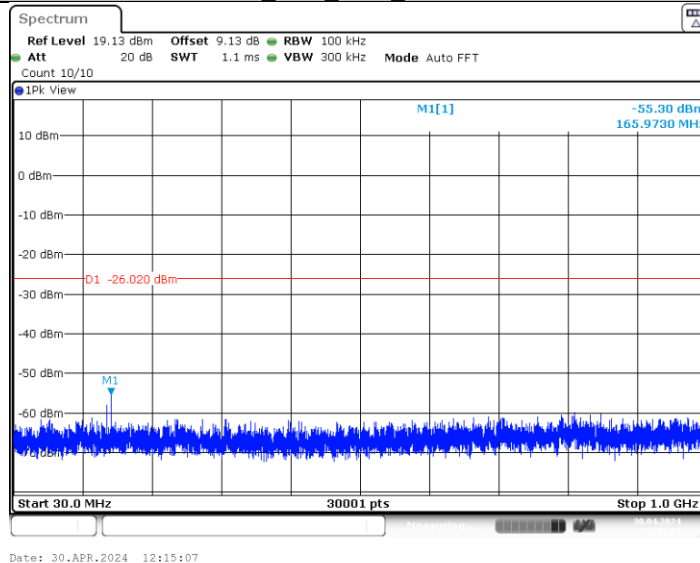


11B_Ant1_2437_1000~26500

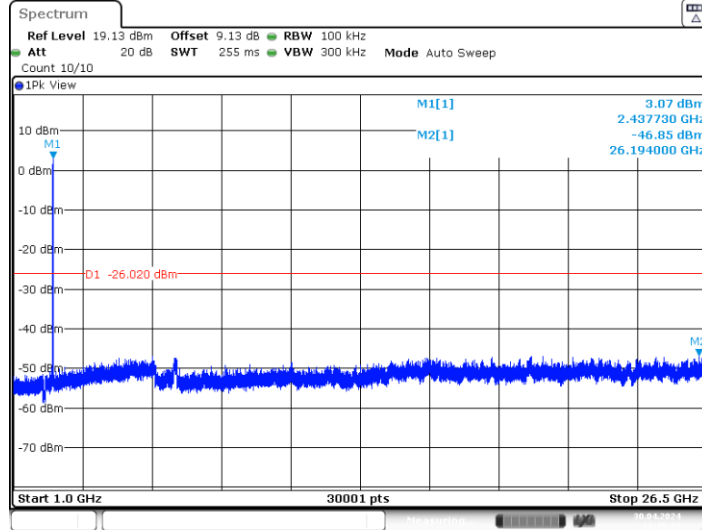


11B_Ant1_2462_30~1000

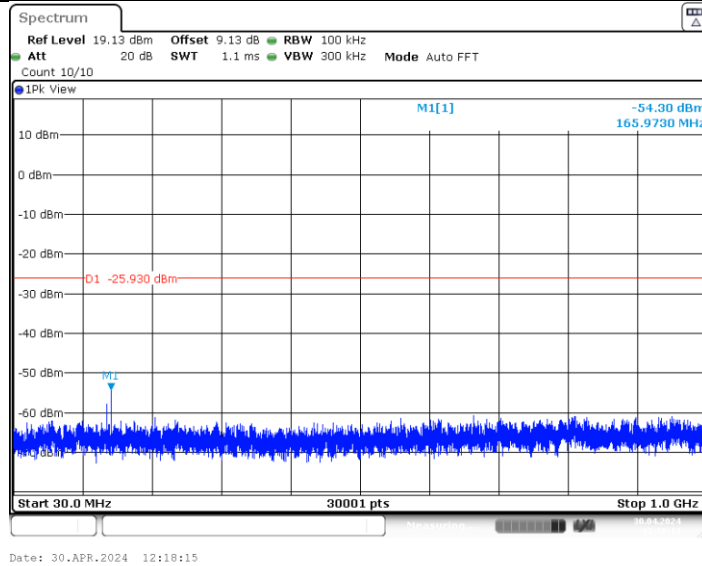

11B_Ant1_2462_1000~26500

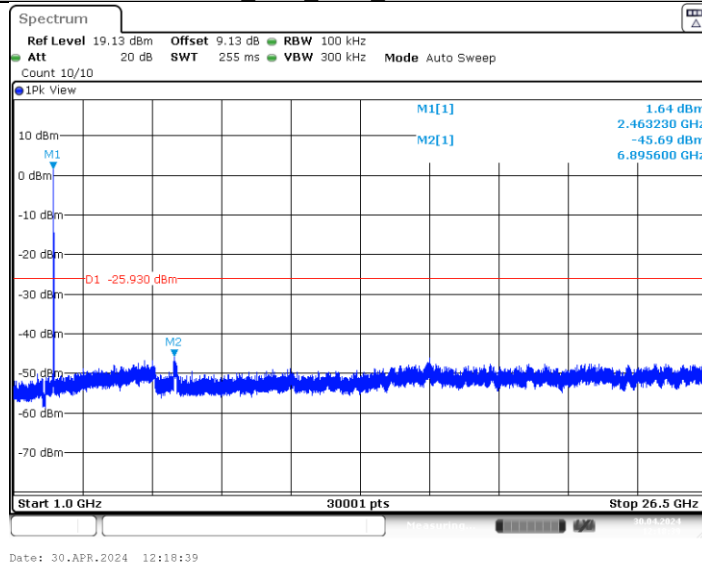


11G_Ant1_2412_30~1000

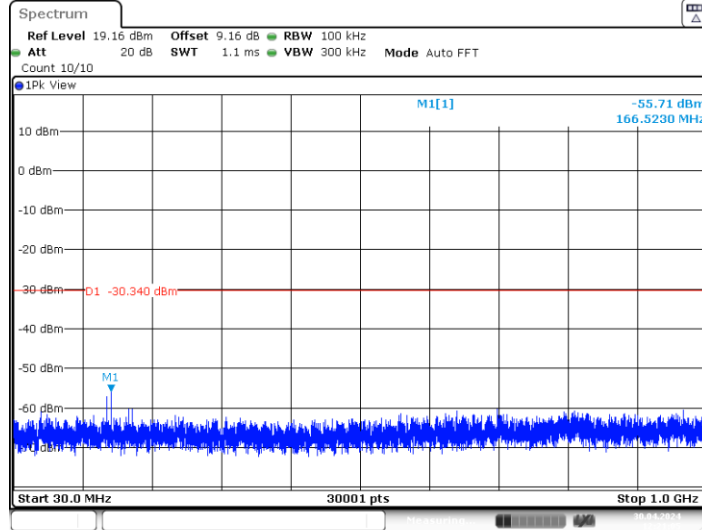


Date: 30.APR.2024 12:21:05

11G_Ant1_2412_1000~26500

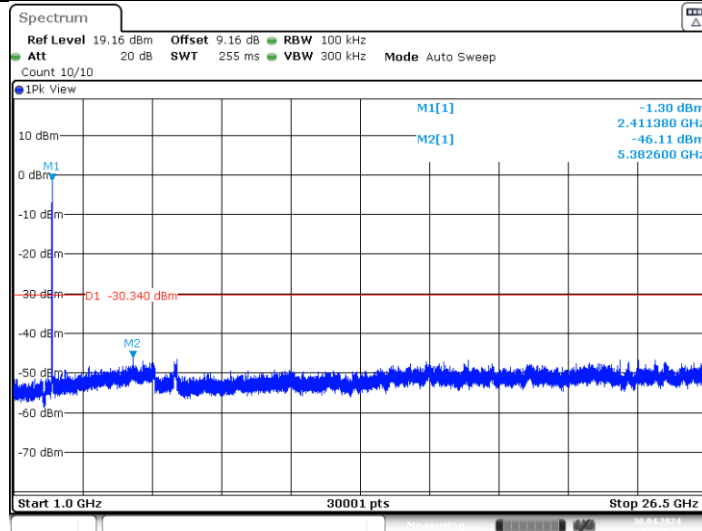


Date: 30.APR.2024 12:21:30

11G_Ant1_2437_30~1000

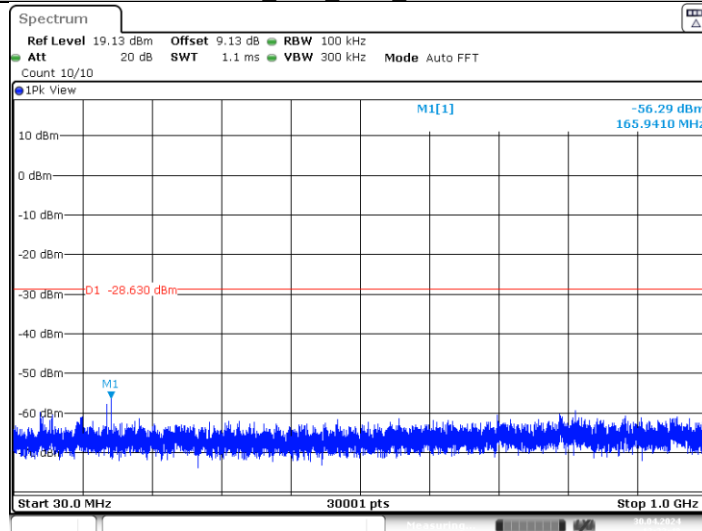


Date: 30.APR.2024 12:22:48


11G_Ant1_2437_1000~26500

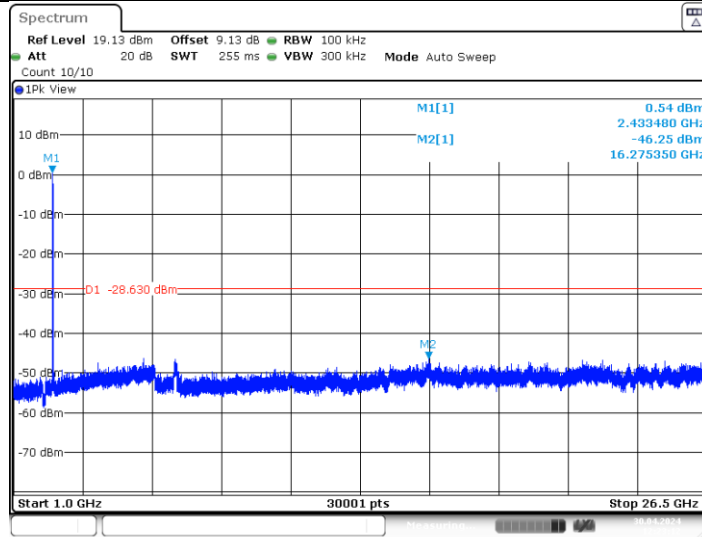


11G_Ant1_2462_30~1000

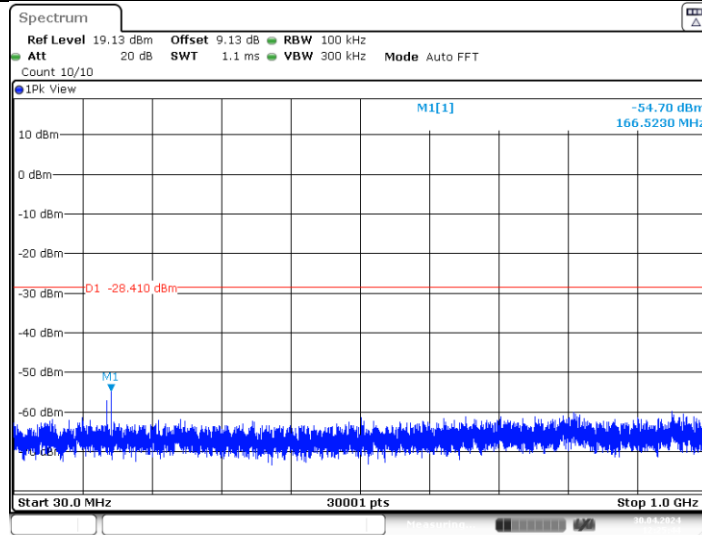

11G_Ant1_2462_1000~26500

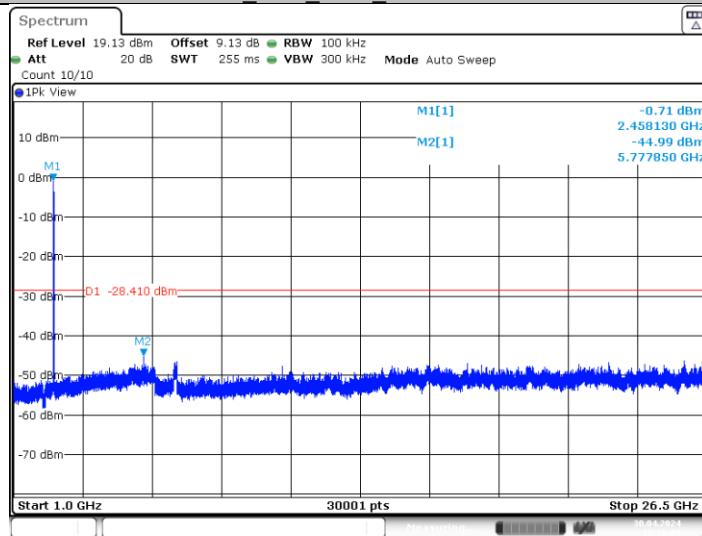


11N20SISO_Ant1_2412_30~1000

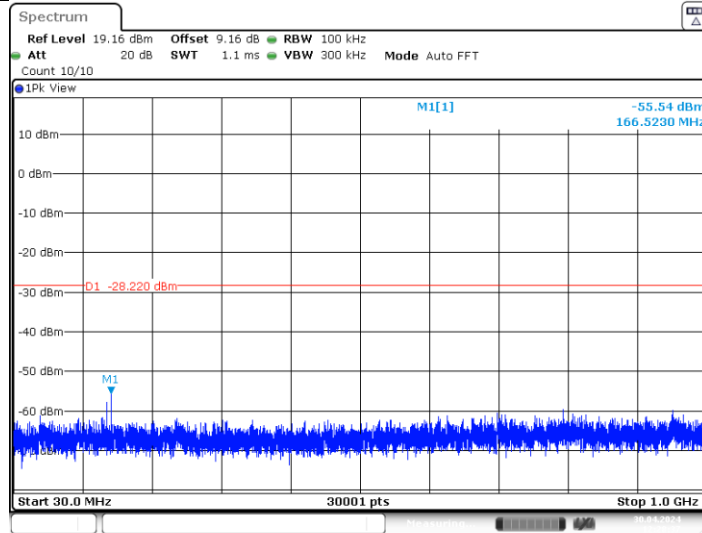


Date: 30.APR.2024 12:28:37

11N20SISO_Ant1_2412_1000~26500

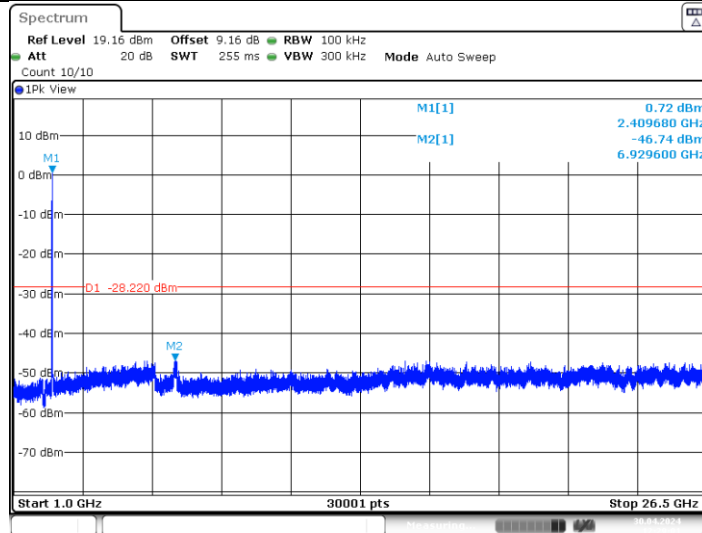


Date: 30.APR.2024 12:29:01

11N20SISO_Ant1_2437_30~1000

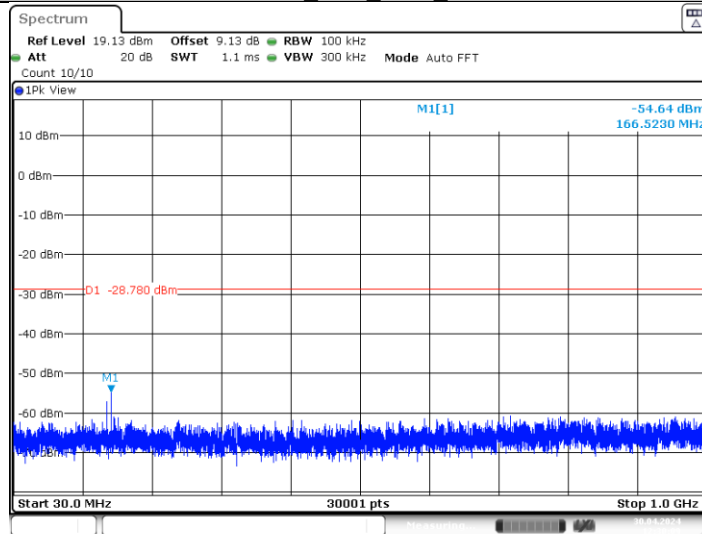


Date: 30.APR.2024 12:30:09


11N20SISO_Ant1_2437_1000~26500

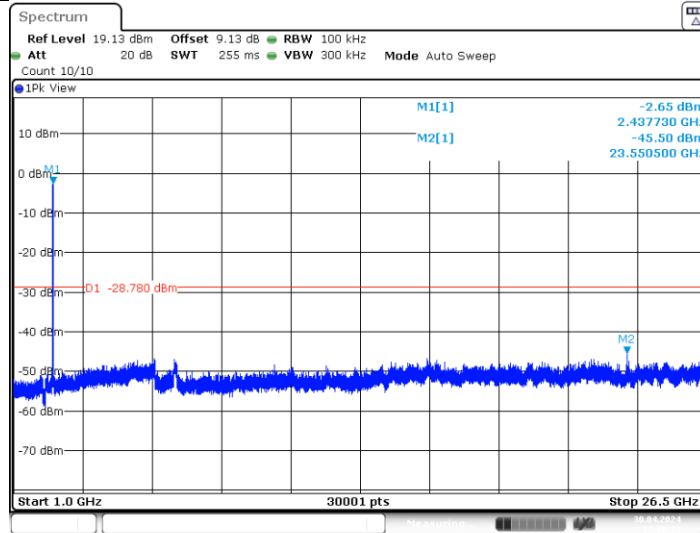


11N20SISO_Ant1_2462_30~1000

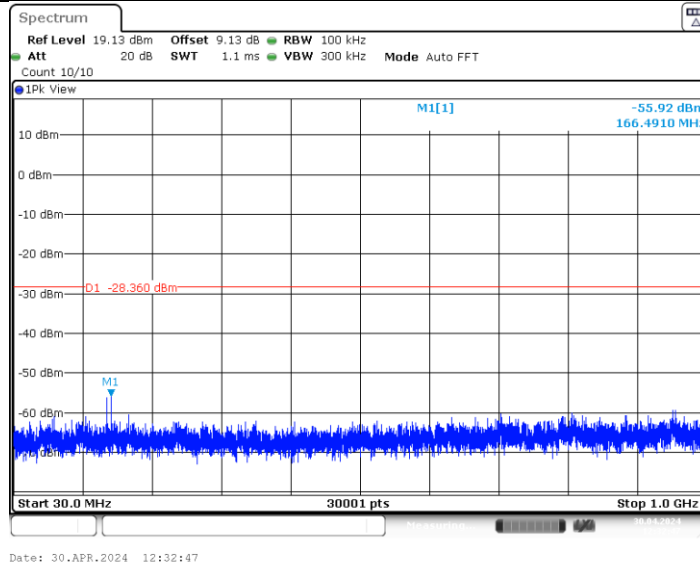

11N20SISO_Ant1_2462_1000~26500

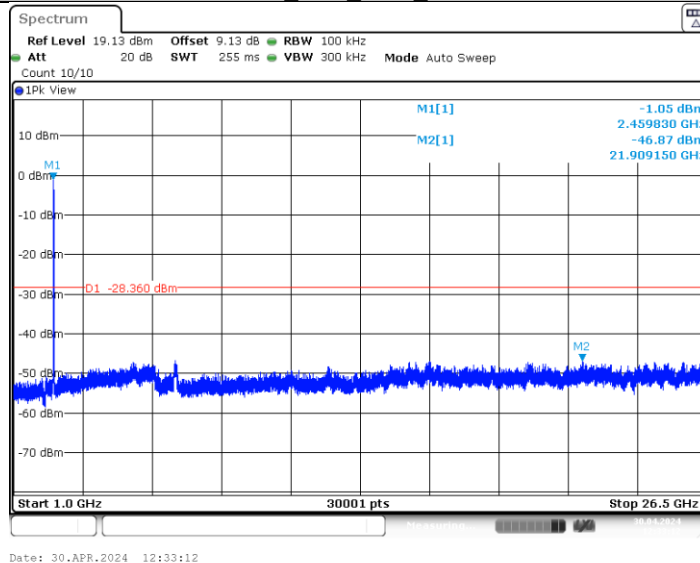


11N40SISO_Ant1_2422_30~1000

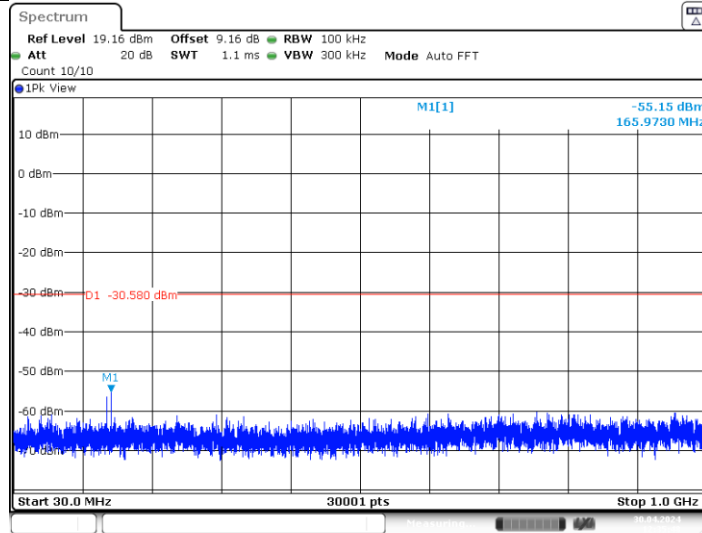


Date: 30.APR.2024 12:35:48

11N40SISO_Ant1_2422_1000~26500

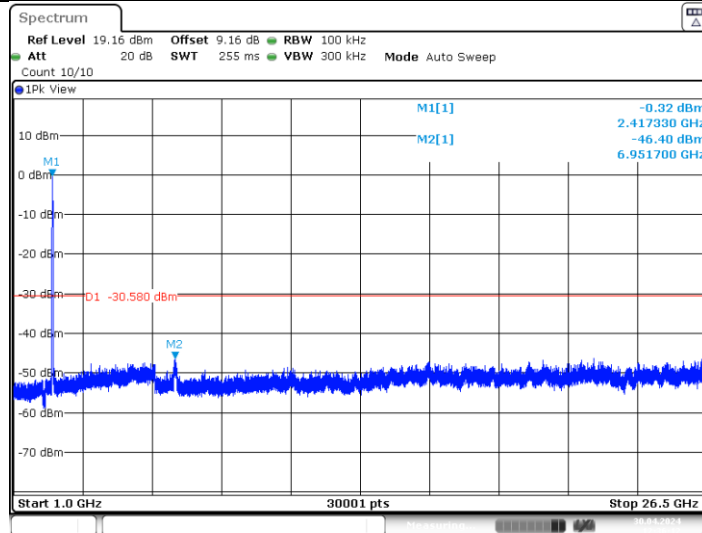


Date: 30.APR.2024 12:36:13

11N40SISO_Ant1_2437_30~1000

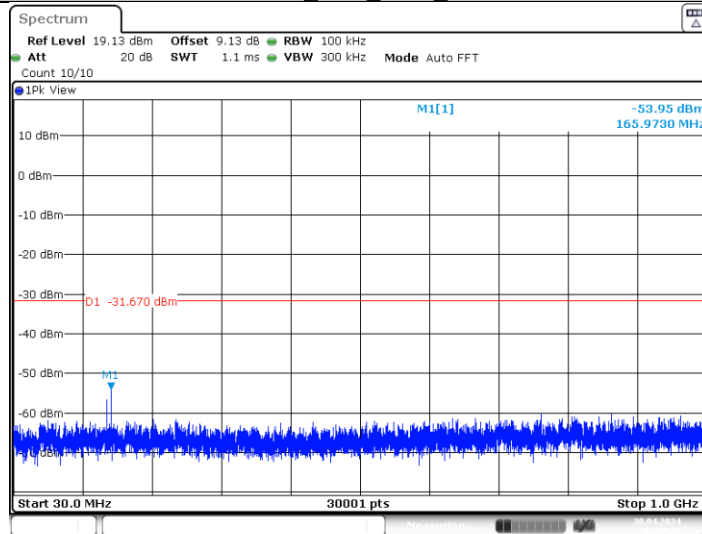


Date: 30.APR.2024 12:37:20


11N40SISO_Ant1_2437_1000~26500

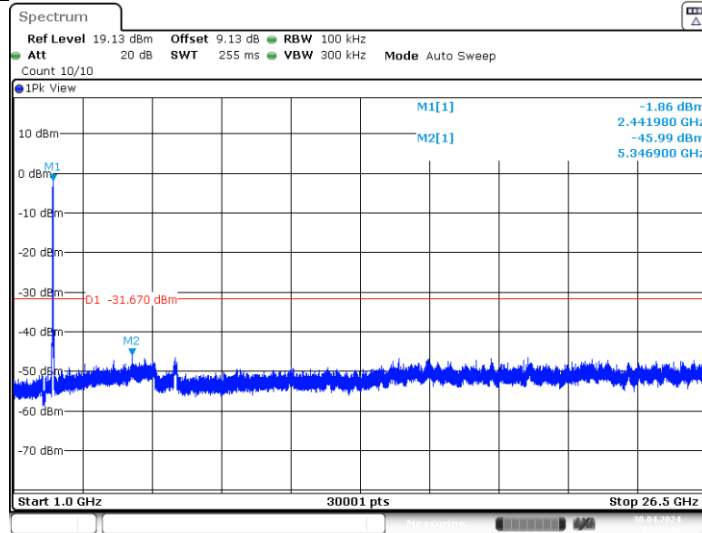

11N40SISO_Ant1_2452_30~1000

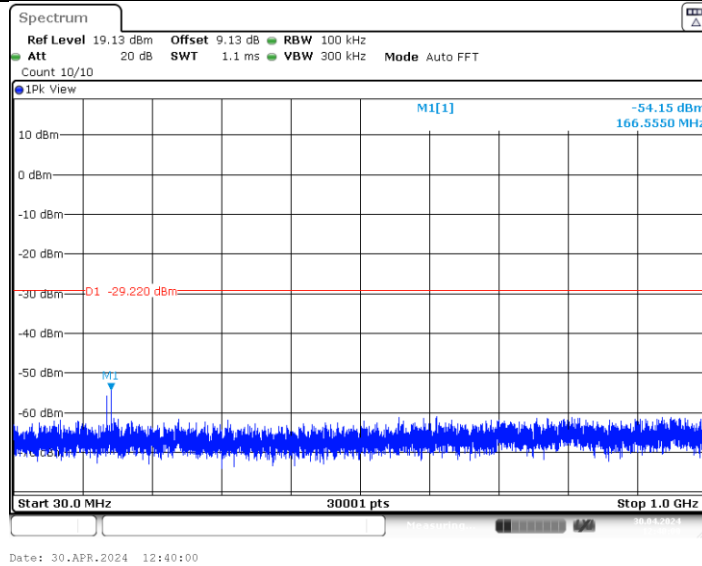

11N40SISO_Ant1_2452_1000~26500

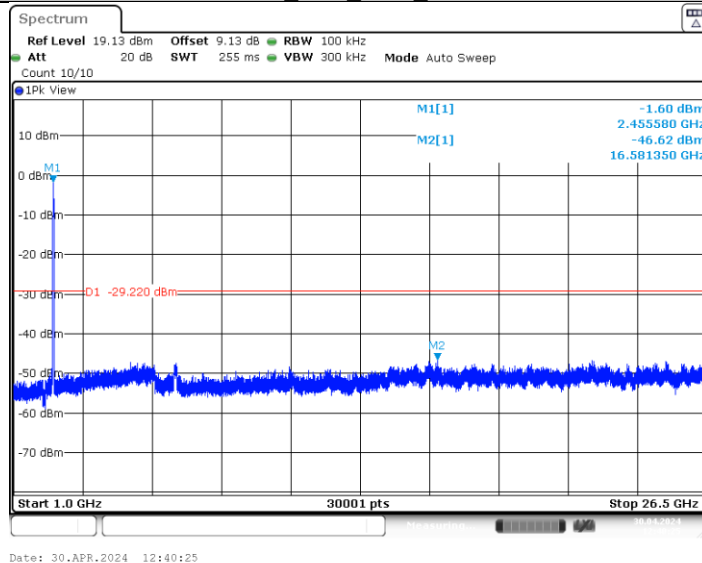


2. Band edge measurements

Reference level measurement

TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	2412	2411.49	6.29
	2437	2437.99	3.98
	2462	2461.49	4.07
11G	2412	2413.31	-0.34
	2437	2438.24	1.37
	2462	2463.24	1.59
11N20SISO	2412	2413.24	1.78
	2437	2438.26	1.22
	2462	2464.48	1.64
11N40SISO	2422	2416.99	-0.58
	2437	2449.47	-1.67
	2452	2449.50	0.78


TEST GRAPHS

11B_Ant1_2412

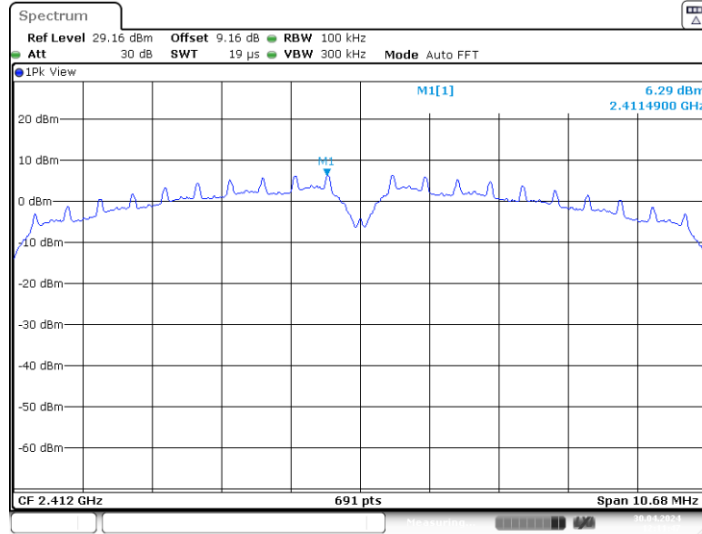


Date: 30.APR.2024 12:11:48

11B_Ant1_2437

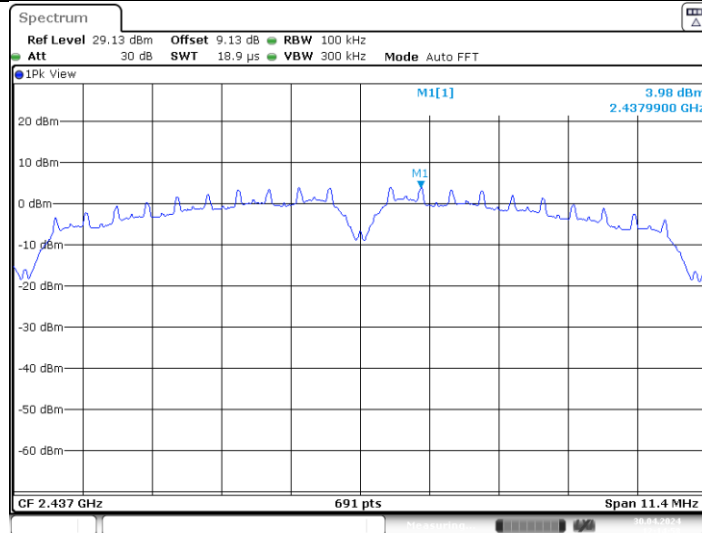


Date: 30.APR.2024 12:14:58

11B_Ant1_2462

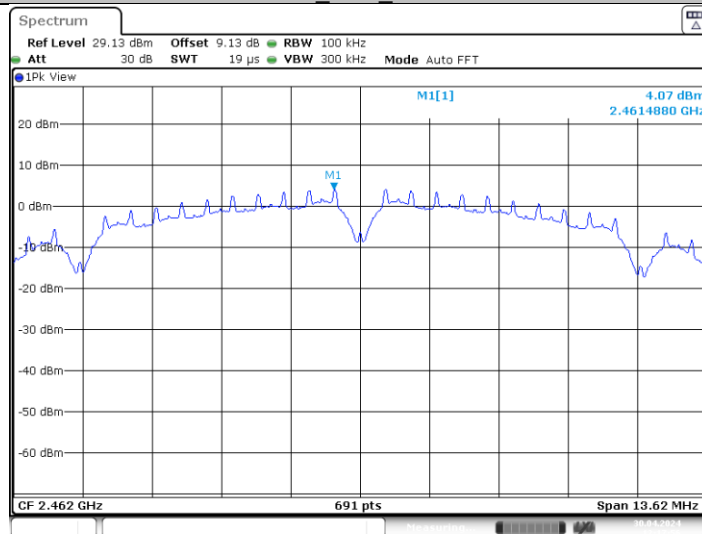


Date: 30.APR.2024 12:17:56


11G_Ant1_2412

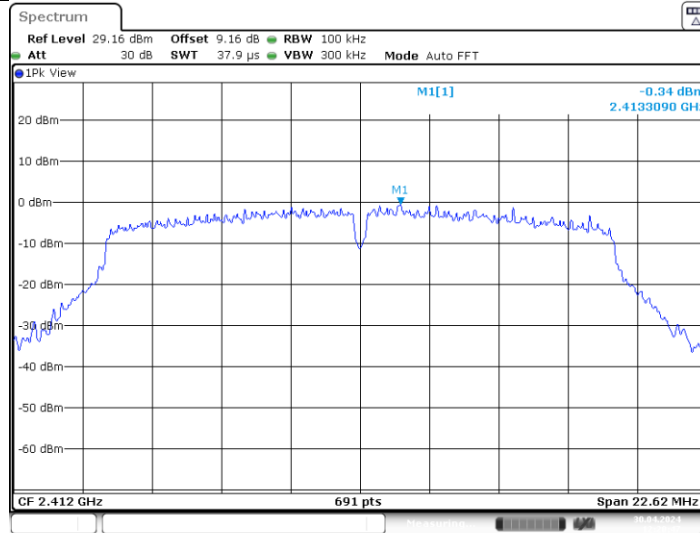


11G_Ant1_2437

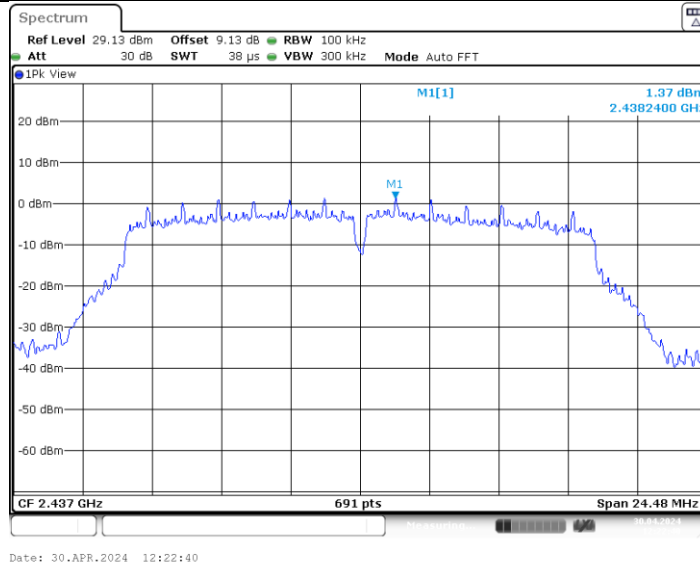


11G_Ant1_2462

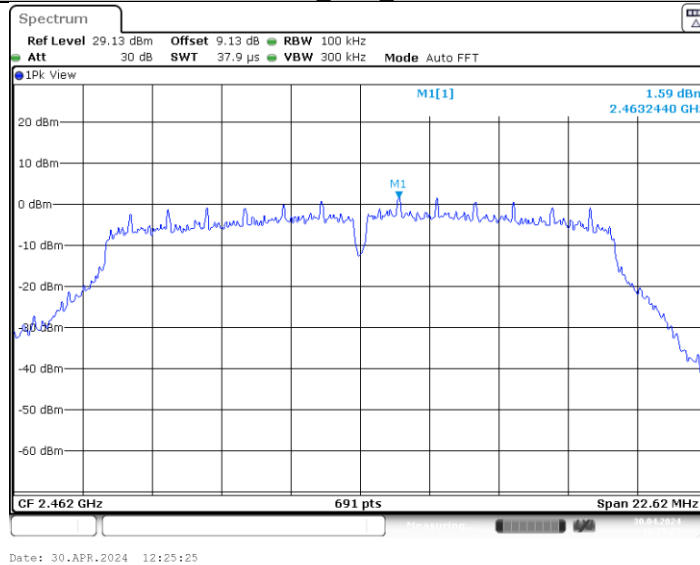


11N20SISO_Ant1_2412



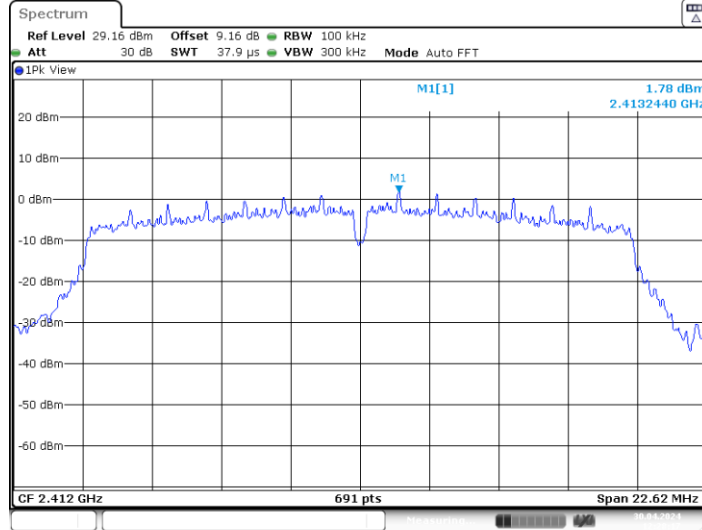


11N20SISO_Ant1_2437

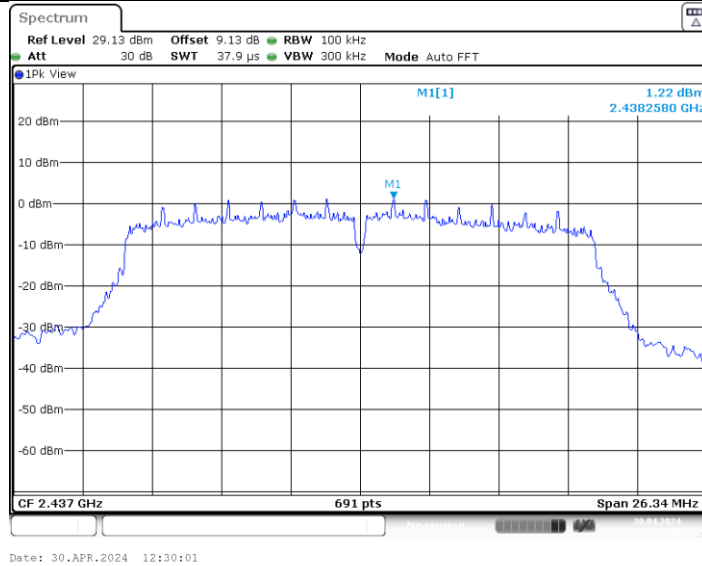

11N20SISO_Ant1_2462

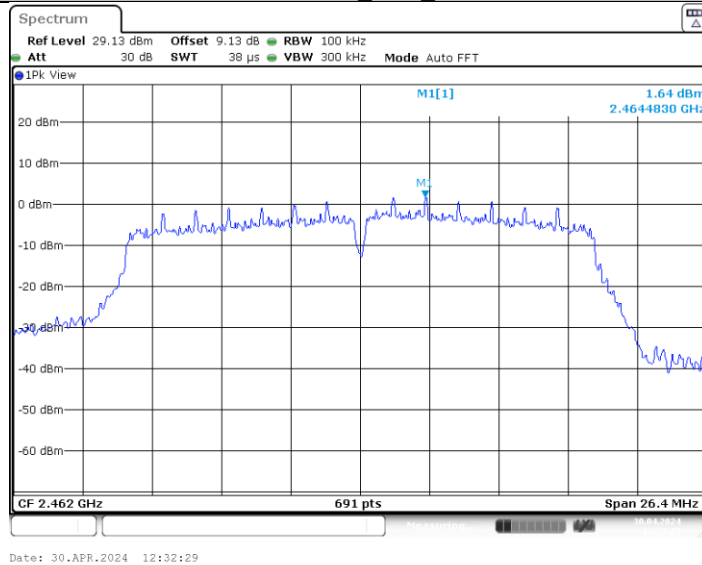

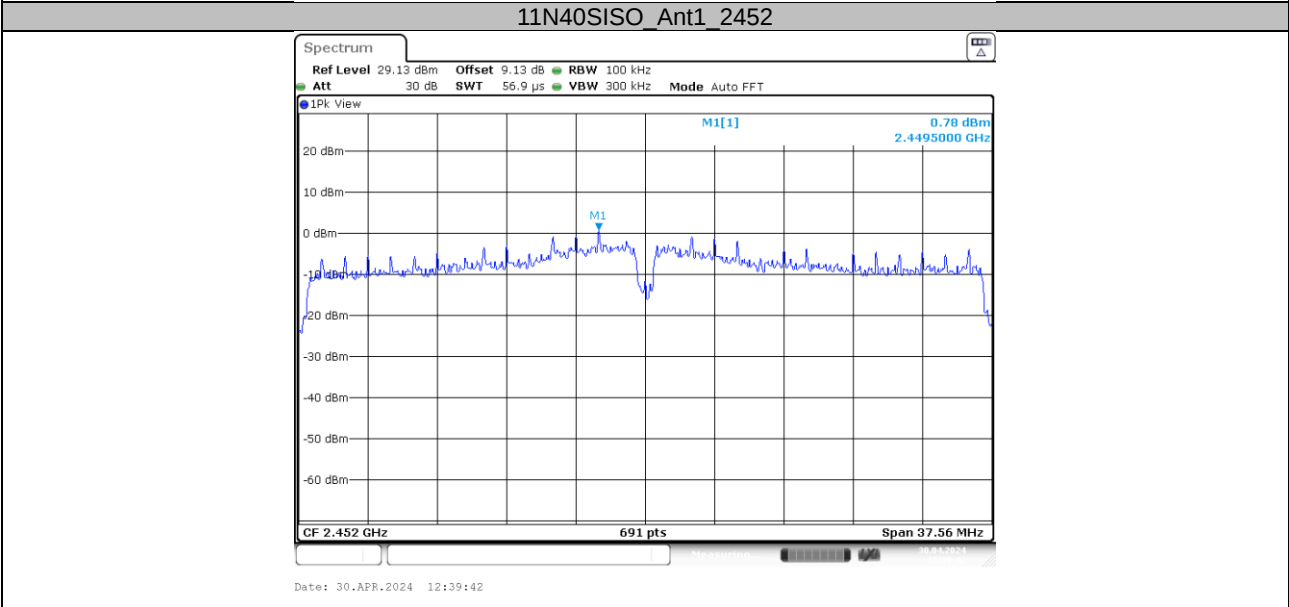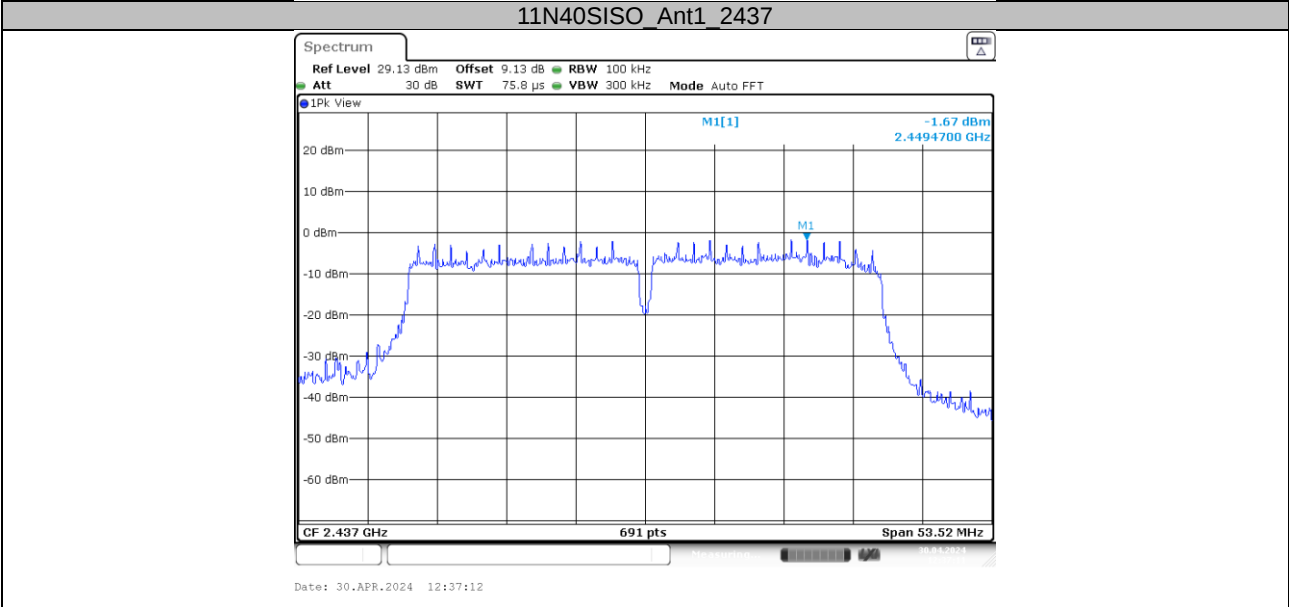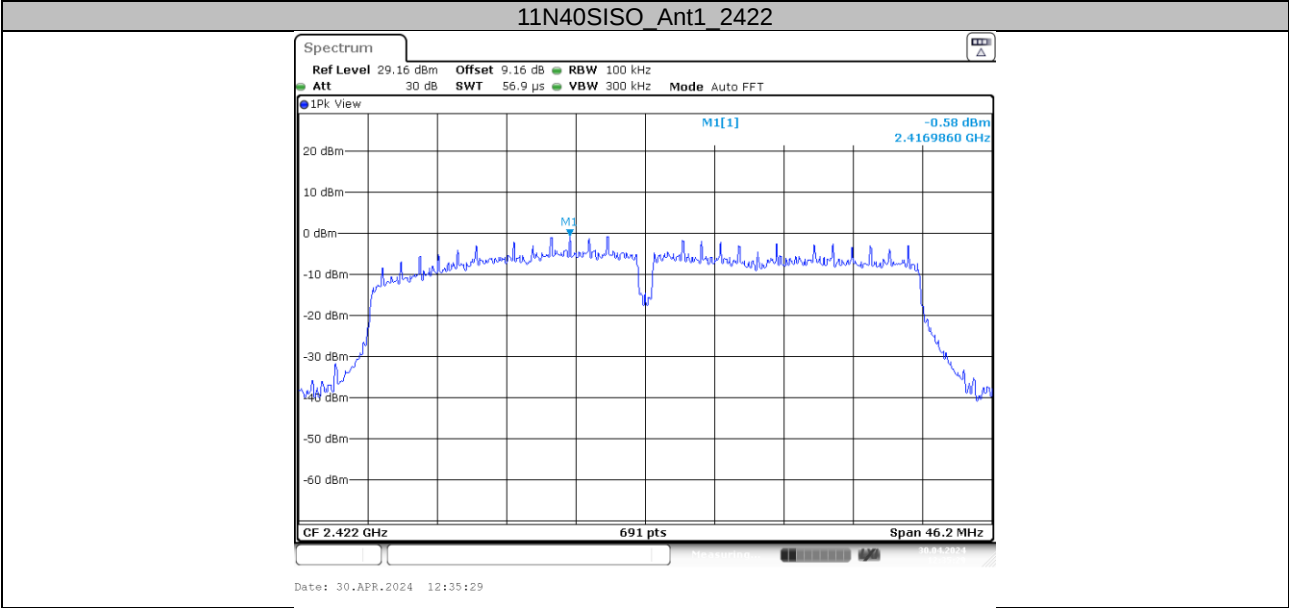


Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.


Band edge measurements

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	6.29	-45.3	≤-23.71	PASS
	High	2462	4.07	-47.29	≤-25.93	PASS
11G	Low	2412	-0.34	-31.3	≤-30.34	PASS
	High	2462	1.59	-48.7	≤-28.41	PASS
11N20SISO	Low	2412	1.78	-34.06	≤-28.22	PASS
	High	2462	1.64	-47.85	≤-28.36	PASS
11N40SISO	Low	2422	-0.58	-37.46	≤-30.58	PASS
	High	2452	0.78	-40.19	≤-29.22	PASS


11B_Ant1_Low_2412

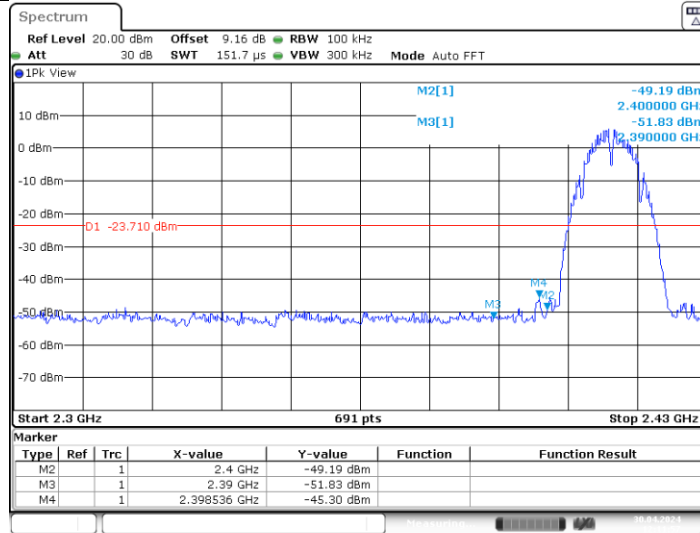


11B_Ant1_High_2462

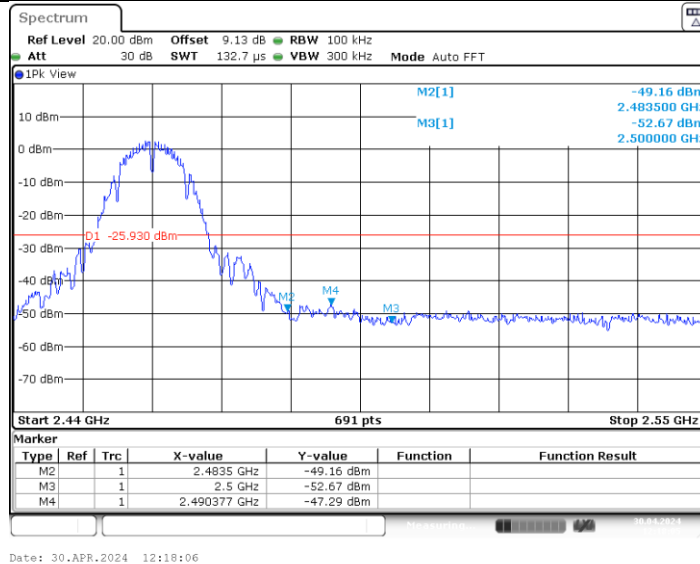


11G_Ant1_Low_2412

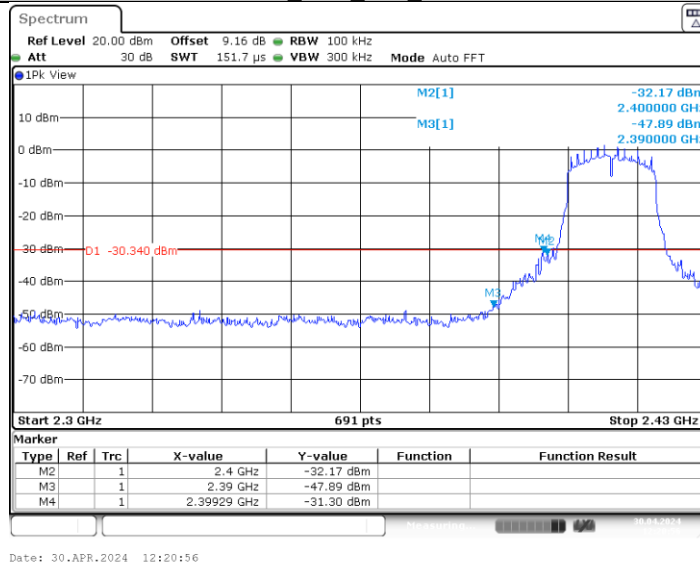


11G Ant1 High 2462

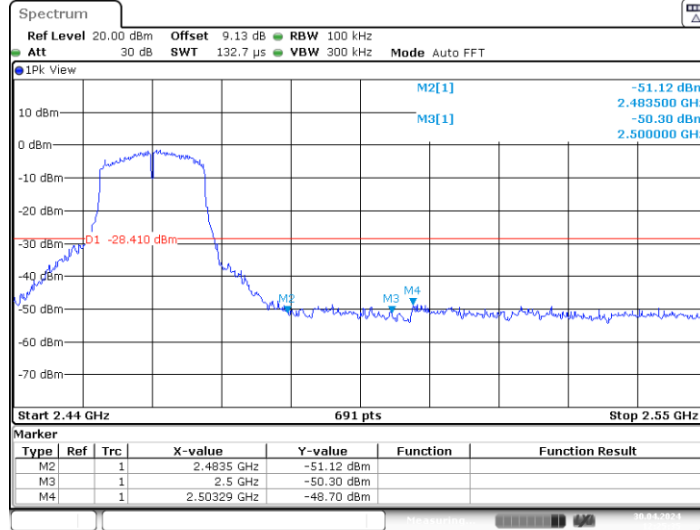


11N20SISO Ant1 Low 2412

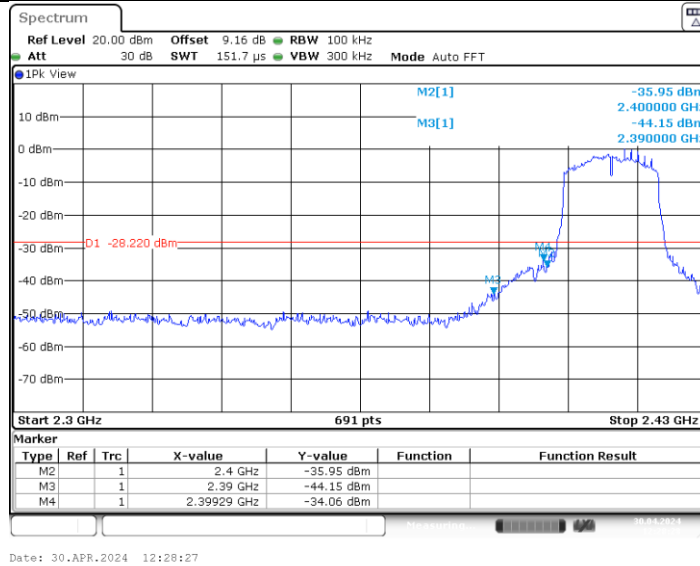

11N20SISO Ant1 High 2462

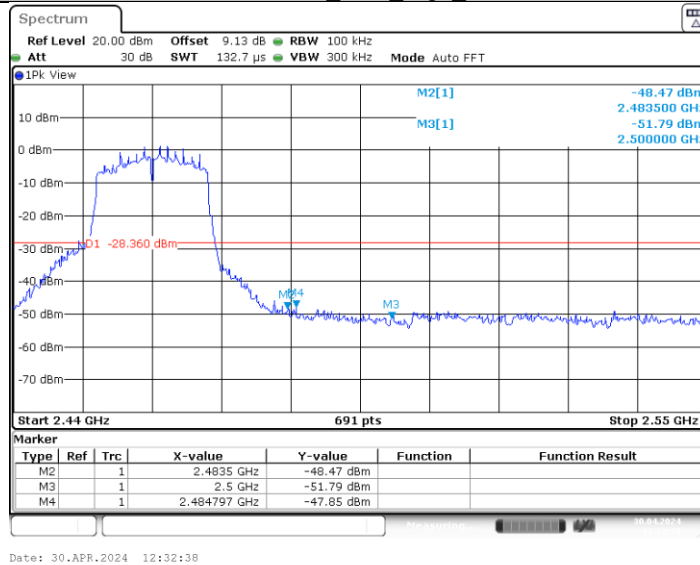

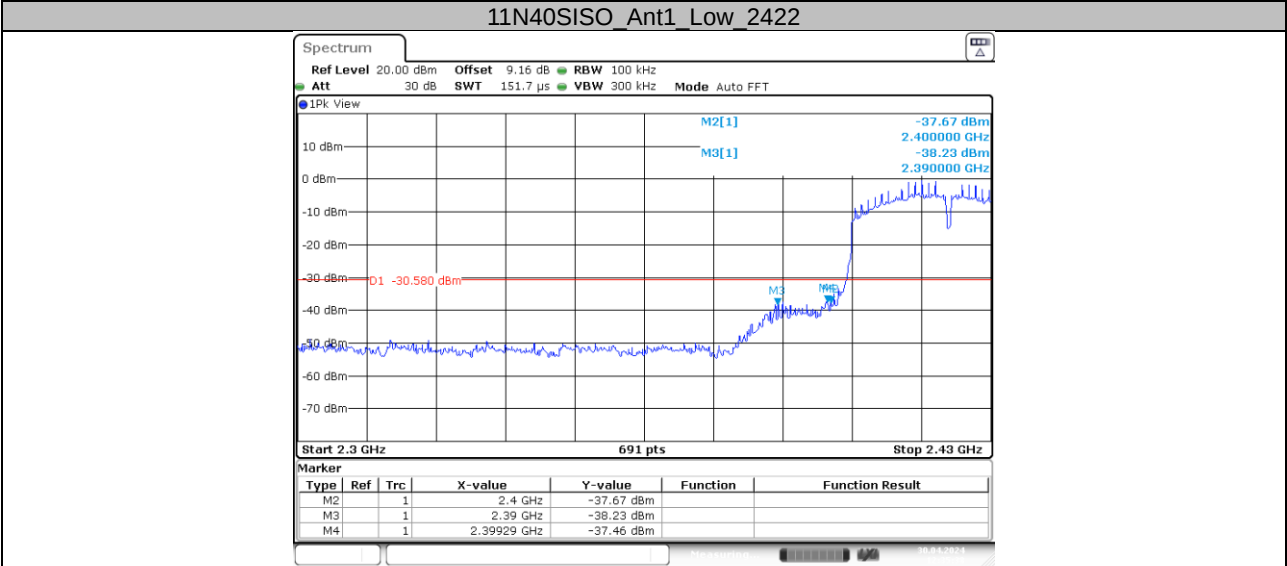


APPENDIXH - POWER SPECTRAL DENSITY

TestMode	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-17.83	≤8.00	PASS
	2437	-18.27	≤8.00	PASS
	2462	-18.80	≤8.00	PASS
11G	2412	-20.02	≤8.00	PASS
	2437	-20.36	≤8.00	PASS
	2462	-20.49	≤8.00	PASS
11N20SISO	2412	-20.03	≤8.00	PASS
	2437	-20.46	≤8.00	PASS
	2462	-19.89	≤8.00	PASS
11N40SISO	2422	-21.23	≤8.00	PASS
	2437	-21.93	≤8.00	PASS
	2452	-20.16	≤8.00	PASS


Test Graphs

11B_Ant1_2412

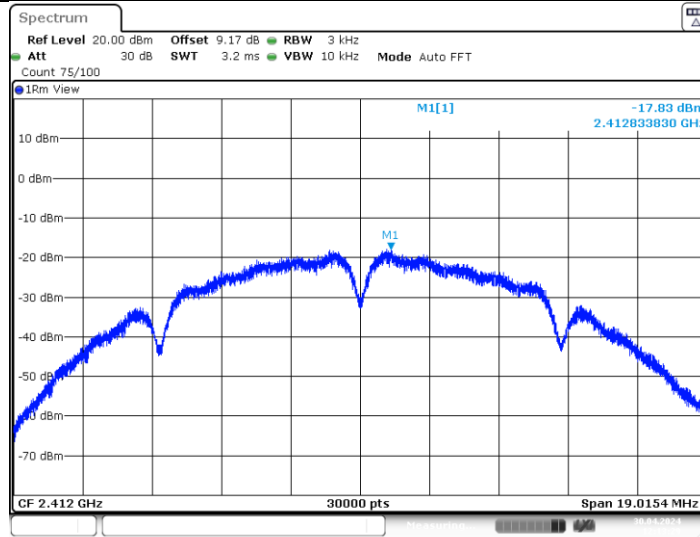


Date: 30.APR.2024 12:13:29

11B_Ant1_2437

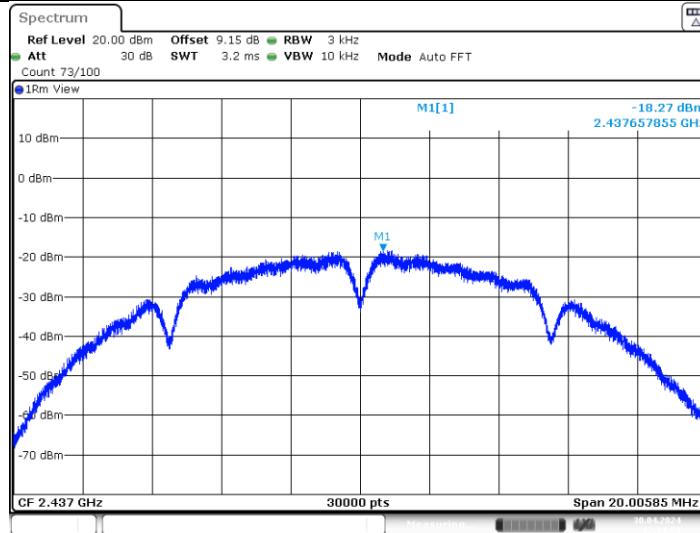


Date: 30.APR.2024 12:14:50

11B_Ant1_2462

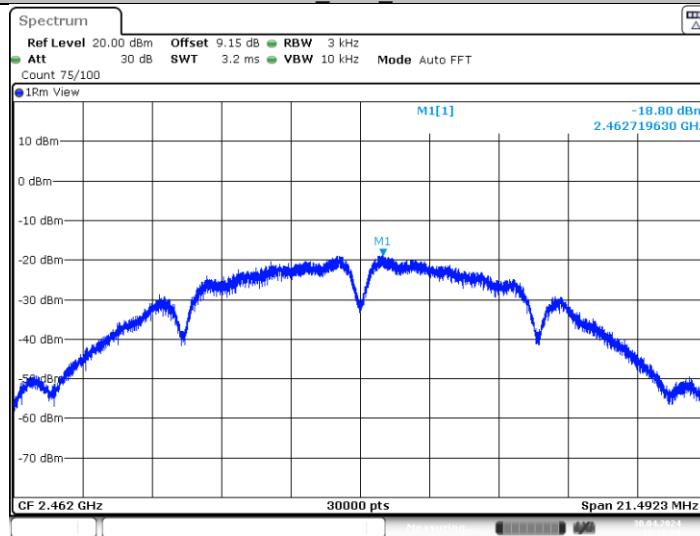


Date: 30.APR.2024 12:16:50

11G_Ant1_2412

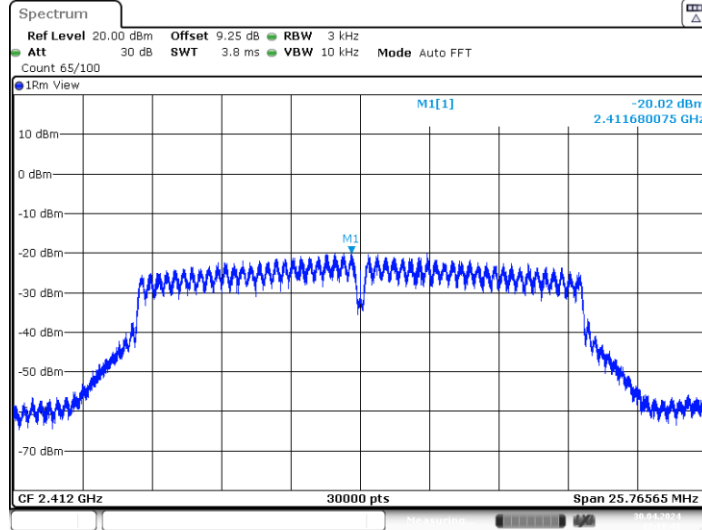


Date: 30.APR.2024 12:19:41

11G_Ant1_2437

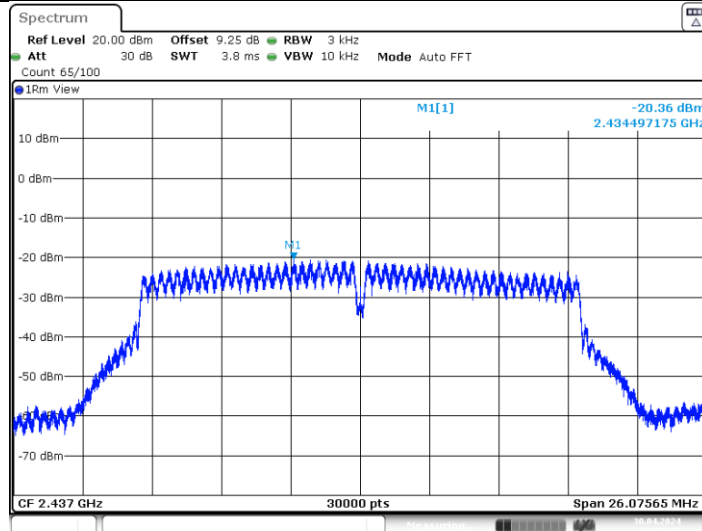


Date: 30.APR.2024 12:22:31

11G_Ant1_2462

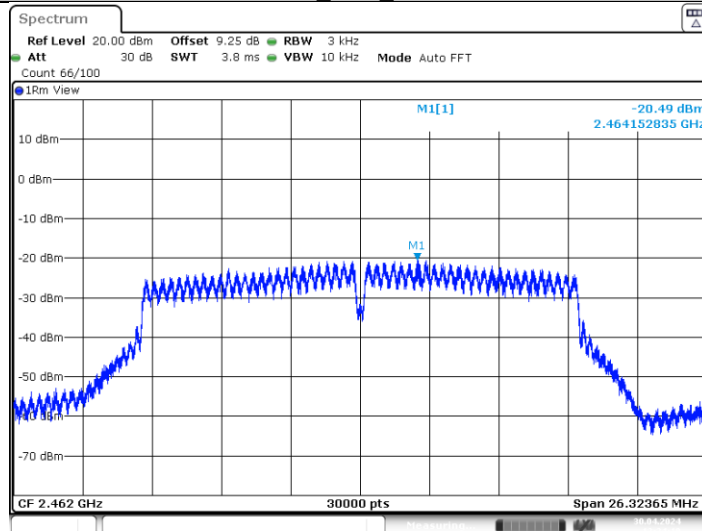


Date: 30.APR.2024 12:24:19

11N20SISO_Ant1_2412

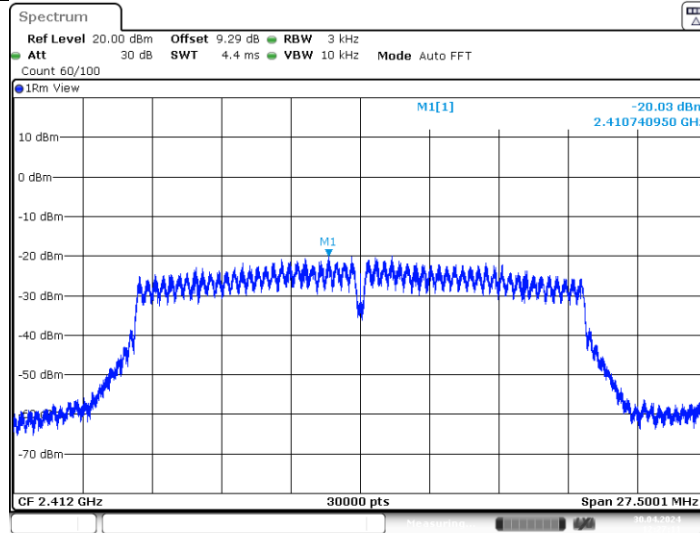


Date: 30.APR.2024 12:27:12

11N20SISO_Ant1_2437



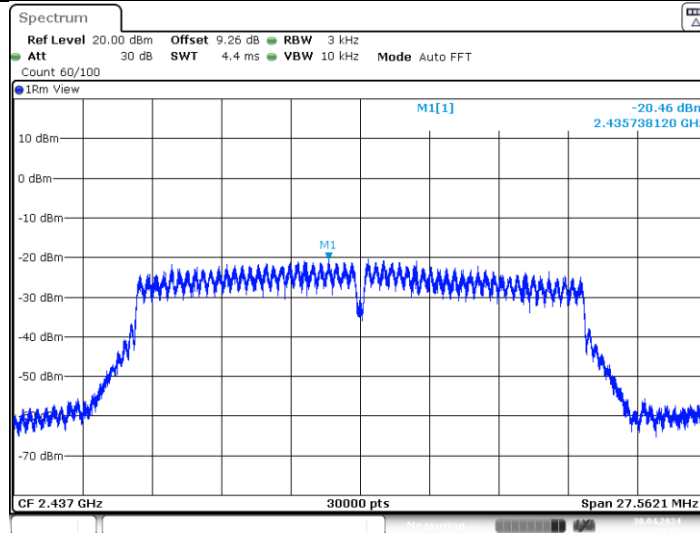


Date: 30.APR.2024 12:29:52

11N20SISO_Ant1_2462

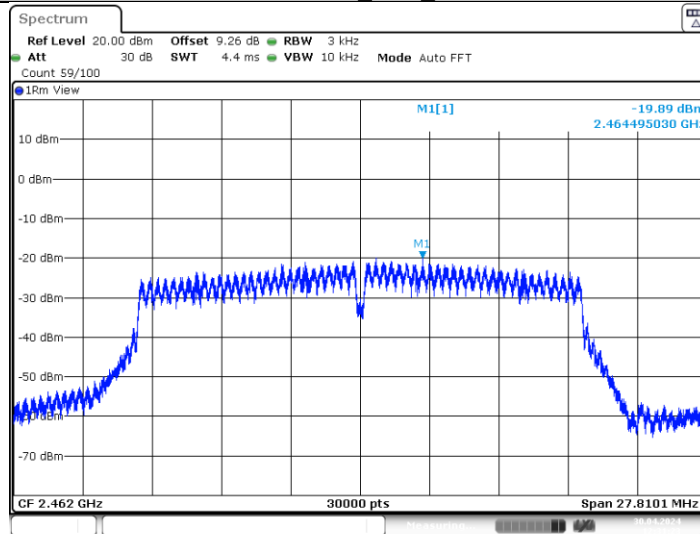

Date: 30.APR.2024 12:31:23

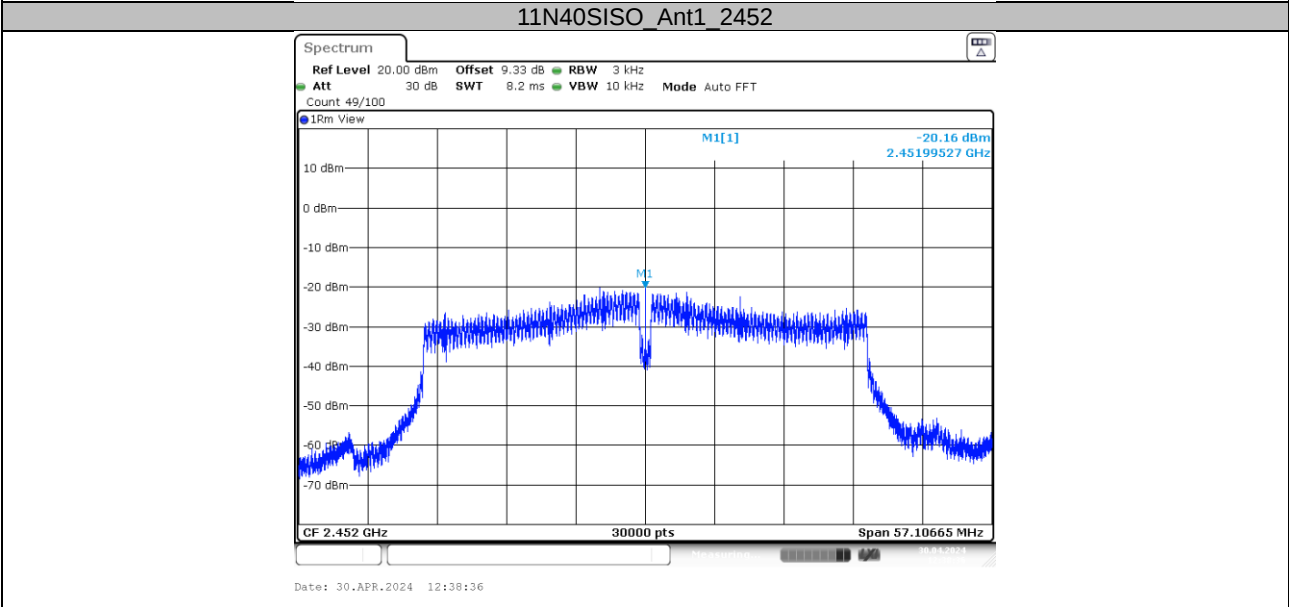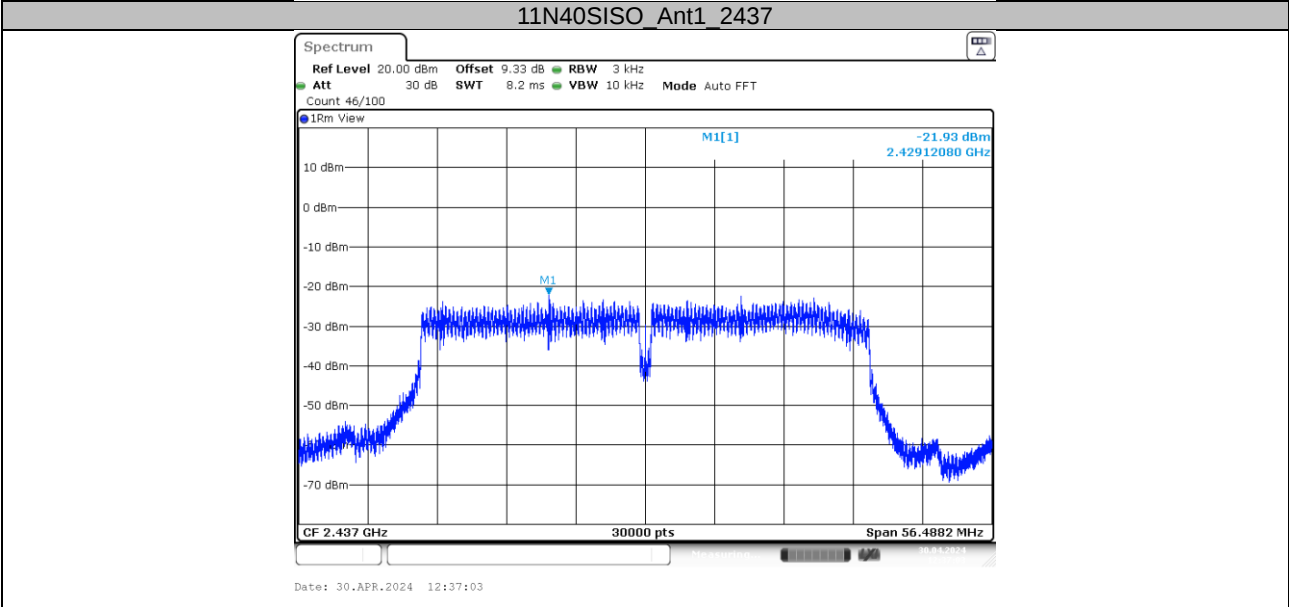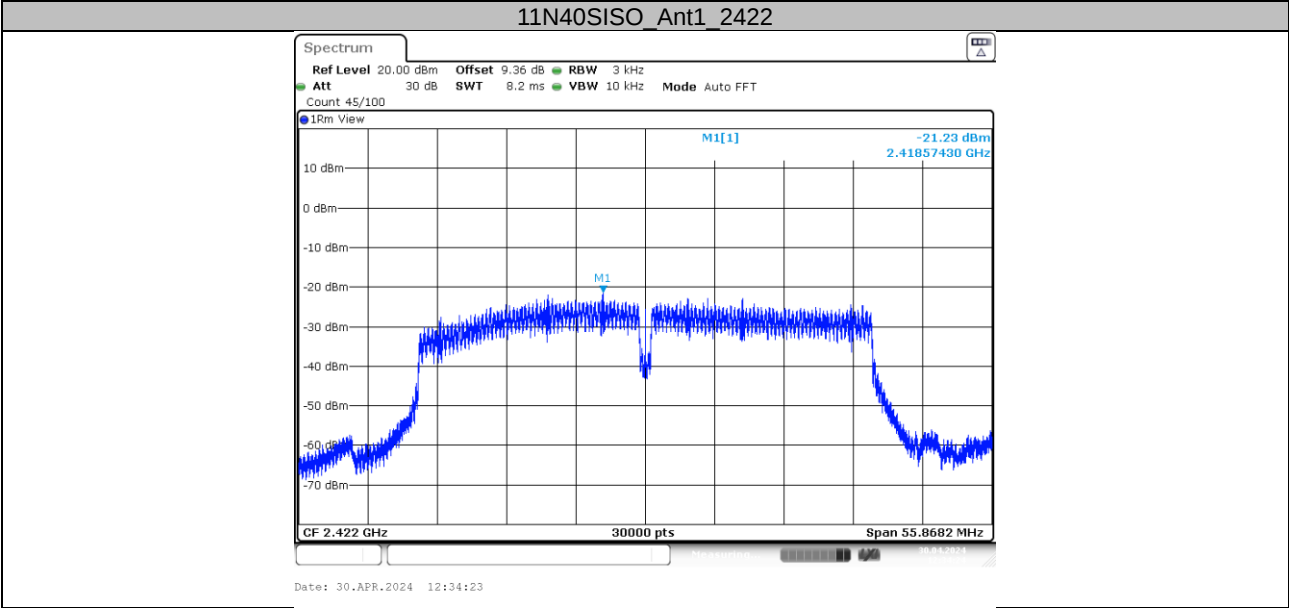

End of Test Report